

TEST REPORT

Product Name : Electric Fireplace
Model Number : HE6-LE
FCC ID : 2A2IZ-HE6LE

Prepared for : Charlton & Jenrick Ltd.
Address : Unit D, Stafford Park 2, Telford Shropshire TF3 3AR
United Kingdom

Prepared by : EMTEK (NINGBO) CO., LTD.
Address : No. 8, Building 8, Lane 216, Qingyi Road, Ningbo
High-Tech Zone, Ningbo, Zhejiang, China

Tel: +86-574-27907998
Fax: +86-574-27721538

Report Number : ENB2603120248W00501R
Date(s) of Tests : March 12, 2026 to April 22, 2026
Date of issue : April 22, 2026

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	3
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2 MEASUREMENT EQUIPMENT USED	7
4.3 DESCRIPTION OF TEST MODES	9
5 FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT	10
5.3 LABORATORY ACCREDITATIONS AND LISTINGS	10
6 TEST SYSTEM UNCERTAINTY	11
7 SETUP OF EQUIPMENT UNDER TEST	12
7.1 RADIO FREQUENCY TEST SETUP 1	12
7.2 RADIO FREQUENCY TEST SETUP 2	12
7.3 CONDUCTED EMISSION TEST SETUP	15
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	16
7.5 SUPPORT EQUIPMENT	16
8 TEST REQUIREMENTS	17
8.1 DTS 6DB BANDWIDTH	17
8.2 DTS 99%BANDWIDTH	21
8.3 MAXIMUM AVG CONDUCTED OUTPUT POWER	25
8.4 MAXIMUM POWER SPECTRAL DENSITY	27
8.5 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	31
8.6 RADIATED SPURIOUS EMISSION	45
8.7 CONDUCTED EMISSION TEST	64
8.8 ANTENNA APPLICATION	71

1 TEST RESULT CERTIFICATION

Applicant	:	Charlton & Jenrick Ltd.
Address	:	Unit D, Stafford Park 2, Telford Shropshire TF3 3AR United Kingdom
Manufacturer	:	Ningbo Richen Electrical Appliance Co., Ltd.
Address	:	No.19 Yongdinghe Road,Xiapu,Beilun,Ningbo,315807 Zhejiang,P.R.China
EUT	:	Electric Fireplace
Model Name	:	HE6-LE
Trademark	:	N/A

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK(NINGBO) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2020) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : March 12, 2026 to April 22, 2026

Prepared by : WK Luo
WK Luo /Engineer

Reviewer : June Gao
June Gao /Supervisor

Approved & Authorized Signer : Tony Wei
Tony Wei /Manager

Modified History

Version	Report No.	Revision Date	Summary
/	ENB2603120248W00501R	/	Original Report



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product:	Electric Fireplace
Model Number:	HE6-LE
IEEE 802.11 WLAN Mode Supported:	802.11b 802.11g 802.11n(20MHz channel bandwidth)
Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20);
Number of Channels:	11 Channels for 802.11b/g/n(HT20);
Antenna Port:	SISO
Antenna Type:	PCB Antenna
Antenna Gain:	2.54 dBi
Test Voltage:	AC 120V/60Hz AC 240V/60Hz
Temperature Range:	-40 °C ~ +105 °C
Software Version:	V02.003
Hardware Version:	V3.1.23

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
	NOTE1:N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for **FCC ID: 2A2IZ-HE6LE** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

4.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

Equ. No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
ENE-001	EMI Test Receiver	R & S	ESCI	101108	Oct. 24, 2025	1 Year
ENE-336	L.I.S.N	Schwarzbeck	NSLK 8126	8126-05059	June 18, 2025	1 Year
ENE-159	Pulse Limiter	Schwarzbeck	VTSD 9561F-N	2611115-001-0033	Oct. 23, 2025	1 Year
ENE-278	RF Switching Unit	HTEC	HRSU	222101	June 19, 2025	1 Year
ENE-149	Conduction Test Room 1#	SKET	11.5*5*4m	/	March 05, 2025	3 Year

For Spurious Emissions Test

Equ. No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
ENE-185	EMI Test Receiver	R&S	ESR7	102480	March 02, 2026	1 Year
ENE-188	Low Frequency Field Antenna	Schwarzbeck	FMZB 1513-60	00026	June 26, 2025	3 Year
ENE-190	Antenna Multiple	Schwarzbeck	VULB 9163	01499	March 09, 2025	3 Year
ENE-195	Pre-Amplifier	JS Denki	PA09K03-40	JSPA21019	March 02, 2026	1 Year
ENE-204	Low Frequency Notch Filter RF Switching	JS Denki	JSDSW-F	JSDSW2211 D02	March 02, 2026	1 Year
ENE-251	6dB Attenuator	Mini-Circuits	UNAT-6+	11542	June 18, 2025	1 Year
ENE-144	3-Meter Anechoic Chamber2#	SKET	9*6*6m	/	June 21, 2025	3 Year
ENE-171	EXA Signal Analyzer	KEYSIGHT	N9010B	MY60242467	Oct. 24, 2025	1 Year
ENE-191	Horn Antenna	Schwarzbeck	BBHA 9120 D	02588	March 09, 2025	3 Year
ENE-198	Pre-Amplifier	JS Denki	PA0118-50	JSPA21022	March 02, 2026	1 Year
ENE-206	High Frequency Notch FilterRf Switching	JS Denki	JSDSW-F	202083582	March 02, 2026	1 Year

For other test items:

Equ. No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
ENE-253	EXG Analog Singnal Generator	Keysight	N5173B	MY61253062	June 19, 2025	1 Year
ENE-254	MXG Vector Singnal Generator	Keysight	N5182B	MY61350131	June 19, 2025	1 Year
ENE-255	Frepquency Extender	Keysight	N5183BX07	MY61500104	June 19, 2025	1 Year
ENE-256	EXA Signal Anaalyzer	Keysight	N9010B	MY62060219	June 19, 2025	1 Year
ENE-257	WIRELESS CONNECTIVITY TESTER	ROHDE & SCHWARZ	CMW 270	1201.0002 K75-102608-Pb	June 19, 2025	1 Year
ENE-172	RF Control Unit	Tonscend	JS0806-2(V.6 E)	21L8060521	March 02, 2026	1 Year
ENE-092	DC Power Supply	KEFUNA	KDP3603	2004D3062946	June 19, 2025	1 Year
ENE-093	Attenuator 10dB	talent Microwave	TA10A2-S-18	N/A	June 19, 2025	1 Year
ENE-094	Attenuator 20dB	talent Microwave	TA20A2-S-18	N/A	June 19, 2025	1 Year

Note: No tests were conducted on March 2nd and March 9th.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n(HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n(HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Multi-antenna correlation:

☐	Transmit Signals are Correlated
	Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})^2 / N_{ANT}]$ dBi
☐	All Transmit Signals are Completely Uncorrelated
	Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi
Directional gain = $10 \log [(10^{1.67/20} + 10^{1.24/20})^2 / 2]$ dBi=4.47dBi	

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:
EMTEK (NINGBO) CO., LTD.

No. 8, Building 8, Lane 216, Qingyi Road, Ningbo High-Tech Zone, Ningbo, Zhejiang, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L6666.

The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)

Designation by FCC

Designation Number: CN1354

Test Firm Registration Number: 427606

Accredited by A2LA

The Certificate Number is 4321.03.

Accredited by ISED

The Conformity Assessment Body Identifier is CN0114

Name of Firm : EMTEK (NINGBO) CO., LTD.

Site Location : No. 8, Building 8, Lane 216, Qingyi Road, Ningbo High-Tech Zone,
Ningbo, Zhejiang, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Test Parameter	Measurement Uncertainty
Frequency error	$\pm 20\text{Hz}$
Occupied Bandwidth	$\pm 0.5\text{KHz}$
Transmitter output power	$\pm 0.6\text{dB}$
Conducted spurious emissions	$\pm 3.2\text{dB}$
Radiated spurious emissions	$\pm 4.5\text{dB}$
Temperature	$\pm 1.2^{\circ}\text{C}$
Humidity	$\pm 3\%$
DC voltages	$\pm 0.25\text{V}$
Time	$\pm 1\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Measurements shall be taken, using the following steps, at a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment (see RSS-Gen for applicable versions of ANSI and CISPR standards).

(1) Line the ground plane with absorbers between the transmitter and the receive antenna to minimize reflections. The absorbers used should have a minimum-rated attenuation of 20 dB through the measurement frequency range of interest. The absorbers shall be positioned to replicate the layout used when compliance with the applicable acceptability criterion was achieved, as set forth in the aforementioned standards on site validation.

(2) Set the height of the receive antenna to 1.5 m. The receive antenna must be one that was designed and fabricated to operate over the entire frequency range of interest, for example, an appropriate standard gain horn.

(3) The distance between the receive antenna and the radiating source shall be sufficient in order to ensure far-field conditions.

(4) Mount the transmitter at a height of 1.5 m.

(5) Configure the device under test (DUT) to produce the maximum power spectral density as measured

while assessing compliance with Section 6.2.2 (i.e. channel frequency, modulation type and data rate). If the DUT is equipped with a detachable antenna and the antenna is intended for remote installation (i.e. tower-mounted), the DUT may be substituted with a suitable signal generator. The level and frequency settings on the generator shall be set so as to reproduce the maximum power spectral density, measured within a 1 MHz bandwidth, obtained while assessing compliance to Section 6.2.2.

(6) Position the transmitter or the radiating antenna so that elevation pattern measurements can be taken.

(7) Find the 0° reference point in the horizontal plane.

(8) Care should be taken when positioning the receive antenna to avoid cross-polarization. Antennas of known mounting polarization should be assessed with the receive antenna oriented in the same polarity. If the polarization of the transmit antenna is unknown or the transmit antenna can be mounted in either polarization, e.i.r.p. measurements should be performed to find which mounting polarity provides the highest e.i.r.p. value. Testing shall be carried out with the receive antenna and the DUT mounted in each polarity.

(9) The emission shall be centred on the display of the spectrum analyzer with the following settings:

i. If the power spectral density of the DUT was assessed with a peak detector and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

ii. If the power spectral density of the DUT was assessed using a sample detector with power averaging and the antenna cannot be detached from the DUT, the spectrum analyzer shall be set to a sample detector, configured to produce 100 power averages and set with a resolution bandwidth, as well as a video bandwidth of 1 MHz.

iii. If the antenna can be detached from the DUT, a continuous wave (CW) signal equal to that of the power spectral density measurement may be used, the spectrum analyzer shall be set to peak detector with a resolution bandwidth and video bandwidth of 1 MHz.

(10) Rotate the turntable 360° recording the field strength at each step. Throughout the main beam of the antenna, the step size shall be kept to a maximum of 1°.

Once outside the main beam of the antenna, the maximum step size shall be as follows, when compared to the requirements of Section 6.2.2:

i. Between 0° and 8°, maximum step size of 2°;

ii. Between 8° and 40°, maximum step size of 4°;

iii. Between 40° and 45°, maximum step size of 1°;

iv. Between 45° and 90°, maximum step size of 5°.

Once the mask reaches 90°, the mask will be inverted and the step size will follow in the same manner as above.

For the purpose of this procedure, the main beam of the antenna is defined as the 3 dB beamwidth.

(11) Convert the measured field strength values in terms of e.i.r.p. density (dBW/1 MHz) using the following equation:

$$\text{e.i.r.p density(dBW/MHz)}=10\log((E*r)^2/30)$$

E = field strength in V/m

r = measurement distance in metres

(12) Plot the results against the emission mask with reference to the horizontal plane.


(13) Using the plot, the 0° can be rotated to determine the worst-case installation tilt angle.

(14) Testing shall be performed using the highest gain antenna for every antenna type, if applicable.


(15) Antenna type(s), antenna model number(s), and worst-case tilt angle(s) necessary to remain compliant with the elevation mask requirement set forth in Section 6.2.2(3) of RSS-247 shall be clearly indicated in the user manual.

The following figure is an example of a polar elevation mask measured using the Method 1 reference to dBμV/m at 3 m.


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

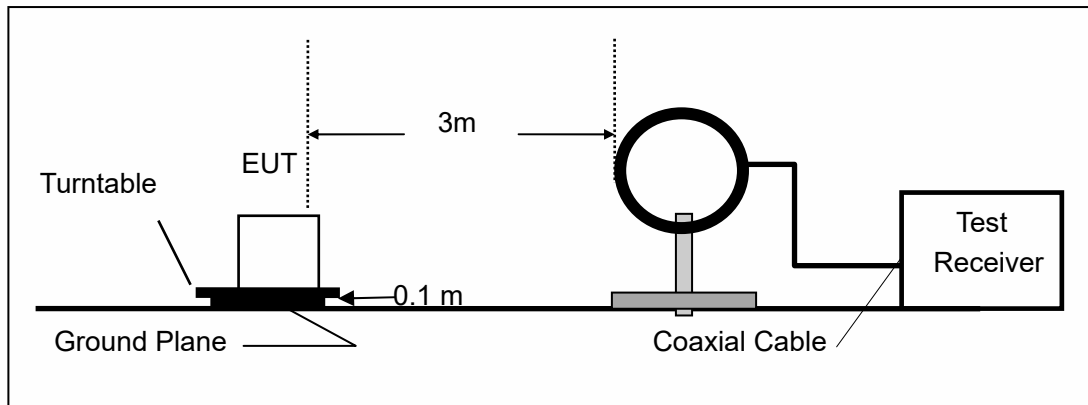

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

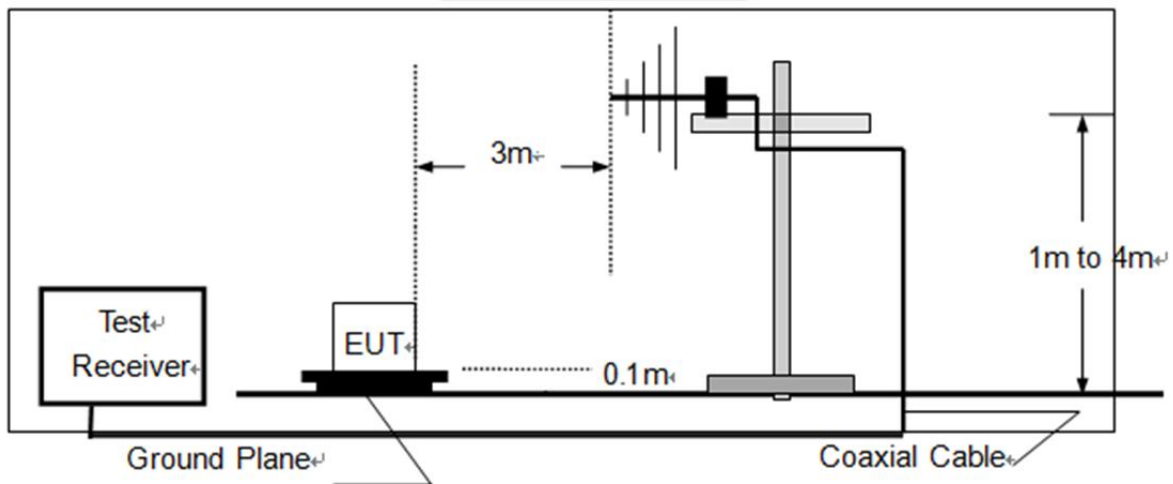

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

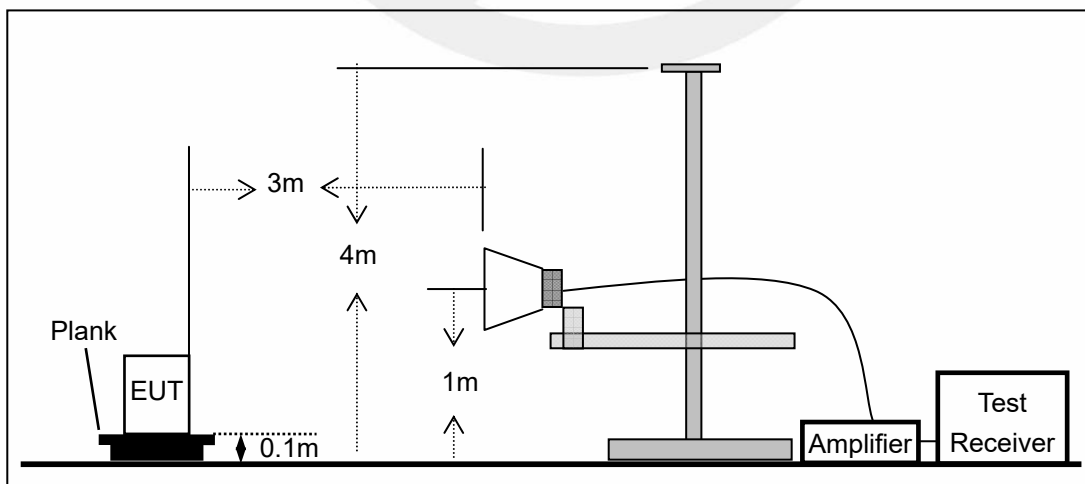


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2020 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

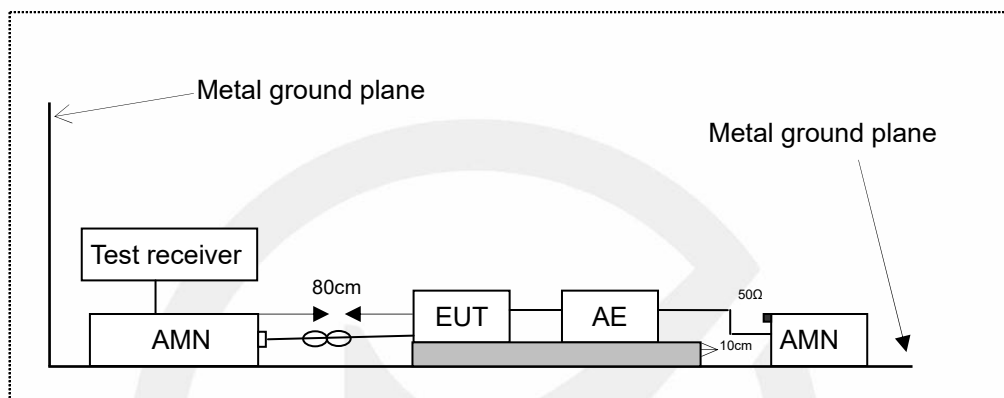

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

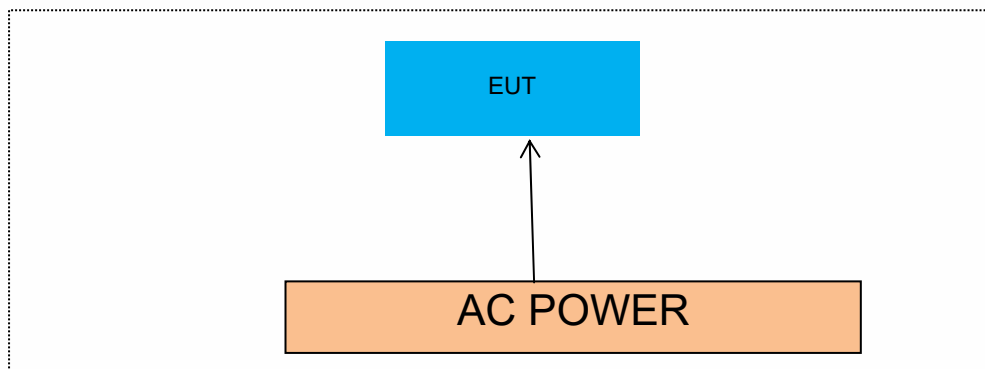

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS 6DB BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

The EUT was operating in WIFI mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.


Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.


8.1.5 Test Results

Test date:	March 24, 2026
Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.040	2407.480	2416.520	0.5	PASS
11B	Ant1	2437	9.080	2432.480	2441.560	0.5	PASS
11B	Ant1	2462	9.080	2457.480	2466.560	0.5	PASS
11G	Ant1	2412	16.480	2403.800	2420.280	0.5	PASS
11G	Ant1	2437	16.560	2428.720	2445.280	0.5	PASS
11G	Ant1	2462	16.520	2453.760	2470.280	0.5	PASS
11N20SISO	Ant1	2412	17.800	2403.120	2420.920	0.5	PASS
11N20SISO	Ant1	2437	17.800	2428.120	2445.920	0.5	PASS
11N20SISO	Ant1	2462	17.800	2453.120	2470.920	0.5	PASS

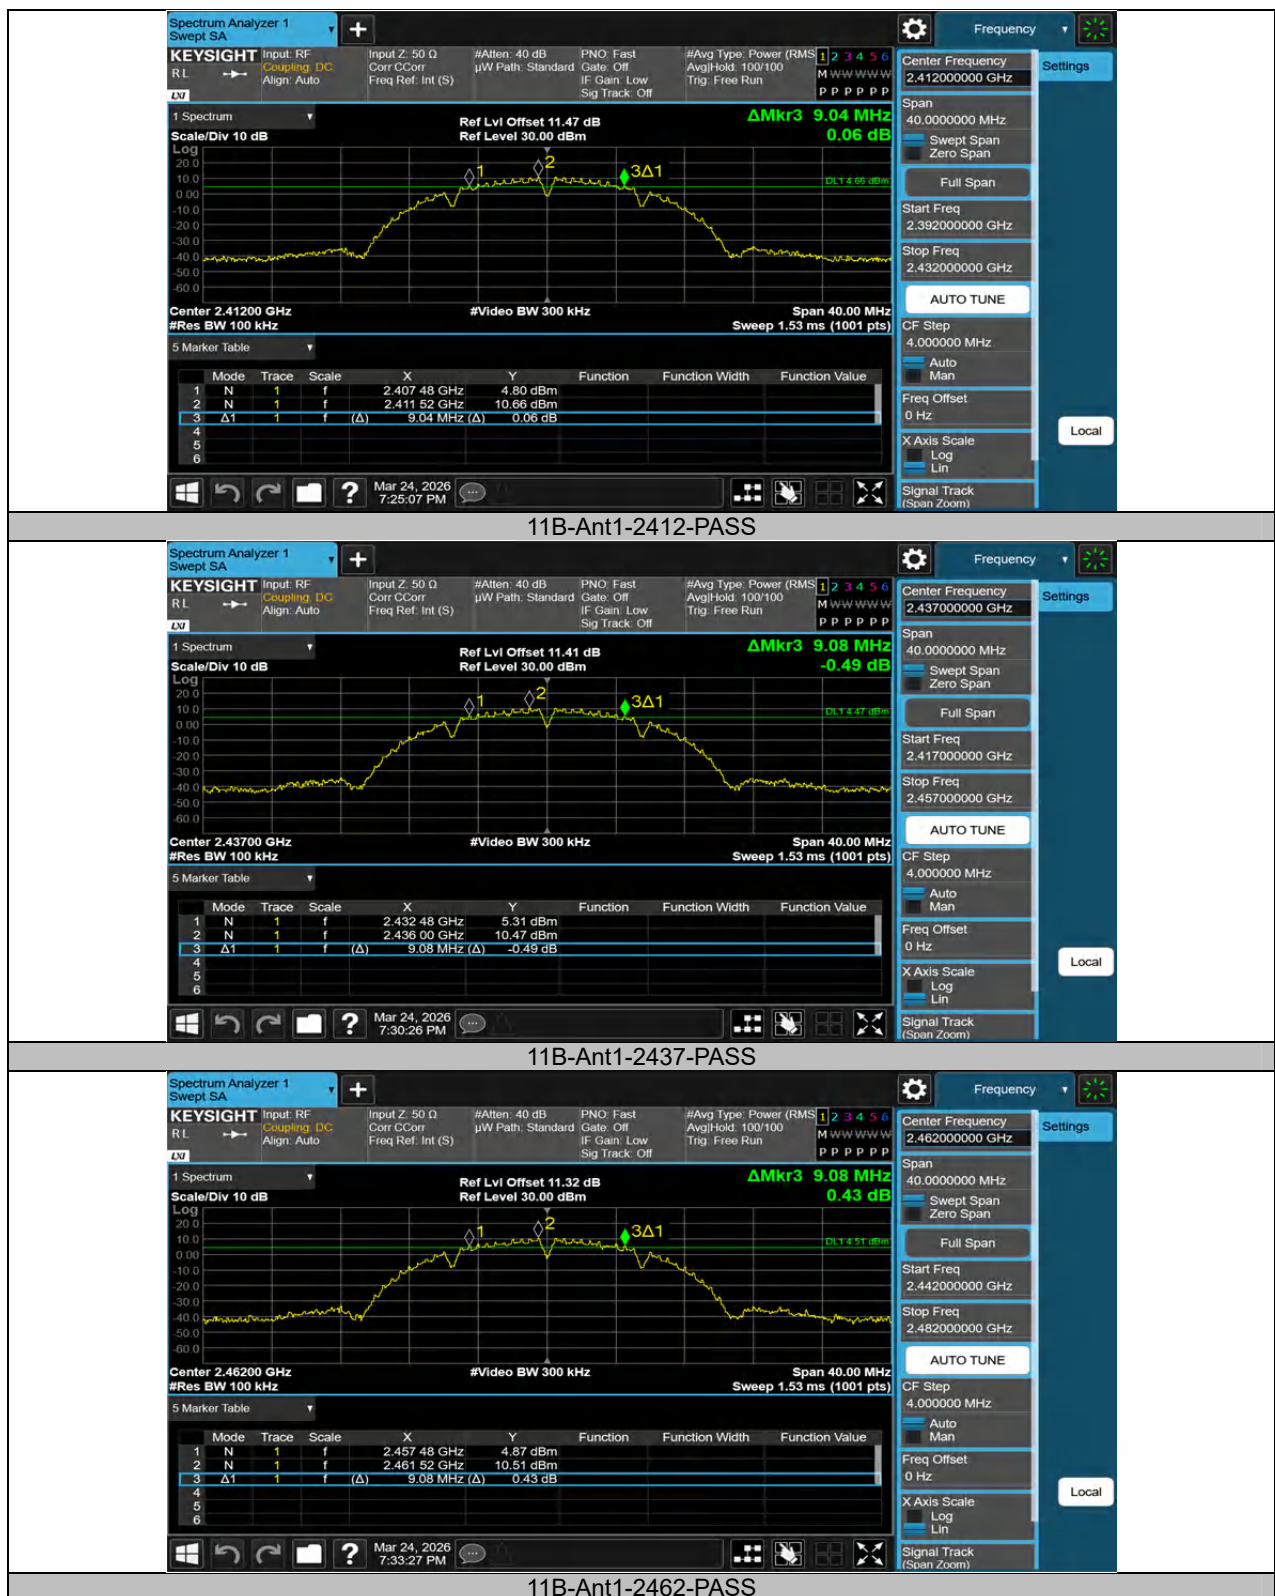

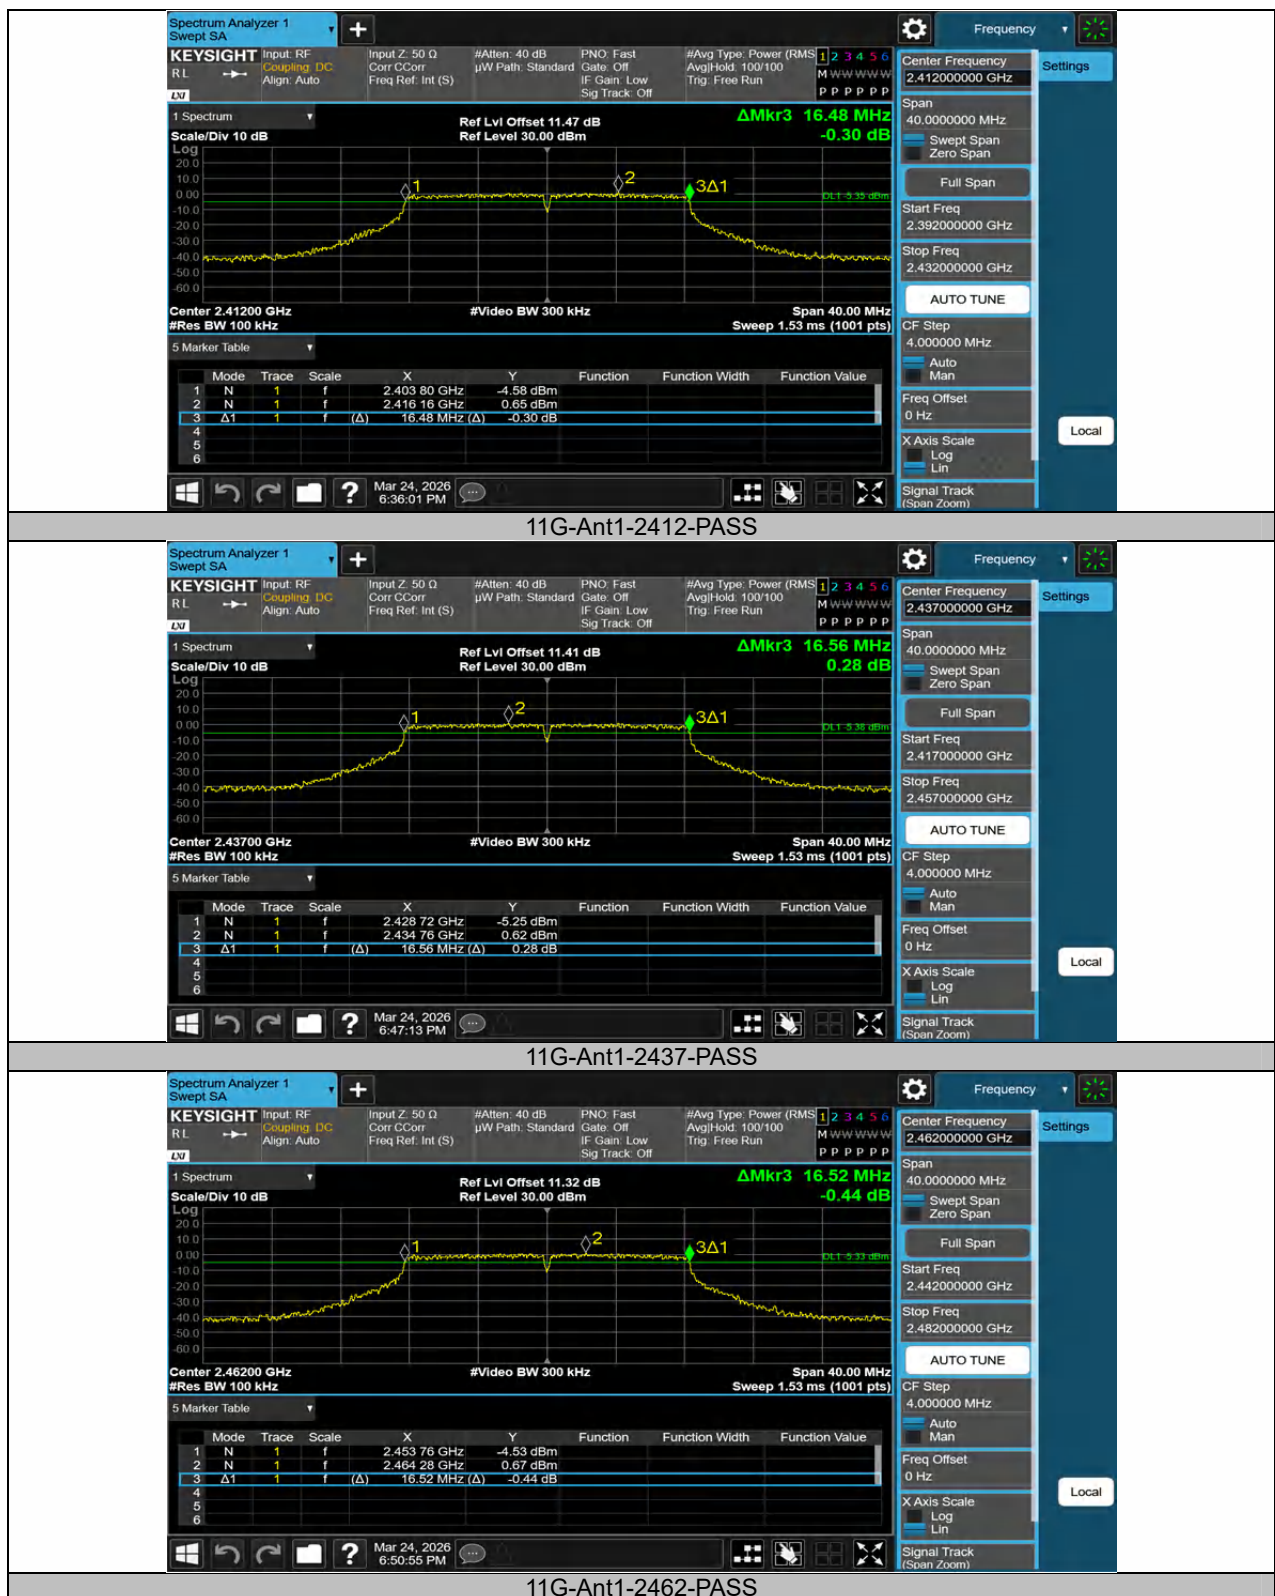

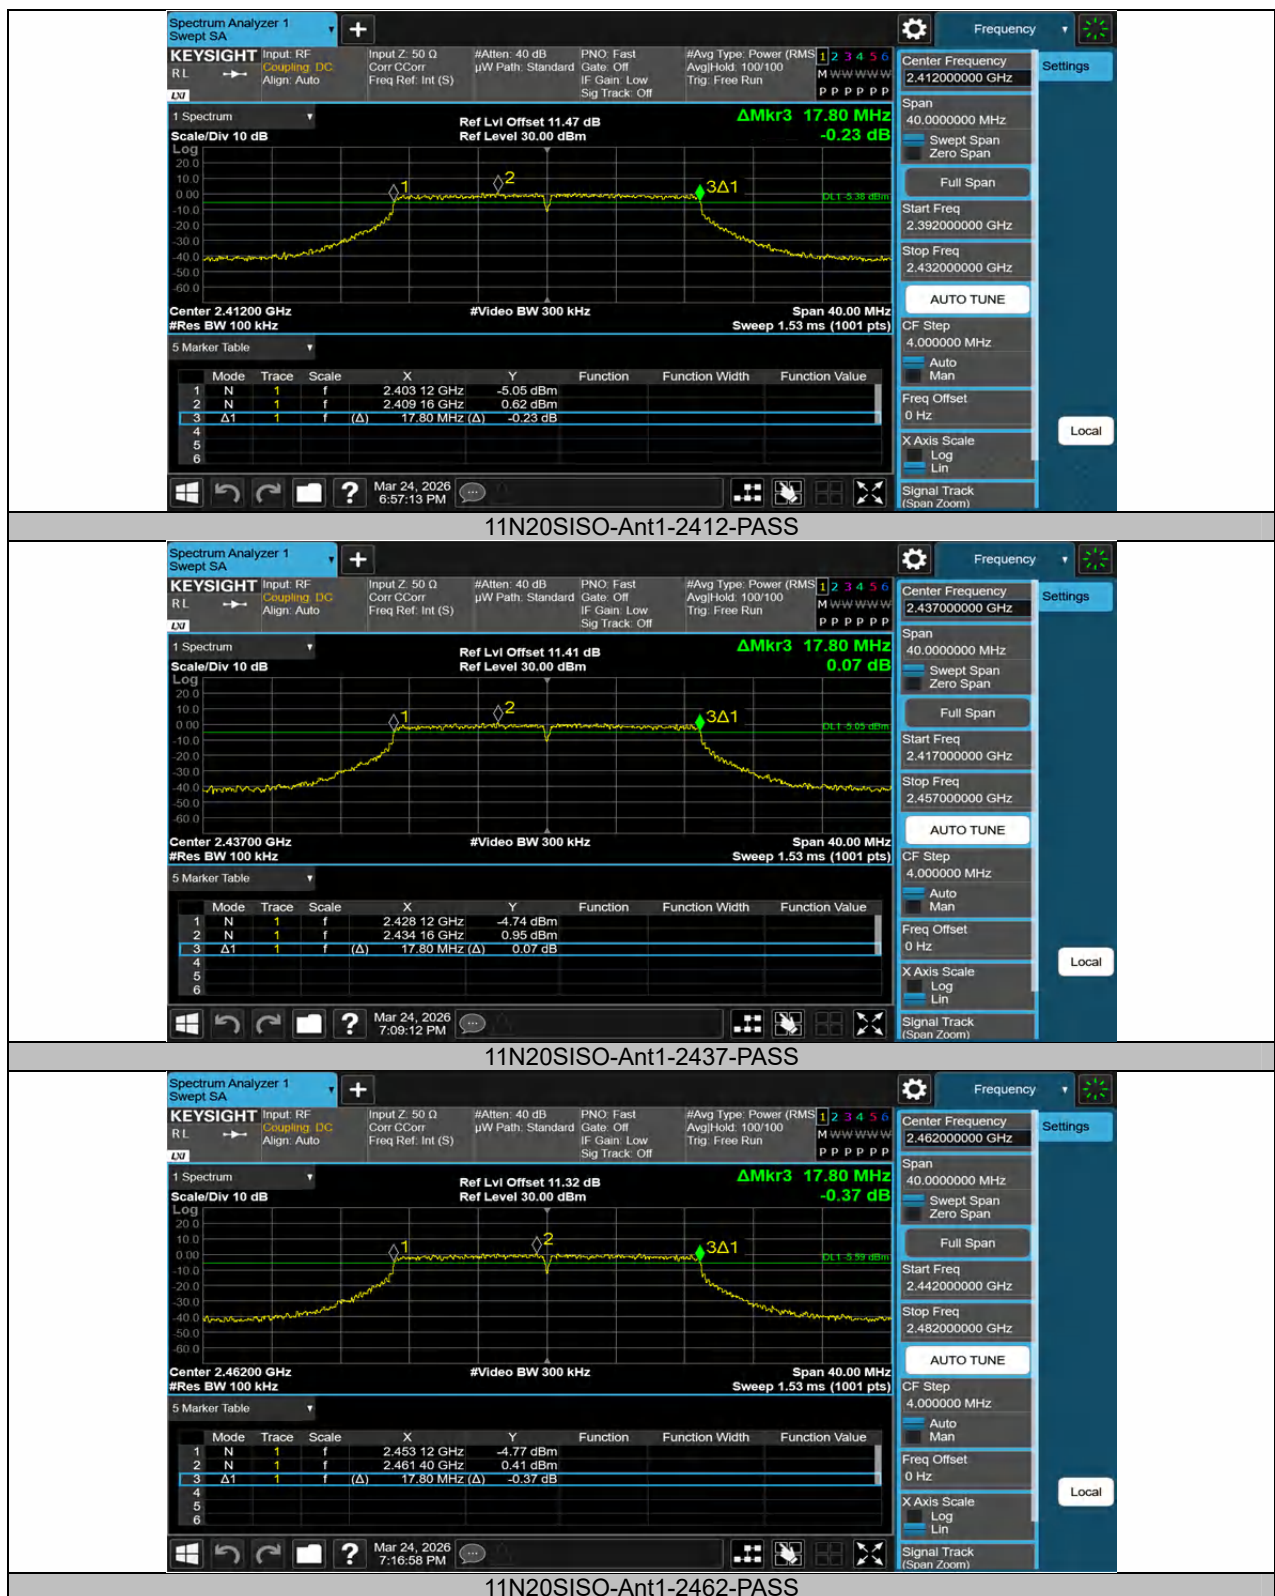

8.2 DTS 99%BANDWIDTH

8.2.1 Applicable Standard

According to KDB 558074 D01 DTS Meas Guidance v05r02

8.2.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.3 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1%-5% OBW.

Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.

Set Span=approximately 2 to 3 times the 20 dB bandwidth.

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Use the 99 % power bandwidth function of the instrument

Measure the maximum width of the emission.


If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.


Measure and record the results in the test report.


8.2.4 Test Results

Test date:	March 24, 2026
Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Test Mode	Antenna	Channel Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	14.180	2404.9118	2419.0918	---	---
11B	Ant1	2437	14.178	2429.8836	2444.0616	---	---
11B	Ant1	2462	14.203	2454.8705	2469.0735	---	---
11G	Ant1	2412	17.108	2403.3974	2420.5054	---	---
11G	Ant1	2437	17.053	2428.4123	2445.4653	---	---
11G	Ant1	2462	17.186	2453.3233	2470.5093	---	---
11N20SISO	Ant1	2412	18.221	2402.8918	2421.1128	---	---
11N20SISO	Ant1	2437	18.188	2427.8986	2446.0866	---	---
11N20SISO	Ant1	2462	18.165	2452.9369	2471.1019	---	---

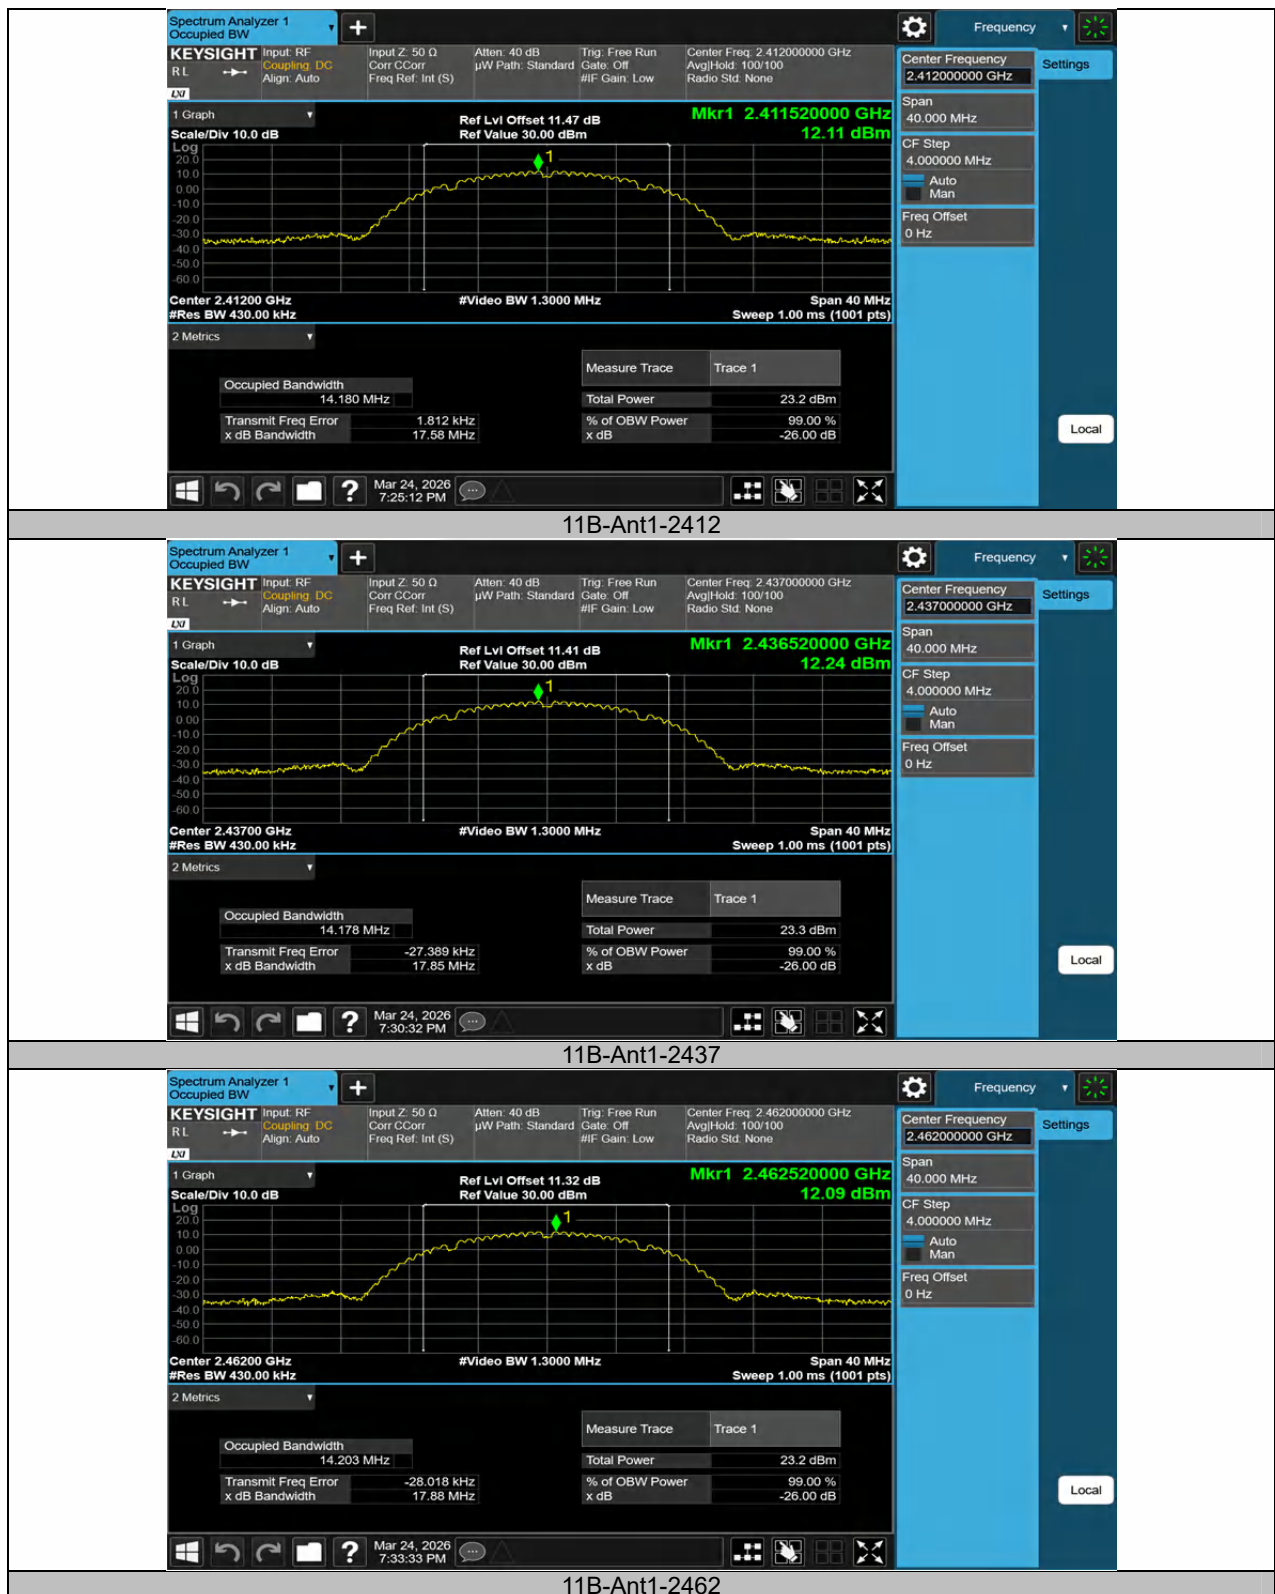

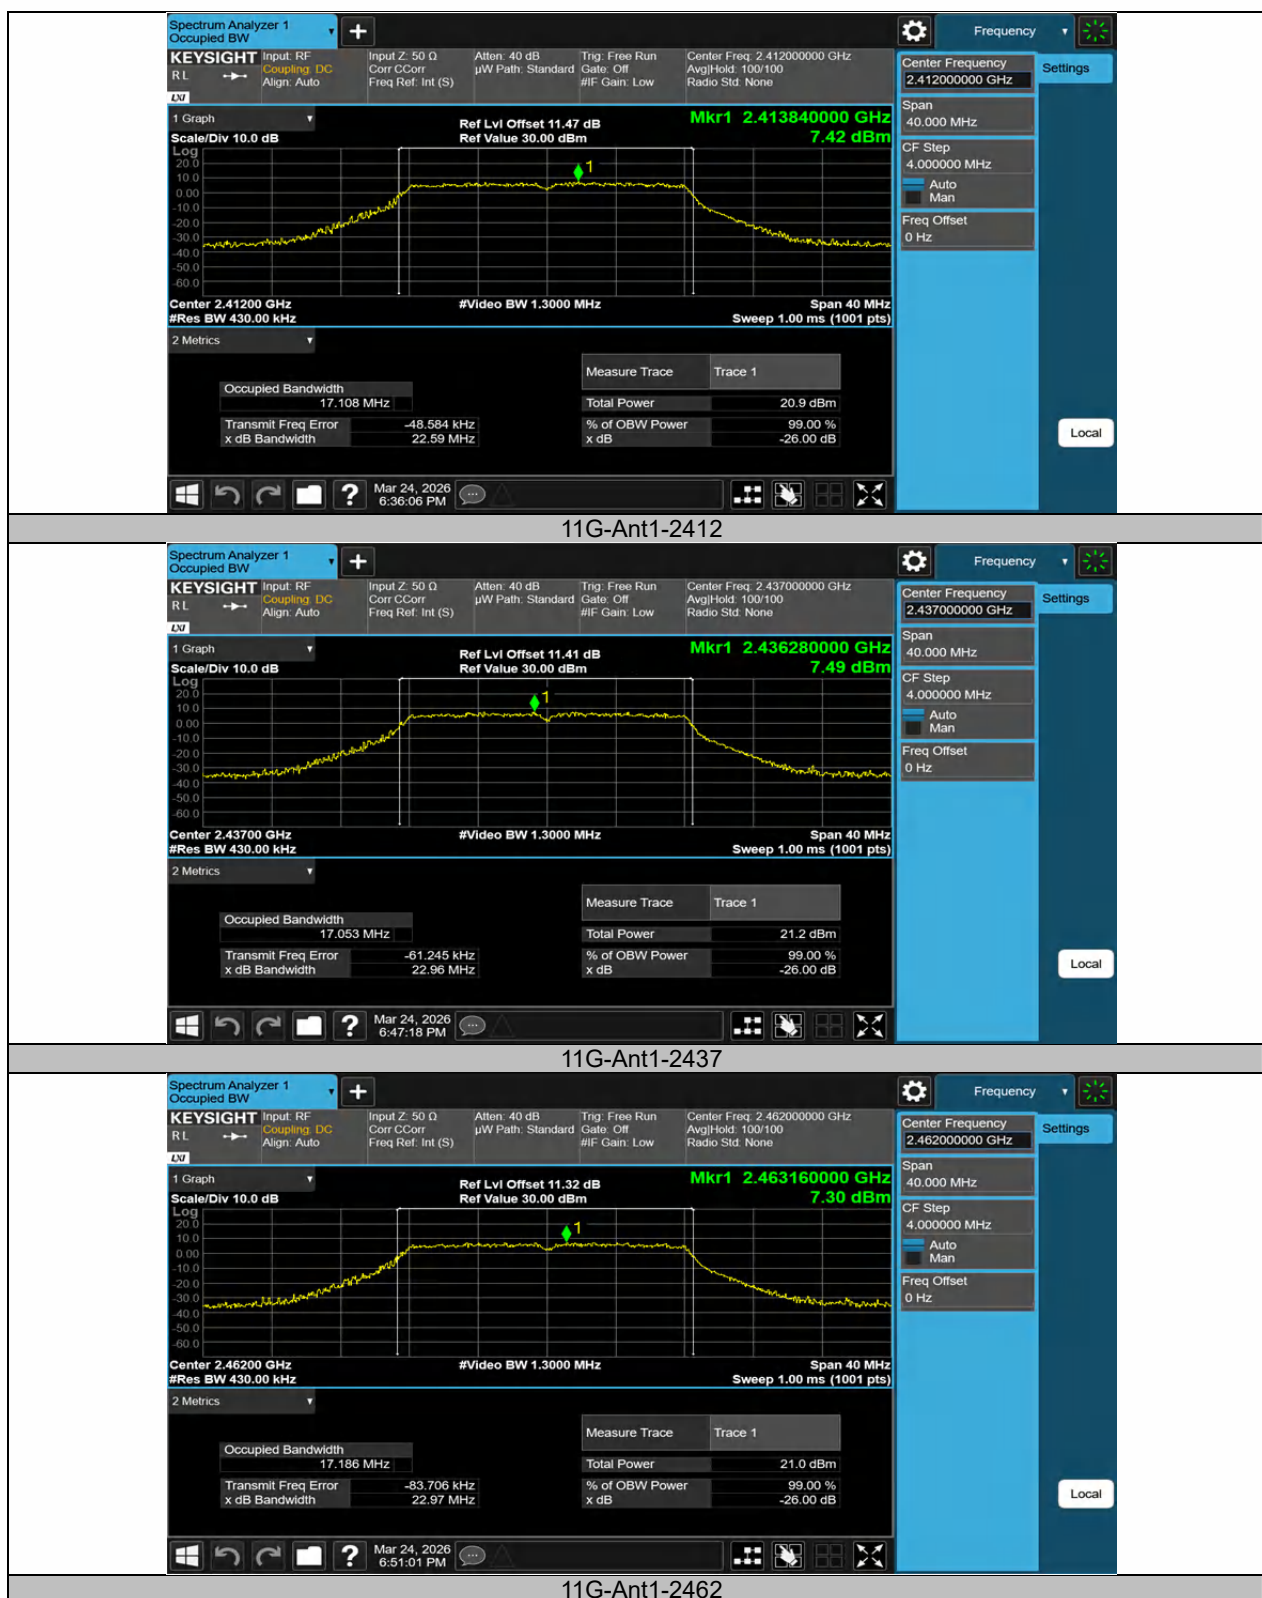

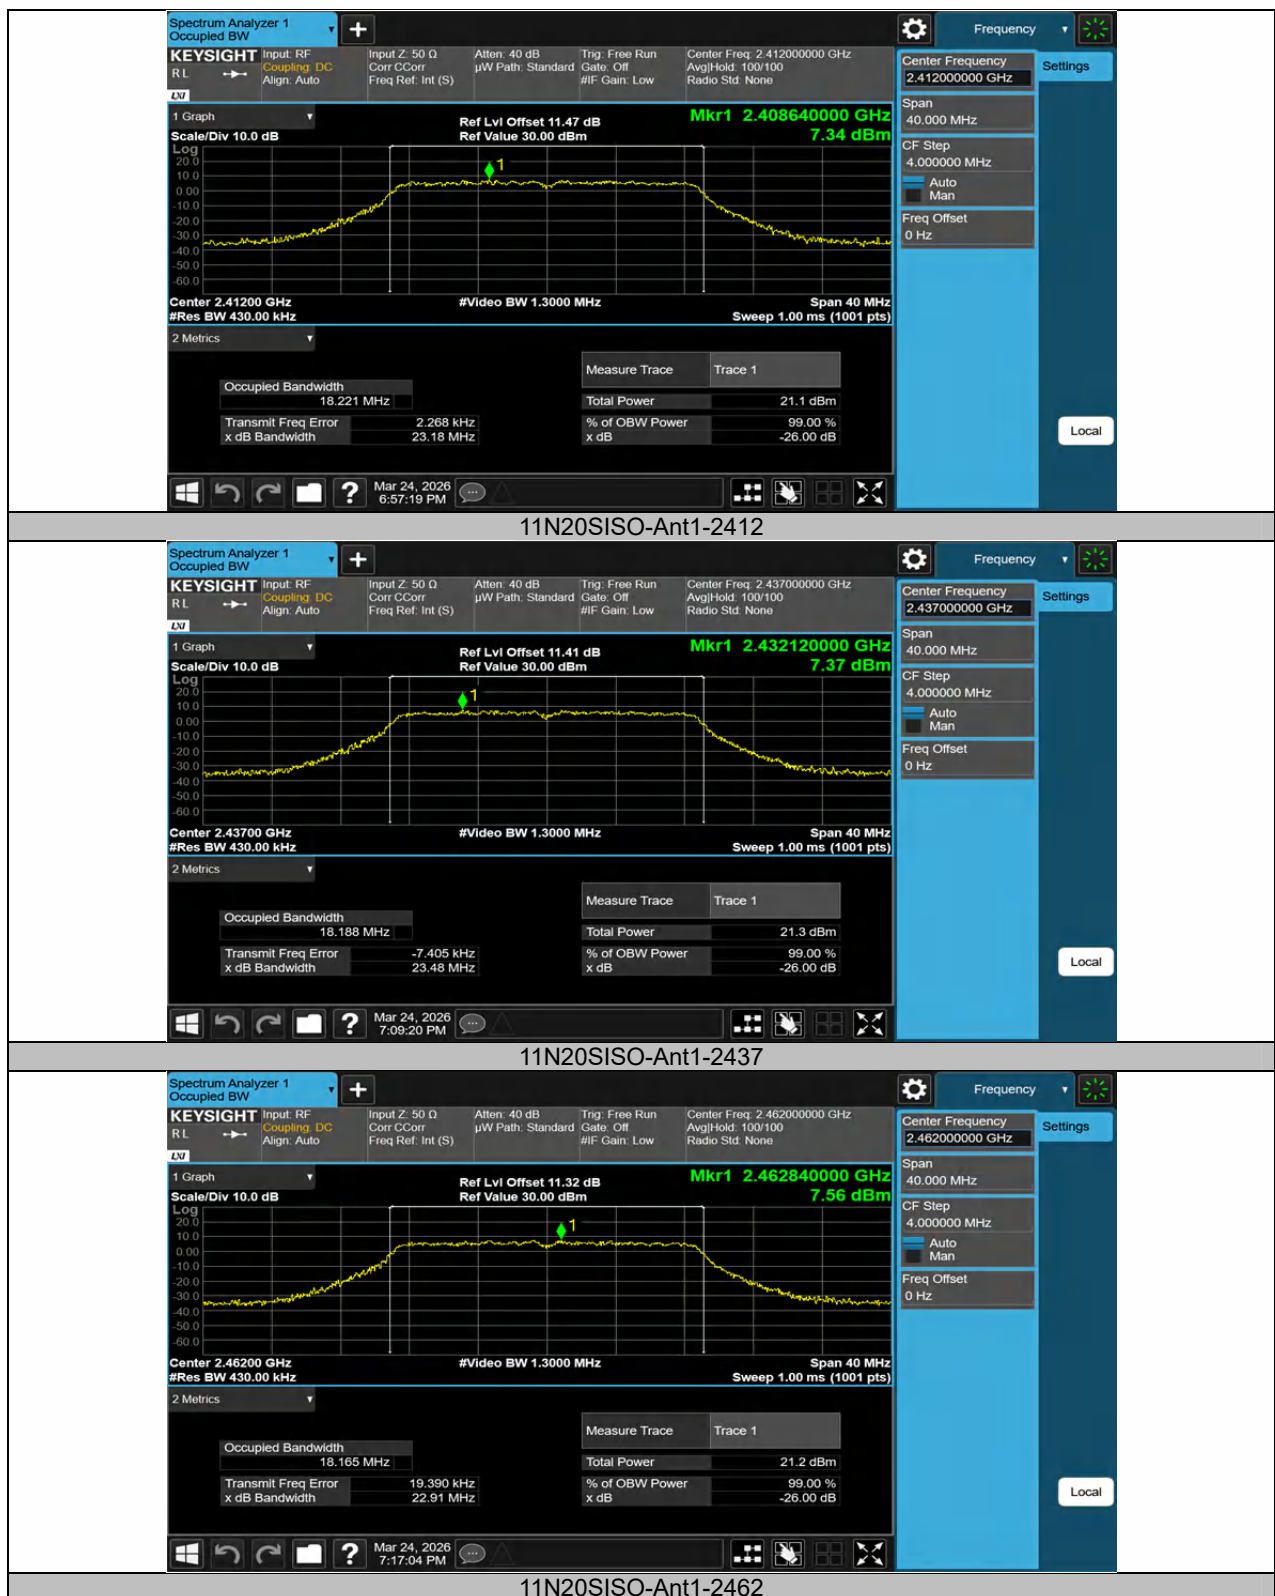

8.3 MAXIMUM AVG CONDUCTED OUTPUT POWER

8.3.1 Applicable Standard

According to FCC Part15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.3.2 Conformance Limit

The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Option 1:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Option 2:

Method AVGPM is a measurement using an RF average power meter, as follows:

- (a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:
 - (1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - (2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - (3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
- (c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)

8.3.5 Test Results

Test date:	March 24, 2026
Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Test Mode	Antenna	Frequency [MHz]	AVG power [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	19.71	≤30.00	2.54	22.25	≤36.00	PASS
11B	Ant1	2437	19.72	≤30.00	2.54	22.26	≤36.00	PASS
11B	Ant1	2462	19.69	≤30.00	2.54	22.23	≤36.00	PASS
11G	Ant1	2412	19.64	≤30.00	2.54	22.18	≤36.00	PASS
11G	Ant1	2437	19.66	≤30.00	2.54	22.20	≤36.00	PASS
11G	Ant1	2462	19.68	≤30.00	2.54	22.22	≤36.00	PASS
11N20SISO	Ant1	2412	19.65	≤30.00	2.54	22.19	≤36.00	PASS
11N20SISO	Ant1	2437	19.63	≤30.00	2.54	22.17	≤36.00	PASS
11N20SISO	Ant1	2462	19.69	≤30.00	2.54	22.23	≤36.00	PASS

Note: The power is tested using a power meter (Option 2).

8.4 MAXIMUM POWER SPECTRAL DENSITY

8.4.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.4.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.


Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level within the RBW.


8.4.5 Test Results

Test date:	March 24, 2026
Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.93	≤8.00	PASS
11B	Ant1	2437	-9.72	≤8.00	PASS
11B	Ant1	2462	-9.90	≤8.00	PASS
11G	Ant1	2412	-13.87	≤8.00	PASS
11G	Ant1	2437	-13.48	≤8.00	PASS
11G	Ant1	2462	-13.49	≤8.00	PASS
11N20SISO	Ant1	2412	-13.11	≤8.00	PASS
11N20SISO	Ant1	2437	-12.89	≤8.00	PASS
11N20SISO	Ant1	2462	-12.98	≤8.00	PASS

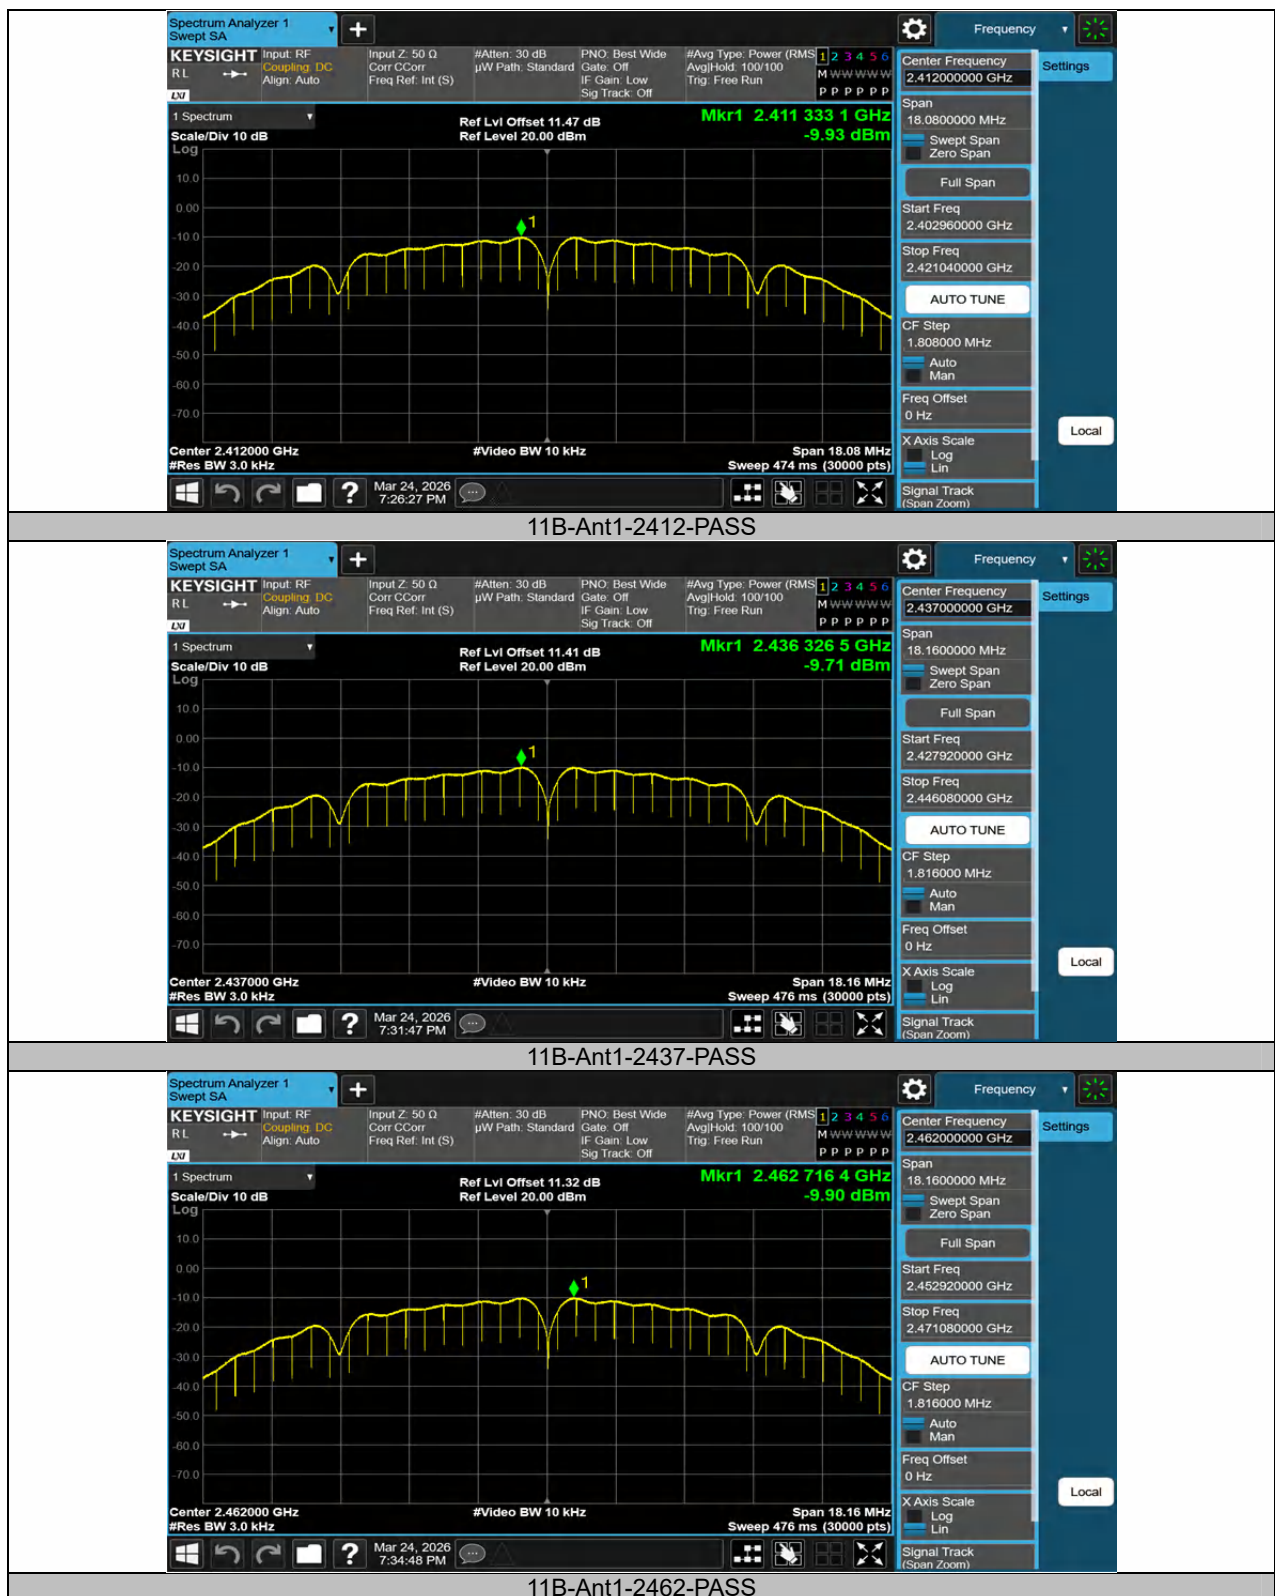

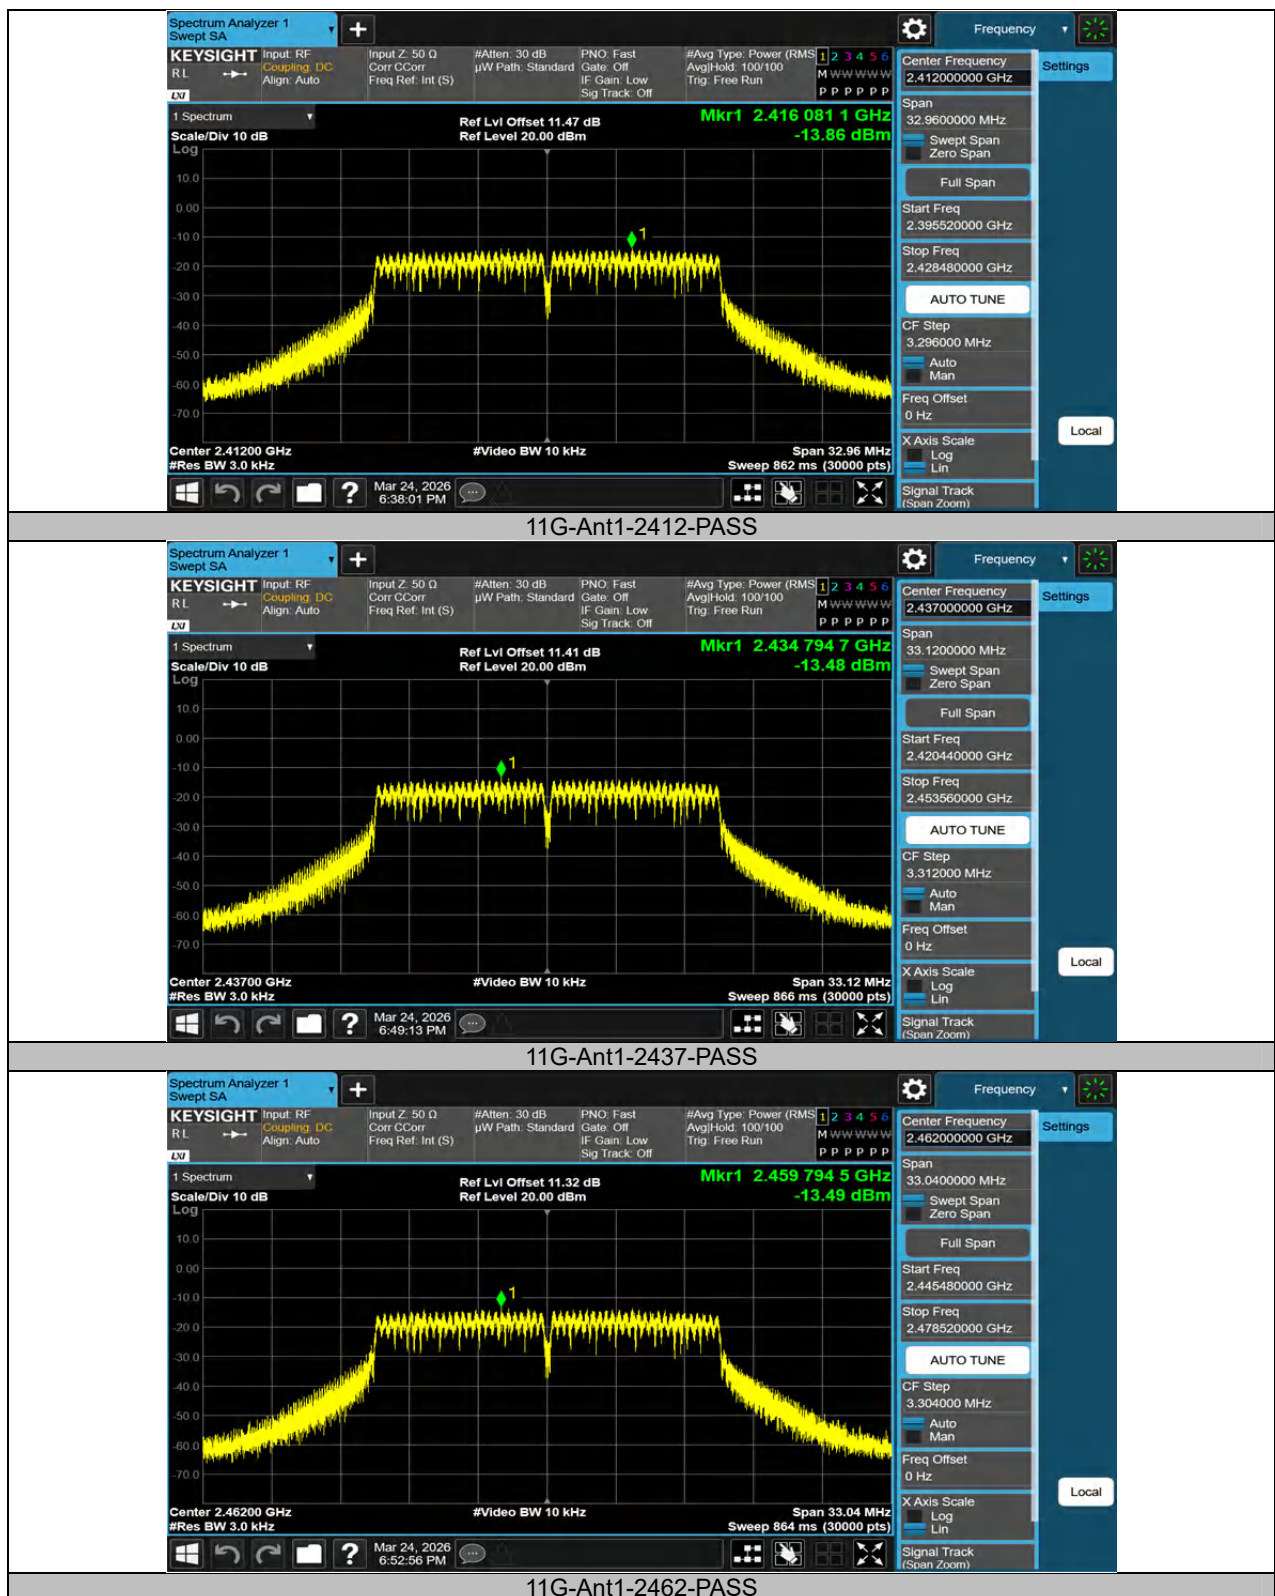

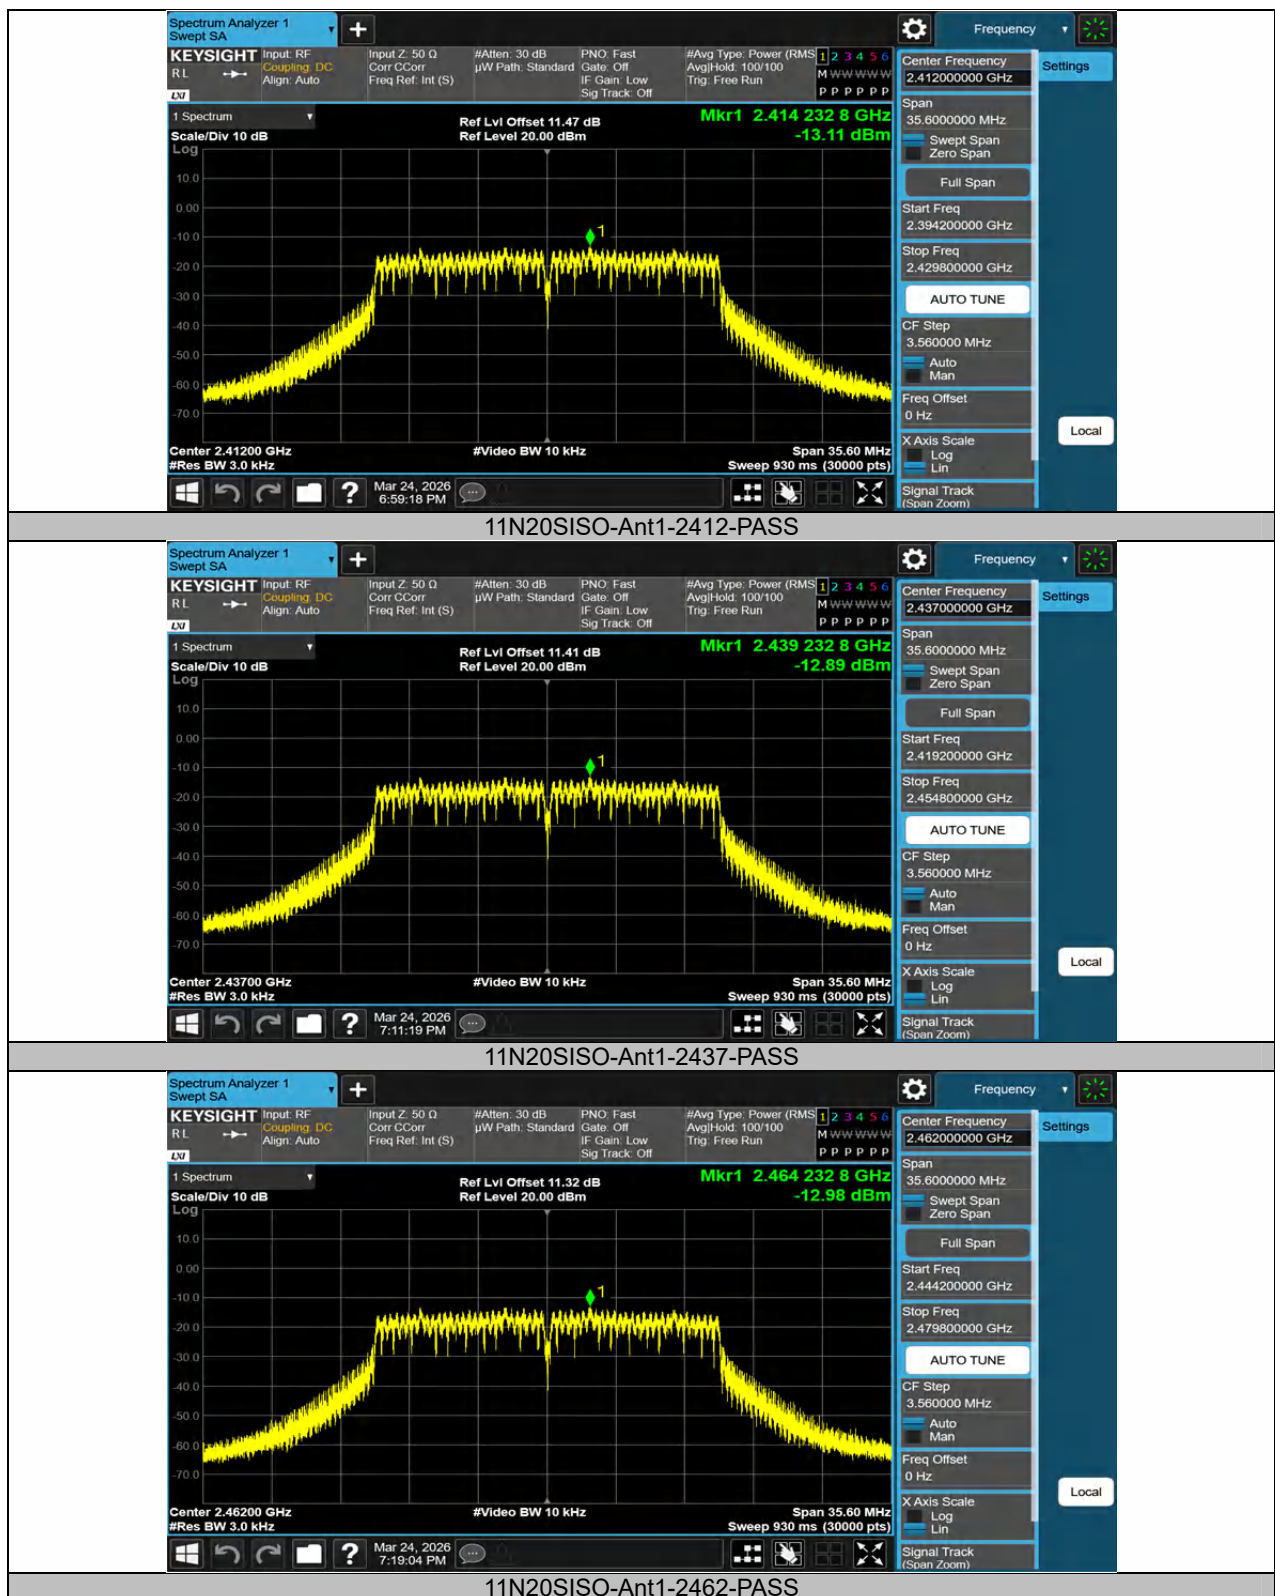

8.5 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.5.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.5.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.5.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements . Report the three highest emissions relative to the limit.

8.5.5 Test Results

Test date:	April 22, 2026
Temperature:	23°C
Relative Humidity:	51%
ATM Pressure:	1011 mbar

■ Reference level measurement

Test Mode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	Ant1	2412	2412.49	5.34
11B	Ant1	2437	2437.48	10.99
11B	Ant1	2462	2461.48	10.88
11G	Ant1	2412	2416.10	1.58
11G	Ant1	2437	2434.24	1.69
11G	Ant1	2462	2459.47	1.90
11N20SISO	Ant1	2412	2411.36	-0.48
11N20SISO	Ant1	2437	2434.12	1.59
11N20SISO	Ant1	2462	2461.36	1.54


■ Band-edge measurement


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	5.34	-43.28	≤-24.66	PASS
11B	Ant1	High	2462	10.88	-46.48	≤-19.12	PASS
11G	Ant1	Low	2412	1.58	-30.3	≤-28.42	PASS
11G	Ant1	High	2462	1.90	-44.39	≤-28.1	PASS
11N20SISO	Ant1	Low	2412	-0.48	-33.05	≤-30.48	PASS
11N20SISO	Ant1	High	2462	1.54	-43.27	≤-28.46	PASS


■ Emission level measurement

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	30~1000	5.34	-60.69	≤-24.66	PASS
11B	Ant1	2412	1000~26500	5.34	-48.53	≤-24.66	PASS
11B	Ant1	2437	30~1000	10.99	-60.74	≤-19.01	PASS
11B	Ant1	2437	1000~26500	10.99	-49.15	≤-19.01	PASS
11B	Ant1	2462	30~1000	10.88	-60.98	≤-19.12	PASS
11B	Ant1	2462	1000~26500	10.88	-48.63	≤-19.12	PASS
11G	Ant1	2412	30~1000	1.58	-59.87	≤-28.42	PASS
11G	Ant1	2412	1000~26500	1.58	-49.03	≤-28.42	PASS
11G	Ant1	2437	30~1000	1.69	-61.09	≤-28.31	PASS
11G	Ant1	2437	1000~26500	1.69	-48.68	≤-28.31	PASS
11G	Ant1	2462	30~1000	1.90	-59.42	≤-28.1	PASS
11G	Ant1	2462	1000~26500	1.90	-49.13	≤-28.1	PASS
11N20SISO	Ant1	2412	30~1000	-0.48	-60.12	≤-30.48	PASS
11N20SISO	Ant1	2412	1000~26500	-0.48	-48.79	≤-30.48	PASS
11N20SISO	Ant1	2437	30~1000	1.59	-59.8	≤-28.41	PASS
11N20SISO	Ant1	2437	1000~26500	1.59	-48.71	≤-28.41	PASS
11N20SISO	Ant1	2462	30~1000	1.54	-60.42	≤-28.46	PASS
11N20SISO	Ant1	2462	1000~26500	1.54	-48.45	≤-28.46	PASS


■ Reference level measurement

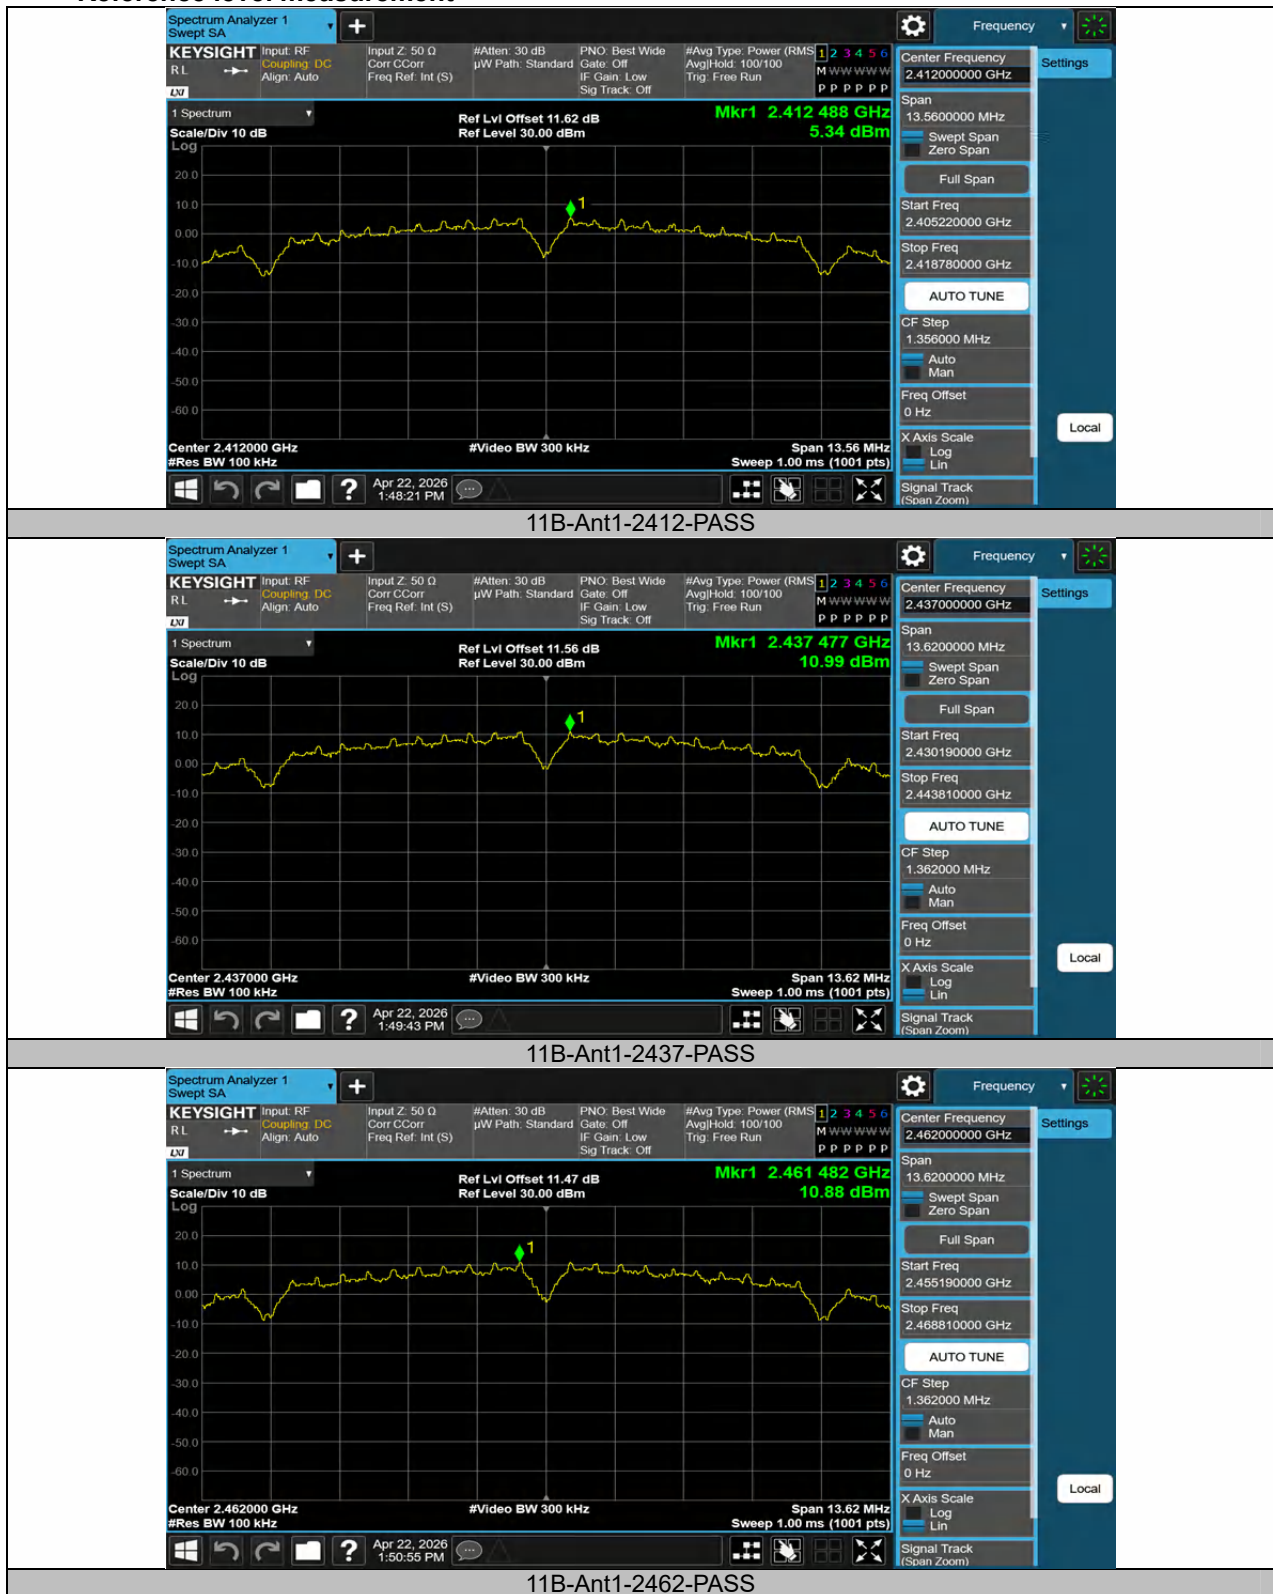


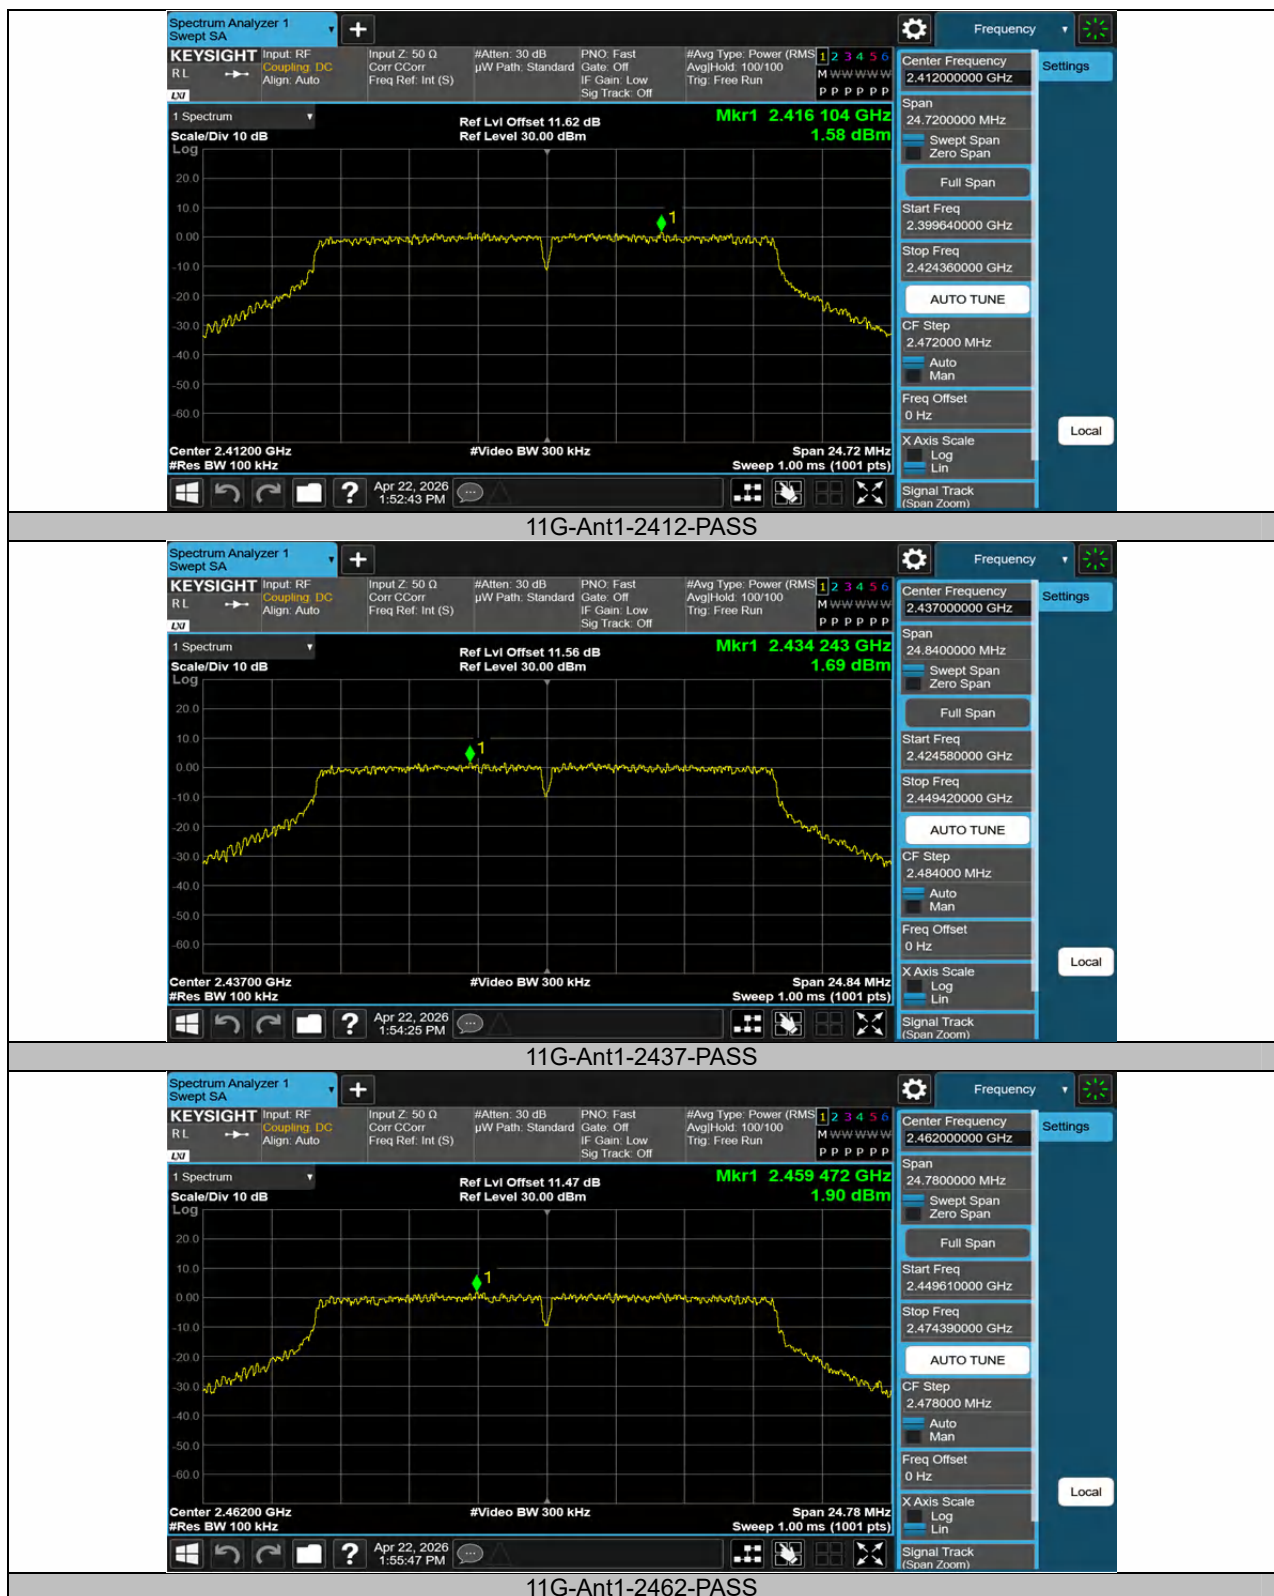

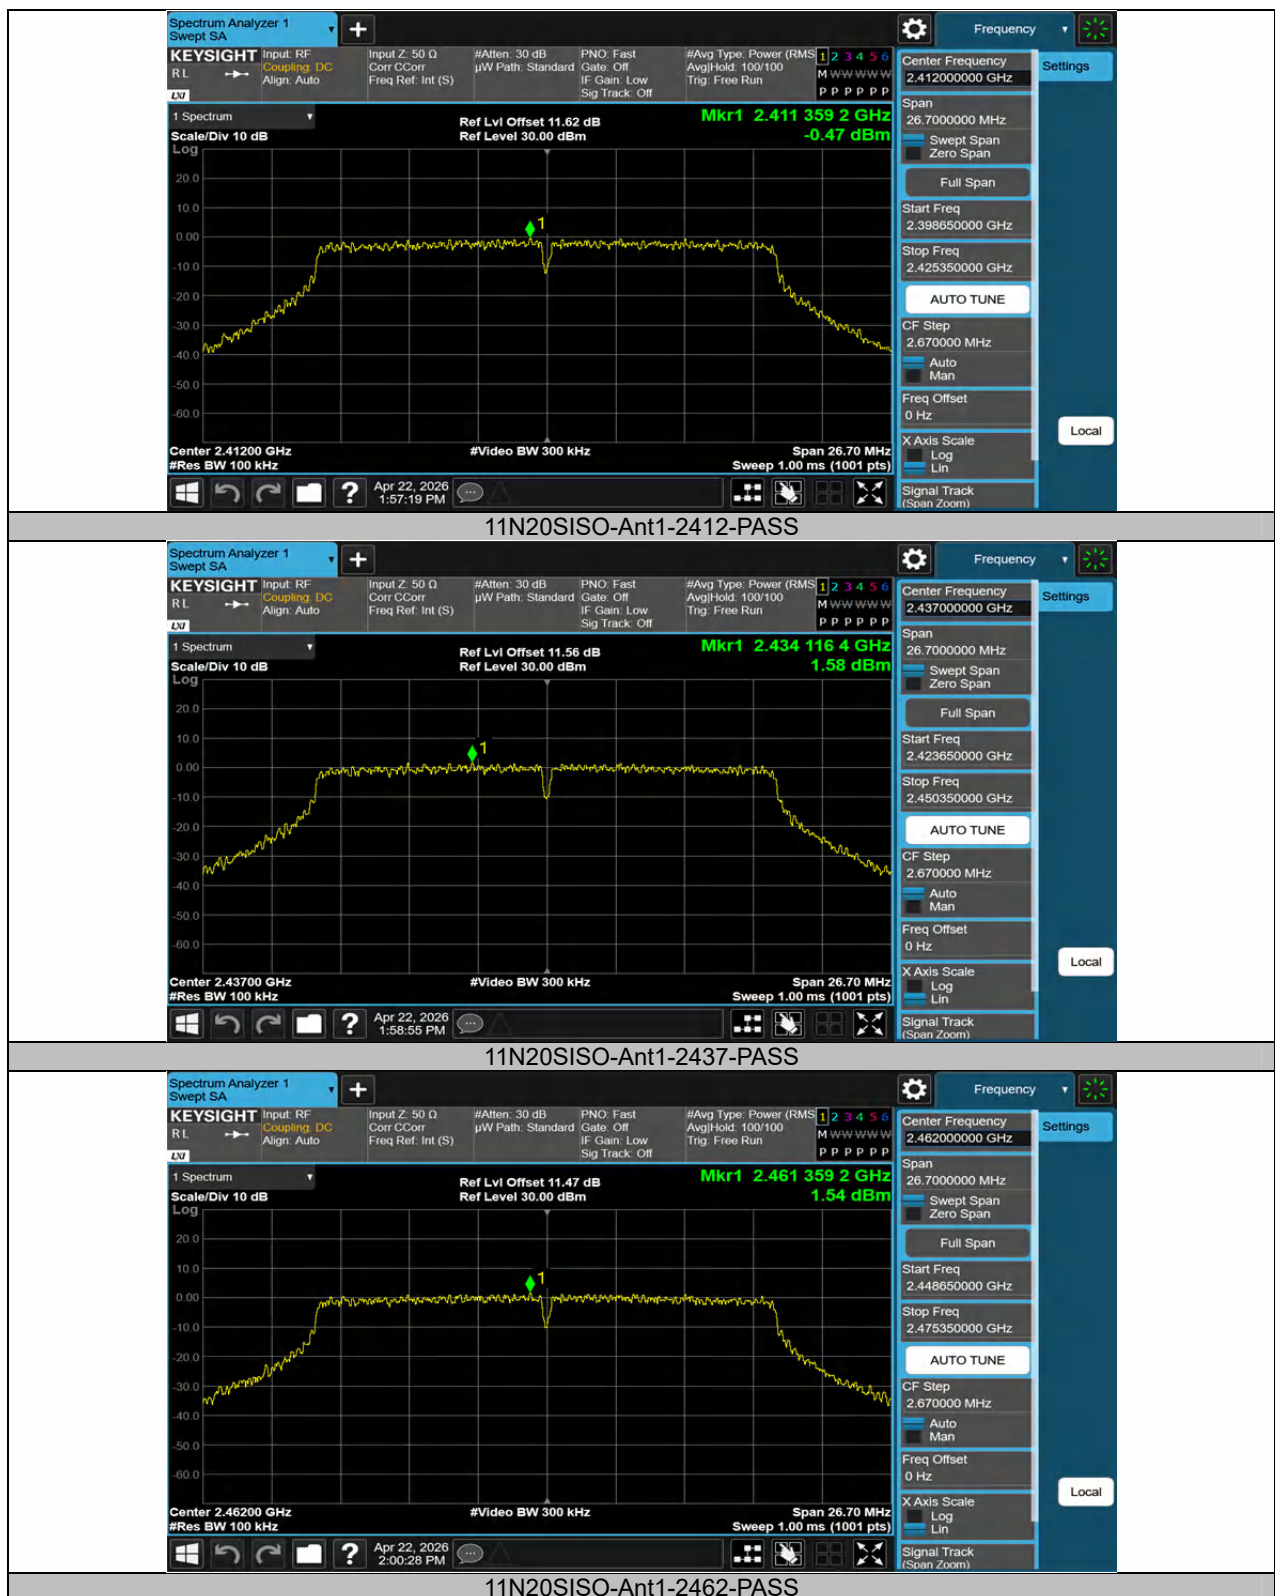



■ Band-edge measurement

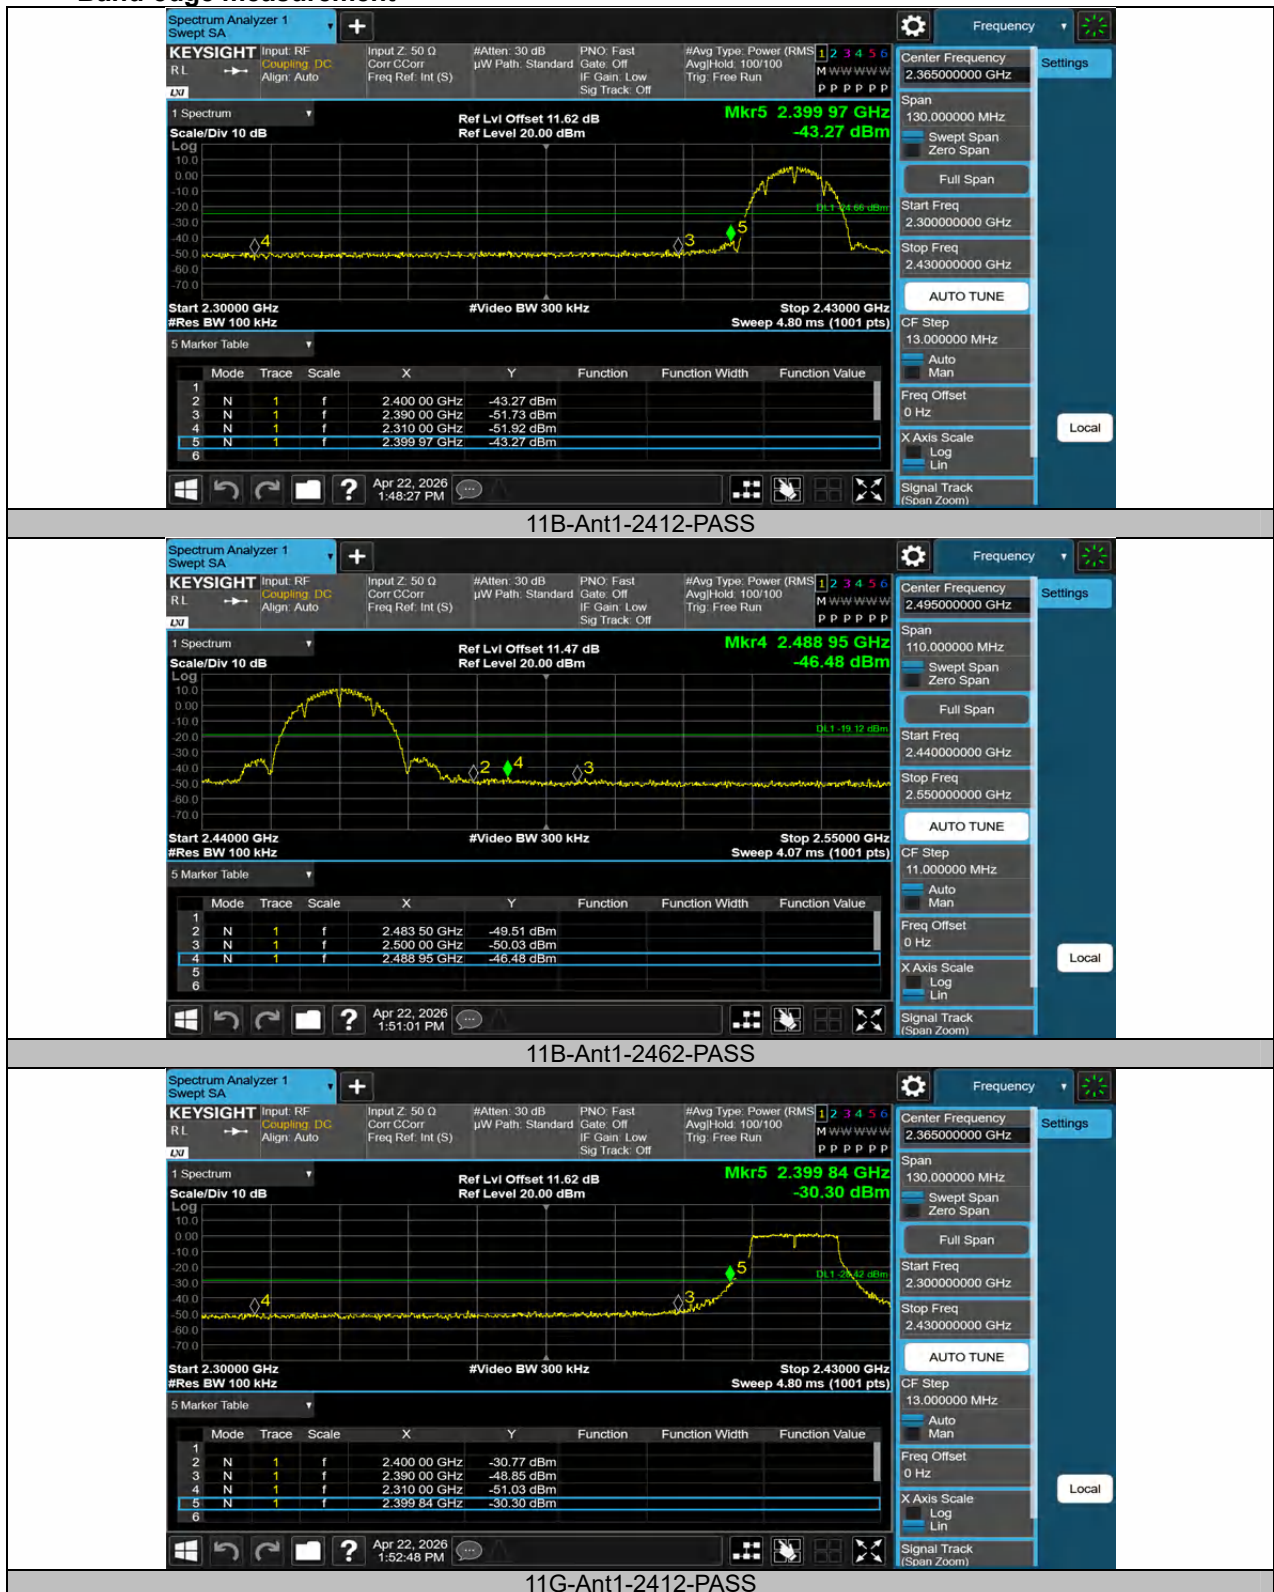


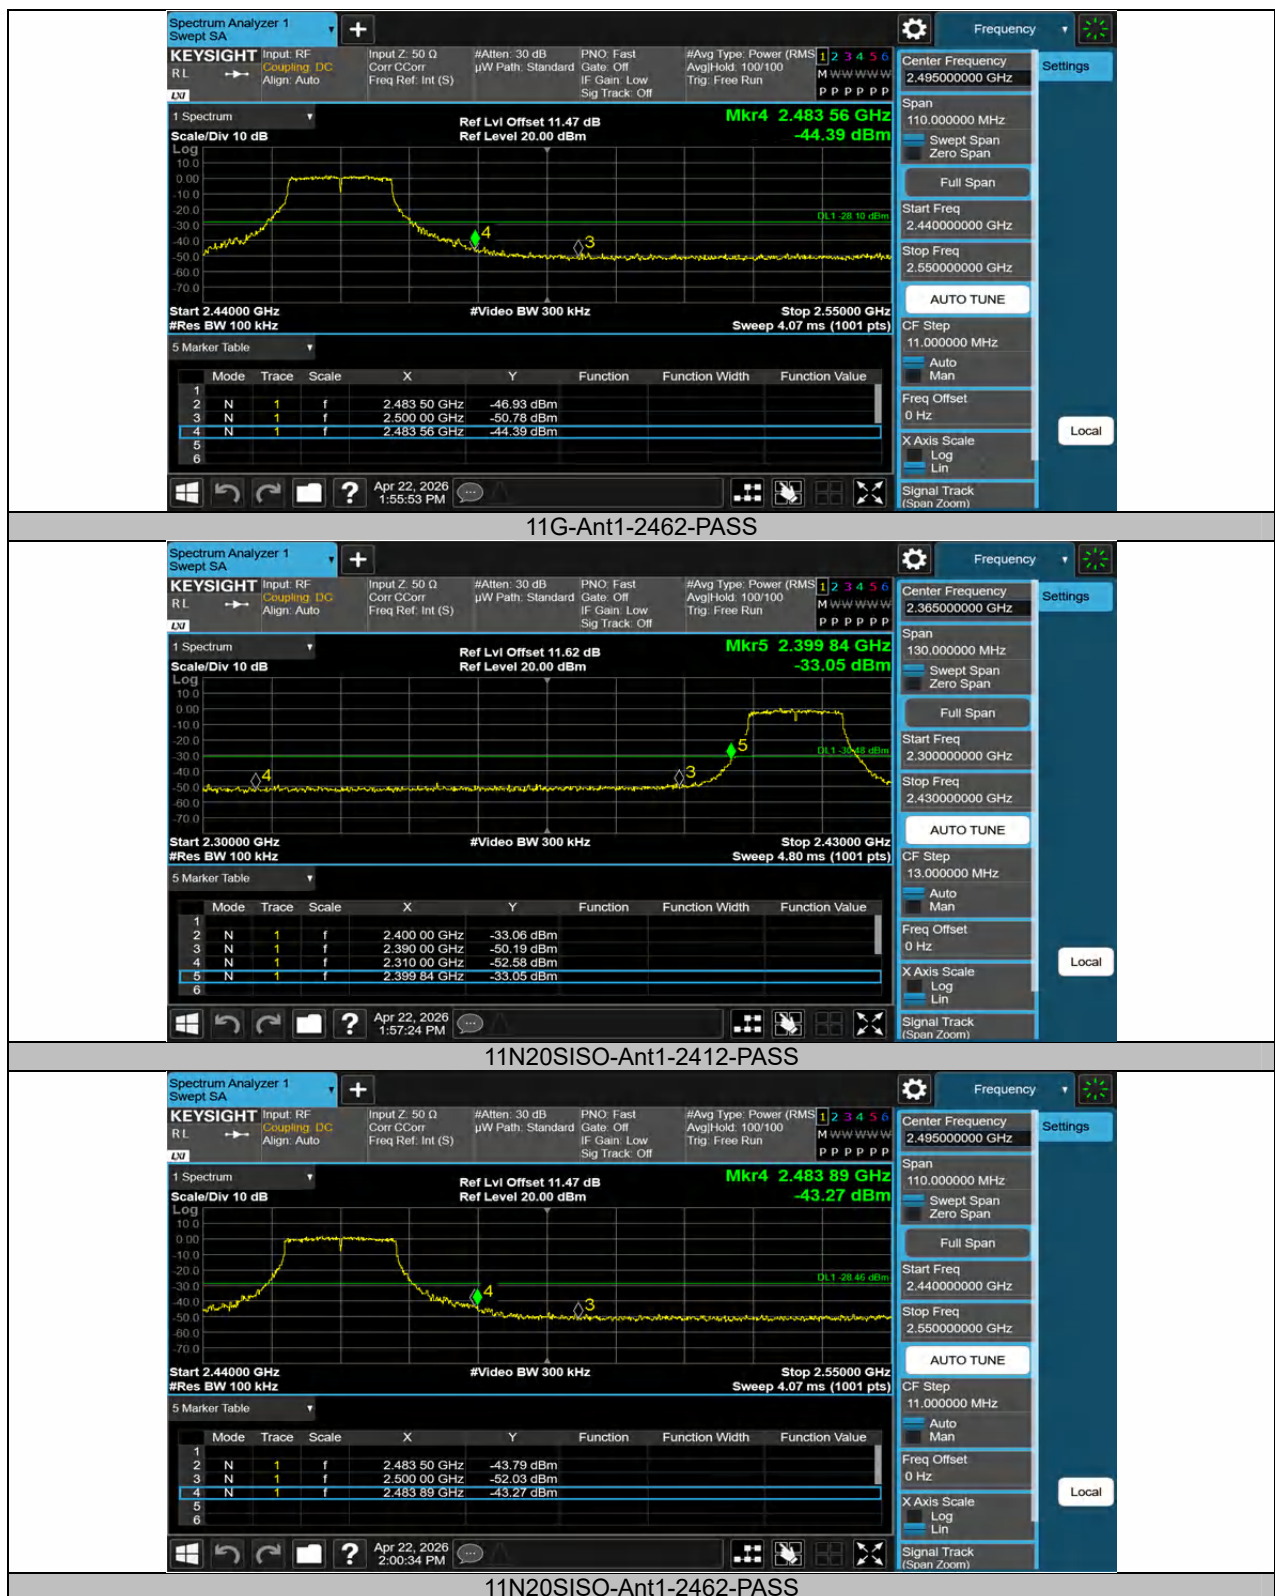



■ Emission level measurement

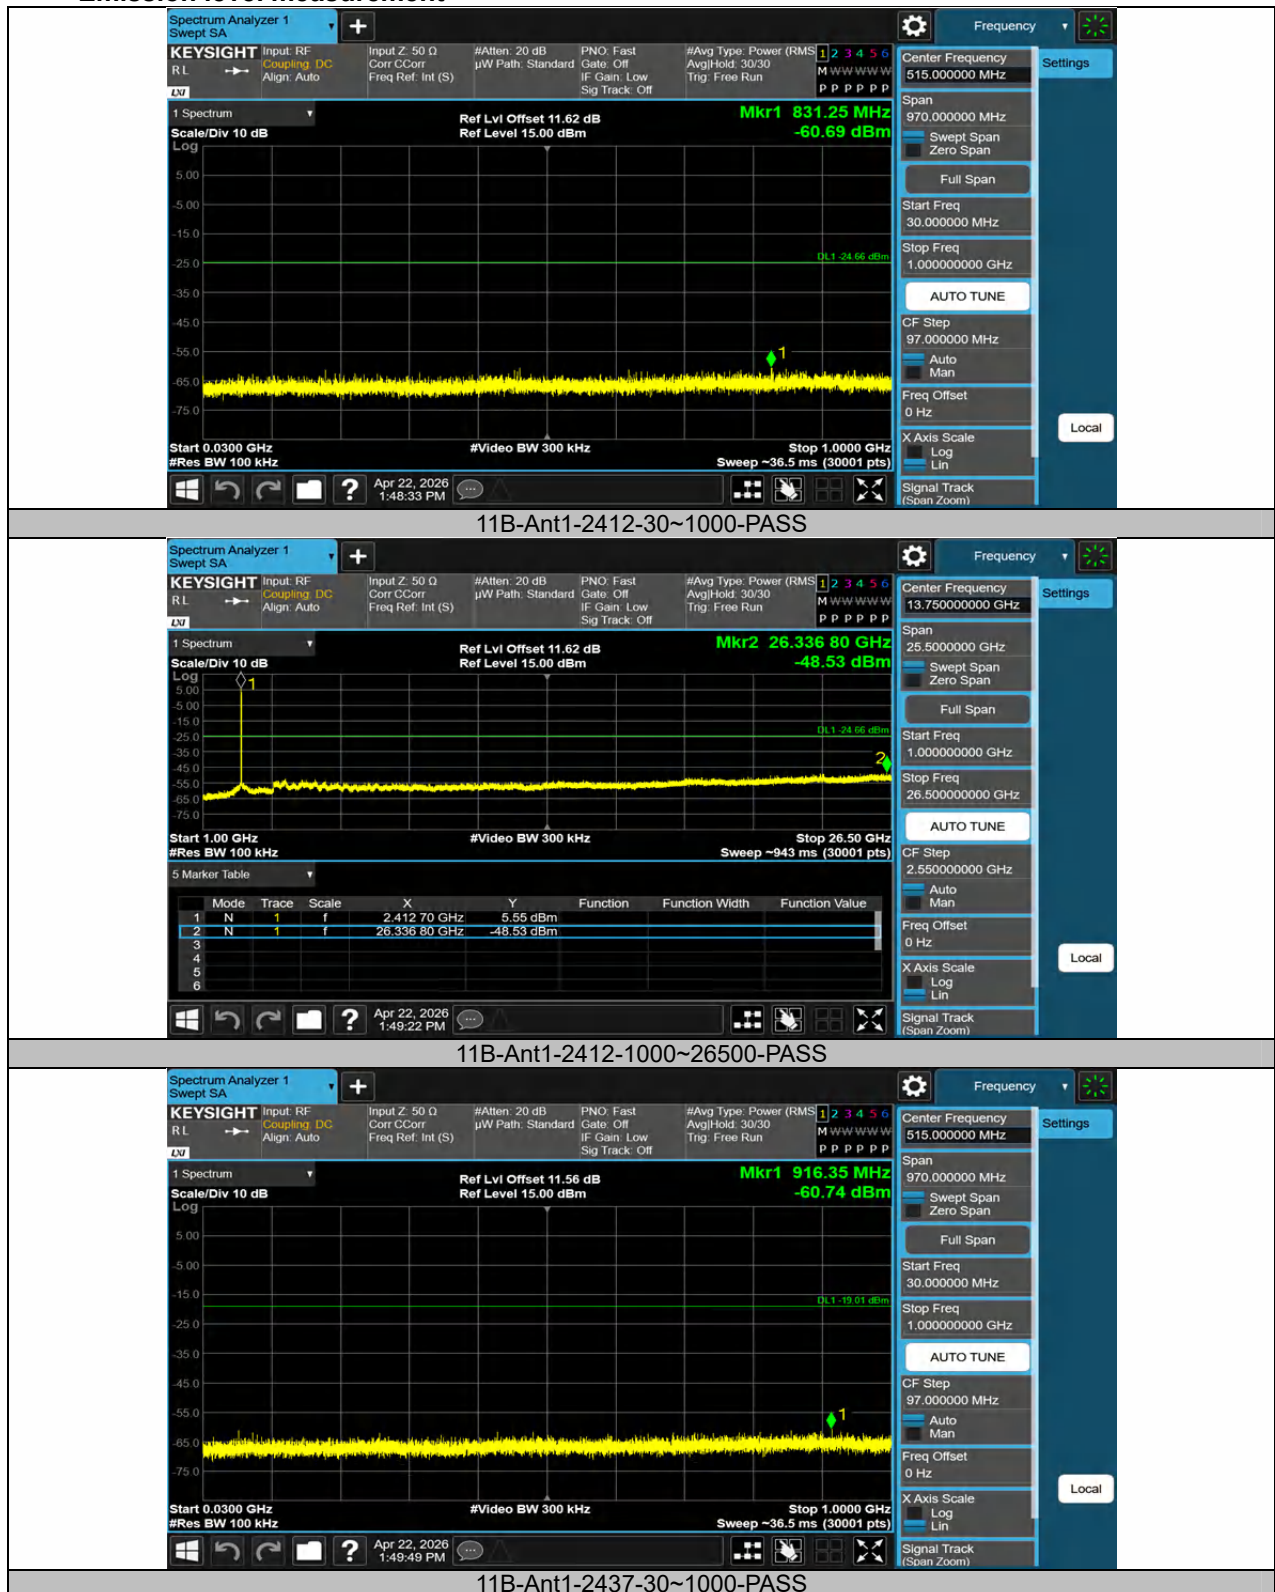


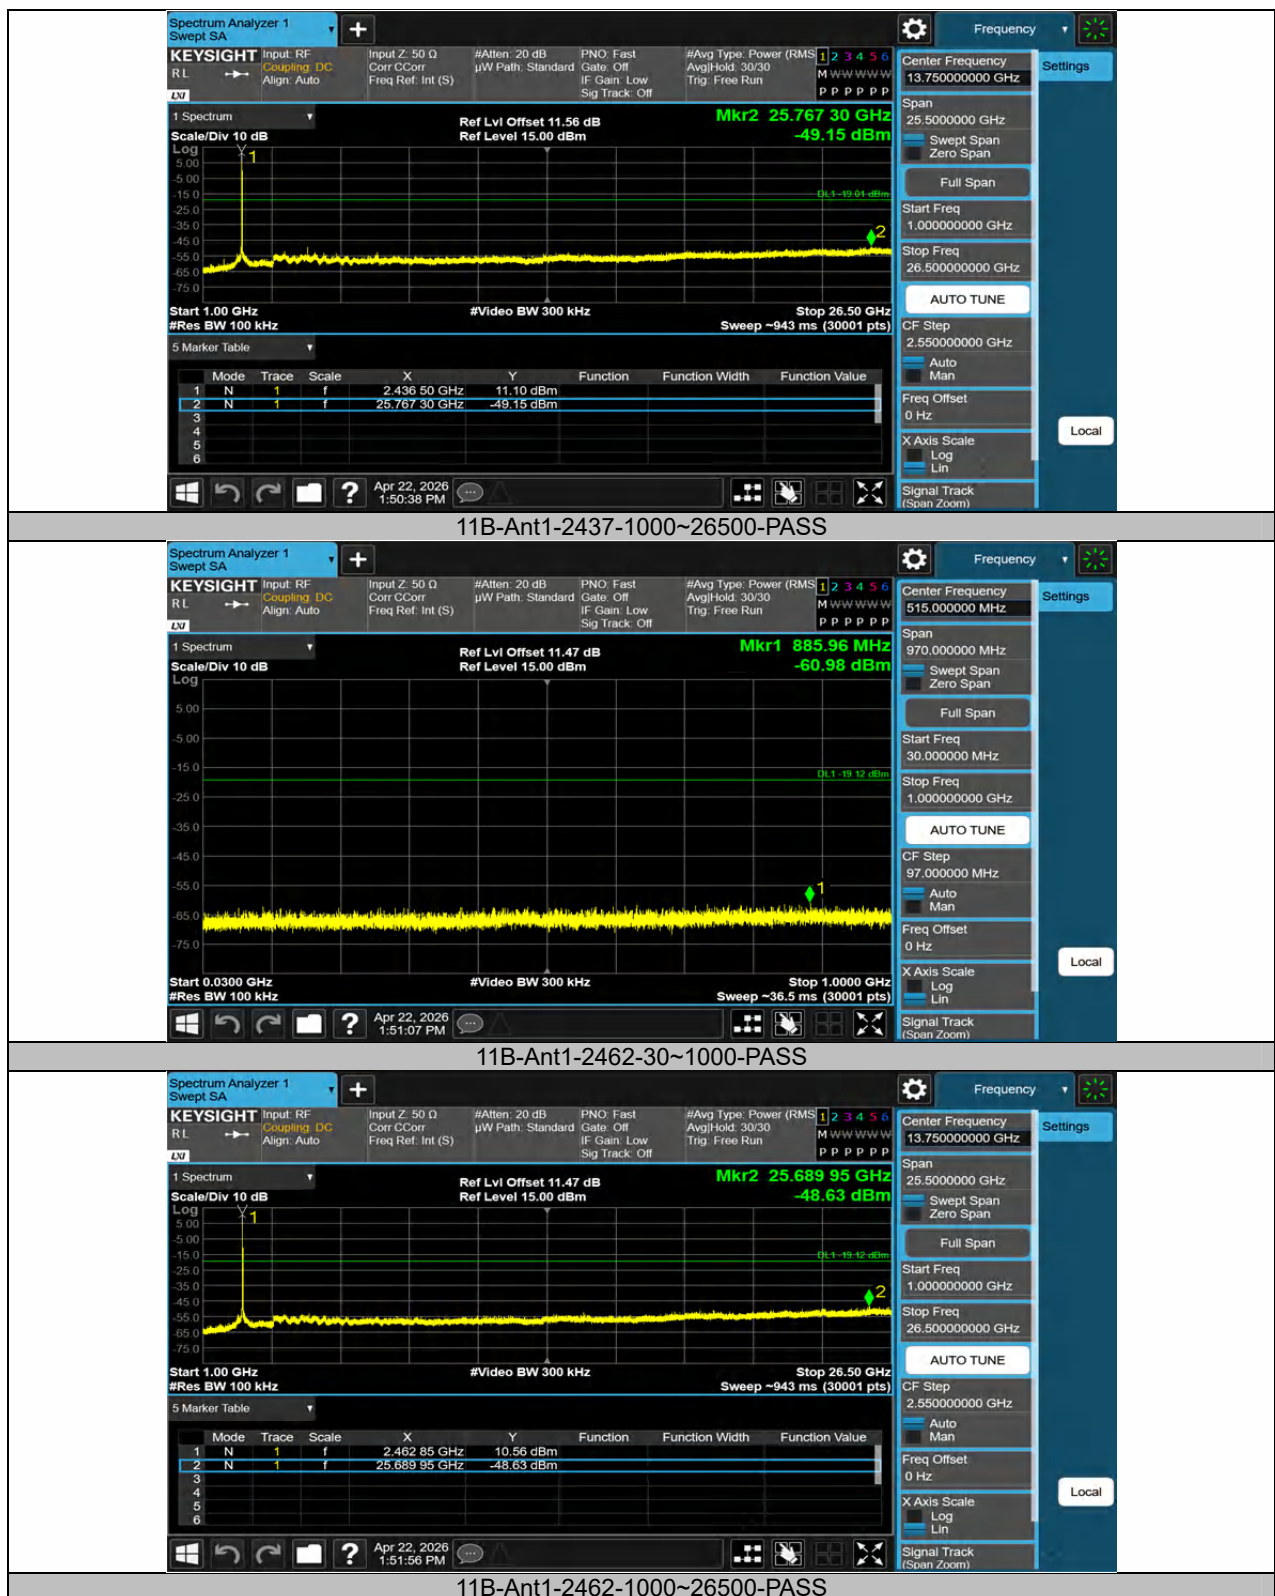

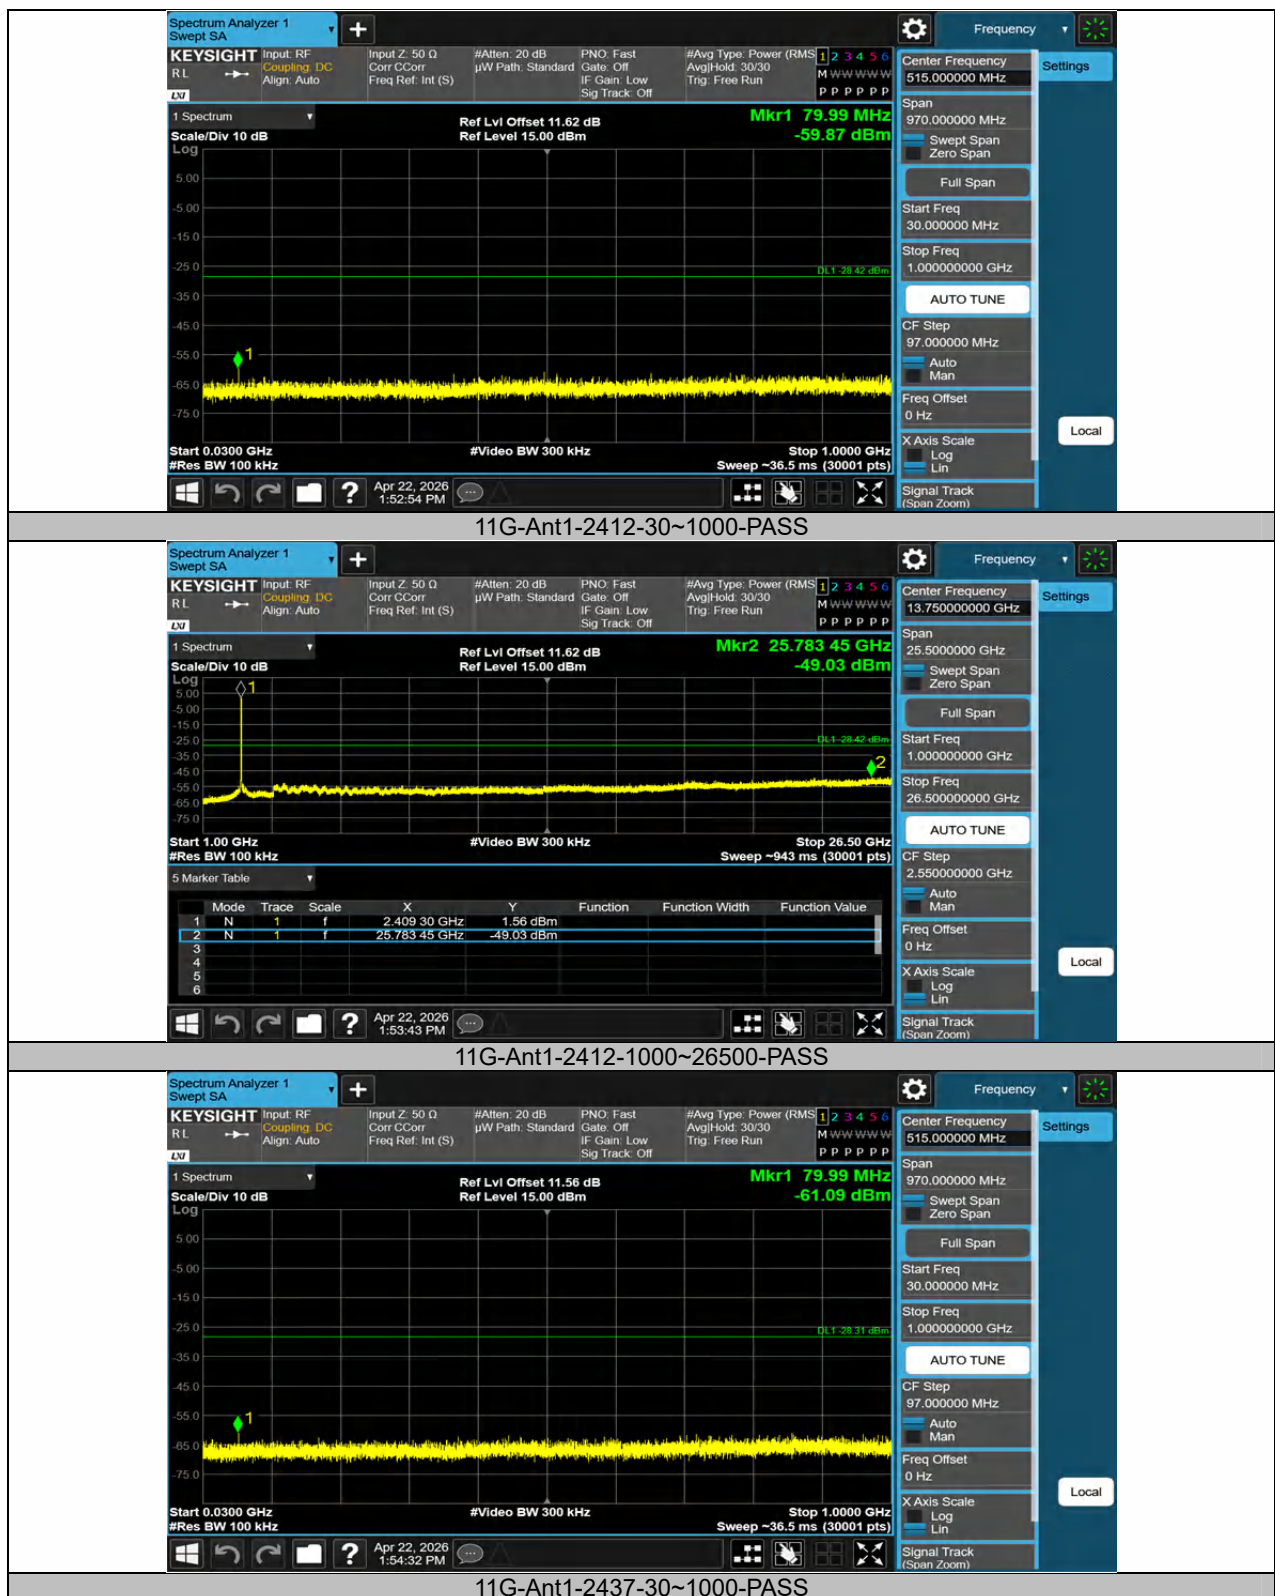

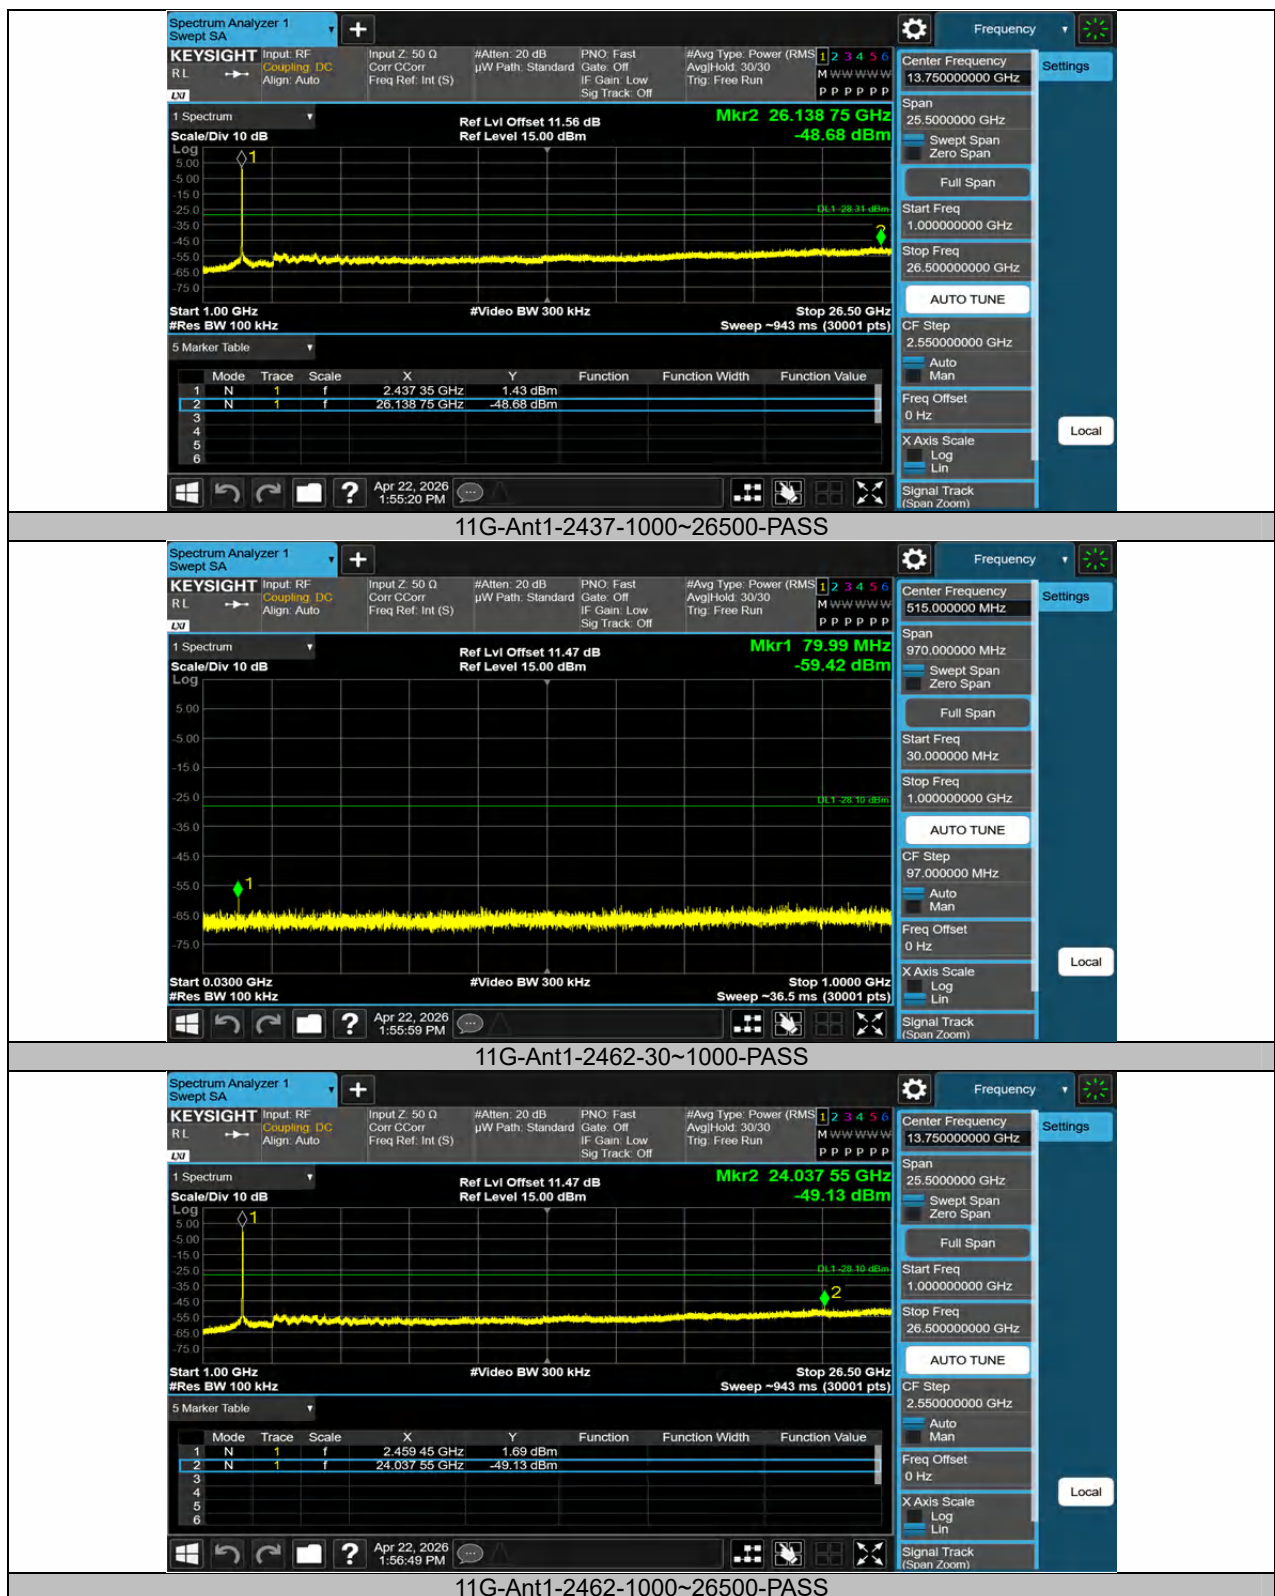

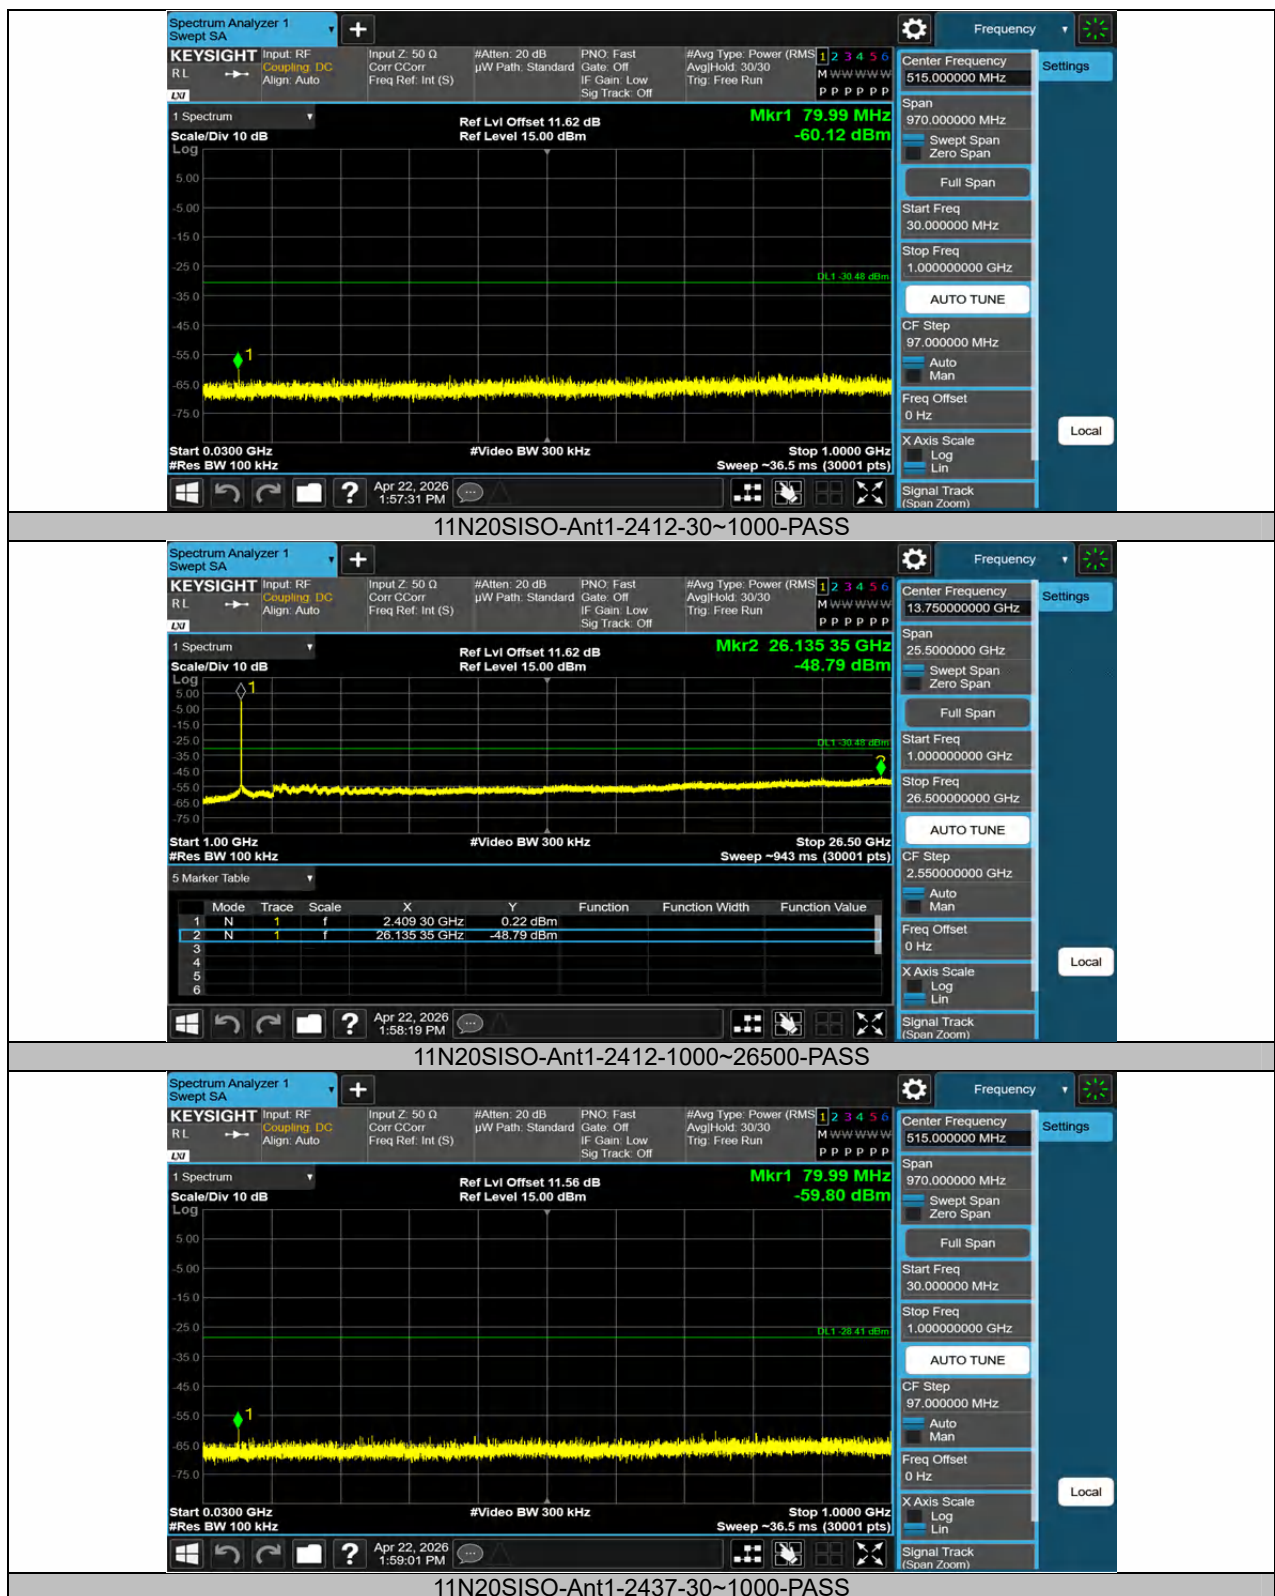

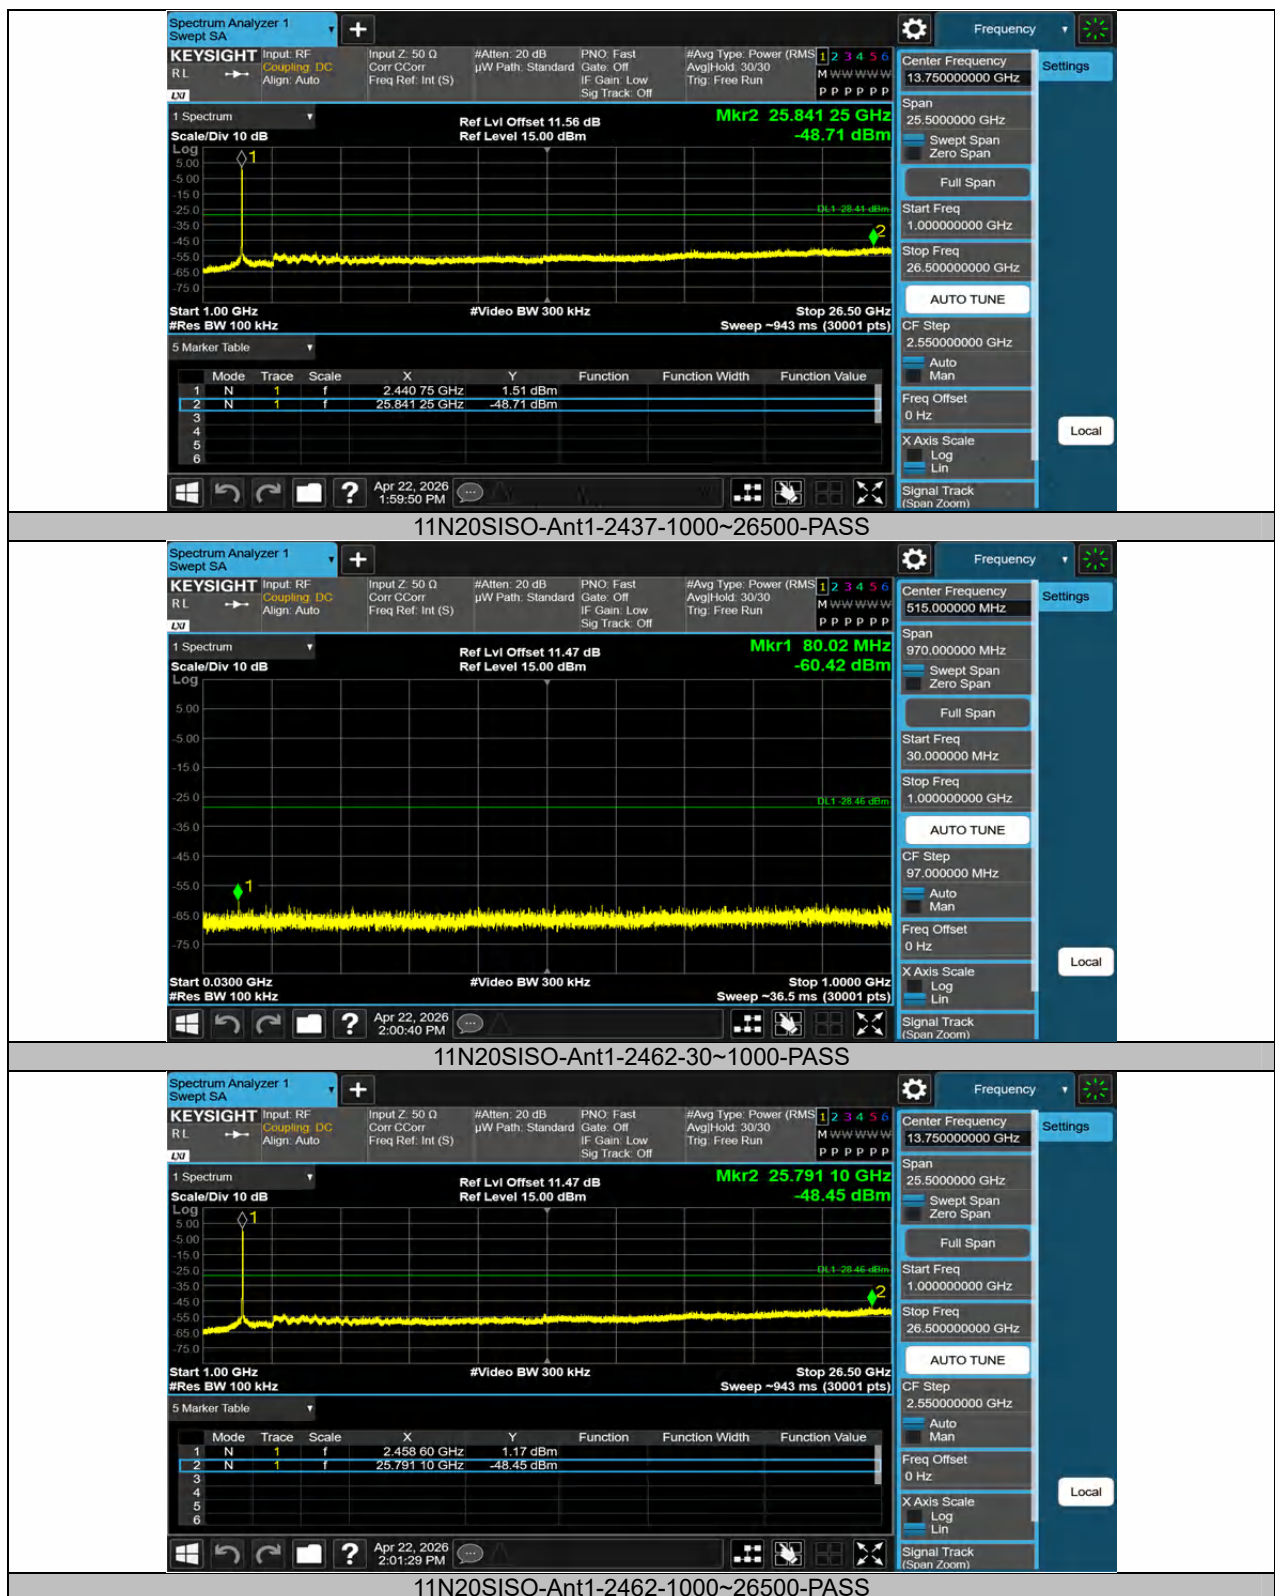

8.6 RADIATED SPURIOUS EMISSION

8.6.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

8.6.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205 the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.6.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.6.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.6.5 Test Results

Temperature:	24°C
Relative Humidity:	70%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance/ test distance})$ (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor




■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All the antenna(Antenna 1)and modes(802.11b/g/n)have been tested and the worst(Antenna 1,802.11b) result recorded was report as below:

We conducted tests at 120V and 240V. The following are the test data of the worst results:

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 04:02:35

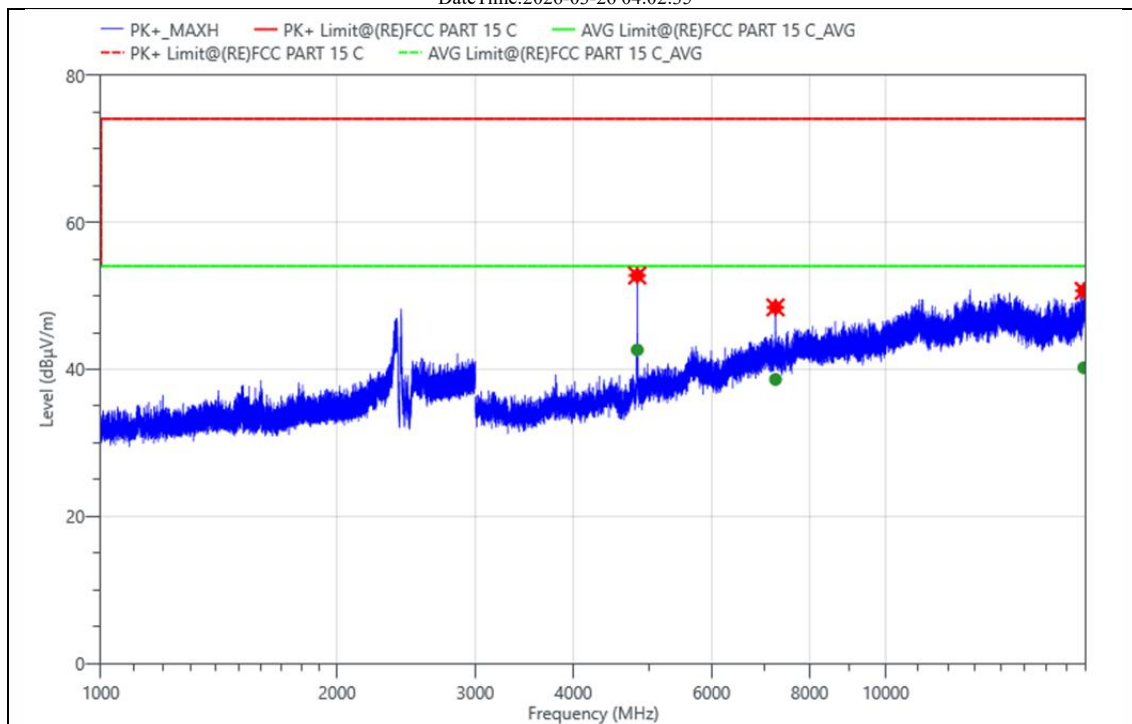


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	4824.000	61.42	-8.65	52.77	74.00	21.23	PK+	V	PASS
2	4824.000	51.30	-8.65	42.65	54.00	11.35	AVG	V	PASS
3	7237.000	48.95	-0.51	48.44	74.00	25.56	PK+	V	PASS
4	7237.000	39.14	-0.51	38.63	54.00	15.37	AVG	V	PASS
5	17882.000	38.37	12.32	50.69	74.00	23.31	PK+	V	PASS
6	17882.000	27.90	12.32	40.22	54.00	13.78	AVG	V	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 04:00:48

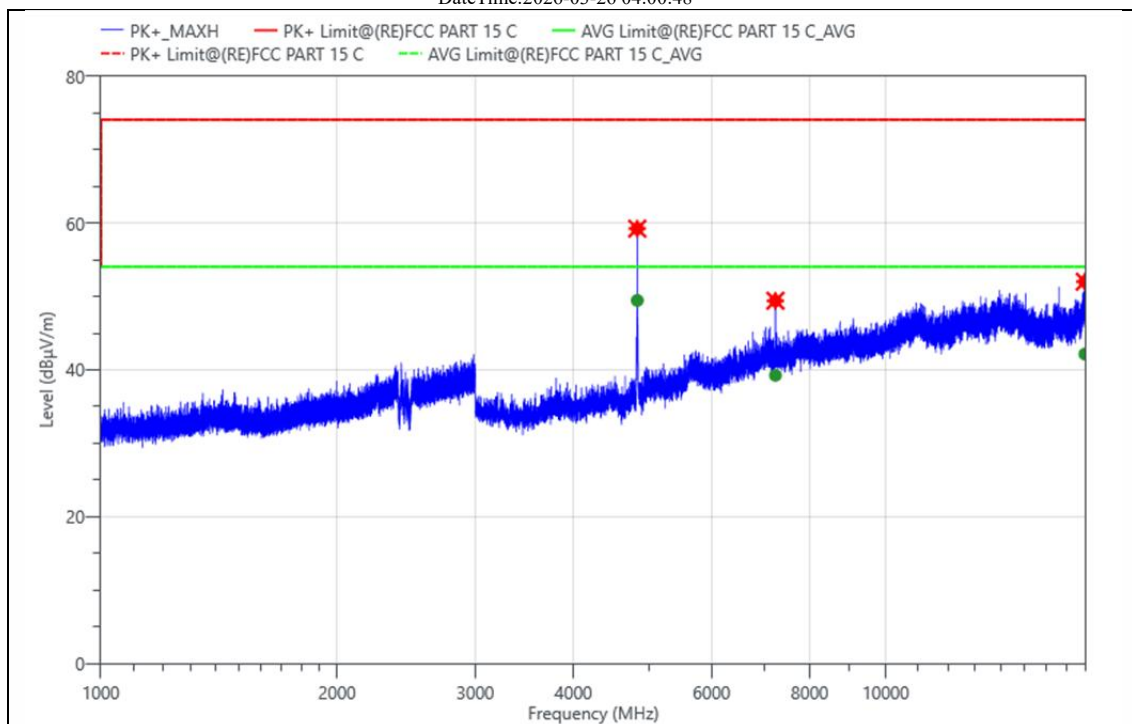


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	4824.500	67.89	-8.64	59.25	74.00	14.75	PK+	H	PASS
2	4824.500	58.10	-8.64	49.46	54.00	4.54	AVG	H	PASS
3	7236.000	49.93	-0.51	49.42	74.00	24.58	PK+	H	PASS
4	7236.000	39.77	-0.51	39.26	54.00	14.74	AVG	H	PASS
5	17935.500	39.13	12.88	52.01	74.00	21.99	PK+	H	PASS
6	17935.500	29.28	12.88	42.16	54.00	11.84	AVG	H	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2437MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 03:56:20

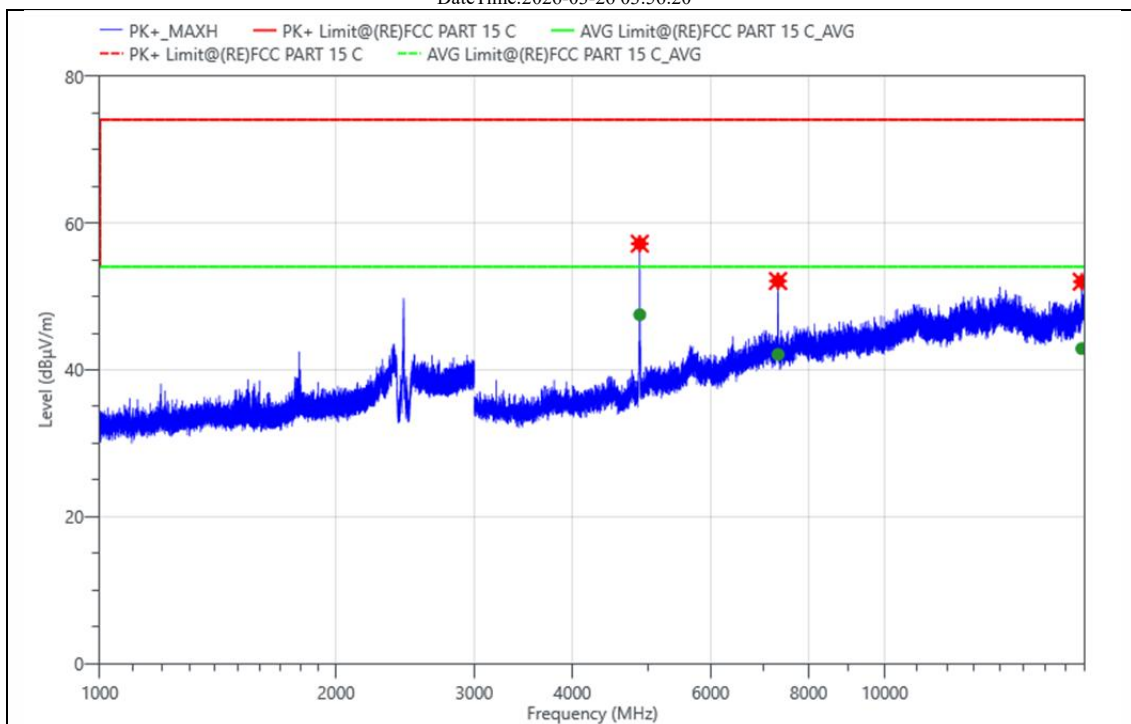


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	4874.000	65.47	-8.27	57.20	74.00	16.80	PK+	V
2	4874.000	55.79	-8.27	47.52	54.00	6.48	AVG	V
3	7312.500	52.50	-0.39	52.11	74.00	21.89	PK+	V
4	7312.500	42.49	-0.39	42.10	54.00	11.90	AVG	V
5	17827.500	40.07	11.95	52.02	74.00	21.98	PK+	V
6	17827.500	30.95	11.95	42.90	54.00	11.10	AVG	V

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2437MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 03:58:11

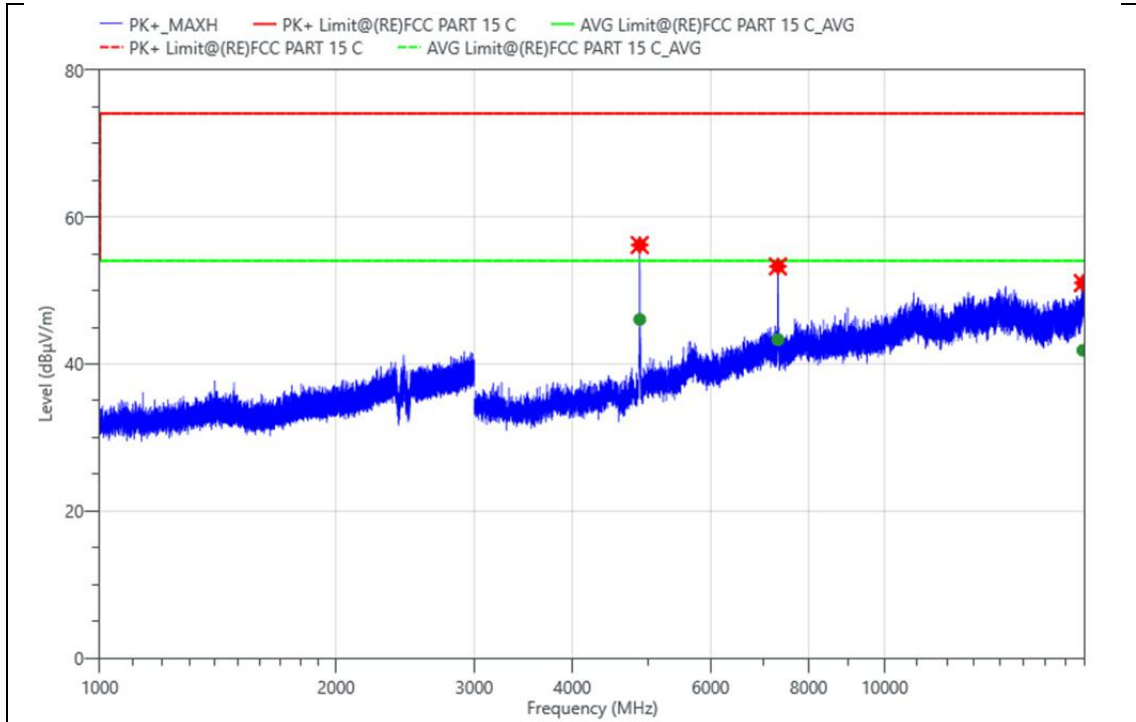


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBµV/m)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.	Verdict
1	4874.000	64.47	-8.27	56.20	74.00	17.80	PK+	H	PASS
2	4874.000	54.34	-8.27	46.07	54.00	7.93	AVG	H	PASS
3	7310.500	53.68	-0.39	53.29	74.00	20.71	PK+	H	PASS
4	7310.500	43.71	-0.39	43.32	54.00	10.68	AVG	H	PASS
5	17887.000	38.66	12.36	51.02	74.00	22.98	PK+	H	PASS
6	17887.000	29.51	12.36	41.87	54.00	12.13	AVG	H	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 03:31:07

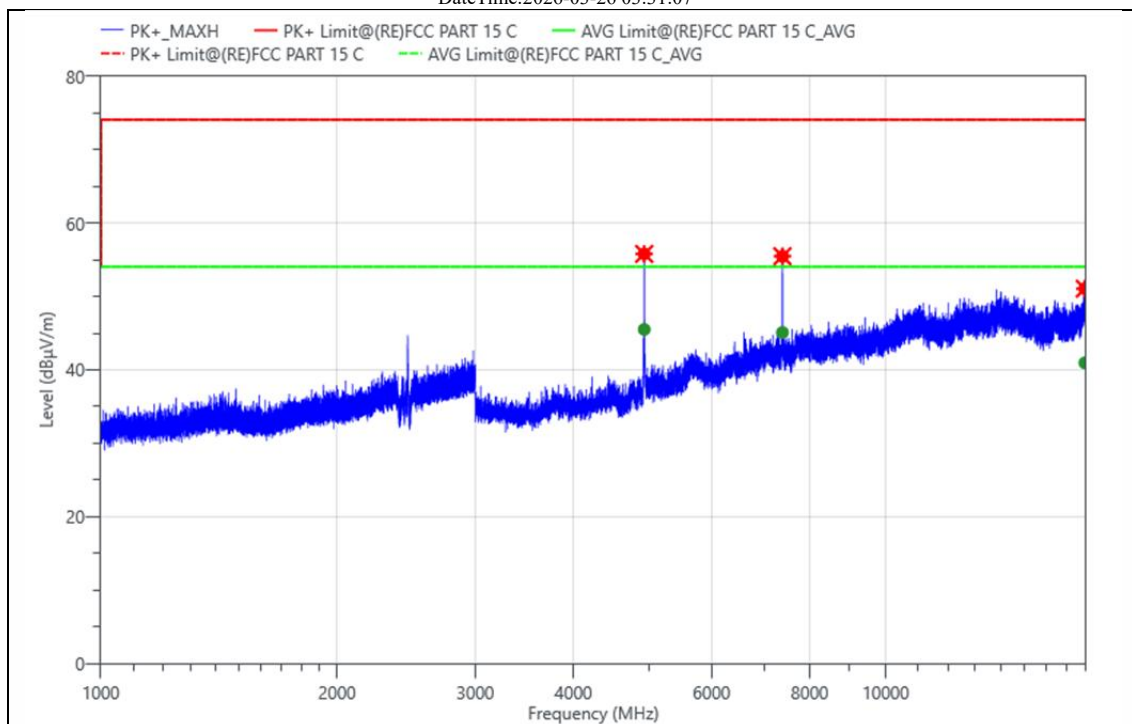


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBµV/m)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.	Verdict
1	4924.000	63.61	-7.81	55.80	74.00	18.20	PK+	H	PASS
2	4924.000	53.32	-7.81	45.51	54.00	8.49	AVG	H	PASS
3	7386.000	55.76	-0.27	55.49	74.00	18.51	PK+	H	PASS
4	7386.000	45.37	-0.27	45.10	54.00	8.90	AVG	H	PASS
5	17933.000	38.21	12.85	51.06	74.00	22.94	PK+	H	PASS
6	17933.000	28.11	12.85	40.96	54.00	13.04	AVG	H	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 03:53:27

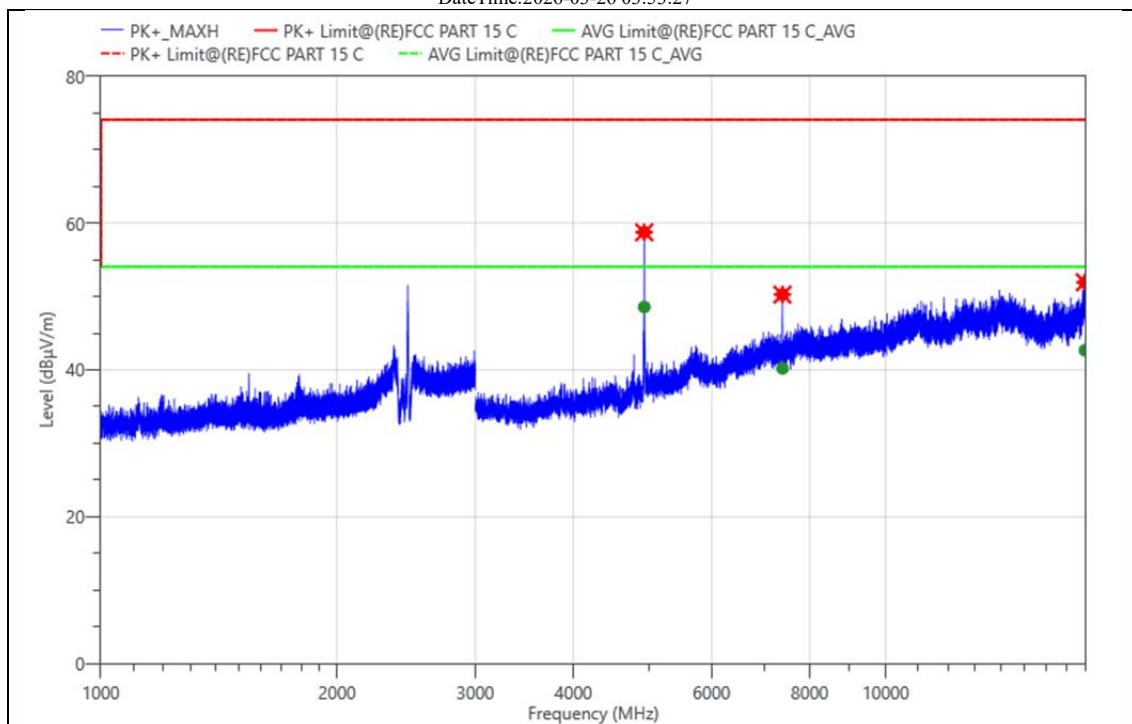

Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	4924.000	66.56	-7.81	58.75	74.00	15.25	PK+	V	PASS
2	4924.000	56.38	-7.81	48.57	54.00	5.43	AVG	V	PASS
3	7386.500	50.53	-0.27	50.26	74.00	23.74	PK+	V	PASS
4	7386.500	40.49	-0.27	40.22	54.00	13.78	AVG	V	PASS
5	17940.000	39.01	12.93	51.94	74.00	22.06	PK+	V	PASS
6	17940.000	29.75	12.93	42.68	54.00	11.32	AVG	V	PASS

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=1kHz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp
- (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5)The test frequency range, 18GHz~25GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.


■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1) and modes(802.11b/g/n) have been tested and the worst(Antenna 1,802.11b) result recorded was report as below:

We conducted tests at 120V and 240V. The following are the test data of the worst results:

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 04:04:14

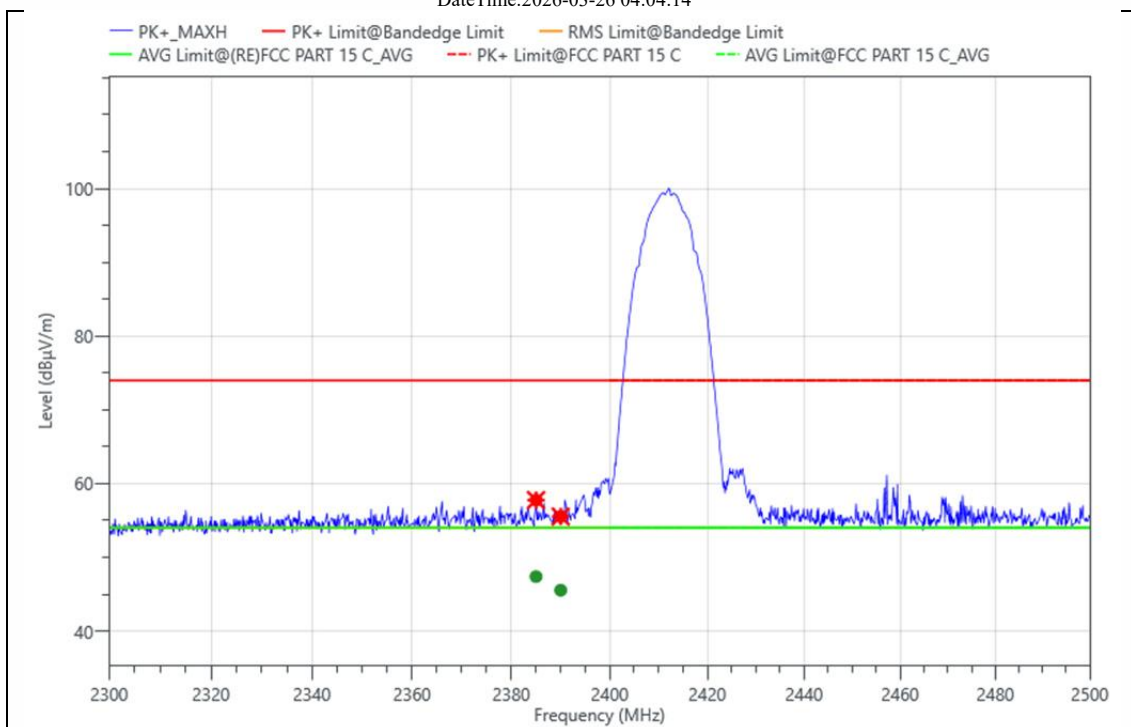


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	2385.000	27.72	30.05	57.77	74.00	16.23	PK+	V	PASS
2	2385.000	17.34	30.05	47.39	54.00	6.61	AVG	V	PASS
3	2390.000	25.47	30.06	55.53	74.00	18.47	PK+	V	PASS
4	2390.000	15.48	30.06	45.54	54.00	8.46	AVG	V	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 04:05:36

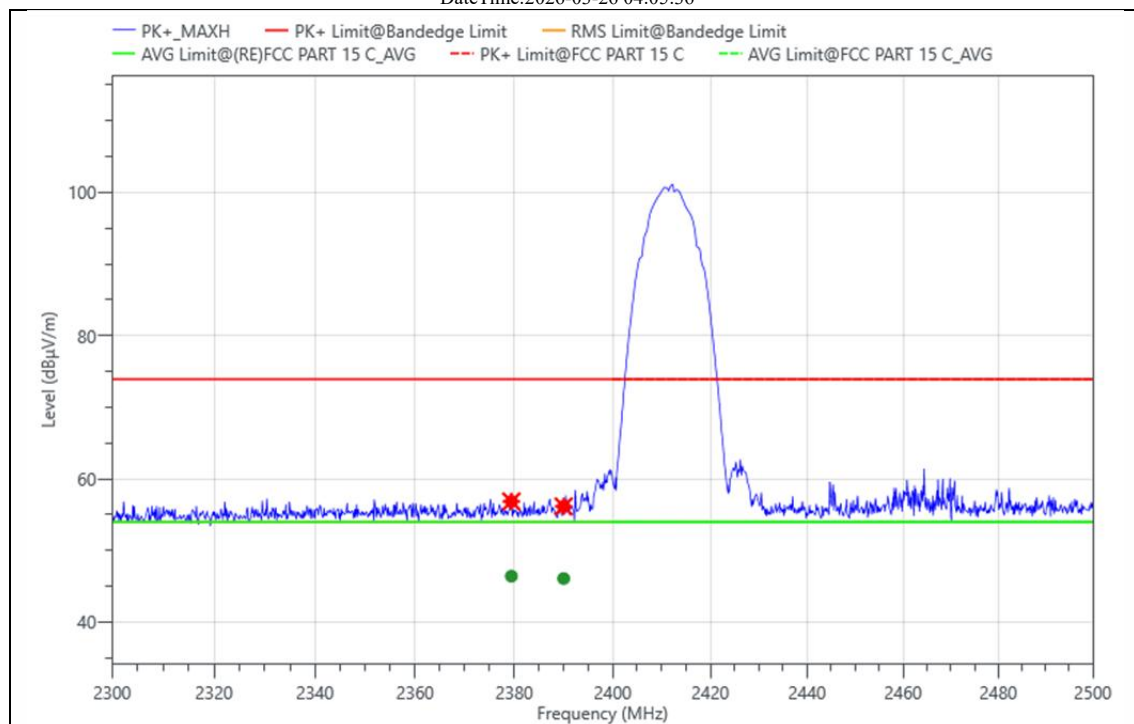


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	2379.400	26.81	30.05	56.86	74.00	17.14	PK+	H	PASS
2	2379.400	16.37	30.05	46.42	54.00	7.58	AVG	H	PASS
3	2390.000	26.10	30.06	56.16	74.00	17.84	PK+	H	PASS
4	2390.000	16.03	30.06	46.09	54.00	7.91	AVG	H	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 03:46:16

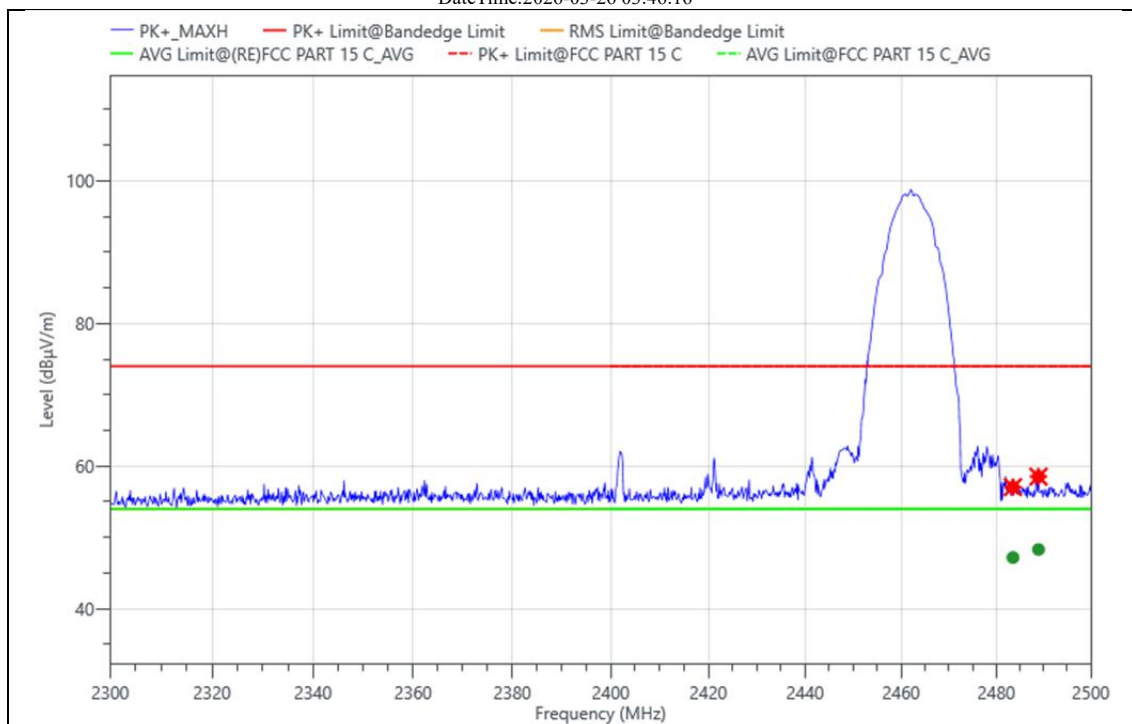


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	2483.500	26.70	30.34	57.04	74.00	16.96	PK+	V	PASS
2	2483.500	16.82	30.34	47.16	54.00	6.84	AVG	V	PASS
3	2488.900	28.15	30.36	58.51	74.00	15.49	PK+	V	PASS
4	2488.900	17.92	30.36	48.28	54.00	5.72	AVG	V	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-26 03:48:28

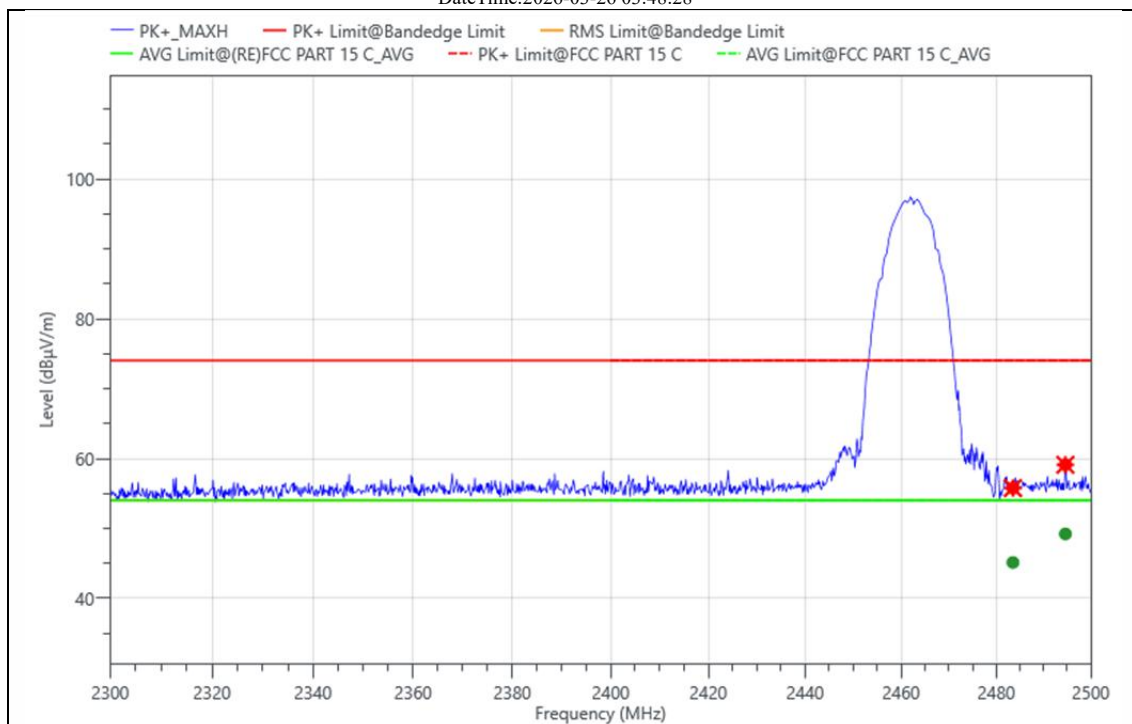

Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	2483.500	25.44	30.34	55.78	74.00	18.22	PK+	H	PASS
2	2483.500	14.80	30.34	45.14	54.00	8.86	AVG	H	PASS
3	2494.600	28.74	30.37	59.11	74.00	14.89	PK+	H	PASS
4	2494.600	18.85	30.37	49.22	54.00	4.78	AVG	H	PASS

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=1kHz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp
- (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


■ Spurious Emission below 1GHz (30MHz to 1GHz)

All the antenna(Antenna 1) and modes(802.11b/g/n) have been tested and the worst(Antenna 1,802.11b) result recorded was report as below:

We conducted tests at 120V and 240V. The following are the test data of the worst results:

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-19 04:05:33

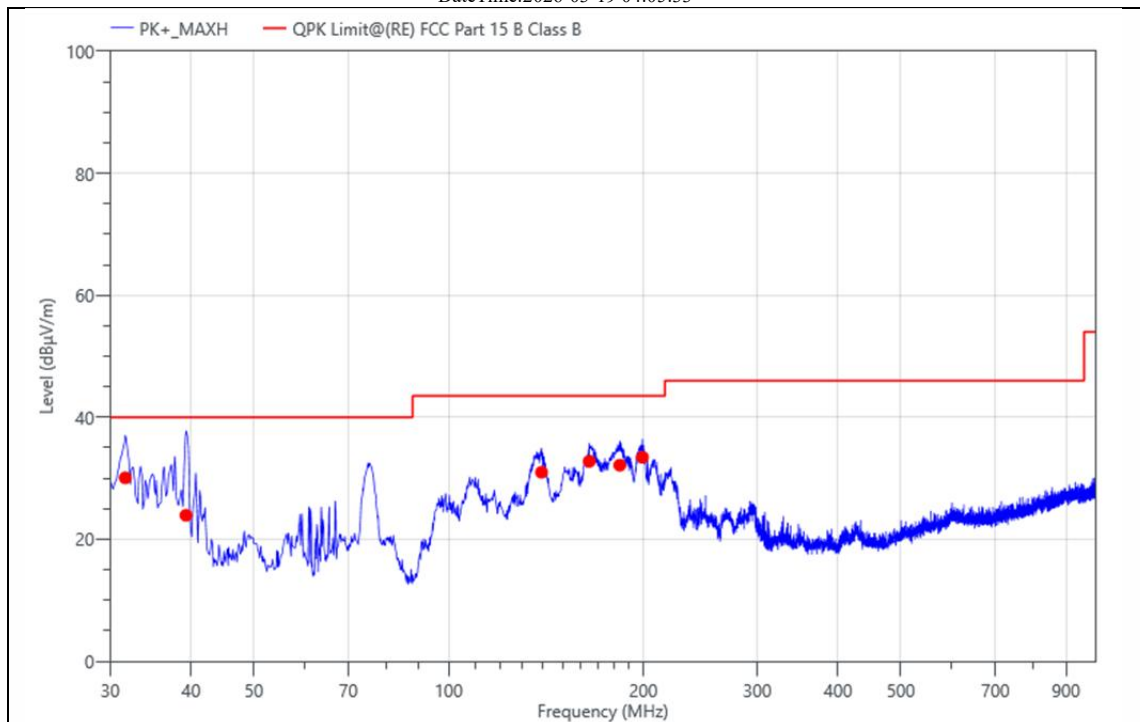


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	31.649	55.31	-25.24	30.07	40.00	9.93	QPK	V	PASS
2	39.277	48.55	-24.62	23.93	40.00	16.07	QPK	V	PASS
3	139.222	59.05	-28.06	30.99	43.50	12.51	QPK	V	PASS
4	165.024	59.62	-26.83	32.79	43.50	10.71	QPK	V	PASS
5	183.939	57.85	-25.71	32.14	43.50	11.36	QPK	V	PASS
6	199.362	58.15	-24.71	33.44	43.50	10.06	QPK	V	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-19 04:08:55

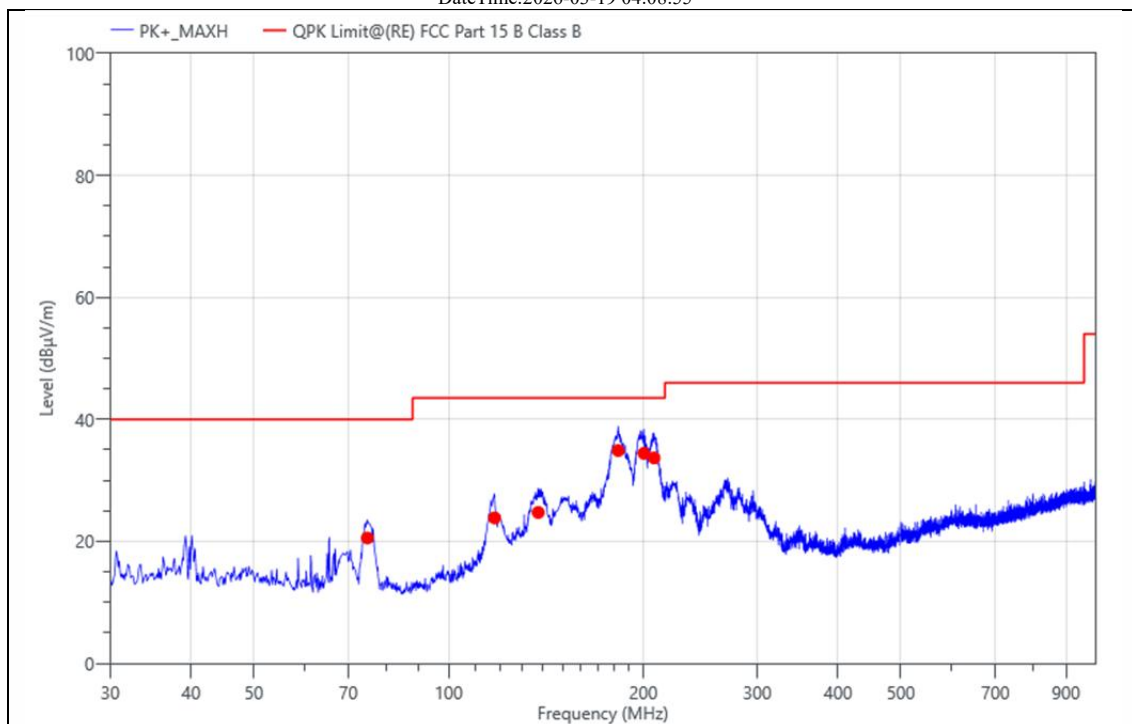


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	74.911	47.54	-26.98	20.56	40.00	19.44	QPK	H	PASS
2	117.785	50.72	-26.87	23.85	43.50	19.65	QPK	H	PASS
3	137.573	52.73	-27.99	24.74	43.50	18.76	QPK	H	PASS
4	182.872	60.64	-25.75	34.89	43.50	8.61	QPK	H	PASS
5	200.429	59.09	-24.65	34.44	43.50	9.06	QPK	H	PASS
6	207.801	58.15	-24.47	33.68	43.50	9.82	QPK	H	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2437MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-19 04:21:27

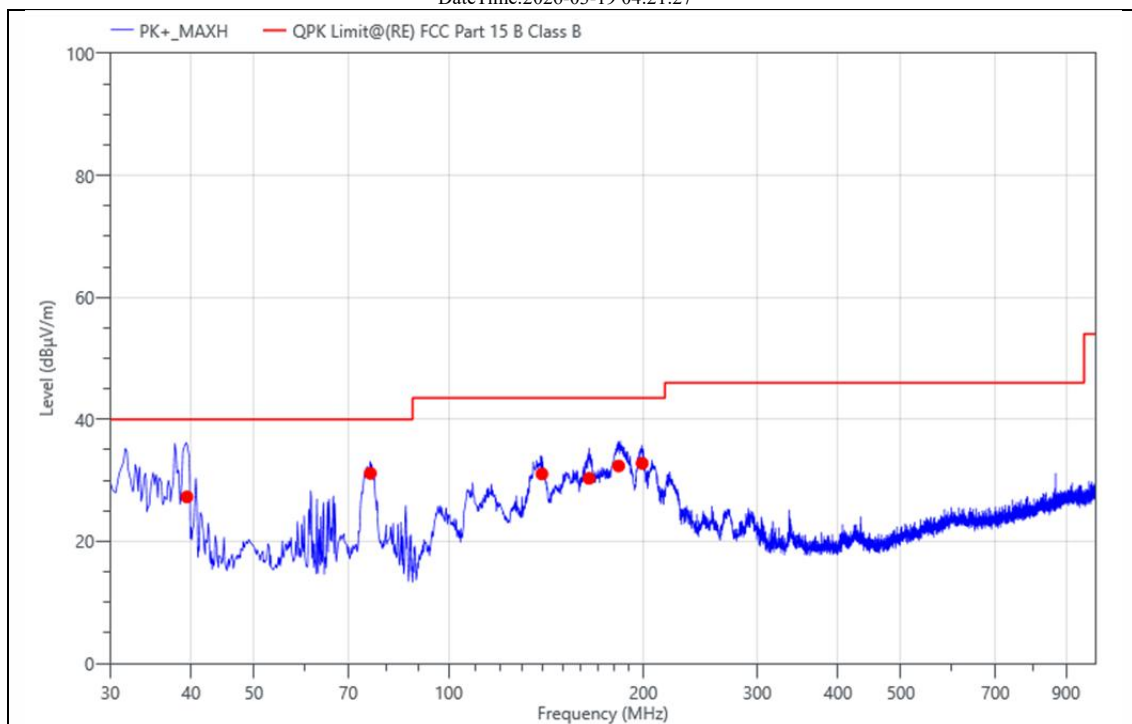


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	39.409	51.90	-24.61	27.29	40.00	12.71	QPK	V	PASS
2	75.687	58.14	-26.98	31.16	40.00	8.84	QPK	V	PASS
3	139.416	59.12	-28.07	31.05	43.50	12.45	QPK	V	PASS
4	164.830	57.18	-26.84	30.34	43.50	13.16	QPK	V	PASS
5	183.163	58.11	-25.74	32.37	43.50	11.13	QPK	V	PASS
6	199.168	57.52	-24.73	32.79	43.50	10.71	QPK	V	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2437MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-19 04:24:39

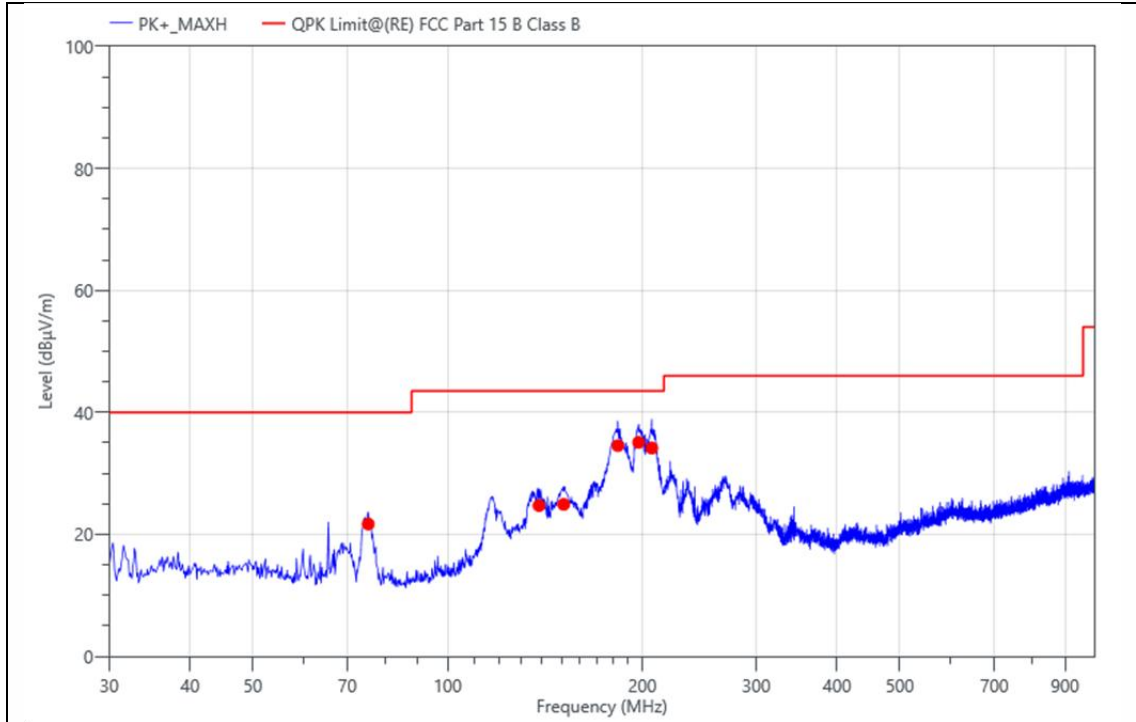


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	75.396	48.68	-26.98	21.70	40.00	18.30	QPK	H	PASS
2	138.446	52.75	-28.02	24.73	43.50	18.77	QPK	H	PASS
3	151.153	51.84	-26.92	24.92	43.50	18.58	QPK	H	PASS
4	183.357	60.28	-25.73	34.55	43.50	8.95	QPK	H	PASS
5	197.422	59.97	-24.88	35.09	43.50	8.41	QPK	H	PASS
6	206.831	58.64	-24.49	34.15	43.50	9.35	QPK	H	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-19 04:27:38

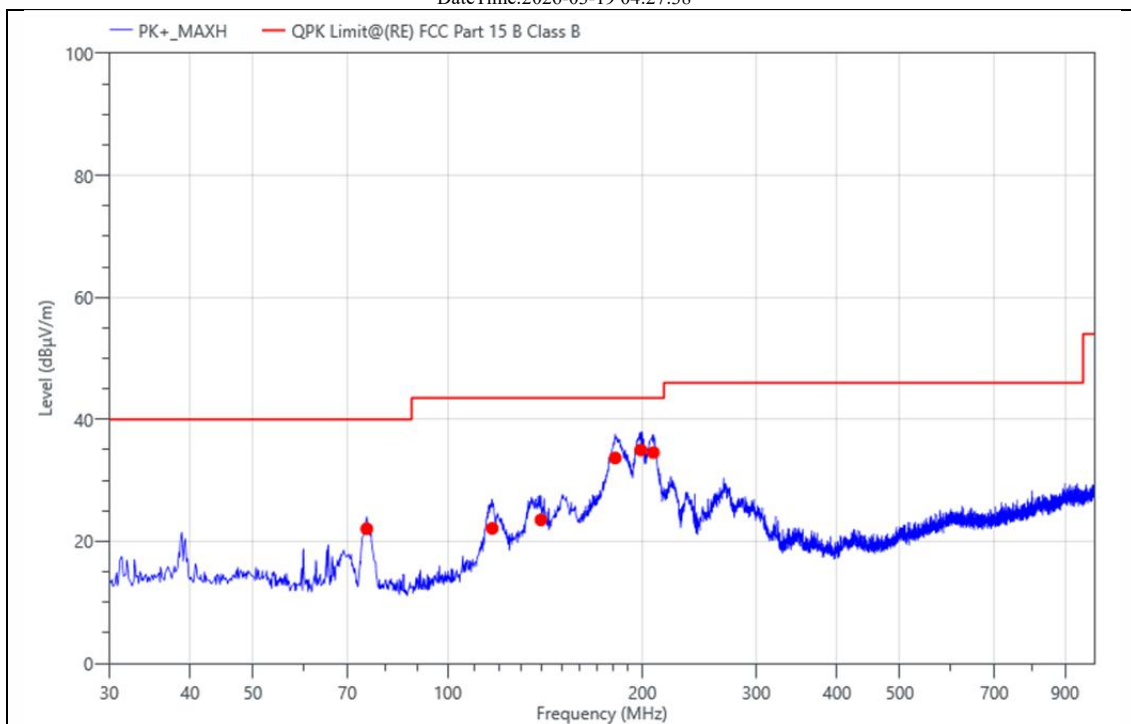


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	75.008	49.04	-26.98	22.06	40.00	17.94	QPK	H	PASS
2	117.203	48.94	-26.81	22.13	43.50	21.37	QPK	H	PASS
3	139.416	51.59	-28.07	23.52	43.50	19.98	QPK	H	PASS
4	181.611	59.46	-25.79	33.67	43.50	9.83	QPK	H	PASS
5	198.877	59.74	-24.76	34.98	43.50	8.52	QPK	H	PASS
6	207.995	59.02	-24.47	34.55	43.50	8.95	QPK	H	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	21°C	Humi :	66%

DateTime:2026-03-19 04:30:59

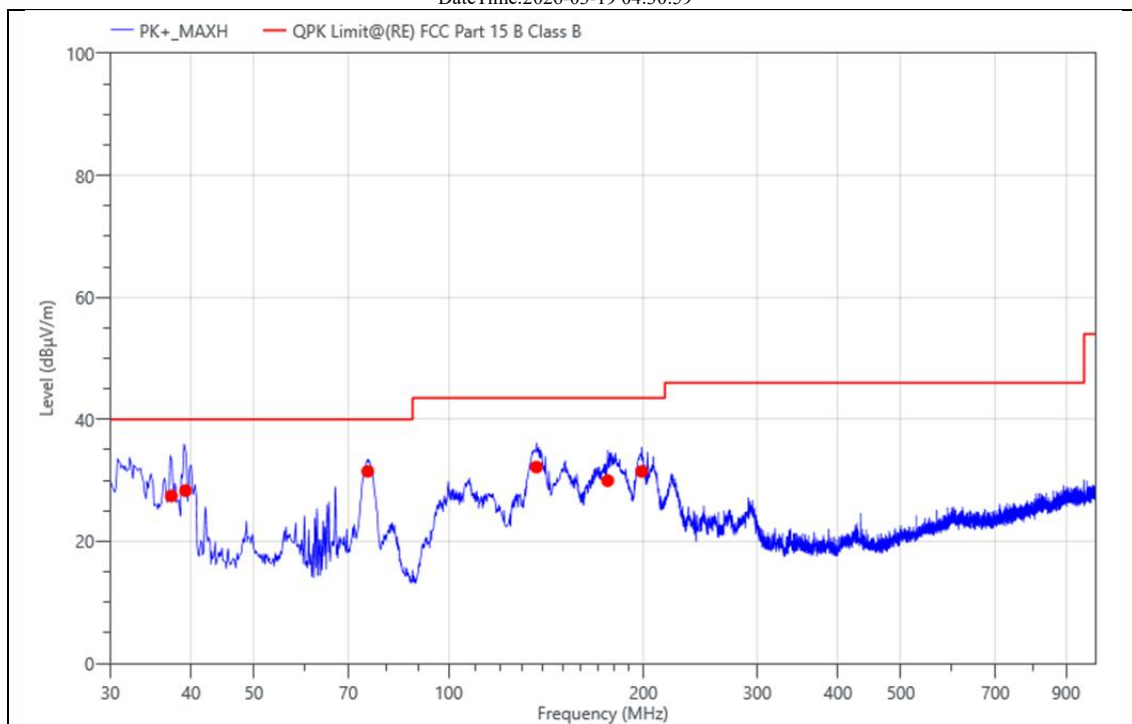

Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV/m)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	37.275	52.23	-24.78	27.45	40.00	12.55	QPK	V	PASS
2	39.215	52.96	-24.62	28.34	40.00	11.66	QPK	V	PASS
3	75.008	58.46	-26.98	31.48	40.00	8.52	QPK	V	PASS
4	136.700	60.13	-27.95	32.18	43.50	11.32	QPK	V	PASS
5	176.179	56.12	-26.16	29.96	43.50	13.54	QPK	V	PASS
6	198.877	56.23	-24.76	31.47	43.50	12.03	QPK	V	PASS

8.7 CONDUCTED EMISSION TEST

8.7.1 Applicable Standard

According to FCC Part 15.207(a)

8.7.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.7.3 Test Configuration

Test according to clause 6.3conducted emission test setup

8.7.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.


8.7.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	20°C	Humi :	40 %

DateTime:2026-04-01 02:27:55

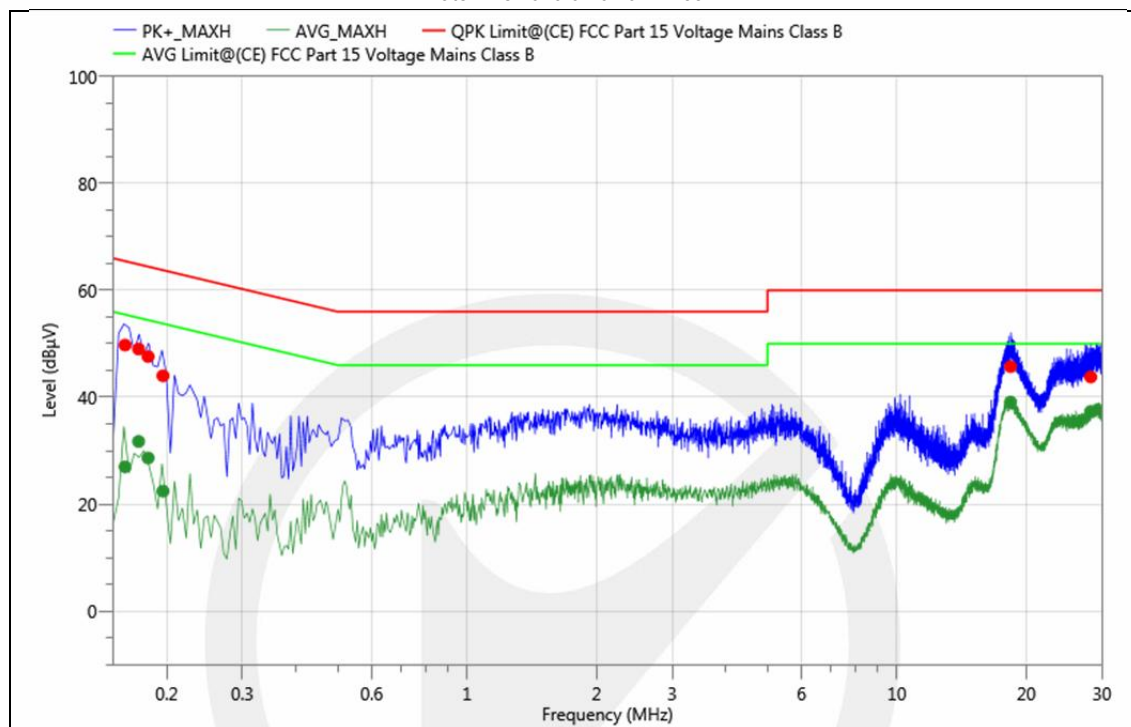


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.160	39.58	10.18	49.76	65.46	15.70	QPK	N	GND	PASS
2	0.160	16.80	10.18	26.98	55.46	28.48	AVG	N	GND	PASS
3	0.172	38.84	10.17	49.01	64.86	15.85	QPK	N	GND	PASS
4	0.172	21.55	10.17	31.72	54.86	23.14	AVG	N	GND	PASS
5	0.181	37.45	10.16	47.61	64.44	16.83	QPK	N	GND	PASS
6	0.181	18.47	10.16	28.63	54.44	25.81	AVG	N	GND	PASS
7	0.196	33.87	10.14	44.01	63.78	19.77	QPK	N	GND	PASS
8	0.196	12.29	10.14	22.43	53.78	31.35	AVG	N	GND	PASS
9	18.382	34.98	10.75	45.73	60.00	14.27	QPK	N	GND	PASS
10	18.382	28.33	10.75	39.08	50.00	10.92	AVG	N	GND	PASS
11	28.233	32.87	10.92	43.79	60.00	16.21	QPK	N	GND	PASS
12	28.233	26.43	10.92	37.35	50.00	12.65	AVG	N	GND	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2412MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	20°C	Humi :	40 %

DateTime:2026-04-01 02:32:54

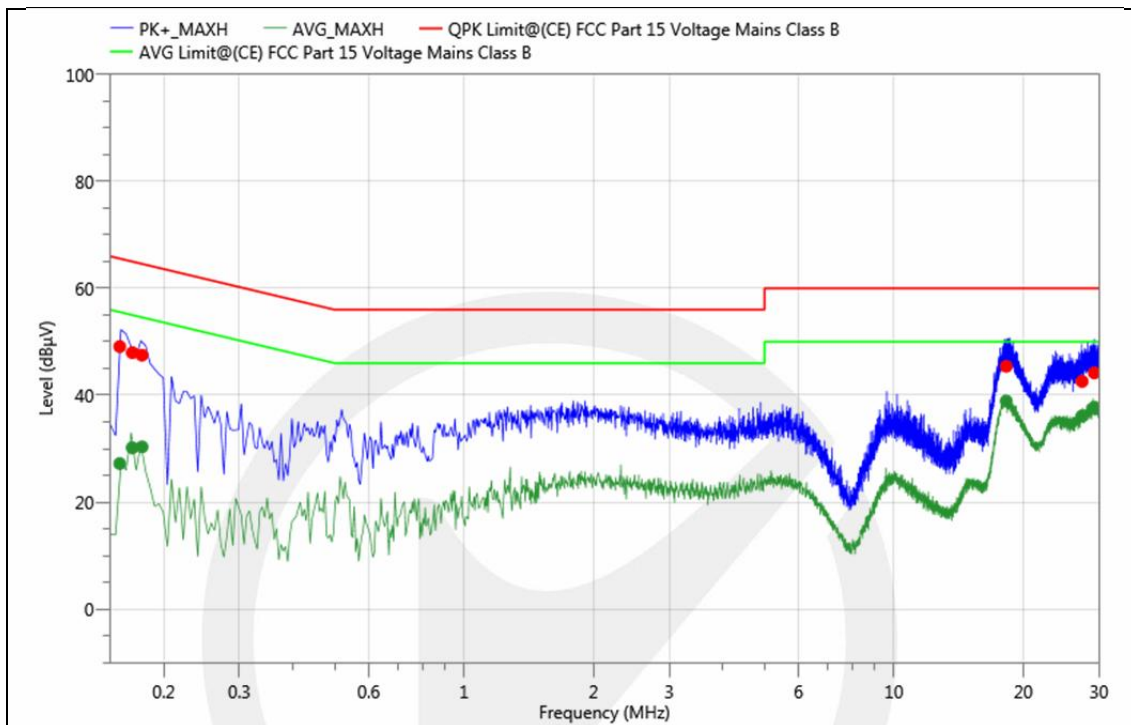


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV)	Limit (dBµV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.158	38.97	10.14	49.11	65.57	16.46	QPK	L1	GND	PASS
2	0.158	17.08	10.14	27.22	55.57	28.35	AVG	L1	GND	PASS
3	0.169	37.81	10.16	47.97	65.01	17.04	QPK	L1	GND	PASS
4	0.169	20.01	10.16	30.17	55.01	24.84	AVG	L1	GND	PASS
5	0.178	37.33	10.17	47.50	64.58	17.08	QPK	L1	GND	PASS
6	0.178	20.17	10.17	30.34	54.58	24.24	AVG	L1	GND	PASS
7	18.252	34.68	10.72	45.40	60.00	14.60	QPK	L1	GND	PASS
8	18.252	28.20	10.72	38.92	50.00	11.08	AVG	L1	GND	PASS
9	27.392	31.72	10.87	42.59	60.00	17.41	QPK	L1	GND	PASS
10	27.392	25.26	10.87	36.13	50.00	13.87	AVG	L1	GND	PASS
11	29.245	33.28	10.9	44.18	60.00	15.82	QPK	L1	GND	PASS
12	29.245	26.87	10.9	37.77	50.00	12.23	AVG	L1	GND	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2437MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	20°C	Humi :	40 %

DateTime:2026-04-01 02:40:24

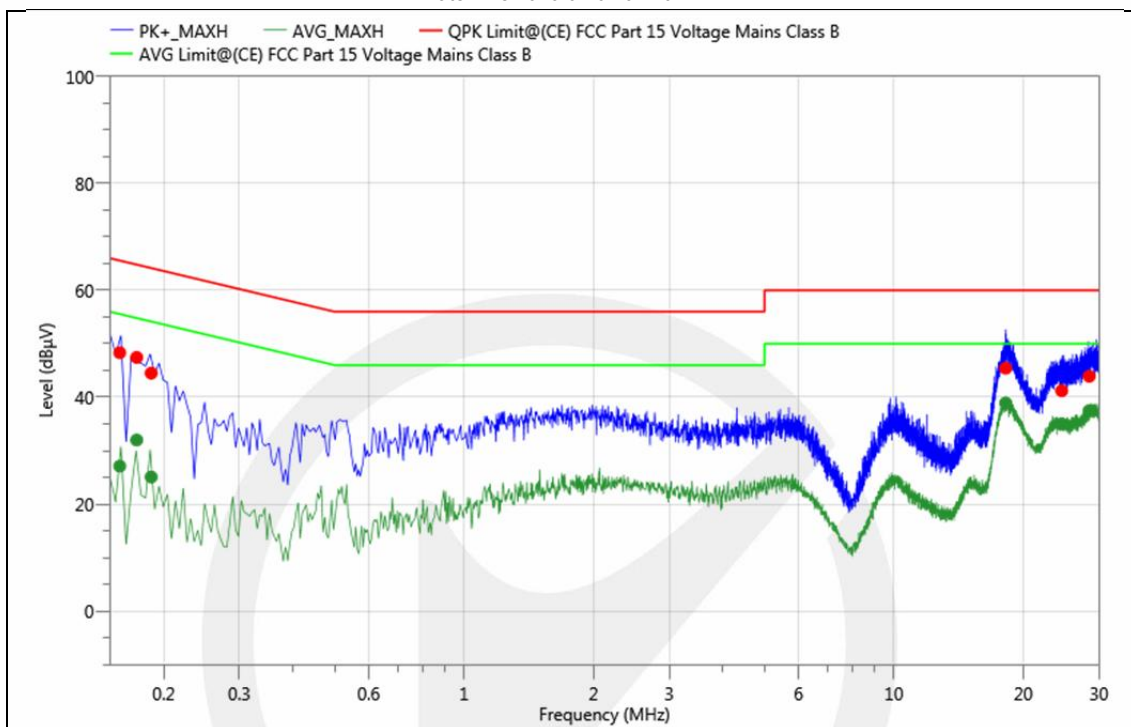


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.158	38.20	10.14	48.34	65.57	17.23	QPK	L1	GND	PASS
2	0.158	16.96	10.14	27.10	55.57	28.47	AVG	L1	GND	PASS
3	0.173	37.29	10.16	47.45	64.82	17.37	QPK	L1	GND	PASS
4	0.173	21.83	10.16	31.99	54.82	22.83	AVG	L1	GND	PASS
5	0.187	34.32	10.18	44.50	64.17	19.67	QPK	L1	GND	PASS
6	0.187	14.89	10.18	25.07	54.17	29.10	AVG	L1	GND	PASS
7	18.190	34.70	10.72	45.42	60.00	14.58	QPK	L1	GND	PASS
8	18.190	28.20	10.72	38.92	50.00	11.08	AVG	L1	GND	PASS
9	24.561	30.39	10.83	41.22	60.00	18.78	QPK	L1	GND	PASS
10	24.561	24.20	10.83	35.03	50.00	14.97	AVG	L1	GND	PASS
11	28.457	33.04	10.89	43.93	60.00	16.07	QPK	L1	GND	PASS
12	28.457	26.59	10.89	37.48	50.00	12.52	AVG	L1	GND	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2437MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	20°C	Humi :	40 %

DateTime:2026-04-01 02:47:37

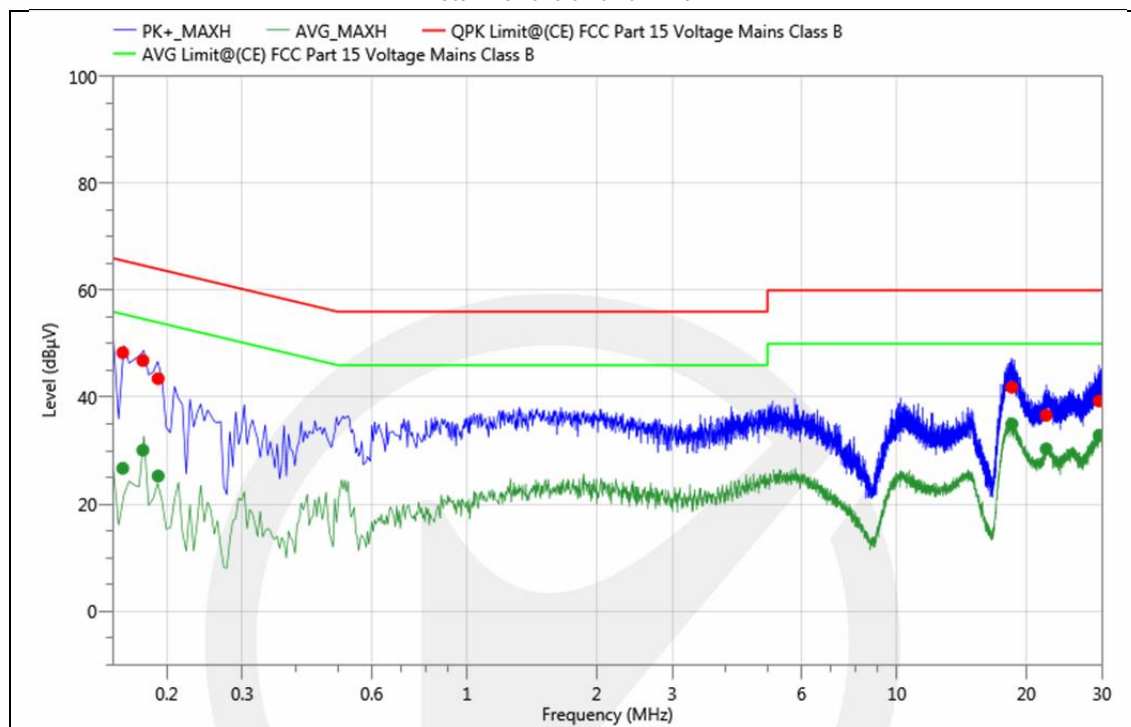


Final_Result

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV)	Limit (dBµV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.158	38.16	10.18	48.34	65.57	17.23	QPK	N	GND	PASS
2	0.158	16.52	10.18	26.70	55.57	28.87	AVG	N	GND	PASS
3	0.176	36.70	10.16	46.86	64.67	17.81	QPK	N	GND	PASS
4	0.176	19.92	10.16	30.08	54.67	24.59	AVG	N	GND	PASS
5	0.191	33.33	10.15	43.48	63.99	20.51	QPK	N	GND	PASS
6	0.191	15.11	10.15	25.26	53.99	28.73	AVG	N	GND	PASS
7	18.508	31.10	10.75	41.85	60.00	18.15	QPK	N	GND	PASS
8	18.508	24.24	10.75	34.99	50.00	15.01	AVG	N	GND	PASS
9	22.242	25.79	10.82	36.61	60.00	23.39	QPK	N	GND	PASS
10	22.242	19.51	10.82	30.33	50.00	19.67	AVG	N	GND	PASS
11	29.540	28.34	10.94	39.28	60.00	20.72	QPK	N	GND	PASS
12	29.540	21.93	10.94	32.87	50.00	17.13	AVG	N	GND	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	20°C	Humi :	40 %

DateTime:2026-04-01 02:56:29

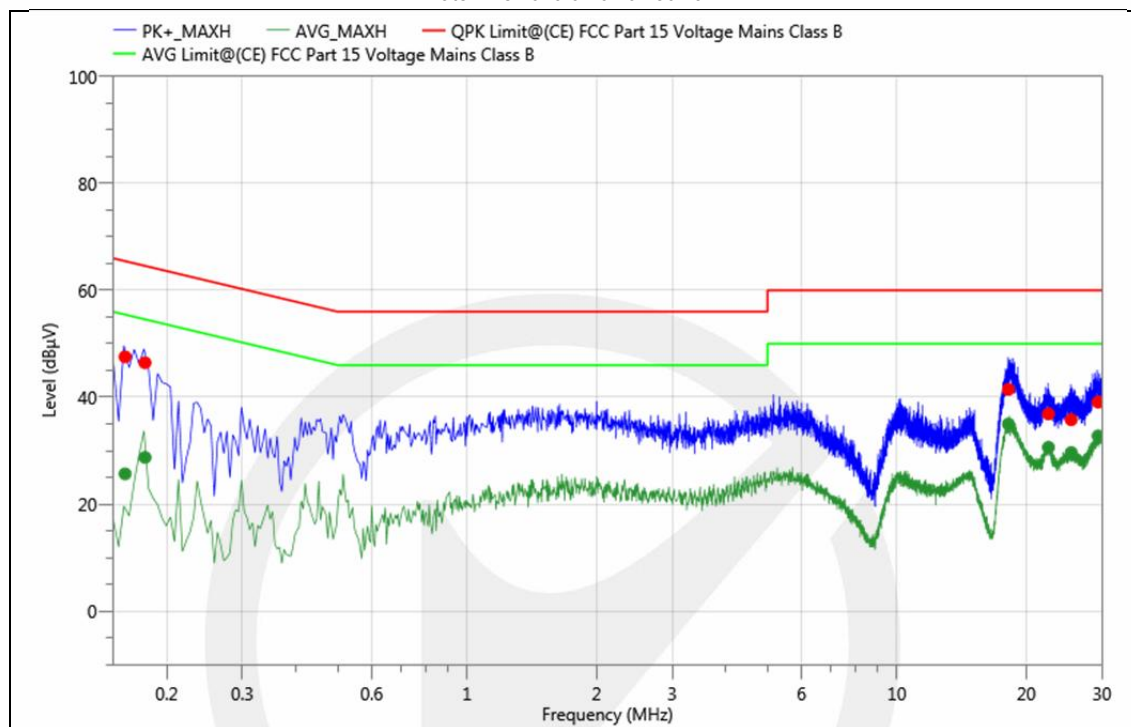


Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.160	37.38	10.18	47.56	65.46	17.90	QPK	N	GND	PASS
2	0.160	15.48	10.18	25.66	55.46	29.80	AVG	N	GND	PASS
3	0.178	36.29	10.16	46.45	64.58	18.13	QPK	N	GND	PASS
4	0.178	18.58	10.16	28.74	54.58	25.84	AVG	N	GND	PASS
5	18.163	30.71	10.75	41.46	60.00	18.54	QPK	N	GND	PASS
6	18.163	24.23	10.75	34.98	50.00	15.02	AVG	N	GND	PASS
7	22.515	26.05	10.82	36.87	60.00	23.13	QPK	N	GND	PASS
8	22.515	19.81	10.82	30.63	50.00	19.37	AVG	N	GND	PASS
9	25.434	24.93	10.86	35.79	60.00	24.21	QPK	N	GND	PASS
10	25.434	18.78	10.86	29.64	50.00	20.36	AVG	N	GND	PASS
11	29.384	28.15	10.94	39.09	60.00	20.91	QPK	N	GND	PASS
12	29.384	21.82	10.94	32.76	50.00	17.24	AVG	N	GND	PASS

Project No. :	ENB2603120248W005	Customer :	Charlton & Jenrick Ltd
Sample No. :	ENB2603120248W005-1-1	EUT :	Electric Fireplace
Model :	HE6-LE	Mode :	802.11b 2462MHz
Voltage :	AC 120V/60Hz	Engineer :	WK Luo
Temp :	20°C	Humi :	40 %

DateTime:2026-04-01 03:03:10

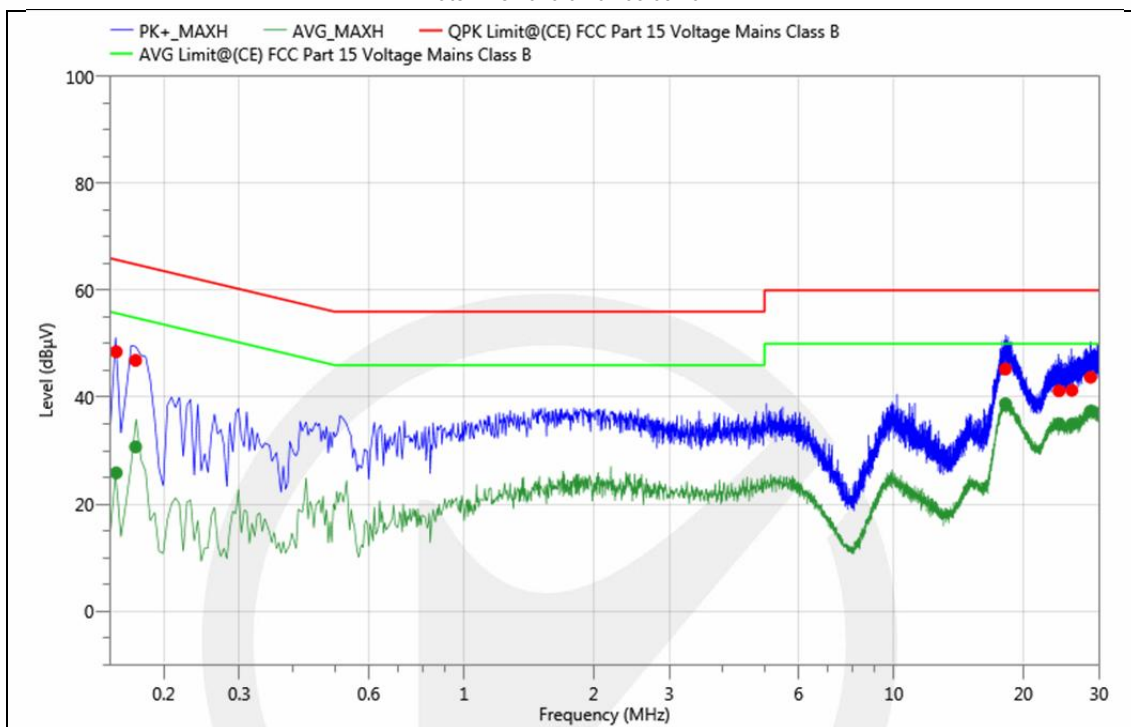

Final_Result (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE	Verdict
1	0.155	38.37	10.14	48.51	65.73	17.22	QPK	L1	GND	PASS
2	0.155	15.70	10.14	25.84	55.73	29.89	AVG	L1	GND	PASS
3	0.172	36.73	10.16	46.89	64.86	17.97	QPK	L1	GND	PASS
4	0.172	20.56	10.16	30.72	54.86	24.14	AVG	L1	GND	PASS
5	18.172	34.54	10.72	45.26	60.00	14.74	QPK	L1	GND	PASS
6	18.172	28.07	10.72	38.79	50.00	11.21	AVG	L1	GND	PASS
7	24.203	30.36	10.82	41.18	60.00	18.82	QPK	L1	GND	PASS
8	24.203	24.24	10.82	35.06	50.00	14.94	AVG	L1	GND	PASS
9	25.932	30.44	10.85	41.29	60.00	18.71	QPK	L1	GND	PASS
10	25.932	24.14	10.85	34.99	50.00	15.01	AVG	L1	GND	PASS
11	28.667	32.84	10.89	43.73	60.00	16.27	QPK	L1	GND	PASS
12	28.667	26.51	10.89	37.40	50.00	12.60	AVG	L1	GND	PASS

8.8 ANTENNA APPLICATION

8.8.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.8.2 Result

PASS.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached documentInternal Photos to show the antenna connector.

*** End of Report ***