

TEST REPORT

Report No.: BCTC2506699470-2E

Applicant: LEPRO INNOVATION INC.

Product Name: AI LED permanent lights

Test Model: EE1-180

Tested Date: 2025-06-19 to 2025-10-15

Issued Date: 2025-10-15



Shenzhen BCTC Testing Co., Ltd.

FCC ID: 2A3MAEE1

Product Name: AI LED permanent lights

Trademark: **Lepro**

Model/Type Reference: EE1-180
EE1-120, EE1-90, EE1-60, EE1-30

Prepared For: LEPRO INNOVATION INC.

Address: 3651 Lindell Road Suite D1048, Las Vegas, NV 89103, USA

Manufacturer: LEPRO INNOVATION INC.

Address: 3651 Lindell Road Suite D1048, Las Vegas, NV 89103, USA

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2025-06-19

Sample Tested Date: 2025-06-19 to 2025-10-15

Issue Date: 2025-10-15

Report No.: BCTC2506699470-2E

Test Standards: FCC Part15.247
ANSI C63.10:2020

Test Results: PASS

Remark: This is Bluetooth BLE radio test report.

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information.....	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List.....	10
4.5 Test Mode	10
4.6 Table of parameters of text software setting	10
5. Test Facility And Test Instrument Used.....	11
5.1 Test Facility.....	11
5.2 Test Instrument Used.....	11
6. Conducted Emissions.....	13
6.1 Block Diagram Of Test Setup.....	13
6.2 Limit	13
6.3 Test procedure.....	13
6.4 EUT Operating Conditions	13
6.5 Test Result.....	14
7. Radiated Emissions.....	24
7.1 Block Diagram Of Test Setup.....	24
7.2 Limit	25
7.3 Test procedure.....	26
7.4 EUT operating Conditions	27
7.5 Test Result.....	27
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	40
8.1 Block Diagram Of Test Setup.....	40
8.2 Limit	40
8.3 Test Procedure	41
8.4 EUT Operating Conditions	42
8.5 Test Result.....	42
9. Power Spectral Density Test	43
9.1 Block Diagram Of Test Setup.....	43
9.2 Limit	43
9.3 Test procedure.....	43
9.4 EUT Operating Conditions	43
9.5 Test Result.....	44
10. Bandwidth Test.....	48
10.1 Block Diagram Of Test Setup.....	48
10.2 Limit	48
10.3 Test procedure.....	48
10.4 EUT operating Conditions	48
10.5 Test Result.....	49
11. Peak Output Power Test	53
11.1 Block Diagram Of Test Setup.....	53

11.2	Limit	53
11.3	Test Procedure	53
11.4	EUT Operating Conditions	53
11.5	Test Result.....	53
12.	100 kHz Bandwidth Of Frequency Band Edge	54
12.1	Block Diagram Of Test Setup.....	54
12.2	Limit	54
12.3	Test procedure.....	54
12.4	EUT operating Conditions	54
12.5	Test Result.....	54
13.	Antenna Requirement	65
13.1	Limit	65
13.2	Test Result.....	65
14.	EUT Photographs.....	66
15.	EUT Test Setup Photographs.....	67


(Note: N/A Means Not Applicable)

TE
TC
OV
t Se

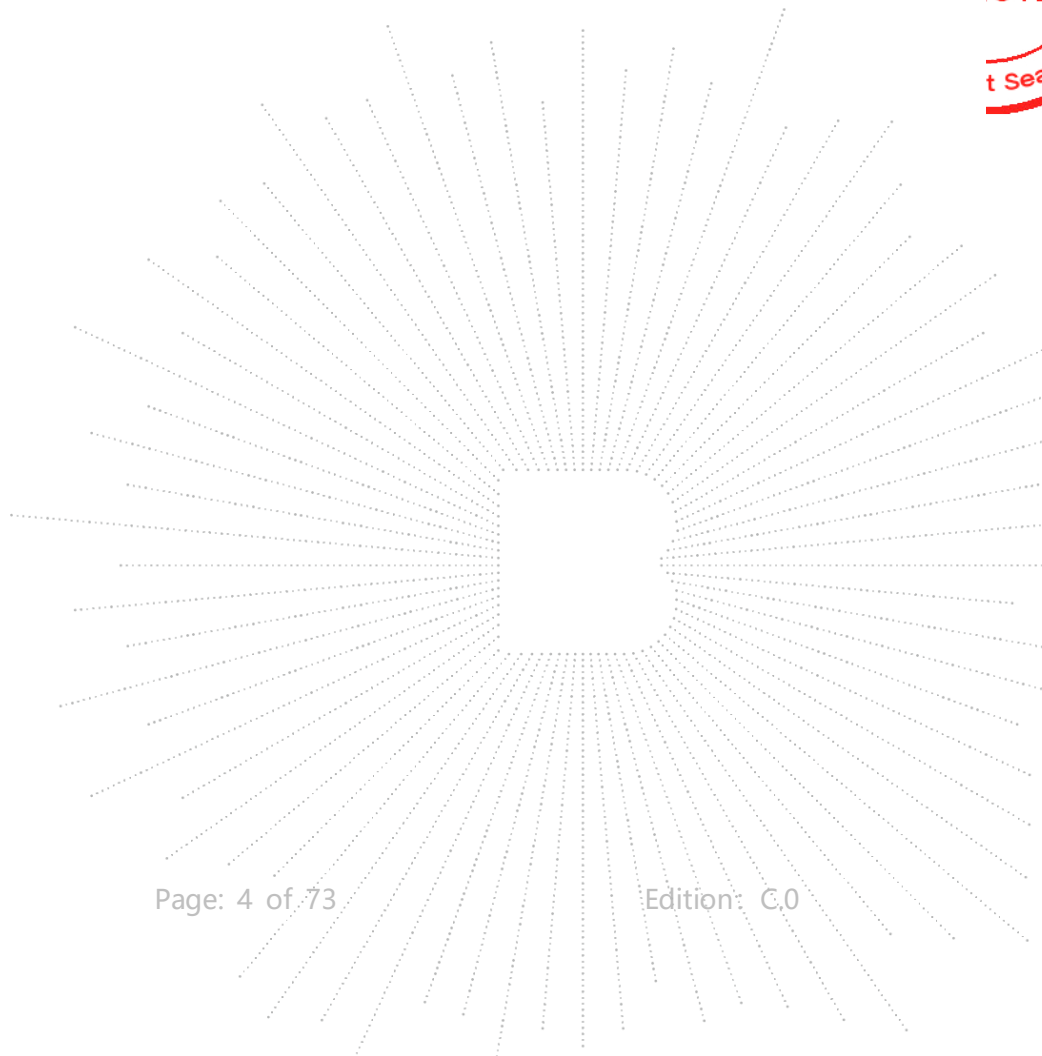

1. Version

Report No.	Issue Date	Description	Approved
BCTC2506699470-2E	2025-10-15	Original	Valid

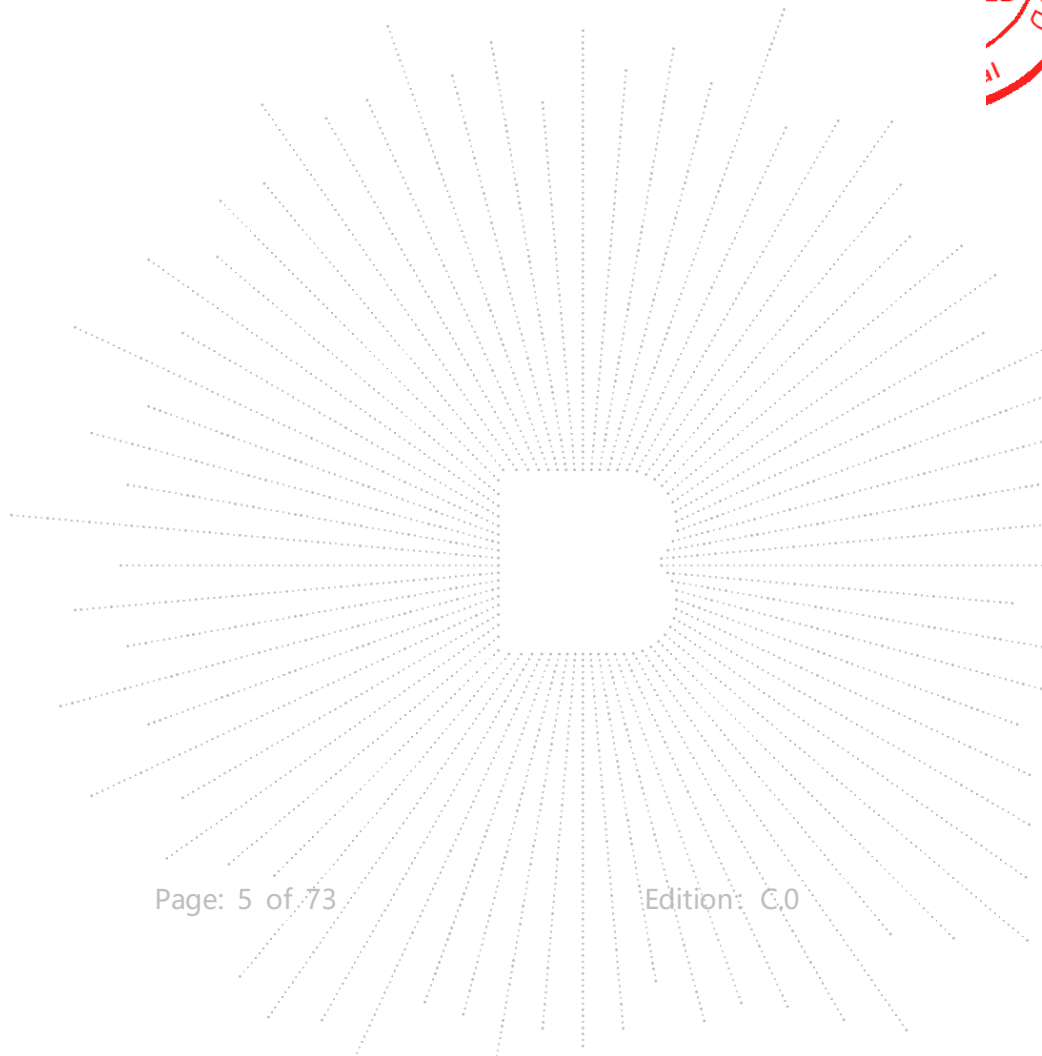

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d), 15.205	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247(d)	PASS
8	Antenna Requirement	15.203	PASS

CO., LTD.

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Power Spectral Density	U=1.19dB
8	Conducted output power uncertainty Above 1G	U=1.576dB
9	Conducted output power uncertainty below 1G	U=1.28dB
10	Conducted spurious emissions	U=0.55dB
11	Occupied Bandwidth/Frequency Range	U=3.46%
12	humidity uncertainty	U=5.3%
13	Temperature uncertainty	U=0.59°C
14	Frequency Error	U=53.50Hz
15	Frequency Drift	U=0.64kHz

Remark: The five models length of lamp strings and adapter are different, the RF chip remains unchanged.

Model: EE1-180



Model: EE1-120



Model: EE1-90



Model: EE1-60



Model: EE1-30



4. Product Information And Test Setup


4.1 Product Information

Model/Type Reference:	EE1-180 EE1-120, EE1-90, EE1-60, EE1-30
Model Differences:	All the model are the same circuit and RF module, except model names and the number of lamps. EE1-180 has 12 rows of lights, EE1-120 has 8 rows of lights, EE1-90 has 6 rows of lights, EE1-60 has 4 rows of lights, and EE1-30 has 2 rows of lights. Radiation and conduction were tested.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK 1Mbps, GFSK 2Mbps,
Number Of Channel	40CH
Antenna installation:	PCB antenna
Antenna Gain:	3.96 dBi
Remark:	☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	29.0V==
Adapter 1 Information (EE1-180)	: Manufacture: XY POWER SUPPLY LIMITED Model No.: XY90SR-290290VQ-UP Input: 100-120V~ 50/60Hz 2.5A Max Output: 29.0V==2.9A
Adapter 2 Information (EE1-120)	: Manufacture: XY POWER SUPPLY LIMITED Model No.: XY65S-290207VQ-ZP Input: 100-120V~ 50/60Hz 1.5A Max Output: 29.0V==2.07A
Adapter 3 Information (EE1-90)	: Manufacture: XY POWER SUPPLY LIMITED Model No.: XY48SR-290165VQ-UP Input: 100-120V~ 50/60Hz 1.2A Max Output: 29.0V==1.65A
Adapter 4 Information (EE1-60)	: Manufacture: XY POWER SUPPLY LIMITED Model No.: XY36SR-290124VQ-UT Input: 100-120V~ 50/60Hz 1.0A Max Output: 29.0V==1.24A
Adapter 5 Information (EE1-30)	: Manufacture: XY POWER SUPPLY LIMITED Model No.: XY24SR-290062VQ-UT Input: 100-120V~ 50/60Hz 0.6A Max Output: 29.0V==0.62A

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission and Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	AI LED permanent lights	Lepre	EE1-180, EE1-120, EE1-90, EE1-60, EE1-30	---	EUT
E-2	Adapter	N/A	XY90SR-290290VQ-UP/ XY65S-290207VQ-ZP/ XY48SR-290165VQ-UP/ XY36SR-290124VQ-UT/ XY24SR-290062VQ-UT	---	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	---	---	1m	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442
02	2404	12	2424	22	2444
03	2406	13	2426	23	2446
~	~	~	~	~	~
09	2418	19	2438	39	2478
10	2420	20	2440	40	2480

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK(1Mbps)
Mode 2	CH20	
Mode 3	CH40	
Mode 4	CH01	GFSK(2Mbps)
Mode 5	CH20	
Mode 6	CH40	
Mode 7	Transmitting (Conducted emission & Radiated emission)	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

4.6 Table of parameters of text software setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	ESP_RF_Test_EN		
Frequency	2402 MHz	2440 MHz	2480 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 08 2025	May 07, 2026
LISN	R&S	ENV216	101375	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 14, 2025	May 13, 2026


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Meter	Keysight	E4419	\	May 14, 2025	May 13, 2026
Power Sensor (AV)	Keysight	E9300A	\	May 14, 2025	May 13, 2026
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 14, 2025	May 13, 2026
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 14, 2025	May 13, 2026
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber02)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	SKET	966 Room	966	Oct. 31, 2024	Oct. 30, 2027
Receiver	R&S	ESR3	102075	May 08, 2025	May 07, 2026
Receiver	R&S	ESR3I7	100010	Oct, 31. 2024	Oct. 30, 2025
Amplifier	SKET	LNPA-30M01 G-30	SK2021082004	Oct. 31, 2024	Oct. 30, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9168	1323	May 24, 2025	May 23, 2026
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 24, 2025	May 23, 2026
Amplifier	SKET	LAPA_01G1 8G-45dB	SK202104090 1	May 14, 2025	May 13, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 24, 2025	May 23, 2026
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 14, 2025	May 13, 2026
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 24, 2025	May 23, 2026
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

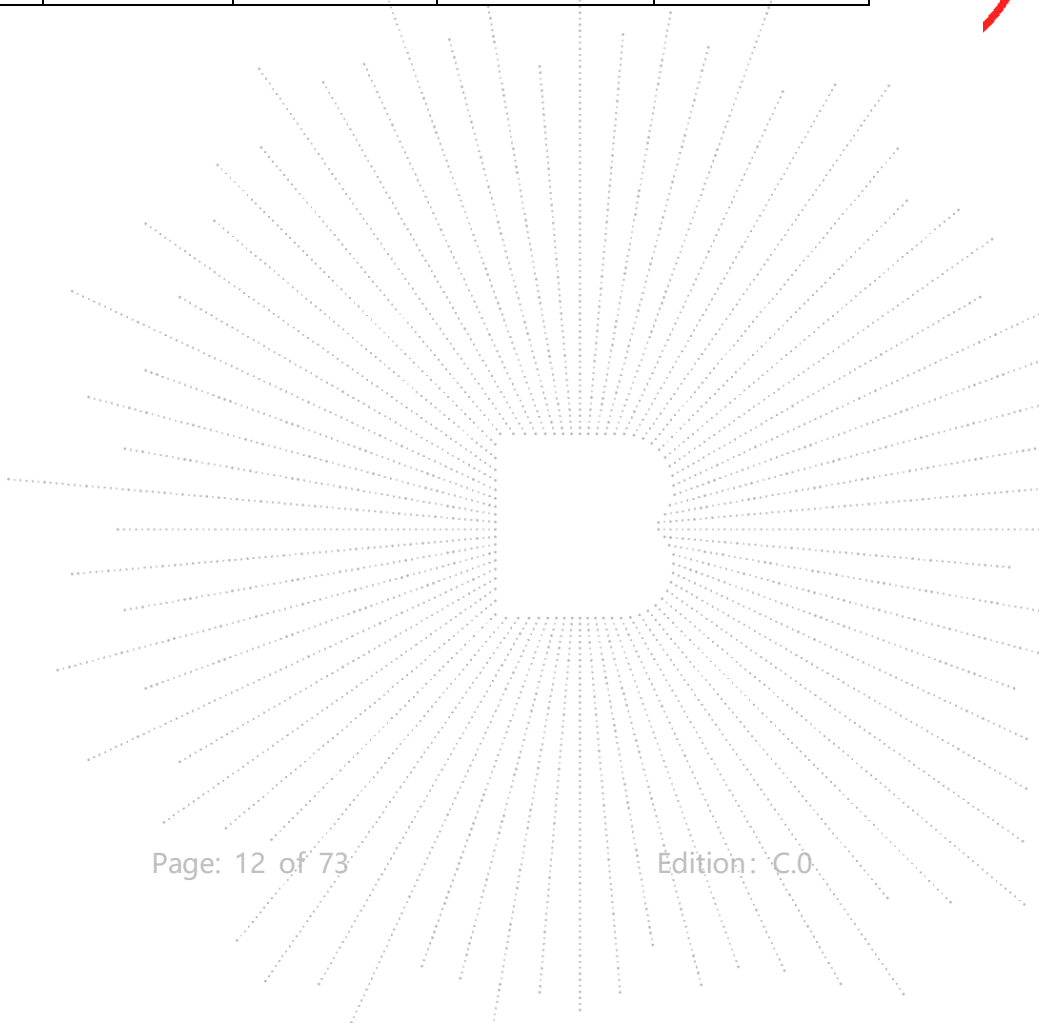

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

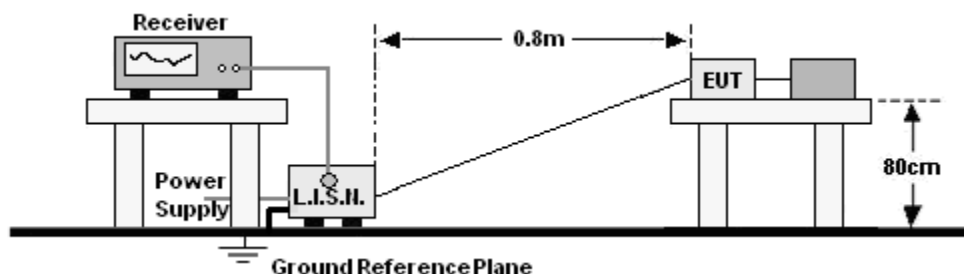

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

EE1-180

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	L

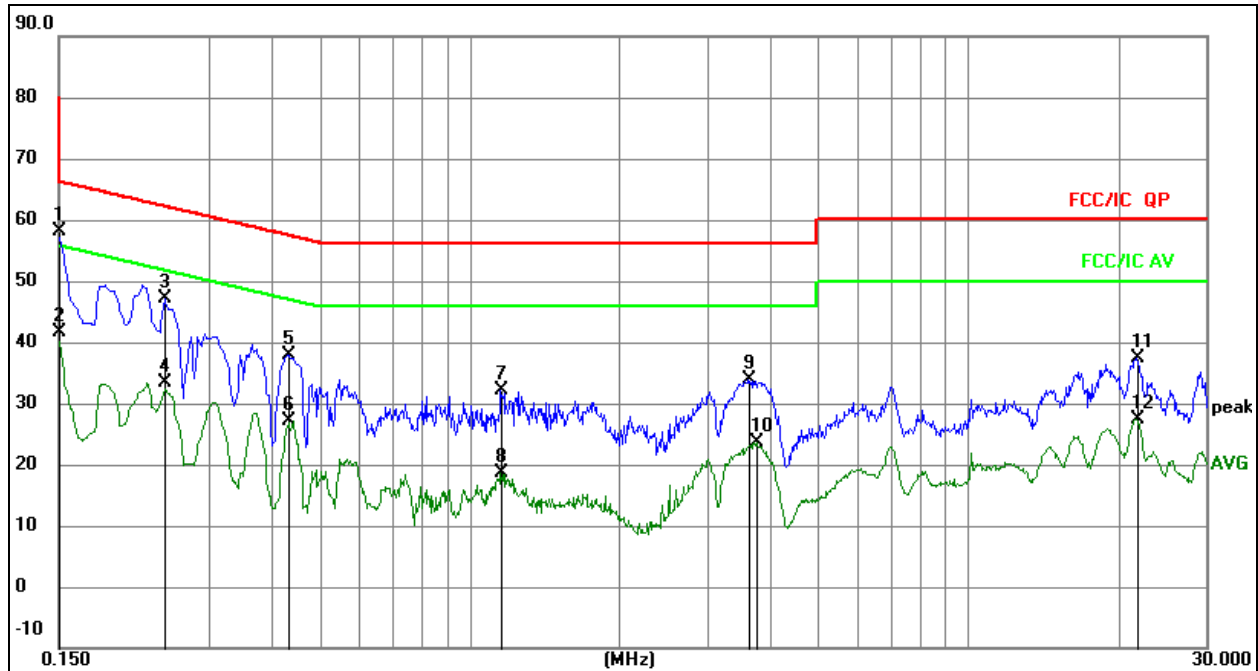


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	37.98	20.04	58.02	66.00	-7.98	QP
2		0.1500	21.59	20.04	41.63	56.00	-14.37	AVG
3		0.2445	27.16	20.04	47.20	61.94	-14.74	QP
4		0.2445	13.26	20.04	33.30	51.94	-18.64	AVG
5		0.4335	17.88	20.06	37.94	57.19	-19.25	QP
6		0.4335	7.09	20.06	27.15	47.19	-20.04	AVG
7		1.1535	11.90	20.26	32.16	56.00	-23.84	QP
8		1.1535	-1.58	20.26	18.68	46.00	-27.32	AVG
9		3.6240	13.28	20.53	33.81	56.00	-22.19	QP
10		3.7594	3.09	20.56	23.65	46.00	-22.35	AVG
11		21.7770	13.47	23.80	37.27	60.00	-22.73	QP
12		21.7770	3.68	23.80	27.48	50.00	-22.52	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	N

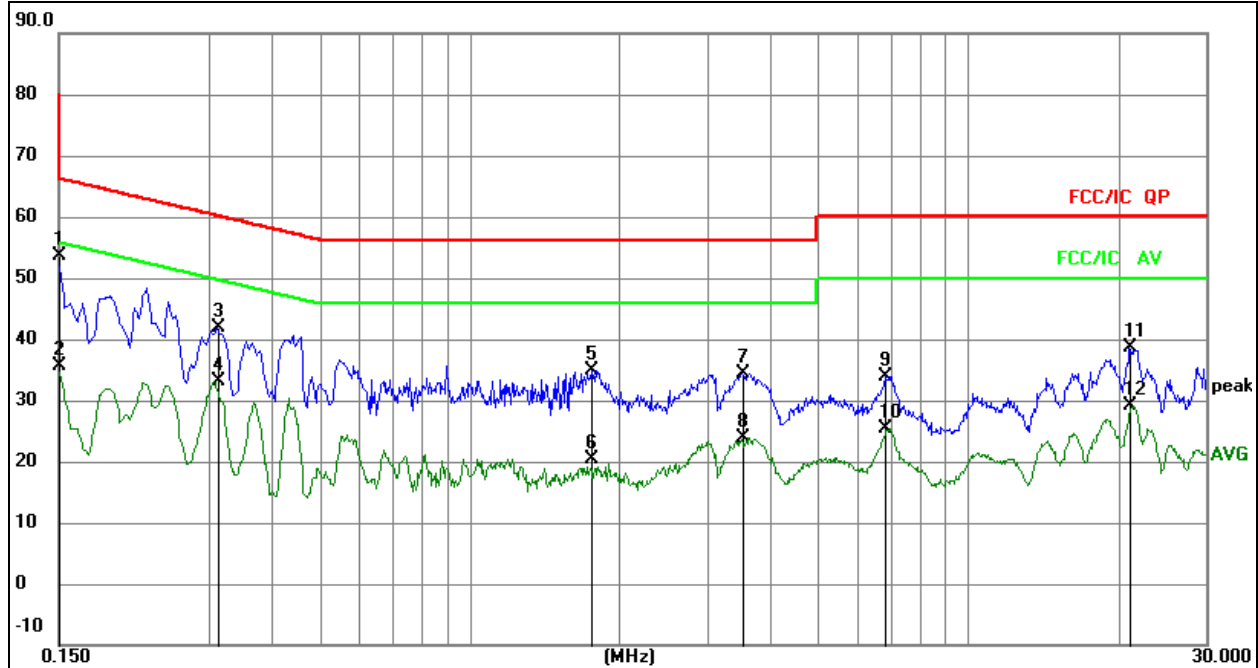

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1	*	0.1500	33.48	20.04	53.52	66.00	-12.48	QP
2		0.1500	15.53	20.04	35.57	56.00	-20.43	AVG
3		0.3120	21.73	20.05	41.78	59.92	-18.14	QP
4		0.3120	12.96	20.05	33.01	49.92	-16.91	AVG
5		1.7610	14.67	20.20	34.87	56.00	-21.13	QP
6		1.7610	0.28	20.20	20.48	46.00	-25.52	AVG
7		3.5115	13.87	20.50	34.37	56.00	-21.63	QP
8		3.5115	3.41	20.50	23.91	46.00	-22.09	AVG
9		6.8325	13.09	20.91	34.00	60.00	-26.00	QP
10		6.8325	4.46	20.91	25.37	50.00	-24.63	AVG
11		21.0840	14.81	23.72	38.53	60.00	-21.47	QP
12		21.0840	5.33	23.72	29.05	50.00	-20.95	AVG

EE1-120


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	L

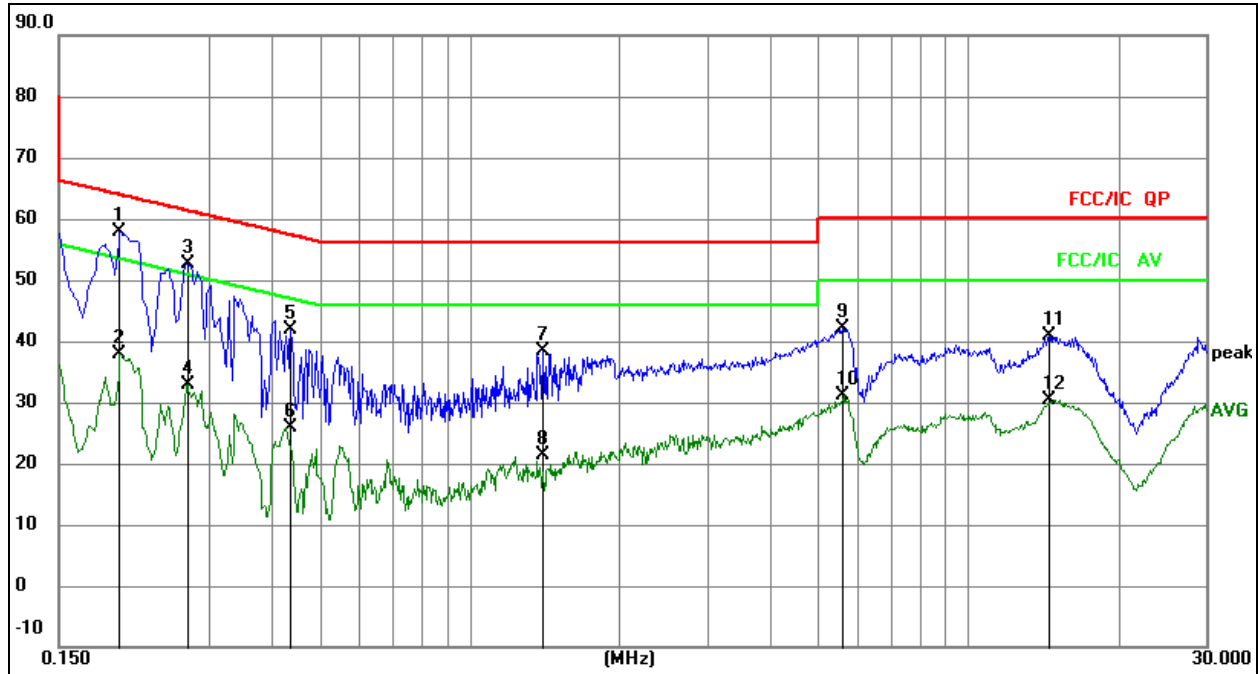
Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1	*	0.1986	37.91	20.04	57.95	63.67	-5.72	QP
2		0.1986	17.77	20.04	37.81	53.67	-15.86	AVG
3		0.2701	32.68	20.04	52.72	61.11	-8.39	QP
4		0.2701	12.87	20.04	32.91	51.11	-18.20	AVG
5		0.4374	21.82	20.06	41.88	57.11	-15.23	QP
6		0.4374	5.71	20.06	25.77	47.11	-21.34	AVG
7		1.4032	18.13	20.23	38.36	56.00	-17.64	QP
8		1.4032	1.10	20.23	21.33	46.00	-24.67	AVG
9		5.5936	21.24	20.78	42.02	60.00	-17.98	QP
10		5.5936	10.32	20.78	31.10	50.00	-18.90	AVG
11		14.5171	18.51	22.37	40.88	60.00	-19.12	QP
12		14.5171	7.94	22.37	30.31	50.00	-19.69	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	N

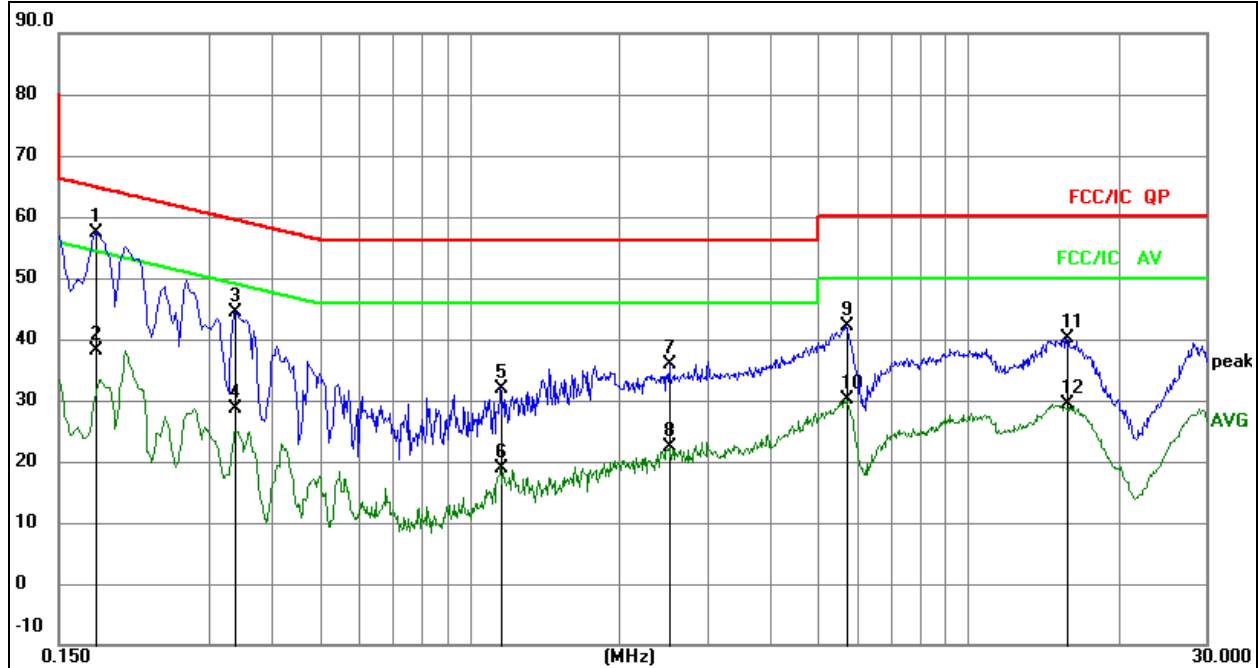


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1	*	0.1770	37.45	20.04	57.49	64.63	-7.14	QP
2		0.1770	17.97	20.04	38.01	54.63	-16.62	AVG
3		0.3390	24.31	20.05	44.36	59.23	-14.87	QP
4		0.3390	8.61	20.05	28.66	49.23	-20.57	AVG
5		1.1580	11.74	20.26	32.00	56.00	-24.00	QP
6		1.1580	-1.26	20.26	19.00	46.00	-27.00	AVG
7		2.5215	15.66	20.29	35.95	56.00	-20.05	QP
8		2.5215	2.19	20.29	22.48	46.00	-23.52	AVG
9		5.6940	21.25	20.79	42.04	60.00	-17.96	QP
10		5.6940	9.38	20.79	30.17	50.00	-19.83	AVG
11		15.7785	17.48	22.65	40.13	60.00	-19.87	QP
12		15.7785	6.62	22.65	29.27	50.00	-20.73	AVG

EE1-90


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	L

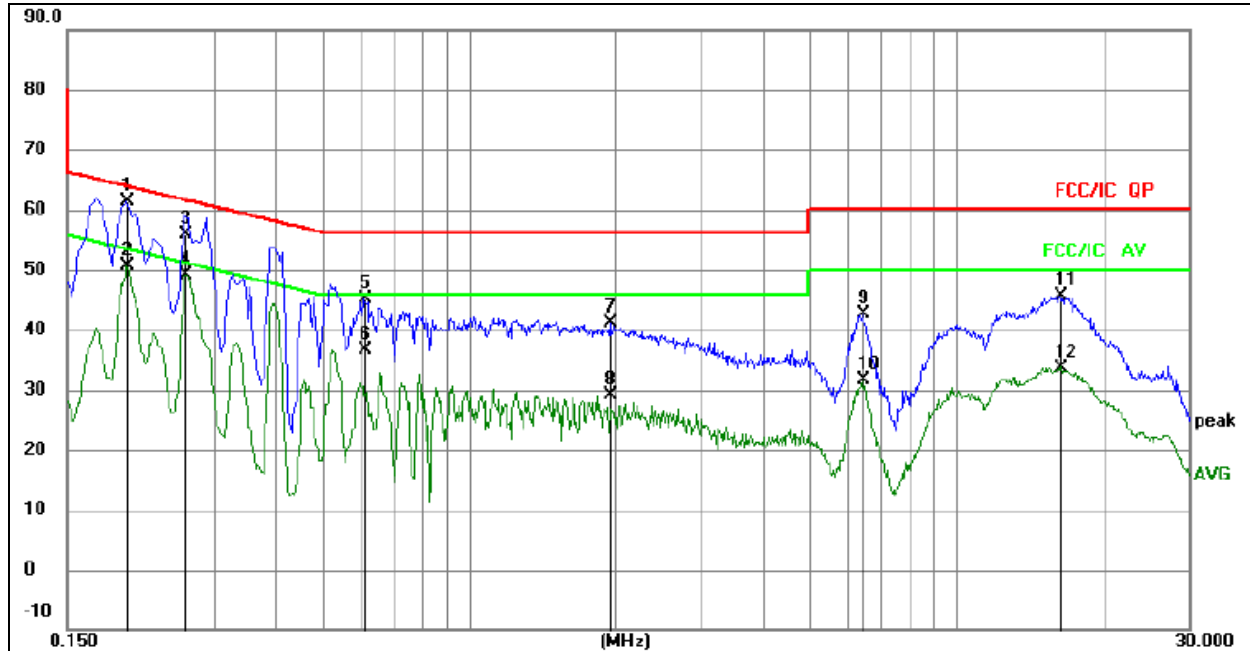
Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1995	41.45	20.04	61.49	63.63	-2.14	QP
2		0.1995	30.52	20.04	50.56	53.63	-3.07	AVG
3		0.2620	35.81	20.04	55.85	61.37	-5.52	QP
4		0.2620	29.18	20.04	49.22	51.37	-2.15	AVG
5		0.6134	24.89	20.17	45.06	56.00	-10.94	QP
6		0.6134	16.36	20.17	36.53	46.00	-9.47	AVG
7		1.9589	20.92	20.18	41.10	56.00	-14.90	QP
8		1.9589	9.01	20.18	29.19	46.00	-16.81	AVG
9		6.4274	21.70	20.87	42.57	60.00	-17.43	QP
10		6.4274	10.77	20.87	31.64	50.00	-18.36	AVG
11		16.3860	22.96	22.79	45.75	60.00	-14.25	QP
12		16.3860	10.96	22.79	33.75	50.00	-16.25	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	N

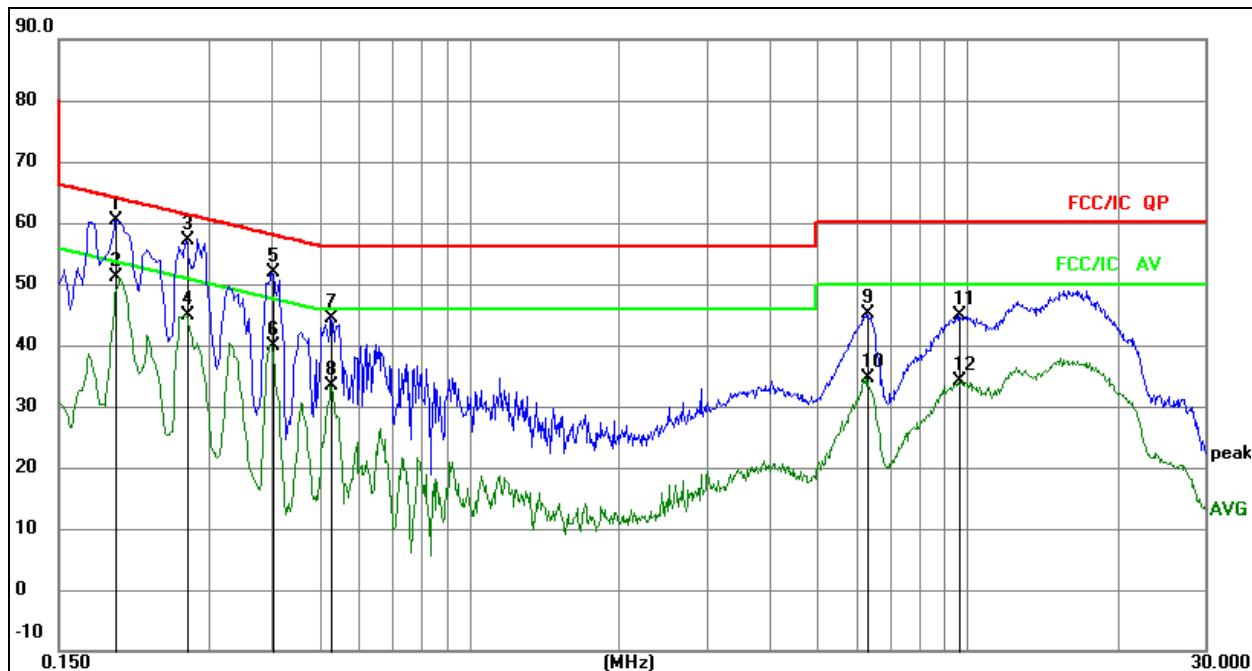


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1949	40.37	20.04	60.41	63.83	-3.42	QP
2	*	0.1949	30.97	20.04	51.01	53.83	-2.82	AVG
3		0.2714	37.02	20.04	57.06	61.07	-4.01	QP
4		0.2714	24.74	20.04	44.78	51.07	-6.29	AVG
5		0.4020	31.92	20.05	51.97	57.81	-5.84	QP
6		0.4020	19.79	20.05	39.84	47.81	-7.97	AVG
7		0.5279	24.27	20.09	44.36	56.00	-11.64	QP
8		0.5279	13.25	20.09	33.34	46.00	-12.66	AVG
9		6.2969	24.18	20.85	45.03	60.00	-14.97	QP
10		6.2969	13.74	20.85	34.59	50.00	-15.41	AVG
11		9.6225	23.51	21.30	44.81	60.00	-15.19	QP
12		9.6225	12.86	21.30	34.16	50.00	-15.84	AVG

EE1-60


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	L

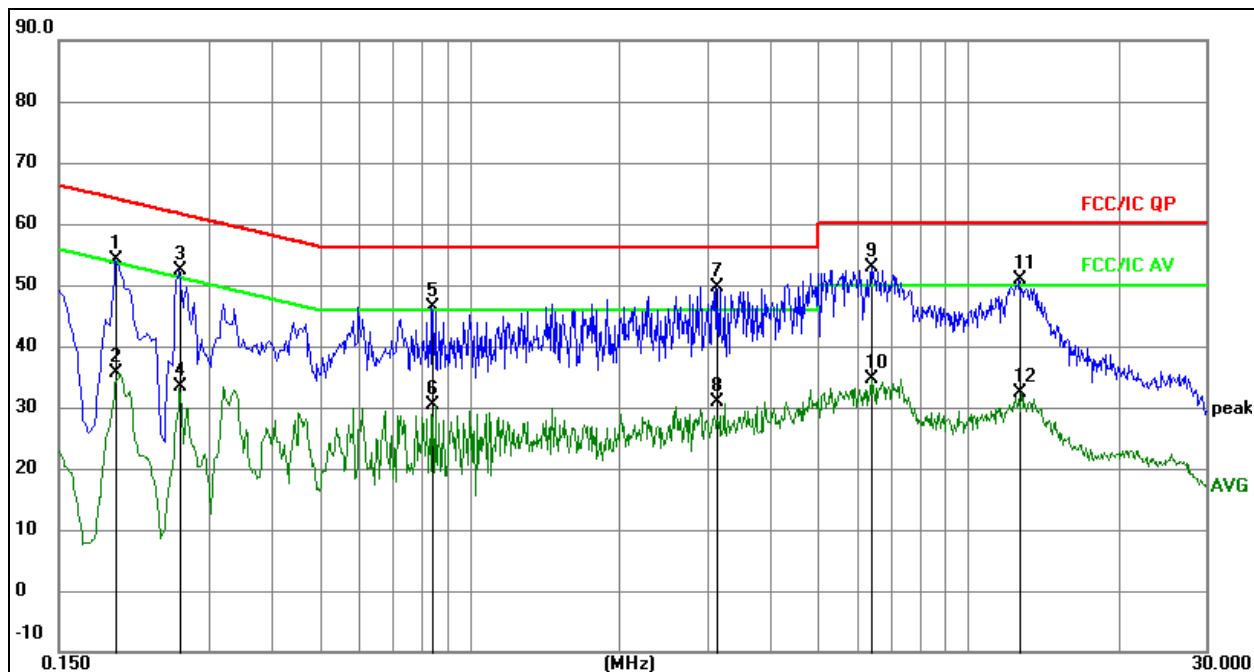
Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1		0.1949	34.08	20.04	54.12	63.83	-9.71	QP
2		0.1949	15.60	20.04	35.64	53.83	-18.19	AVG
3		0.2625	32.27	20.04	52.31	61.35	-9.04	QP
4		0.2625	13.31	20.04	33.35	51.35	-18.00	AVG
5		0.8430	26.02	20.26	46.28	56.00	-9.72	QP
6		0.8430	10.18	20.26	30.44	46.00	-15.56	AVG
7	*	3.1380	29.19	20.42	49.61	56.00	-6.39	QP
8		3.1380	10.55	20.42	30.97	46.00	-15.03	AVG
9		6.4185	32.07	20.87	52.94	60.00	-7.06	QP
10		6.4185	13.69	20.87	34.56	50.00	-15.44	AVG
11		12.6780	28.88	21.96	50.84	60.00	-9.16	QP
12		12.6780	10.31	21.96	32.27	50.00	-17.73	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	N

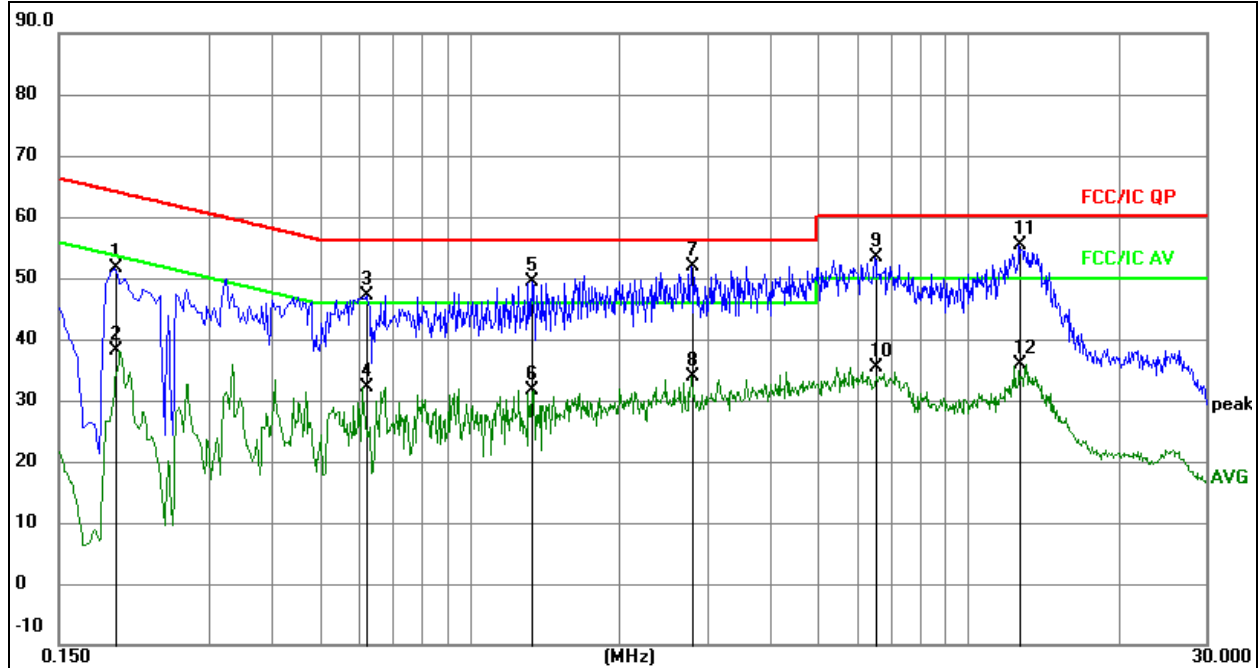

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1949	31.70	20.04	51.74	63.83	-12.09	QP
2		0.1949	18.05	20.04	38.09	53.83	-15.74	AVG
3		0.6224	26.96	20.18	47.14	56.00	-8.86	QP
4		0.6224	12.05	20.18	32.23	46.00	-13.77	AVG
5		1.3334	29.17	20.24	49.41	56.00	-6.59	QP
6		1.3334	11.37	20.24	31.61	46.00	-14.39	AVG
7	*	2.7825	31.54	20.35	51.89	56.00	-4.11	QP
8		2.7825	13.44	20.35	33.79	46.00	-12.21	AVG
9		6.5085	32.38	20.88	53.26	60.00	-6.74	QP
10		6.5085	14.49	20.88	35.37	50.00	-14.63	AVG
11		12.6555	33.43	21.95	55.38	60.00	-4.62	QP
12		12.6555	13.82	21.95	35.77	50.00	-14.23	AVG

EE1-30


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	L

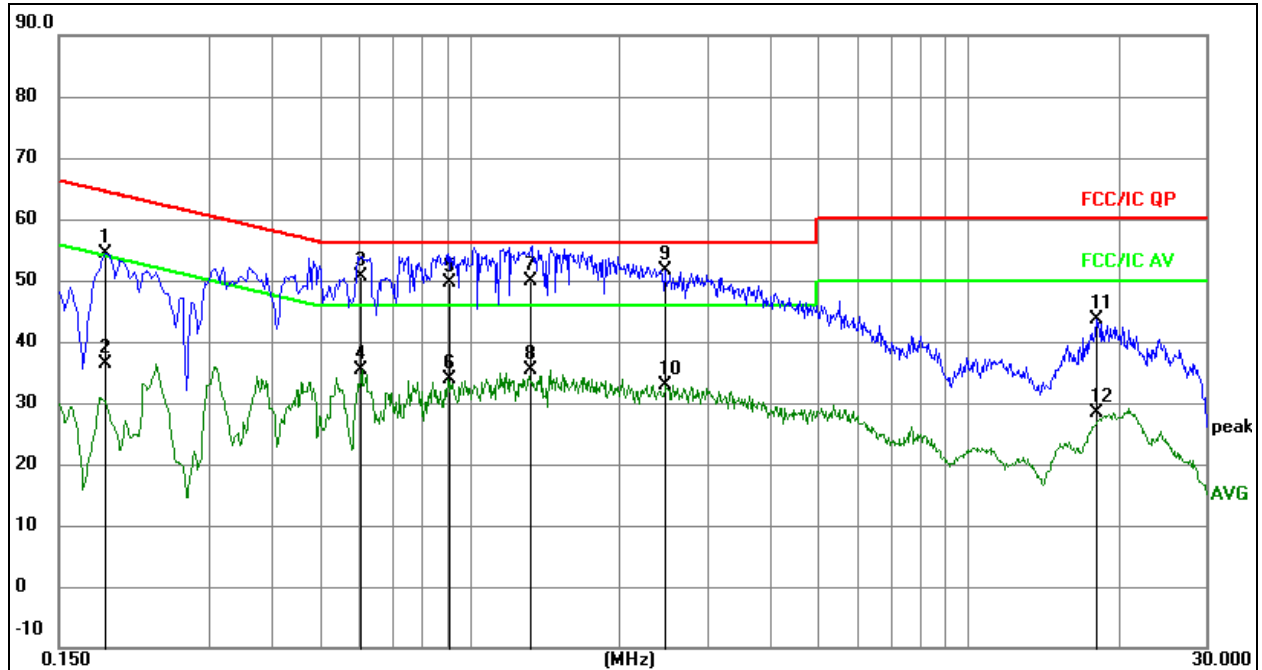
Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.1853	34.29	20.04	54.33	64.24	-9.91	QP
2		0.1853	16.41	20.04	36.45	54.24	-17.79	AVG
3		0.6040	30.57	20.16	50.73	56.00	-5.27	QP
4		0.6040	15.14	20.16	35.30	46.00	-10.70	AVG
5		0.9040	29.26	20.27	49.53	56.00	-6.47	QP
6		0.9040	13.50	20.27	33.77	46.00	-12.23	AVG
7		1.3200	29.69	20.24	49.93	56.00	-6.07	QP
8		1.3200	15.03	20.24	35.27	46.00	-10.73	AVG
9	*	2.4605	31.35	20.28	51.63	56.00	-4.37	QP
10		2.4605	12.64	20.28	32.92	46.00	-13.08	AVG
11		18.0393	20.50	23.15	43.65	60.00	-16.35	QP
12		18.0393	5.21	23.15	28.36	50.00	-21.64	AVG

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	N

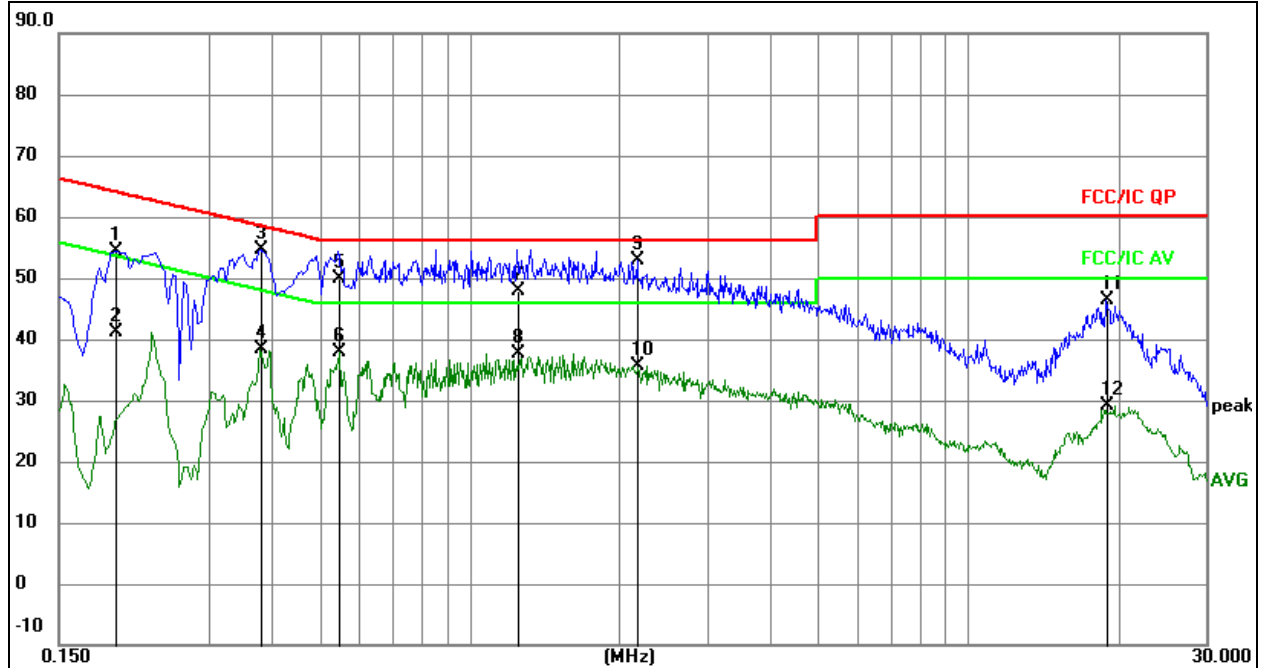

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1949	34.29	20.04	54.33	63.83	-9.50	QP
2		0.1949	21.03	20.04	41.07	53.83	-12.76	AVG
3		0.3795	34.56	20.05	54.61	58.29	-3.68	QP
4		0.3795	18.25	20.05	38.30	48.29	-9.99	AVG
5		0.5470	29.85	20.11	49.96	56.00	-6.04	QP
6		0.5470	17.66	20.11	37.77	46.00	-8.23	AVG
7		1.2480	27.65	20.25	47.90	56.00	-8.10	QP
8		1.2480	17.38	20.25	37.63	46.00	-8.37	AVG
9	*	2.1705	32.71	20.22	52.93	56.00	-3.07	QP
10		2.1705	15.47	20.22	35.69	46.00	-10.31	AVG
11		19.0185	22.99	23.37	46.36	60.00	-13.64	QP
12		19.0185	5.83	23.37	29.20	50.00	-20.80	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

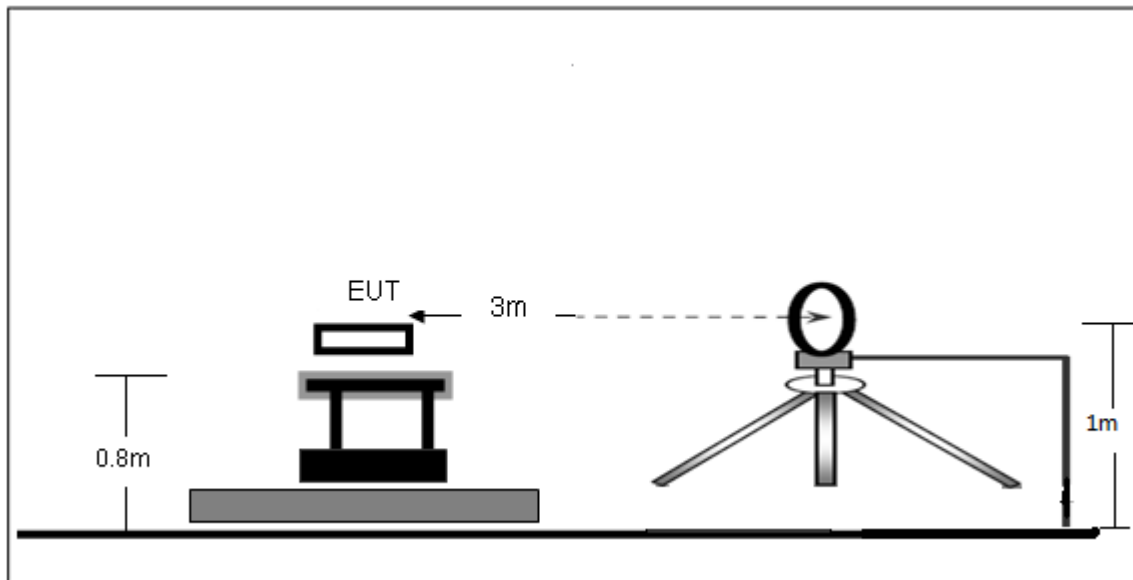

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

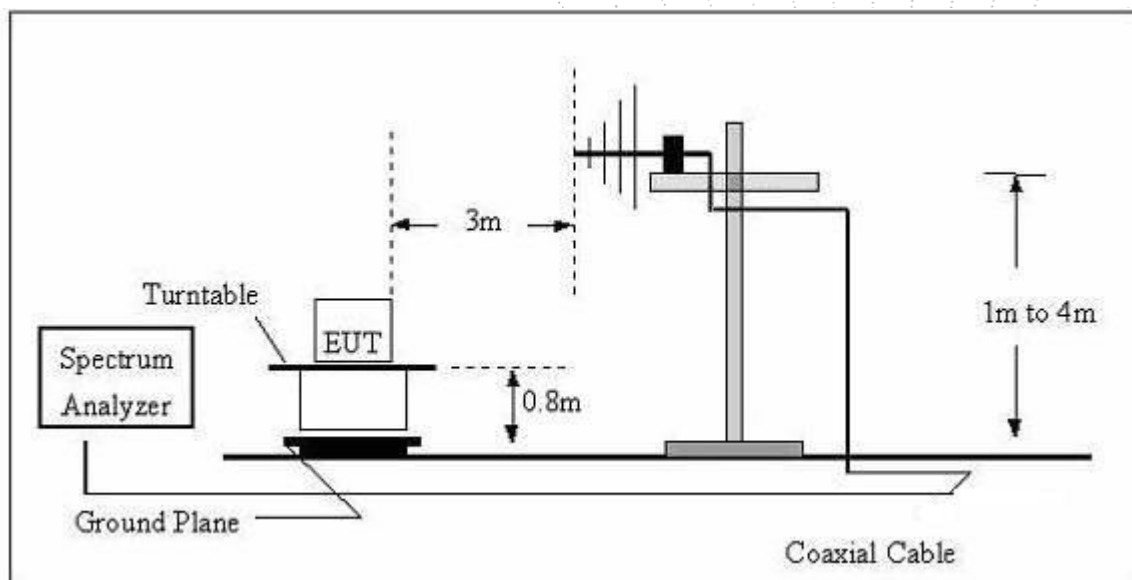

(C) Radiated Emission Test-Up Frequency Above 1GHz

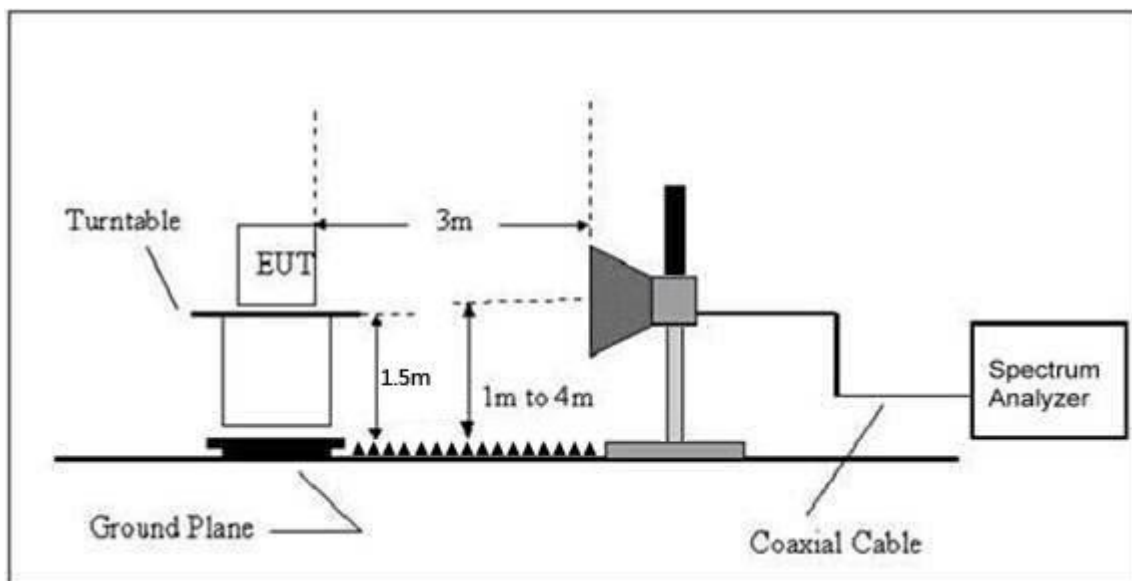

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
 - (2)The tighter limit applies at the band edges.
 - (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1) through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage :	AC 120V/60Hz
Test Mode:	Mode 7		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

EE1-180


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Horizontal

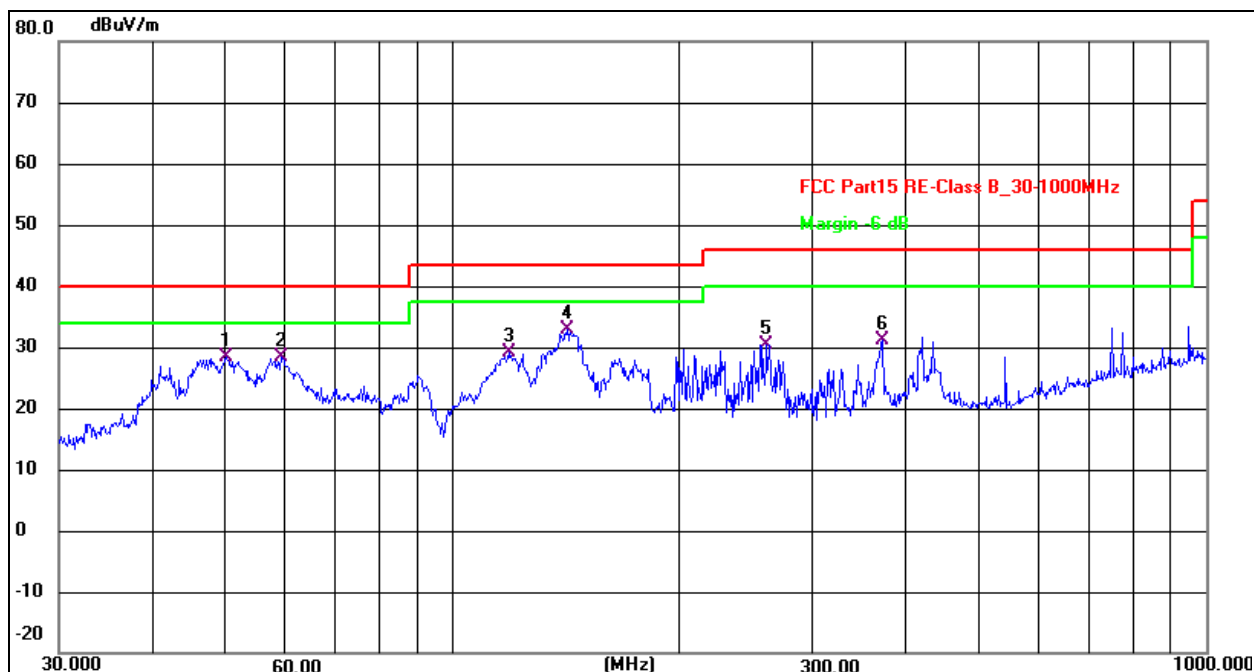
Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.0566	39.78	-11.48	28.30	40.00	-11.70	QP
2	59.2324	41.15	-12.71	28.44	40.00	-11.56	QP
3	118.6013	41.98	-12.84	29.14	43.50	-14.36	QP
4 *	141.8262	43.99	-11.20	32.79	43.50	-10.71	QP
5	261.0582	42.22	-11.77	30.45	46.00	-15.55	QP
6	372.0045	39.77	-8.58	31.19	46.00	-14.81	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Vertical

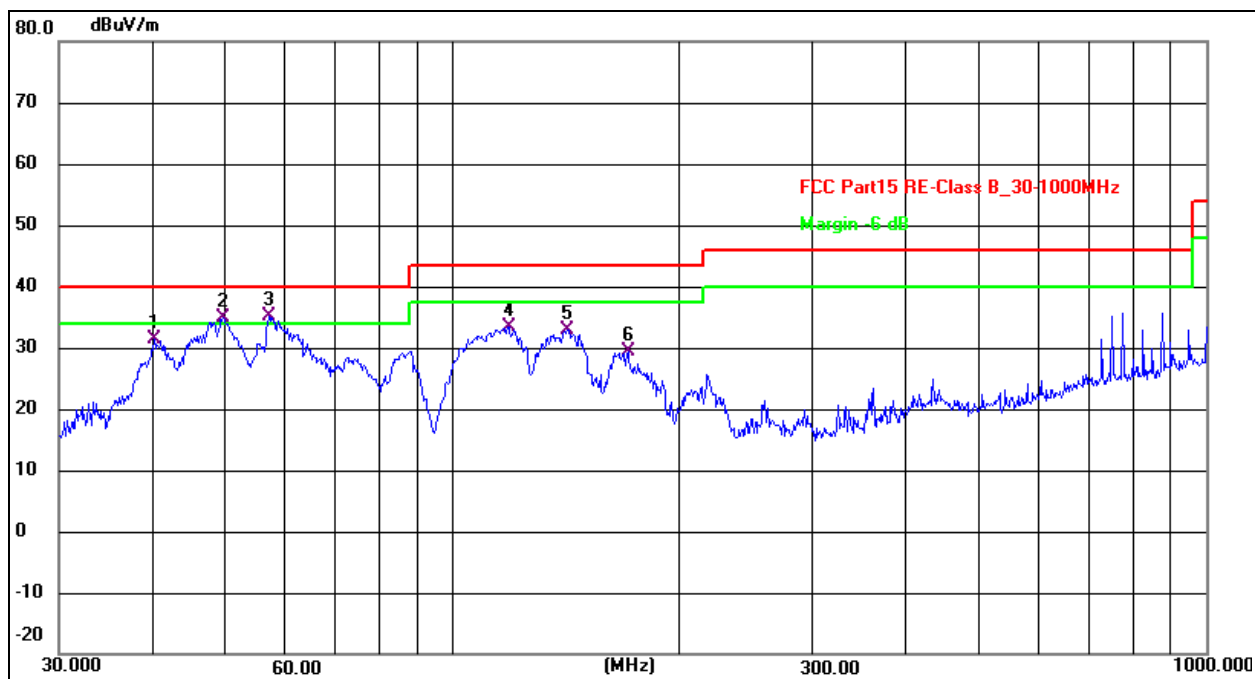


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.1347	43.27	-11.86	31.41	40.00	-8.59	QP
2 !	49.5328	46.45	-11.49	34.96	40.00	-5.04	QP
3 *	56.9912	47.48	-12.41	35.07	40.00	-4.93	QP
4	118.6014	46.20	-12.84	33.36	43.50	-10.14	QP
5	141.8262	43.97	-11.20	32.77	43.50	-10.73	QP
6	170.7926	41.59	-12.20	29.39	43.50	-14.11	QP

EE1-120


26 °C	Relative Humidity:	54%RH	56%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Horizontal

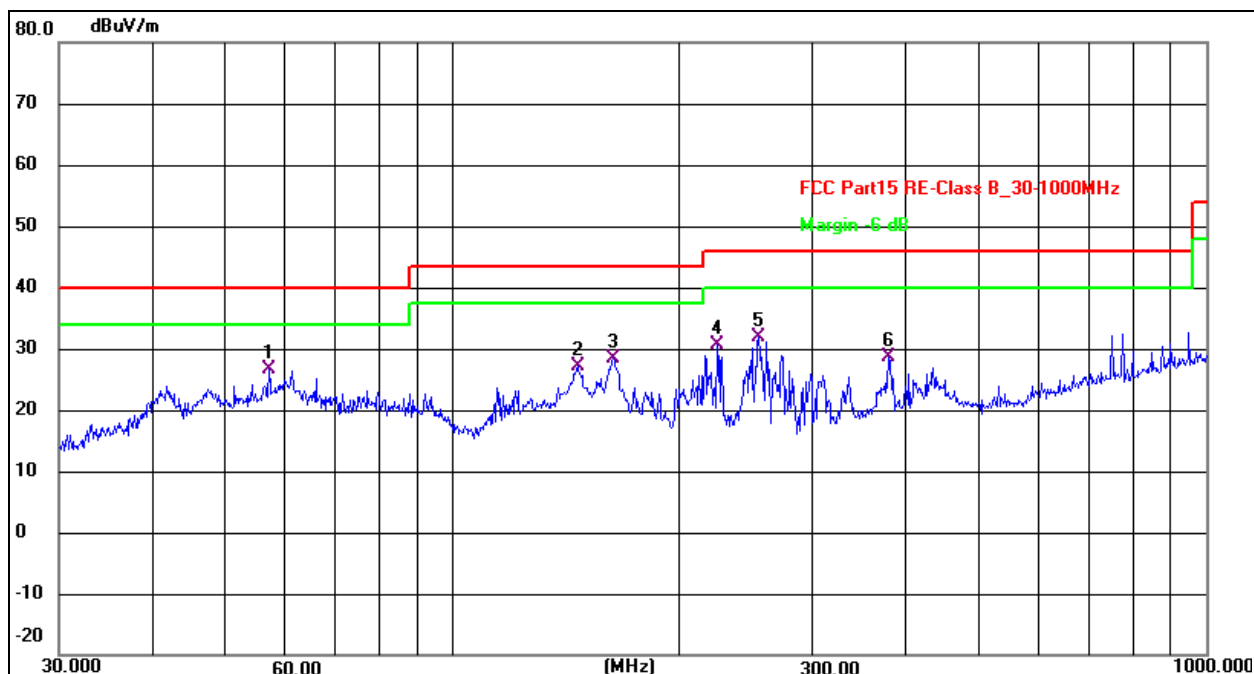
Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	56.9912	39.12	-12.41	26.71	40.00	-13.29	QP
2	146.3735	38.15	-10.90	27.25	43.50	-16.25	QP
3	163.1818	40.05	-11.64	28.41	43.50	-15.09	QP
4	224.5193	43.84	-13.28	30.56	46.00	-15.44	QP
5	254.7284	43.97	-11.99	31.98	46.00	-14.02	QP
6	378.5843	37.15	-8.41	28.74	46.00	-17.26	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Vertical

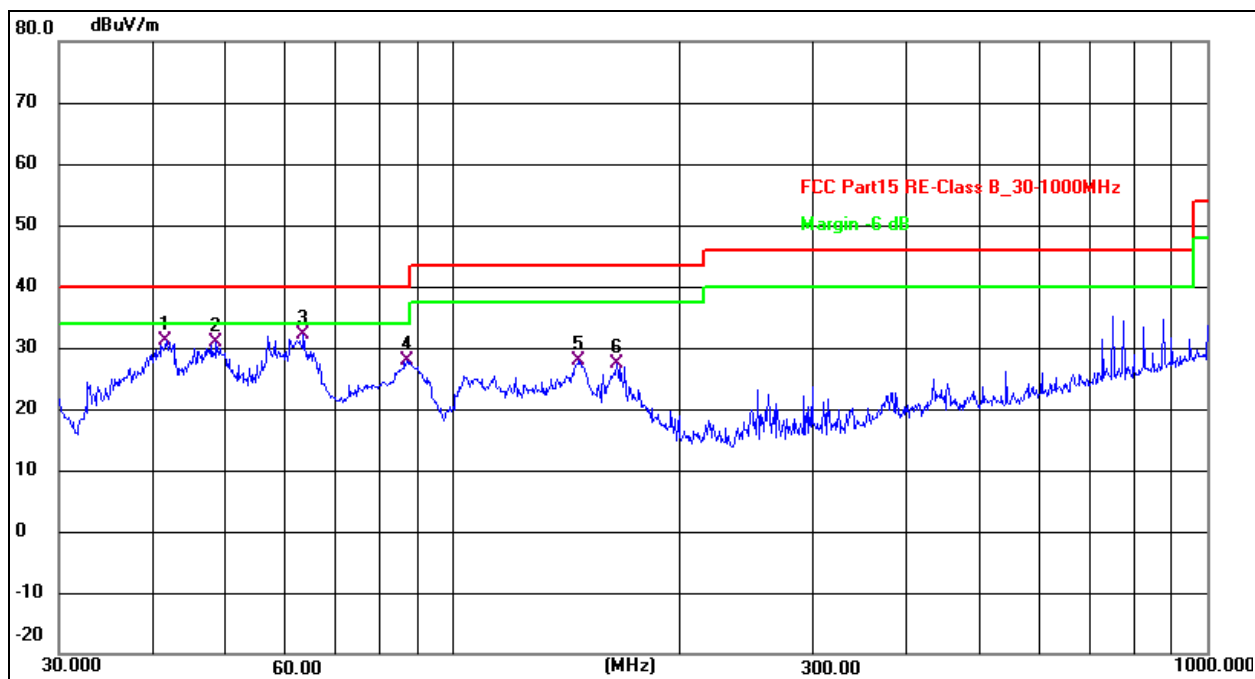


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.7129	42.84	-11.80	31.04	40.00	-8.96	QP
2	48.5016	42.49	-11.53	30.96	40.00	-9.04	QP
3 *	63.3132	45.48	-13.26	32.22	40.00	-7.78	QP
4	86.8068	42.64	-14.78	27.86	40.00	-12.14	QP
5	146.8877	38.82	-10.87	27.95	43.50	-15.55	QP
6	164.9075	39.18	-11.77	27.41	43.50	-16.09	QP

EE1-90


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Horizontal

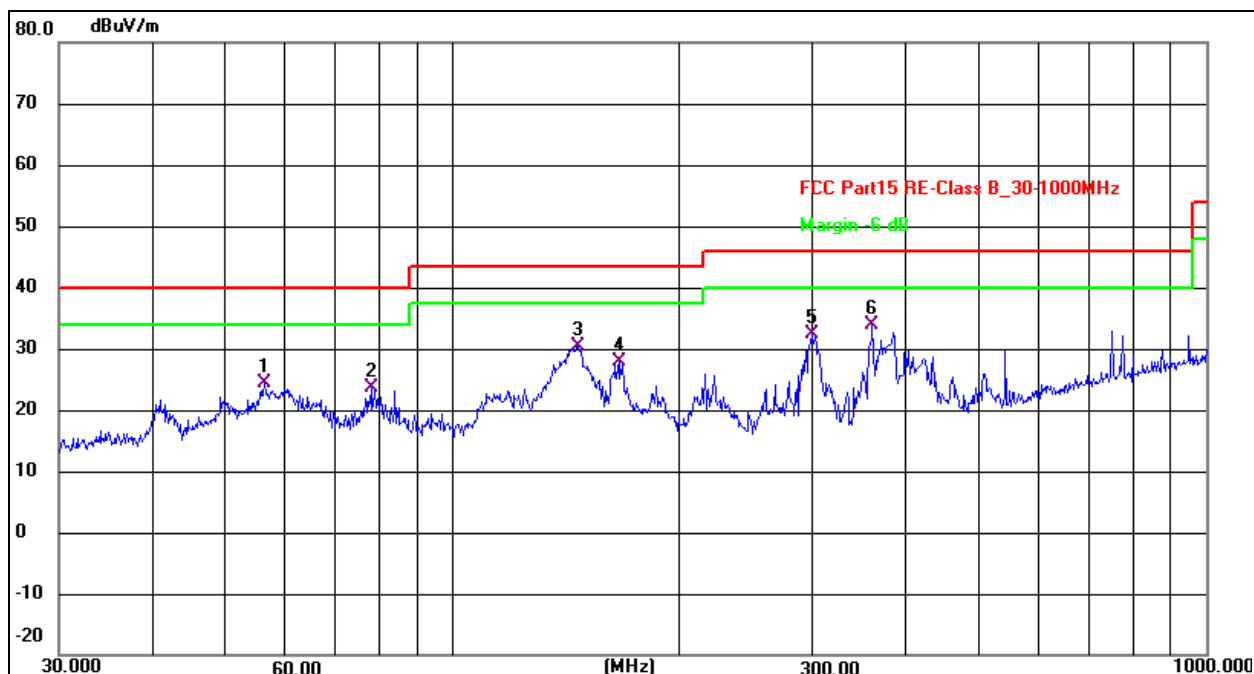
Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	56.1974	36.64	-12.30	24.34	40.00	-15.66	QP
2	77.8654	38.04	-14.45	23.59	40.00	-16.41	QP
3	146.8877	41.32	-10.87	30.45	43.50	-13.05	QP
4	166.0680	39.82	-11.85	27.97	43.50	-15.53	QP
5	299.3158	42.90	-10.47	32.43	46.00	-13.57	QP
6 *	360.4476	42.72	-8.88	33.84	46.00	-12.16	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Vertical

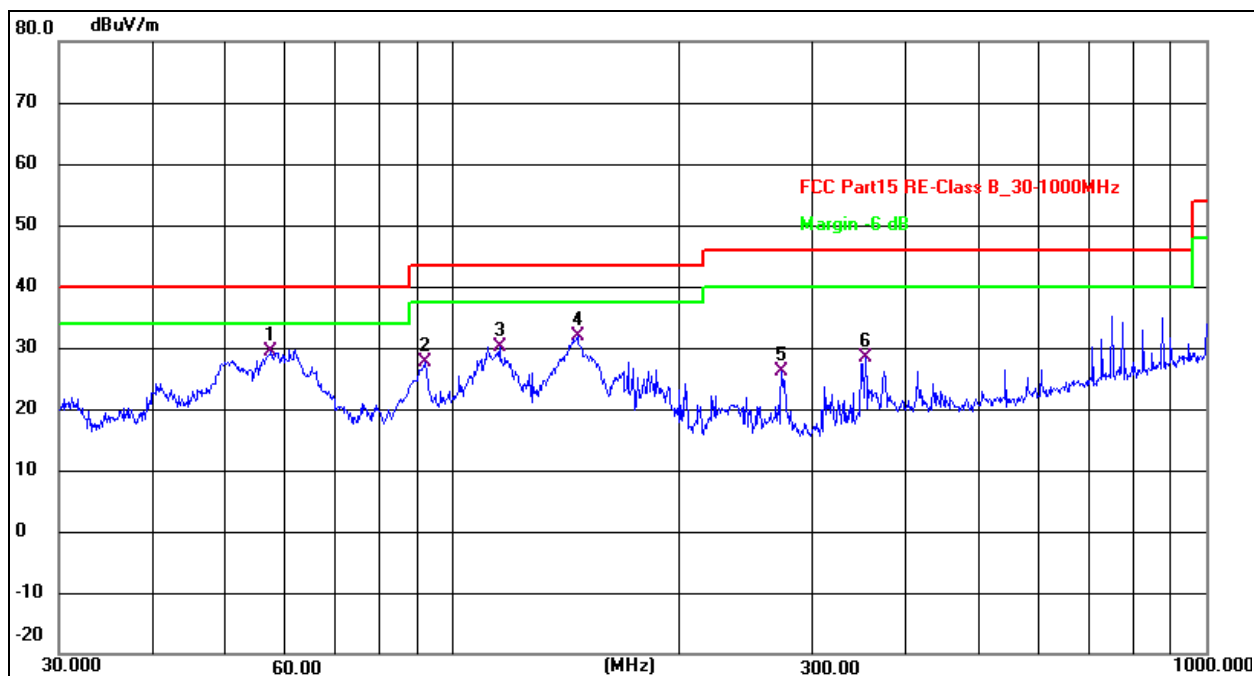


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	57.3923	41.90	-12.46	29.44	40.00	-10.56	QP
2	91.8162	42.64	-14.96	27.68	43.50	-15.82	QP
3	115.3205	43.44	-13.27	30.17	43.50	-13.33	QP
4	146.3734	42.74	-10.90	31.84	43.50	-11.66	QP
5	273.2340	37.45	-11.36	26.09	46.00	-19.91	QP
6	352.9433	37.45	-9.08	28.37	46.00	-17.63	QP

EE1-60


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Horizontal

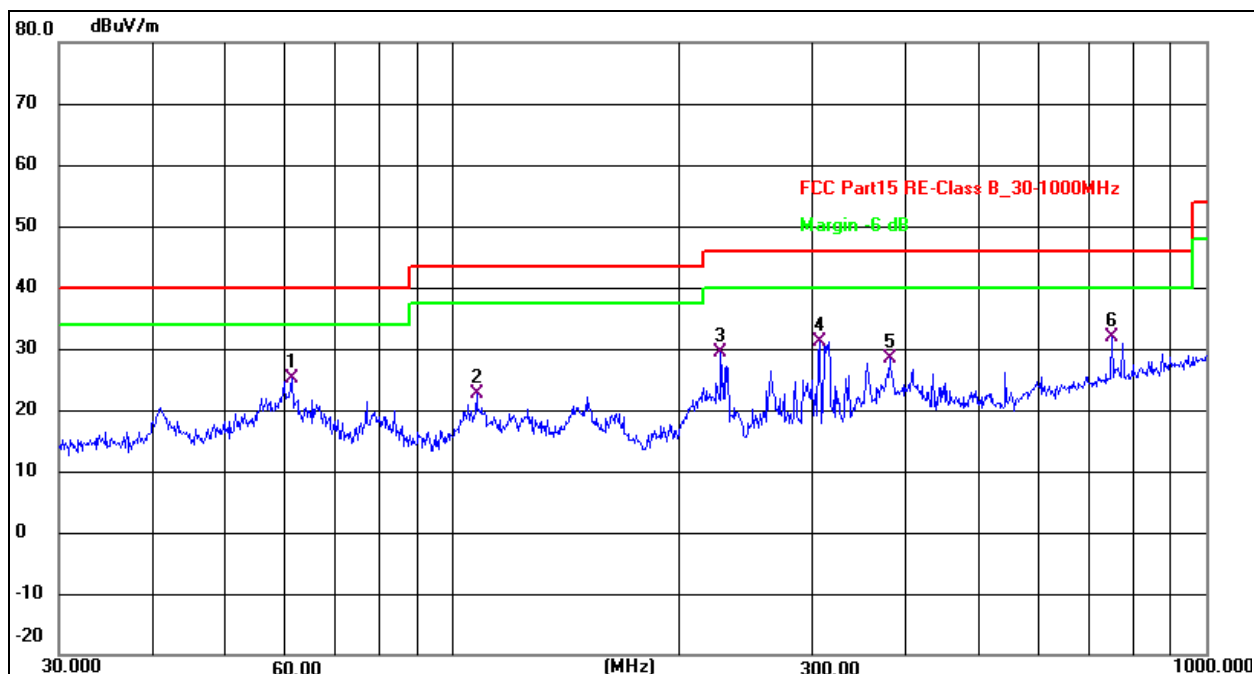
Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	61.1316	38.16	-12.97	25.19	40.00	-14.81	QP
2	107.5101	37.01	-14.28	22.73	43.50	-20.77	QP
3	226.8936	42.62	-13.18	29.44	46.00	-16.56	QP
4	306.7537	41.33	-10.27	31.06	46.00	-14.94	QP
5	379.9141	36.69	-8.38	28.31	46.00	-17.69	QP
6 *	750.1083	32.19	-0.36	31.83	46.00	-14.17	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Vertical

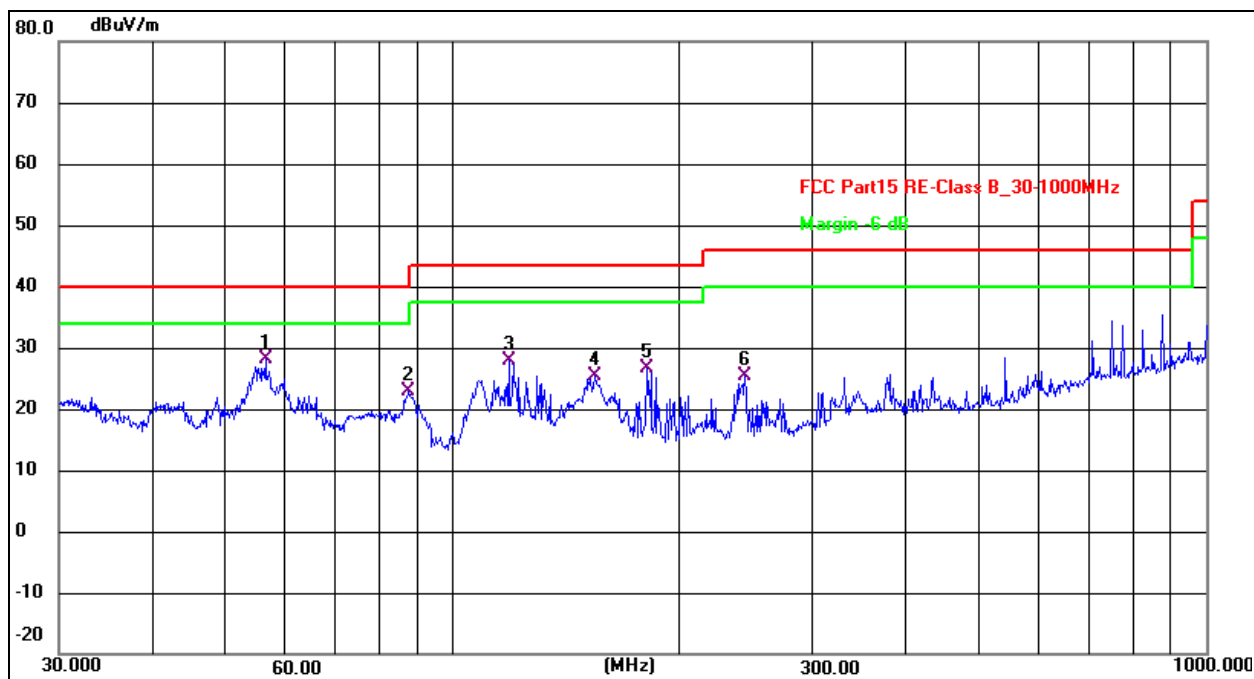


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	56.3948	40.45	-12.33	28.12	40.00	-11.88	QP
2	87.4177	37.76	-14.80	22.96	40.00	-17.04	QP
3	118.6014	40.70	-12.84	27.86	43.50	-15.64	QP
4	154.2786	36.30	-10.98	25.32	43.50	-18.18	QP
5	180.6488	39.60	-12.93	26.67	43.50	-16.83	QP
6	244.2321	37.71	-12.41	25.30	46.00	-20.70	QP

EE1-30

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Horizontal

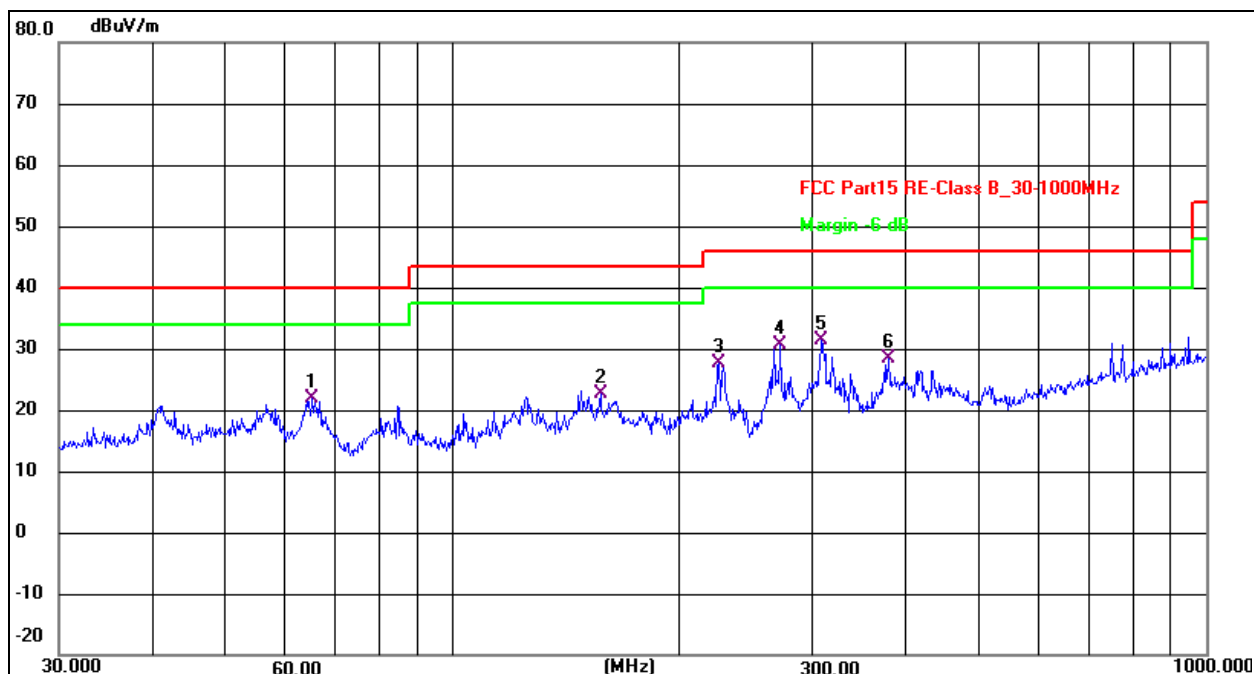

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	65.1145	35.37	-13.50	21.87	40.00	-18.13	QP
2	157.0074	33.92	-11.18	22.74	43.50	-20.76	QP
3	225.3080	40.87	-13.25	27.62	46.00	-18.38	QP
4	272.2776	41.92	-11.39	30.53	46.00	-15.47	QP
5 *	308.9126	41.51	-10.22	31.29	46.00	-14.71	QP
6	378.5843	36.74	-8.41	28.33	46.00	-17.67	QP

C.O.LTD

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 7	Polarization:	Vertical

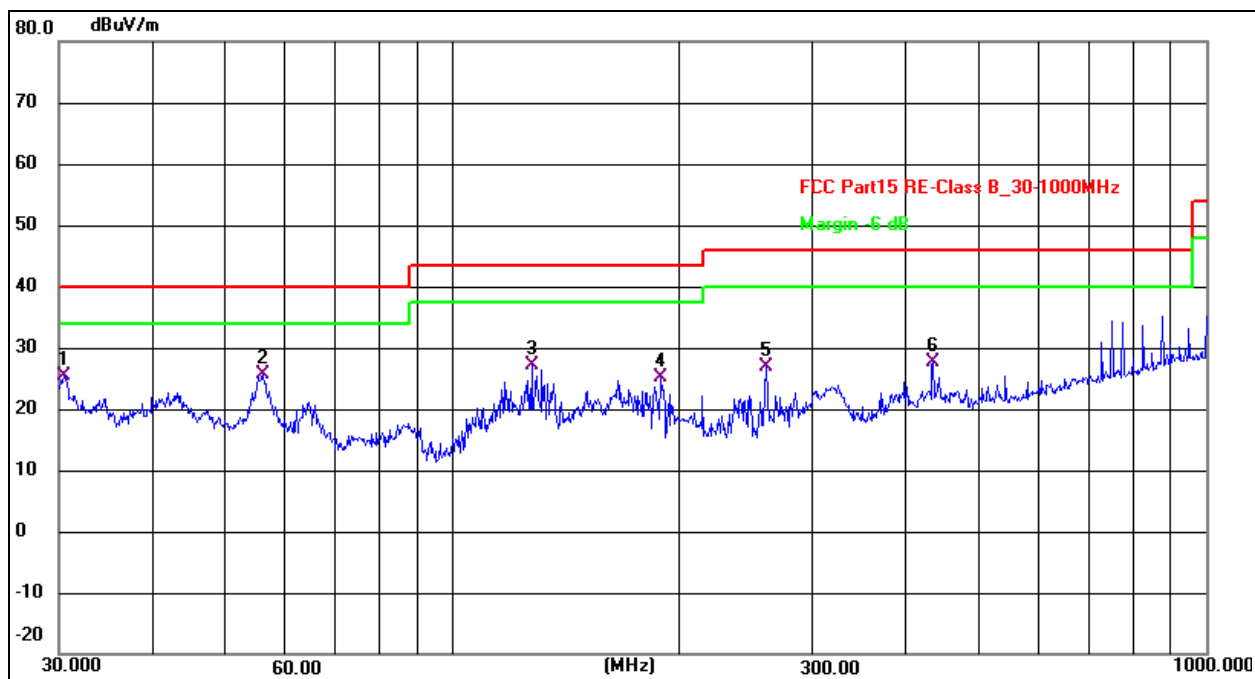

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.4238	37.62	-12.25	25.37	40.00	-14.63	QP
2 *	56.0007	37.89	-12.28	25.61	40.00	-14.39	QP
3	127.2176	39.27	-12.18	27.09	43.50	-16.41	QP
4	188.4125	38.60	-13.51	25.09	43.50	-18.41	QP
5	261.0583	38.59	-11.77	26.82	46.00	-19.18	QP
6	434.0651	34.75	-7.14	27.61	46.00	-18.39	QP

**Between 1GHz – 25GHz
1Mbps**

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	71.87	-19.99	51.88	74.00	-22.12	PK
V	4804.00	62.37	-19.99	42.38	54.00	-11.62	AV
V	7206.00	63.20	-14.22	48.98	74.00	-25.02	PK
V	7206.00	54.04	-14.22	39.82	54.00	-14.18	AV
H	4804.00	70.74	-19.99	50.75	74.00	-23.25	PK
H	4804.00	61.33	-19.99	41.34	54.00	-12.66	AV
H	7206.00	62.08	-14.22	47.86	74.00	-26.14	PK
H	7206.00	53.24	-14.22	39.02	54.00	-14.98	AV
Middle channel							
V	4880.00	69.00	-19.84	49.16	74.00	-24.84	PK
V	4880.00	60.24	-19.84	40.40	54.00	-13.60	AV
V	7320.00	60.24	-13.90	46.34	74.00	-27.66	PK
V	7320.00	51.99	-13.90	38.09	54.00	-15.91	AV
H	4880.00	66.51	-19.84	46.67	74.00	-27.33	PK
H	4880.00	56.63	-19.84	36.79	54.00	-17.21	AV
H	7320.00	58.95	-13.90	45.05	74.00	-28.95	PK
H	7320.00	50.84	-13.90	36.94	54.00	-17.06	AV
High channel							
V	4960.00	70.36	-19.68	50.68	74.00	-23.32	PK
V	4960.00	59.45	-19.68	39.77	54.00	-14.23	AV
V	7440.00	62.32	-13.57	48.75	74.00	-25.25	PK
V	7440.00	52.97	-13.57	39.40	54.00	-14.60	AV
H	4960.00	68.54	-19.68	48.86	74.00	-25.14	PK
H	4960.00	57.89	-19.68	38.21	54.00	-15.79	AV
H	7440.00	61.26	-13.57	47.69	74.00	-26.31	PK
H	7440.00	53.00	-13.57	39.43	54.00	-14.57	AV

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2Mbps

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4804.00	72.44	-19.99	52.45	74.00	-21.55	PK
V	4804.00	61.91	-19.99	41.92	54.00	-12.08	AV
V	7206.00	65.00	-14.22	50.78	74.00	-23.22	PK
V	7206.00	55.82	-14.22	41.60	54.00	-12.40	AV
H	4804.00	69.30	-19.99	49.31	74.00	-24.69	PK
H	4804.00	59.98	-19.99	39.99	54.00	-14.01	AV
H	7206.00	63.34	-14.22	49.12	74.00	-24.88	PK
H	7206.00	55.22	-14.22	41.00	54.00	-13.00	AV
Middle channel							
V	4880.00	69.49	-19.84	49.65	74.00	-24.35	PK
V	4880.00	61.96	-19.84	42.12	54.00	-11.88	AV
V	7320.00	60.20	-13.90	46.30	74.00	-27.70	PK
V	7320.00	51.77	-13.90	37.87	54.00	-16.13	AV
H	4880.00	66.67	-19.84	46.83	74.00	-27.17	PK
H	4880.00	57.51	-19.84	37.67	54.00	-16.33	AV
H	7320.00	57.62	-13.90	43.72	74.00	-30.28	PK
H	7320.00	48.87	-13.90	34.97	54.00	-19.03	AV
High channel							
V	4960.00	71.22	-19.68	51.54	74.00	-22.46	PK
V	4960.00	61.15	-19.68	41.47	54.00	-12.53	AV
V	7440.00	62.28	-13.57	48.71	74.00	-25.29	PK
V	7440.00	51.38	-13.57	37.81	54.00	-16.19	AV
H	4960.00	69.40	-19.68	49.72	74.00	-24.28	PK
H	4960.00	59.21	-19.68	39.53	54.00	-14.47	AV
H	7440.00	60.85	-13.57	47.28	74.00	-26.72	PK
H	7440.00	53.45	-13.57	39.88	54.00	-14.12	AV


Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Measurement - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

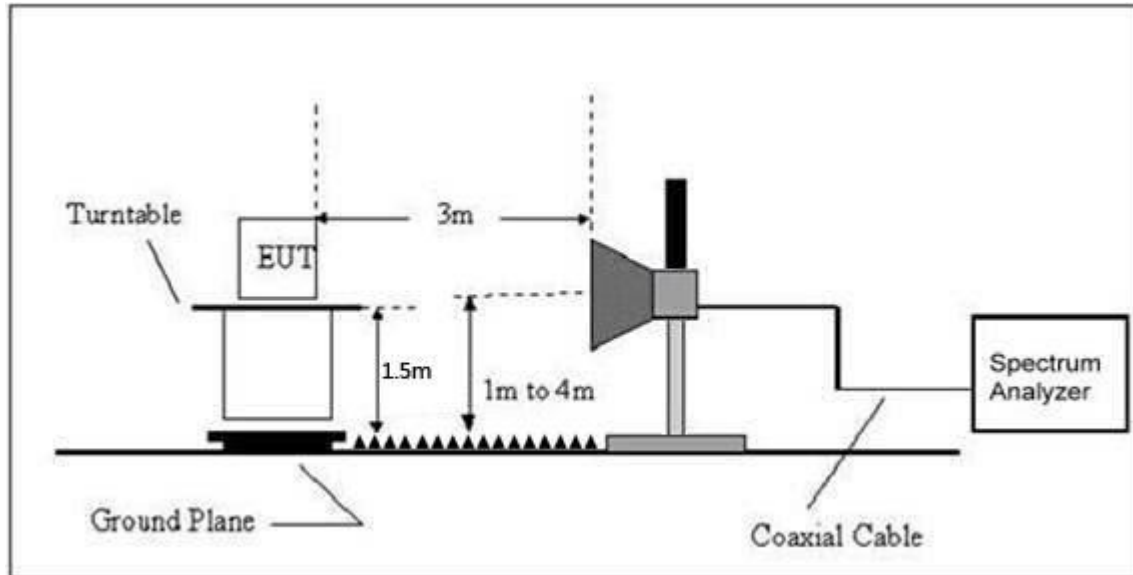

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(3)
13.36-13.41			

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Over	Result
					PK	PK	AV	PK	
GFSK(1Mbps)	Low Channel 2402MHz								
	H	2390.00	73.28	-25.43	47.85	74.00	54.00	-26.15	PASS
	H	2400.00	74.61	-25.40	49.21	74.00	54.00	-24.79	PASS
	V	2390.00	73.32	-25.43	47.89	74.00	54.00	-26.11	PASS
	V	2400.00	73.21	-25.40	47.81	74.00	54.00	-26.19	PASS
	High Channel 2480MHz								
	H	2483.50	72.33	-25.15	47.18	74.00	54.00	-26.82	PASS
	H	2500.00	68.60	-25.10	43.50	74.00	54.00	-30.50	PASS
	V	2483.50	72.75	-25.15	47.60	74.00	54.00	-26.40	PASS
V	2500.00	68.52	-25.10	43.42	74.00	54.00	-30.58	PASS	
GFSK(2Mbps)	Low Channel 2402MHz								
	H	2390.00	73.13	-25.43	47.70	74.00	54.00	-26.30	PASS
	H	2400.00	76.00	-25.40	50.60	74.00	54.00	-23.40	PASS
	V	2390.00	73.10	-25.43	47.67	74.00	54.00	-26.33	PASS
	V	2400.00	74.31	-25.40	48.91	74.00	54.00	-25.09	PASS
	High Channel 2480MHz								
	H	2483.50	72.17	-25.15	47.02	74.00	54.00	-26.98	PASS
	H	2500.00	70.07	-25.10	44.97	74.00	54.00	-29.03	PASS
	V	2483.50	73.47	-25.15	48.32	74.00	54.00	-25.68	PASS
V	2500.00	70.01	-25.10	44.91	74.00	54.00	-29.09	PASS	

Remark:

1. Measurement = Reading Level + Correct Factor, Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss


9.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 29V

Mode	Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK(1Mbps)	2402 MHz	-14.64	8	PASS
	2440 MHz	-13.58	8	PASS
	2480 MHz	-13.30	8	PASS
GFSK(2Mbps)	2402 MHz	-16.61	8	PASS
	2440 MHz	-15.58	8	PASS
	2480 MHz	-15.53	8	PASS

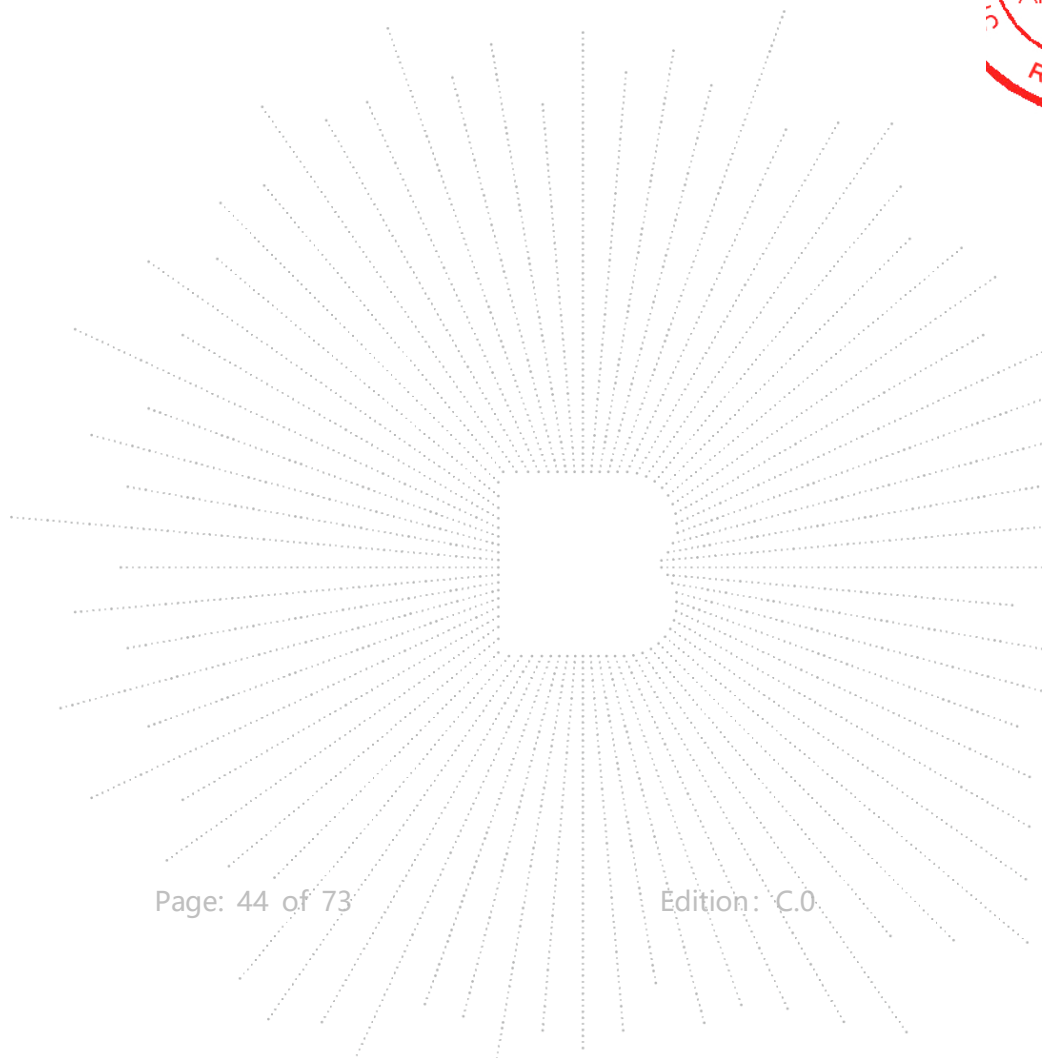

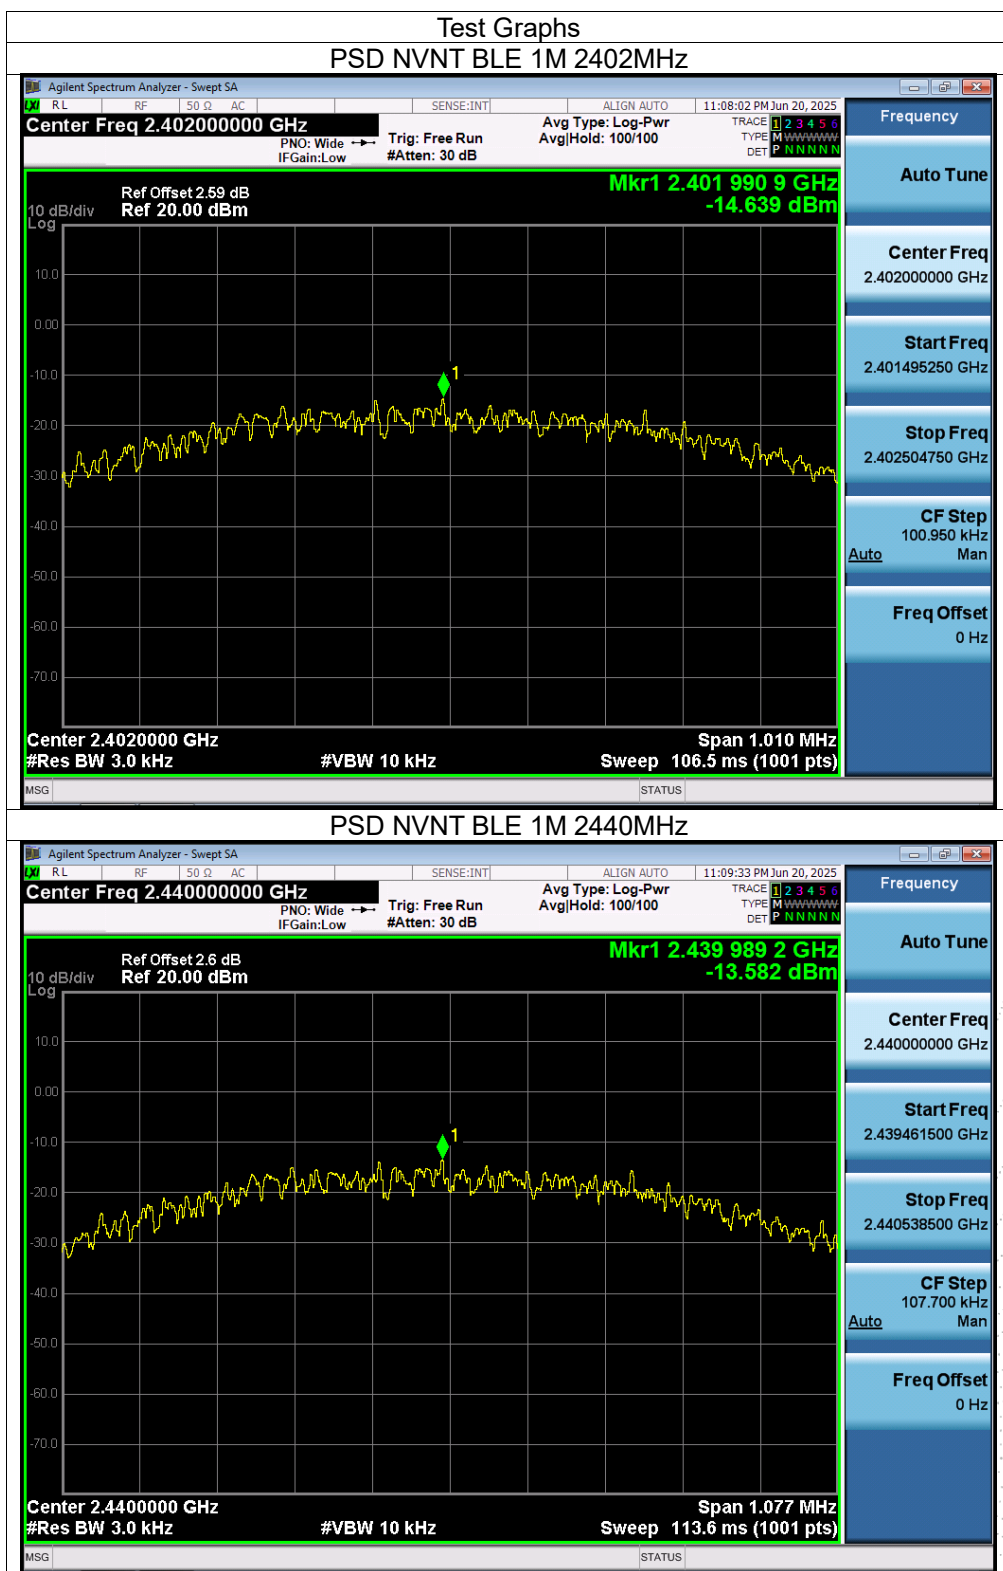

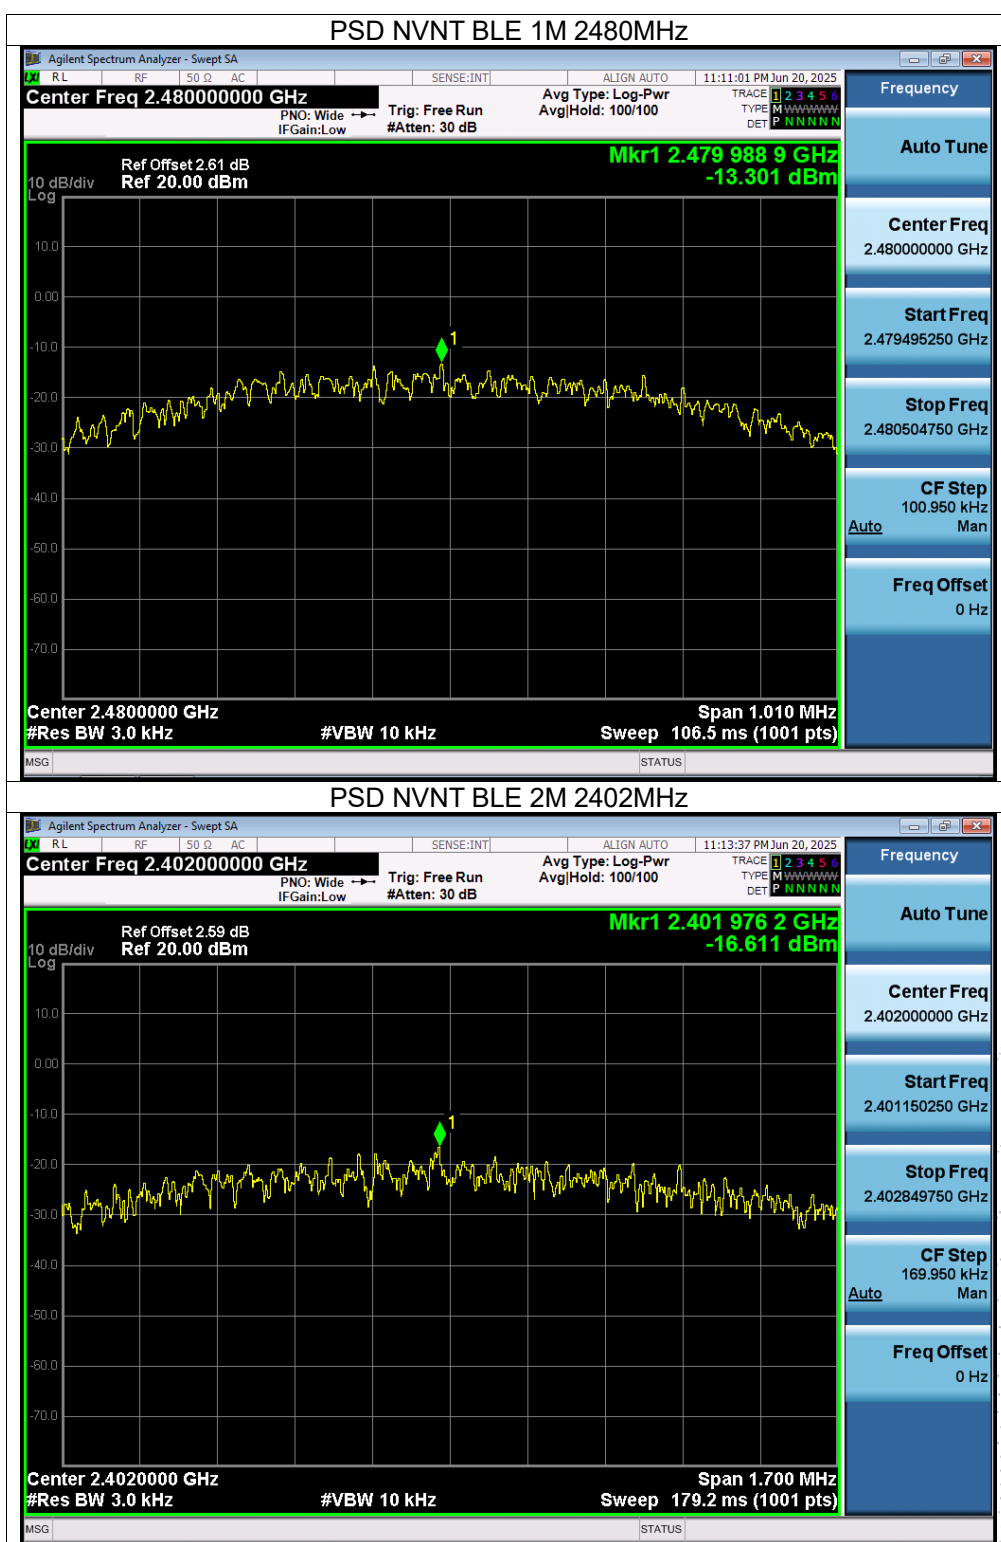

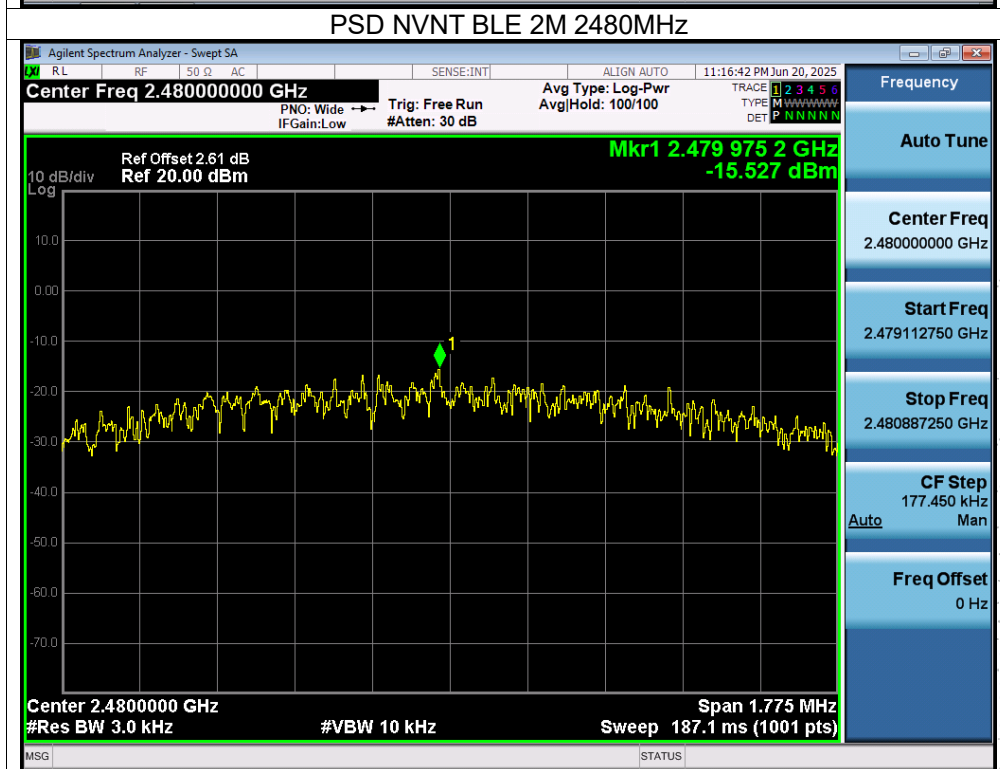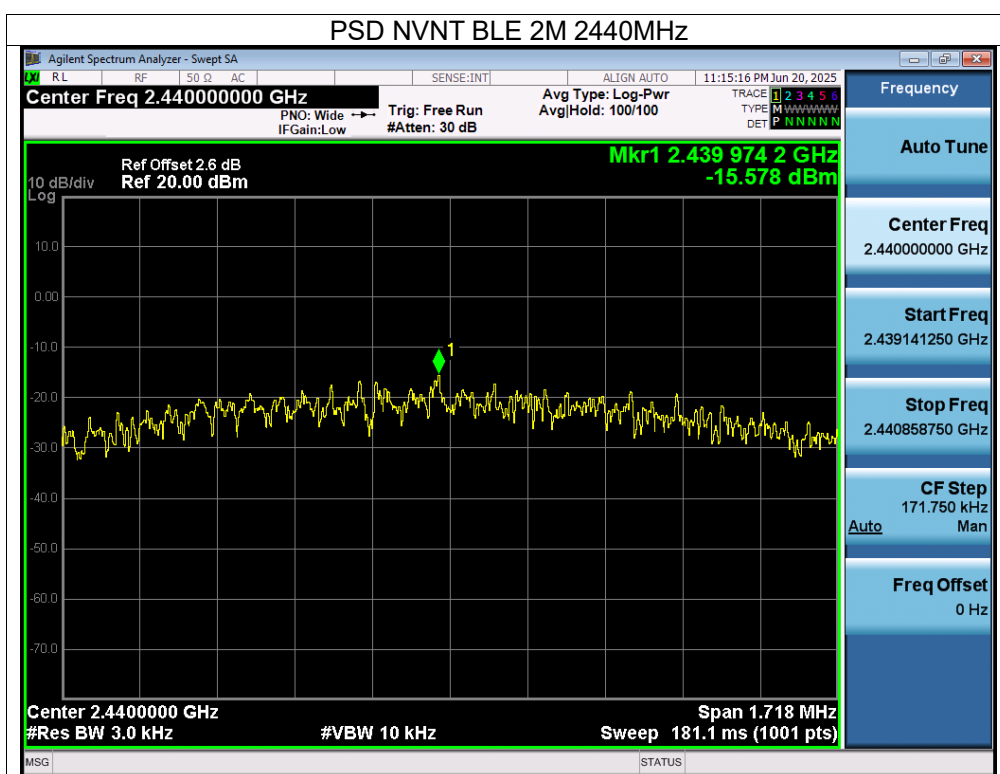

10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss



10.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 29V

Mode	Frequency (MHz)	-6dB bandwidth (MHz)	Limit (kHz)	Result
GFSK(1Mbps)	2402	0.673	500	Pass
	2440	0.718	500	Pass
	2480	0.673	500	Pass
GFSK(2Mbps)	2402	1.133	500	Pass
	2440	1.145	500	Pass
	2480	1.183	500	Pass

CHENZHEN



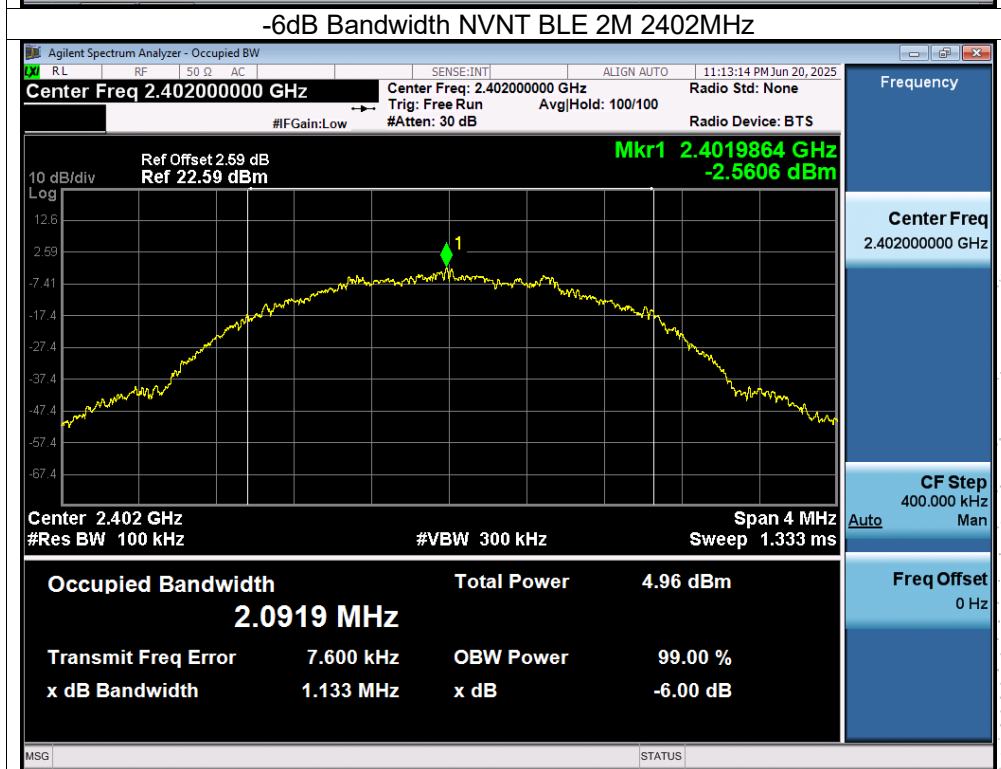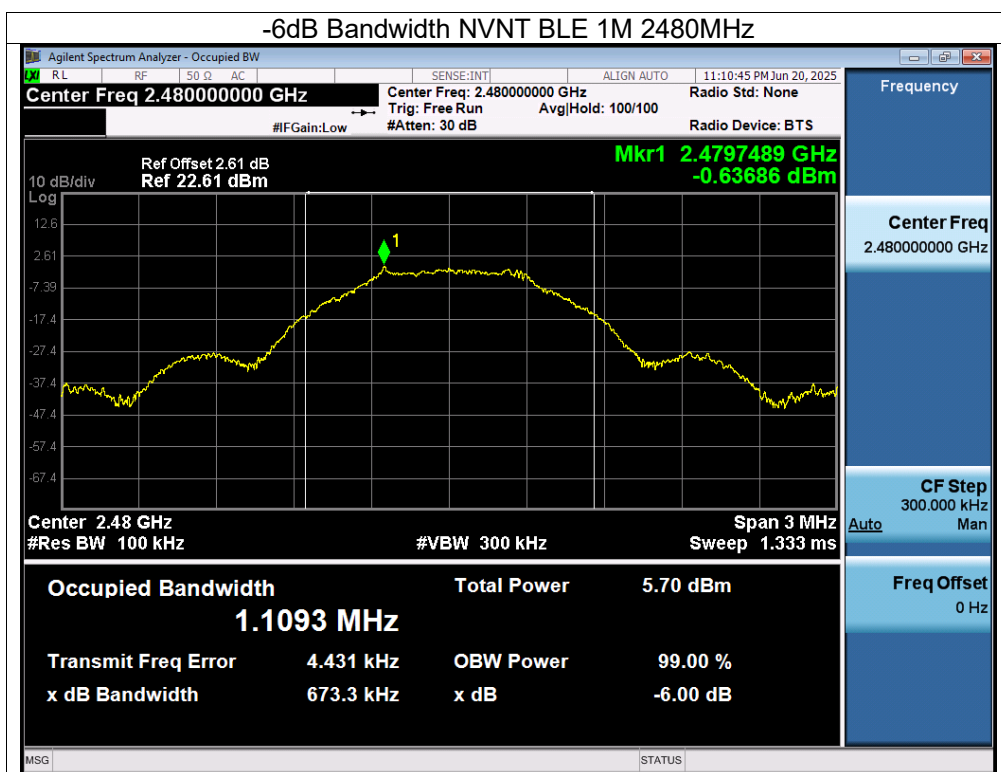

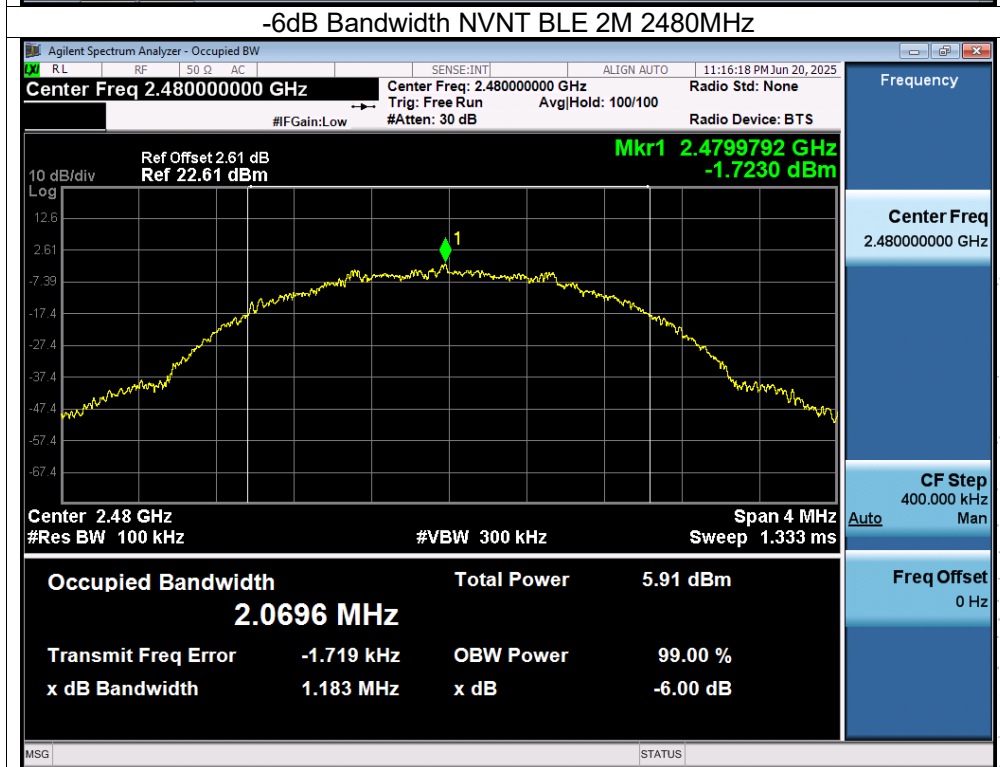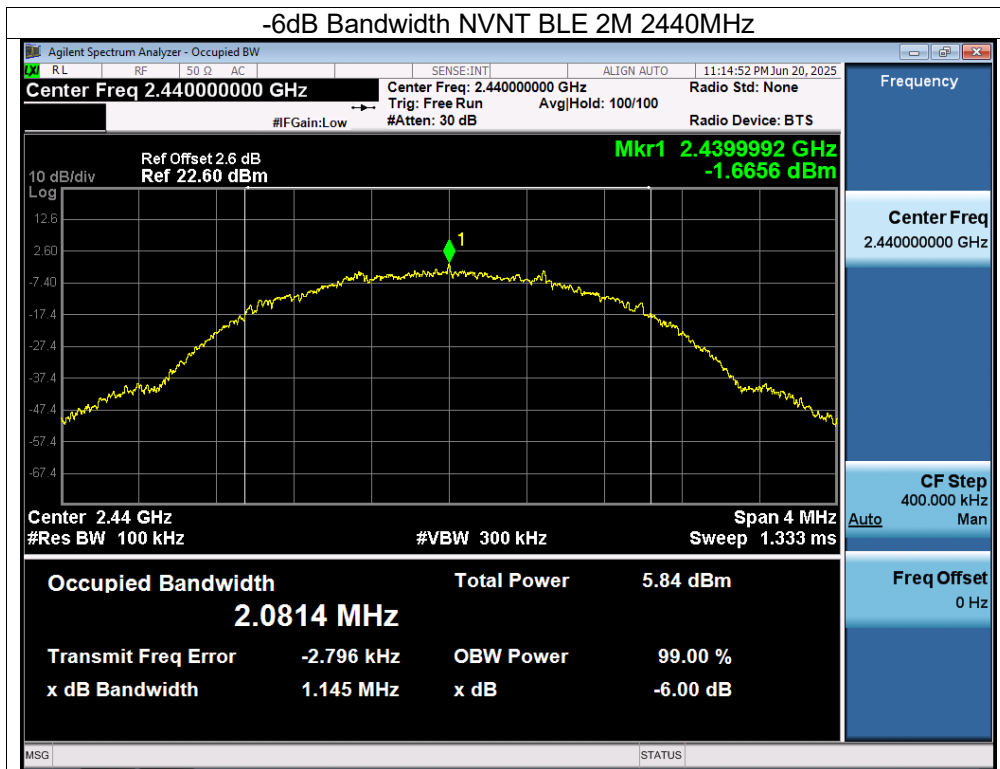

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- a. The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 29V

Mode	Frequency(MHz)	Maximum Conducted Output Power(PK) (dBm)	Conducted Output Power Limit(dBm)
GFSK(1Mbps)	2402	-0.78	30
	2440	0.27	30
	2480	0.34	30
GFSK(2Mbps)	2402	-0.78	30
	2440	0.24	30
	2480	0.31	30

12. 100 kHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test procedure

Using the following spectrum analyzer setting:

- Set the RBW = 100KHz.
- Set the VBW = 300KHz.
- Sweep time = auto couple.
- Detector function = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.


12.4 EUT operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss



12.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	DC 29V

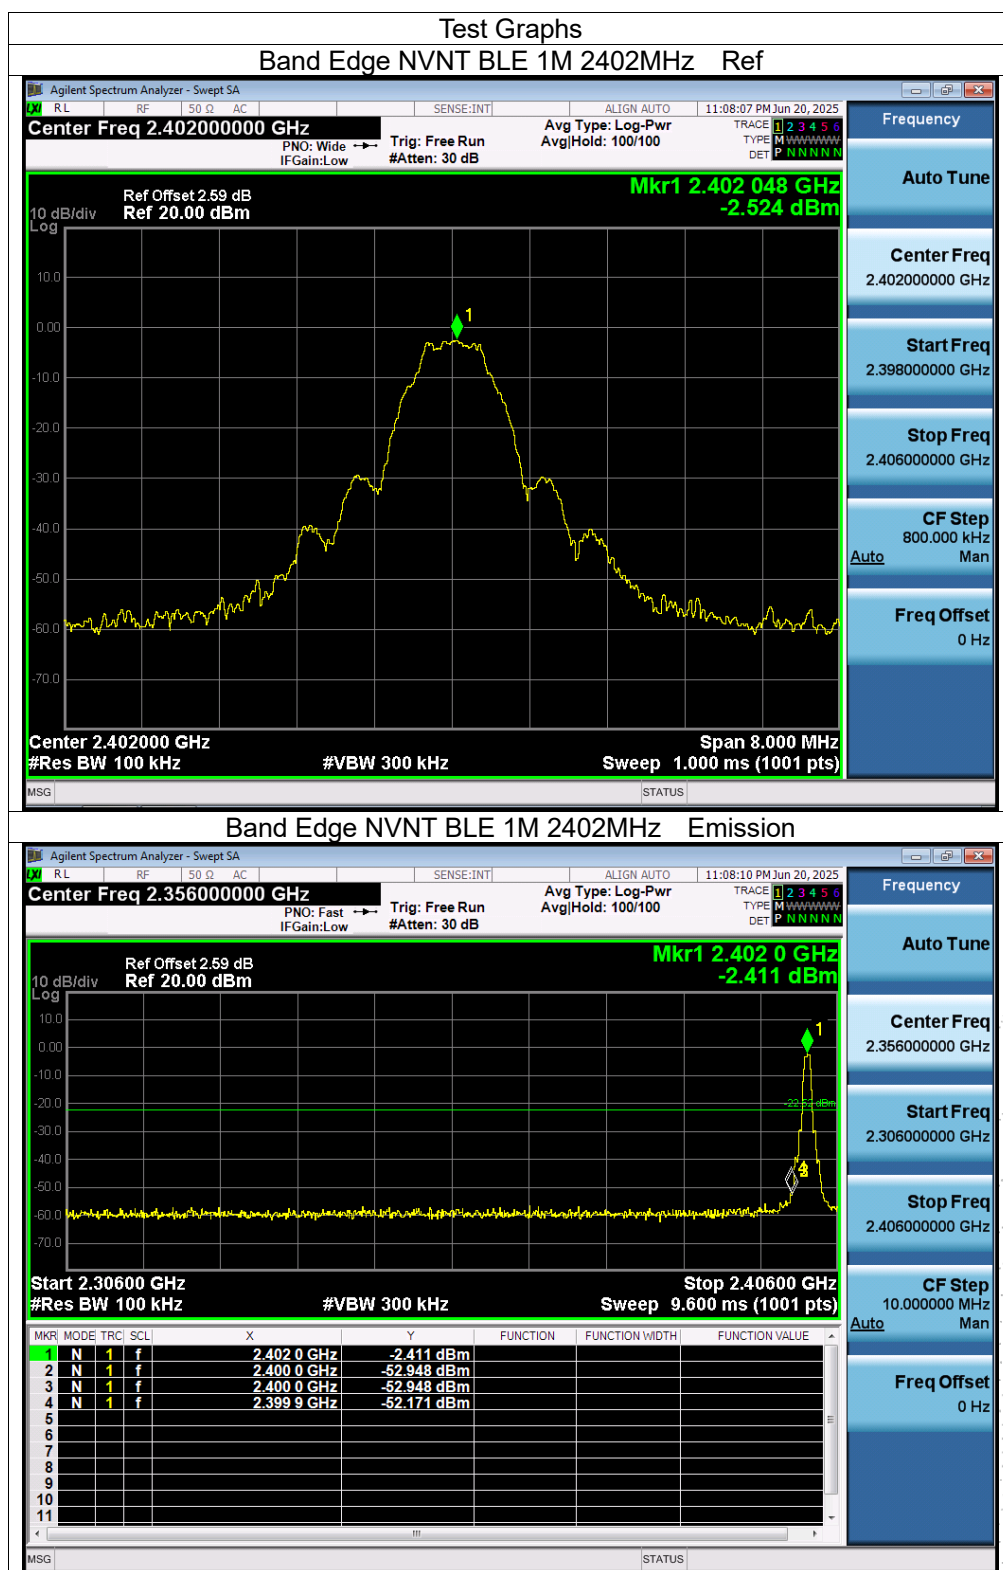

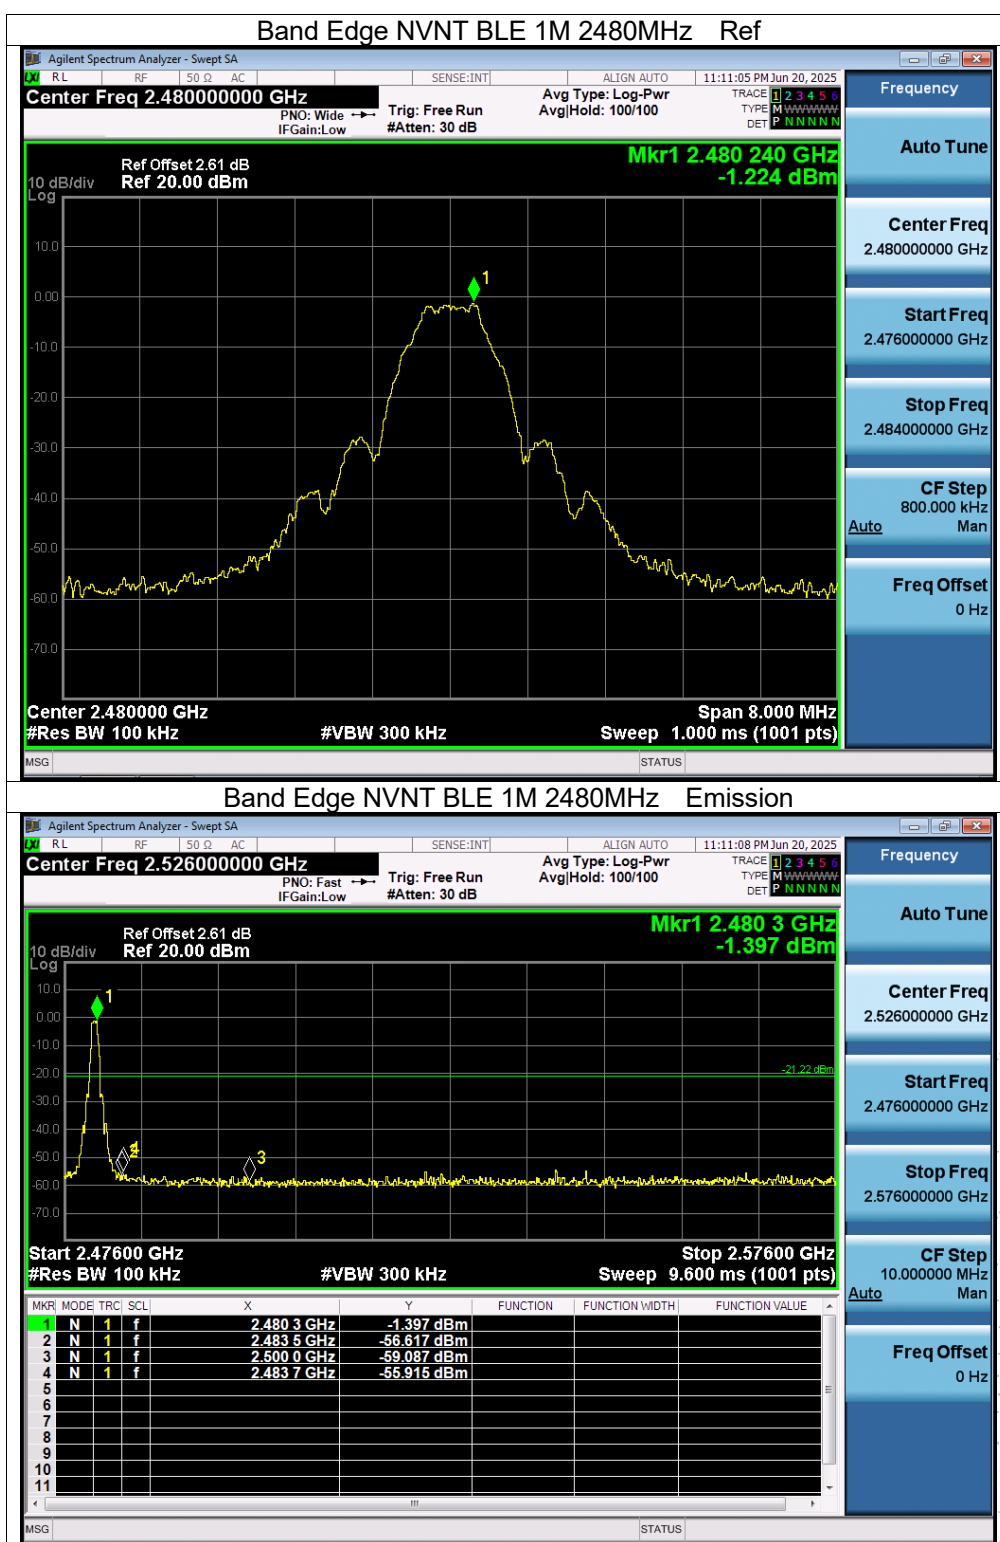

SHENZHEN

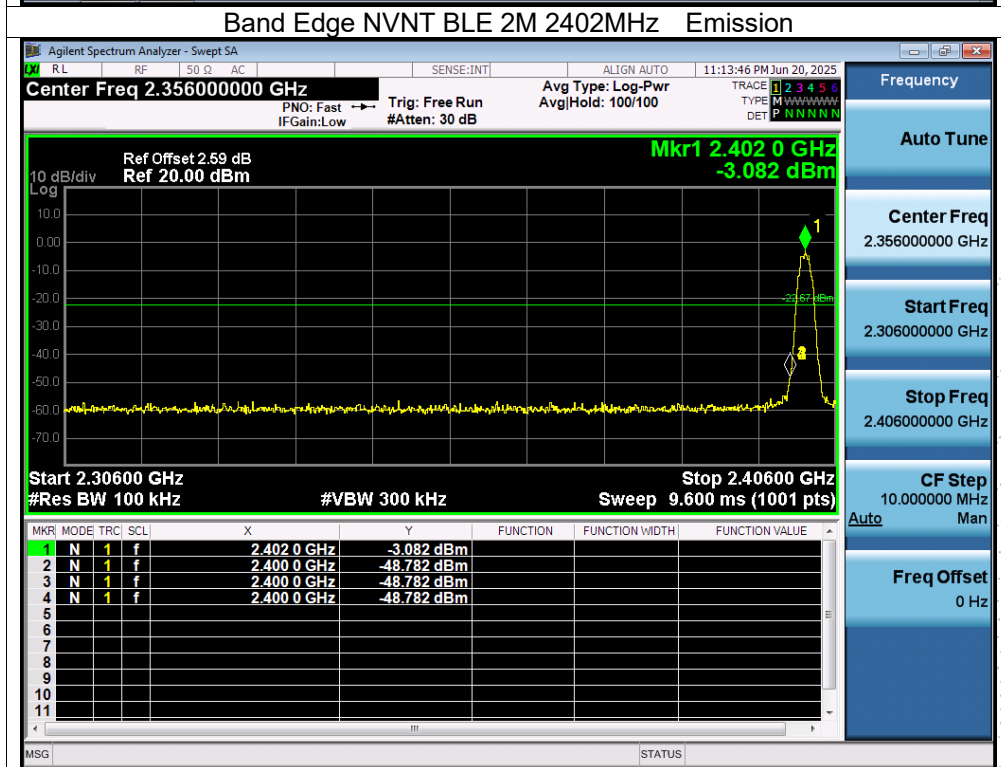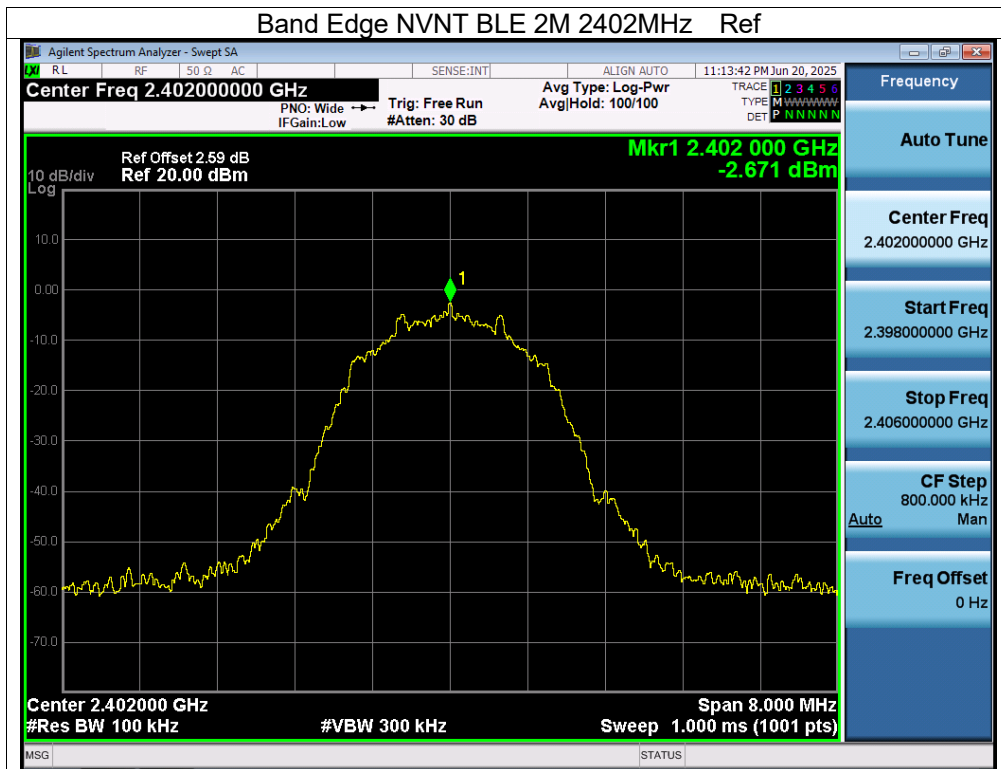

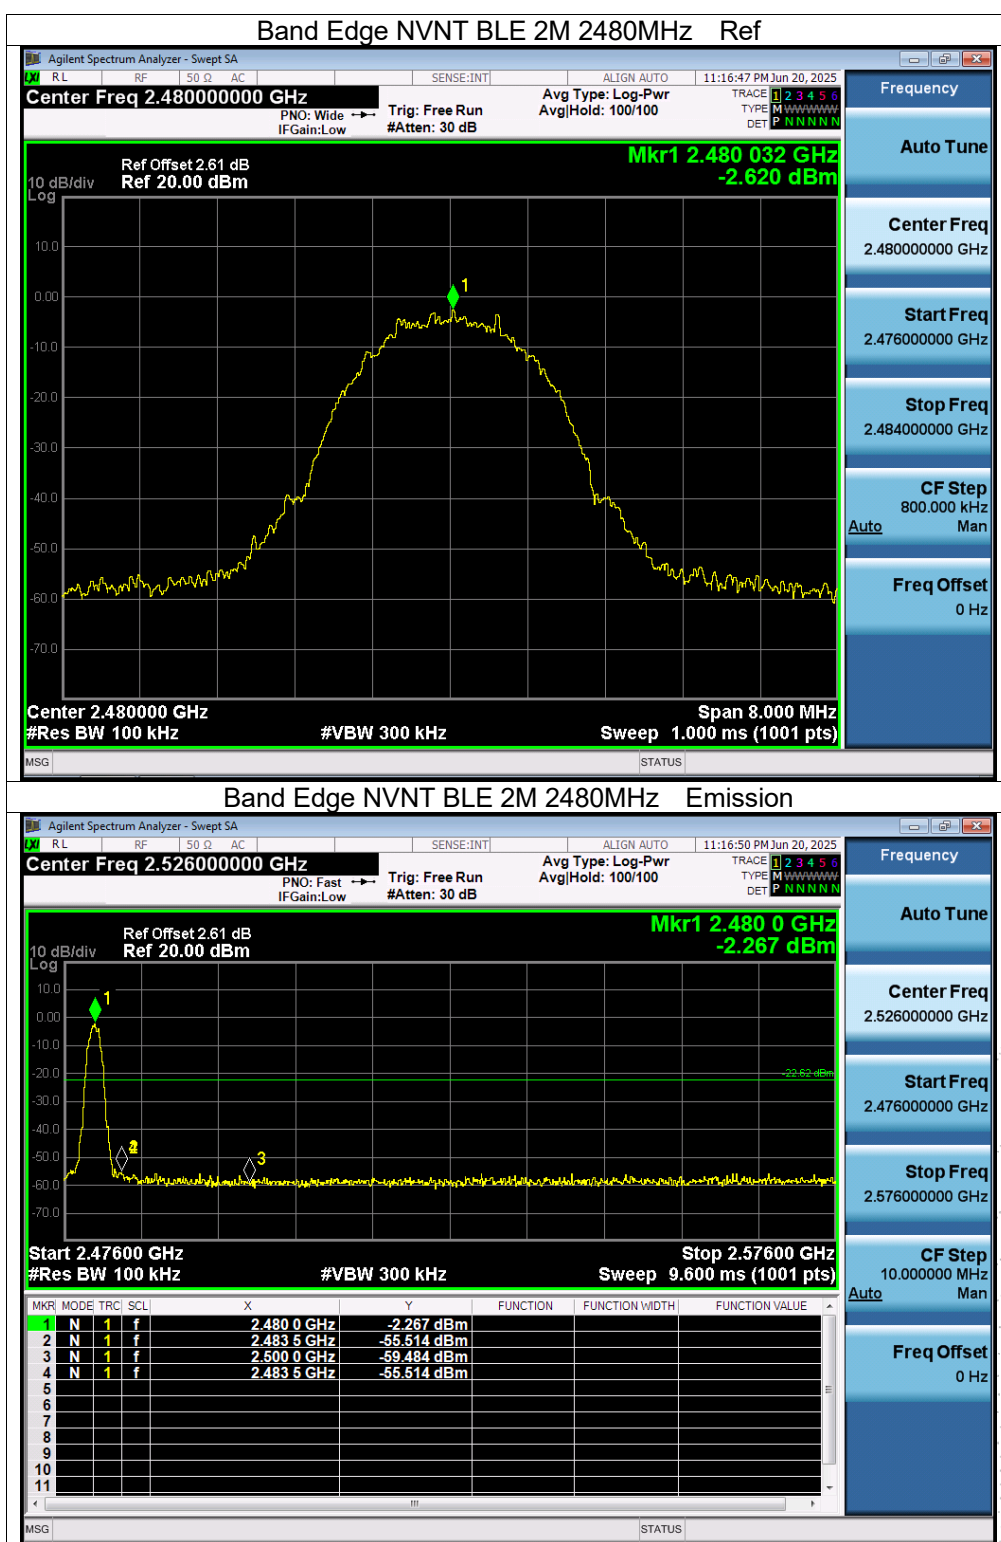

Conducted Emission Measurement

