

# TEST REPORT

**Application No.:** GZCR2508001293LM

**Applicant:** SHENZHEN BETTERLIFE PHOTOELECTRIC TECHNOLOGY CO., LTD.

**Address of Applicant:** 2nd Floor, Building C, Shitoushan Industrial Zone, Zhoushi Road, Shiyang Town, Baoan District, Shenzhen, Guangdong, China

**Manufacturer:** SHENZHEN BETTERLIFE PHOTOELECTRIC TECHNOLOGY CO., LTD.

**Address of Manufacturer:** 2nd Floor, Building C, Shitoushan Industrial Zone, Zhoushi Road, Shiyang Town, Baoan District, Shenzhen, Guangdong, China

**Factory:** SHENZHEN BETTERLIFE PHOTOELECTRIC TECHNOLOGY CO., LTD.

**Address of Factory:** 2nd Floor, Building C, Shitoushan Industrial Zone, Zhoushi Road, Shiyang Town, Baoan District, Shenzhen, Guangdong, China

**Product Name:** Garden Light

**Model No.:** MODY01RG, MODY02RG, MODY03RG, MODY04RG, MODY05RG, MODY06RG, MODY07RG, MODY08RG, MODY09RG, ODX01RG, ODX02RG, ODX18RG, ODX28RG, MODX01RG, MODX02RG, MODX07RG, MODX30RG, OD01RG, OD02RG, MODY01RGB, MODY02RGB, MODY03RGB, MODY04RGB, MODY05RGB, MODY06RGB, MODY07RGB, MODY08RGB, MODY09RGB, OD01RGB, ODX24RGB, MOD01RGB, MOD32RB, MOD32GB, MOD01GB, OD01RG, MH-R30, MH-R50, MH-H90, MOD24RGB, MOD01RG, MOD32RG, MOD01RB, MOD32RGB ♣

♣ Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.

**Standard(s):** 47 CFR Part 15, Subpart C 15.231

**Date of Receipt:** 2025-08-22

**Date of Test:** 2025-08-27 to 2025-10-15

**Date of Issue:** 2025-11-06

|                     |              |
|---------------------|--------------|
| <b>Test Result:</b> | <b>Pass*</b> |
|---------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com

| Revision Record |                  |            |          |
|-----------------|------------------|------------|----------|
| Version         | Report No.       | Date       | Remark   |
| 01              | GZCR250800129302 | 2025-11-06 | Original |
|                 |                  |            |          |
|                 |                  |            |          |

|                          |  |                                                                                     |  |
|--------------------------|--|-------------------------------------------------------------------------------------|--|
| Authorized for issue by: |  |                                                                                     |  |
|                          |  |  |  |
|                          |  | Michael Huang/Project Engineer                                                      |  |
| Approved By              |  |  |  |
|                          |  | Vico Cui/Reviewer                                                                   |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com

## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |                                  |        |
|--------------------------------------|----------------------------------|--------|----------------------------------|--------|
| Item                                 | Standard                         | Method | Requirement                      | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.231 | N/A    | 47 CFR Part 15, Subpart C 15.203 | Pass   |

| Radio Spectrum Matter Part                           |                                  |                                    |                                              |        |
|------------------------------------------------------|----------------------------------|------------------------------------|----------------------------------------------|--------|
| Item                                                 | Standard                         | Method                             | Requirement                                  | Result |
| 20dB Bandwidth                                       | 47 CFR Part 15, Subpart C 15.231 | ANSI C63.10 (2020) Section 6.9     | 47 CFR Part 15, Subpart C 15.231(c)          | Pass   |
| Dwell Time (15.231(a1))                              |                                  | ANSI C63.10 (2020) Section 7.8.4   | 47 CFR Part 15, Subpart C 15.231(a1)         | Pass   |
| Radiated Emissions below 1GHz                        |                                  | ANSI C63.10 (2020) Section 6.4&6.5 | 47 CFR Part 15C Section 15.231(b) and 15.209 | Pass   |
| Field Strength of the Fundamental Signal (15.231(b)) |                                  | ANSI C63.10 (2020) Section 6.5     | 47 CFR Part 15, Subpart C 15.231(b)          | Pass   |
| Radiated Emissions above 1GHz                        |                                  | ANSI C63.10 (2020) Section 6.6     | 47 CFR Part 15C Section 15.231(b) and 15.209 | Pass   |

### Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

### ♣ Declaration of EUT Family Grouping:

Model No.: MODY01RG, MODY02RG, MODY03RG, MODY04RG, MODY05RG, MODY06RG, MODY07RG, MODY08RG, MODY09RG, ODX01RG, ODX02RG, ODX18RG, ODX28RG, MODX01RG, MODX02RG, MODX07RG, MODX30RG, OD01RG, OD02RG

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on model name.

Model No.: MODY01RGB, MODY02RGB, MODY03RGB, MODY04RGB, MODY05RGB, MODY06RGB, MODY07RGB, MODY08RGB, MODY09RGB, OD01RGB, ODX24RGB, MOD01RGB, MOD32RB, MOD32GB, MOD01GB, OD01RG, MH-R30, MH-R50, MH-H90, MOD24RGB, MOD01RG, MOD32RG, MOD01RB, MOD32RGB

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on model name.

Therefore only one model MODY01RG was tested in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com

## 3 Contents

|                                                                | Page |
|----------------------------------------------------------------|------|
| 1 Cover Page .....                                             | 1    |
| 2 Test Summary .....                                           | 3    |
| 3 Contents .....                                               | 4    |
| 4 General Information .....                                    | 6    |
| 4.1 Details of E.U.T. ....                                     | 6    |
| 4.2 Description of Support Units .....                         | 6    |
| 4.3 Measurement Uncertainty .....                              | 7    |
| 4.4 Test Location .....                                        | 7    |
| 4.5 Test Facility .....                                        | 8    |
| 4.6 Deviation from Standards .....                             | 8    |
| 4.7 Abnormalities from Standard Conditions .....               | 8    |
| 5 Equipment List .....                                         | 9    |
| 6 Radio Spectrum Technical Requirement .....                   | 11   |
| 6.1 Antenna Requirement .....                                  | 11   |
| 6.1.1 Test Requirement: .....                                  | 11   |
| 6.1.2 Conclusion .....                                         | 11   |
| 7 Radio Spectrum Matter Test Results .....                     | 12   |
| 7.1 20dB Bandwidth .....                                       | 12   |
| 7.1.1 E.U.T. Operation .....                                   | 12   |
| 7.1.2 Test Mode Description .....                              | 12   |
| 7.1.3 Test Setup Diagram .....                                 | 12   |
| 7.1.4 Measurement Procedure and Data .....                     | 13   |
| 7.2 Dwell Time (15.231(a1)) .....                              | 14   |
| 7.2.1 E.U.T. Operation .....                                   | 14   |
| 7.2.2 Test Mode Description .....                              | 14   |
| 7.2.3 Test Setup Diagram .....                                 | 14   |
| 7.2.4 Measurement Procedure and Data .....                     | 15   |
| 7.3 Radiated Emissions below 1GHz .....                        | 16   |
| 7.3.1 E.U.T. Operation .....                                   | 16   |
| 7.3.2 Test Mode Description .....                              | 16   |
| 7.3.3 Test Setup Diagram .....                                 | 16   |
| 7.3.4 Measurement Procedure and Data .....                     | 17   |
| 7.4 Field Strength of the Fundamental Signal (15.231(b)) ..... | 20   |
| 7.4.1 E.U.T. Operation .....                                   | 20   |
| 7.4.2 Test Mode Description .....                              | 20   |
| 7.4.3 Test Setup Diagram .....                                 | 21   |
| 7.4.4 Measurement Procedure and Data .....                     | 21   |
| 7.5 Radiated Emissions above 1GHz .....                        | 22   |
| 7.5.1 E.U.T. Operation .....                                   | 22   |
| 7.5.2 Test Mode Description .....                              | 22   |
| 7.5.3 Test Setup Diagram .....                                 | 23   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

|       |                                               |    |
|-------|-----------------------------------------------|----|
| 7.5.4 | Measurement Procedure and Data .....          | 23 |
| 8     | Test Setup Photo .....                        | 26 |
| 9     | EUT Constructional Details (EUT Photos) ..... | 27 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)**



## 4 General Information

### 4.1 Details of E.U.T.

Power supply: DC 5V (Supply power for the AC\DC adapter as below) for Garden Light (Receiver only)  
POWER SUPPLY  
Model: RKPO-UL0401000IP44-1A  
Input: AC 120V 60Hz 0.2A  
Output: DC 4V, 1000mA 4W  
DC 3V = 1 X 3V"CR2025" button cell for remote control (Transmitter)  
Rated Power: Less then 5W

Cable(s): 2 Pins, AC input  
2 wires x about 3.0m unscreened DC output cable.  
(The POWER SUPPLY output cable to EUT).

Test voltage: DC 3V  
Operation Frequency 433.92 MHz  
Channel Numbers: 1  
Modulation Type: ASK  
Antenna Type: PCB antenna

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

### 4.2 Description of Support Units

| Description                                     | Manufacturer | Model No. | Serial No. |
|-------------------------------------------------|--------------|-----------|------------|
| --                                              | --           | --        | --         |
| The EUT has been tested as an independent unit. |              |           |            |



## 4.3 Measurement Uncertainty

| Test Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Measurement Uncertainty                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| 20dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | $\pm 0.274\%$                                                                                                |
| Dwell Time (15.231(a1))                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | $\pm 0.029\%$                                                                                                |
| Radiated Emissions below 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $\pm 5.14\text{dB}$ (30MHz-1GHz; 3m)<br>$\pm 4.90\text{dB}$ (30MHz-1GHz; 10m)                                |
| Field Strength of the Fundamental Signal (15.231(b))                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | $\pm 5.14\text{dB}$ (30MHz-1GHz; 3m)<br>$\pm 4.90\text{dB}$ (30MHz-1GHz; 10m)                                |
| Radiated Emissions above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $\pm 4.88\text{ dB}$ ( 1GHz-6 GHz)<br>$\pm 5.06\text{ dB}$ (6GHz-18GHz)<br>$\pm 5.30\text{dB}$ (18GHz-40GHz) |
| <p>Remark:</p> <p>The <math>U_{\text{lab}}</math> (lab Uncertainty) is less than <math>U_{\text{CISPR}}</math> (CISPR Uncertainty) or <math>U_{\text{ETSI}}</math> (ETSI Uncertainty).</p> <p>Emission decision rule:</p> <ul style="list-style-type: none"> <li>– Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit, marked as Pass in the report.</li> <li>– Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit, marked as Fail in the report.</li> </ul> |                                                                                                              |

## 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,  
No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou,  
Guangdong, China 510663

Tel: +86 20 82155555

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com



## 5 Equipment List

| 20dB Bandwidth                    |                      |           |               |            |              |
|-----------------------------------|----------------------|-----------|---------------|------------|--------------|
| Equipment                         | Manufacturer         | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| MXA Signal Analyzer (10Hz-8.4GHz) | Agilent Technologies | N9020A    | SEM004-10     | 2024-12-03 | 2025-12-02   |
| MI CABLE                          | SGS-EMC              | 0.8M      | EMC2136       | 2023-11-02 | 2025-11-01   |

| Dwell Time (15.231(a1))           |                      |           |               |            |              |
|-----------------------------------|----------------------|-----------|---------------|------------|--------------|
| Equipment                         | Manufacturer         | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| MXA Signal Analyzer (10Hz-8.4GHz) | Agilent Technologies | N9020A    | SEM004-10     | 2024-12-03 | 2025-12-02   |
| MI CABLE                          | SGS-EMC              | 0.8M      | EMC2136       | 2023-11-02 | 2025-11-01   |

| Radiated Emissions below 30MHz |                    |               |               |            |              |
|--------------------------------|--------------------|---------------|---------------|------------|--------------|
| Equipment                      | Manufacturer       | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| 10m Semi-Anechoic Chamber      | ETS                | N/A           | EMC0530       | 2025-08-13 | 2028-08-12   |
| Coaxial cable                  | Mirco-COAX UTIFLEX | 311A          | EMC0540       | 2024-08-19 | 2026-08-18   |
| Amplifier (9kHz-1.3GHz)        | HP                 | 8447F         | EMC2065       | 2024-12-04 | 2025-12-03   |
| Active Loop Antenna-RED        | ETS-Lindgren       | 6502          | EMC2190       | 2024-04-16 | 2026-04-15   |
| EMI Test Receiver (9kHz-7GHz)  | Rohde & Schwarz    | ESR7          | EMC2220       | 2024-12-04 | 2025-12-03   |
| Test Software E3               | Audix              | Ver.6.120110a | GZE100-61     | N/A        | N/A          |

| Radiated Emissions (30MHz-1GHz)       |                             |               |               |            |              |
|---------------------------------------|-----------------------------|---------------|---------------|------------|--------------|
| Equipment                             | Manufacturer                | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| 966 Anechoic Chamber                  | Shenzhen C.R.T              | CRTSGSSAC966  | EMC2230       | 2025-03-22 | 2028-03-21   |
| EMI Test Receiver(1Hz-8GHz)           | Rohde & Schwarz             | ESW8          | EMC2229       | 2024-12-03 | 2025-12-02   |
| Amplifier(9k-1000MHz)                 | SONOMA                      | 310           | EMC2237       | 2024-12-03 | 2025-12-02   |
| Trilog Broadband Antenna (25MHz-2GHz) | Schwarzbeck Mess-Elektronik | VULB 9168     | EMC2238       | 2025-03-24 | 2027-03-23   |
| Coaxial Cable                         | Mirco-COAX UTIFLEX ve       | LA2-C125-8000 | EMC2239       | 2024-12-04 | 2026-12-03   |
| Test Software E3                      | Audix                       | Ver.6.191211  | GZE100-81     | N/A        | N/A          |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch (EMC Laboratory)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com

| Field Strength of the Fundamental Signal (15.231(b)) |                             |               |               |            |              |
|------------------------------------------------------|-----------------------------|---------------|---------------|------------|--------------|
| Equipment                                            | Manufacturer                | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| 966 Anechoic Chamber                                 | Shenzhen C.R.T              | CRTSGSSAC966  | EMC2230       | 2025-03-22 | 2028-03-21   |
| EMI Test Receiver(1Hz-8GHz)                          | Rohde & Schwarz             | ESW8          | EMC2229       | 2024-12-03 | 2025-12-02   |
| Amplifier(9k-1000MHz)                                | SONOMA                      | 310           | EMC2237       | 2024-12-03 | 2025-12-02   |
| Trilog Broadband Antenna (25MHz-2GHz)                | Schwarzbeck Mess-Elektronik | VULB 9168     | EMC2238       | 2025-03-24 | 2027-03-23   |
| Coaxial Cable                                        | Mirco-COAX UTIFLEX ve       | LA2-C125-8000 | EMC2239       | 2024-12-04 | 2026-12-03   |
| Test Software E3                                     | Audix                       | Ver.6.191211  | GZE100-81     | N/A        | N/A          |

| Radiated Emissions above 1GHz    |                             |               |               |            |              |
|----------------------------------|-----------------------------|---------------|---------------|------------|--------------|
| Equipment                        | Manufacturer                | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| 1-26.5 GHz Pre-Amplifier         | Agilent                     | 8449B         | EMC0521       | 2025-08-11 | 2026-08-10   |
| EMI Test Receiver (10Hz-26.5GHz) | Rohde & Schwarz             | ESIB26        | EMC0522       | 2025-08-11 | 2026-08-10   |
| Chamber cable (Above 1GHz)       | Scoflex                     | KMKM-8.0m     | EMC0545       | 2024-08-19 | 2026-08-18   |
| Horn Antenna (1-18GHz)           | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120D    | EMC2026       | 2025-05-13 | 2027-05-12   |
| 966 Anechoic Chamber             | C.R.T                       | 9m x 6m x 6m  | EMC2142       | 2023-12-23 | 2026-12-22   |
| Test Software E3                 | Audix                       | Ver.6.120110a | GZE100-61     | N/A        | N/A          |

| General used equipment |              |          |              |            |              |
|------------------------|--------------|----------|--------------|------------|--------------|
| Equipment              | Manufacturer | Model No | Inventory No | Cal Date   | Cal Due Date |
| DMM                    | Fluke        | 73       | EMC0006      | 2025-06-03 | 2026-06-02   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch (Inspection & Testing Laboratory)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

#### 6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

Antenna location: Refer to Internal photos

## 7 Radio Spectrum Matter Test Results

### 7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.231(c)

Test Method: ANSI C63.10 (2020) Section 6.9

Limit:

| Frequency range(MHz) | Limit                                       |
|----------------------|---------------------------------------------|
| 70-900               | No wider than 0.25% of the center frequency |
| Above 900            | No wider than 0.5% of the center frequency  |

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.0 °C

Humidity: 67.5 % RH

Atmospheric Pressure: 1010 mbar


#### 7.1.2 Test Mode Description

Pre-scan / Mode Description

Final test Code

**Final test** 10 TX mode\_Keep the EUT in continuously transmitting mode.


#### 7.1.3 Test Setup Diagram

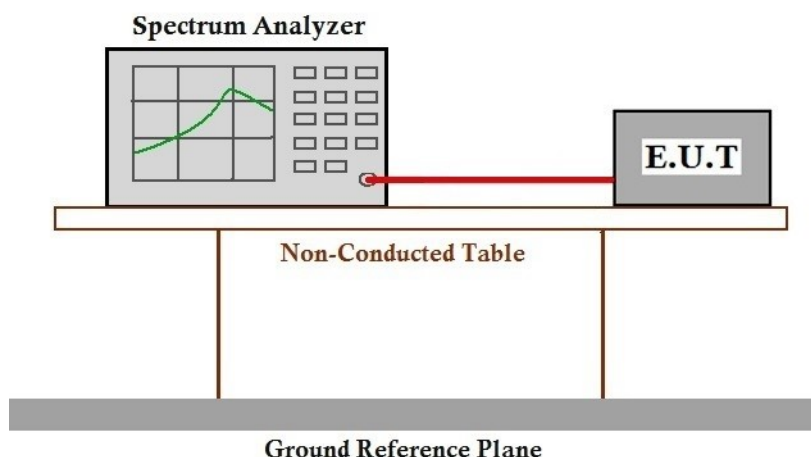



### 7.1.4 Measurement Procedure and Data

Test Mode: 10

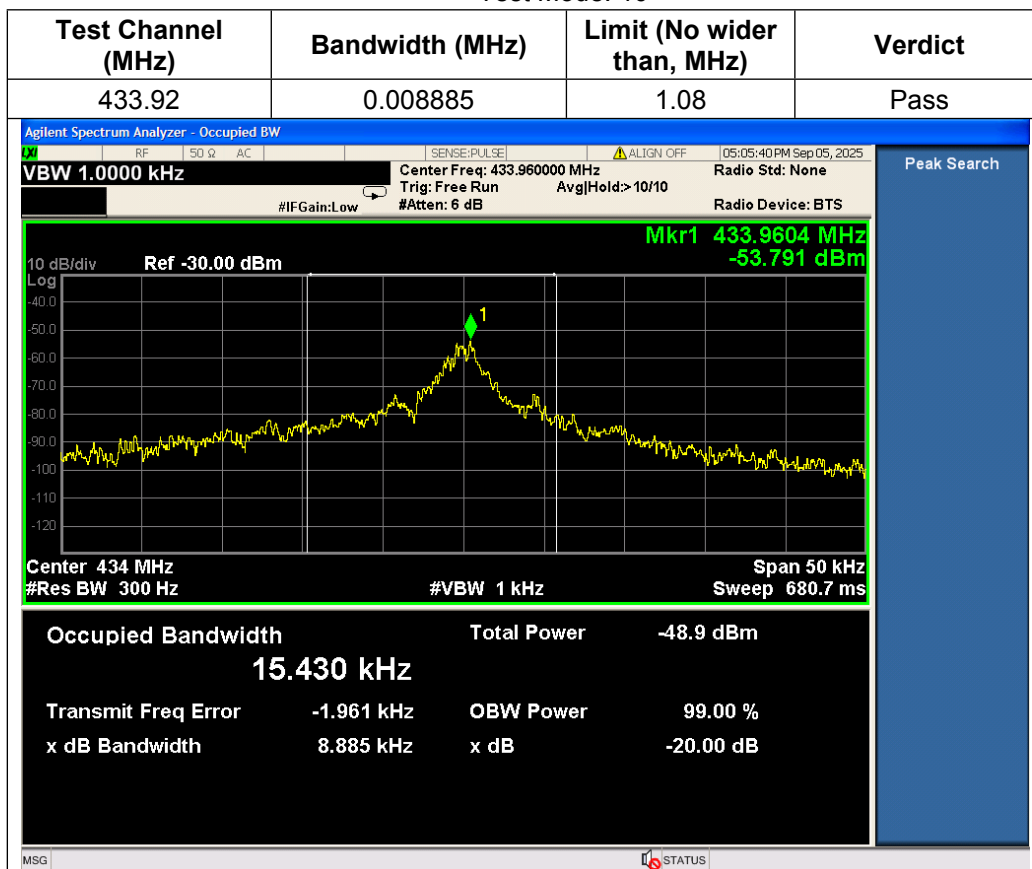



### 7.2 Dwell Time (15.231(a1))

Test Requirement 47 CFR Part 15, Subpart C 15.231(a1)

Test Method: ANSI C63.10 (2020) Section 7.8.4

Limit:

| Device type                                                                                                  | Limit                                                                                                |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Manually operated transmitter                                                                                | The switch automatically deactivate the transmitter within not more than 5 seconds of being released |
| Automatically activated transmitter                                                                          | Cease transmission within 5 seconds after activation                                                 |
| Periodic transmissions to determine system integrity of transmitters used in security or safety applications | The total transmission time does not exceed 2 seconds per hour                                       |

#### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.0 °C


Humidity: 67.5 % RH

Atmospheric Pressure: 1010 mbar

#### 7.2.2 Test Mode Description


| Pre-scan /        | Mode | Description                                             |
|-------------------|------|---------------------------------------------------------|
| Final test        | Code |                                                         |
| <b>Final test</b> | 10   | TX mode_Keep the EUT in continuously transmitting mode. |

#### 7.2.3 Test Setup Diagram

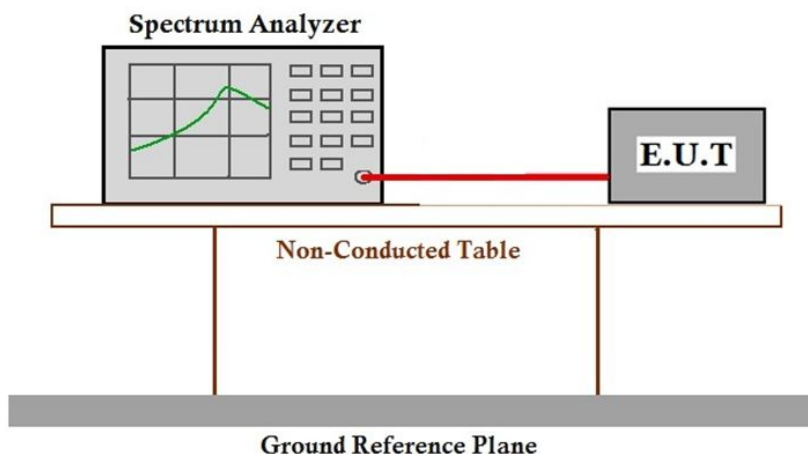

### 7.2.4 Measurement Procedure and Data

Test Mode: 10

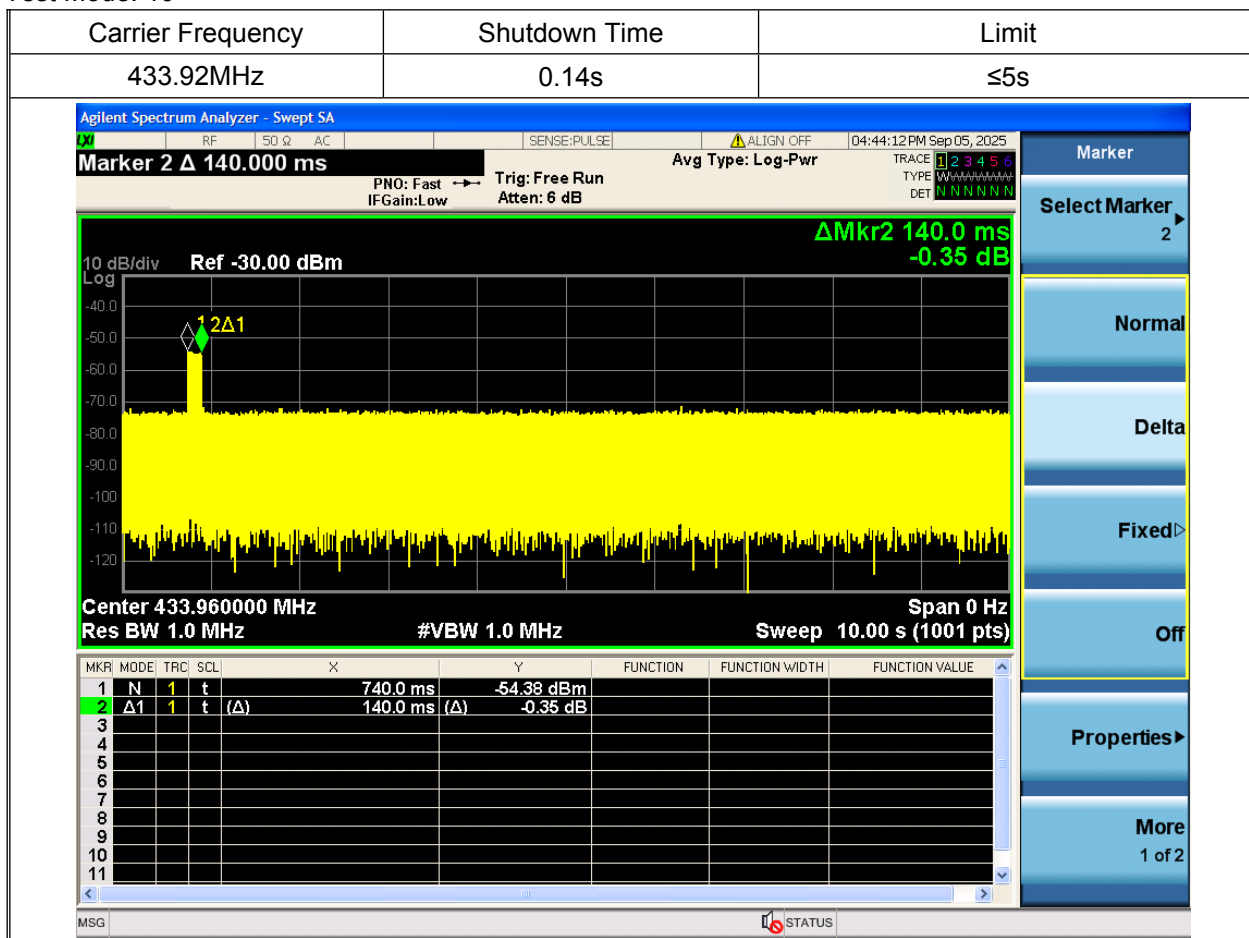

### 7.3 Radiated Emissions below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Test Distance: 3 m

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance(meters) |
|-----------------|-----------------------------------|------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                          |
| 0.490-1.705     | 24000/F(kHz)                      | 30                           |
| 1.705-30.0      | 30                                | 30                           |
| 30-88           | 100                               | 3                            |
| 88-216          | 150                               | 3                            |
| 216-960         | 200                               | 3                            |
| 960-1000        | 500                               | 3                            |

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 56.8 % RH

Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

| Pre-scan / | Mode | Description                                             |
|------------|------|---------------------------------------------------------|
| Final test | Code |                                                         |
| Final test | 10   | TX mode_Keep the EUT in continuously transmitting mode. |

#### 7.3.3 Test Setup Diagram

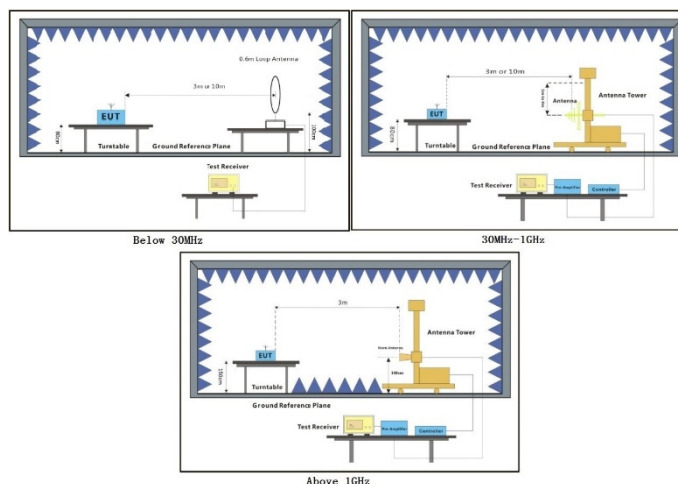

## 7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 1GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.





Test Mode: 10; Polarity: Horizontal

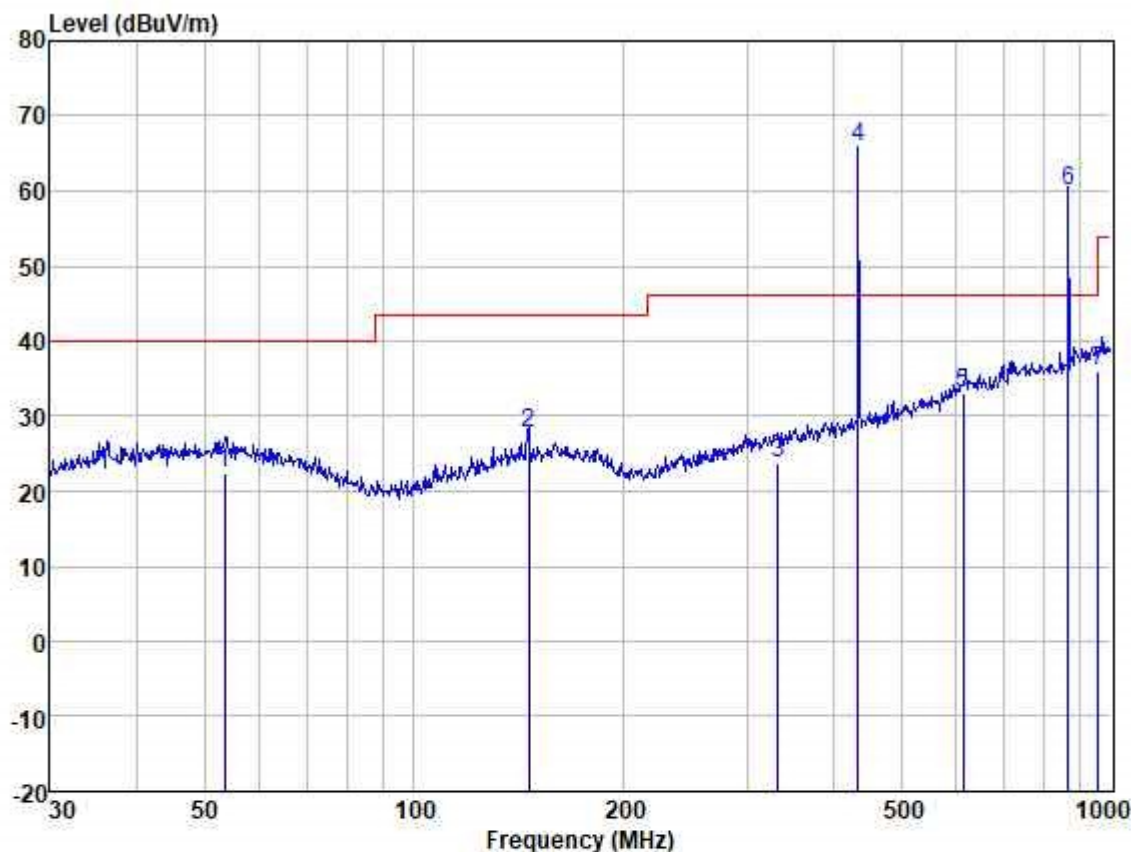


Site : SGS  
Model :  
Power :  
Test Mode : TX

|   | Freq    | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Measured Level | Limit Line | Over Limit | Pol/Phase  | Remark |
|---|---------|------------|----------------|------------|---------------|----------------|------------|------------|------------|--------|
|   | MHz     | dBuV       | dB/m           | dB         | dB            | dBuV/m         | dBuV/m     | dB         |            |        |
| 1 | 53.505  | 35.99      | 13.90          | 0.49       | 27.95         | 22.43          | 40.00      | -17.57     | HORIZONTAL | QP     |
| 2 | 145.861 | 41.32      | 13.31          | 0.81       | 27.73         | 27.71          | 43.52      | -15.81     | HORIZONTAL | QP     |
| 3 | 332.519 | 35.50      | 14.27          | 1.23       | 27.29         | 23.71          | 46.02      | -22.31     | HORIZONTAL | QP     |
| 4 | 434.000 | 76.03      | 16.57          | 1.41       | 28.25         | 65.76          | 80.83      | -15.07     | HORIZONTAL | QP     |
| 5 | 614.000 | 39.89      | 20.09          | 1.68       | 28.46         | 33.20          | 46.02      | -12.82     | HORIZONTAL | QP     |
| 6 | 868.000 | 63.83      | 22.27          | 2.02       | 28.18         | 59.94          | 60.83      | -0.89      | HORIZONTAL | QP     |
| 7 | 960.000 | 37.26      | 24.41          | 2.11       | 27.76         | 36.02          | 46.02      | -10.00     | HORIZONTAL | QP     |



Test Mode: 10; Polarity: Vertical

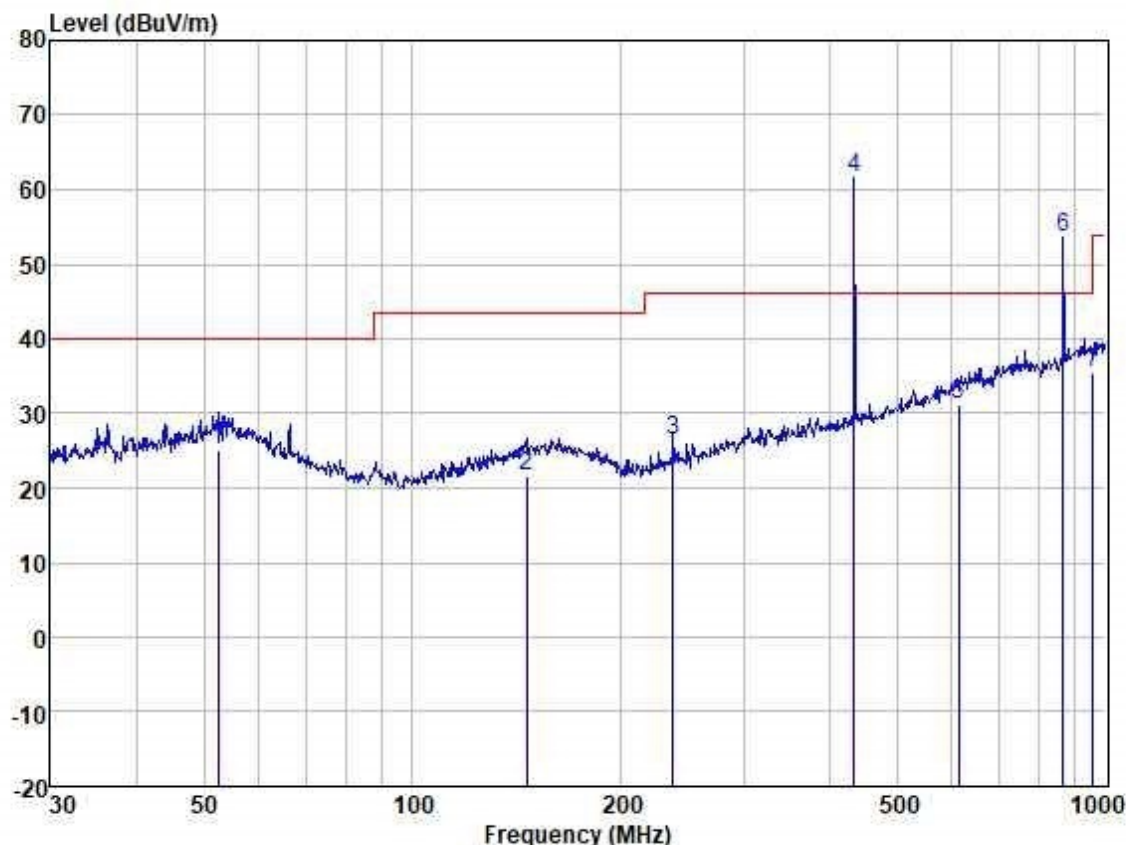

Site : SGS  
Model :  
Power :  
Test Mode : TX

|   | Freq    | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|---------|------------|----------------|------------|---------------------|----------------|------------|------------|-----------|--------|
|   | MHz     | dBuV       | dB/m           | dB         | dB                  | dBuV/m         | dBuV/m     | dB         |           |        |
| 1 | 52.391  | 38.66      | 13.93          | 0.48       | 27.95               | 25.12          | 40.00      | -14.88     | VERTICAL  | QP     |
| 2 | 145.861 | 35.26      | 13.31          | 0.81       | 27.73               | 21.65          | 43.52      | -21.87     | VERTICAL  | QP     |
| 3 | 237.476 | 41.33      | 11.45          | 1.04       | 27.30               | 26.52          | 46.02      | -19.50     | VERTICAL  | QP     |
| 4 | 434.000 | 71.88      | 16.57          | 1.41       | 28.25               | 61.61          | 80.83      | -19.22     | VERTICAL  | QP     |
| 5 | 614.000 | 37.79      | 20.09          | 1.68       | 28.46               | 31.10          | 46.02      | -14.92     | VERTICAL  | QP     |
| 6 | 868.000 | 57.44      | 22.27          | 2.02       | 28.18               | 53.55          | 60.83      | -7.28      | VERTICAL  | QP     |
| 7 | 960.000 | 36.66      | 24.41          | 2.11       | 27.76               | 35.42          | 46.02      | -10.60     | VERTICAL  | QP     |



## 7.4 Field Strength of the Fundamental Signal (15.231(b))

Test Requirement 47 CFR Part 15, Subpart C 15.231(b)

Test Method: ANSI C63.10 (2020) Section 6.5

Limit:

| Fundamental Frequency MHz | Field Strength of Fundamental (μV/m @ 3 m)             | Field Strength of Harmonics and Spurious Emissions (μV/m @ 3 m) |
|---------------------------|--------------------------------------------------------|-----------------------------------------------------------------|
| 40.66 to 40.70            | 2,250                                                  | 225                                                             |
| 70 to 130                 | 1,250                                                  | 125                                                             |
| 130 to 174                | **1,250 to 3,750                                       | **125 to 375                                                    |
| 174 to 260                | 3,750                                                  | 375                                                             |
| 260 to 470                | **3,750 to 12,500                                      | **375 to 1,250                                                  |
| Above 470                 | 12,500                                                 | 1,250                                                           |
| <b>Detector:</b>          | Peak for pre-scan                                      |                                                                 |
|                           | QP for 30MHz to 1000 MHz: 120 kHz resolution bandwidth |                                                                 |
|                           | Peak for Above 1 GHz: 1 MHz resolution bandwidth       |                                                                 |

\*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

for the band 130-174 MHz, uV/m at 3 meters = 56.81818(F) - 6136.3636;

for the band 260-470 MHz, uV/m at 3 meters = 41.6667(F) - 7083.3333.]

The fundamental frequency of the EUT is 433.92 MHz

The limit for average or QP field strength dBuV/m for the fundamental emission= 80.83 dBuV/m

No fundamental is allowed in the restricted bands.

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.7 °C

Humidity: 55.2 % RH

Atmospheric Pressure: 1006 mbar


### 7.4.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                             |
|-----------------------|-----------|---------------------------------------------------------|
| <b>Final test</b>     | 10        | TX mode_Keep the EUT in continuously transmitting mode. |





### 7.4.3 Test Setup Diagram

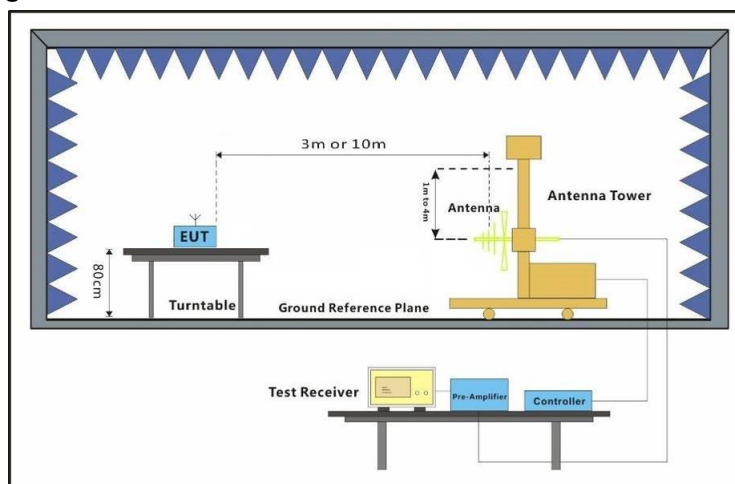

### 7.4.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Please refer to the point 4 in the test data of section 7.3.4 for details.



## 7.5 Radiated Emissions above 1GHz

Test Requirement 47 CFR Part 15C Section 15.231(b) and 15.209

Test Method: ANSI C63.10 (2020) Section 6.6

Limit:

For Restricted bands

| Frequency(MHz)                                                                                                                                                                                                                                                            | Field strength(microvolts/meter) | Measurement distance(meters) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------------------|
| Above 960                                                                                                                                                                                                                                                                 | 500                              | 3                            |
| Remark: Radiated emission limits in this band is based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. |                                  |                              |

For Other bands

| Fundamental Frequency MHz | Field Strength of Fundamental ( $\mu\text{V/m}$ @ 3 m) | Field strength of spurious emissions ( $\mu\text{V/m}$ @ 3 m) |
|---------------------------|--------------------------------------------------------|---------------------------------------------------------------|
| Above 470                 | 12,500                                                 | 1,250                                                         |
| <b>Detector:</b>          | Peak for pre-scan                                      |                                                               |
|                           | Peak for Above 1 GHz: 1 MHz resolution bandwidth       |                                                               |

### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.1 °C

Humidity: 57.5 % RH

Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                             |
|-----------------------|-----------|---------------------------------------------------------|
| <b>Final test</b>     | 10        | TX mode_Keep the EUT in continuously transmitting mode. |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663  
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn  
t (86-20) 82155555 sgs.china@sgs.com

### 7.5.3 Test Setup Diagram

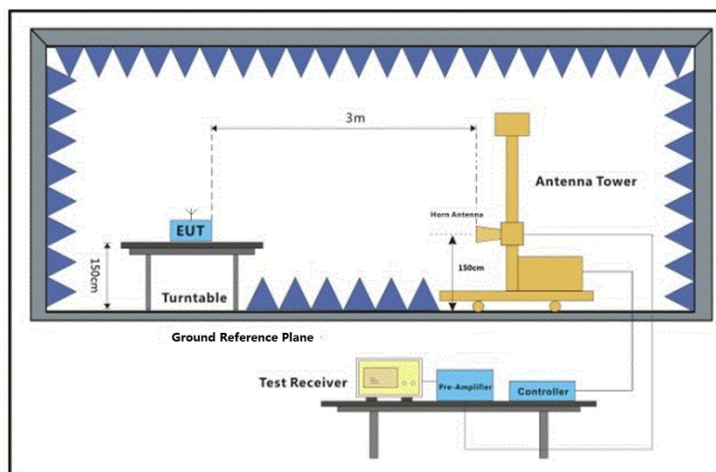

### 7.5.4 Measurement Procedure and Data


- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Test Mode: 10; Polarity: Vertical

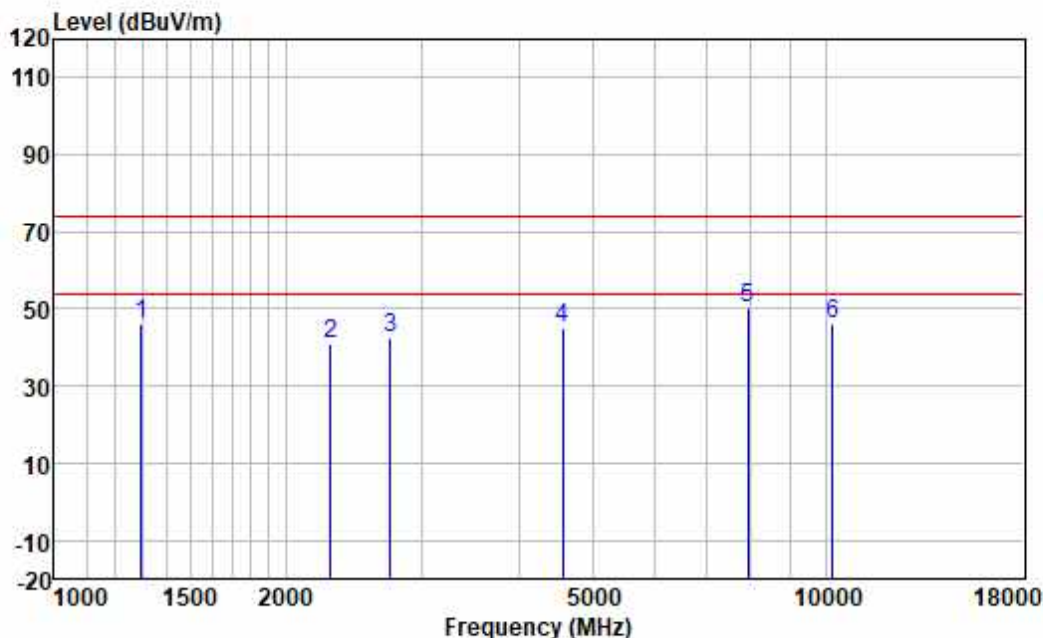


|   | Freq      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|-----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   |           | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz       | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1297.103  | 56.66       | 25.59  | 2.58   | 38.60  | 46.23  | 74.00  | -27.77 | VERTICAL  | Peak   |
| 2 | 2279.044  | 48.00       | 27.40  | 3.37   | 37.78  | 40.99  | 74.00  | -33.01 | VERTICAL  | Peak   |
| 3 | 2726.337  | 48.64       | 28.20  | 3.64   | 37.72  | 42.76  | 74.00  | -31.24 | VERTICAL  | Peak   |
| 4 | 4560.559  | 46.66       | 30.99  | 4.65   | 37.43  | 44.87  | 74.00  | -29.13 | VERTICAL  | Peak   |
| 5 | 7943.838  | 43.88       | 37.19  | 6.19   | 37.20  | 50.06  | 74.00  | -23.94 | VERTICAL  | Peak   |
| 6 | 10215.020 | 36.52       | 39.53  | 7.23   | 37.09  | 46.19  | 74.00  | -27.81 | VERTICAL  | Peak   |





Test Mode: 10; Polarity: Horizontal

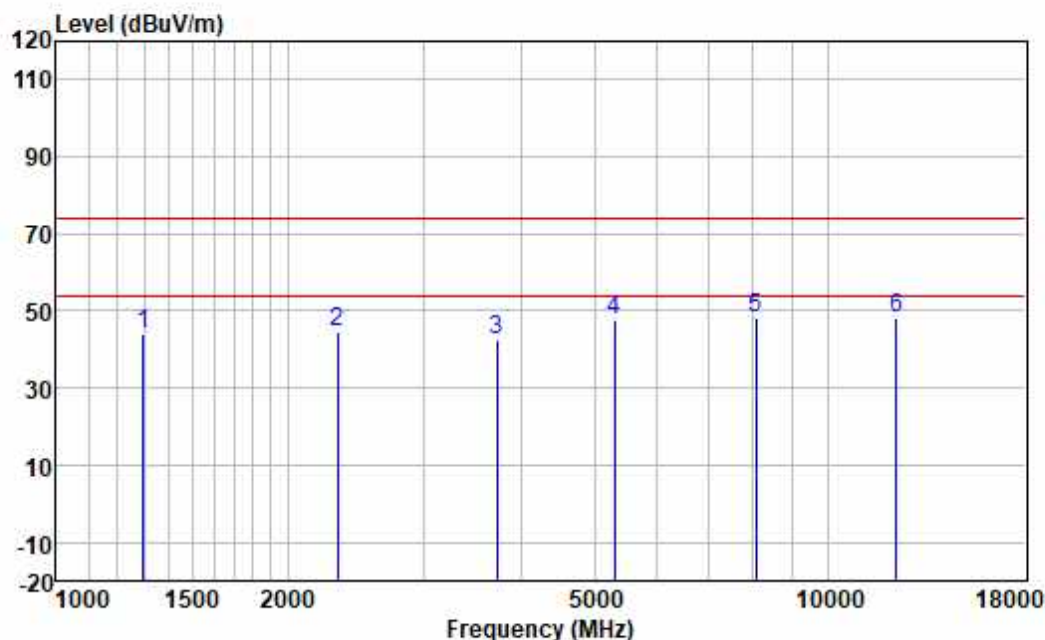

|   | Freq      | ReadAntenna | Cable | Preamp | Limit | Over   |        |           |                 |
|---|-----------|-------------|-------|--------|-------|--------|--------|-----------|-----------------|
|   | MHz       | Level       | Loss  | Factor | Level | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV        | dB/m  | dB     | dB    | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1297.103  | 54.43       | 25.59 | 2.58   | 38.60 | 44.00  | 74.00  | -30.00    | HORIZONTAL Peak |
| 2 | 2318.912  | 51.43       | 27.50 | 3.40   | 37.77 | 44.56  | 74.00  | -29.44    | HORIZONTAL Peak |
| 3 | 3725.195  | 46.30       | 29.44 | 4.28   | 37.52 | 42.50  | 74.00  | -31.50    | HORIZONTAL Peak |
| 4 | 5300.200  | 48.05       | 31.98 | 5.07   | 37.19 | 47.91  | 74.00  | -26.09    | HORIZONTAL Peak |
| 5 | 8082.804  | 41.87       | 37.17 | 6.24   | 37.20 | 48.08  | 74.00  | -25.92    | HORIZONTAL Peak |
| 6 | 12290.700 | 37.74       | 39.39 | 7.86   | 36.88 | 48.11  | 74.00  | -25.89    | HORIZONTAL Peak |





## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR250800129302



## 9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2508001293LM

- End of the Report -

