

RF TEST REPORT

For

SHENZHEN HAIJIXING TECHNOLOGY CO., LTD

Product Name: Sports cam

Test Model(s): YD01

Report Reference No. : DACE260729014RL001

FCC ID : 2A6Q7-YD01

Applicant's Name : SHENZHEN HAIJIXING TECHNOLOGY CO., LTD

Address : No. 105, Tianwan Road, Tianliao Community, Yutang Subdistrict,
Guangming District, Shenzhen City, Guangdong Province, China

Testing Laboratory : Shenzhen DACE Testing Technology Co., Ltd.

Address : 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park,
Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen,
Guangdong, China

Test Specification Standard : 47 CFR Part 15.247


Date of Receipt : July 29, 2026

Date of Test : July 29, 2026 to August 6, 2026

Date of Issue : August 6, 2026

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample



Apply for company information

Applicant's Name	:	SHENZHEN HAIJIXING TECHNOLOGY CO., LTD
Address	:	No. 105, Tianwan Road, Tianliao Community, Yutang Subdistrict, Guangming District, Shenzhen City, Guangdong Province, China
Product Name	:	Sports cam
Test Model(s)	:	YD01
Test Specification Standard(s)	:	47 CFR Part 15.247

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

Lucy Mo

Lucy Mo / Test Engineer

August 6, 2026

Supervised by:

Arron Liu

Arron Liu / Project Engineer

August 6, 2026

Approved by:

Tom Chen

Tom Chen / Manager

August 6, 2026

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE260729014RL001	August 6, 2026

CONTENTS

1	TEST SUMMARY	6
1.1	TEST STANDARDS	6
1.2	SUMMARY OF TEST RESULT	6
2	GENERAL INFORMATION	8
2.1	CLIENT INFORMATION	8
2.2	DESCRIPTION OF DEVICE (EUT)	8
2.3	DESCRIPTION OF TEST MODES	8
2.4	DESCRIPTION OF SUPPORT UNITS	8
2.5	OPERATION FREQUENCY EACH OF CHANNEL	9
2.6	EQUIPMENTS USED DURING THE TEST	10
2.7	STATEMENT OF THE MEASUREMENT UNCERTAINTY	12
3	EVALUATION RESULTS (EVALUATION)	13
3.1	ANTENNA REQUIREMENT	13
3.1.1	Conclusion:	13
4	RADIO SPECTRUM MATTER TEST RESULTS (RF)	14
4.1	CONDUCTED EMISSION AT AC POWER LINE	14
4.1.1	E.U.T. Operation:	14
4.1.2	Test Setup Diagram:	14
4.1.3	Test Data:	15
4.2	6DB BANDWIDTH	17
4.2.1	E.U.T. Operation:	17
4.2.2	Test Setup Diagram:	17
4.2.3	Test Data:	18
4.3	MAXIMUM CONDUCTED OUTPUT POWER	19
4.3.1	E.U.T. Operation:	19
4.3.2	Test Setup Diagram:	19
4.3.3	Test Data:	19
4.4	POWER SPECTRAL DENSITY	20
4.4.1	E.U.T. Operation:	20
4.4.2	Test Setup Diagram:	20
4.4.3	Test Data:	20
4.5	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	21
4.5.1	E.U.T. Operation:	21
4.5.2	Test Setup Diagram:	21
4.5.3	Test Data:	21
4.6	BAND EDGE EMISSIONS (RADIATED)	22
4.6.1	E.U.T. Operation:	22
4.6.2	Test Setup Diagram:	22
4.6.3	Test Data:	23
4.7	EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz)	27
4.7.1	E.U.T. Operation:	27
4.7.2	Test Setup Diagram:	27
4.7.3	Test Data:	29
4.8	EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz)	31
4.8.1	E.U.T. Operation:	31
4.8.2	Test Setup Diagram:	32

	4.8.3 Test Data:	33
5	TEST SETUP PHOTOS	39
6	PHOTOS OF THE EUT	41
	APPENDIX	42
	1. -6dB Bandwidth	43
	2. 99% Occupied Bandwidth	53
	3. Duty Cycle	63
	4. MAX. Output Power	73
	5. Power Spectral Density	74
	6. Bandedge	84
	7. Spurious Emission	97

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Antenna requirement	47 CFR Part 15.247	---	47 CFR 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.2	47 CFR 15.207(a)	Pass
6dB Bandwidth	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 11.9.2 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.10 KDB 558074 D01	47 CFR 15.247(d), 15.209, 15.205	Pass

		15.247 Meas Guidance v05r02		
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a- 2024 + Errata to C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	47 CFR Part 15.247	ANSI C63.10-2020 + Cor. 1-2023+C63.10a- 2024 + Errata to C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : SHENZHEN HAIJIXING TECHNOLOGY CO., LTD
Address : No. 105, Tianwan Road, Tianliao Community, Yutang Subdistrict, Guangming District, Shenzhen City, Guangdong Province, China

Manufacturer : SHENZHEN HAIJIXING TECHNOLOGY CO., LTD
Address : No. 105, Tianwan Road, Tianliao Community, Yutang Subdistrict, Guangming District, Shenzhen City, Guangdong Province, China

2.2 Description of Device (EUT)

Product Name:	Sports cam
Model/Type reference:	YD01
Trade Mark:	N/A
Power Supply:	DC 5V charging from adapter DC 3.7V by battery
Operation Frequency:	2412-2462MHz
Number of Channels:	802.11b/g/n(HT20)/ax(HE20): 11 Channels; 802.11n(HT40)/ax(HE40): 7 Channels
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax(HE20 and HE40): OFDMA (BPSK, QPSK, 16QAM, 64QAM, 128QAM, 256QAM)
Antenna Type:	FPC Antenna
Antenna Gain:	0.68dBi
Hardware Version:	V1.0
Software Version:	V1.0

2.3 Description of Test Modes

No	Title	Description
TM1	2.4GWIFI TX Mode	Keep the EUT in 802.11b/g/n20/n40/ax20/ax40 transmitting mode at lowest, middle and highest channel.
Test Environment		Normal Voltage(DC): 3.7V

2.4 Description of Support Units

Title	Manufacturer	Model No.	Serial No.
Adapter	PHOTON	ATXC-069AC65B	/

2.5 Operation Frequency each of channel

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2462	10	2457	11	2462	/	/

Note: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	802.11b/g/n(HT20)/ax20(HE20)	802.11n(HT40)/ax40(HE40)
	Frequency (MHz)	Frequency (MHz)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

2.6 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Power absorbing clamp	SCHWARZ BECK	MESS-ELEKTRONIK	/	2026-04-14	2027-04-13
Electric Network	SCHWARZ BECK	CAT5 8158	CAT5 8158#207	2026-04-14	2027-04-13
Cable	SCHWARZ BECK	/	/	2026-04-14	2027-04-13
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Attenuation	561-G071	2025-12-02	2026-12-01
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	1164.6607K03 -102109-MH	2026-04-14	2027-04-13
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2026-04-14	2027-04-13
L.I.S.N	SCHWARZ BECK	NSLK 8126	05055	2026-04-14	2027-04-13
Pulse Limiter	CYBERTEK	EM5010A	/	2026-04-14	2027-04-13
EMI test software	Farad	EZ -EMC	EMEC-3A1.1	/	/

Maximum Conducted Output Power Power Spectral Density Emissions in non-restricted frequency bands 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Control Unit	Tachoy Information Technology(she nzhcn) Co.,Ltd.	TR1029-1	20220428C005	/	/

Band edge emissions (Radiated)
Emissions in frequency bands (below 1GHz)
Emissions in frequency bands (above 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	FA-03A2 RE+	/	/
Positioning Controller	MF	MF-7802	/	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2024-04-26	2027-04-25
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2024-04-26	2027-04-25
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2026-04-14	2027-04-13
Cable(LF)#2	Schwarzbeck	/	/	2026-04-13	2027-04-12
Cable(LF)#1	Schwarzbeck	/	/	2026-04-14	2027-04-13
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2026-04-14	2027-04-13
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2026-04-14	2027-04-13
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2026-04-14	2027-04-13
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2026-04-14	2027-04-13
Wideband radio communication tester	R&S	CMW500	113410	2026-04-14	2027-04-13
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2026-04-14	2027-04-13
Test Receiver	R&S	ESCI 3	1166.5950K03-101431-Jq	2026-04-14	2027-04-13
Horn Antenna	Sunol Sciences	DRH-118	A091114	2026-04-14	2027-04-13
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2026-04-29	2028-04-28

2.7 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	$\pm 3.41\text{dB}$
Occupied Bandwidth	$\pm 3.63\%$
RF conducted power	$\pm 0.733\text{dB}$
RF power density	$\pm 0.234\%$
Conducted Spurious emissions	$\pm 1.98\text{dB}$
Radiated Emission (Above 1GHz)	$\pm 5.46\text{dB}$
Radiated Emission (Below 1GHz)	$\pm 5.79\text{dB}$
Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---

3.1.1 Conclusion:



4 Radio Spectrum Matter Test Results (RF)


4.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.2		
Procedure:	Refer to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

4.1.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23.8 °C	Humidity:	46 %	Atmospheric Pressure:	101.9 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.1.2 Test Setup Diagram:

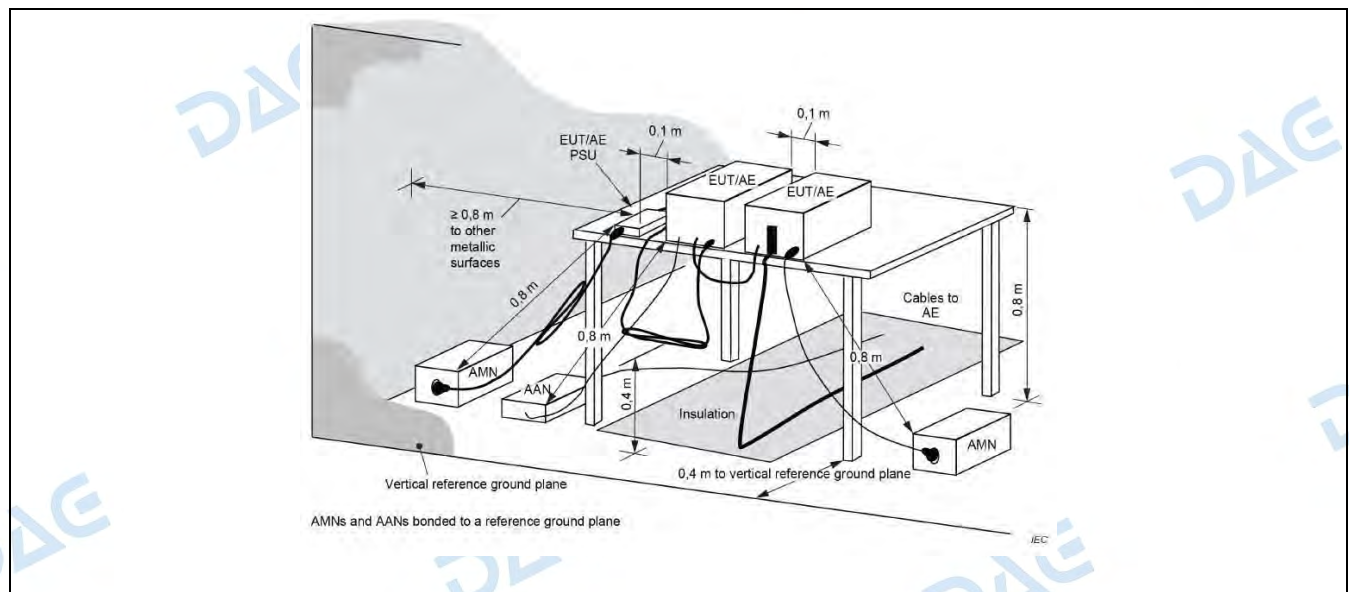


4.1.3 Test Data:

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 20 / CH: L

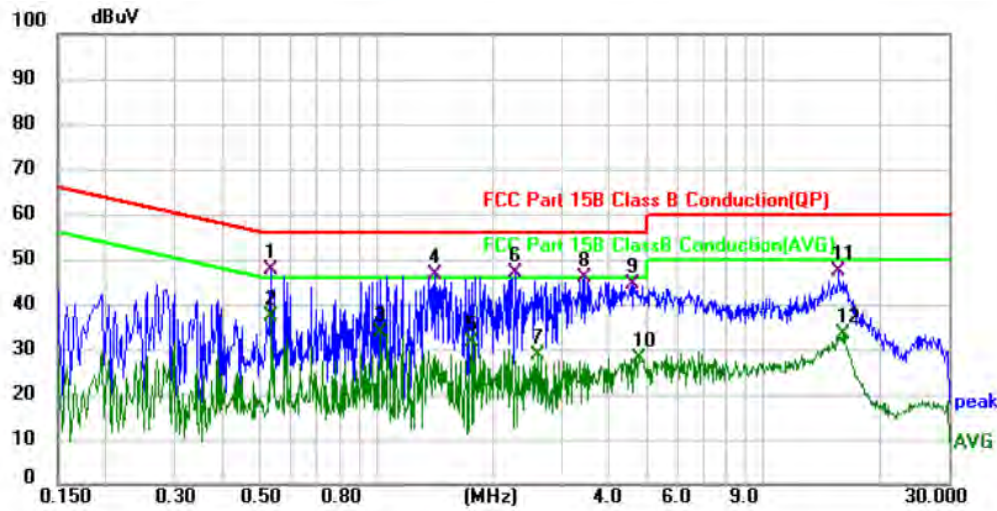

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.5340	37.64	10.09	47.73	56.00	-8.27	QP	
2		0.5340	27.20	10.09	37.29	46.00	-8.71	AVG	
3		1.0220	23.63	10.06	33.69	46.00	-12.31	AVG	
4		1.4180	36.45	10.10	46.55	56.00	-9.45	QP	
5		1.7540	21.36	10.12	31.48	46.00	-14.52	AVG	
6		2.2900	36.83	10.12	46.95	56.00	-9.05	QP	
7		2.6220	18.53	10.12	28.65	46.00	-17.35	AVG	
8		3.4580	35.63	10.15	45.78	56.00	-10.22	QP	
9		4.6100	34.37	10.20	44.57	56.00	-11.43	QP	
10		4.7500	18.01	10.20	28.21	46.00	-17.79	AVG	
11		15.7020	36.75	10.62	47.37	60.00	-12.63	QP	
12		15.9820	22.69	10.62	33.31	50.00	-16.69	AVG	

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: L

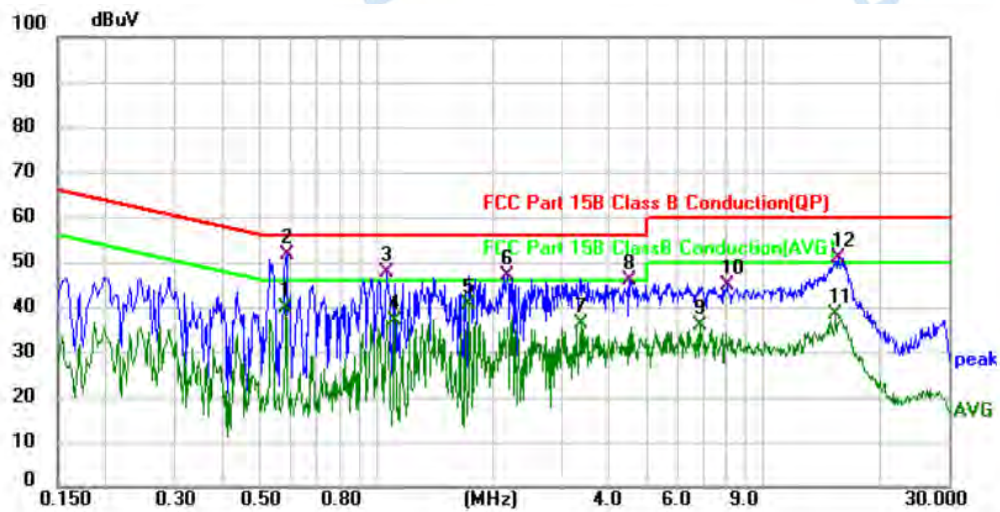

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.5820	29.85	10.07	39.92	46.00	-6.08	AVG	
2	*	0.5860	41.36	10.07	51.43	56.00	-4.57	QP	
3		1.0700	37.46	10.07	47.53	56.00	-8.47	QP	
4		1.1140	26.86	10.08	36.94	46.00	-9.06	AVG	
5		1.7420	30.38	10.11	40.49	46.00	-5.51	AVG	
6		2.1740	36.75	10.13	46.88	56.00	-9.12	QP	
7		3.3860	25.97	10.15	36.12	46.00	-9.88	AVG	
8		4.4899	35.62	10.17	45.79	56.00	-10.21	QP	
9		6.8660	25.80	10.26	36.06	50.00	-13.94	AVG	
10		8.0340	34.19	10.57	44.76	60.00	-15.24	QP	
11		15.3820	27.68	10.59	38.27	50.00	-11.73	AVG	
12		15.5860	40.43	10.59	51.02	60.00	-8.98	QP	

NOTE:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor, Over = Limit - Measurement

4.2 6dB Bandwidth


Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	46 %	Atmospheric Pressure:	101.9 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.2.2 Test Setup Diagram:

--

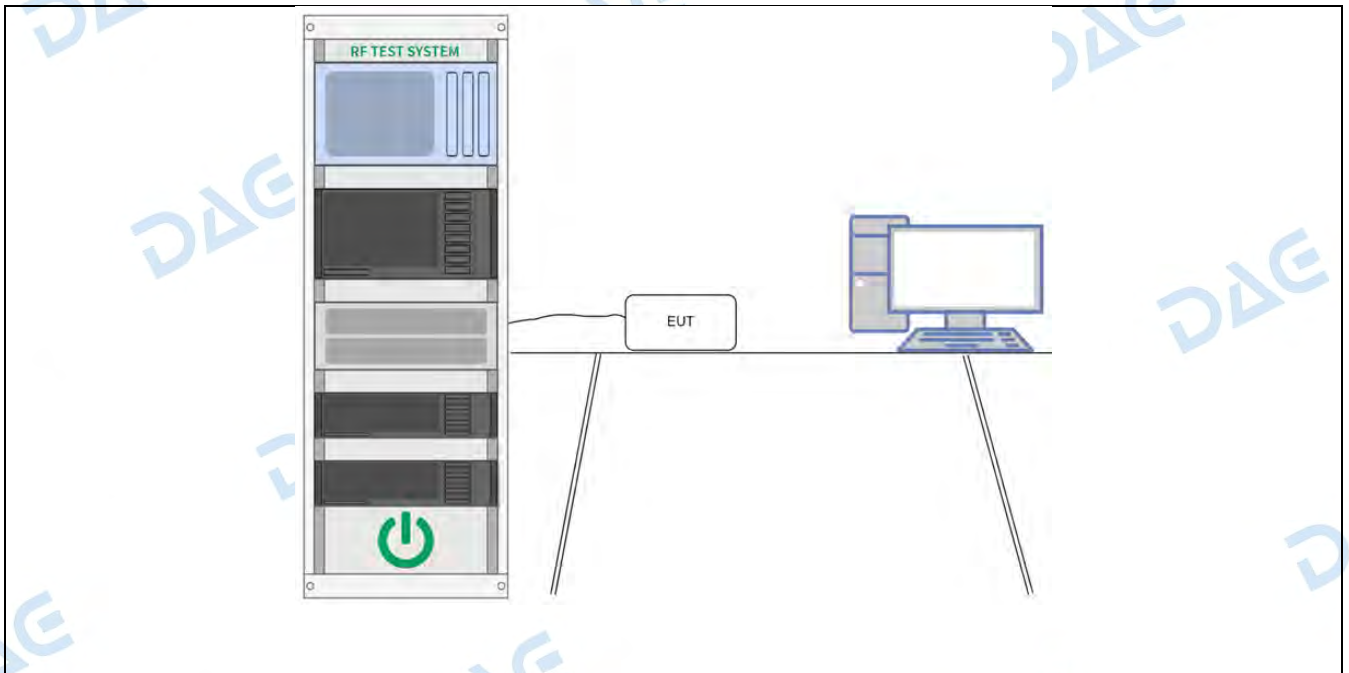

4.2.3 Test Data:

Please Refer to Appendix for Details.


4.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 11.9.2 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.9.2 Maximum conducted (average) output power

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.1 °C	Humidity:	51 %	Atmospheric Pressure:	101.9 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.3.2 Test Setup Diagram:

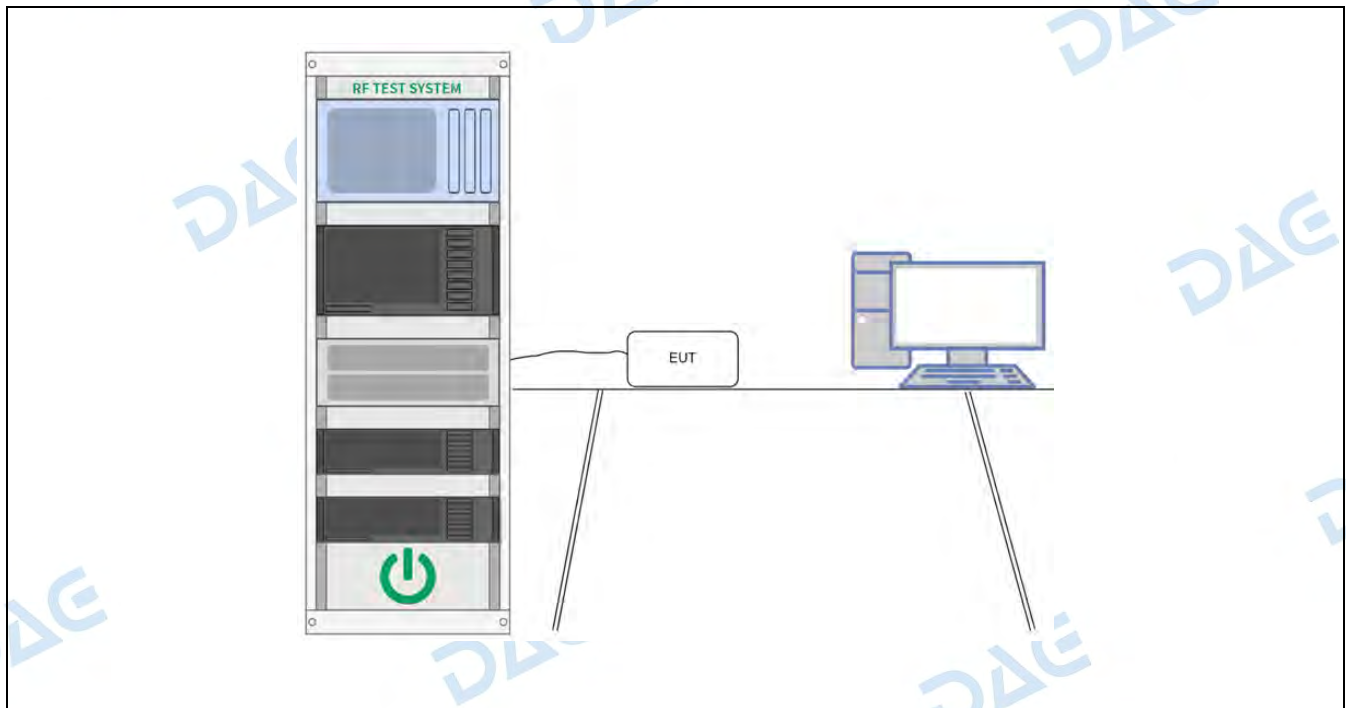

4.3.3 Test Data:

Please Refer to Appendix for Details.


4.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.10, Maximum power spectral density level in the fundamental emission

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.2 °C	Humidity:	50 %	Atmospheric Pressure:	101.9 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.4.2 Test Setup Diagram:

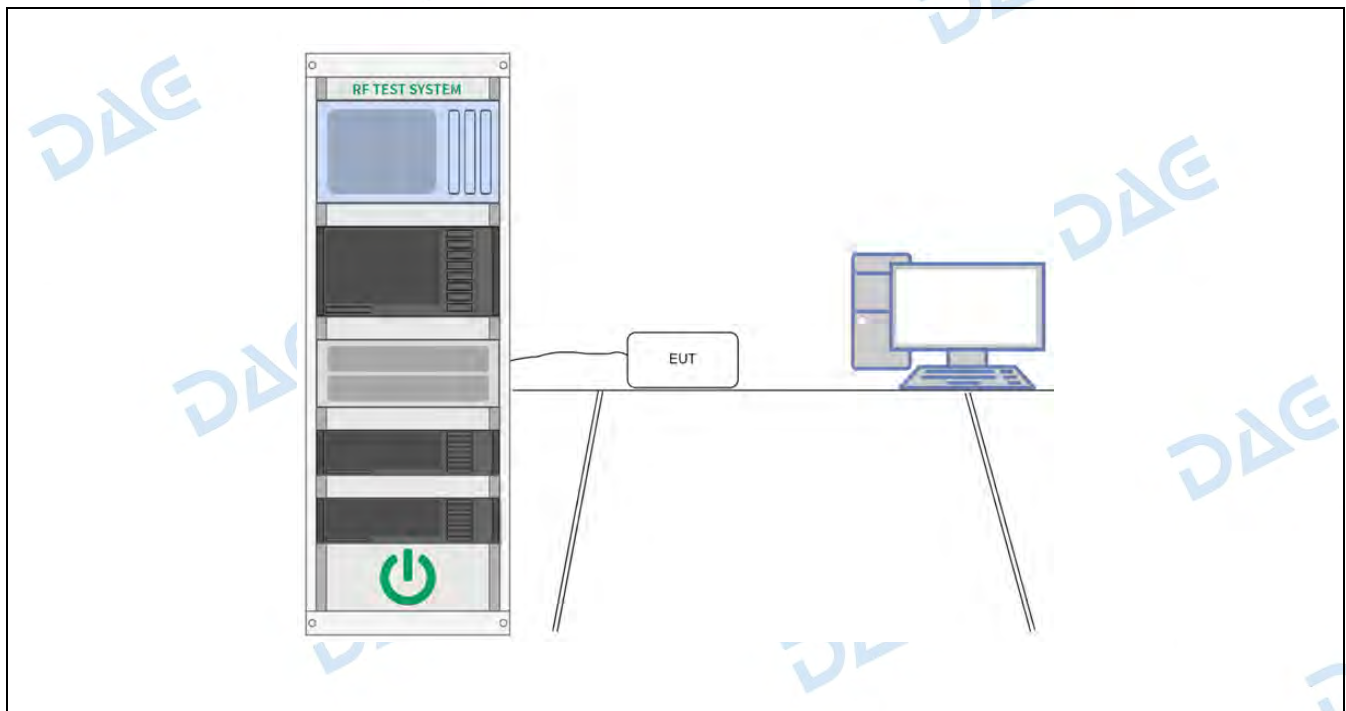

4.4.3 Test Data:

Please Refer to Appendix for Details.


4.5 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Section 11.11.1, Section 11.11.2, Section 11.11.3

4.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	52 %	Atmospheric Pressure:	101.9 kPa
Pretest mode:	TM1				
Final test mode:	TM1				

4.5.2 Test Setup Diagram:

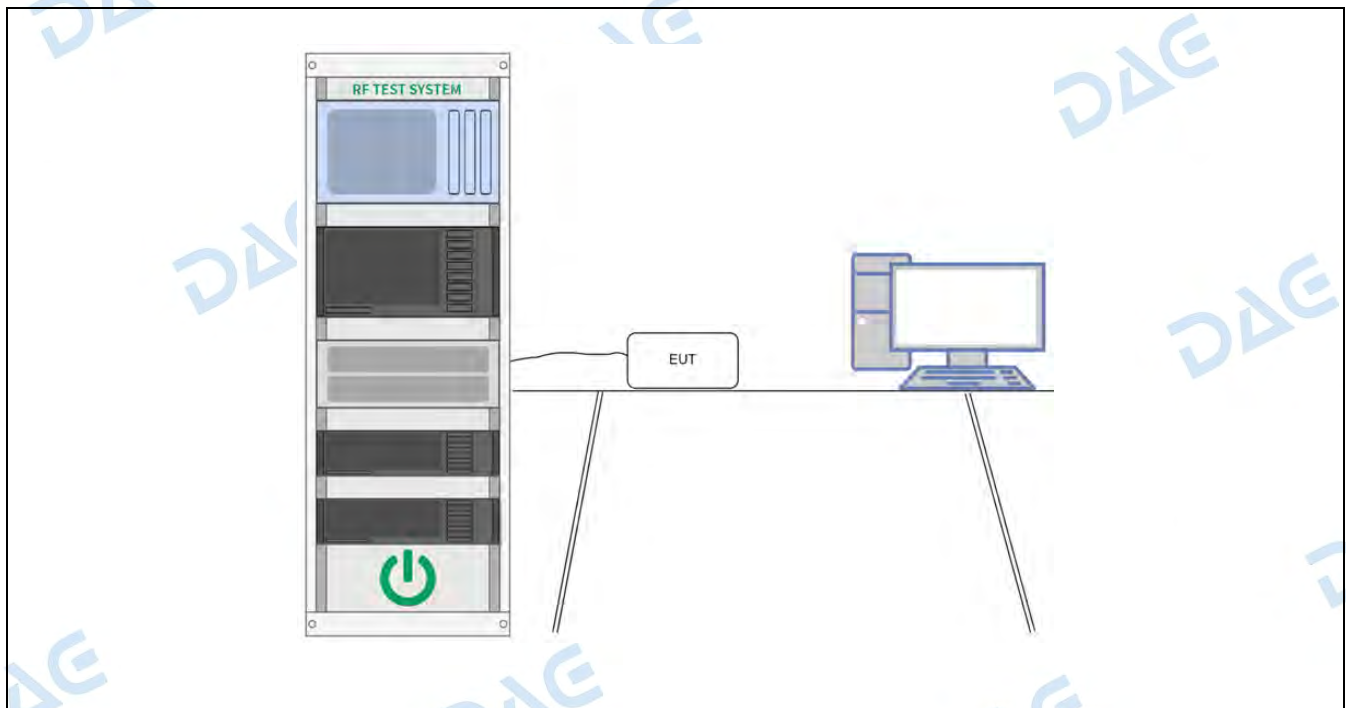

4.5.3 Test Data:

Please Refer to Appendix for Details.


4.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.10.5.2		

4.6.1 E.U.T. Operation:

Operating Environment:			
Temperature:	23.1 °C	Humidity:	47 %
Atmospheric Pressure:	101.9 kPa		
Pretest mode:	TM1		
Final test mode:	TM1		

4.6.2 Test Setup Diagram:

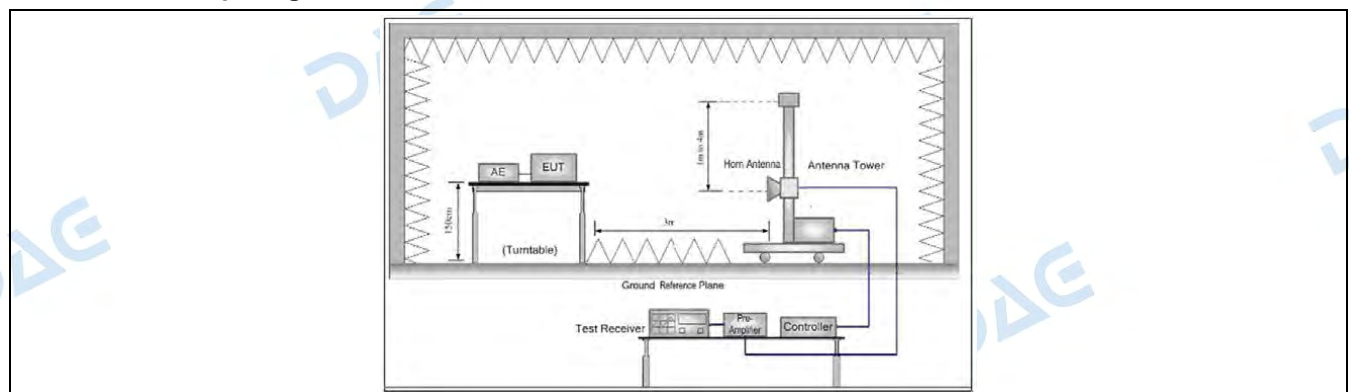


4.6.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	41.90	-6.63	35.27	74.00	-38.73	peak	100		P	
2	2310.000	30.90	-6.63	24.27	54.00	-29.73	AVG	100		P	
3	2390.000	45.60	-6.42	39.18	74.00	-34.82	peak	100		P	
4 *	2390.000	34.81	-6.42	28.39	54.00	-25.61	AVG	100		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

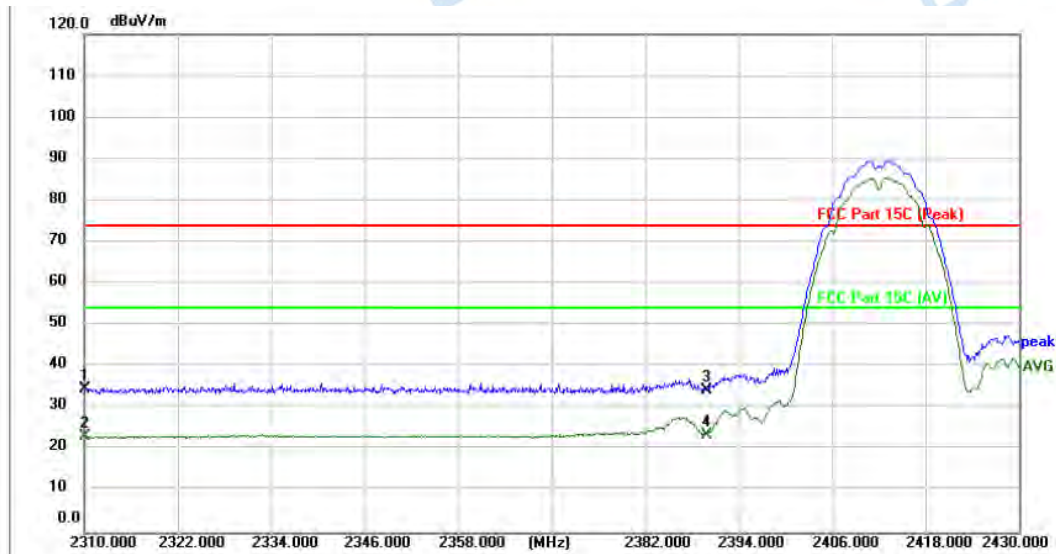


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	41.25	-6.63	34.62	74.00	-39.38	peak			P	
2	2310.000	30.01	-6.63	23.38	54.00	-30.62	AVG			P	
3	2390.000	40.77	-6.42	34.35	74.00	-39.65	peak			P	
4 *	2390.000	29.94	-6.42	23.52	54.00	-30.48	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	44.61	-6.17	38.44	74.00	-35.56	peak	150		P	
2 *	2483.500	34.30	-6.17	28.13	54.00	-25.87	AVG	150		P	
3	2500.000	41.60	-6.13	35.47	74.00	-38.53	peak	150		P	
4	2500.000	30.68	-6.13	24.55	54.00	-29.45	AVG	150		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

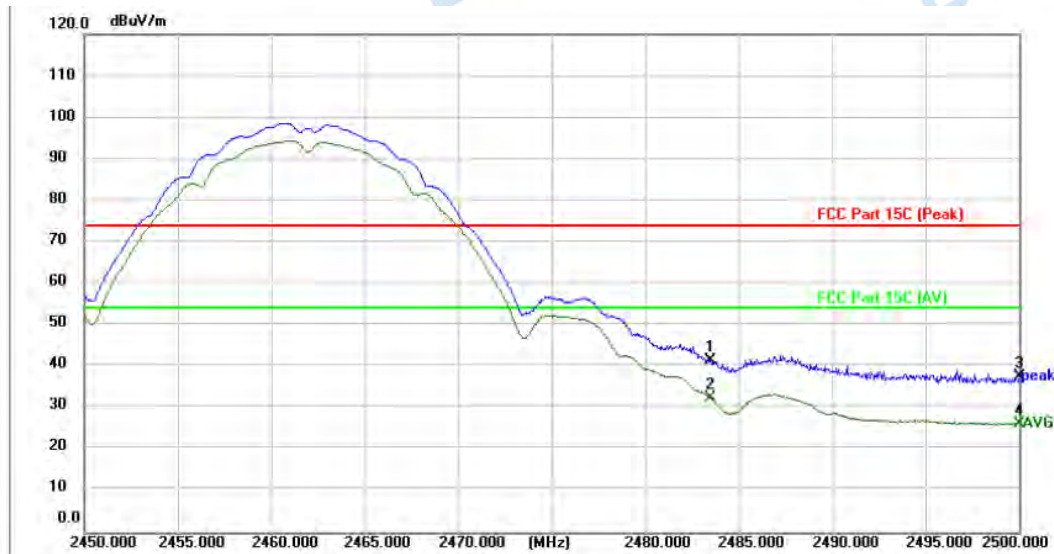

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	47.76	-6.17	41.59	74.00	-32.41	peak	150		P	
2 *	2483.500	38.78	-6.17	32.61	54.00	-21.39	AVG	150		P	
3	2500.000	43.72	-6.13	37.59	74.00	-36.41	peak	150		P	
4	2500.000	32.40	-6.13	26.27	54.00	-27.73	AVG	150		P	

Remark: Margin=Level - Limit, Level=Test receiver reading + correction factor

The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.


4.7 Emissions in frequency bands (below 1GHz)


Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4		

4.7.1 E.U.T. Operation:

Operating Environment:			
Temperature:	23.5 °C	Humidity:	50 %
Atmospheric Pressure:	101.9 kPa		
Pretest mode:	TM1		
Final test mode:	TM1		


4.7.2 Test Setup Diagram:

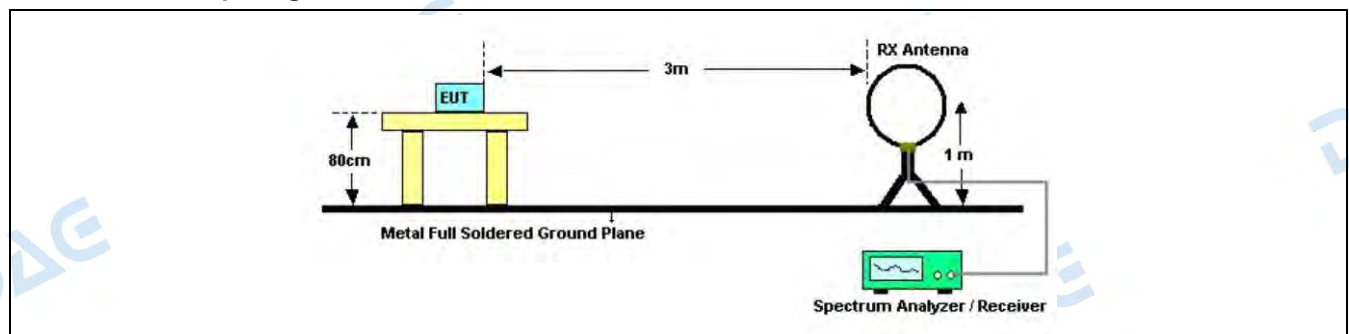

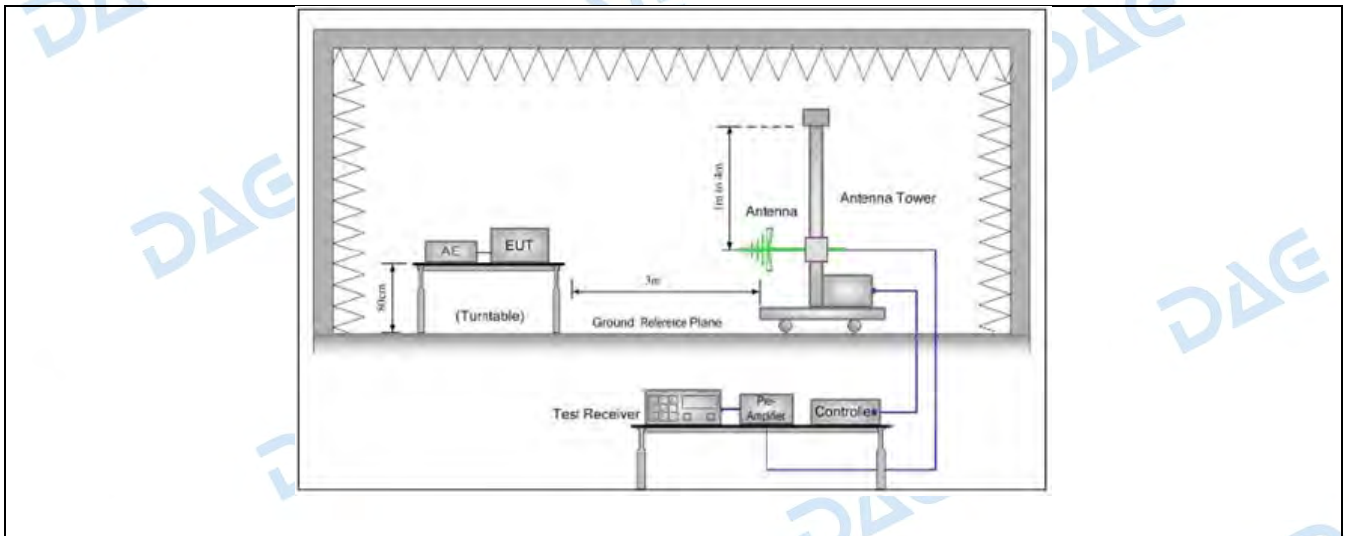


4.7.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

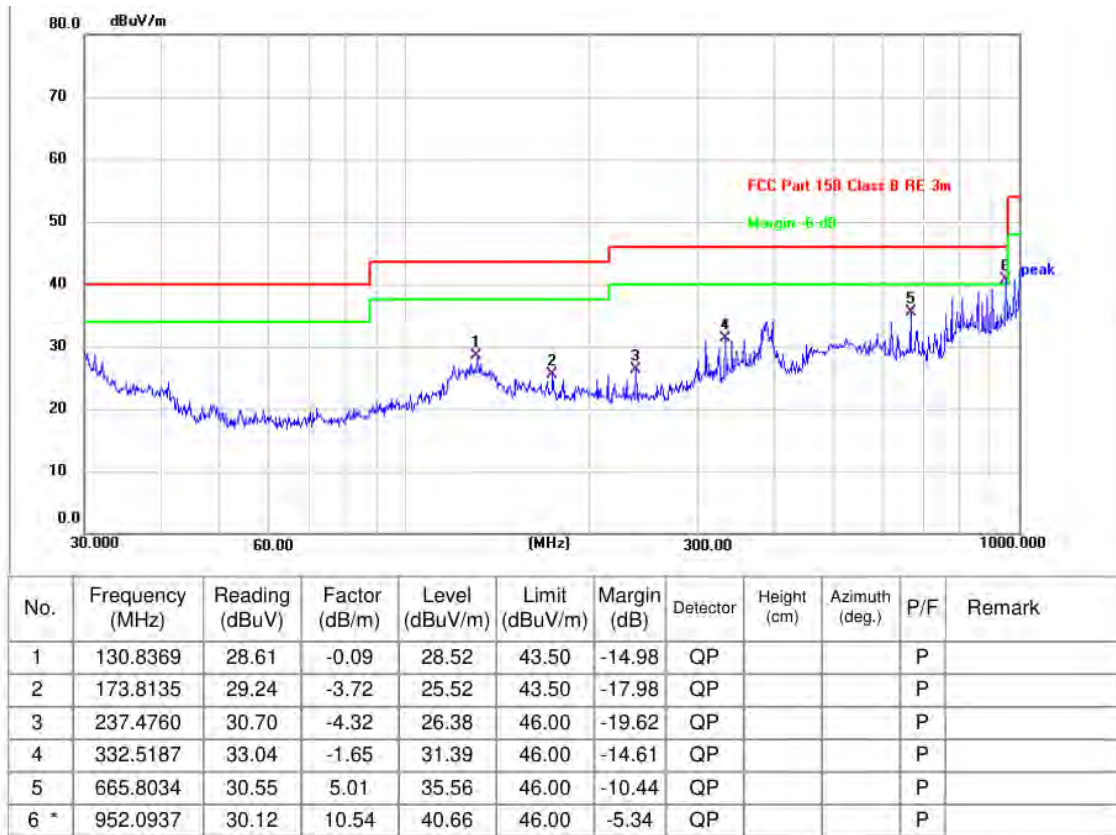

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

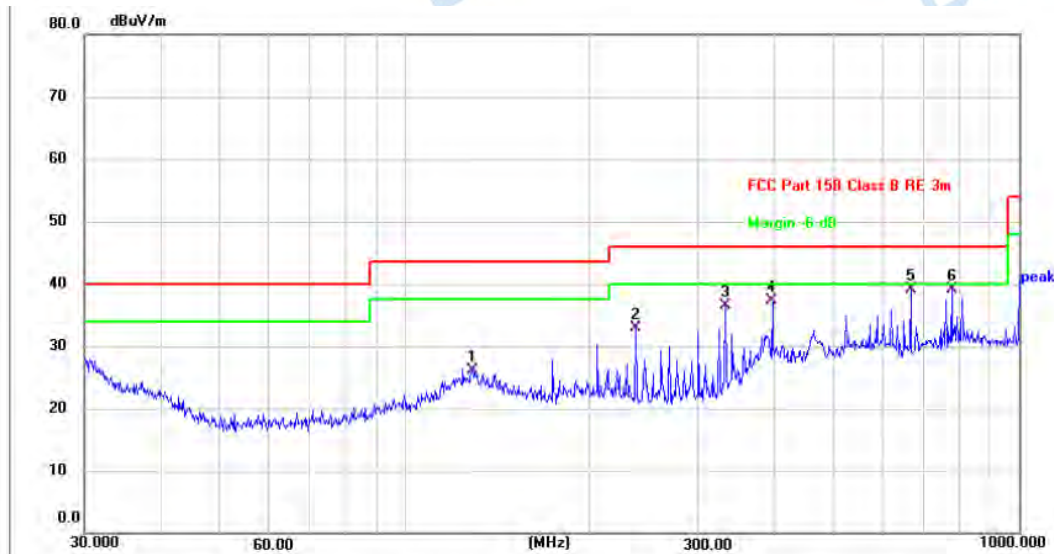

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	128.5630	26.00	0.19	26.19	43.50	-17.31	QP			P	
2	237.4760	37.27	-4.32	32.95	46.00	-13.05	QP			P	
3	332.5187	38.11	-1.65	36.46	46.00	-9.54	QP			P	
4	396.2412	37.21	0.14	37.35	46.00	-8.65	QP			P	
5	665.8034	34.00	5.01	39.01	46.00	-6.99	QP			P	
6 *	776.8777	31.94	7.10	39.04	46.00	-6.96	QP			P	

Remark: Margin=Level - Limit, Level=Test receiver reading + correction factor

The test software will only record the worst test angle and height, and only the worst case will be of 802.11b mode recorded in the test report.


4.8 Emissions in frequency bands (above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4		

4.8.1 E.U.T. Operation:


Operating Environment:					
Temperature:	22.5 °C	Humidity:	54 %	Atmospheric Pressure:	101.9 kPa
Pretest mode:		TM1			
Final test mode:		TM1			

4.8.2 Test Setup Diagram:

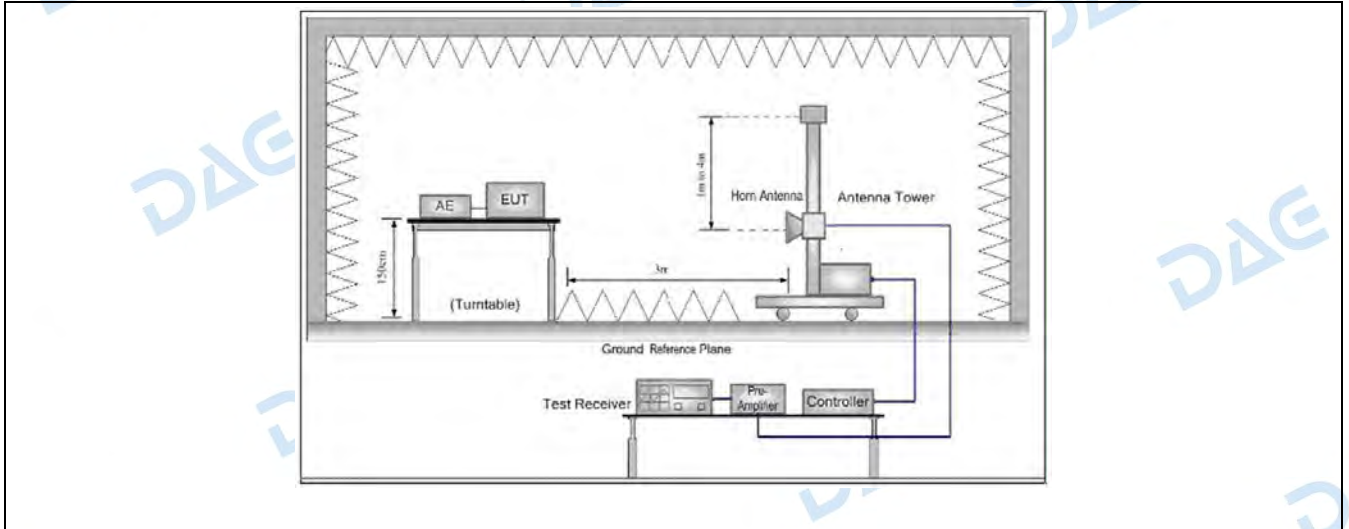


4.8.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

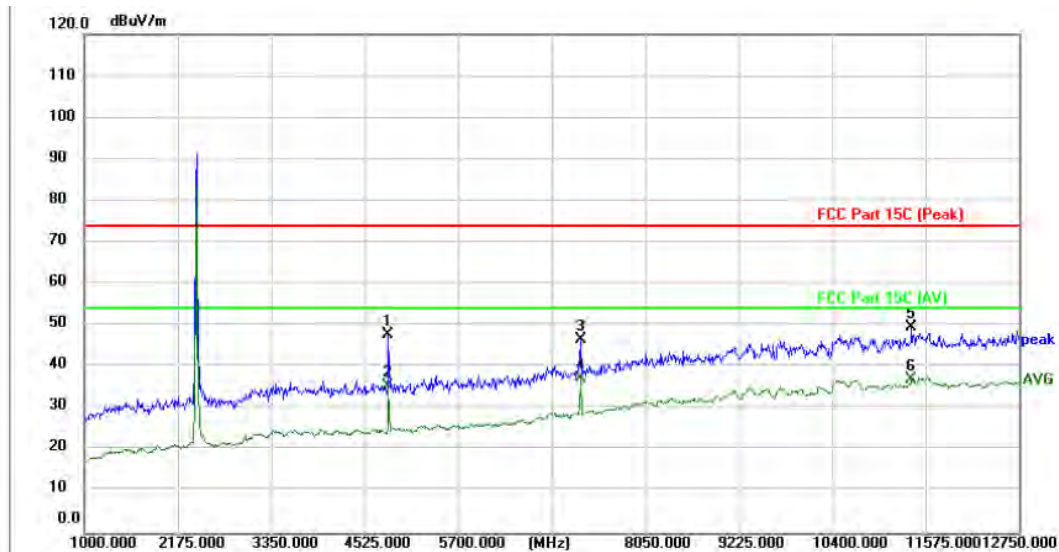


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4818.750	48.49	-0.65	47.84	74.00	-26.16	peak			P	
2	4818.750	36.12	-0.65	35.47	54.00	-18.53	AVG			P	
3	7239.250	42.10	4.42	46.52	74.00	-27.48	peak			P	
4 *	7239.250	32.86	4.42	37.28	54.00	-16.72	AVG			P	
5	11398.750	40.07	9.61	49.68	74.00	-24.32	peak			P	
6	11398.750	27.42	9.61	37.03	54.00	-16.97	AVG			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

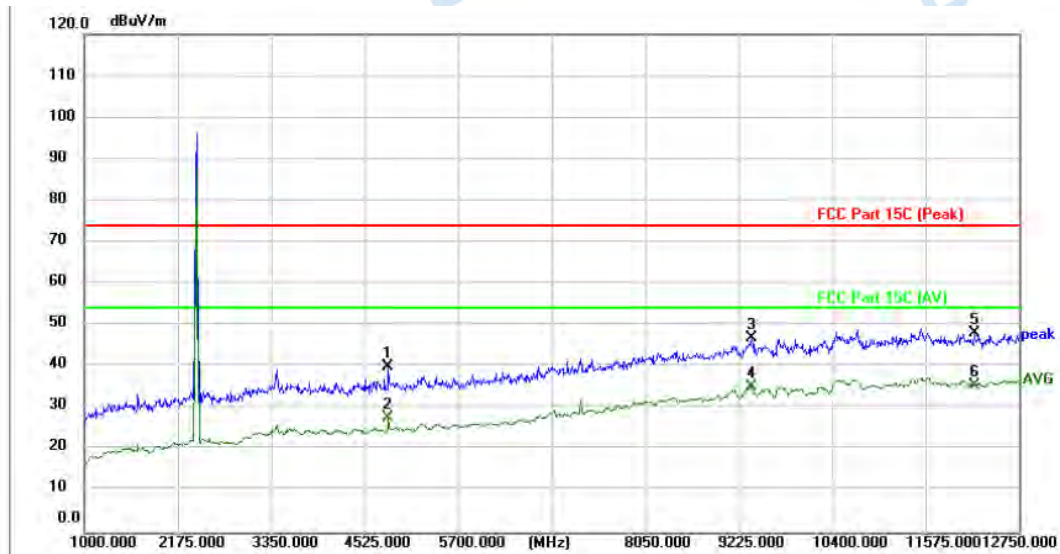


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4818.750	40.72	-0.65	40.07	74.00	-33.93	peak			P	
2	4818.750	28.39	-0.65	27.74	54.00	-26.26	AVG			P	
3	9389.500	38.76	8.14	46.90	74.00	-27.10	peak			P	
4	9389.500	27.05	8.14	35.19	54.00	-18.81	AVG			P	
5	12186.000	37.69	10.39	48.08	74.00	-25.92	peak			P	
6 *	12186.000	25.19	10.39	35.58	54.00	-18.42	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: M

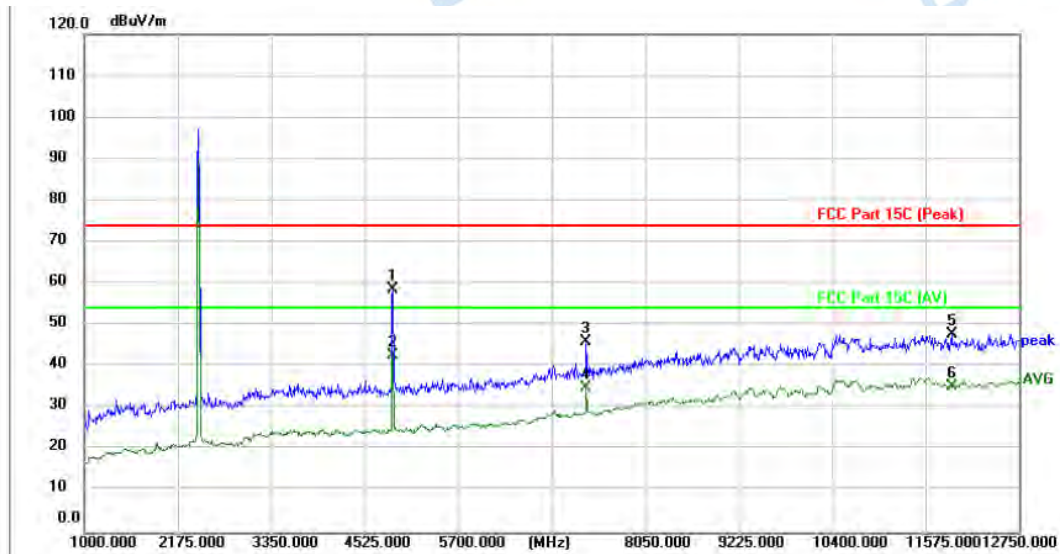


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4877.500	59.15	-0.45	58.70	74.00	-15.30	peak	150		P	
2 *	4877.500	43.32	-0.45	42.87	54.00	-11.13	AVG	150		P	
3	7309.750	41.61	4.55	46.16	74.00	-27.84	peak	150		P	
4	7309.750	30.42	4.55	34.97	54.00	-19.03	AVG	150		P	
5	11904.000	37.95	9.94	47.89	74.00	-26.11	peak	150		P	
6	11904.000	25.44	9.94	35.38	54.00	-18.62	AVG	150		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: M

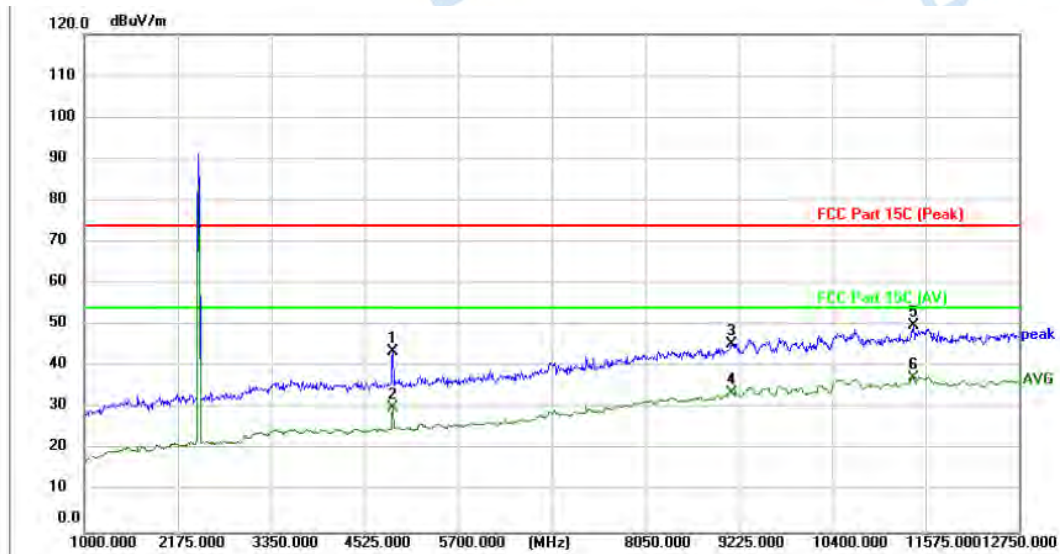


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4877.500	44.18	-0.45	43.73	74.00	-30.27	peak			P	
2	4877.500	30.51	-0.45	30.06	54.00	-23.94	AVG			P	
3	9131.000	37.36	8.24	45.60	74.00	-28.40	peak			P	
4	9131.000	25.64	8.24	33.88	54.00	-20.12	AVG			P	
5	11422.250	40.47	9.62	50.09	74.00	-23.91	peak			P	
6 *	11422.250	27.69	9.62	37.31	54.00	-16.69	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

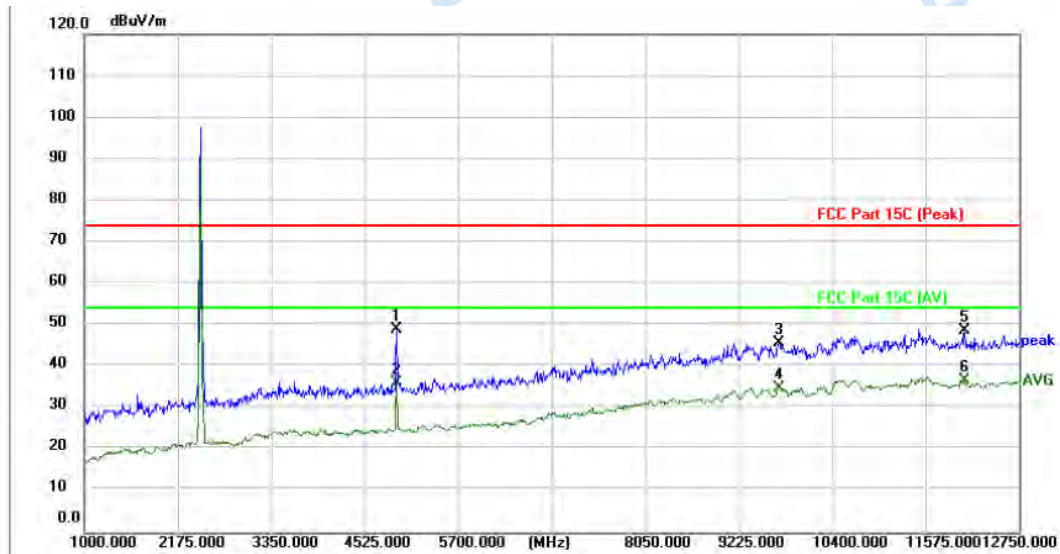

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4924.500	49.31	-0.30	49.01	74.00	-24.99	peak			P	
2	4924.500	36.60	-0.30	36.30	54.00	-17.70	AVG			P	
3	9730.250	37.76	8.10	45.86	74.00	-28.14	peak			P	
4	9730.250	26.89	8.10	34.99	54.00	-19.01	AVG			P	
5	12068.500	38.66	10.14	48.80	74.00	-25.20	peak			P	
6 *	12068.500	26.72	10.14	36.86	54.00	-17.14	AVG			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

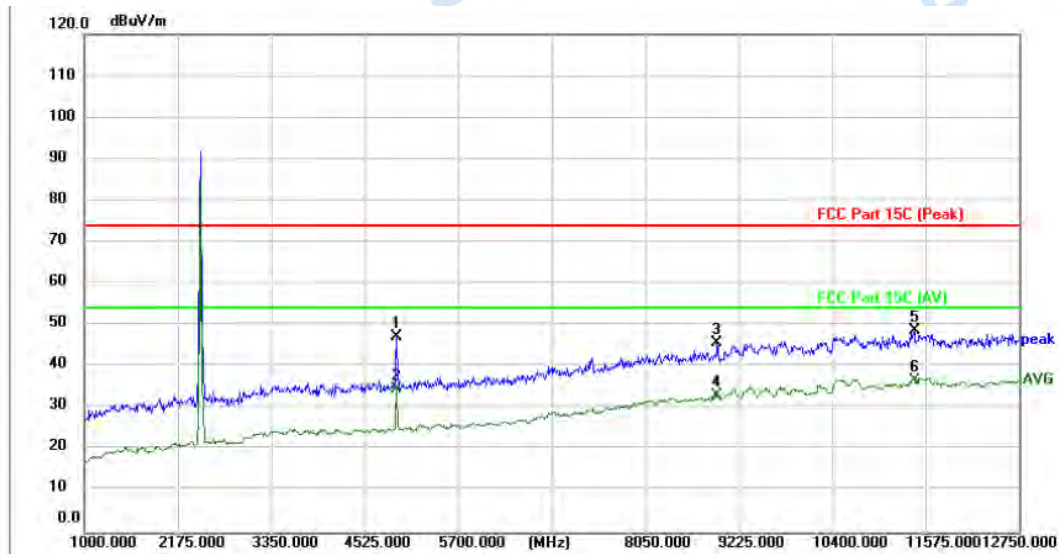

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4924.500	47.45	-0.30	47.15	74.00	-26.85	peak			P	
2	4924.500	34.89	-0.30	34.59	54.00	-19.41	AVG			P	
3	8954.750	37.66	8.21	45.87	74.00	-28.13	peak			P	
4	8954.750	25.01	8.21	33.22	54.00	-20.78	AVG			P	
5	11434.000	39.03	9.63	48.66	74.00	-25.34	peak			P	
6 *	11434.000	27.10	9.63	36.73	54.00	-17.27	AVG			P	

Remark: Margin=Level - Limit, Level=Test receiver reading + correction factor


- Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 6dB below the permissible limits or the field strength is too small to be measured, so the noise floor test chart was not uploaded.
- The test software will only record the worst test angle and height, and only the worst case will be of 802.11b mode recorded in the test report.

5 TEST SETUP PHOTOS

Conducted Emission at AC power line



Emissions in frequency bands (below 1GHz)

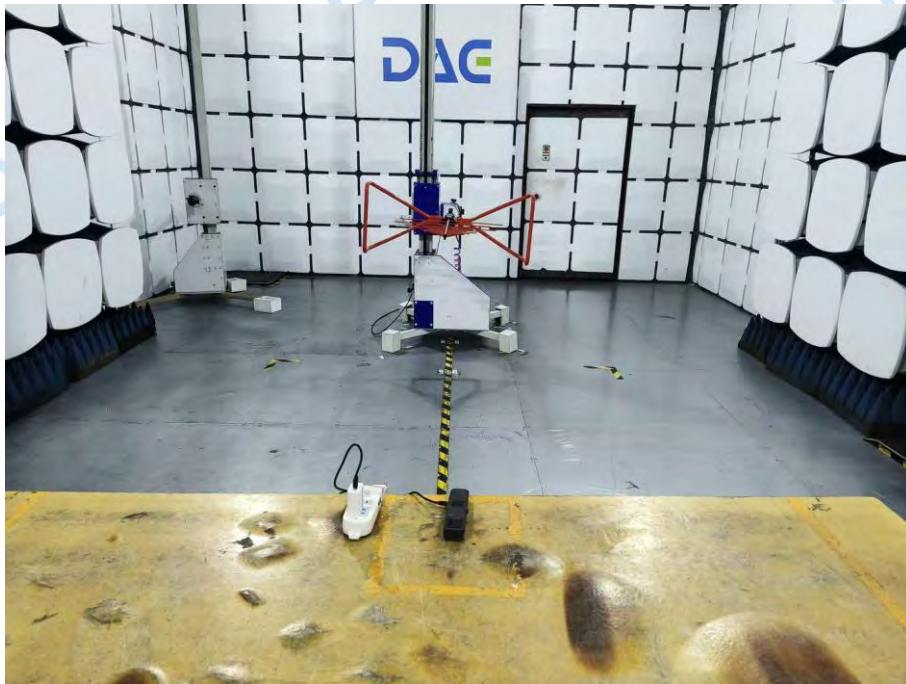

Emissions in frequency bands (above 1GHz)

6 PHOTOS OF THE EUT


Refer to Appendix - EUT Photos for EUT External Photo and Internal Photo.

Appendix




1. -6dB Bandwidth



Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	8.20	500	Pass
NVNT	ANT1	802.11b	2437.00	8.21	500	Pass
NVNT	ANT1	802.11b	2462.00	8.20	500	Pass
NVNT	ANT1	802.11g	2412.00	16.29	500	Pass
NVNT	ANT1	802.11g	2437.00	16.21	500	Pass
NVNT	ANT1	802.11g	2462.00	16.19	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	17.42	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.55	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	17.36	500	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	17.50	500	Pass
NVNT	ANT1	802.11ax(HE20)	2437.00	17.30	500	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	17.48	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	35.52	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	36.09	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	35.11	500	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	34.34	500	Pass
NVNT	ANT1	802.11ax(HE40)	2437.00	36.21	500	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	34.51	500	Pass

-6dB_Bandwidth_NVNT_ANT1_802_11b_2412

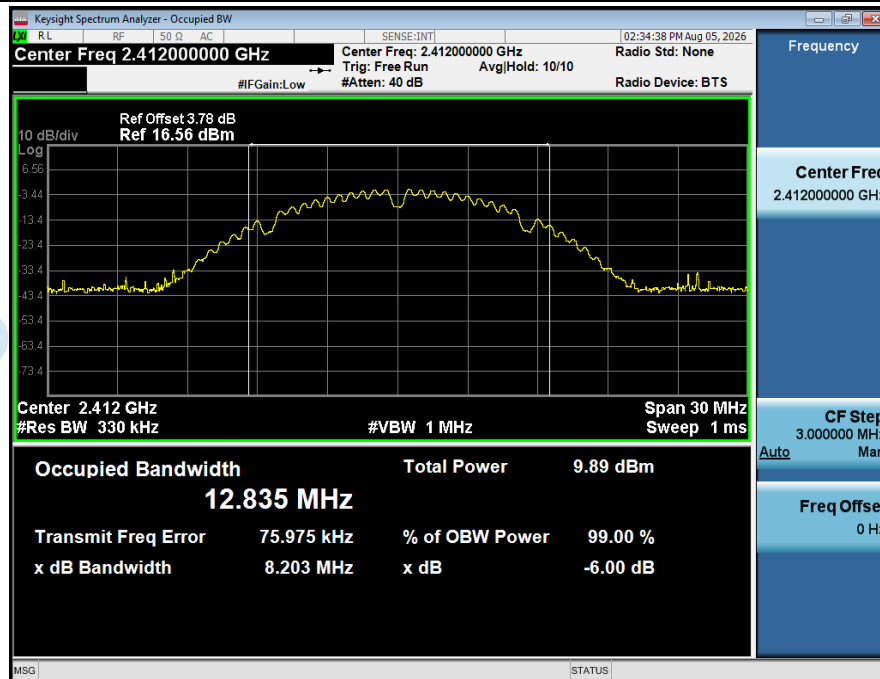


-6dB_Bandwidth_NVNT_ANT1_802_11b_2437

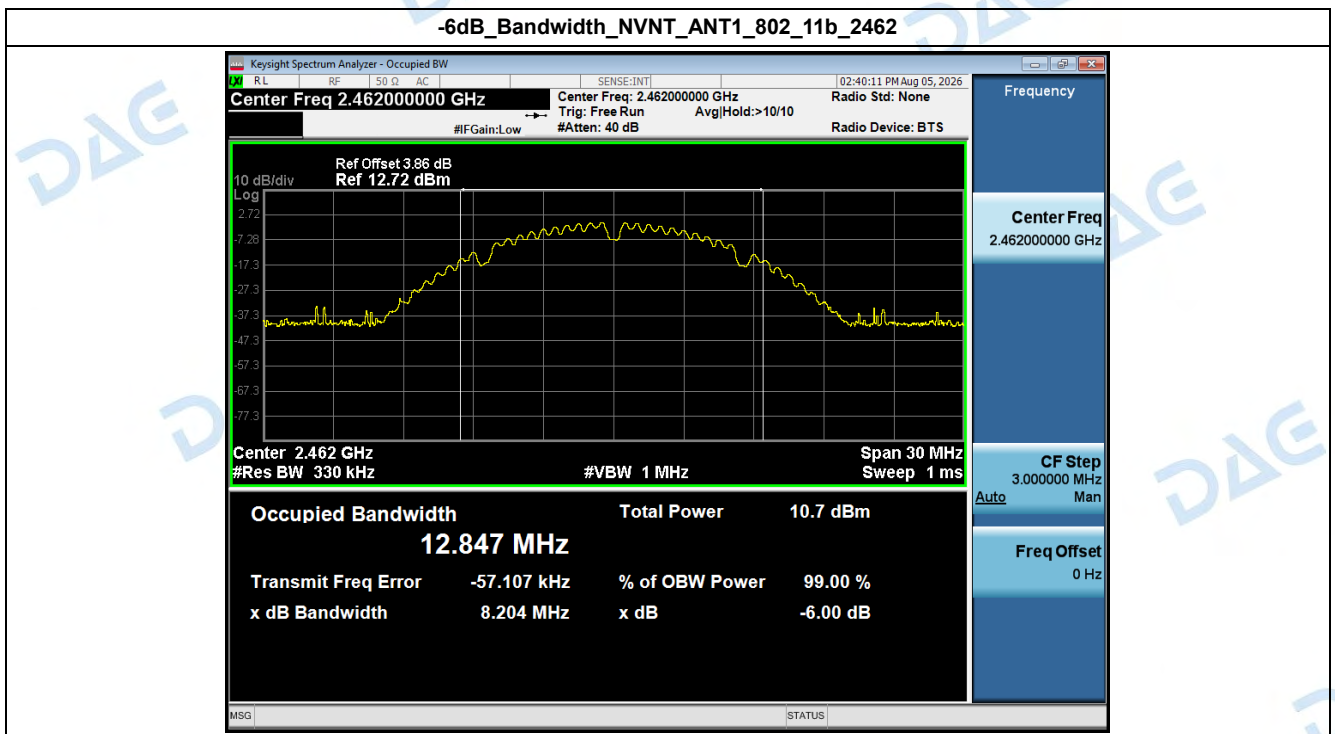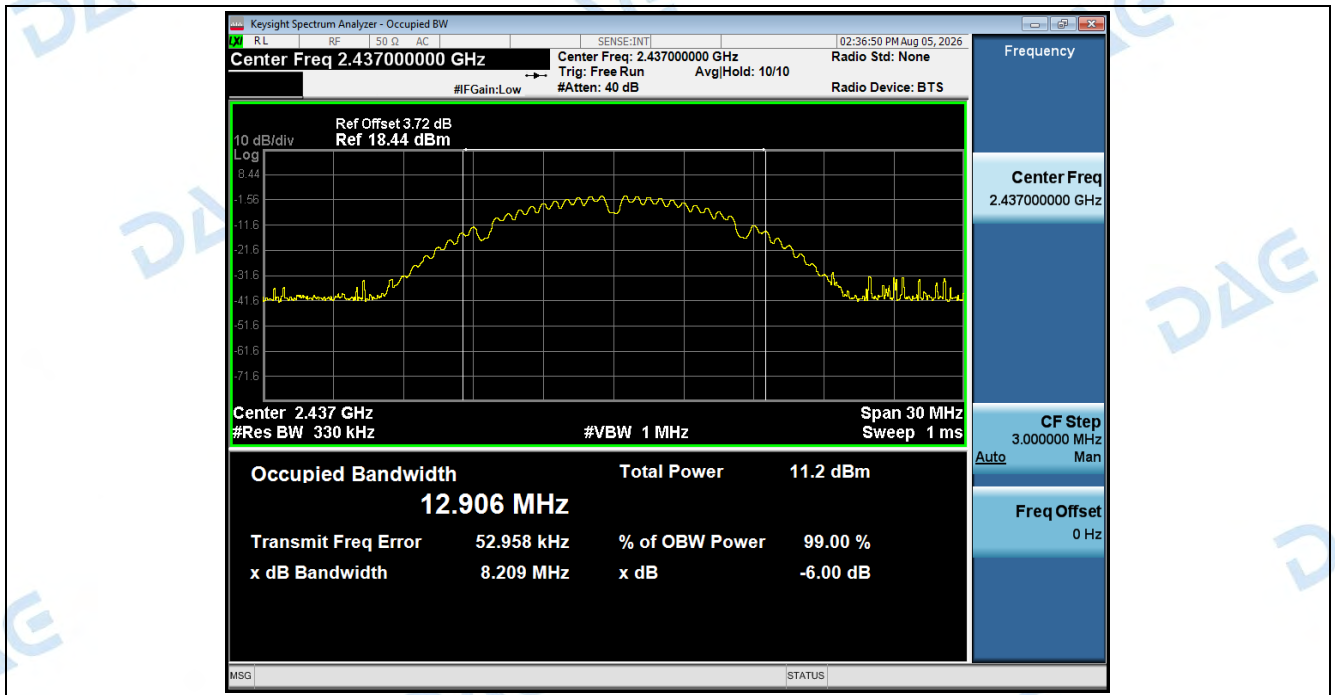


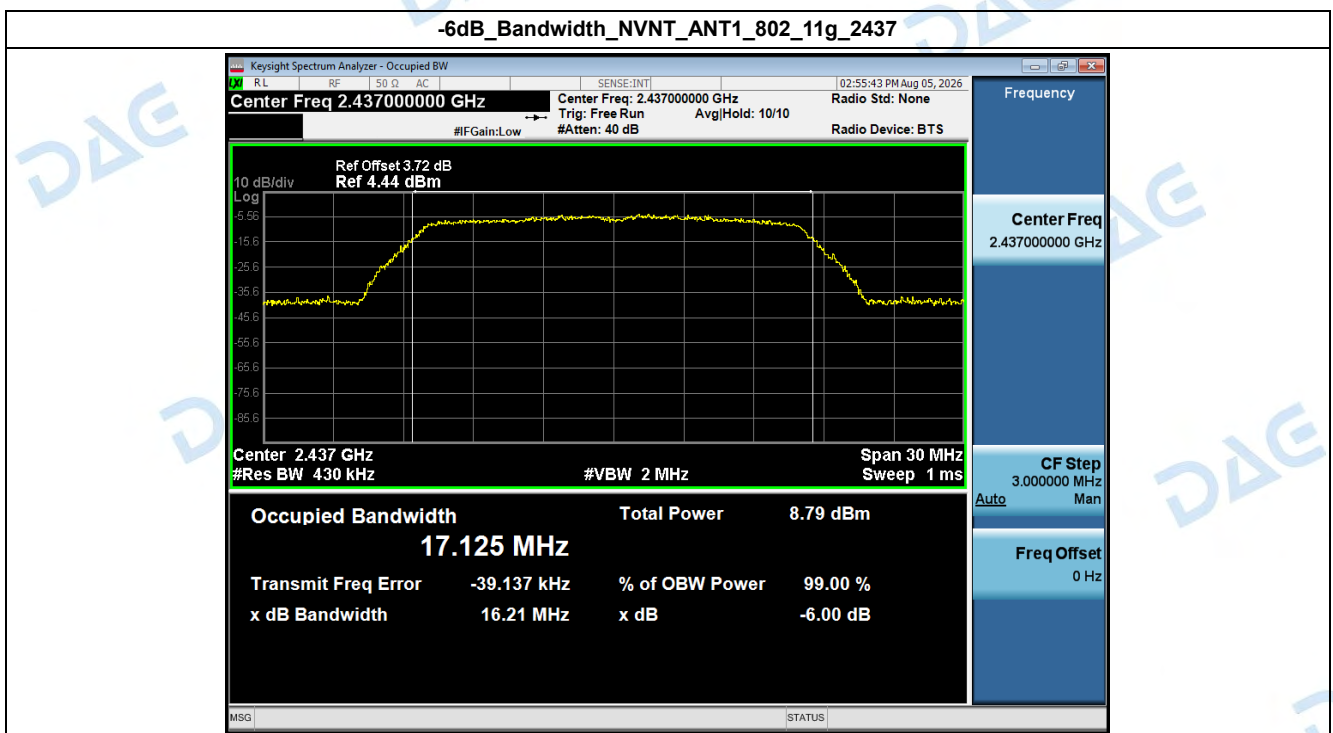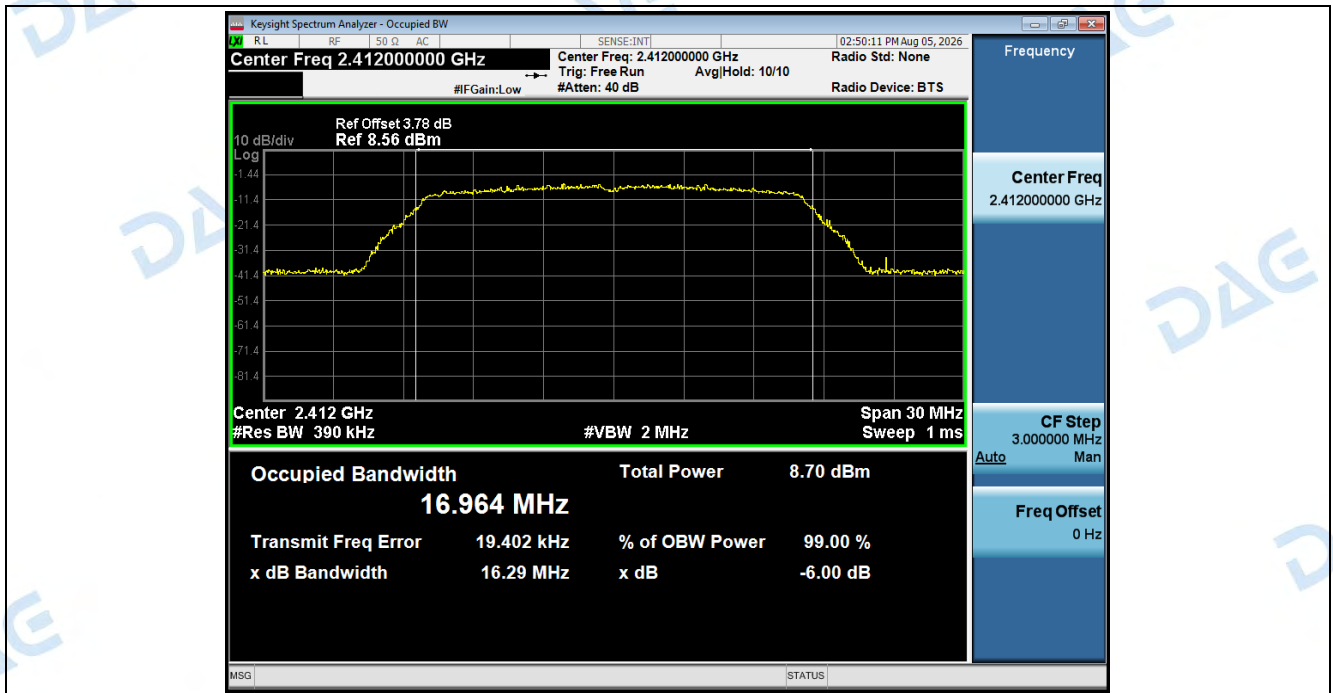



-6dB_Bandwidth_NVNT_ANT1_802_11g_2462


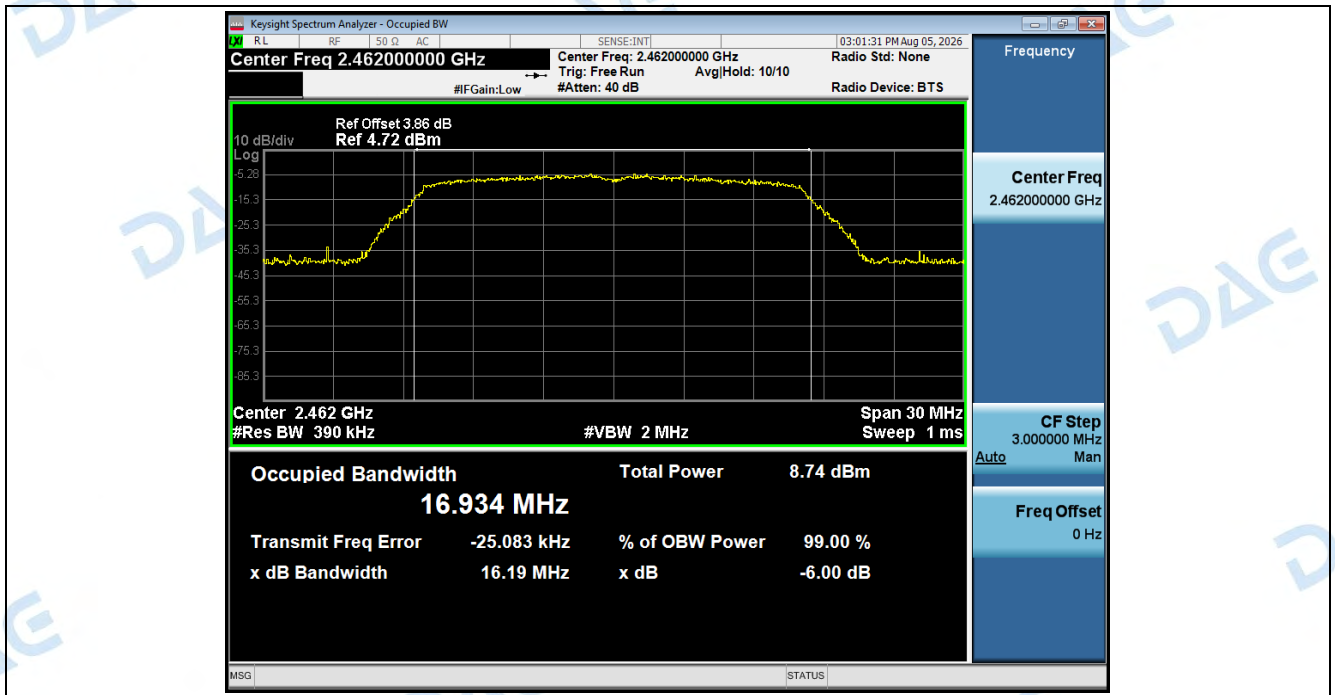




-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2412

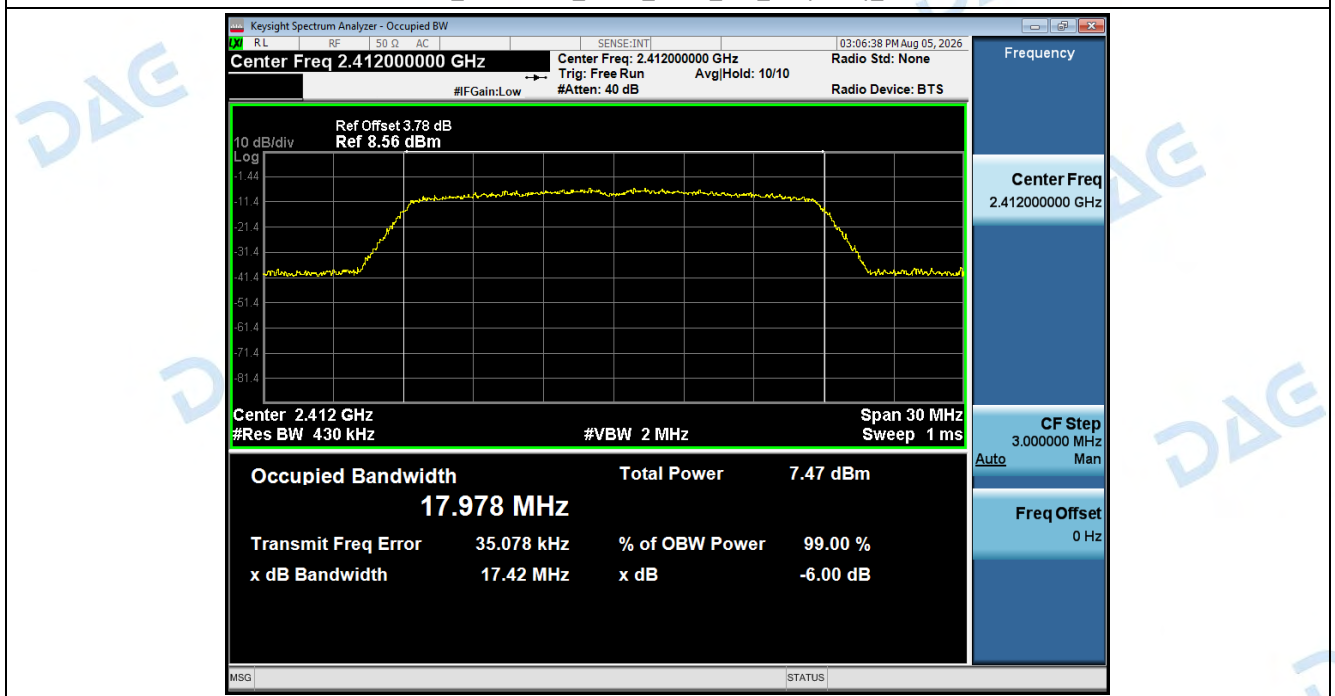


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437

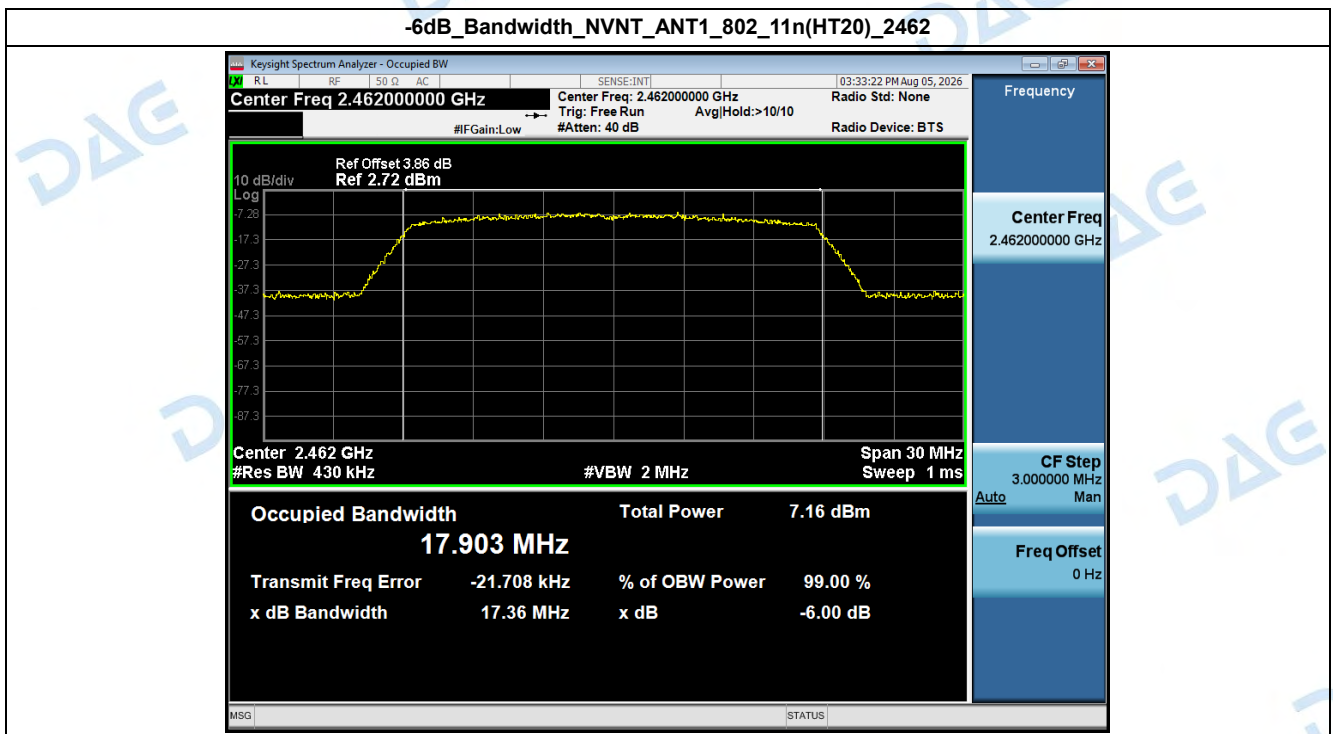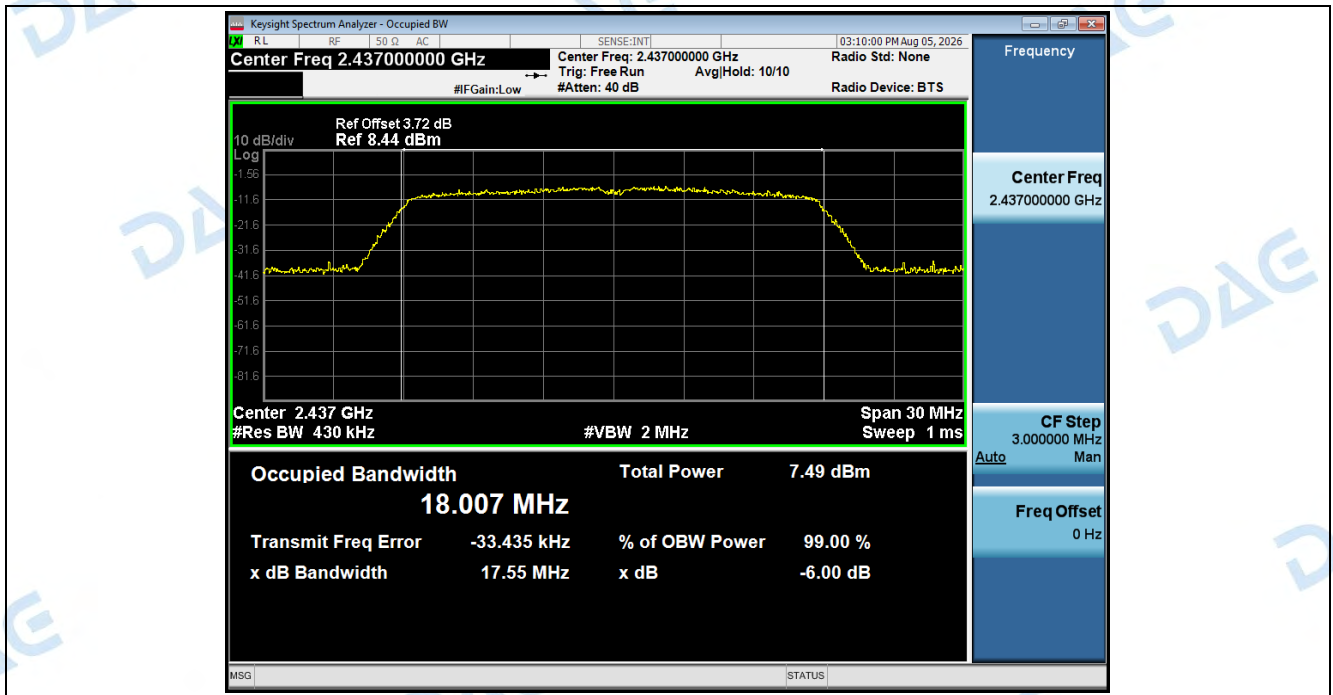


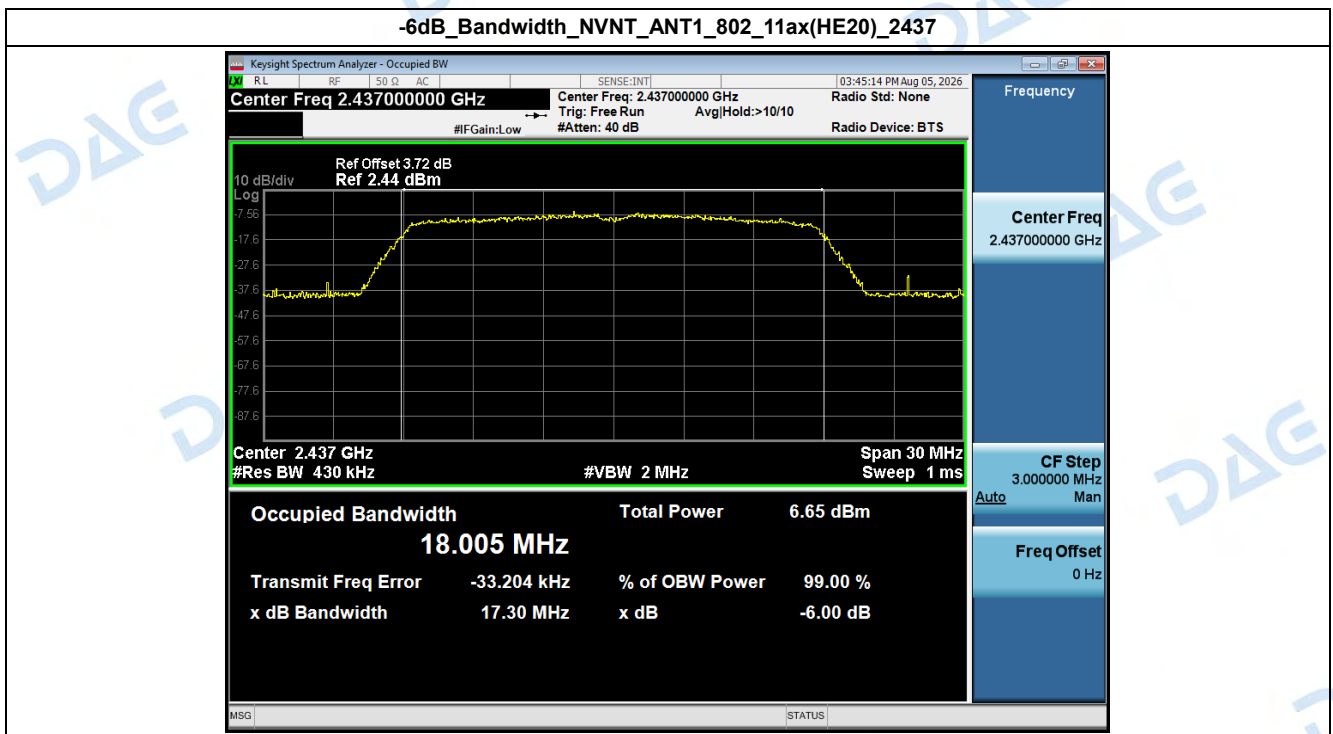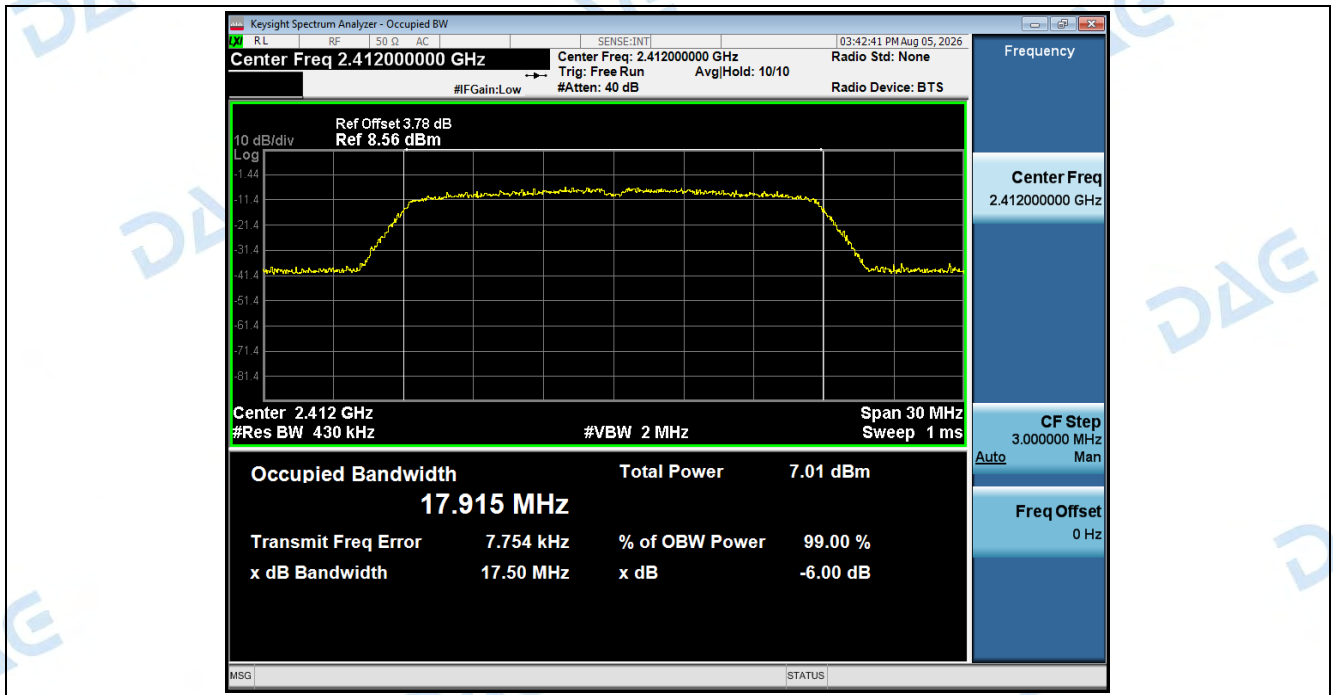

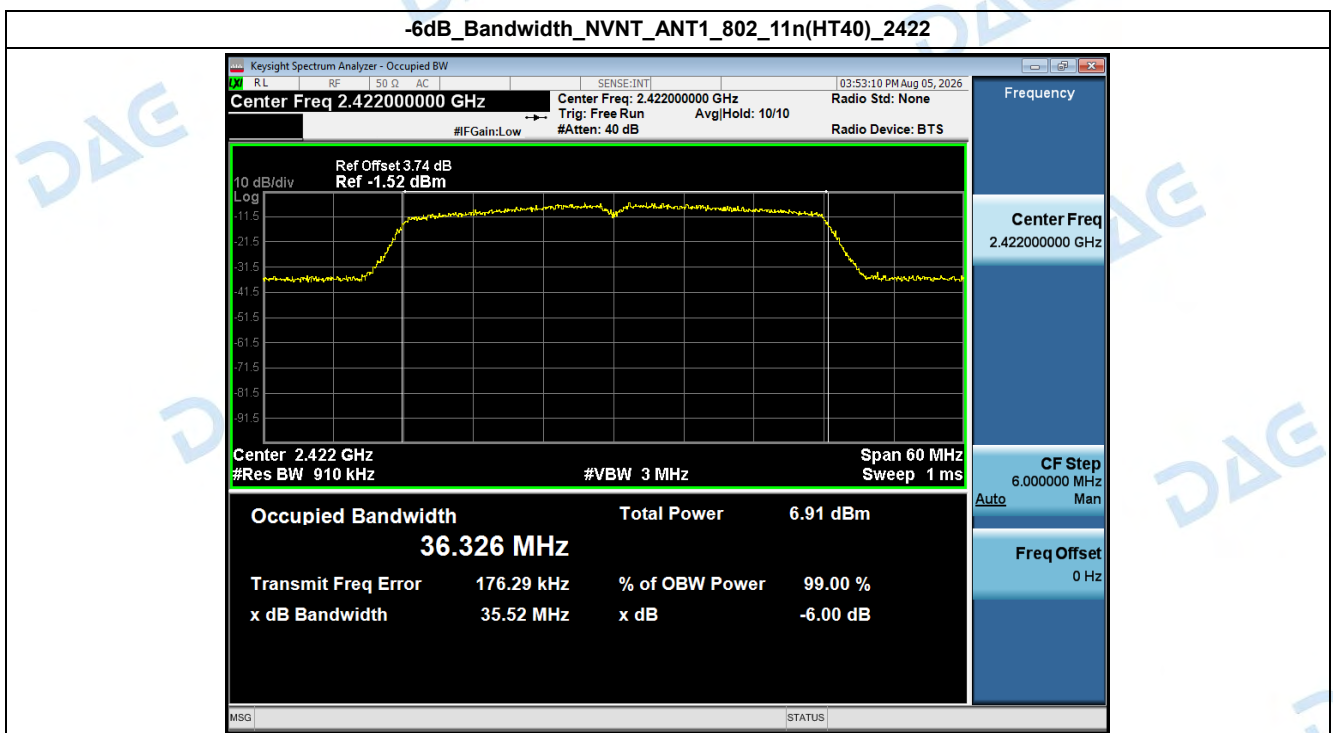
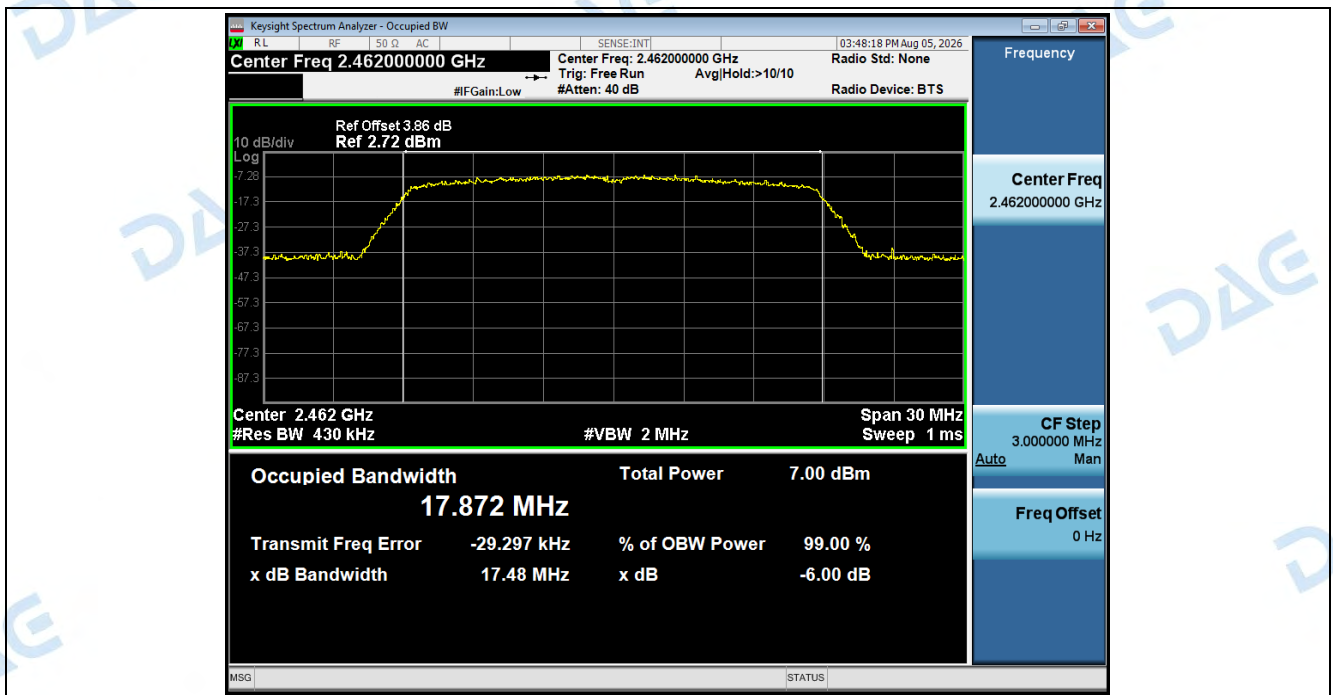


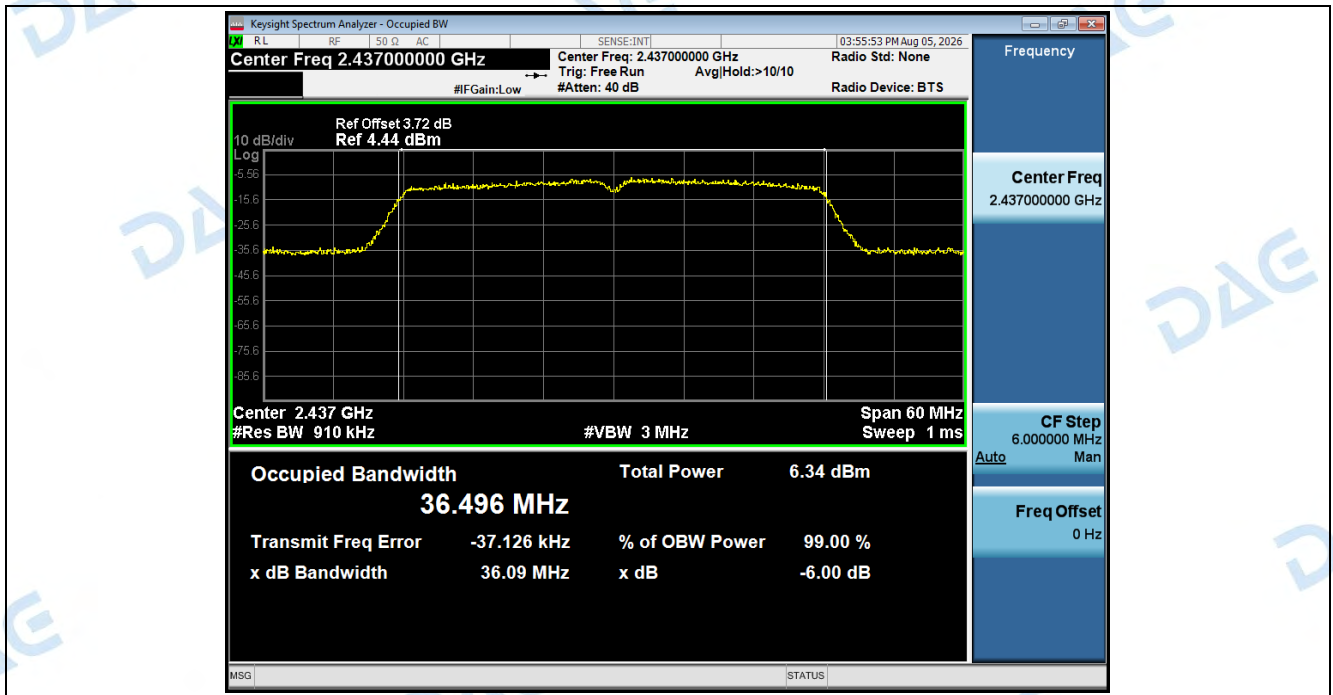


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2452

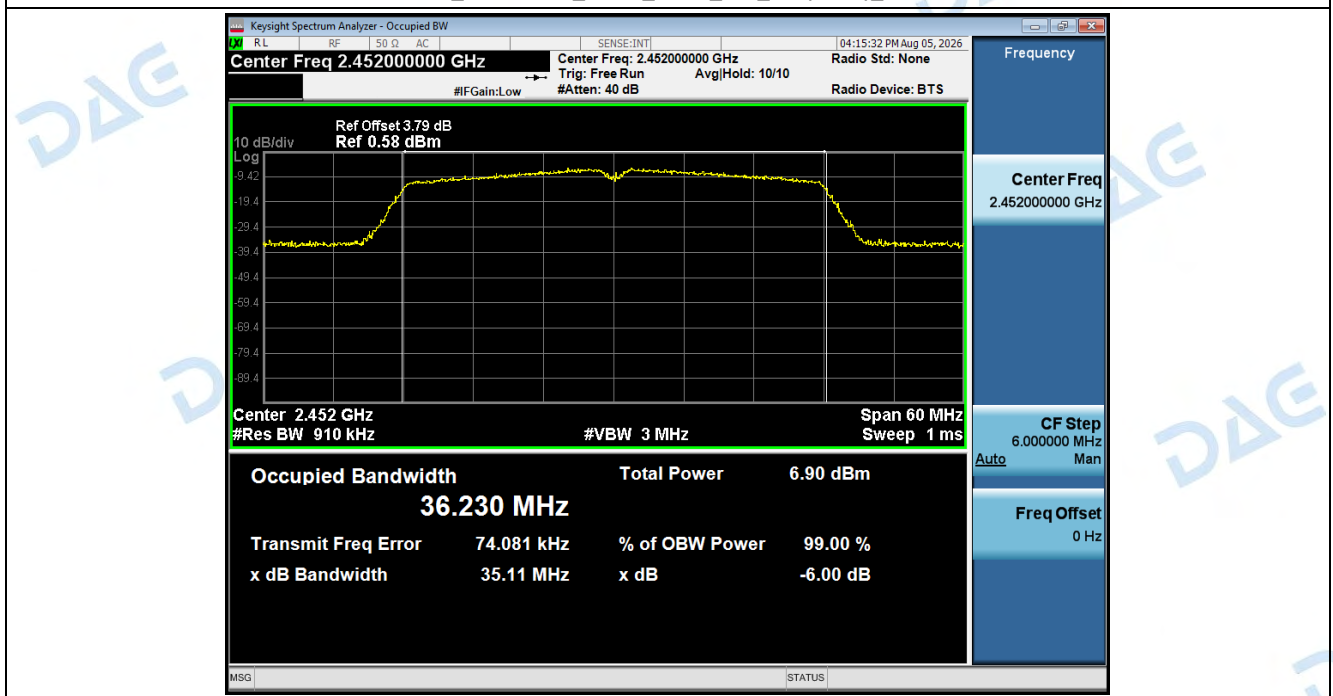

-6dB_Bandwidth_NVNT_ANT1_802_11ax(HE40)_2422

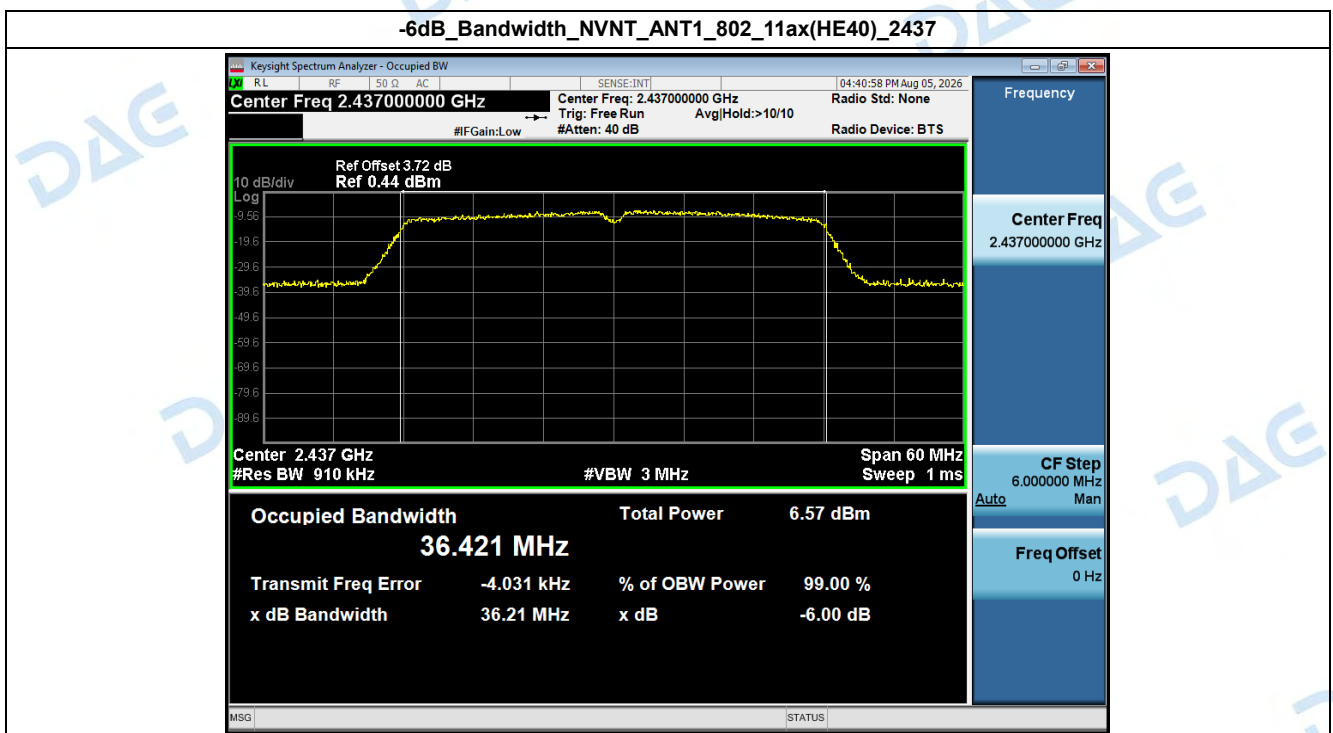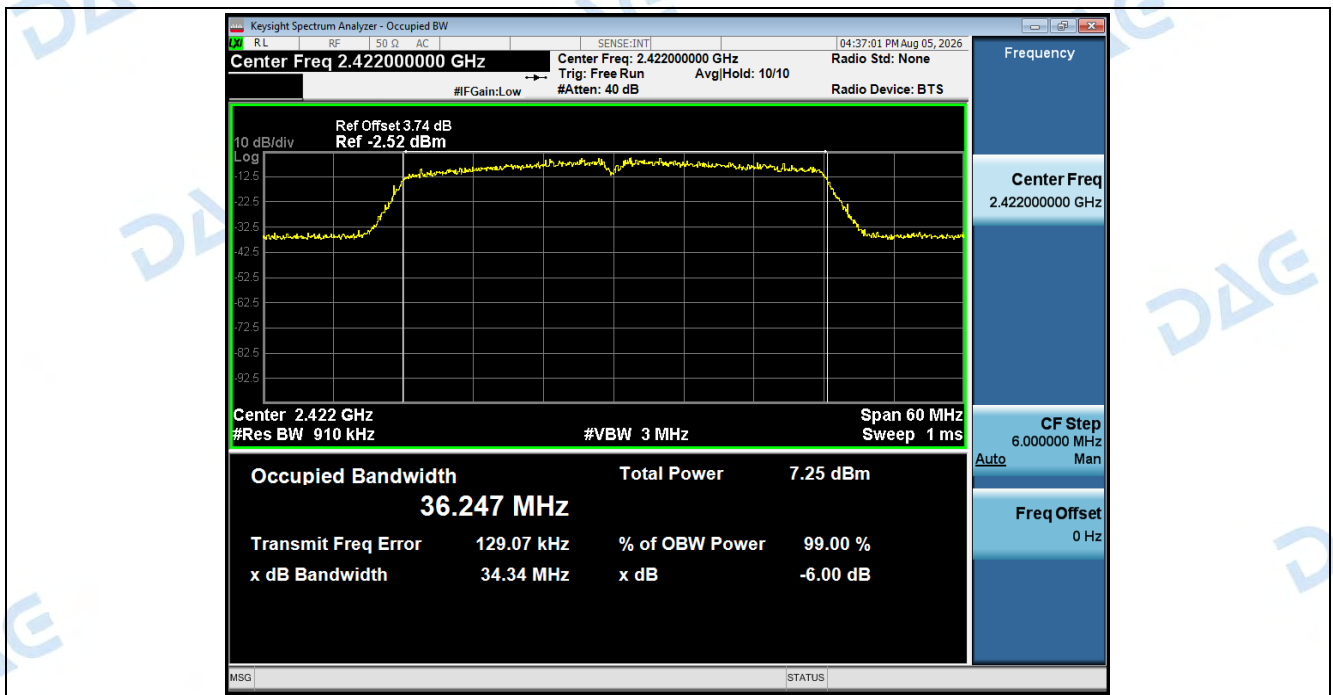


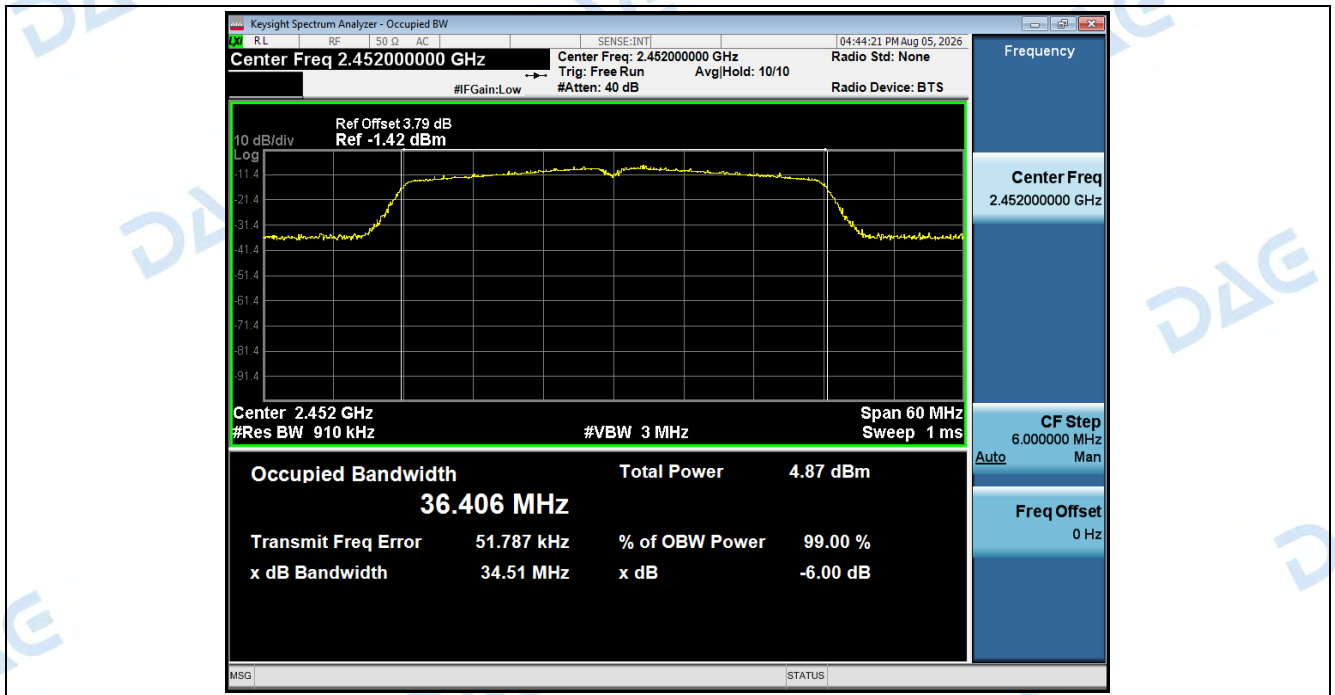




2. 99% Occupied Bandwidth


Condition	Antenna	Modulation	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	802.11b	2412.00	12.869
NVNT	ANT1	802.11b	2437.00	12.907
NVNT	ANT1	802.11b	2462.00	12.875
NVNT	ANT1	802.11g	2412.00	17.087
NVNT	ANT1	802.11g	2437.00	17.204
NVNT	ANT1	802.11g	2462.00	17.094
NVNT	ANT1	802.11n(HT20)	2412.00	18.067
NVNT	ANT1	802.11n(HT20)	2437.00	18.109
NVNT	ANT1	802.11n(HT20)	2462.00	17.982
NVNT	ANT1	802.11ax(HE20)	2412.00	18.066
NVNT	ANT1	802.11ax(HE20)	2437.00	18.164
NVNT	ANT1	802.11ax(HE20)	2462.00	18.051
NVNT	ANT1	802.11n(HT40)	2422.00	36.274
NVNT	ANT1	802.11n(HT40)	2437.00	36.491
NVNT	ANT1	802.11n(HT40)	2452.00	36.283
NVNT	ANT1	802.11ax(HE40)	2422.00	36.339
NVNT	ANT1	802.11ax(HE40)	2437.00	36.519
NVNT	ANT1	802.11ax(HE40)	2452.00	36.474

99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2412

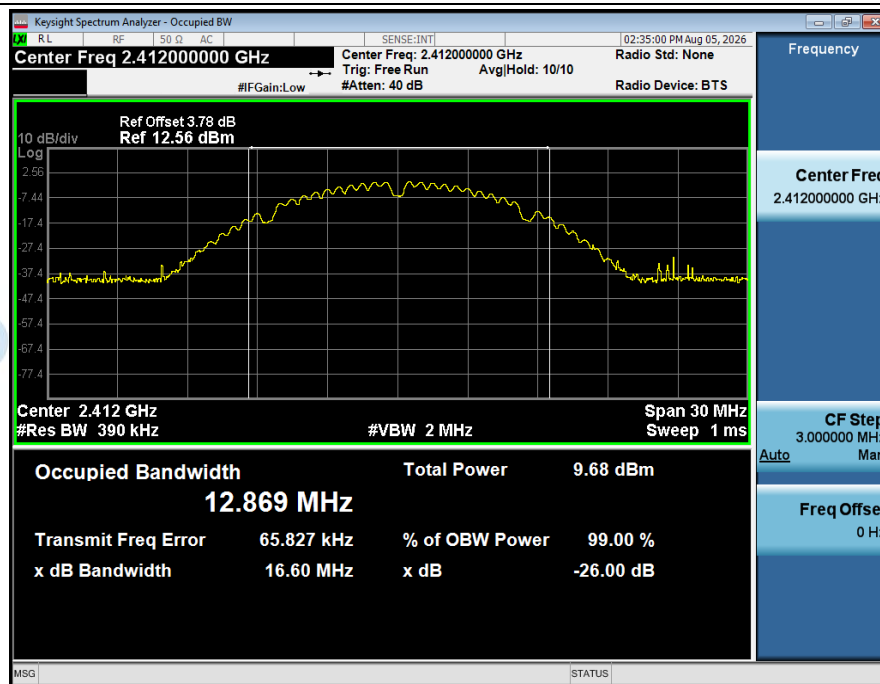


99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2437

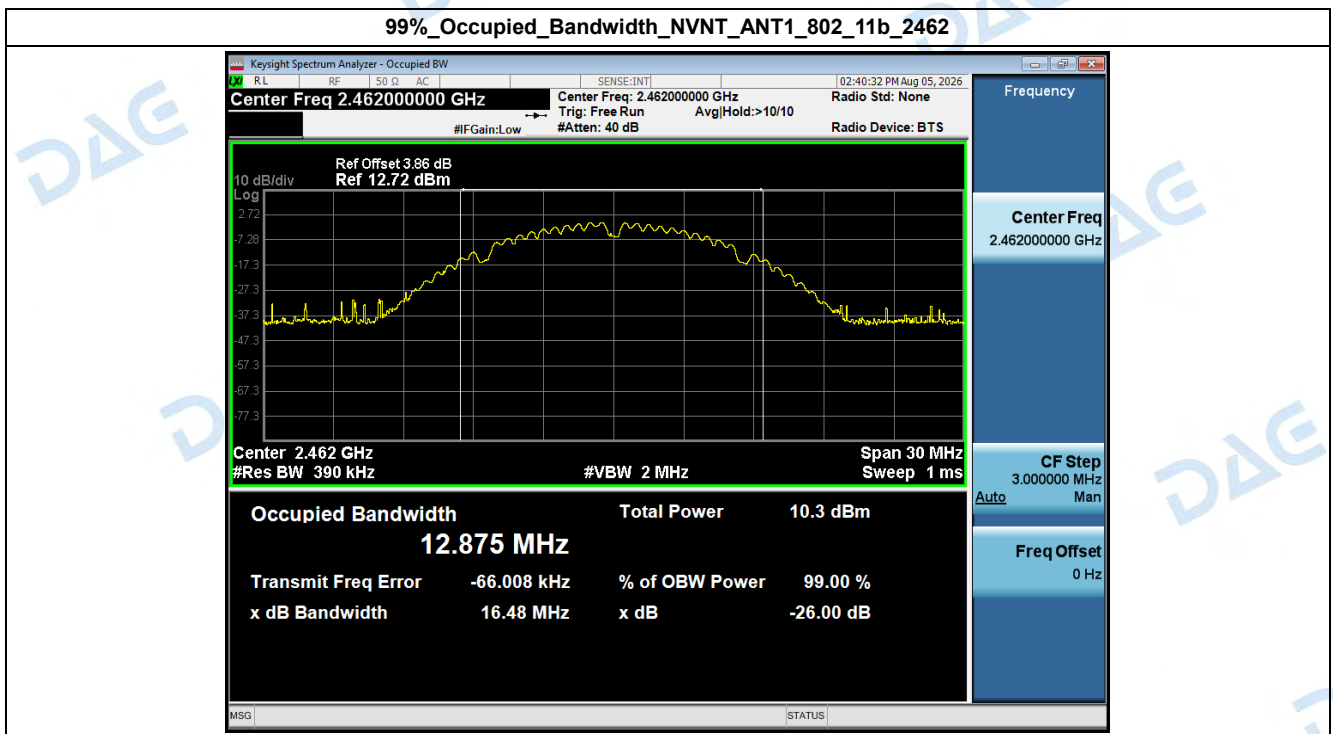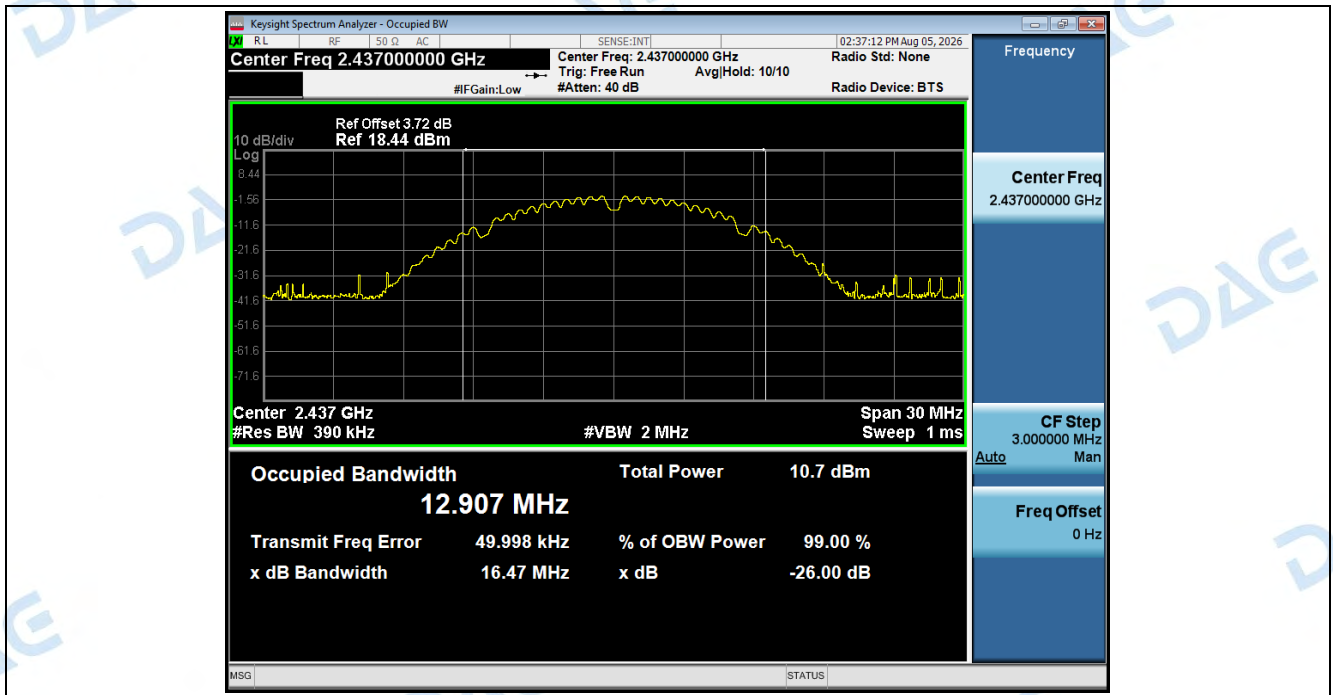


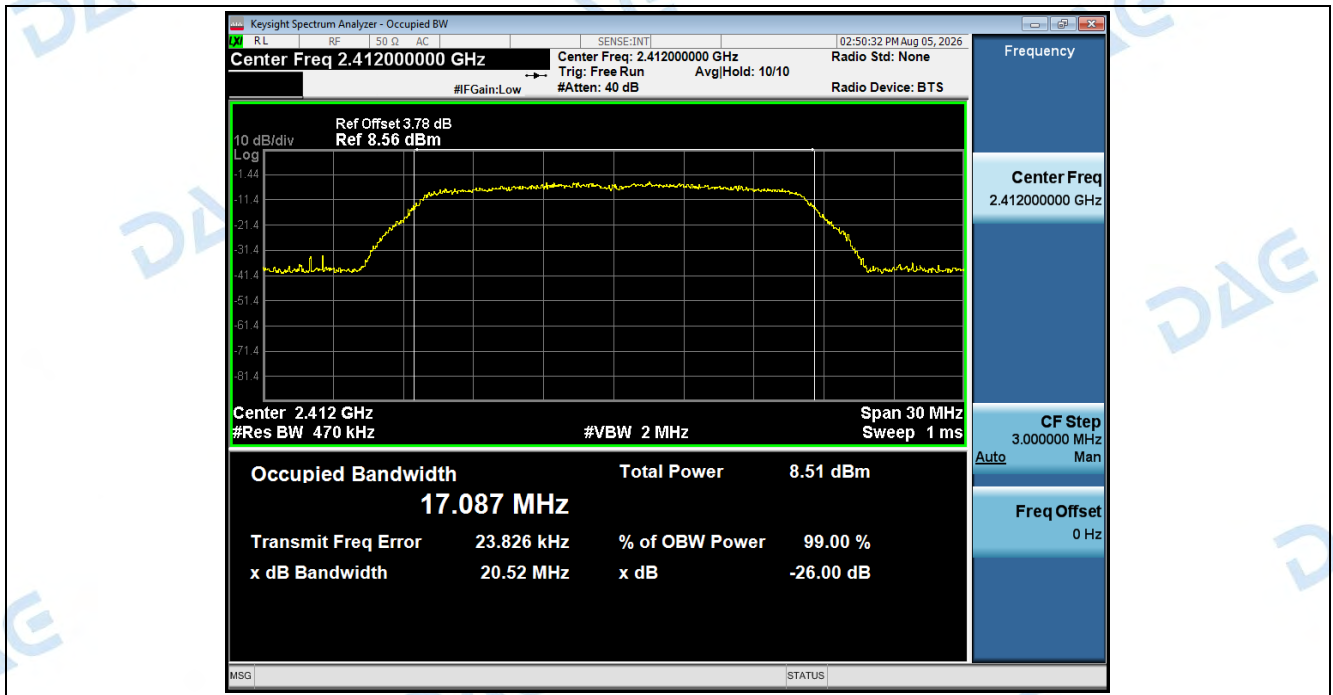


99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2437

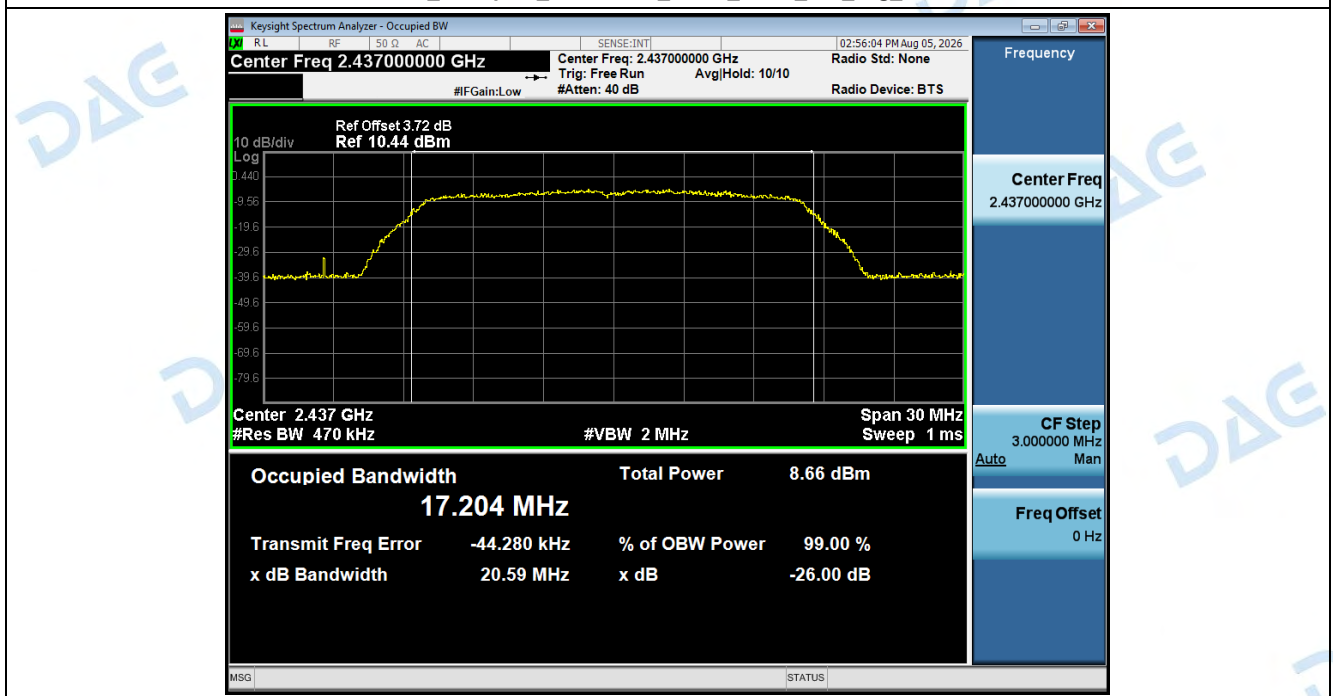



99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2462


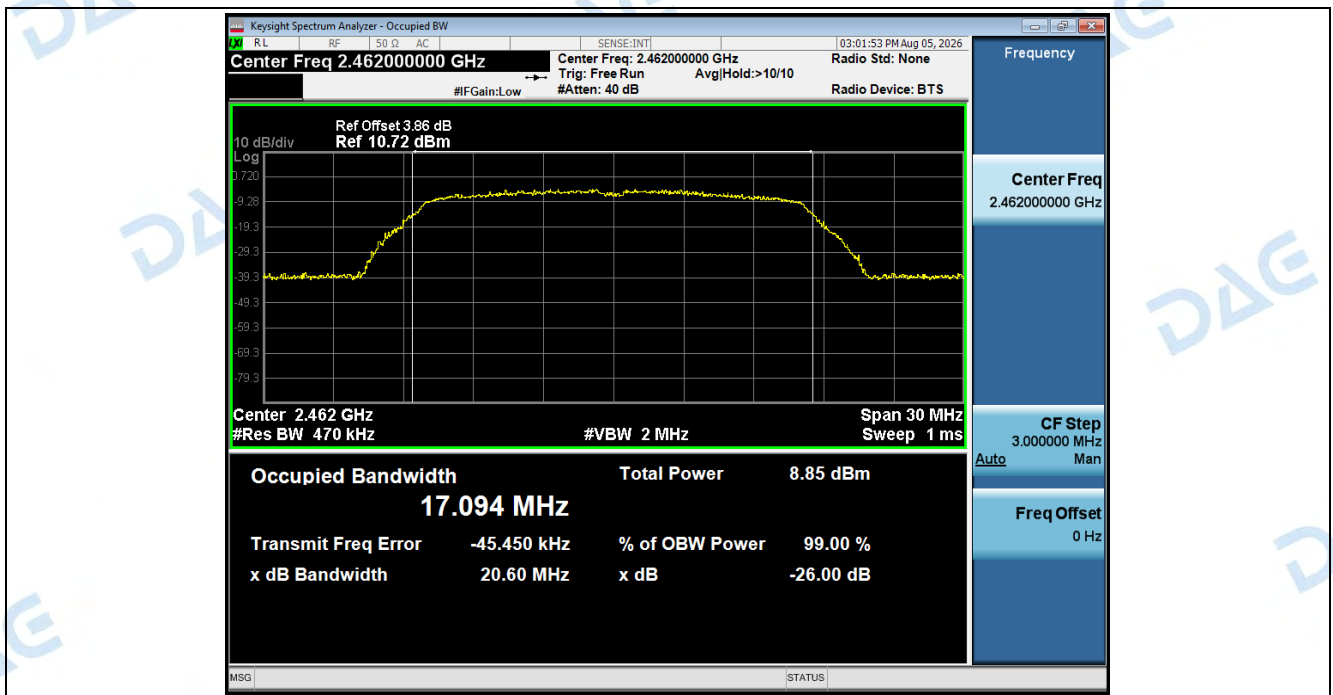




99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2412


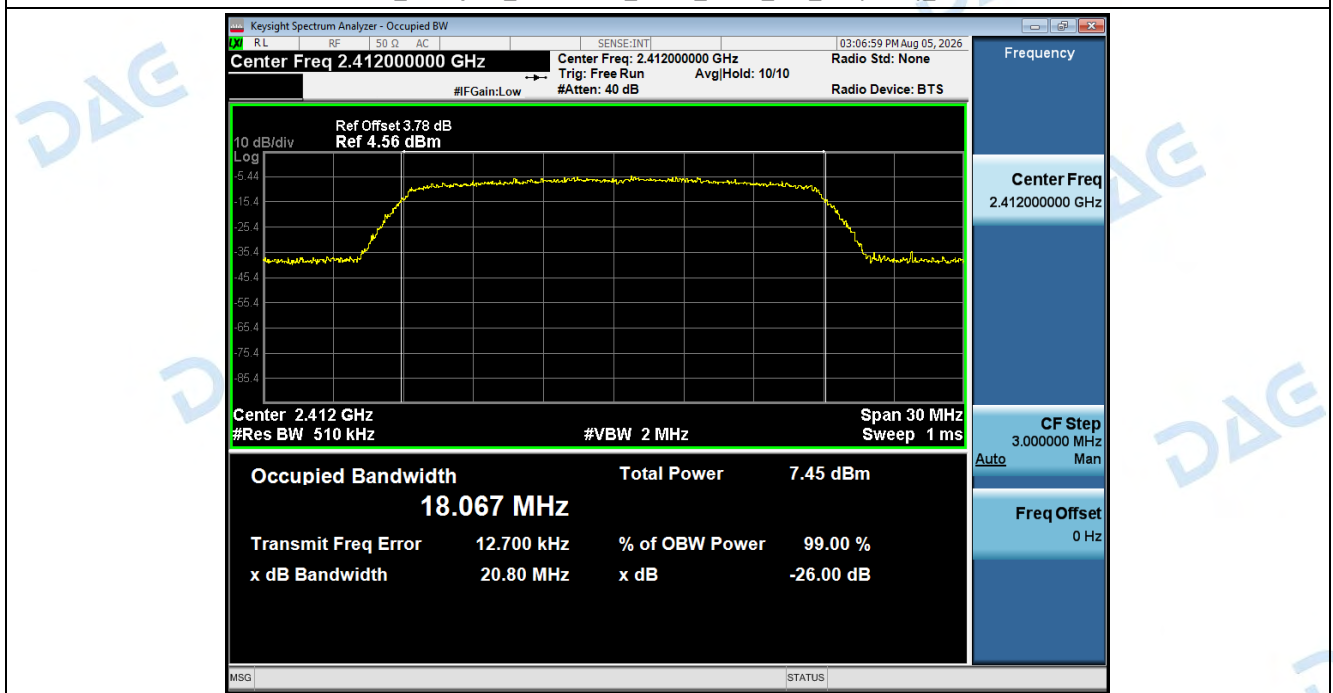




99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437

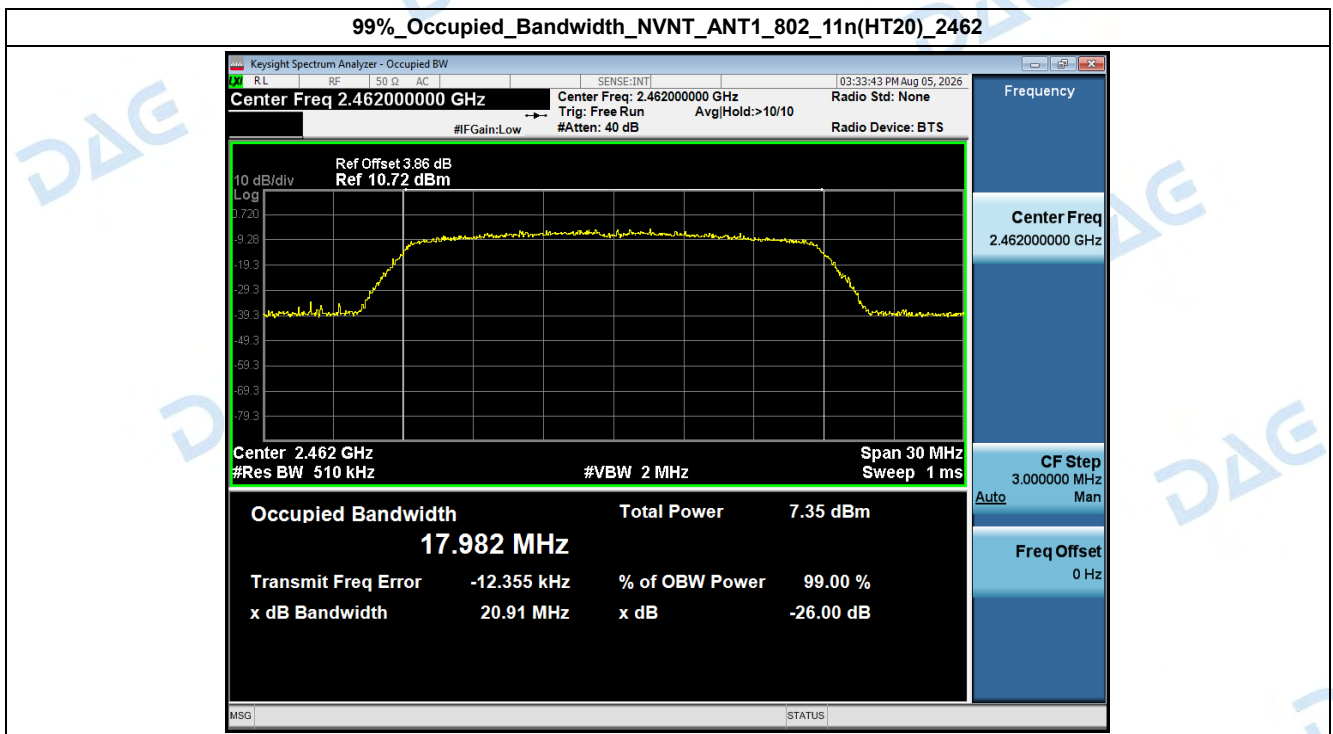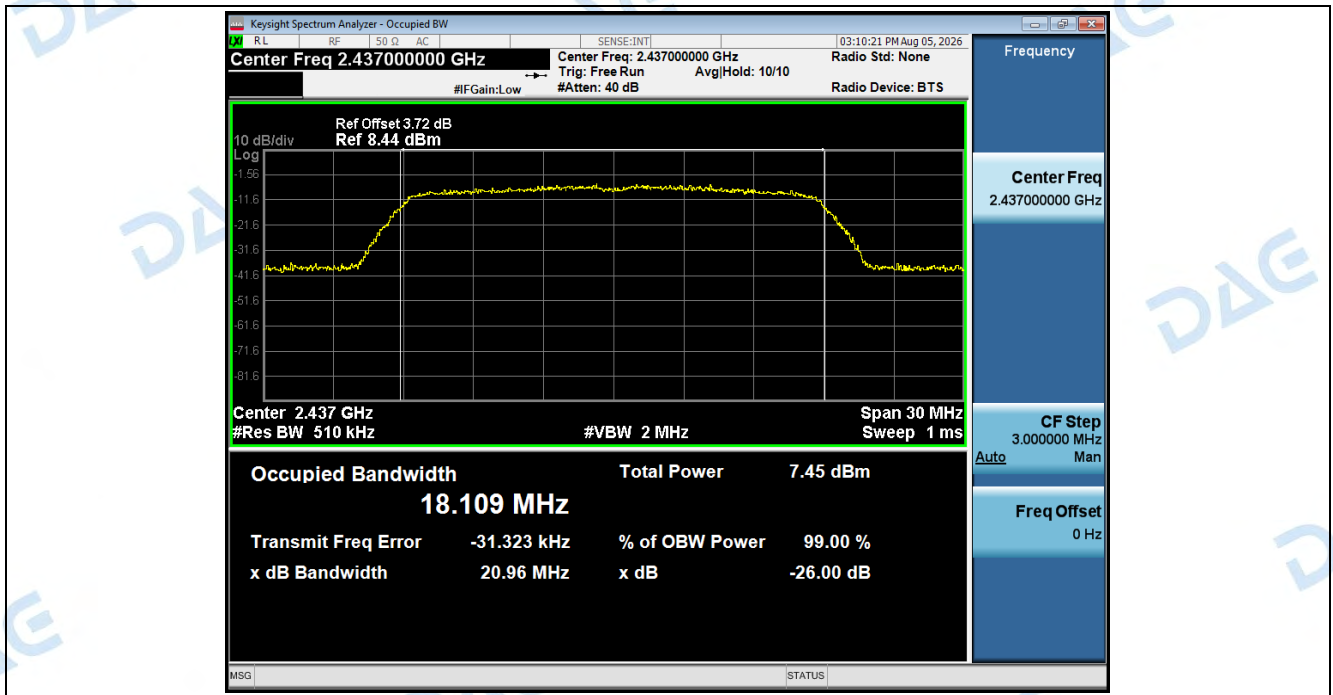


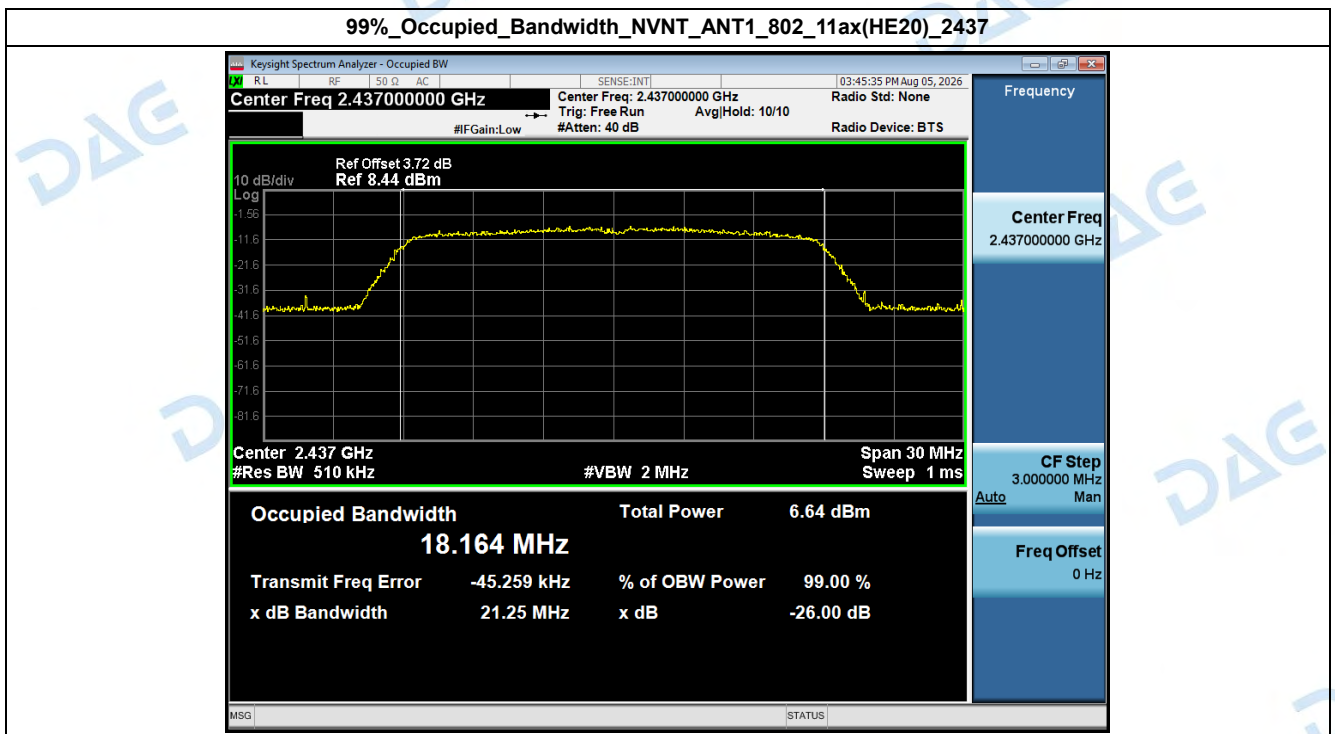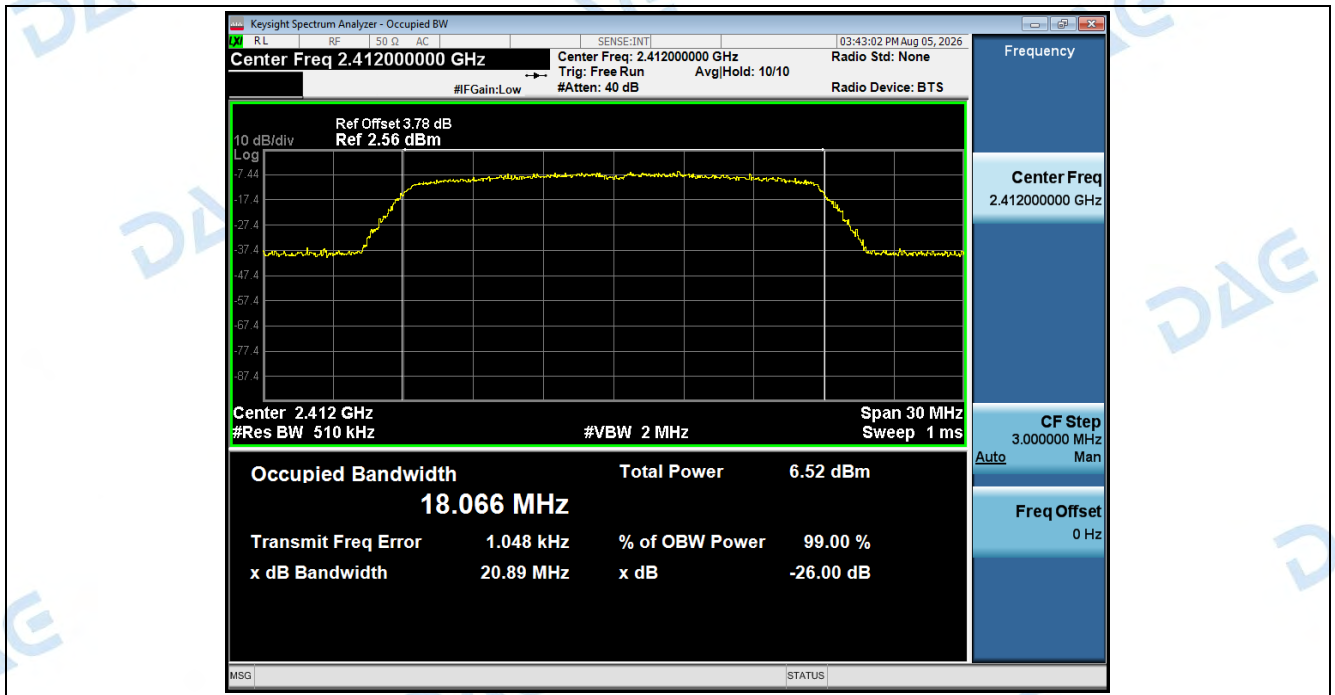

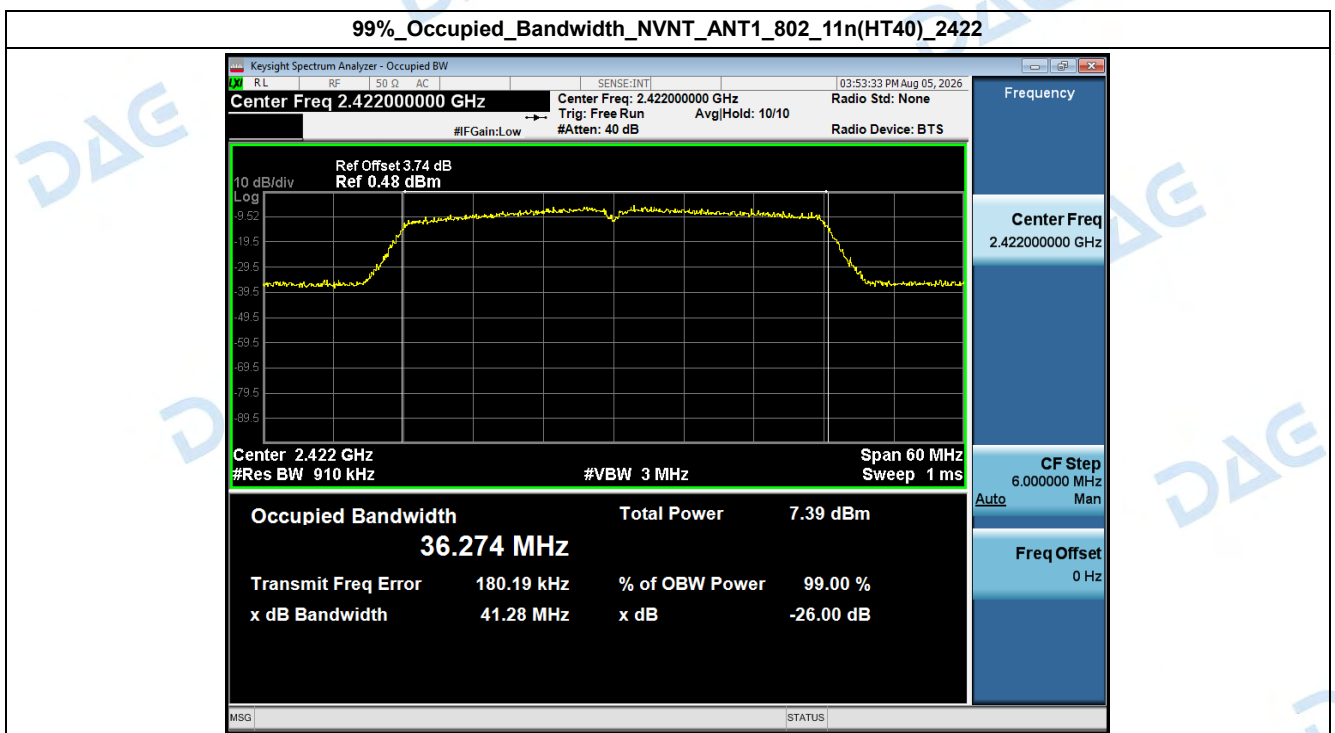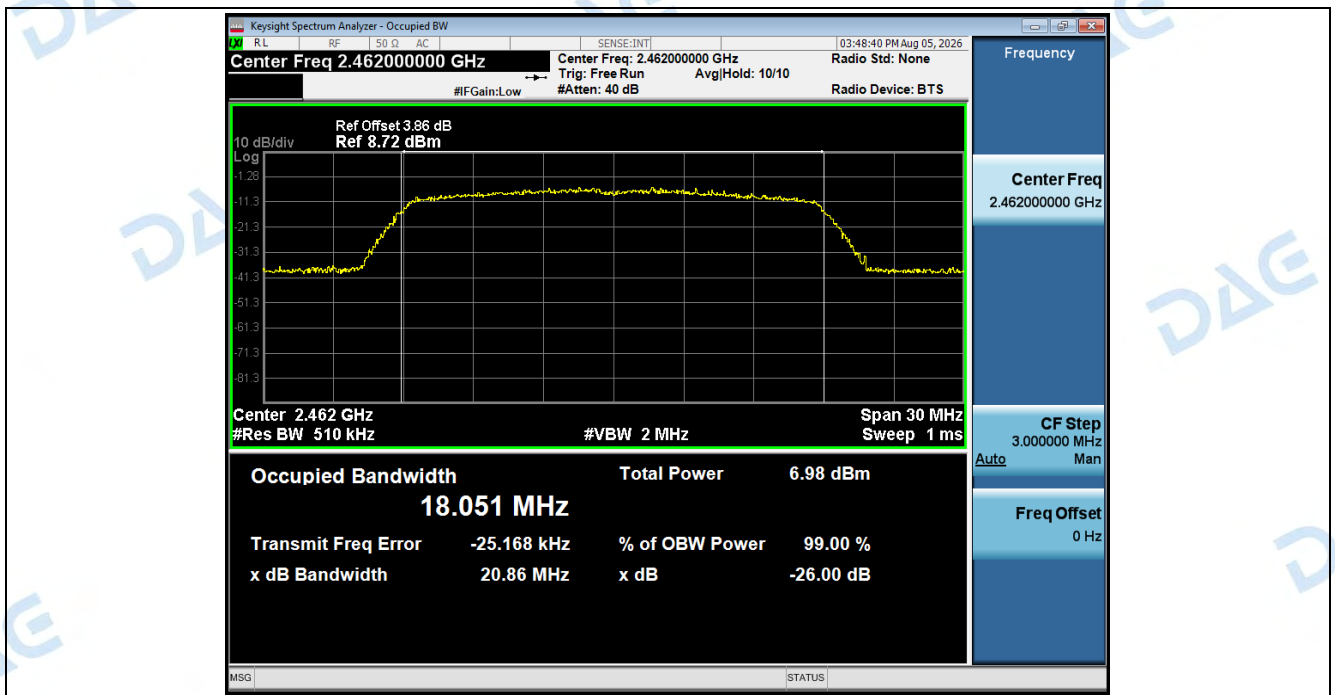

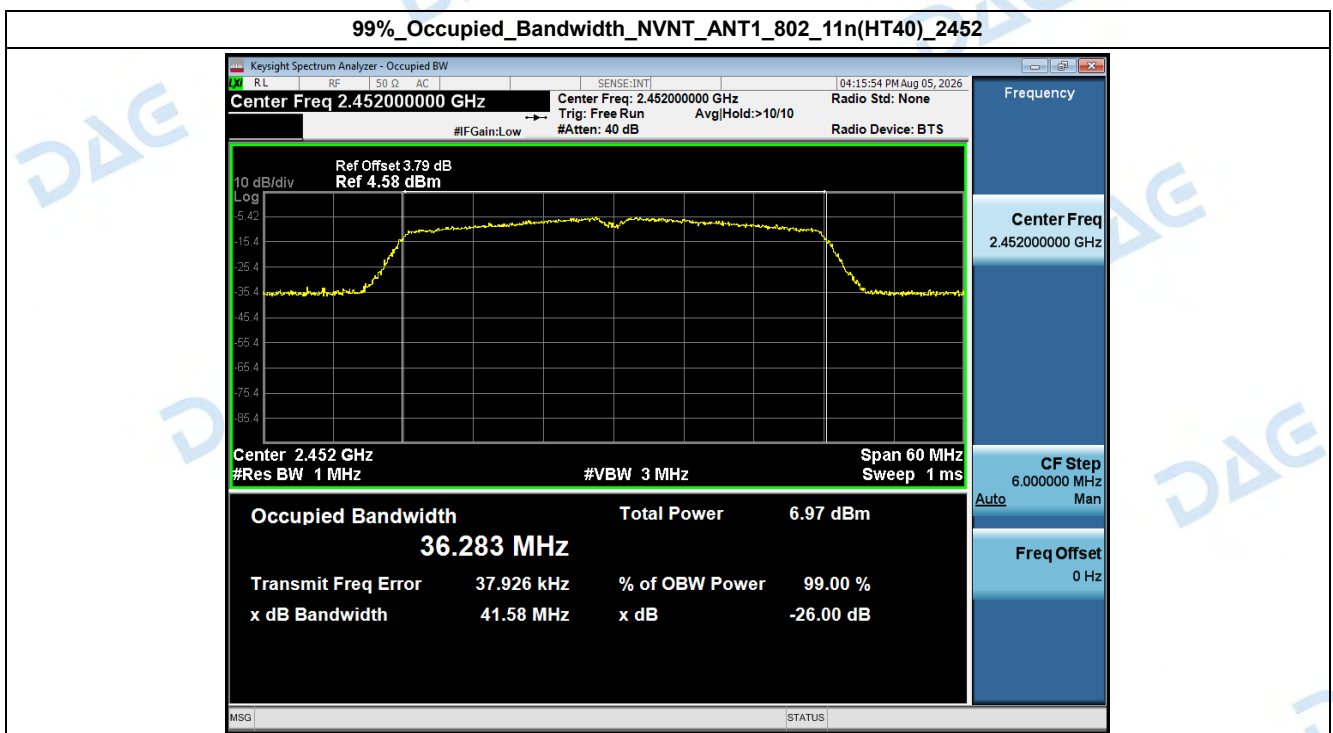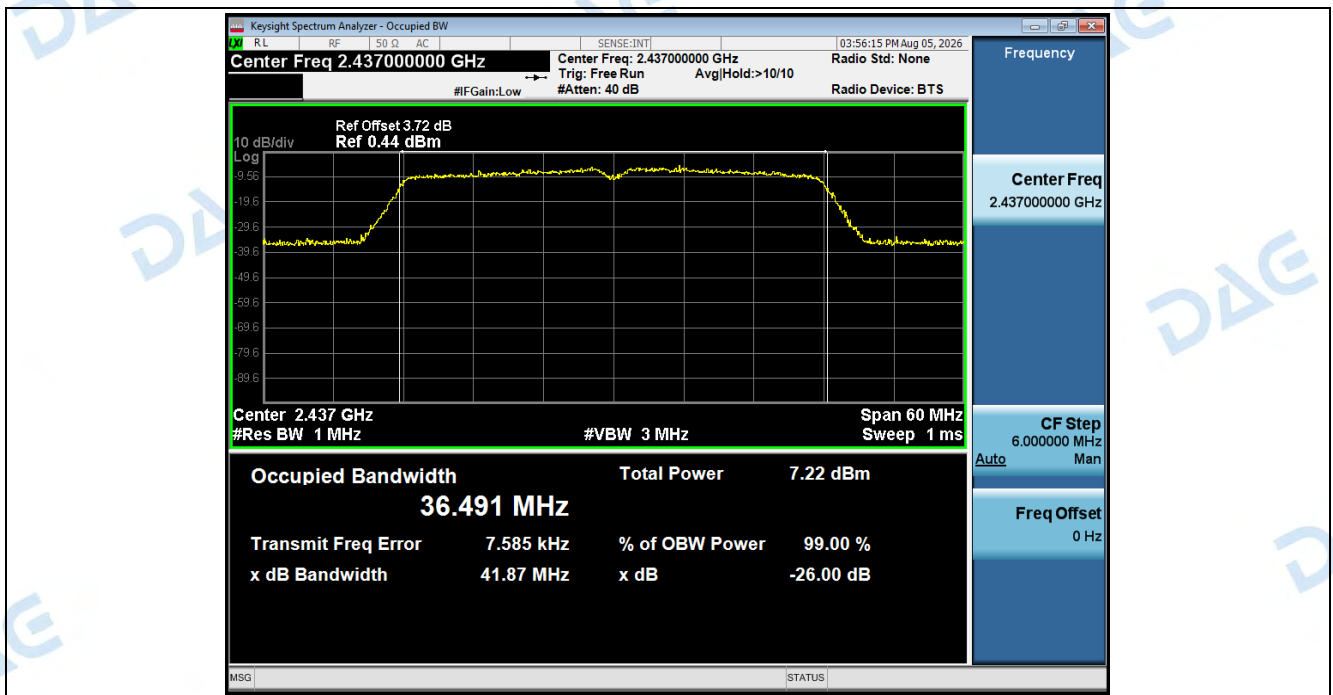

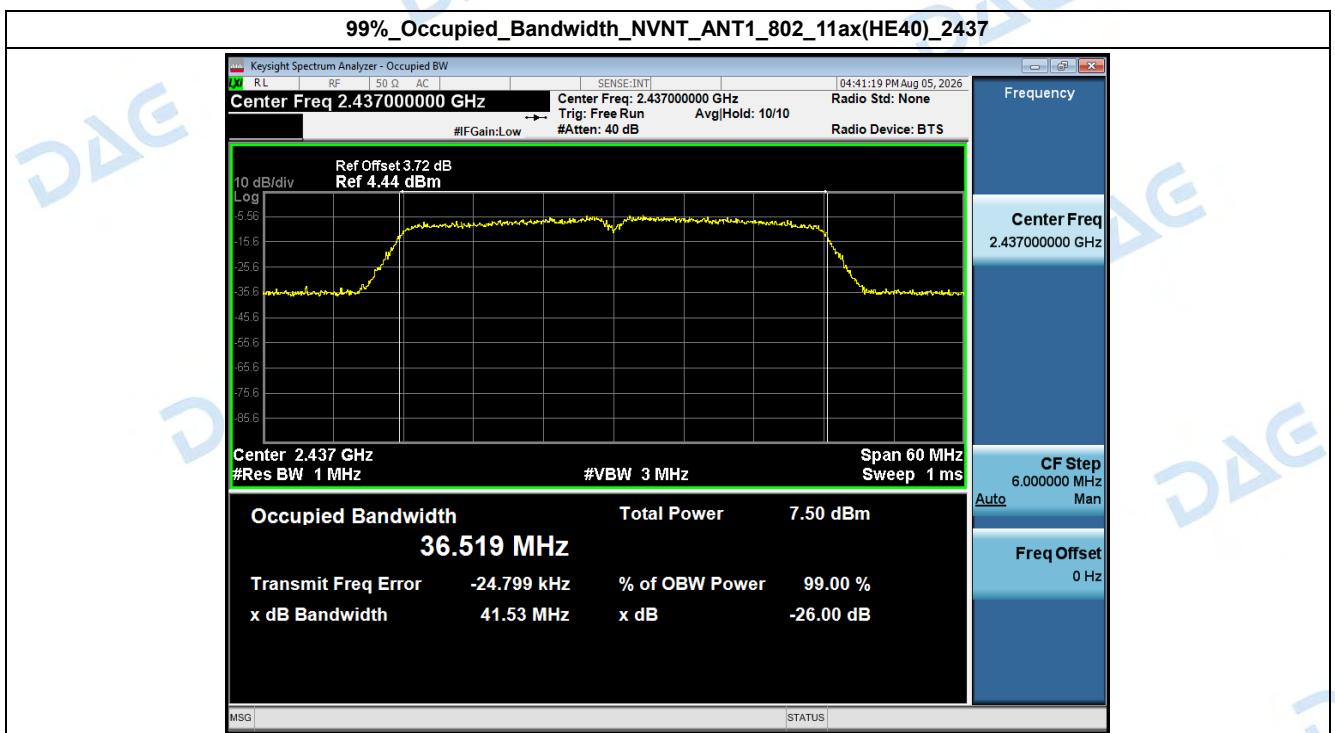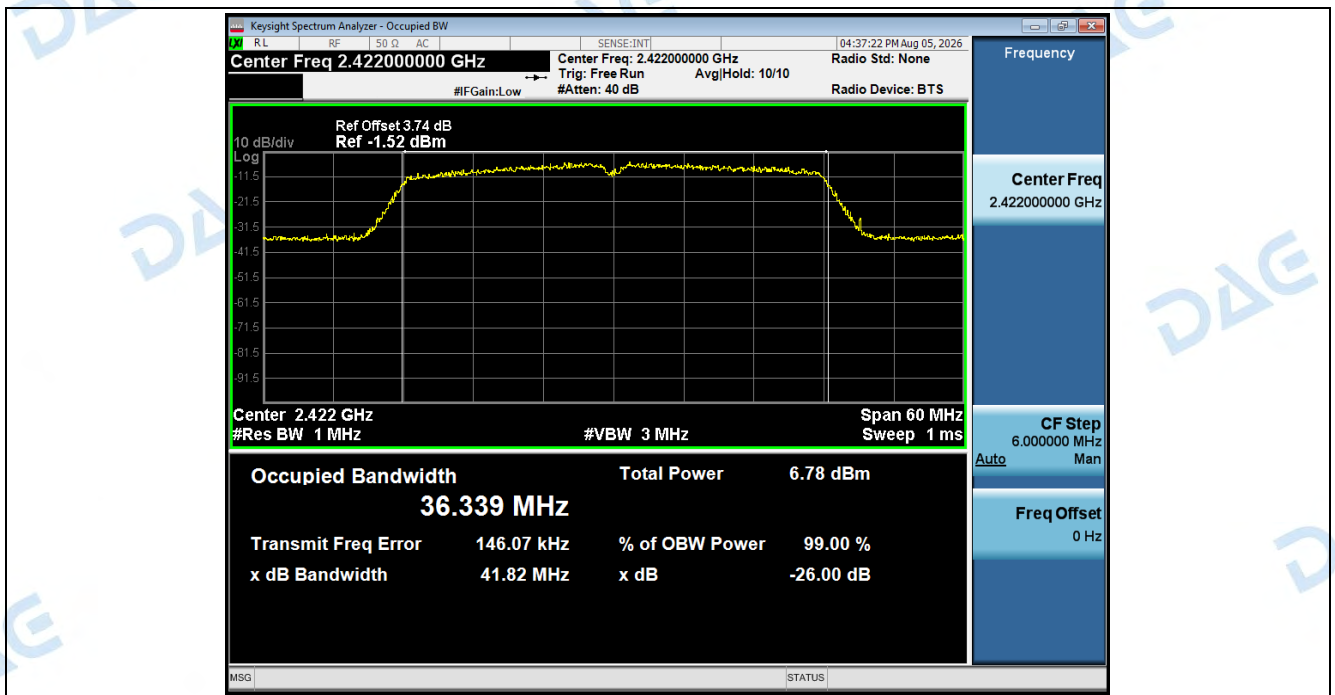


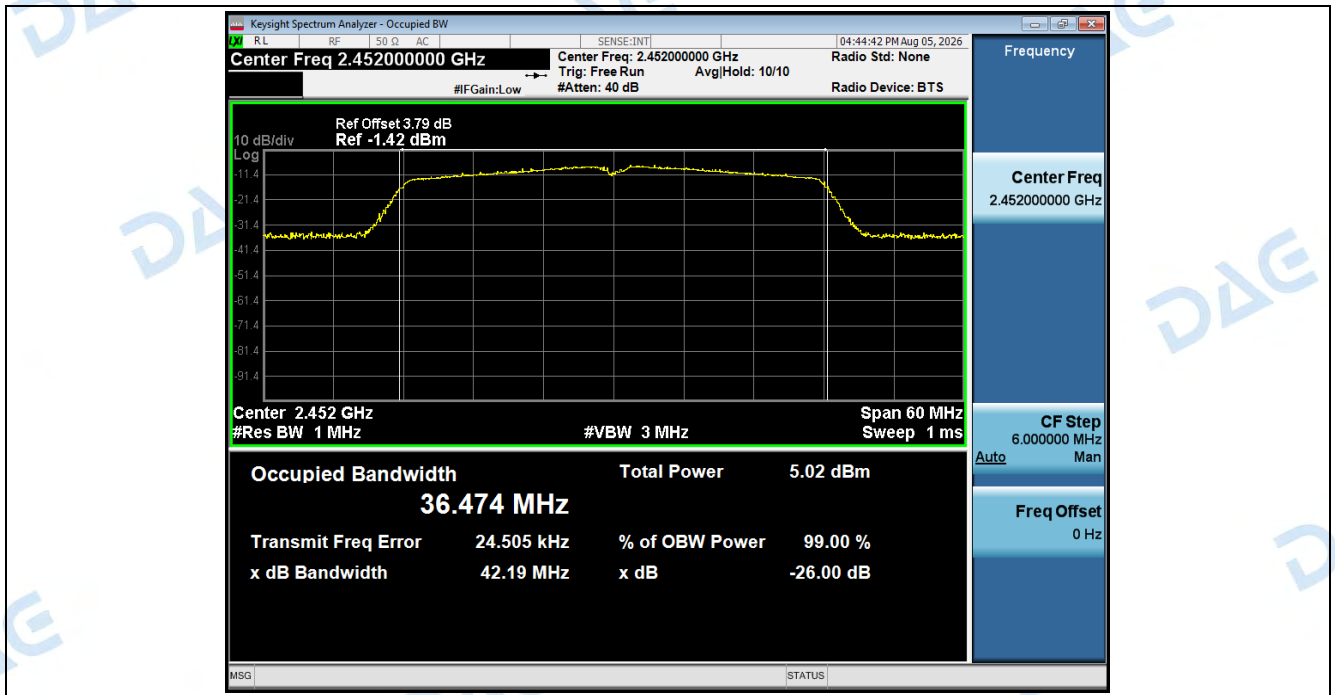



3. Duty Cycle



Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT1	802.11b	2412.00	98.36	0.00
NVNT	ANT1	802.11b	2437.00	98.36	0.00
NVNT	ANT1	802.11b	2462.00	98.36	0.00
NVNT	ANT1	802.11g	2412.00	92.11	0.36
NVNT	ANT1	802.11g	2437.00	93.42	0.30
NVNT	ANT1	802.11g	2462.00	90.79	0.42
NVNT	ANT1	802.11n(HT20)	2412.00	92.96	0.32
NVNT	ANT1	802.11n(HT20)	2437.00	92.96	0.32
NVNT	ANT1	802.11n(HT20)	2462.00	92.96	0.32
NVNT	ANT1	802.11ax(HE20)	2412.00	91.67	0.38
NVNT	ANT1	802.11ax(HE20)	2437.00	91.67	0.38
NVNT	ANT1	802.11ax(HE20)	2462.00	93.06	0.31
NVNT	ANT1	802.11n(HT40)	2422.00	87.18	0.60
NVNT	ANT1	802.11n(HT40)	2437.00	84.62	0.73
NVNT	ANT1	802.11n(HT40)	2452.00	84.62	0.73
NVNT	ANT1	802.11ax(HE40)	2422.00	87.18	0.60
NVNT	ANT1	802.11ax(HE40)	2437.00	91.89	0.37
NVNT	ANT1	802.11ax(HE40)	2452.00	87.18	0.60



Duty_Cycle_NVNT_ANT1_802_11b_2412

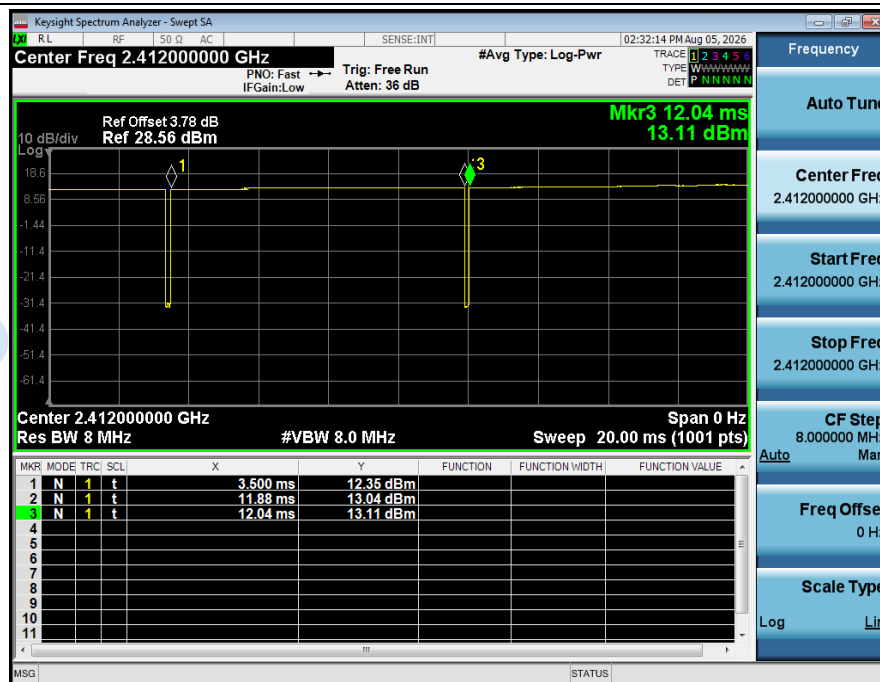



Duty_Cycle_NVNT_ANT1_802_11b_2437

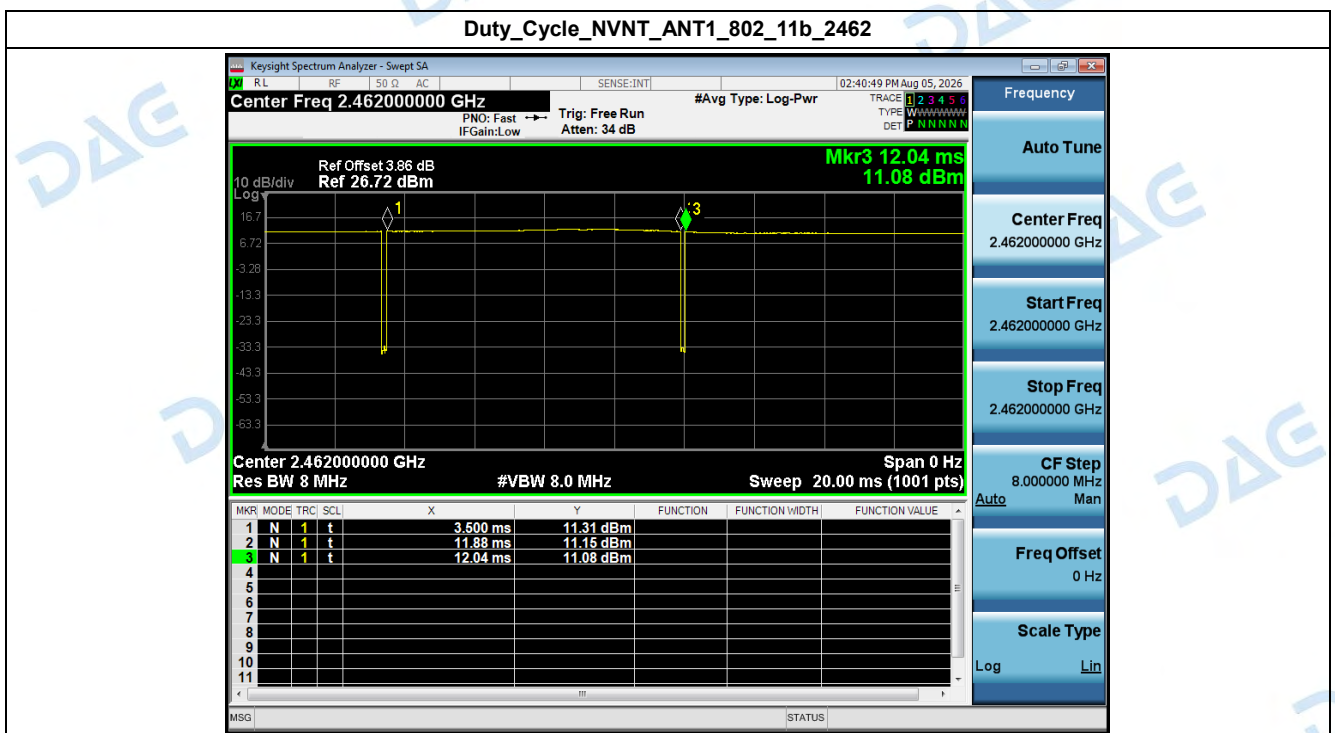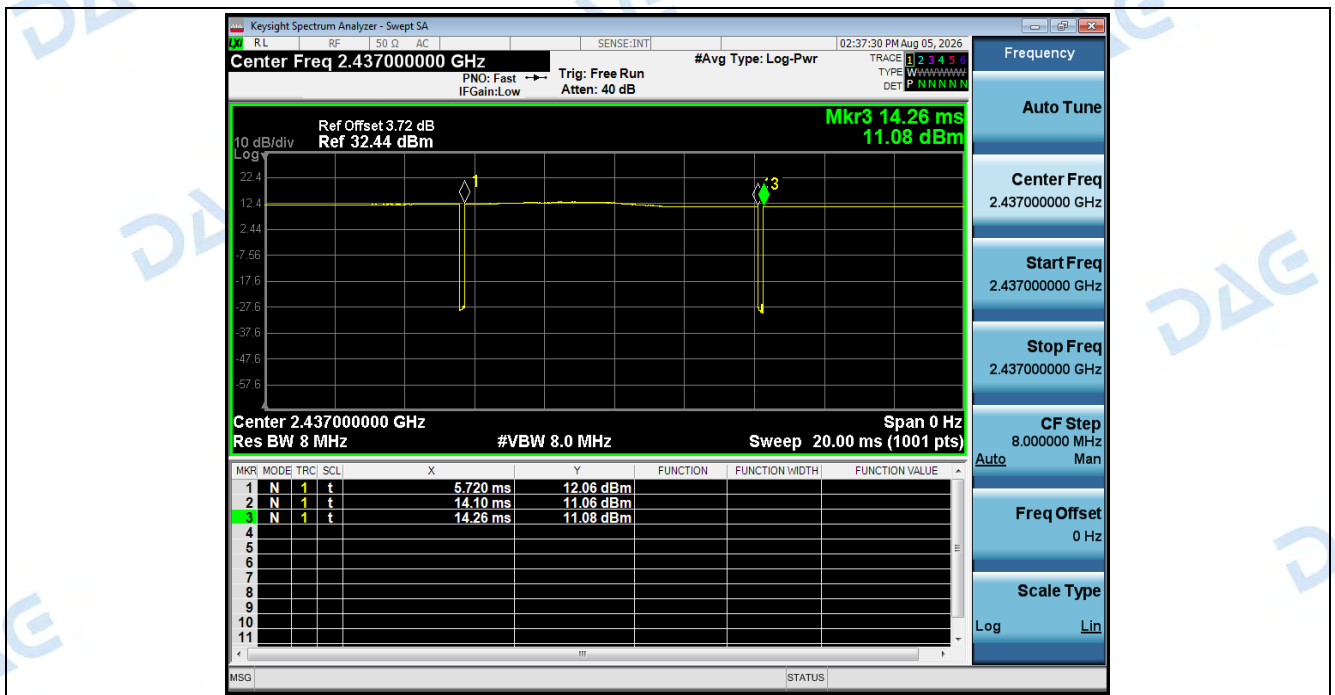

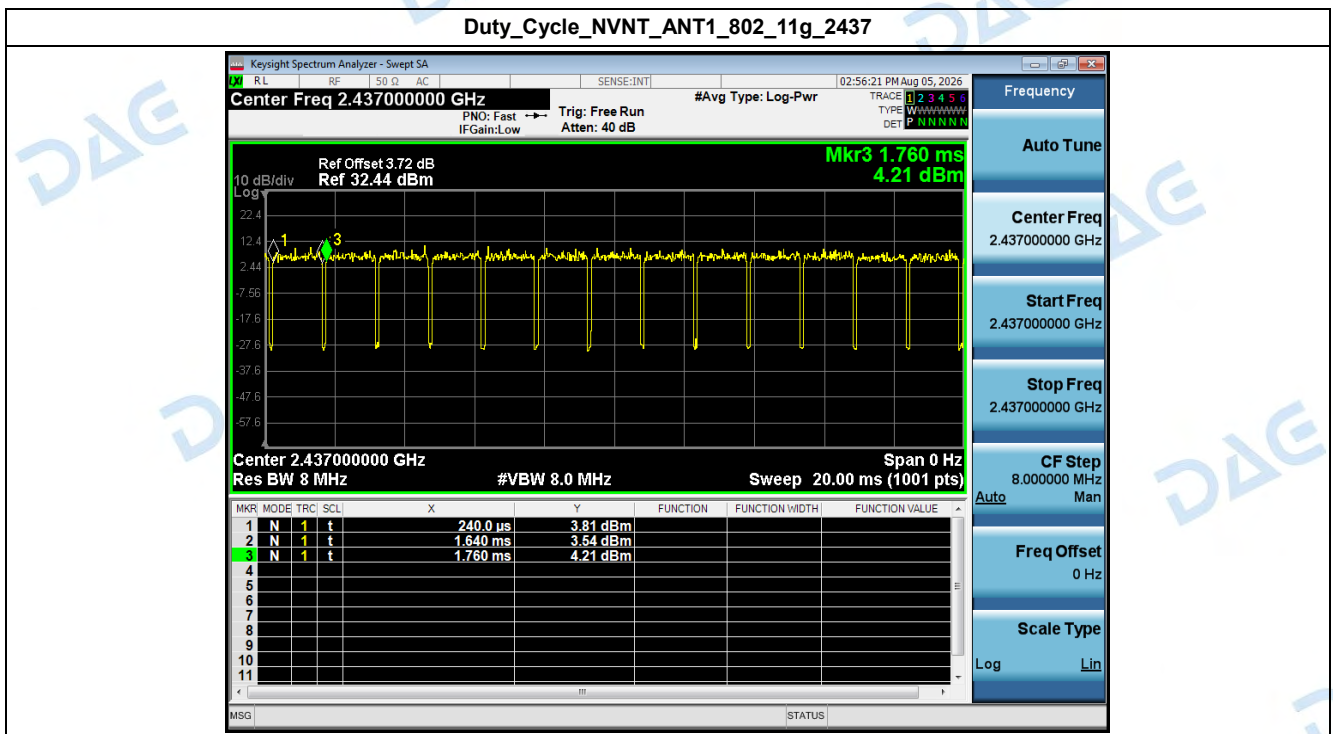
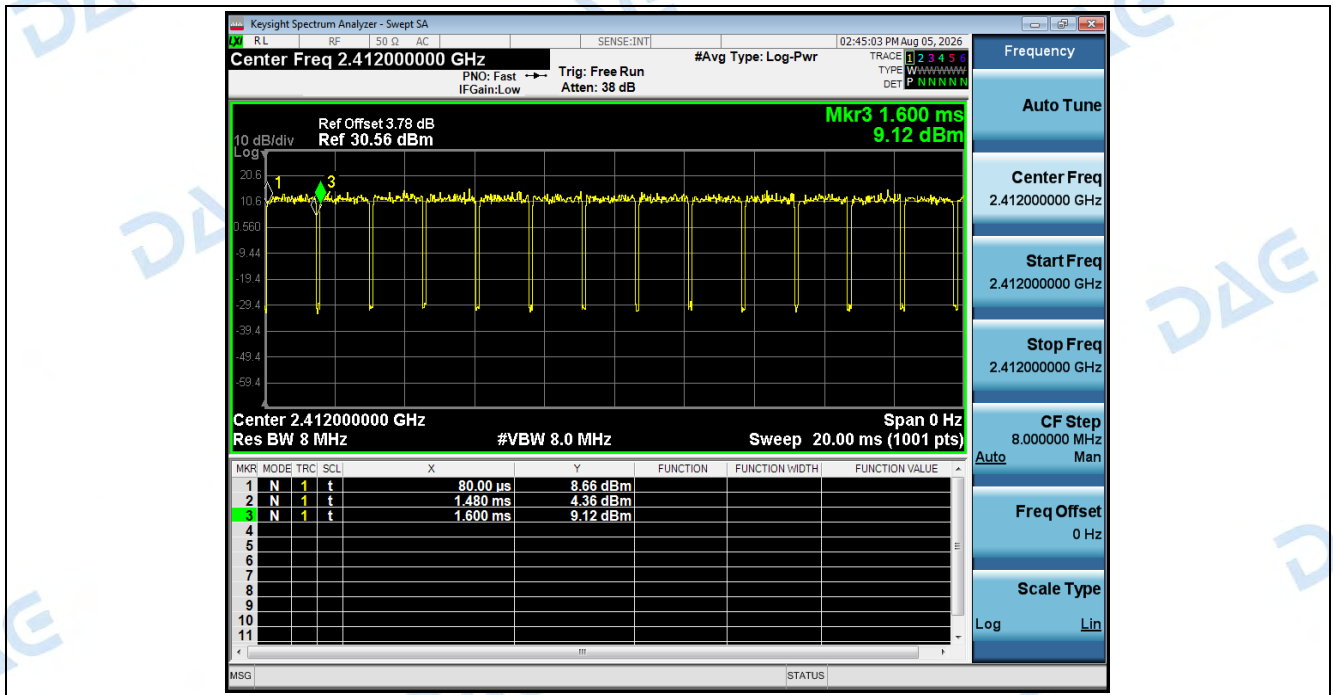


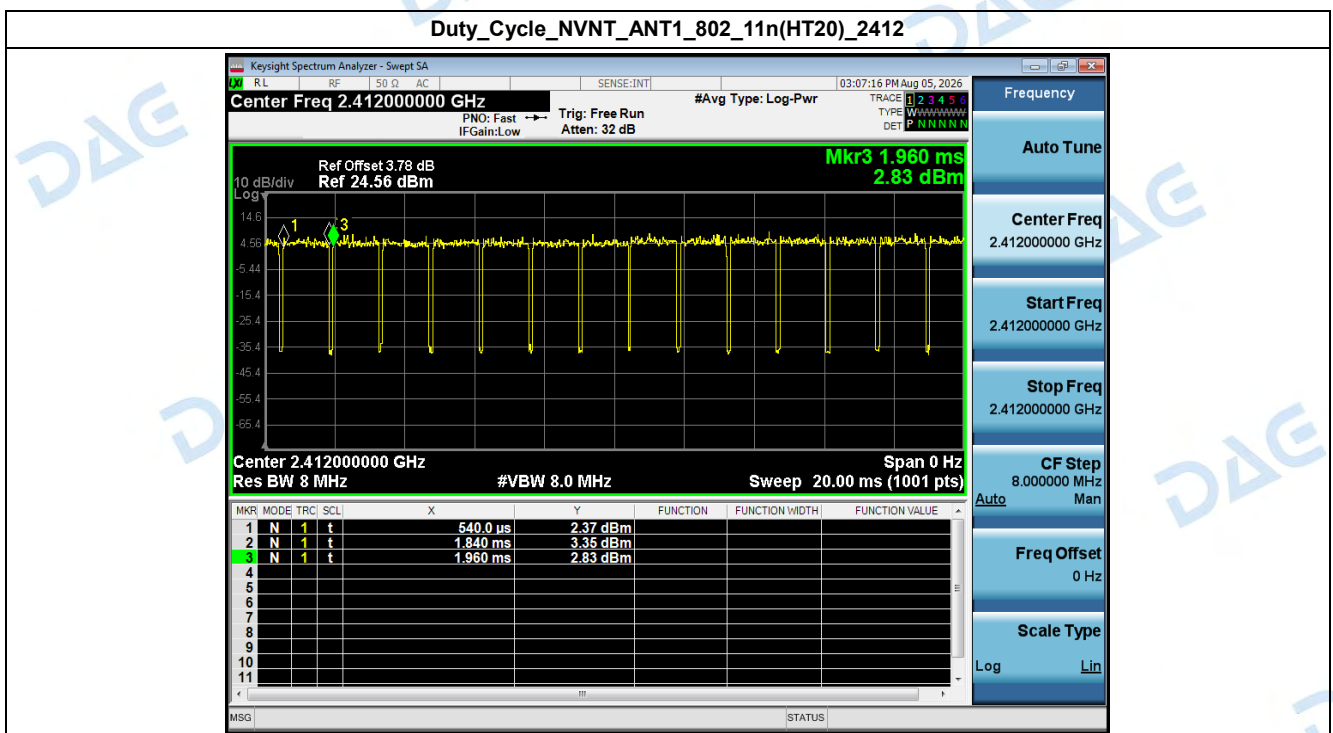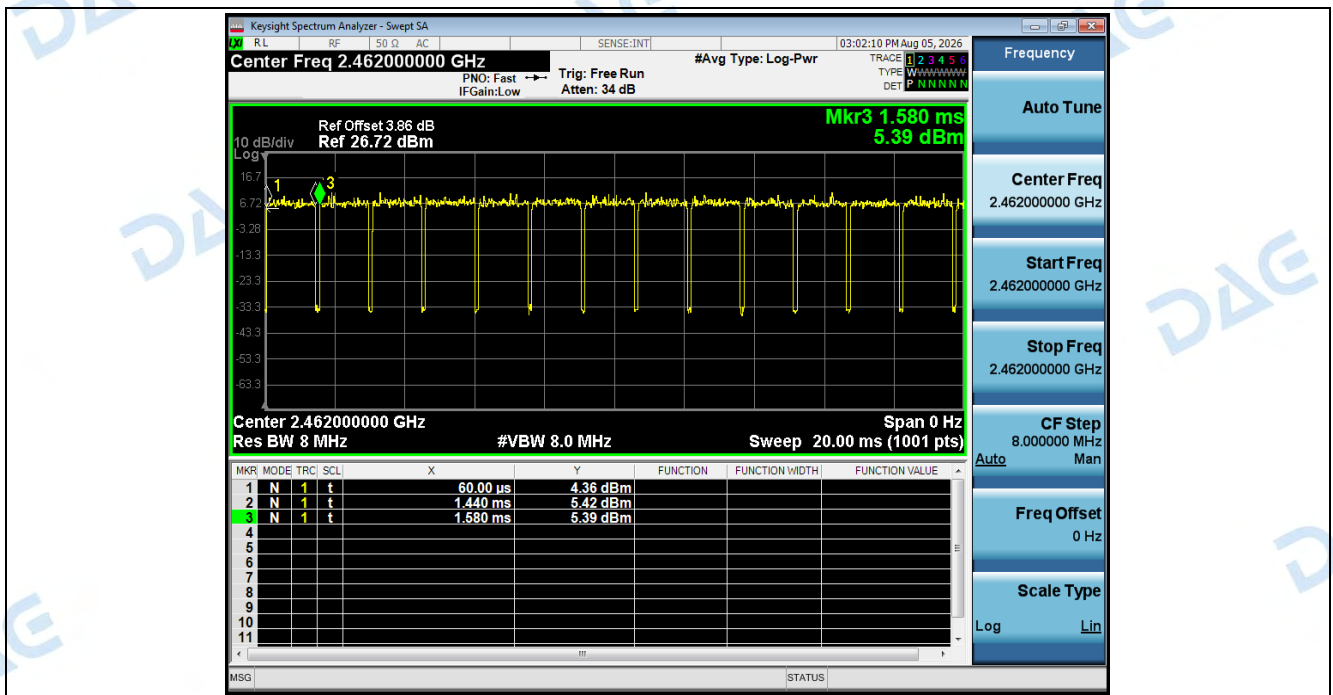




Duty_Cycle_NVNT_ANT1_802_11n(HT20)_2437

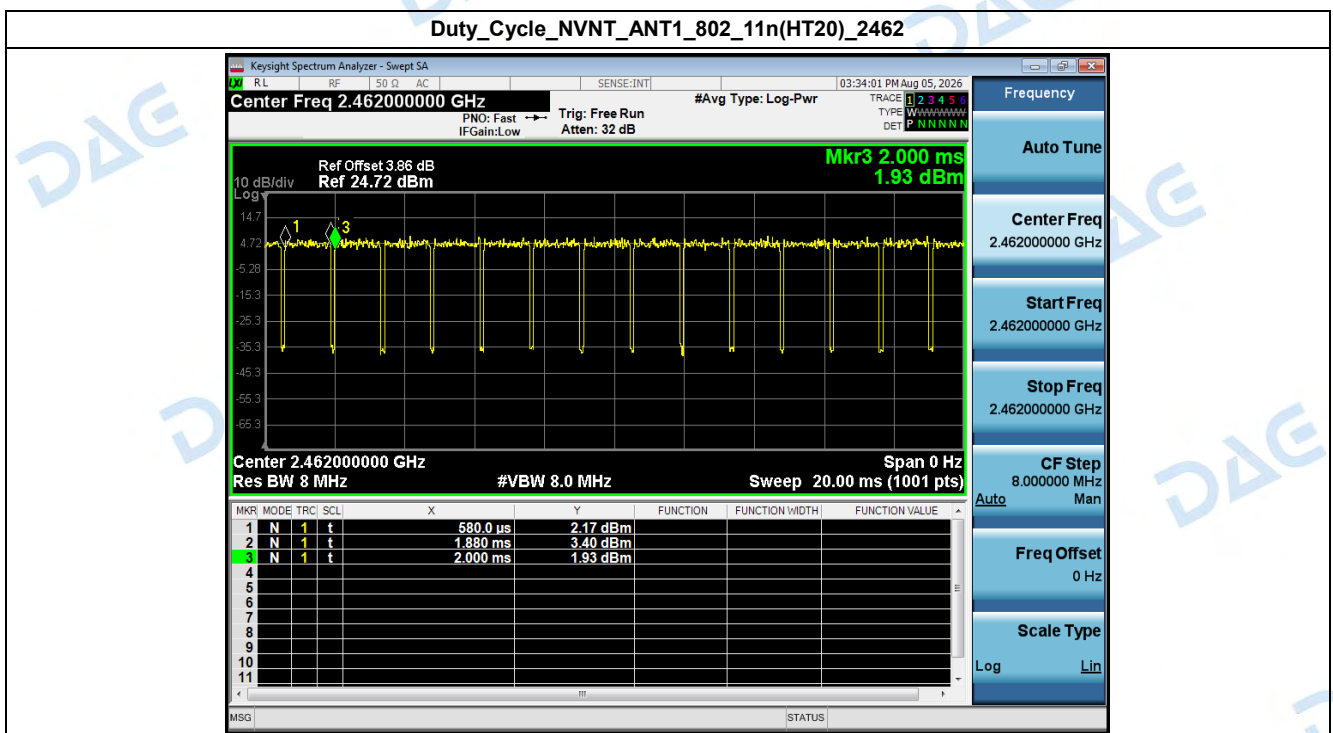
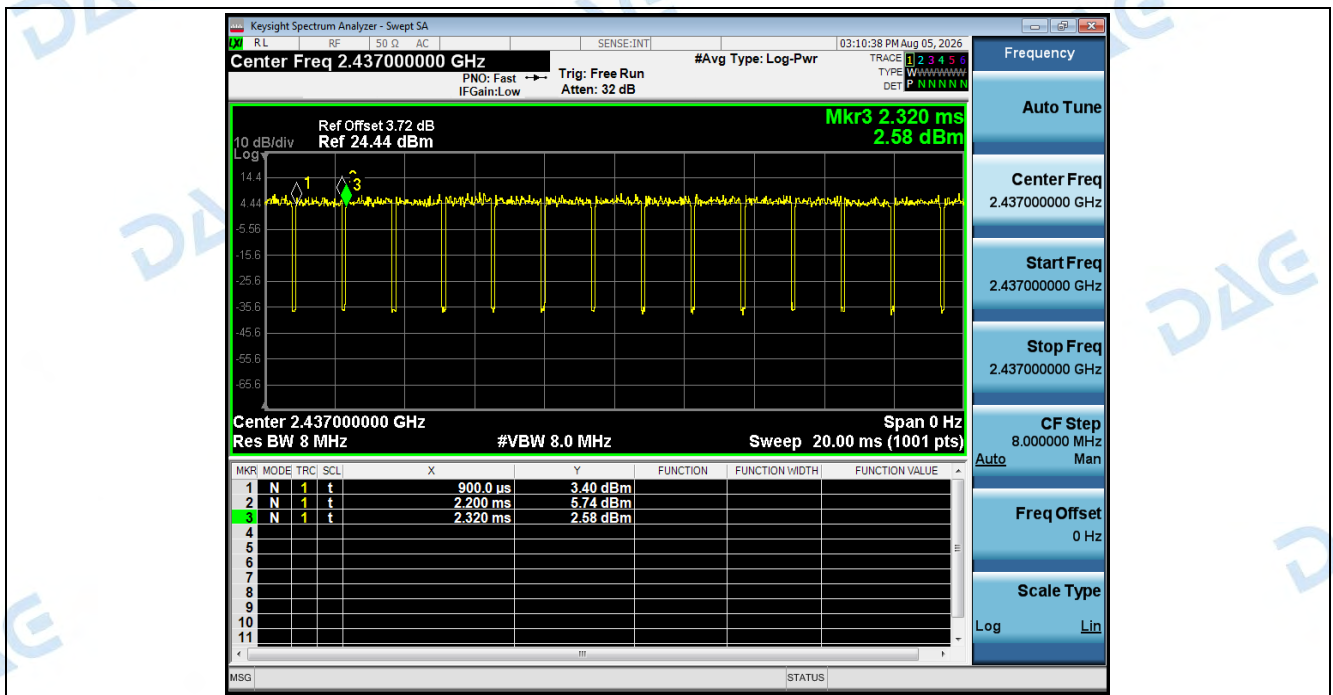


Duty_Cycle_NVNT_ANT1_802_11ax(HE20)_2412

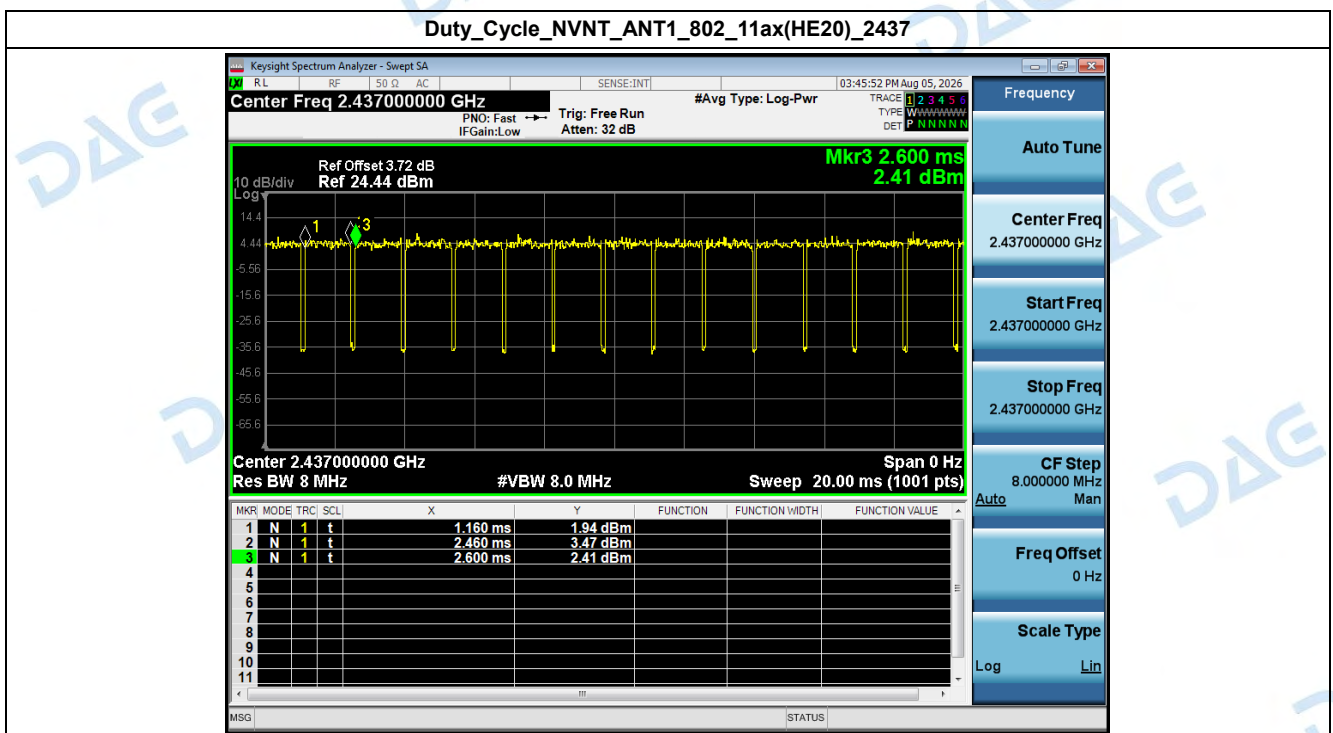
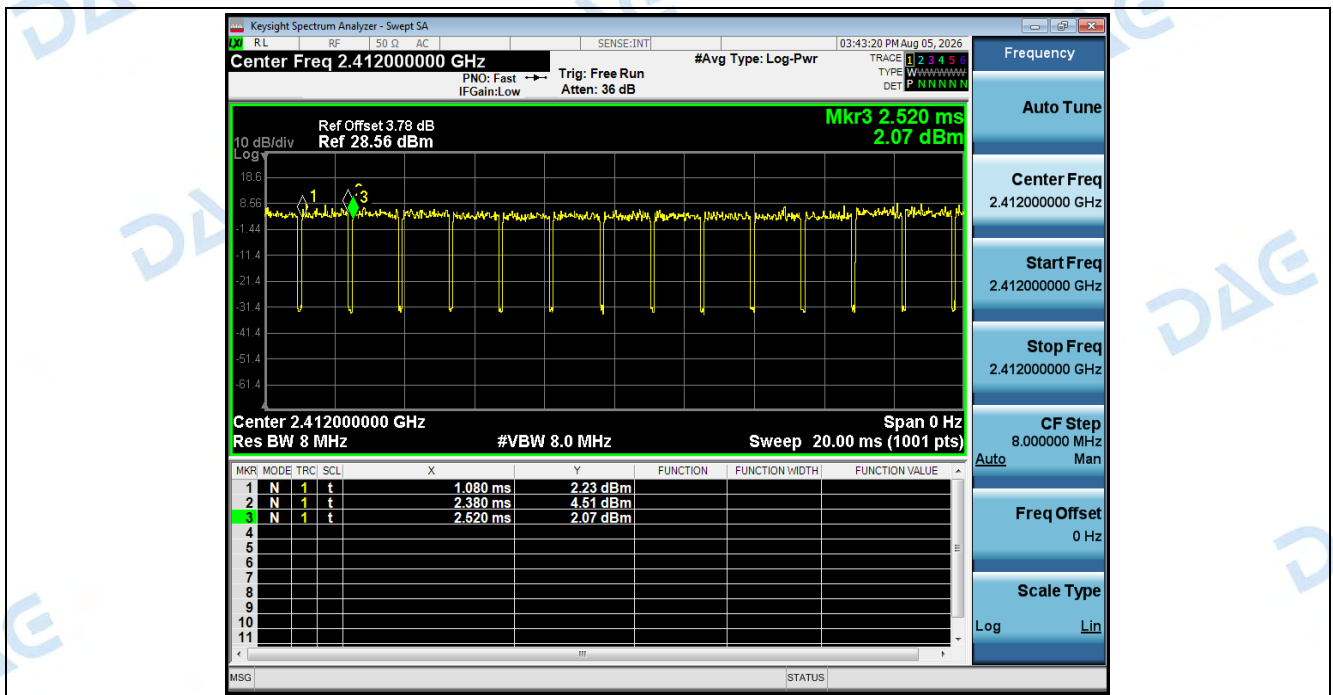


Duty_Cycle_NVNT_ANT1_802_11ax(HE20)_2462

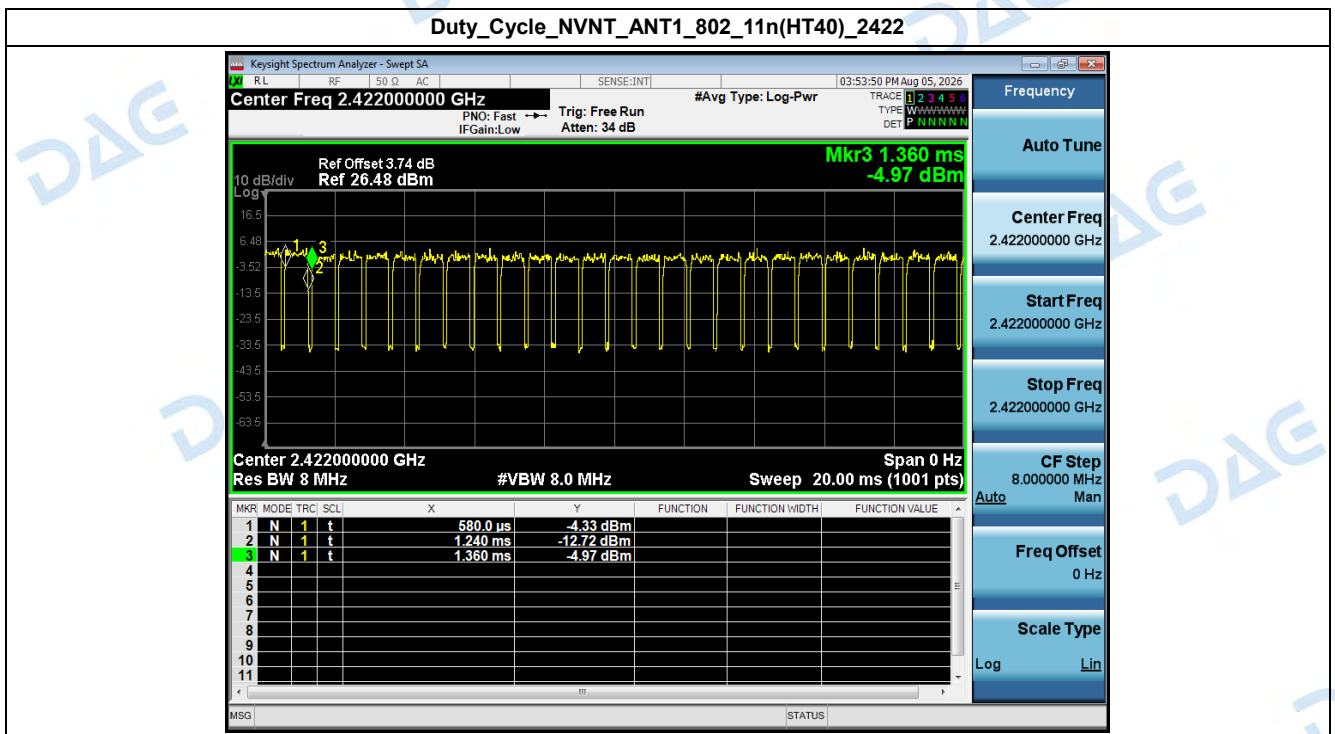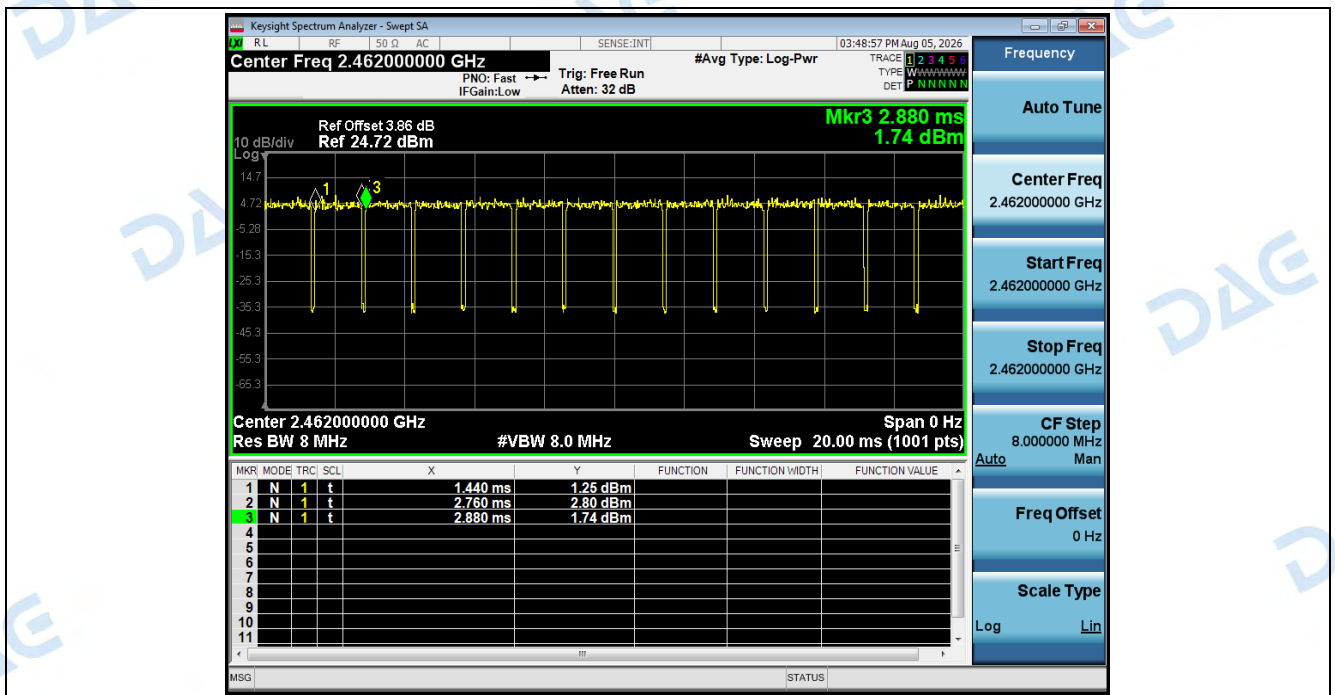


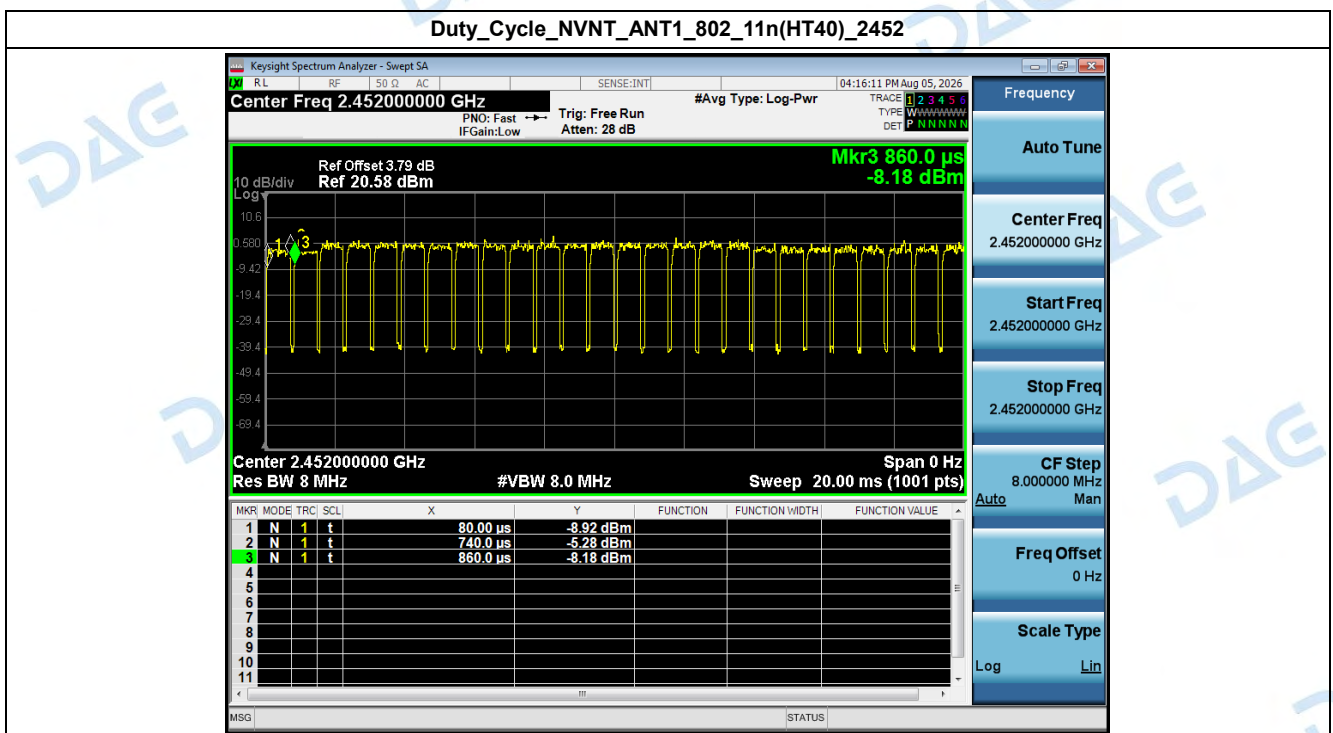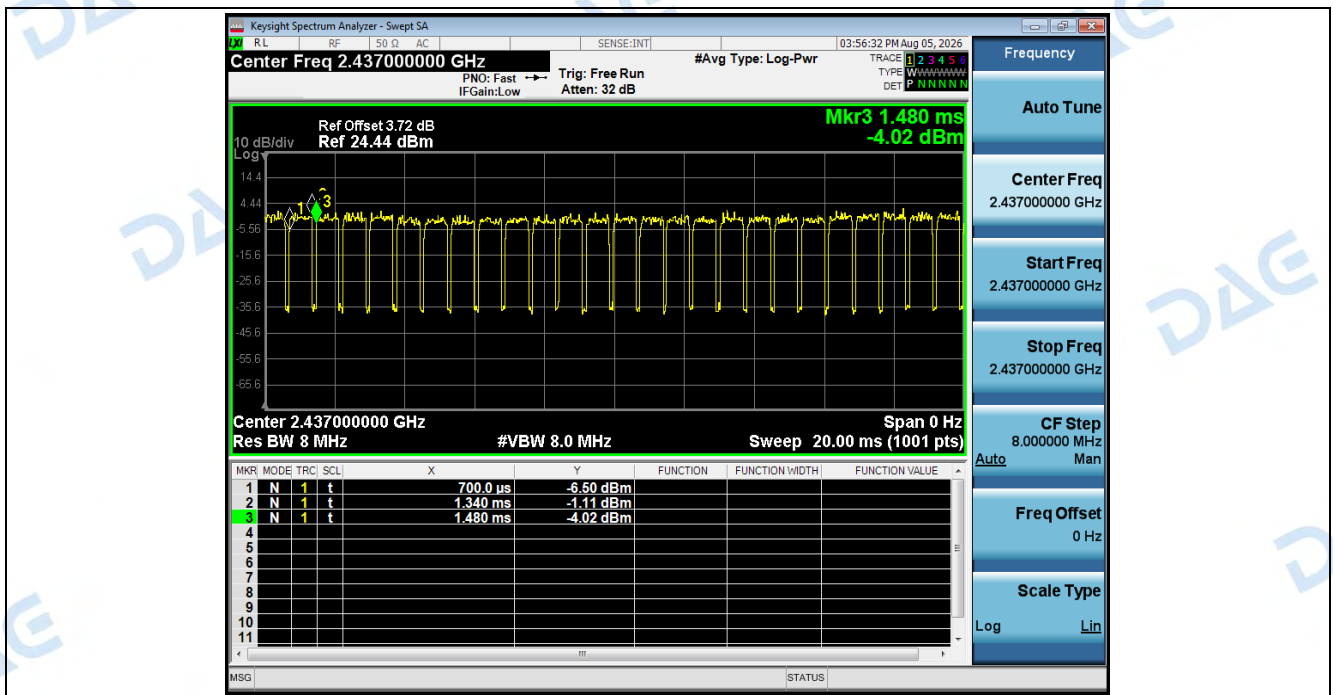

Duty_Cycle_NVNT_ANT1_802_11ax(HE40)_2422

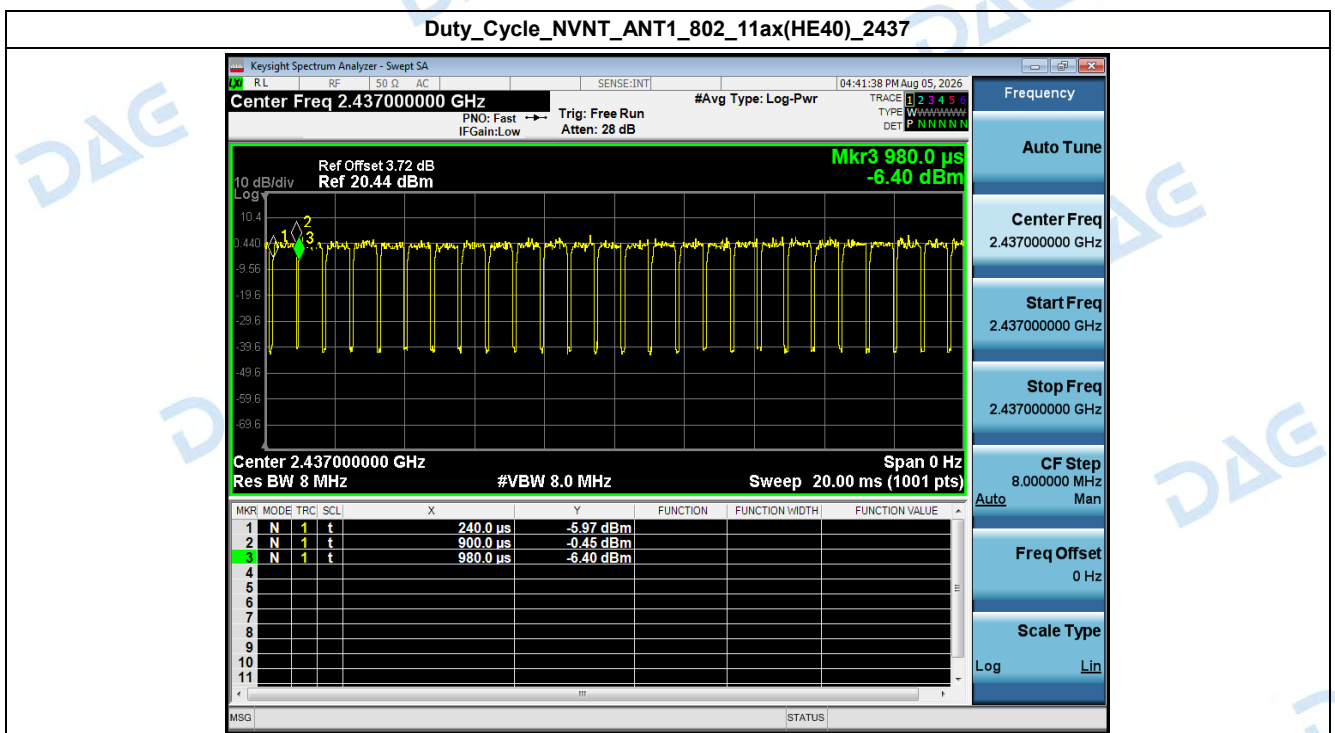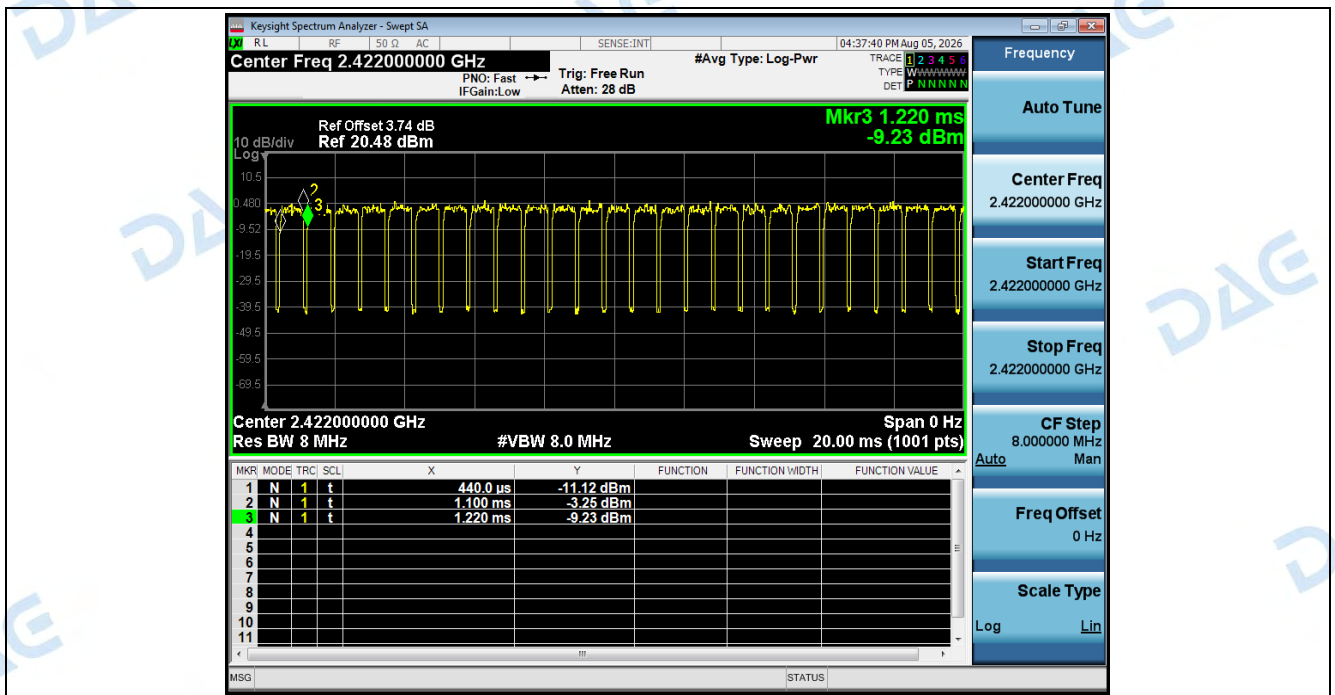

Duty_Cycle_NVNT_ANT1_802_11ax(HE40)_2452

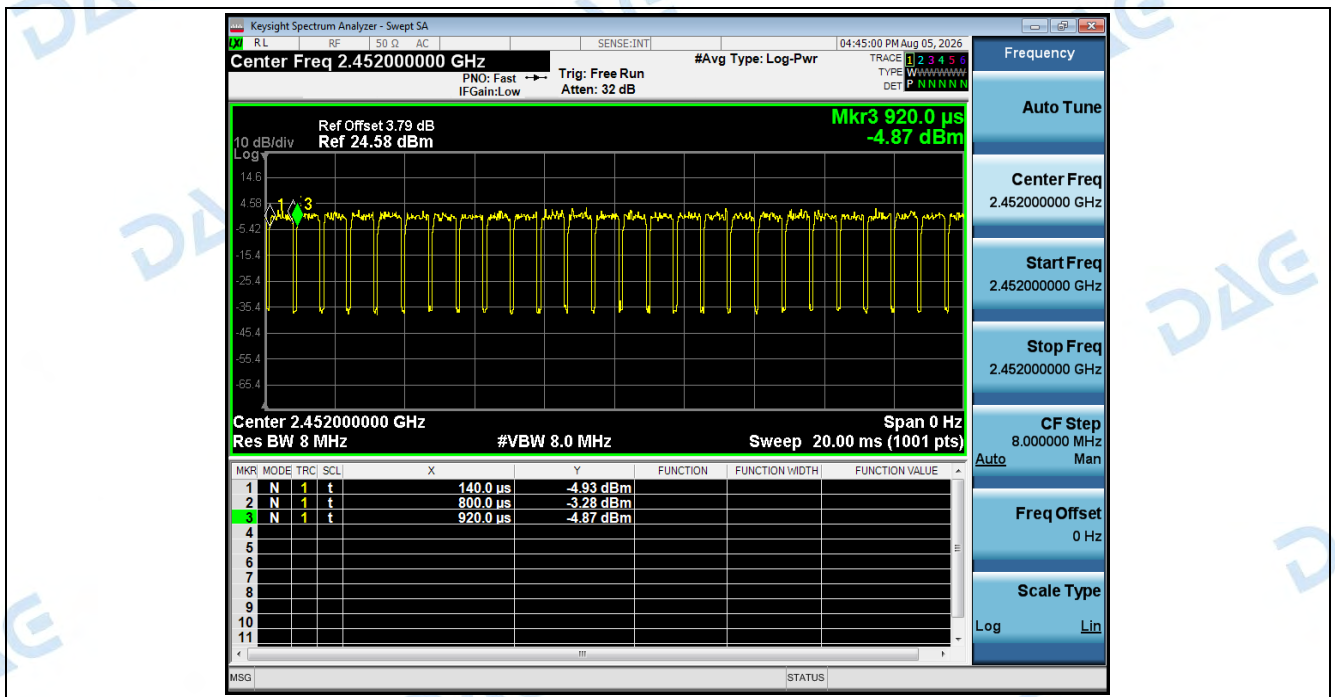


4. MAX. Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Detector	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	8.58	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	8.51	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	8.67	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	8.04	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	8.15	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	8.45	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	7.58	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	7.59	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	7.13	30	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	Peak	6.84	30	Pass
NVNT	ANT1	802.11ax(HE20)	2437.00	Peak	6.21	30	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	Peak	6.46	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	Peak	5.81	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	Peak	5.76	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	Peak	5.58	30	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	Peak	4.85	30	Pass
NVNT	ANT1	802.11ax(HE40)	2437.00	Peak	4.53	30	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	Peak	3.81	30	Pass



5. Power Spectral Density

Condition	Antenna	Modulation	Frequency (MHz)	SA_PSD(dBm/30kHz)	Duty factor(dB)	RB factor(dB)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	-1.93	N/A	-10.00	-11.93	8	Pass
NVNT	ANT1	802.11b	2437.00	-4.49	N/A	-10.00	-14.49	8	Pass
NVNT	ANT1	802.11b	2462.00	-4.79	N/A	-10.00	-14.79	8	Pass
NVNT	ANT1	802.11g	2412.00	-10.96	N/A	-10.00	-20.96	8	Pass
NVNT	ANT1	802.11g	2437.00	-13.35	N/A	-10.00	-23.35	8	Pass
NVNT	ANT1	802.11g	2462.00	-13.01	N/A	-10.00	-23.01	8	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	-14.06	N/A	-10.00	-24.06	8	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	-15.35	N/A	-10.00	-25.35	8	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	-14.53	N/A	-10.00	-24.53	8	Pass
NVNT	ANT1	802.11ax(HE20)	2412.00	-15.75	N/A	-10.00	-25.75	8	Pass
NVNT	ANT1	802.11ax(HE20)	2437.00	-15.10	N/A	-10.00	-25.10	8	Pass
NVNT	ANT1	802.11ax(HE20)	2462.00	-15.02	N/A	-10.00	-25.02	8	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	-16.37	N/A	-10.00	-26.37	8	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	-19.73	N/A	-10.00	-29.73	8	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	-18.28	N/A	-10.00	-28.28	8	Pass
NVNT	ANT1	802.11ax(HE40)	2422.00	-17.61	N/A	-10.00	-27.61	8	Pass
NVNT	ANT1	802.11ax(HE40)	2437.00	-19.91	N/A	-10.00	-29.91	8	Pass
NVNT	ANT1	802.11ax(HE40)	2452.00	-21.36	N/A	-10.00	-31.36	8	Pass


Power_Spectral_Density_NVNT_ANT1_802_11b_2412

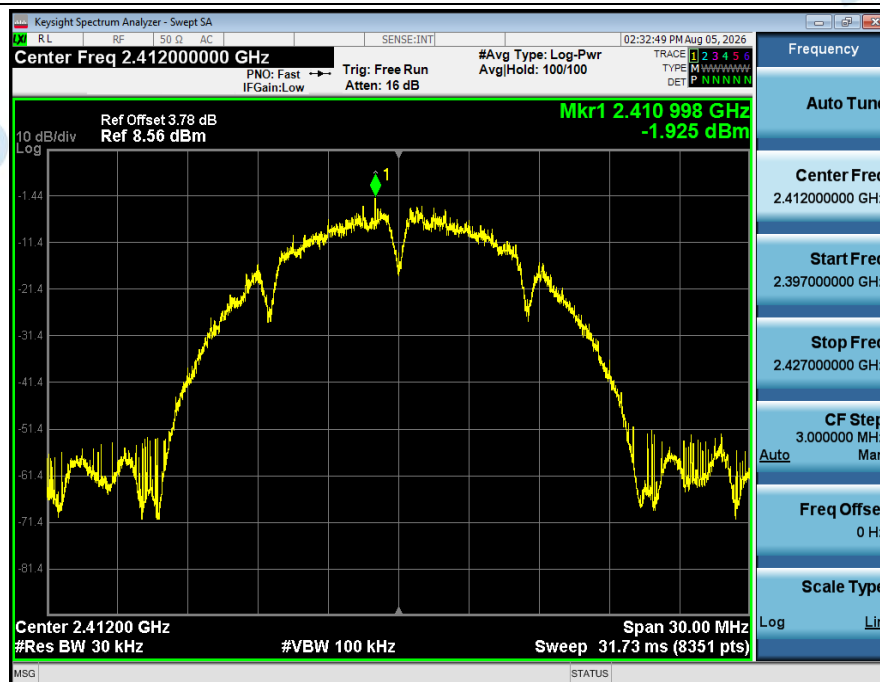


Power_Spectral_Density_NVNT_ANT1_802_11b_2437

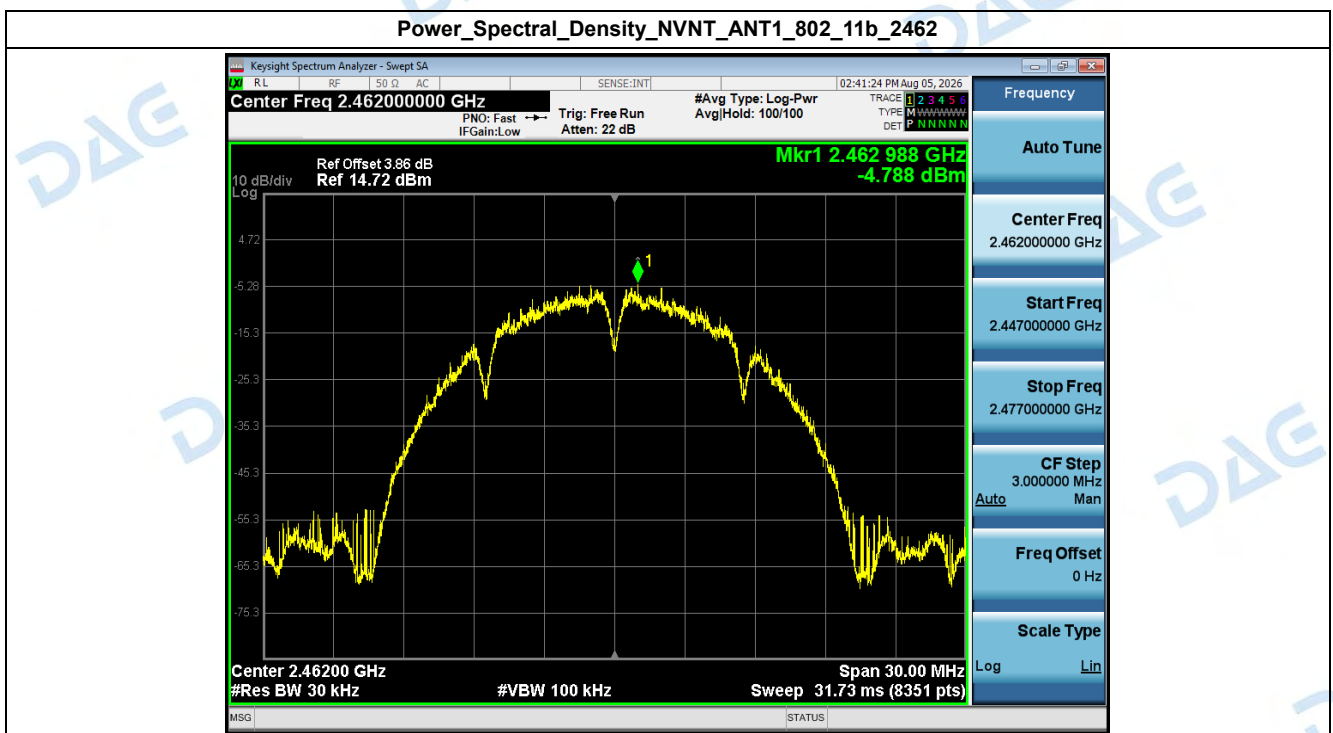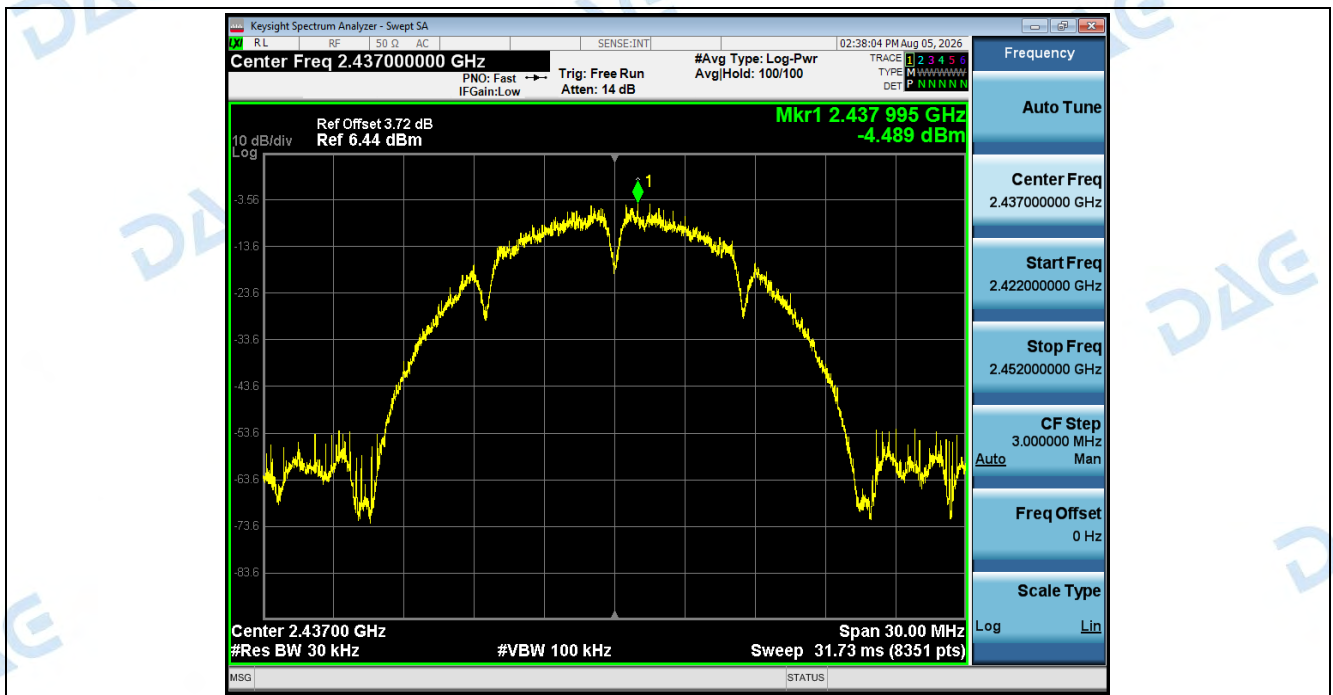



Power_Spectral_Density_NVNT_ANT1_802_11g_2412

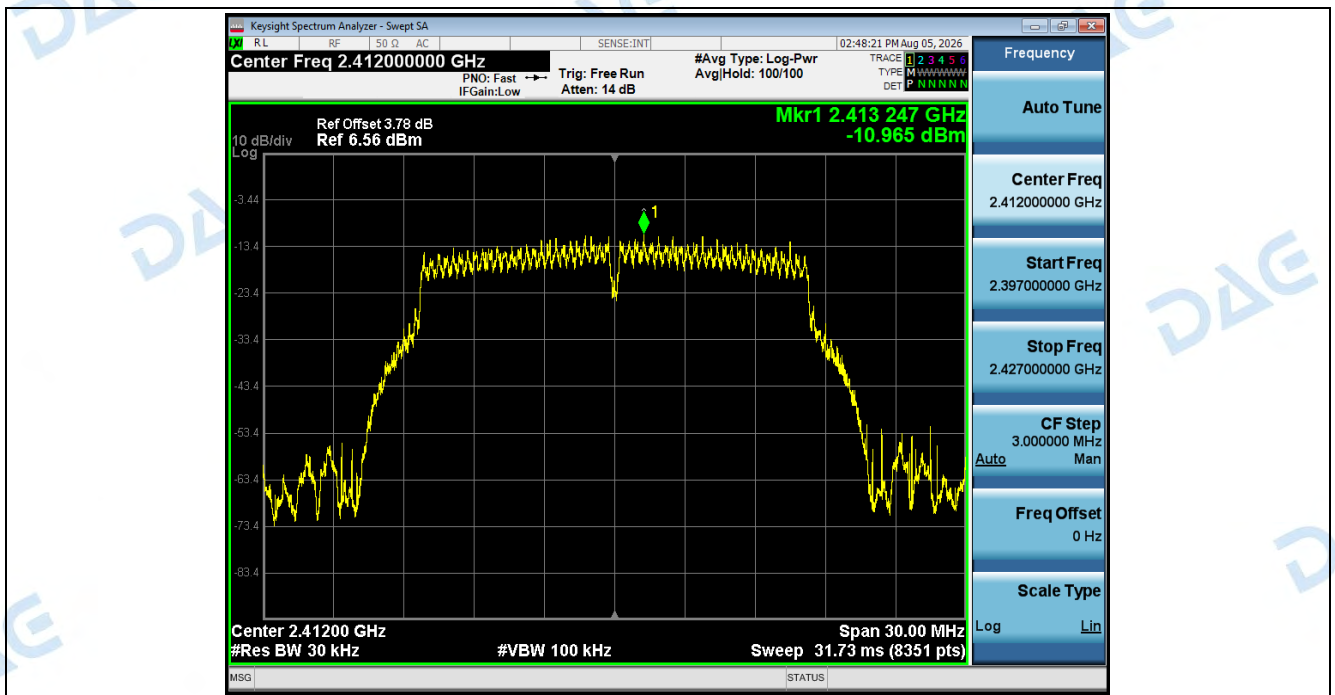



Power_Spectral_Density_NVNT_ANT1_802_11g_2437

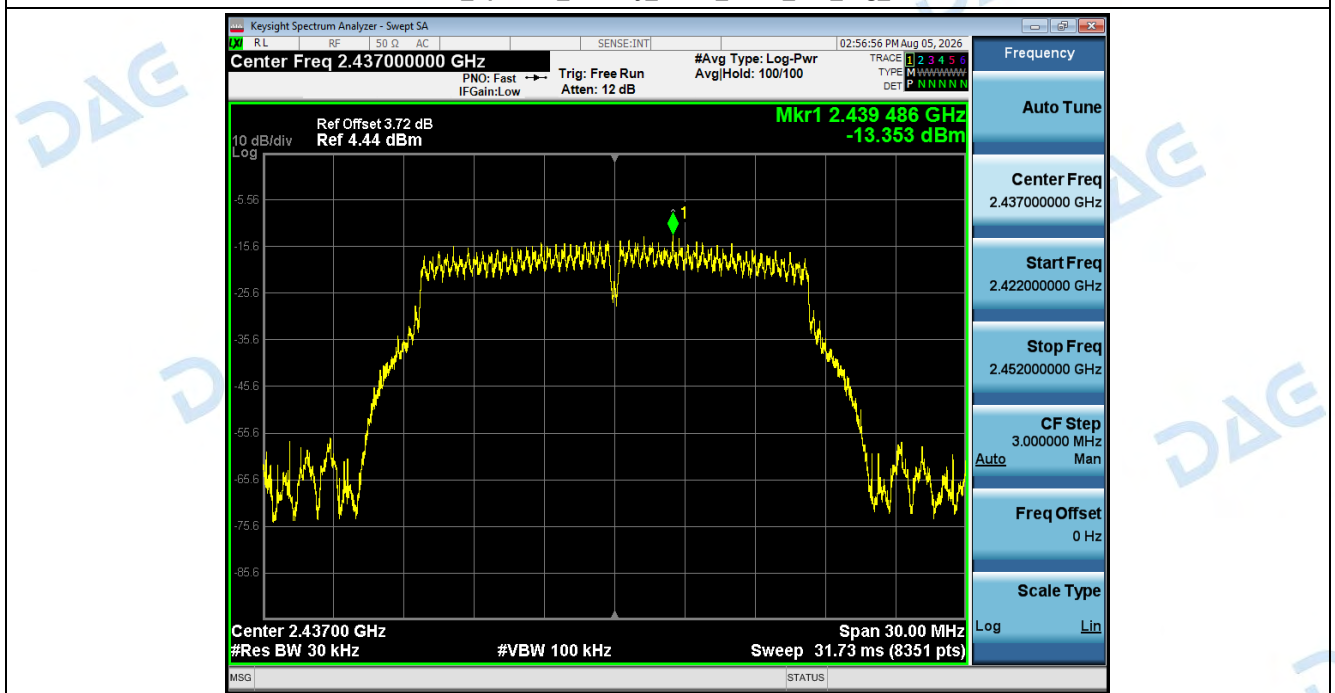



Power_Spectral_Density_NVNT_ANT1_802_11g_2462

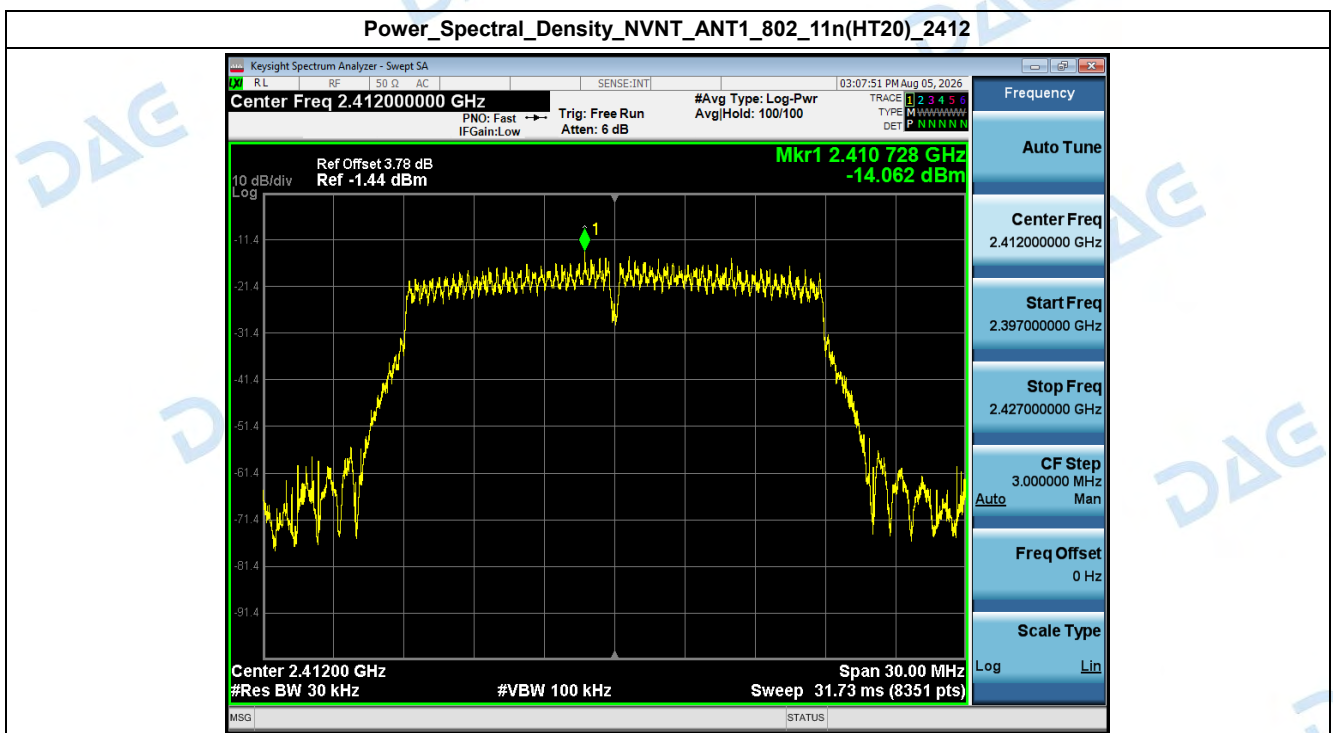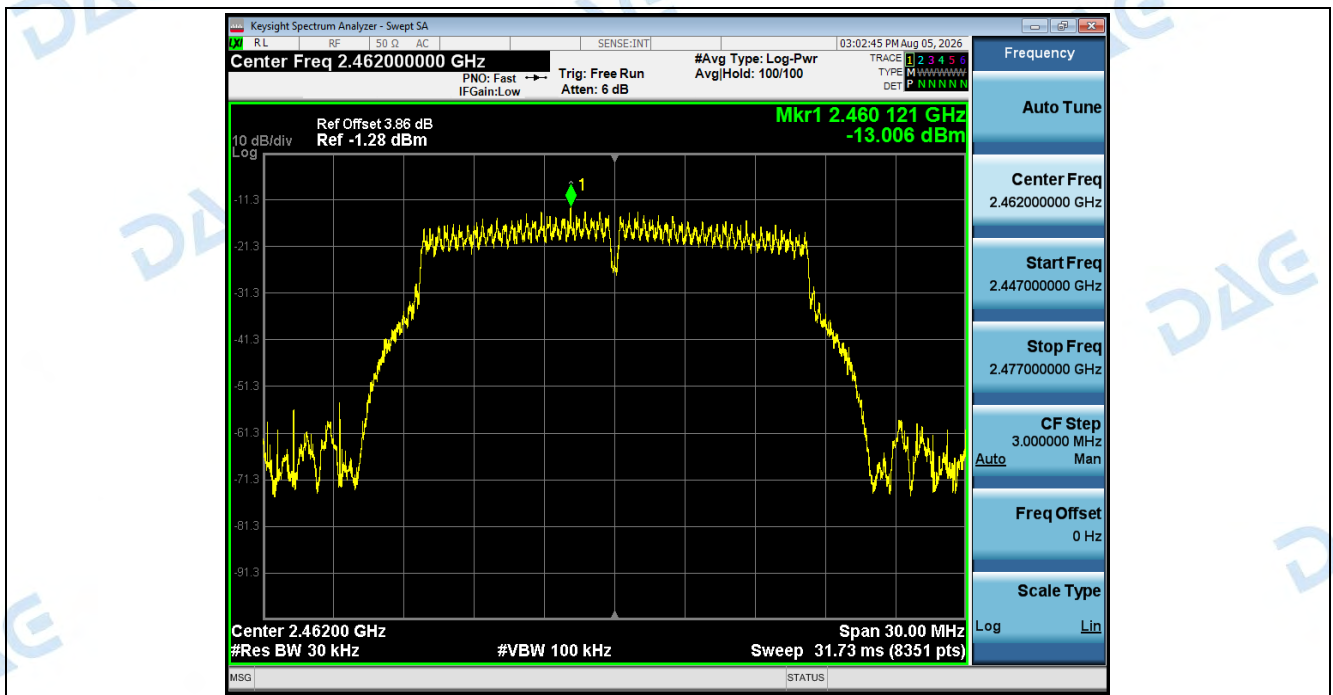



Power Spectral Density NVNT_ANT1_802_11n(HT20)_2437

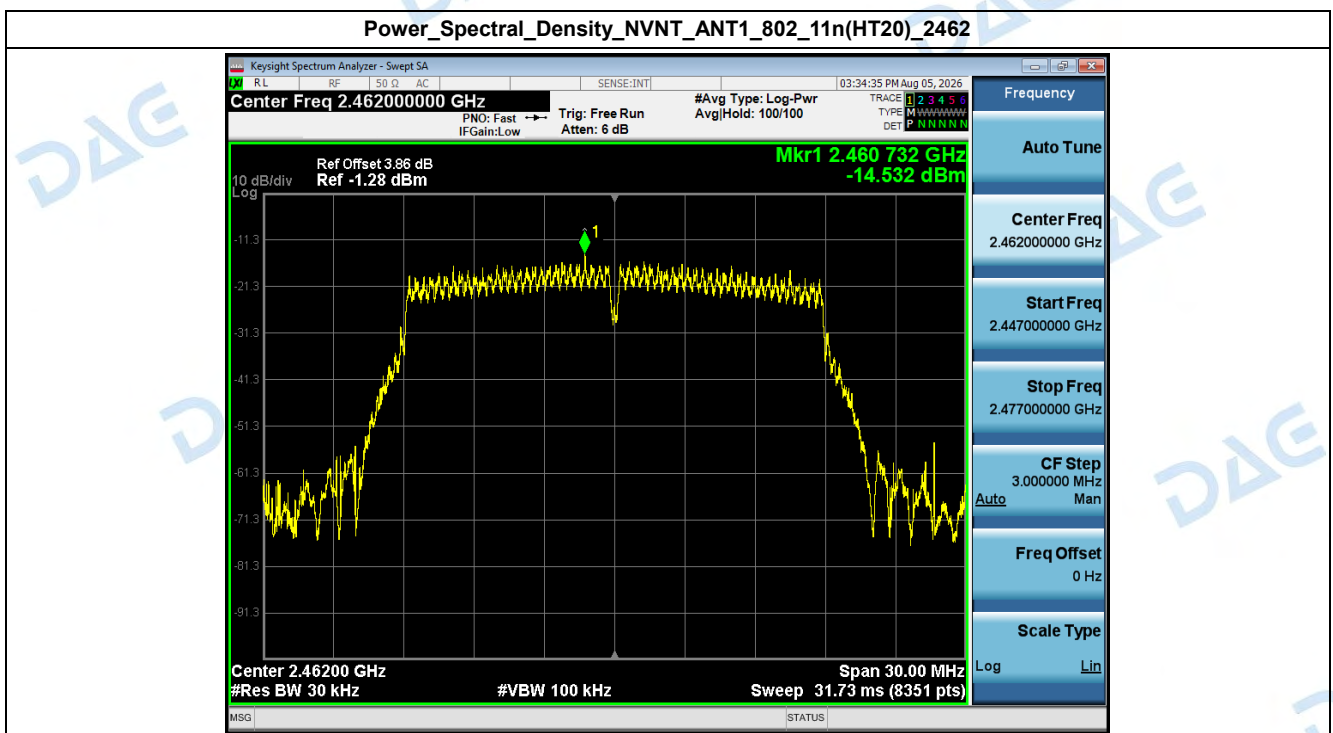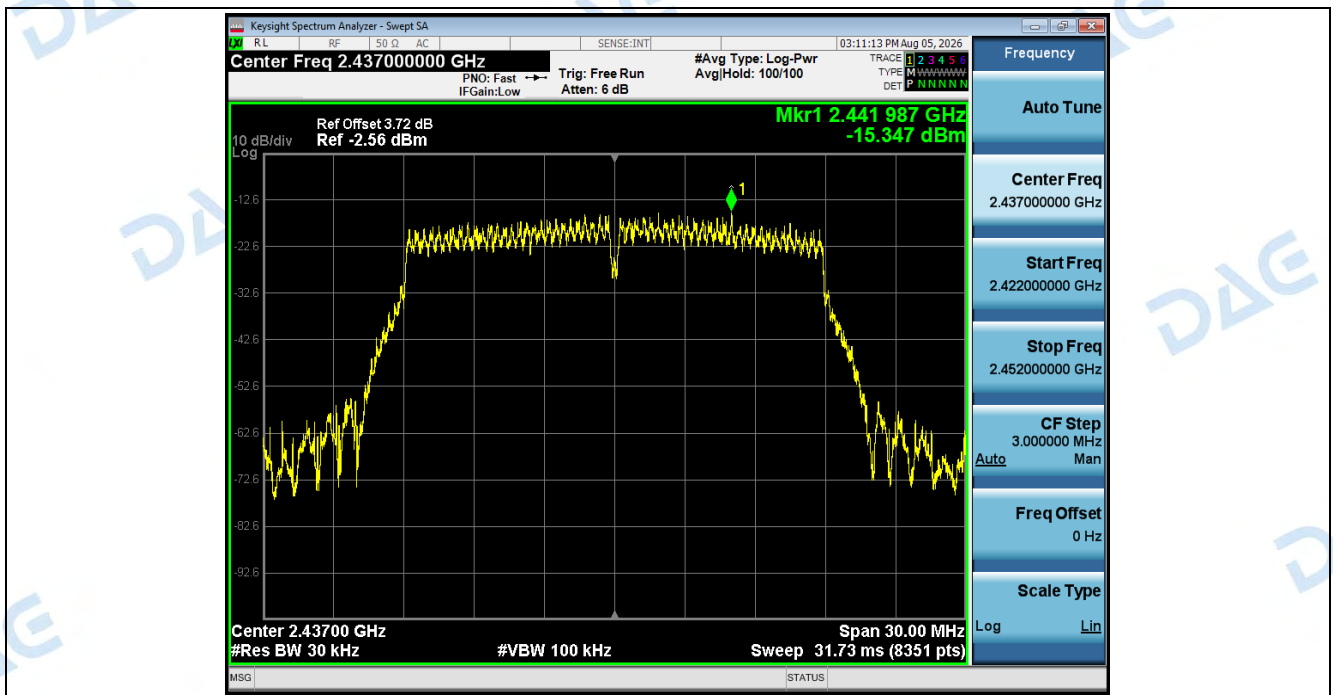

Power_Spectral_Density_NVNT_ANT1_802_11ax(HE20)_2412

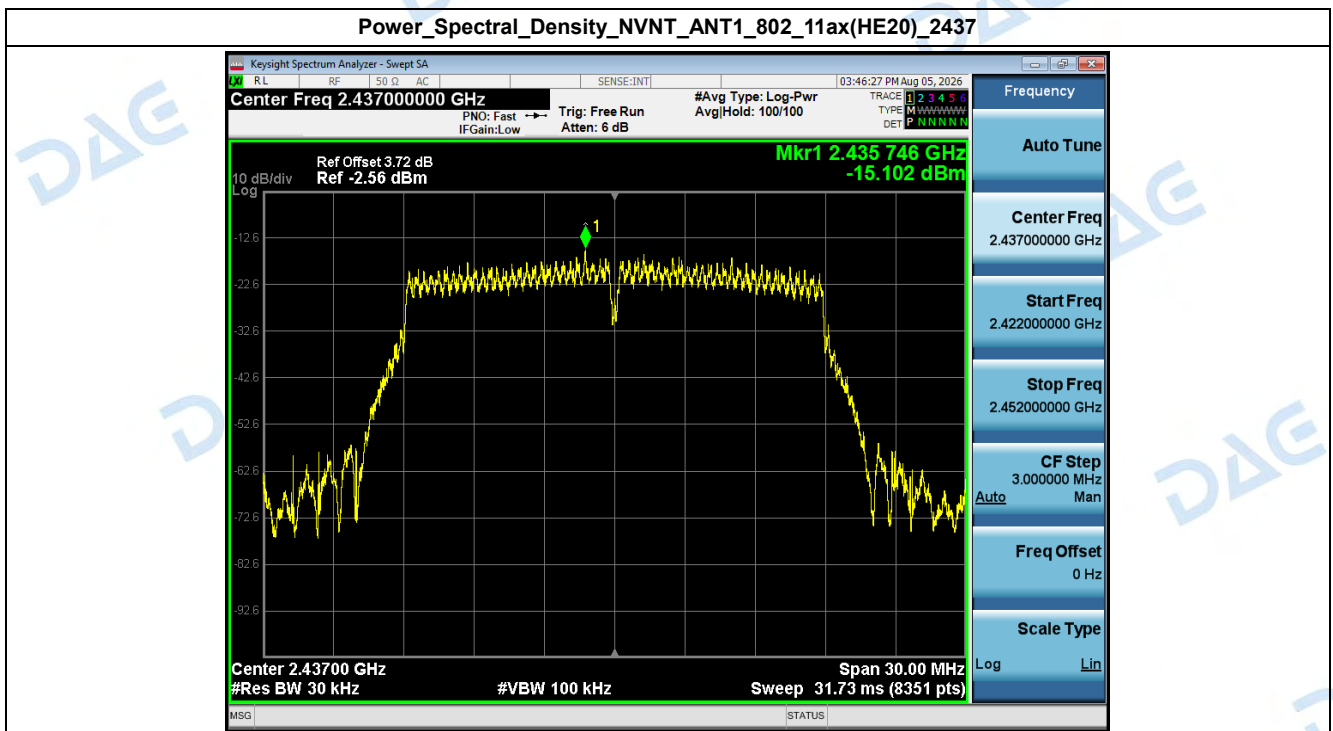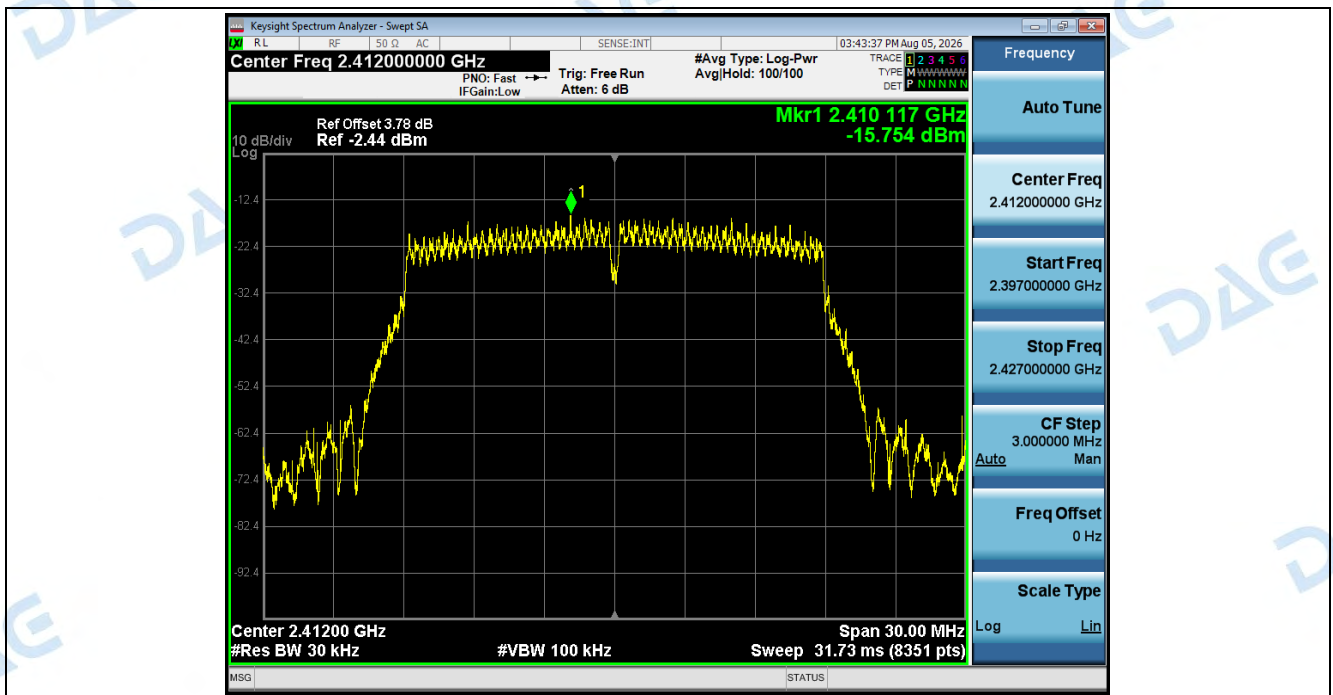

Power_Spectral_Density_NVNT_ANT1_802_11ax(HE20)_2462

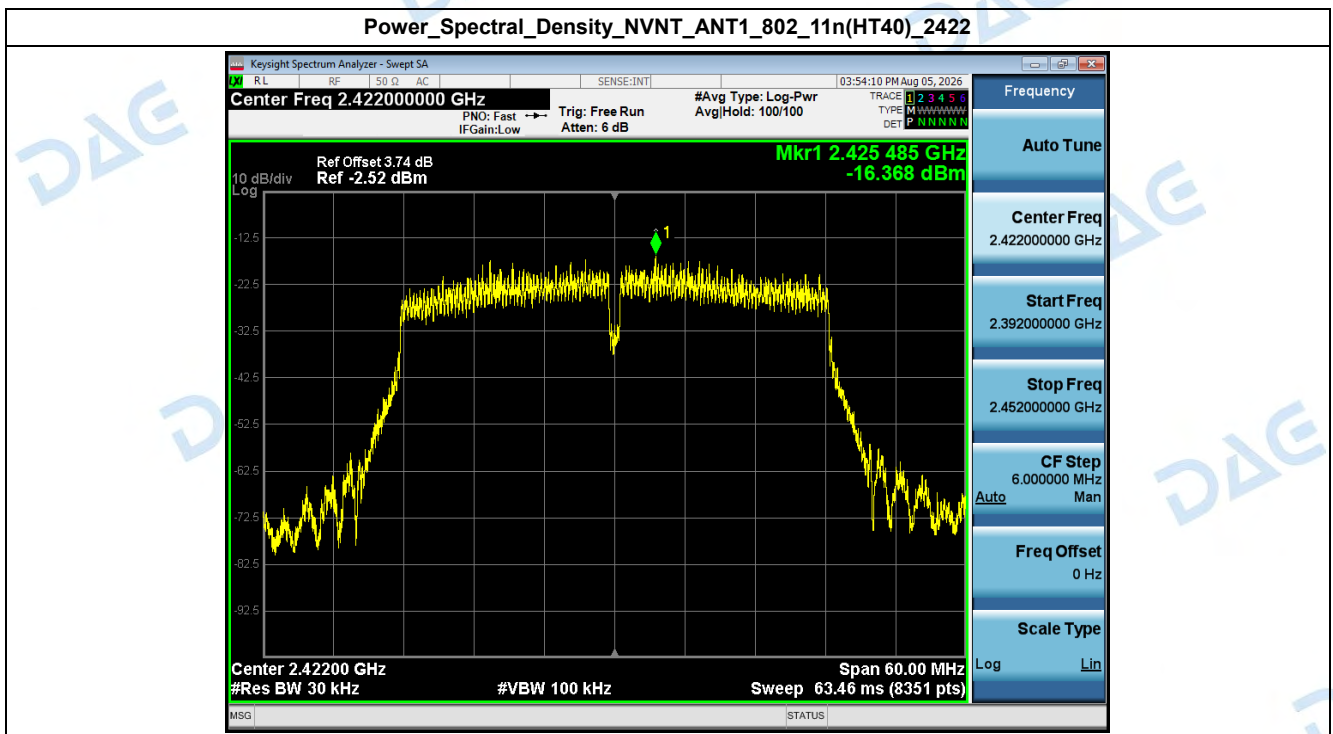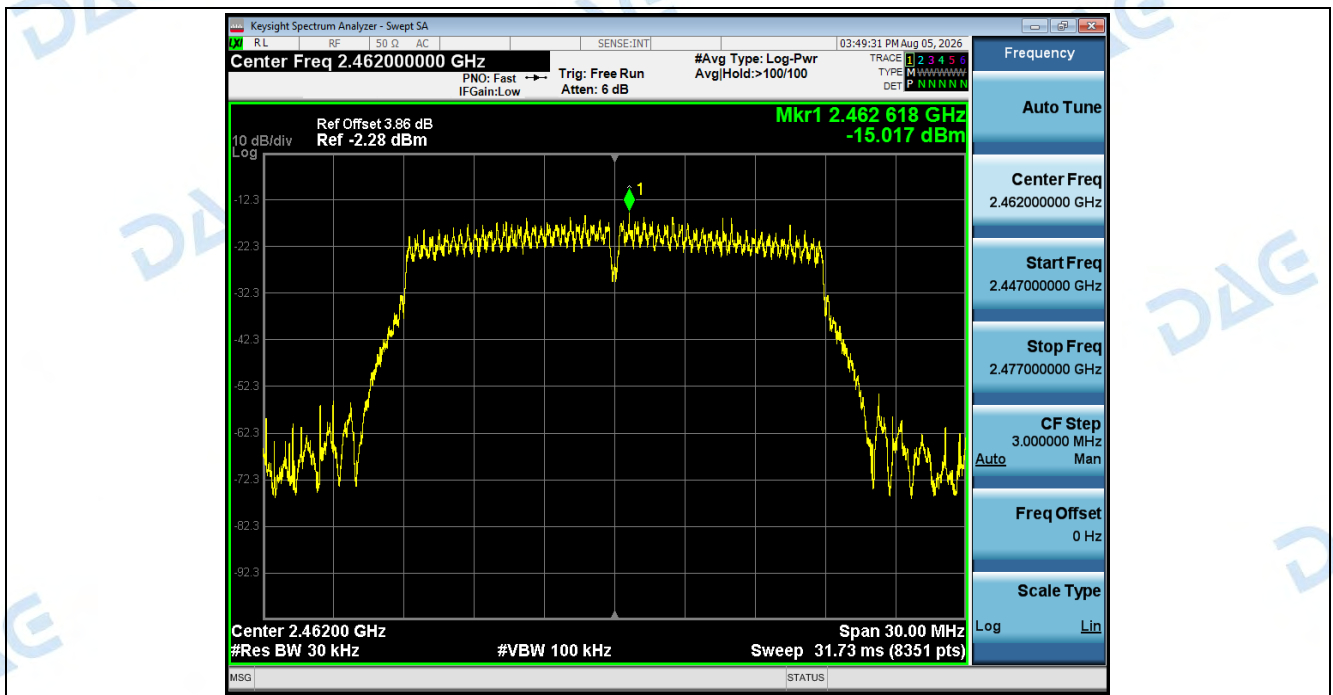

Power_Spectral_Density_NVNT_ANT1_802_11n(HT40)_2437