

RF TEST REPORT

FCC ID: 2A7EH-E1PROS

Test Report No.....: RF260714010-01-003

Product(s) Name.....: Car Dash Cam

Model(s).....: E1 Pro S

Trade Mark.....: VANTRUE

Applicant.....: Shenzhen Sanjiang Lechuang Technology Co., Ltd.

Address.....: 25th Floor, Jinluan International Business Building, No. 98 Heping East
Road, Sanlian Community, Longhua Street, Longhua District, Shenzhen,
China.

Receipt Date.....: 2026.07.15

Test Date.....: 2026.07.17~2026.08.20

Issued Date.....: 2026.09.02

Standards.....: 47 CFR FCC Part 15, Subpart E(Section 15.407);
ANSI C63.10-2020+Cor.1-2023

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Lemon He	Black Ding	Tim Zhang	
Lemon He	Black Ding	Tim Zhang	

Table of Contents

History of this test report.....	4
1. General Information	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Basic Description of Equipment Under Test	5
2. Summary of Test Results	6
2.1 Summary of Test Items	6
2.2 Application of Standard	6
2.3 Test Instruments	7
2.4 Operation Mode	8
2.5 Test Condition	8
2.6 Duty Cycle of Test Signal	8
2.7 Measurement Uncertainty	12
2.8 Test Location	12
2.9 SUPPORT UNITS	12
3. Test Procedure And Results	13
3.1 AC Power Line Conducted Emission	13
3.1.1 Limit	13
3.1.2 Test Procedure	13
3.1.3 Test Setup	13
3.1.4 Test Result	13
3.2 Radiated Emission	14
3.2.1 Limit	14
3.2.2 Test Procedure	15
3.2.3 Test Setup	16
3.2.4 Test Result	17
3.3 Spectrum Bandwidth	84
3.3.1 Limit	84
3.3.2 Test Procedure	84
3.3.3 Test Setup	85
3.3.4 Test Result	86
3.4 Conducted Output Power	124

3.4.1	Limit.....	124
3.4.2	Test Procedure	124
3.4.3	Test Setup	125
3.4.4	Table of Parameters of Text Software Setting.....	125
3.4.5	The Result.....	126
3.5	Power Spectral Density.....	127
3.5.1	Limit.....	127
3.5.2	Test Procedure	127
3.5.3	Test Setup	128
3.5.4	The Result.....	129

History of this test report

Original Report Issue Date: 2026.09.02

- ☒ No additional attachment
- ☐ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

Shenzhen Sanjiang Lechuang Technology Co., Ltd

25th Floor, Jinluan International Business Building, No. 98 Heping East Road, Sanlian Community, Longhua Street, Longhua District, Shenzhen, China

1.2 Manufacturer

Shenzhen Sanjiang Lechuang Technology Co., Ltd

25th Floor, Jinluan International Business Building, No. 98 Heping East Road, Sanlian Community, Longhua Street, Longhua District, Shenzhen, China

1.3 Basic Description of Equipment Under Test

Sample No.	POC260714010-S001	
Product name	Car Dash Cam	
Model name	E1 Pro S	
Trade Mark	VANTRUE	
Power supply	DC 12-24V from car charger	
Car charger information	Input: DC 12-24V USB-A: DC 5V===3A, 9V===2A, 12V===1.5A WIRE Output: DC 5V===2.8A Manufacturer: Vantrue	
Operating Temperature	-20℃~60℃	
EUT Stage	○ Product Unit	● Final-Sample
Operating Band & Max Conducted Output Power	5150MHz ~5250MHz	802.11ax80: 10.66dBm(0.0116W)
	5725MHz ~5850MHz	802.11ax40: 10.22dBm(0.0105W)
Product Type	IEEE 802.11a/n/ac/ax: WLAN (SISO)	
Nominal Bandwidth	20MHz / 40MHz / 80MHz	
Modulation	OFDM,OFDMA	
Antenna gain	5150MHz ~5250MHz : 1.72dBi 5725MHz ~5850MHz : 1.76dBi	
Antenna type	FPC Antenna	
Data Rate (Mbps)	IEEE 802.11a mode: 6/9/12/18/24/36/48/54 IEEE 802.11n mode: up to 150 IEEE 802.11ac mode: up to 433.3 IEEE 802.11ax mode: up to 600.5	

Channel Information			
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	802.11a/n/ac/ax (20MHz)	5180-5240	36-48
5725-5850		5745-5825	149-165
5150-5250	802.11n/ac/ax (40MHz)	5190-5230	38-46
5725-5850		5755-5795	151-159
5150-5250	802.11ac/ax (80MHz)	5210	42
5725-5850		5775	155

2. Summary of Test Results

2.1 Summary of Test Items

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Test item	Standard	Results	Remarks
AC Power Conducted Emission	15.207 15.407(b)	-----	N/A
Radiated Emission	15.205(a) 15.209(a) 15.407(b)	Pass	Meet the requirement of the limit
Antenna Requirements	15.203	Compliance	Note
Spectrum Bandwidth	15.407(a) 15.407(e)	Pass	Meet the requirement of the limit
Conducted Output Power	15.407(a)	Pass	Meet the requirement of the limit
Power Spectral Density	15.407(a)	Pass	Meet the requirement of the limit
Note: The EUT has one FPC antenna arrangement which was permanently attached.			

2.2 Application of Standard

47 CFR FCC Part 15, Subpart E

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10-2020+Cor.1-2023

2.3 Test Instruments

No.	Name of Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
Radiated Emission							
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2026/2/27	2027/2/26
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2028/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2026/2/27	2027/2/26
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2026/2/27	2027/2/26
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2025/4/12	2028/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2026/4/8	2027/4/7
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBECK	FMZB1519B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2026/2/27	2027/2/26
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emissions							
1	MXA Signal Analyzer	Rohde&schwarz	FSP	6625-01-522-9603	JLE121	2026/1/19	2027/1/18
2	RF Control Unit	dsusoft	JS0806-2	21G8060449	JLE053	2026/2/27	2027/2/26
3	power supply unit	dsusoft	JS0806-4ADC	N/A	JLE055	2026/2/27	2027/2/26
4	VXG Signal Generator	Keysight	N5182B	MY59100855	JLE068	2026/4/8	2027/4/7
5	EXG Analog Signal Generator	Keysight	N5173B	MY59101282	JLE052	2026/2/27	2027/2/26
6	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002K50-116064-Dt	JLE054	2026/2/27	2027/2/26
7	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				

2.4 Operation Mode

Transmit Operating Mode					Transmit Multiple Antennas					
☒	Operating mode 1 (single antenna)				☒	1TX				
☐	Operating mode 2 (multiple antenna, no beam forming)				☐	2TX	☐	3TX	☐	4TX
☐	Operating mode 3 (multiple antenna, with beam forming)				☐	2TX	☐	3TX	☐	4TX
☒	802.11a	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11n(20MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11n(40MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ac(20MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ac(40MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ac(80MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ax(20MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ax(40MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX
☒	802.11ax(80MHz)	Operating mode	☒	1TX	☐	2TX	☐	3TX	☐	4TX

Note: 1 All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.

2 For 802.11ax mode only support full RU mode.

2.5 Test Condition

Test Item	Environmental conditions	Input Power	Tested by
Radiated Emission	23.9°C, 50% RH	DC 12V	Keith Huang
Spectrum Bandwidth	23.2°C, 46% RH	DC 12V	Lemon He
Conducted Power	23.2°C, 46% RH	DC 12V	Lemon He
Power Spectral Density	23.2°C, 46% RH	DC 12V	Lemon He

Note: The car charger is powered by DC 12V.

The applicant declare the operating environment of EUT as below:

Normal conditions: 12V DC, 0~45°C

2.6 Duty Cycle of Test Signal


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

All the duty factor of other test mode have been considered.


TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	1.41	11.43	12.34
11N20SISO	Ant1	5180	5.07	15.12	33.53
11N40SISO	Ant1	5190	4.89	14.94	32.73
11AC20SISO	Ant1	5180	5.10	15.15	33.66
11AC40SISO	Ant1	5190	4.89	14.94	32.73
11AC80SISO	Ant1	5210	4.53	14.55	31.13
11AX20SISO	Ant1	5180	3.87	13.92	27.80
11AX40SISO	Ant1	5190	3.87	13.92	27.80
11AX80SISO	Ant1	5210	3.69	13.74	26.86

Test Graphs

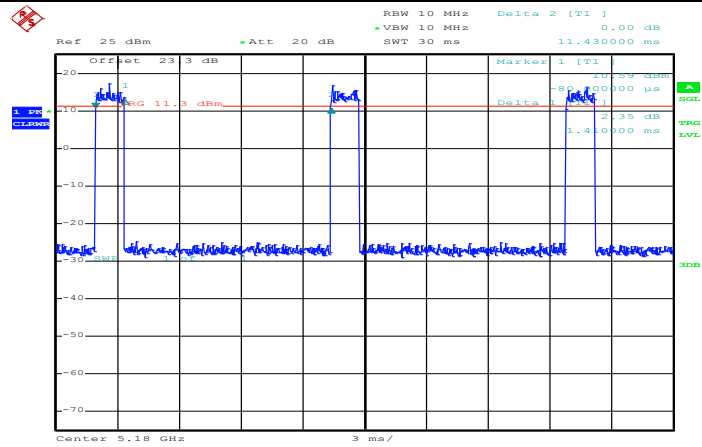


Date: 5.AUG.2026 22:49:08

NTNV-11A-Ant1-5180

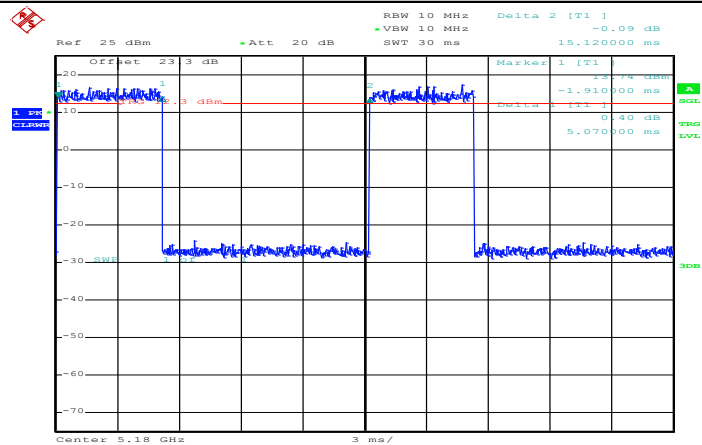


Date: 5.AUG.2026 23:00:38

NTNV-11N20SISO-Ant1-5180

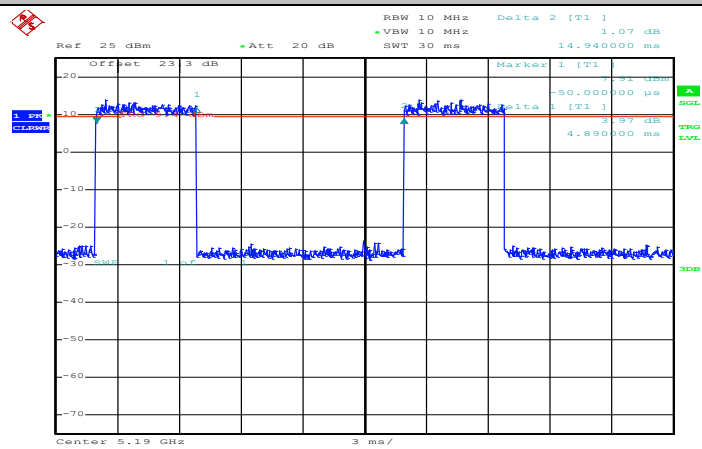


Date: 5.AUG.2026 23:32:17

NTNV-11N40SISO-Ant1-5190

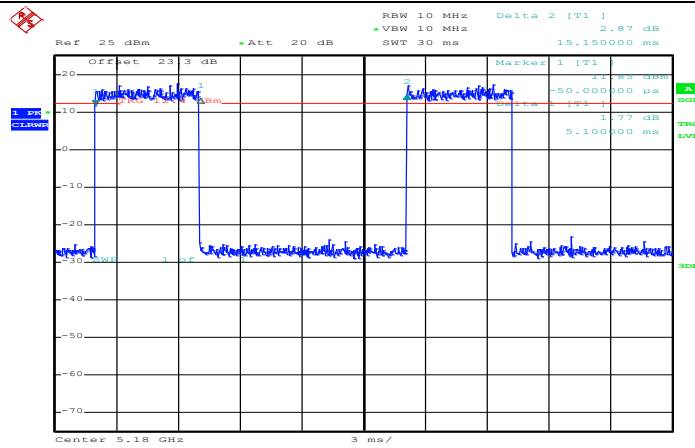


Date: 5.AUG.2026 23:10:33

NTNV-11AC20SISO-Ant1-5180

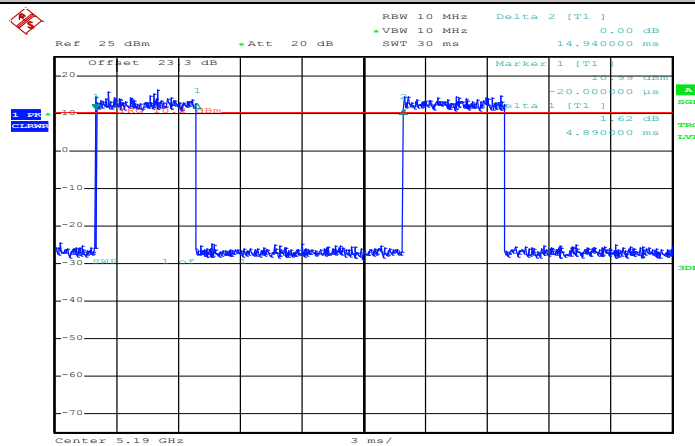


Date: 5.AUG.2026 23:38:21

NTNV-11AC40SISO-Ant1-5190

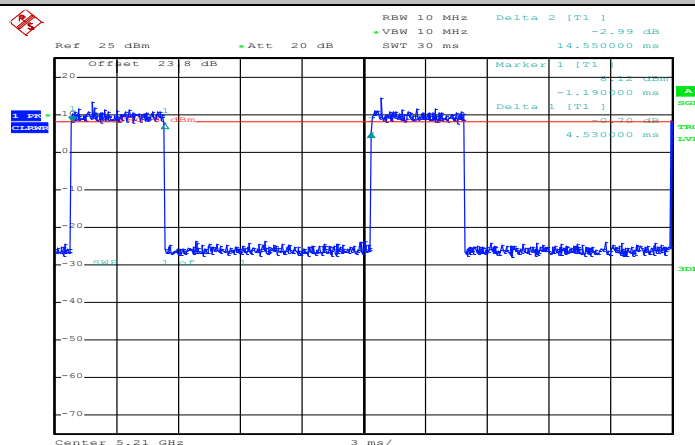


Date: 5.AUG.2026 23:52:28

NTNV-11AC80SISO-Ant1-5210

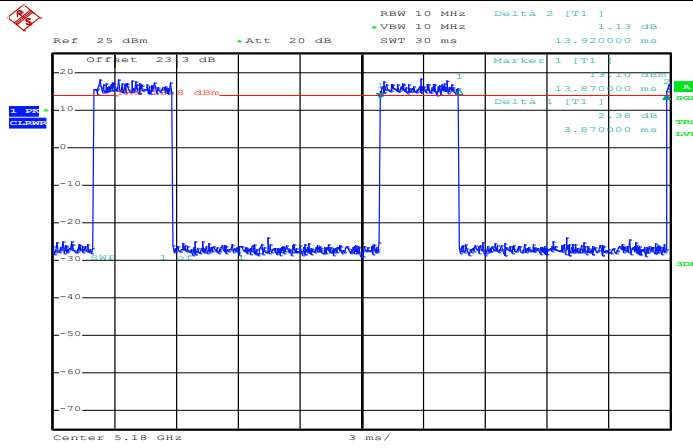


Date: 5.AUG.2026 23:21:14

NTNV-11AX20SISO-Ant1-5180

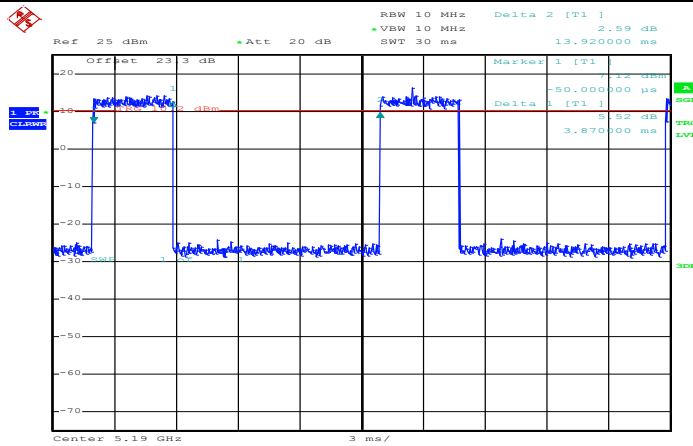

Date: 5.AUG.2026 23:44:30

NTNV-11AX40SISO-Ant1-5190

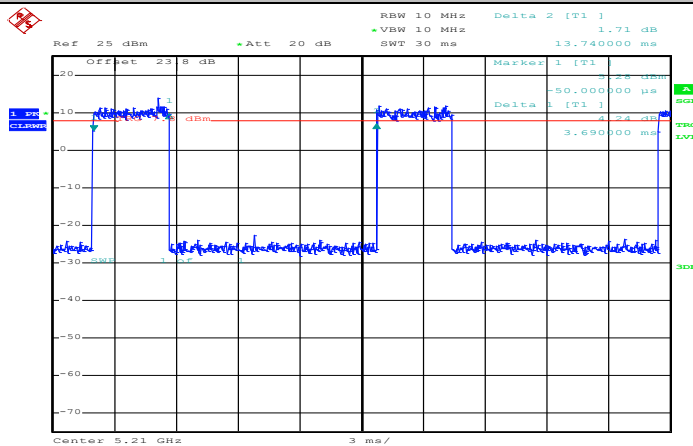

Date: 5.AUG.2026 23:55:40

NTNV-11AX80SISO-Ant1-5210

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 102\text{kHz}$
RF power conducted	$\pm 0.243\text{dB}$
Power Spectral Density	$\pm 0.743\text{dB}$
Conducted Spurious Emission	$\pm 1.328\text{dB}$
Conducted emission(9kHz~30MHz) AC main	$\pm 2.68\text{dB}$
Radiated emission(9kHz~30MHz)	$\pm 3.50\text{dB}$
Radiated emission (30MHz~1GHz)	$\pm 4.20\text{dB}$
Radiated emission (1GHz~18GHz)	$\pm 5.10\text{dB}$
Radiated emission (18GHz~40GHz)	$\pm 5.26\text{dB}$

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier:	CN0145
FCC Designation Number	CN1340
A2LA Certificate Number:	6823.01

2.9 SUPPORT UNITS

No.	Equipment	Model	Manufacturer	Series No
/	/	/	/	/

3. Test Procedure And Results

3.1 AC Power Line Conducted Emission

3.1.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.


2. The lower limit shall apply at the transition frequencies.

3.1.2 Test Procedure

Test Method	
●Conducted Measurement	○Radiated Measurement
Test Channels	
○ Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

3.1.3 Test Setup

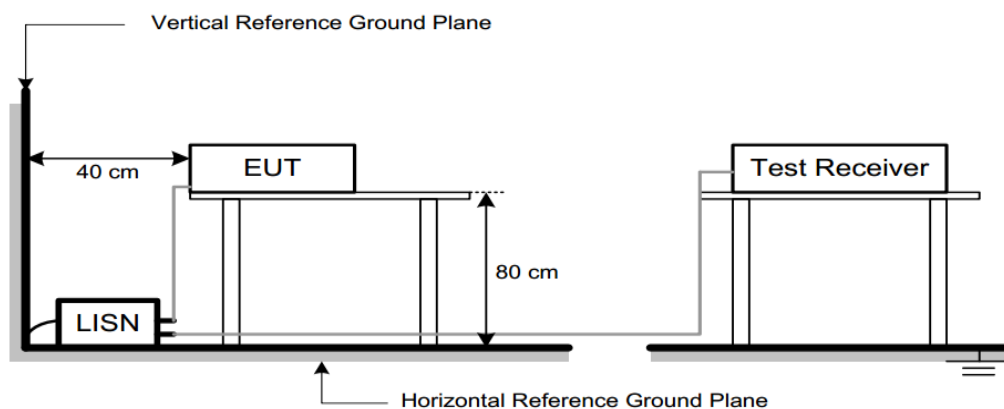

3.1.4 Test Result

The EUT is powered by car battery, so this test item is not applicable for the EUT.

3.2 Radiated Emission

3.2.1 Limit

1) Limit of radiated emission measurement:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Distance Meters(m)	Field Strength Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 – 0.49	300	$2400/F(\text{kHz})$	-
0.490 – 1.705	30	$24000/F(\text{kHz})$	-
1.705 – 30	30	30	-
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

2) Limit of unwanted emission out of the restricted bands:

Frequency(MHz)	EIRP Limit(dBm/MHz)	Equivalent Field Strength at 3m($\text{dB}\mu\text{V/m}$)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 NOTE (2)	68.2
	10 NOTE (2)	105.2
	15.6 NOTE (2)	110.8
	27 NOTE (2)	122.2

Note: (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d=3\text{m}$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.2.2 Test Procedure

Test Method	
○Conducted Measurement	●Radiated Measurement
Test Channels	
●Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	


- a) The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b) The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c) The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e) The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f) The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h) All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i) For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.3 Test Setup


(A) Radiated Emission Test Set-Up Frequency Below 30 MHz

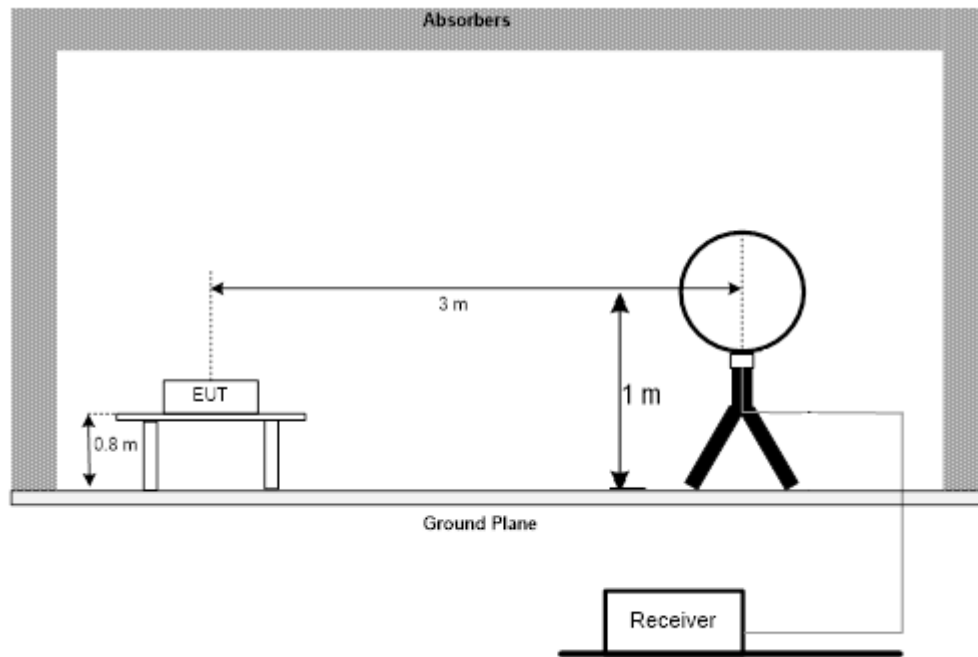

(B) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

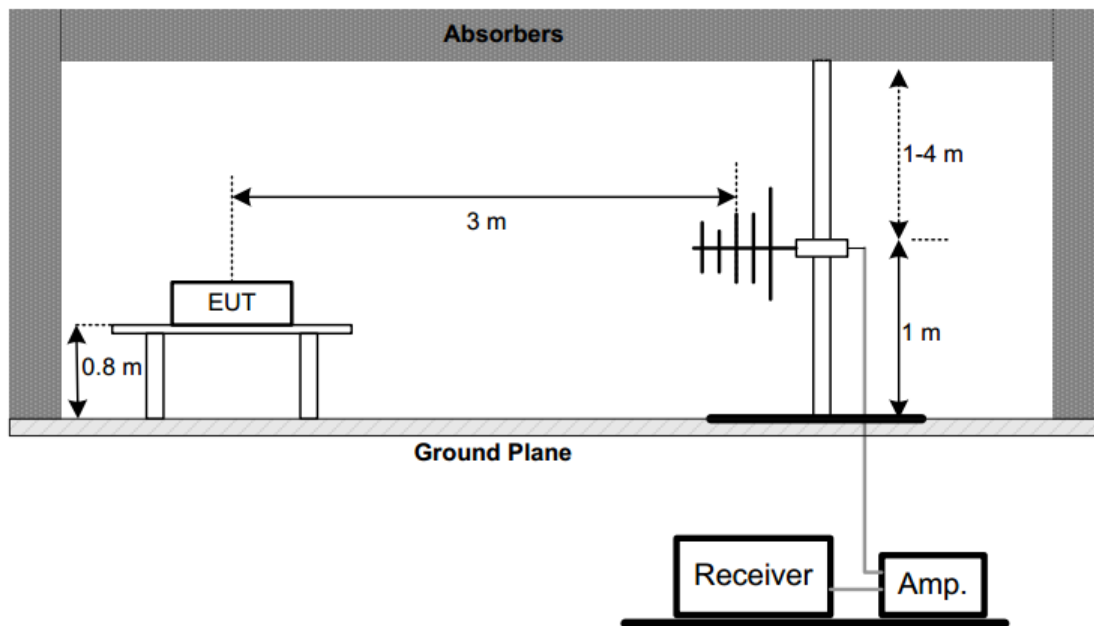

(C) Radiated Emission Test Set-Up Frequency Above 1 GHz

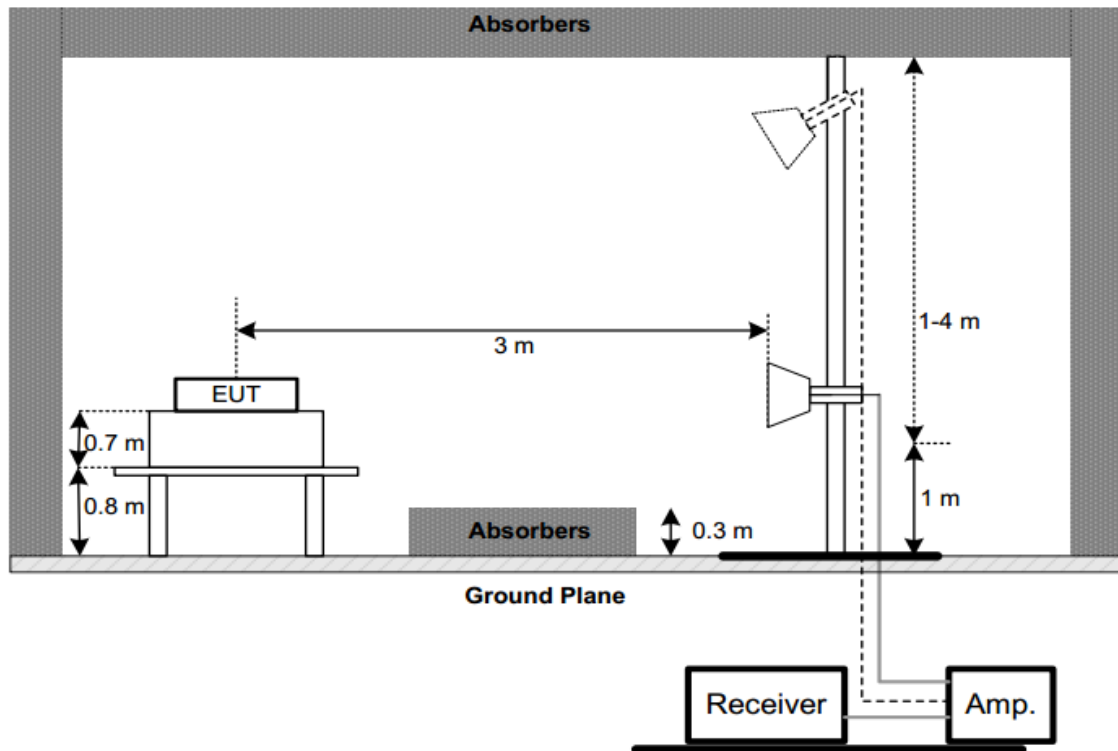

3.2.4 Test Result

1) Radiated emission: 9kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.


2) Radiated emission: 30MHz-1GHz

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit
3. The TX 11AX80 Channel 42 is found to be the worst case and recorded.

VERTICAL


Radiated Emission

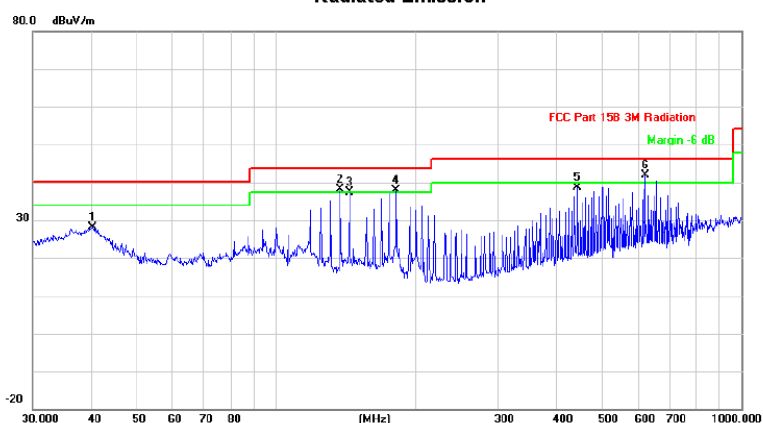

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		40.4170	38.14	-10.12	28.02	40.00	-11.98	peak	
2	!	137.4200	48.62	-10.51	38.11	43.50	-5.39	peak	
3		143.8291	47.45	-10.18	37.27	43.50	-6.23	peak	
4	!	181.2834	50.94	-12.99	37.95	43.50	-5.55	peak	
5		444.8514	45.26	-6.52	38.74	46.00	-7.26	peak	
6	*	620.7096	43.24	-1.48	41.76	46.00	-4.24	peak	

HORIZONTAL

Radiated Emission

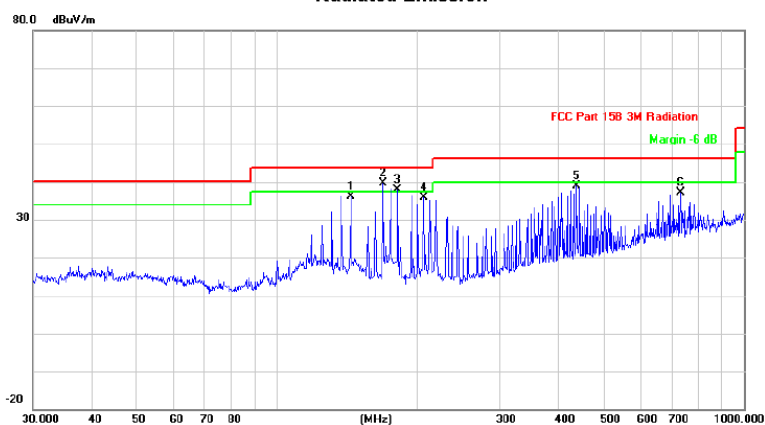

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		143.8291	46.25	-10.18	36.07	43.50	-7.43	peak	
2	*	169.0053	49.22	-9.52	39.70	43.50	-3.80	peak	
3	!	181.2834	50.79	-12.99	37.80	43.50	-5.70	peak	
4		206.3975	48.27	-12.35	35.92	43.50	-7.58	peak	
5		438.6553	44.75	-5.87	38.88	46.00	-7.12	peak	
6		731.9202	38.15	-0.97	37.18	46.00	-8.82	peak	



3) Radiated emission: Above 1GHz

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit


Above 1GHz (1GHz~18GHz)	Test mode:11A	Test Channel:36
-------------------------	---------------	-----------------

VERTICAL

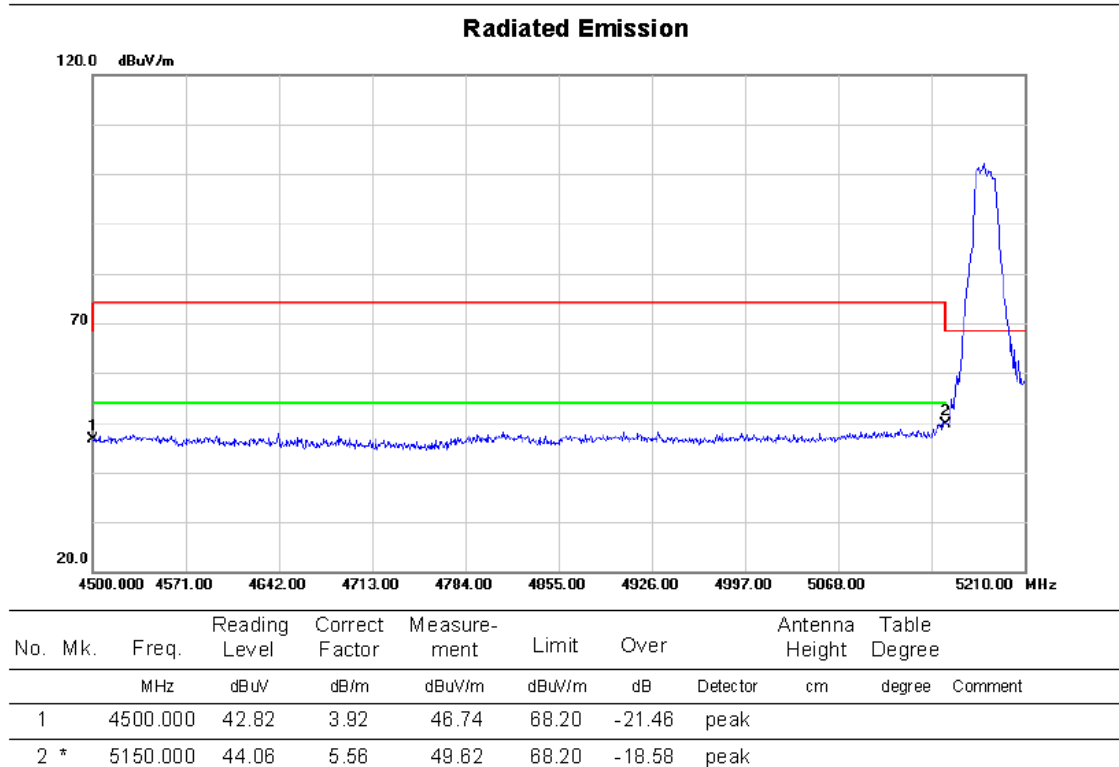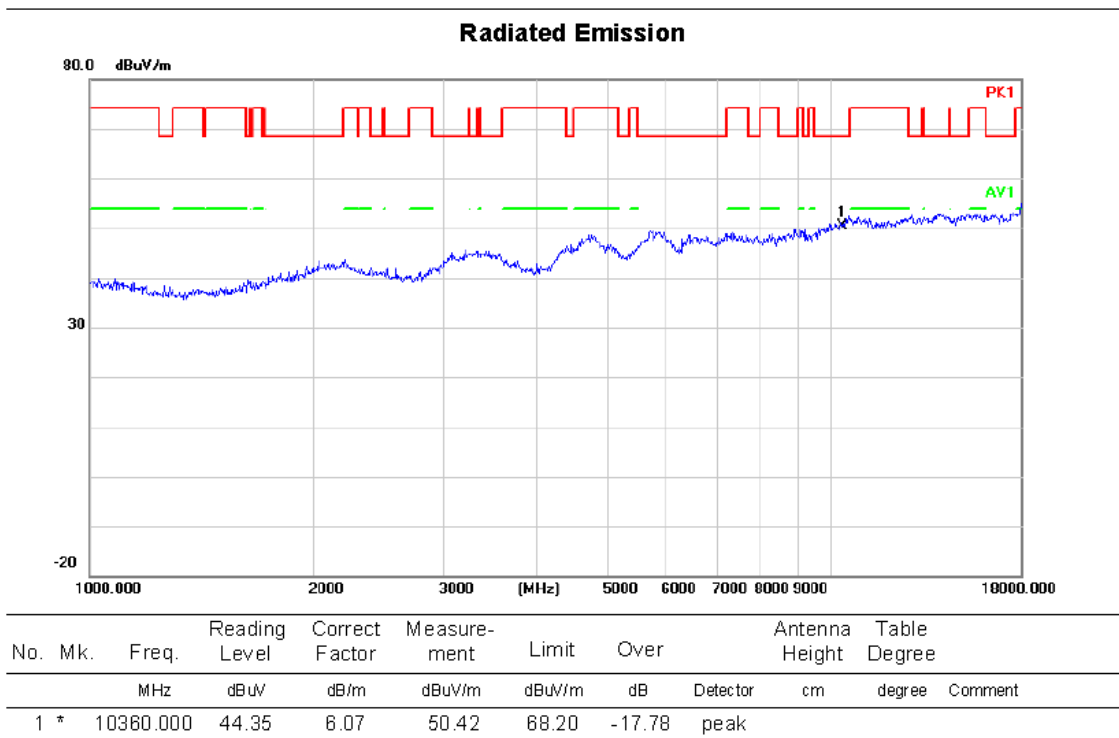


HORIZONTAL

Radiated Emission

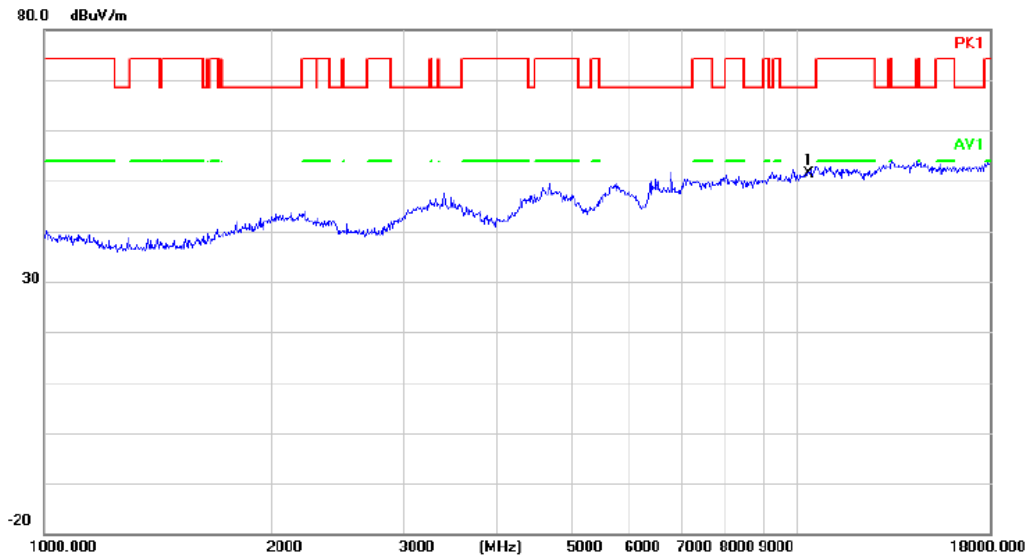

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	45.35	6.07	51.42	68.20	-16.78	peak		


Radiated Emission

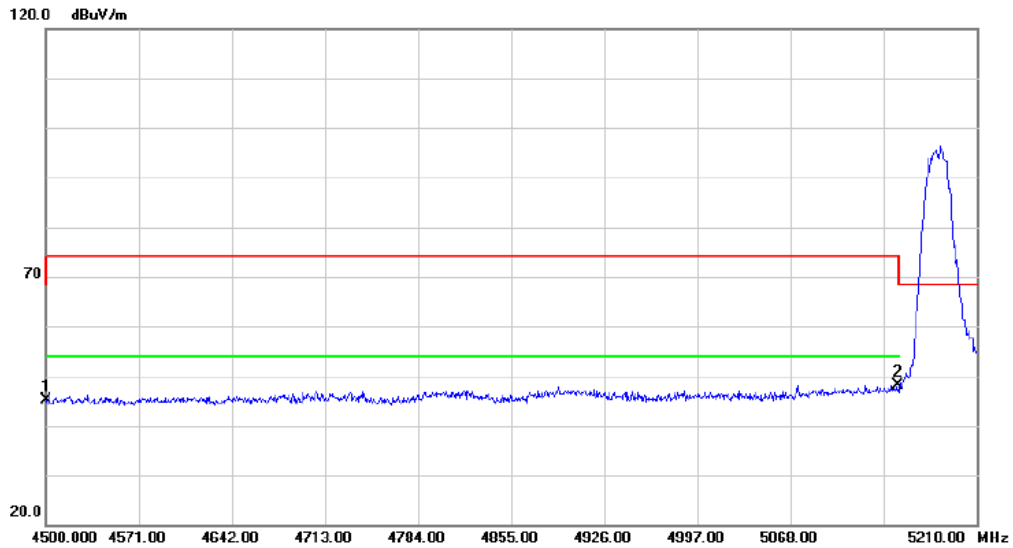

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	41.20	3.92	45.12	68.20	-23.08	peak		
2	*	5150.000	42.68	5.56	48.24	68.20	-19.96	peak		

VERTICAL


Radiated Emission

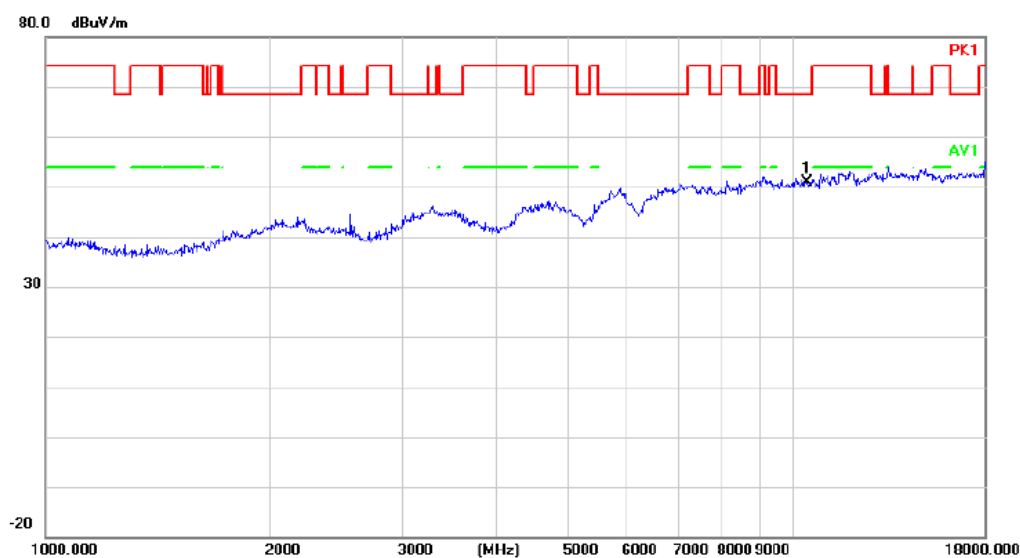

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	44.67	6.20	50.87	68.20	-17.33	peak		Comment

HORIZONTAL


Radiated Emission

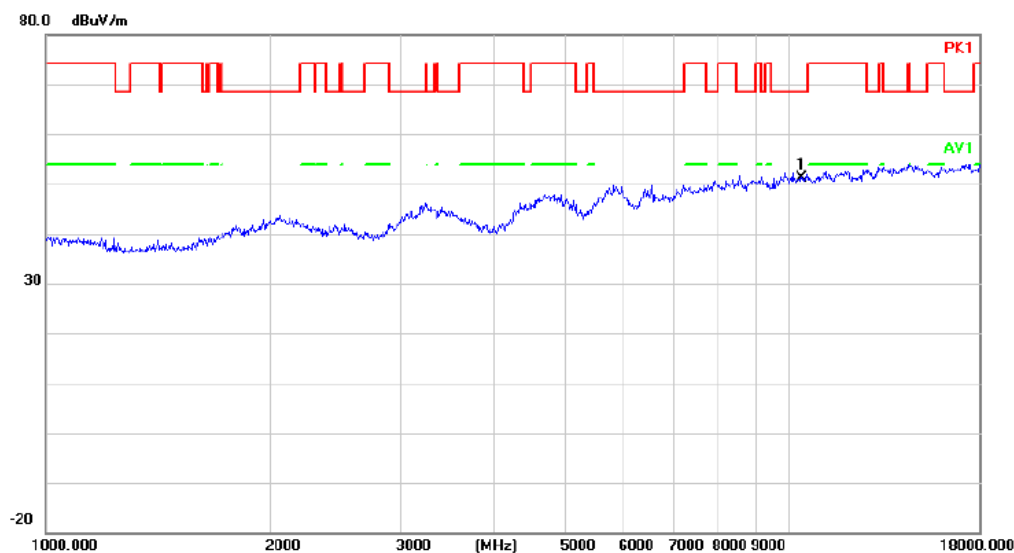

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	44.91	6.20	51.11	68.20	-17.09	peak		Comment

VERTICAL


Radiated Emission

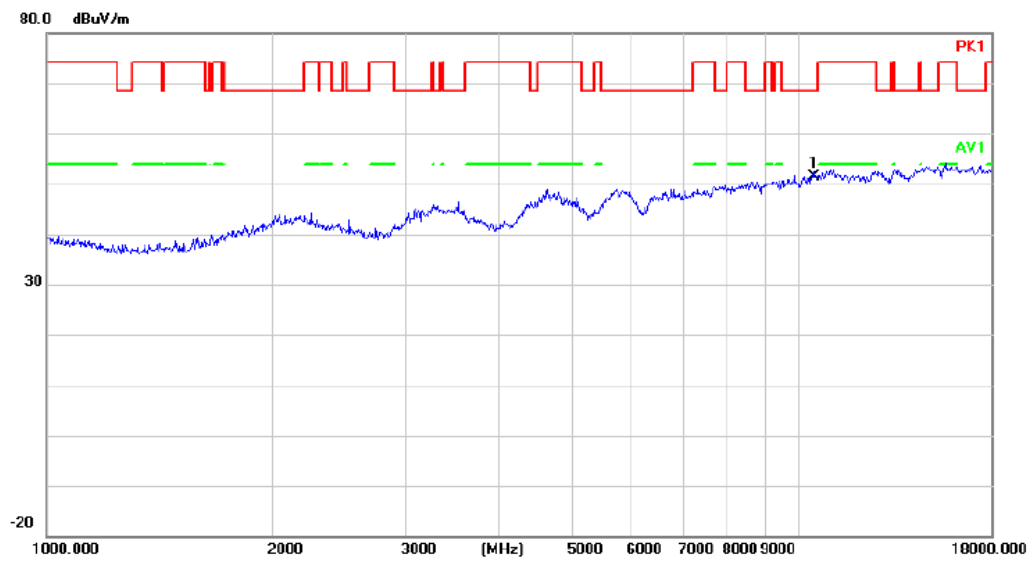

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	44.93	6.38	51.31	68.20	-16.89	peak		Comment

HORIZONTAL


Radiated Emission

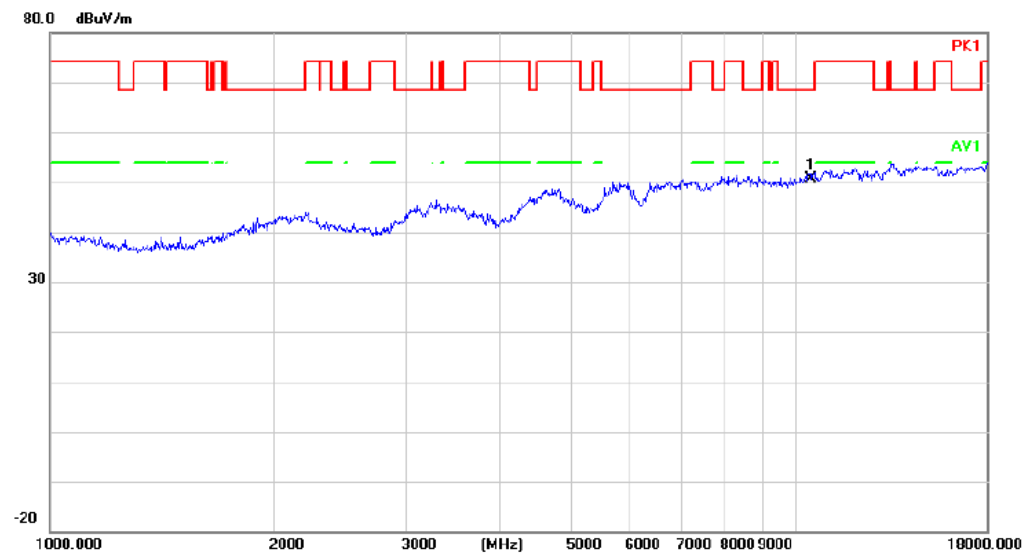

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	44.32	6.38	50.70	68.20	-17.50	peak		Comment


VERTICAL

Radiated Emission

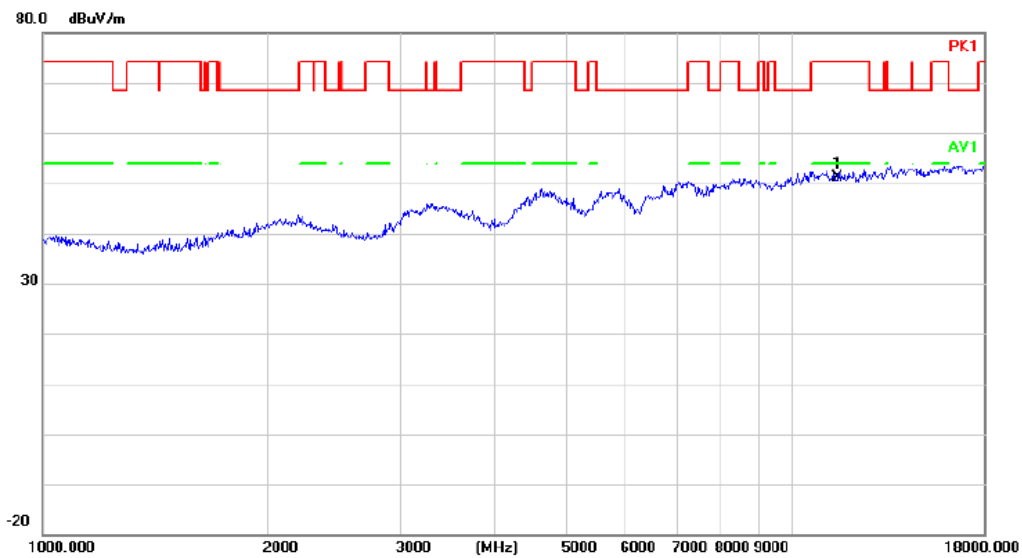

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11490.000	44.48	6.70	51.18	74.00	-22.82	peak		


Radiated Emission

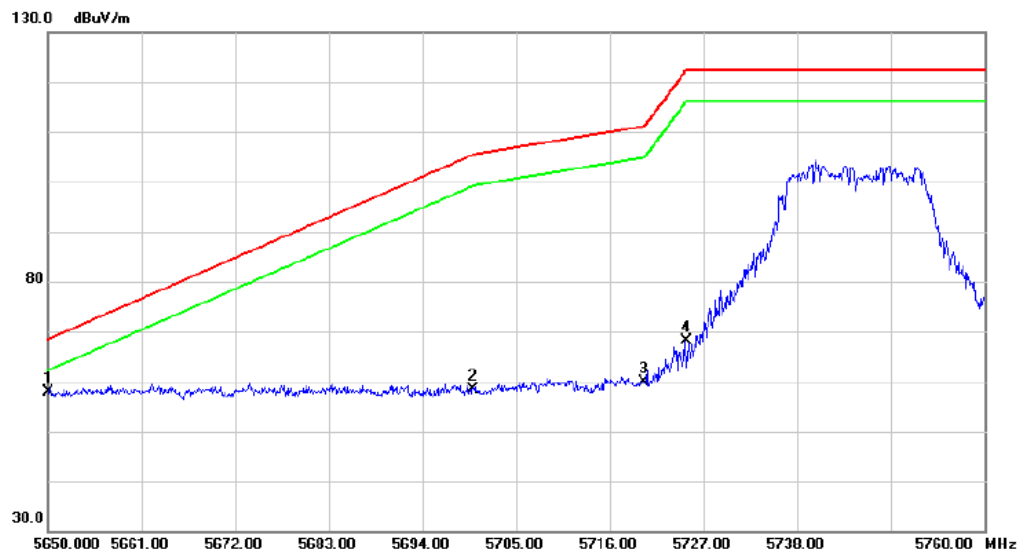

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	52.33	5.56	57.89	68.20	-10.31	peak		
2		5700.000	52.74	5.70	58.44	105.20	-46.76	peak		
3		5720.000	54.47	5.47	59.94	110.80	-50.86	peak		
4		5725.000	62.65	5.42	68.07	122.20	-54.13	peak		


HORIZONTAL

Radiated Emission

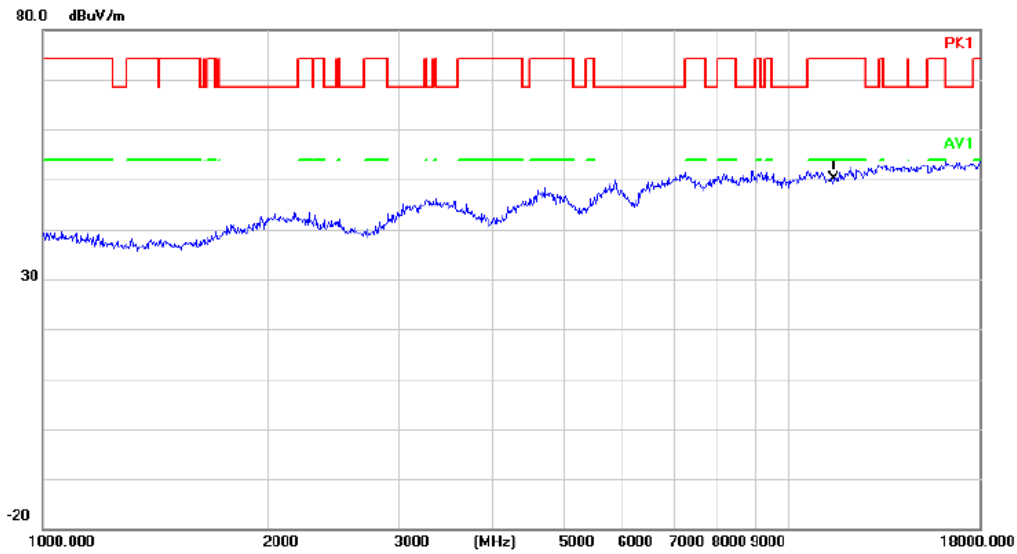

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	43.42	6.70	50.12	74.00	-23.88	peak		


Radiated Emission

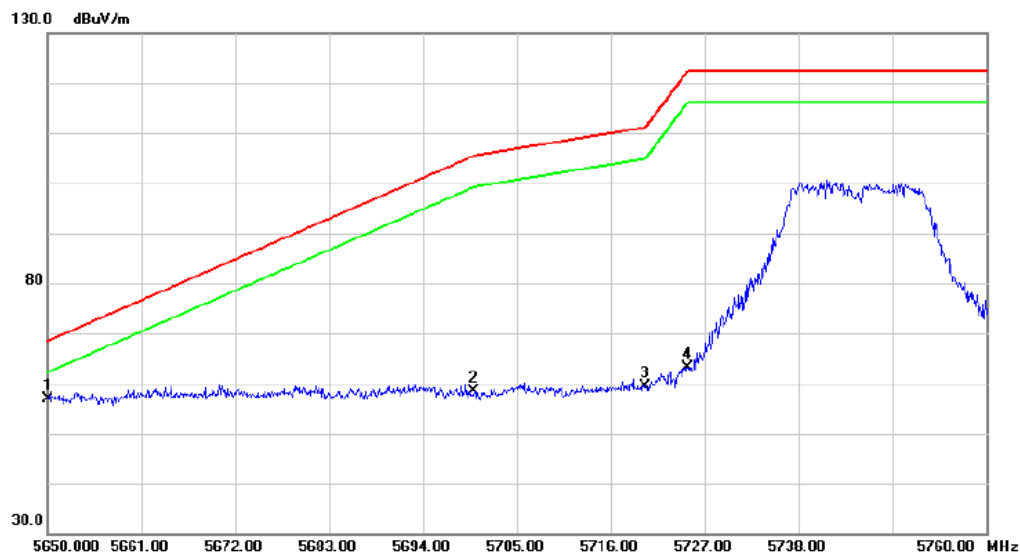

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	51.42	5.56	56.98	68.20	-11.22	peak		
2		5700.000	52.72	5.70	58.42	105.20	-46.78	peak		
3		5720.000	53.97	5.47	59.44	110.80	-51.36	peak		
4		5725.000	57.81	5.42	63.23	122.20	-58.97	peak		

VERTICAL


Radiated Emission

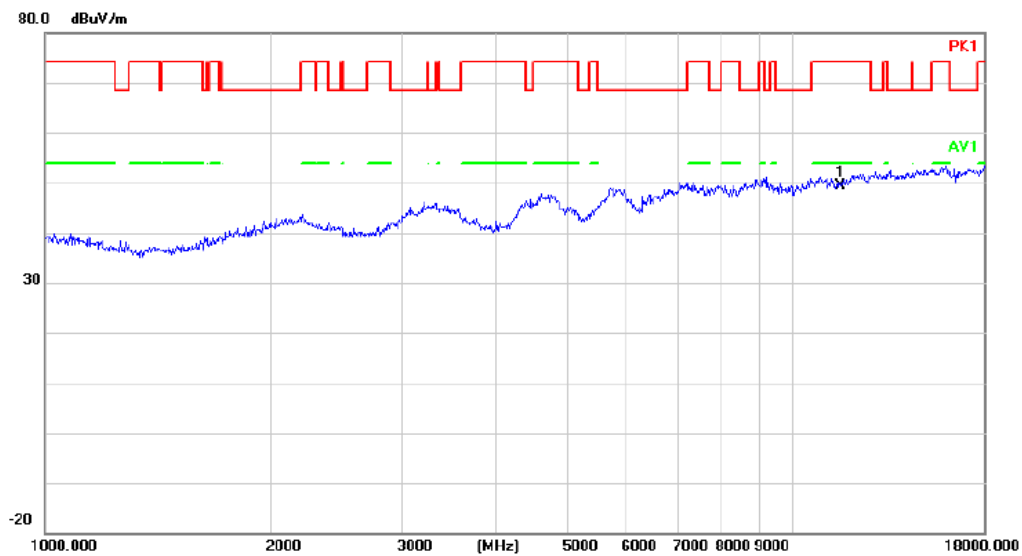

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	42.77	6.52	49.29	74.00	-24.71	peak		Comment

HORIZONTAL


Radiated Emission

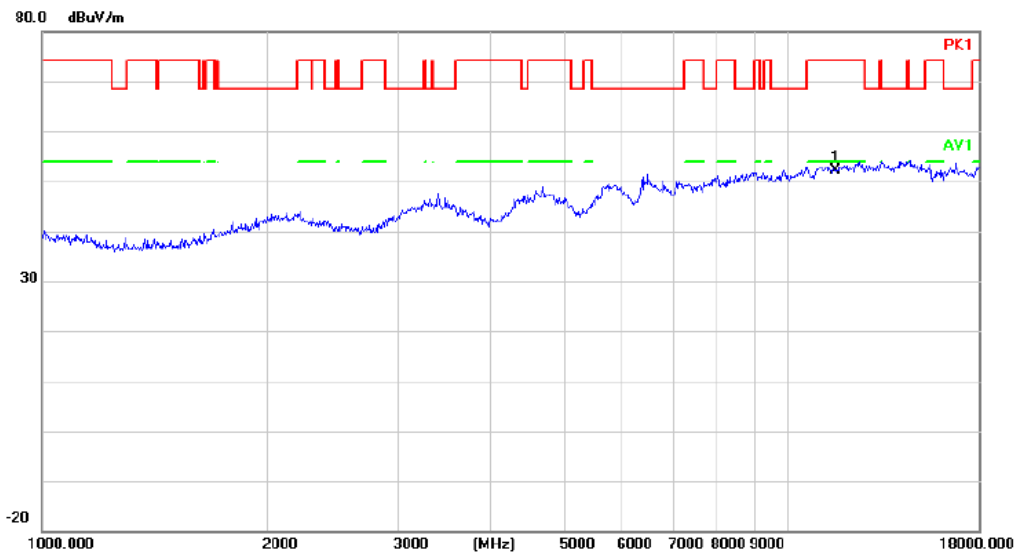

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	45.70	6.52	52.22	74.00	-21.78	peak		Comment


VERTICAL

Radiated Emission

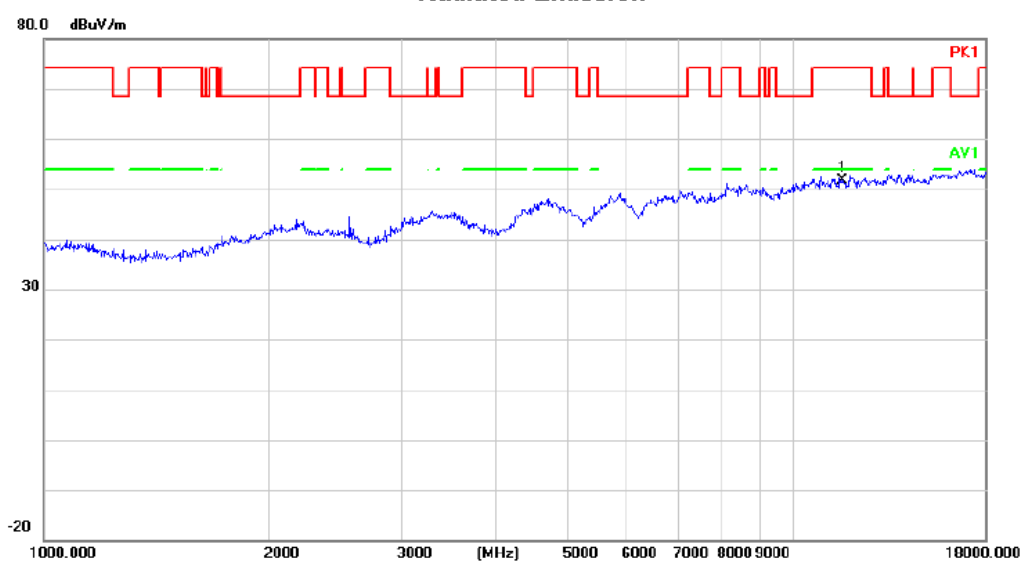

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11850.000	45.24	6.35	51.59	74.00	-22.41	peak		


Radiated Emission

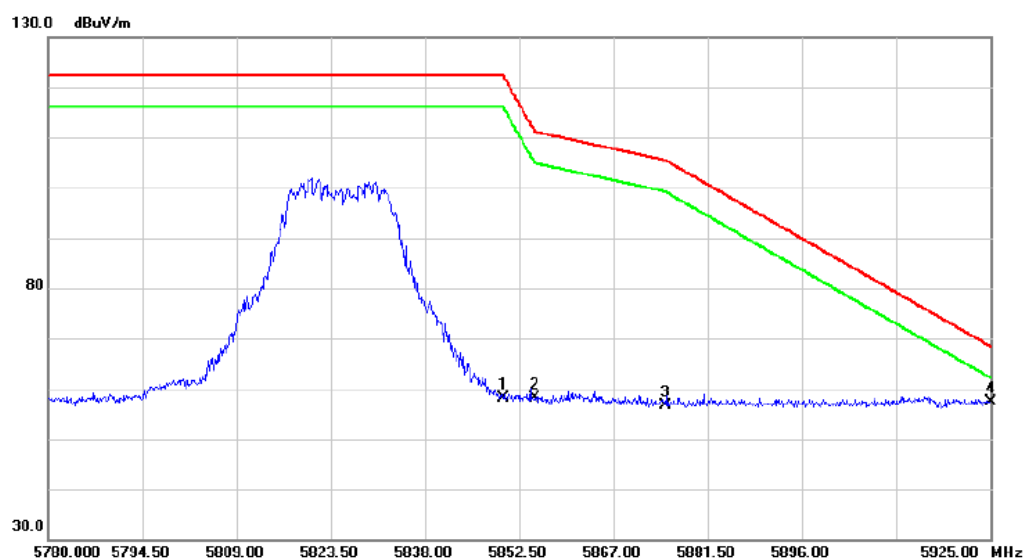

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	51.72	6.29	58.01	122.20	-64.19	peak		
2		5855.000	51.86	6.22	58.08	110.80	-52.72	peak		
3		5875.000	50.76	5.99	56.75	105.20	-48.45	peak		
4	*	5925.000	51.31	6.06	57.37	68.20	-10.83	peak		


HORIZONTAL

Radiated Emission

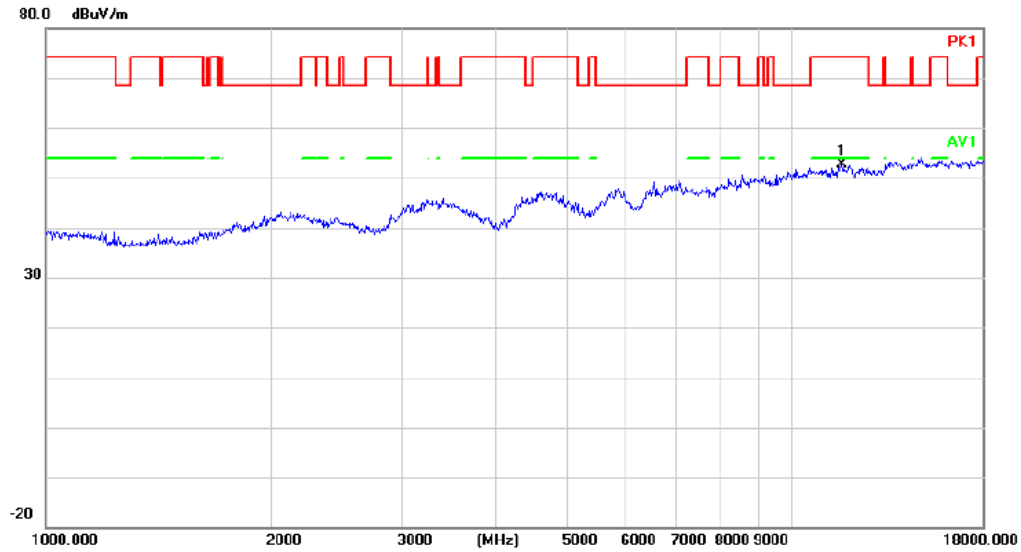

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	46.21	6.35	52.56	74.00	-21.44	peak		


Radiated Emission

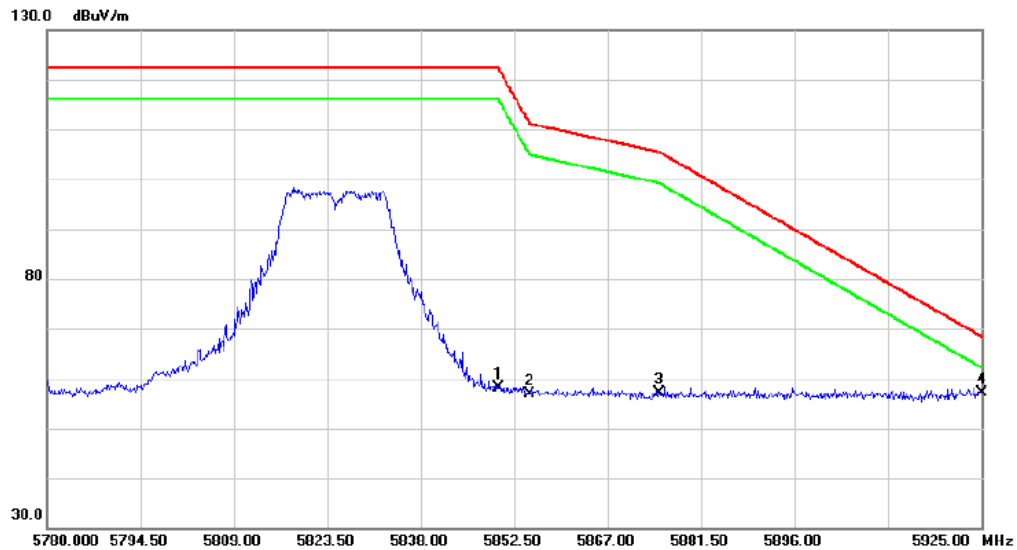

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	51.81	6.29	58.10	122.20	-64.10	peak		
2		5855.000	50.60	6.22	56.82	110.80	-53.98	peak		
3		5875.000	51.19	5.99	57.18	105.20	-48.02	peak		
4	*	5925.000	50.96	6.06	57.02	68.20	-11.18	peak		


VERTICAL

Radiated Emission

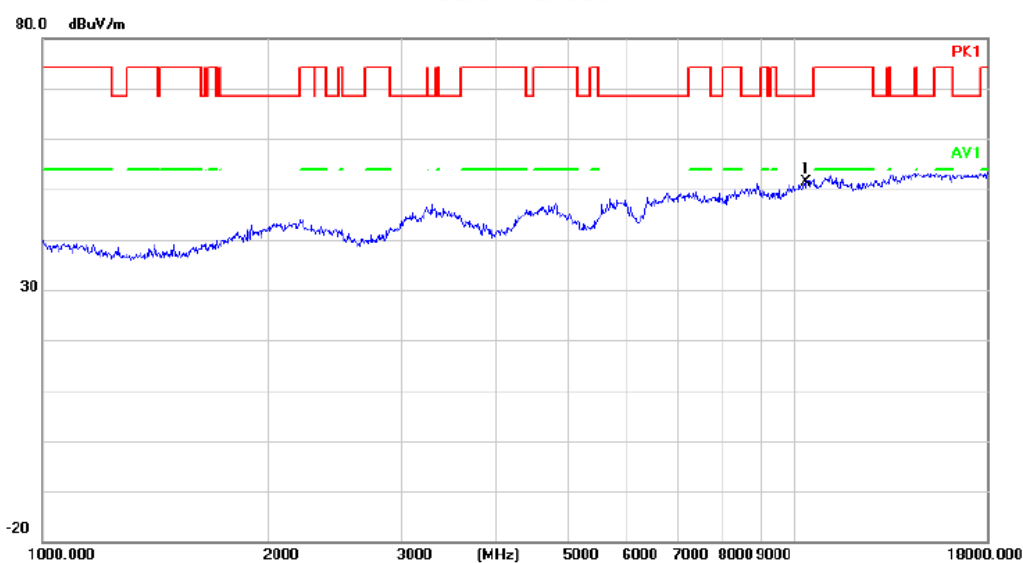

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	45.24	6.07	51.31	68.20	-16.89	peak		


Radiated Emission

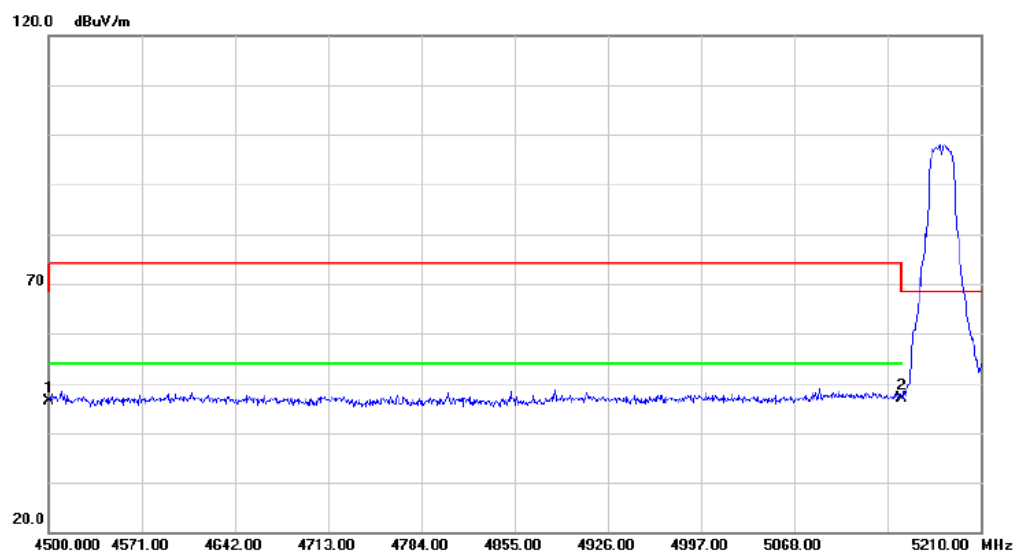

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	42.35	3.92	46.27	68.20	-21.93	peak		
2	*	5150.000	41.33	5.56	46.89	68.20	-21.31	peak		


HORIZONTAL

Radiated Emission

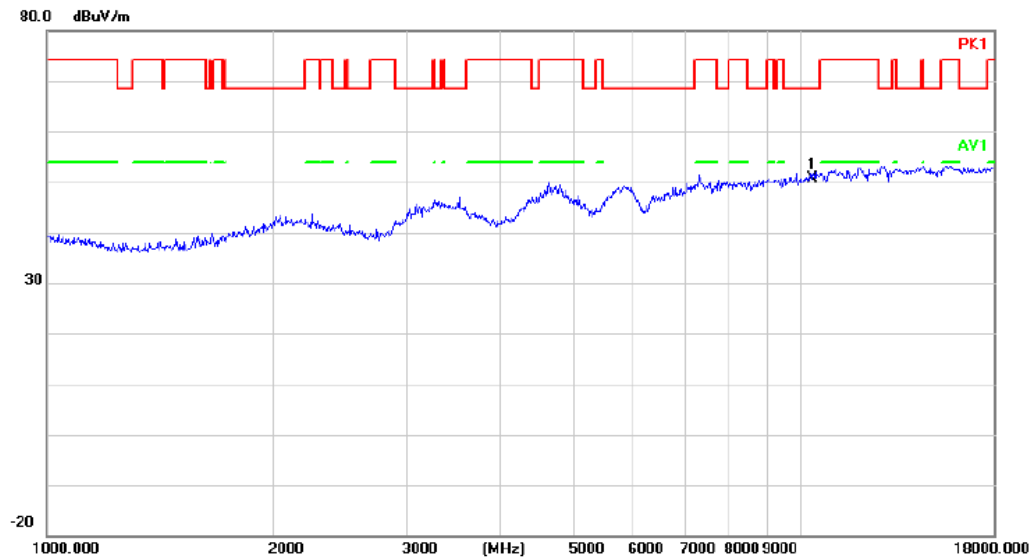

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10360.000	44.45	6.07	50.52	68.20	-17.68	peak	


Radiated Emission

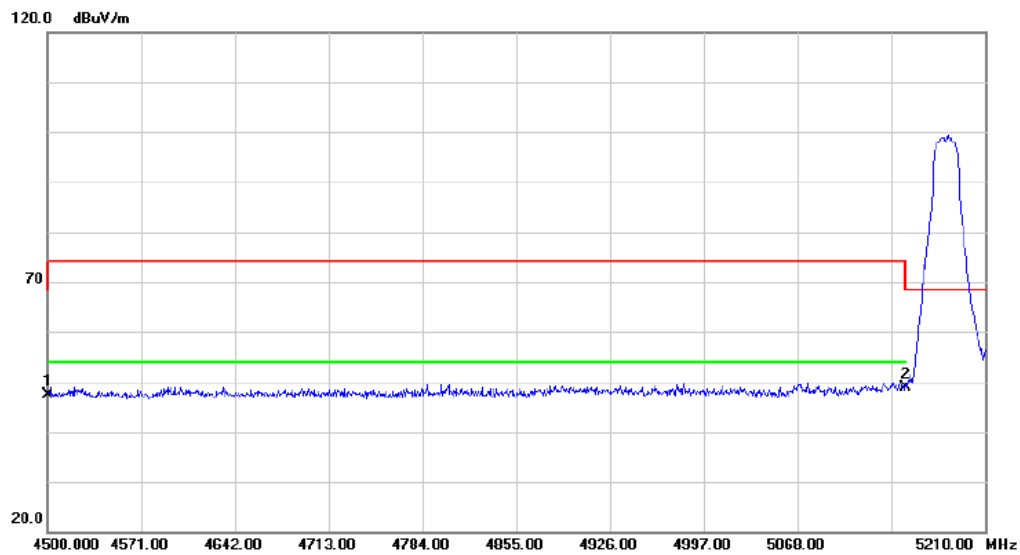

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	43.58	3.92	47.50	68.20	-20.70	peak	
2	*	5150.000	43.21	5.56	48.77	68.20	-19.43	peak	

VERTICAL


Radiated Emission

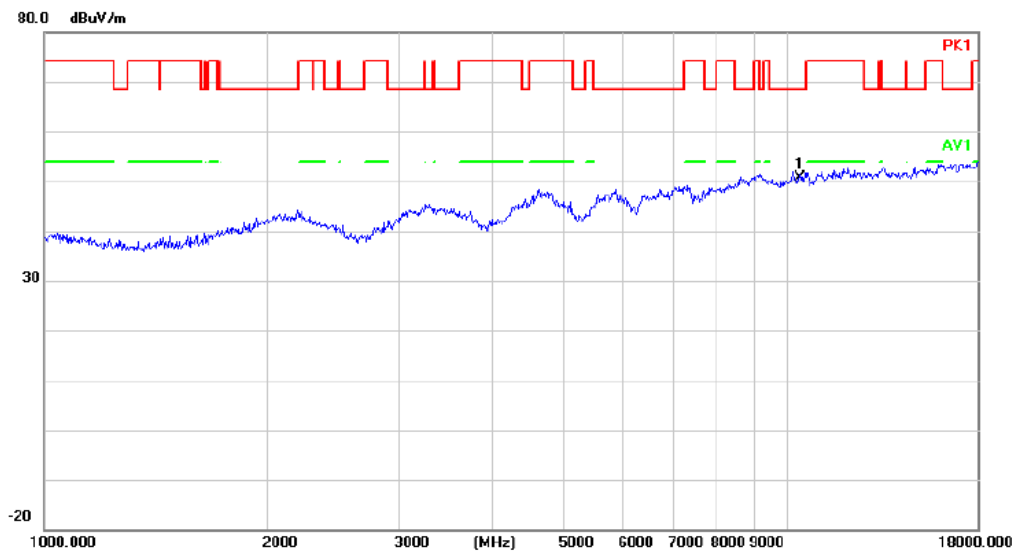

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	44.31	6.20	50.51	68.20	-17.69	peak		Comment

HORIZONTAL


Radiated Emission

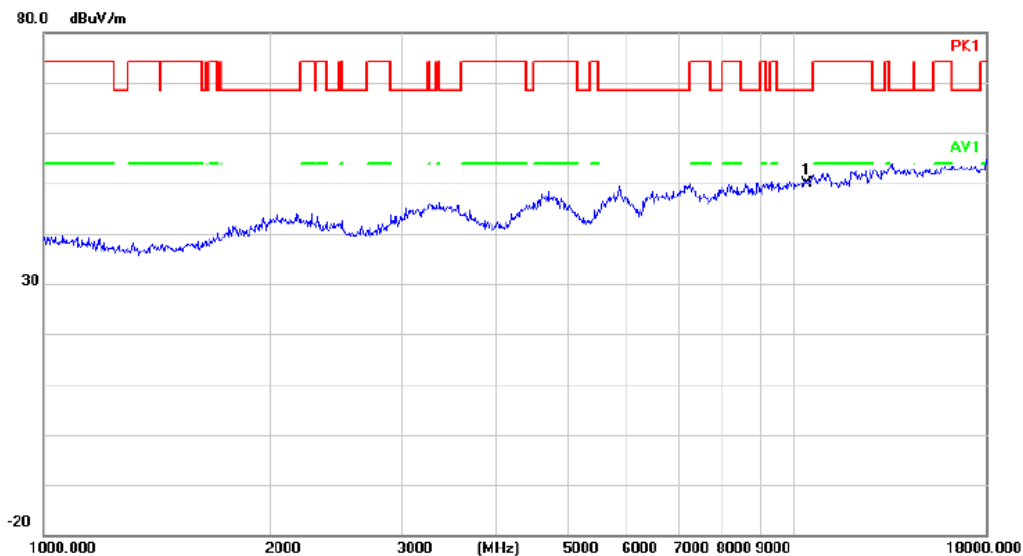

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	43.63	6.20	49.83	68.20	-18.37	peak		Comment

VERTICAL


Radiated Emission

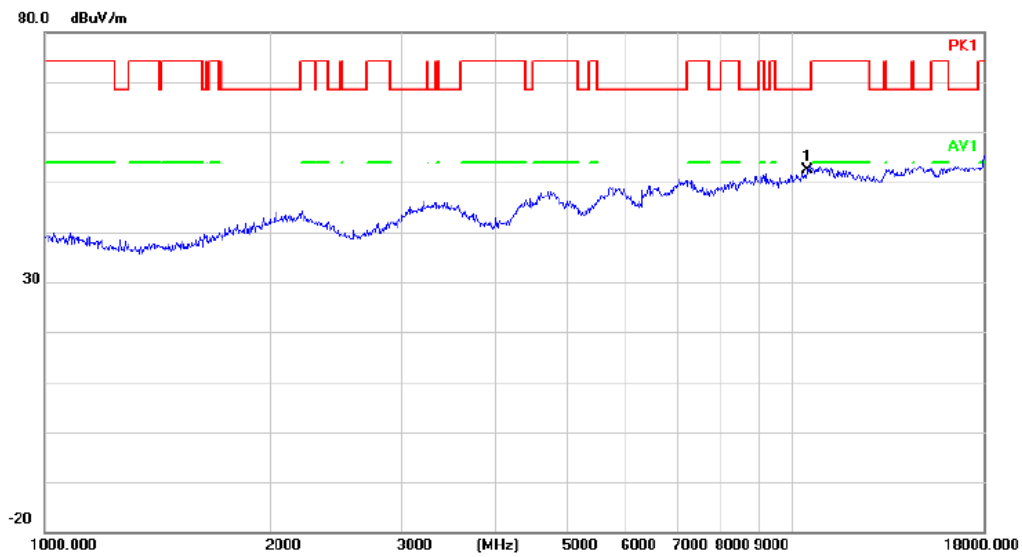

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10480.000	45.91	6.38	52.29	68.20	-15.91	peak	

HORIZONTAL


Radiated Emission

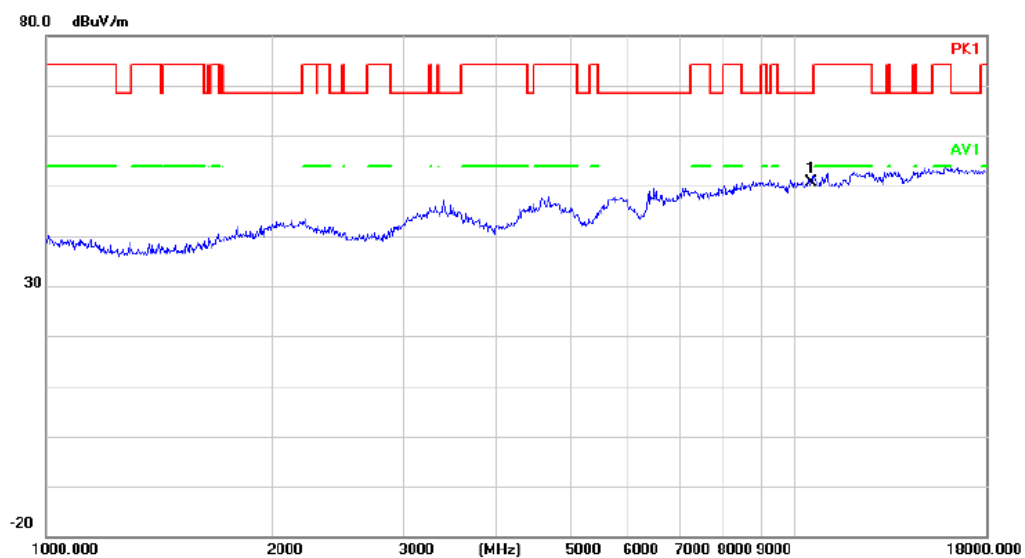

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10480.000	44.36	6.38	50.74	68.20	-17.46	peak	


VERTICAL

Radiated Emission

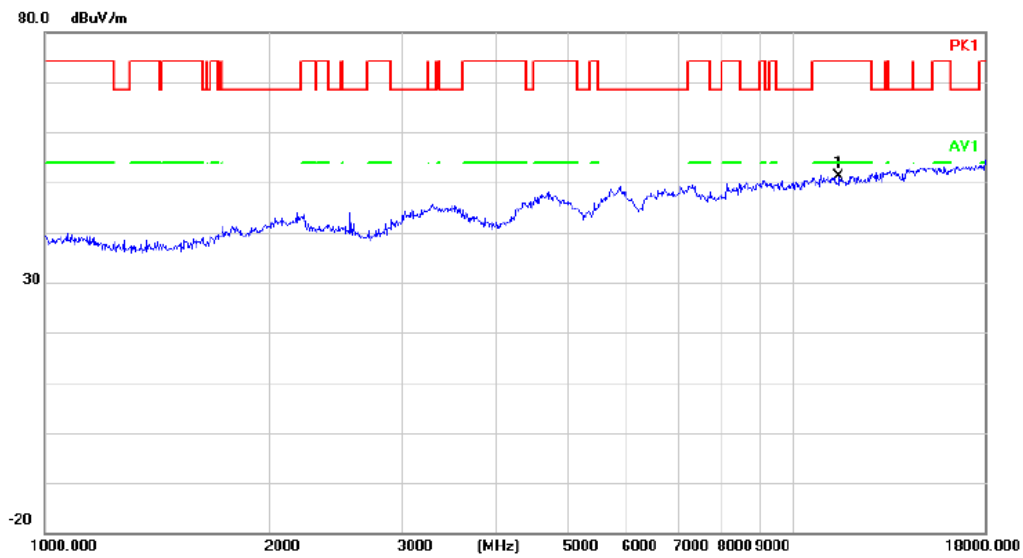

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11490.000	44.47	6.70	51.17	74.00	-22.83	peak		


Radiated Emission

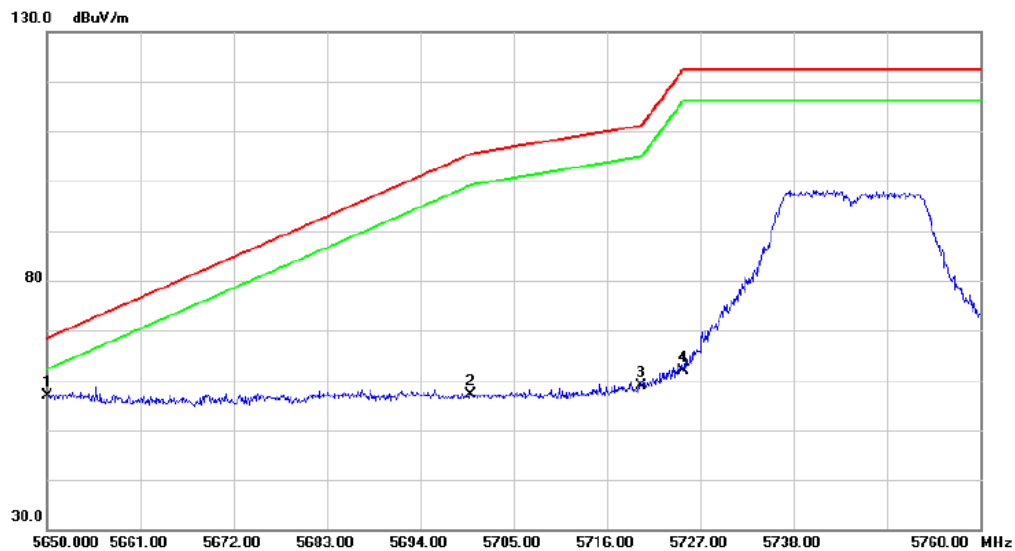

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	51.26	5.56	56.82	68.20	-11.38	peak		
2		5700.000	51.32	5.70	57.02	105.20	-48.18	peak		
3		5720.000	53.29	5.47	58.76	110.80	-52.04	peak		
4		5725.000	56.50	5.42	61.92	122.20	-60.28	peak		


HORIZONTAL

Radiated Emission

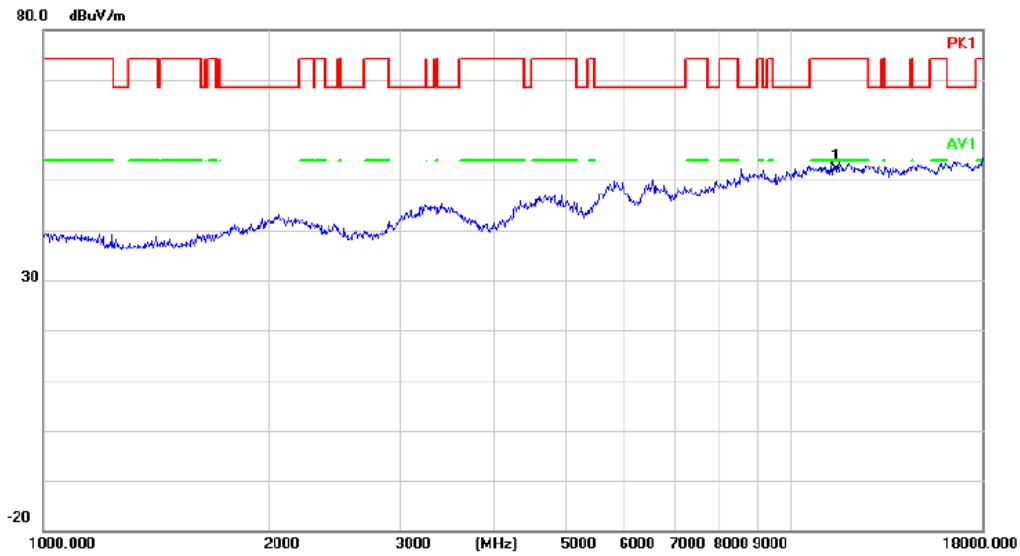

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	45.40	6.70	52.10	74.00	-21.90	peak		


Radiated Emission

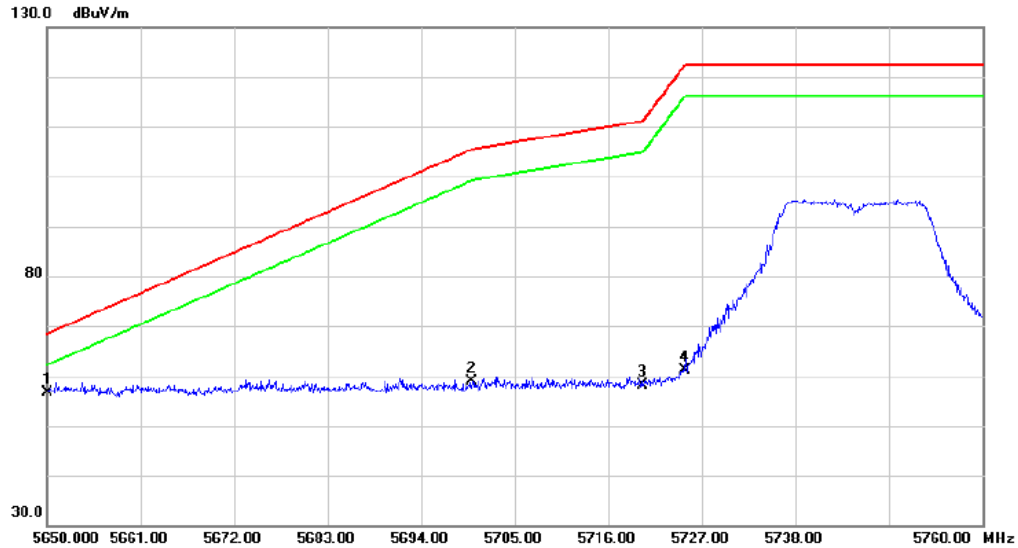

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	51.13	5.56	56.69	68.20	-11.51	peak		
2		5700.000	53.08	5.70	58.78	105.20	-46.42	peak		
3		5720.000	52.71	5.47	58.18	110.80	-52.62	peak		
4		5725.000	55.67	5.42	61.09	122.20	-61.11	peak		

VERTICAL


Radiated Emission

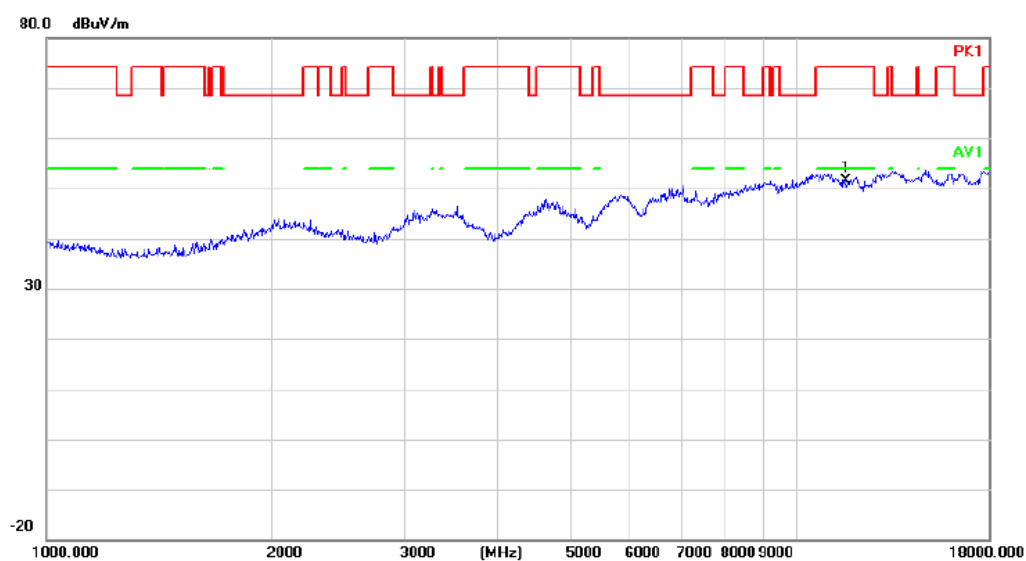

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11570.000	44.76	6.52	51.28	74.00	-22.72	peak	

HORIZONTAL


Radiated Emission

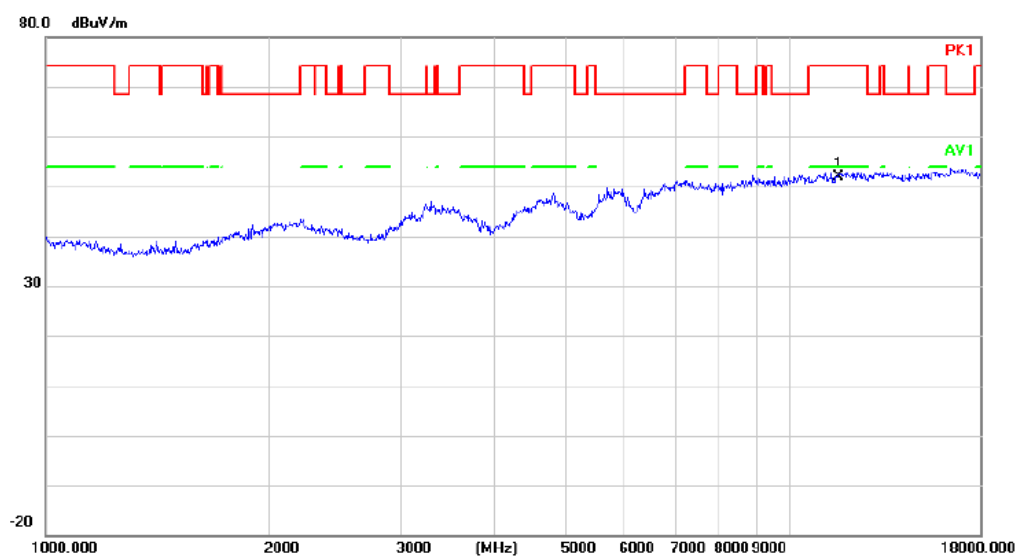

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11570.000	45.48	6.52	52.00	74.00	-22.00	peak	


VERTICAL

Radiated Emission

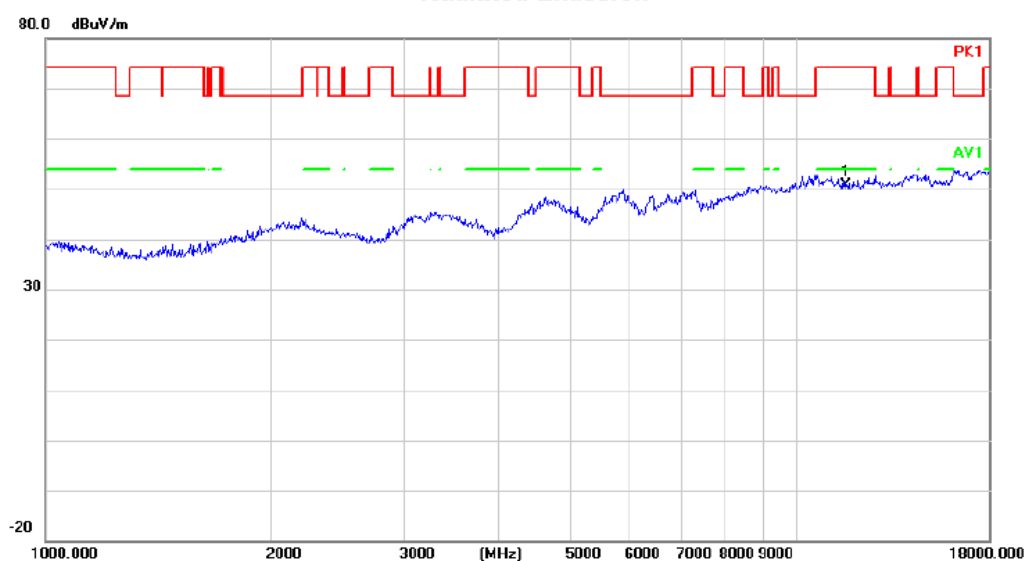

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	44.16	6.35	50.51	74.00	-23.49	peak		


Radiated Emission

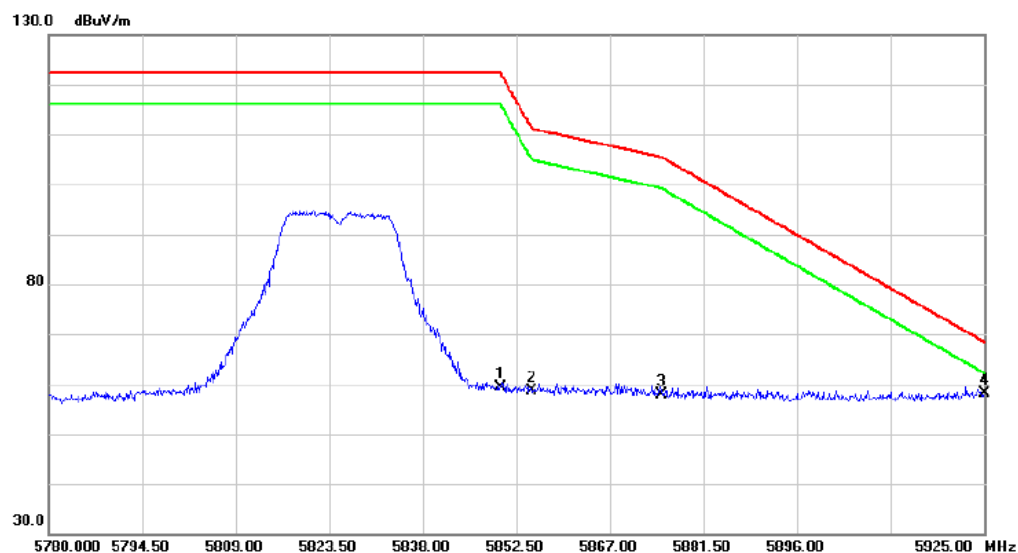

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	53.03	6.29	59.32	122.20	-62.88	peak		
2		5855.000	52.40	6.22	58.62	110.80	-52.18	peak		
3		5875.000	51.96	5.99	57.95	105.20	-47.25	peak		
4	*	5925.000	52.01	6.06	58.07	68.20	-10.13	peak		


HORIZONTAL

Radiated Emission

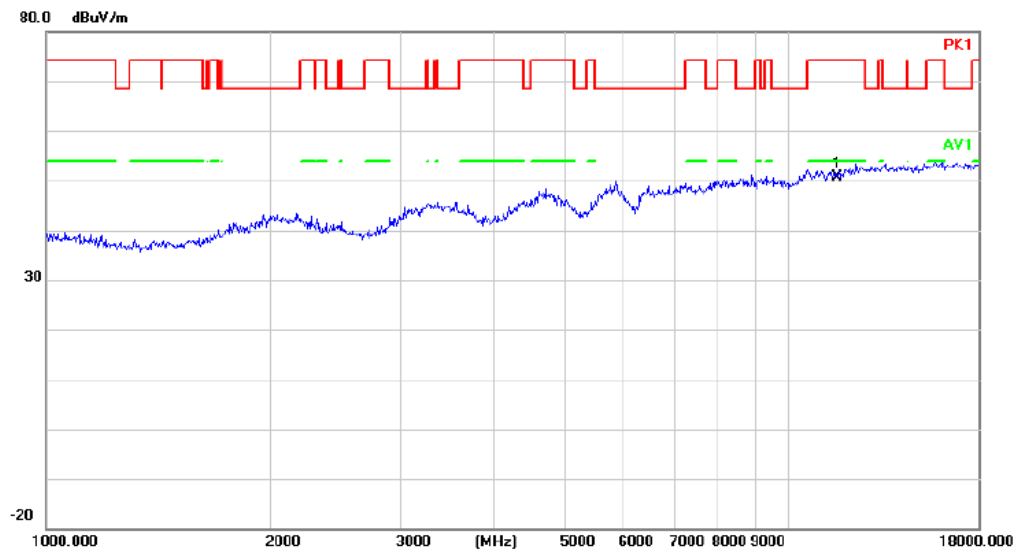

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11650.000	44.22	6.35	50.57	74.00	-23.43	peak		


Radiated Emission

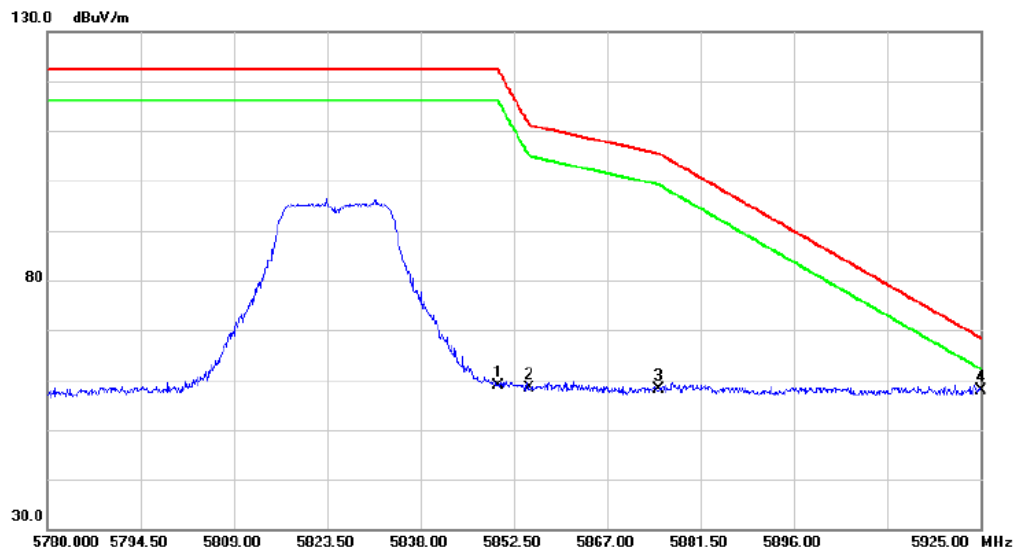

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	52.59	6.29	58.88	122.20	-63.32	peak		
2		5855.000	52.21	6.22	58.43	110.80	-52.37	peak		
3		5875.000	52.22	5.99	58.21	105.20	-46.99	peak		
4	*	5925.000	51.92	6.06	57.98	68.20	-10.22	peak		


VERTICAL

Radiated Emission

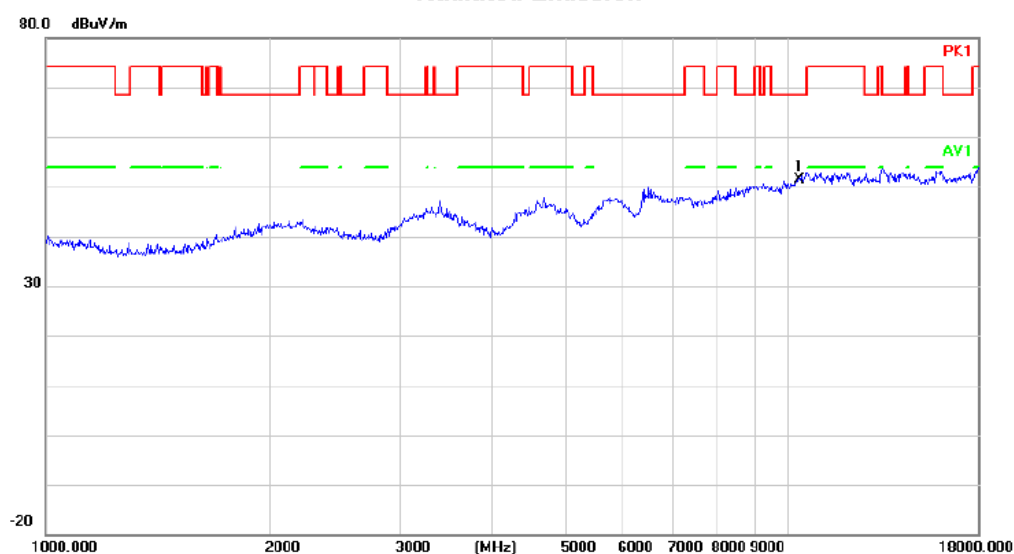

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.000	45.28	6.14	51.42	68.20	-16.78	peak		Comment


Radiated Emission

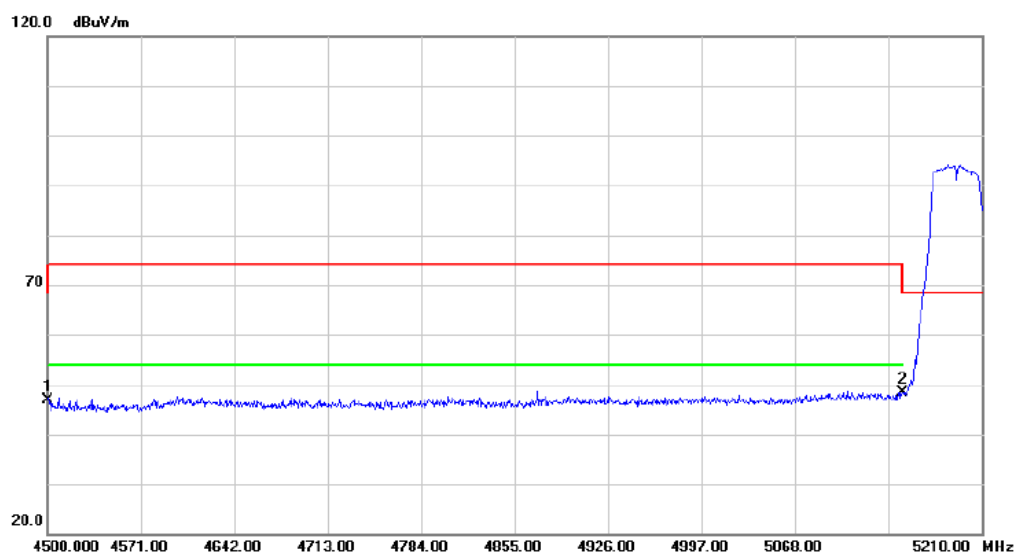

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	43.08	3.92	47.00	68.20	-21.20	peak		Comment
2	*	5150.000	42.81	5.56	48.37	68.20	-19.83	peak		Comment


HORIZONTAL

Radiated Emission

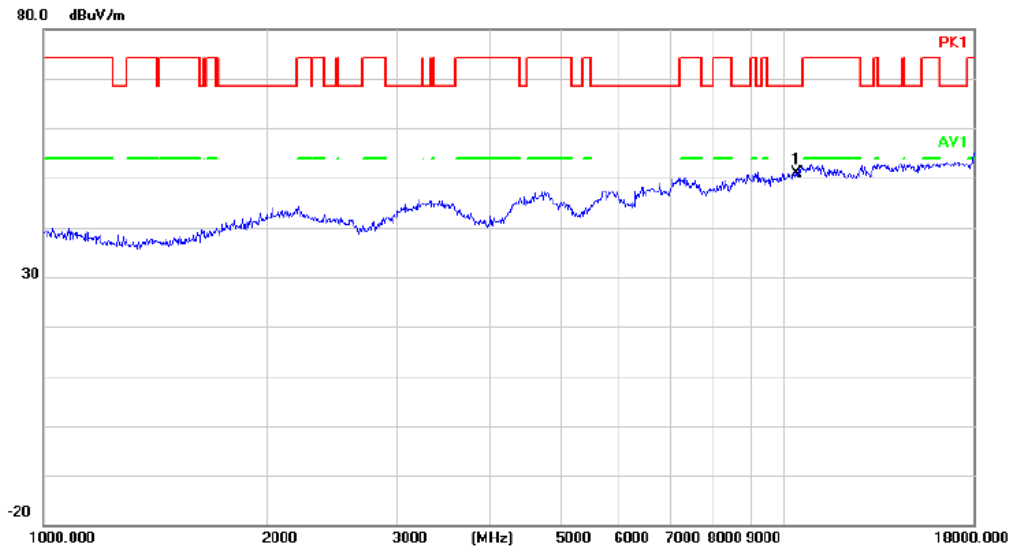

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.000	44.85	6.14	50.99	68.20	-17.21	peak		Comment


Radiated Emission

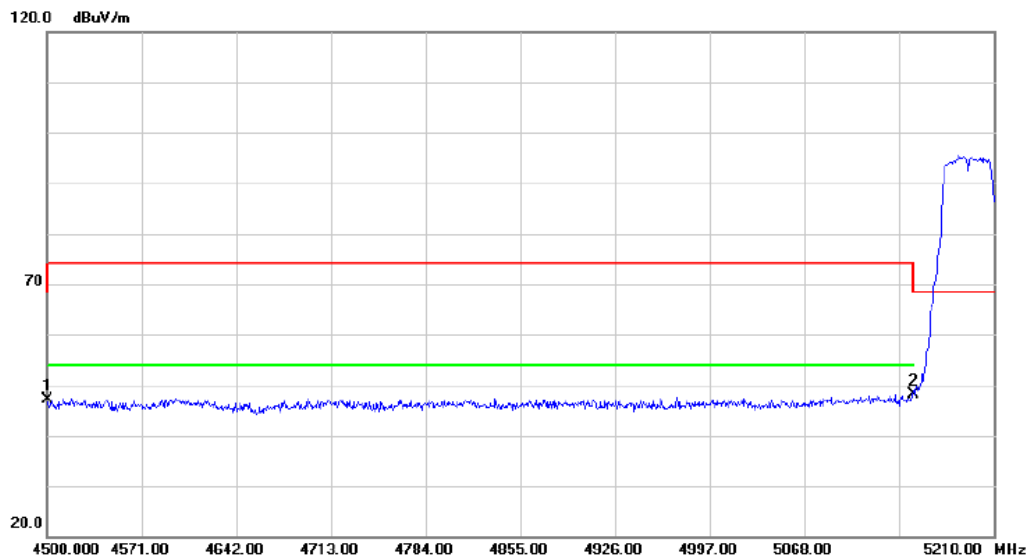

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	43.32	3.92	47.24	68.20	-20.96	peak		Comment
2	*	5150.000	42.62	5.56	48.18	68.20	-20.02	peak		Comment

VERTICAL


Radiated Emission

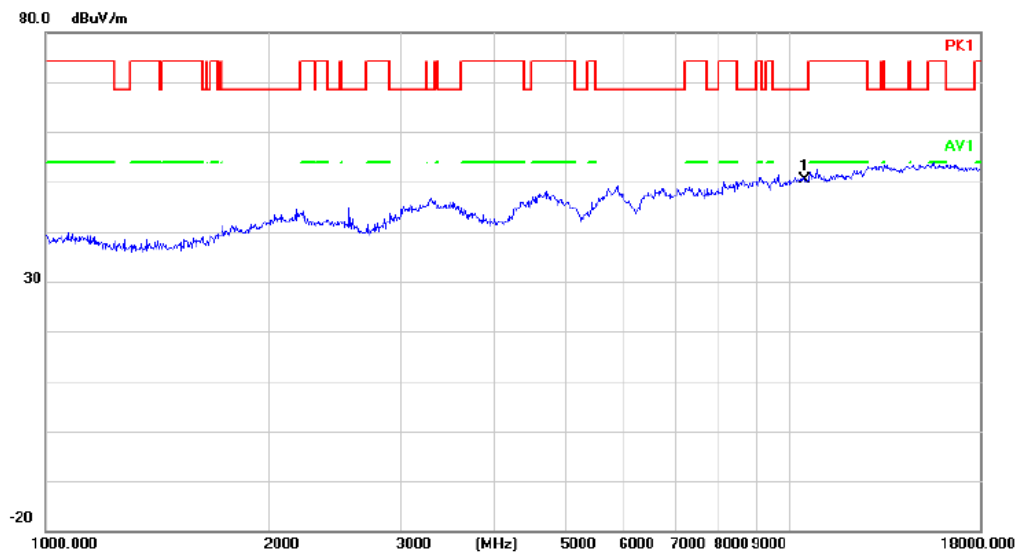

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.000	44.03	6.34	50.37	68.20	-17.83	peak		

HORIZONTAL


Radiated Emission

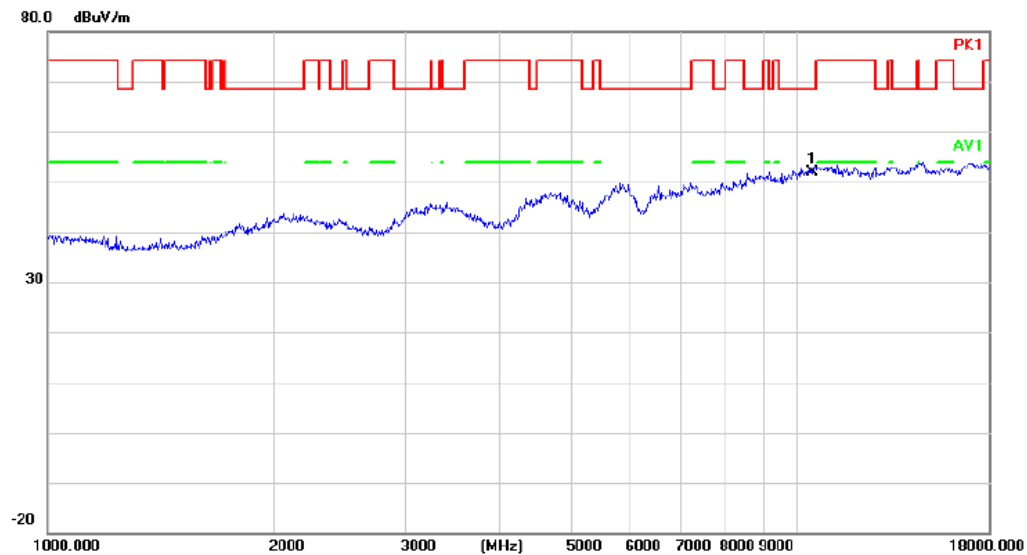

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.000	45.65	6.34	51.99	68.20	-16.21	peak		


VERTICAL

Radiated Emission

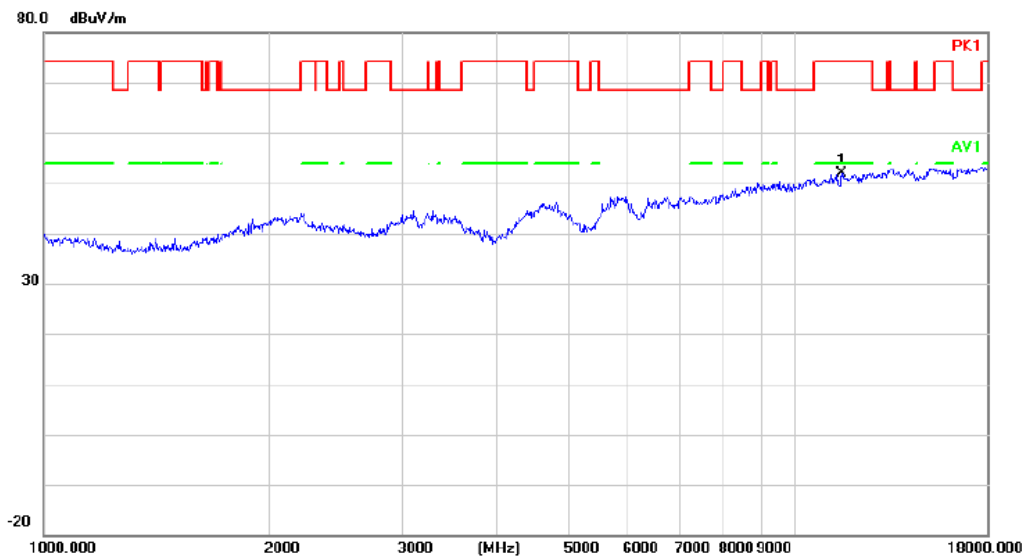

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11510.000	45.28	6.69	51.97	74.00	-22.03	peak		


Radiated Emission

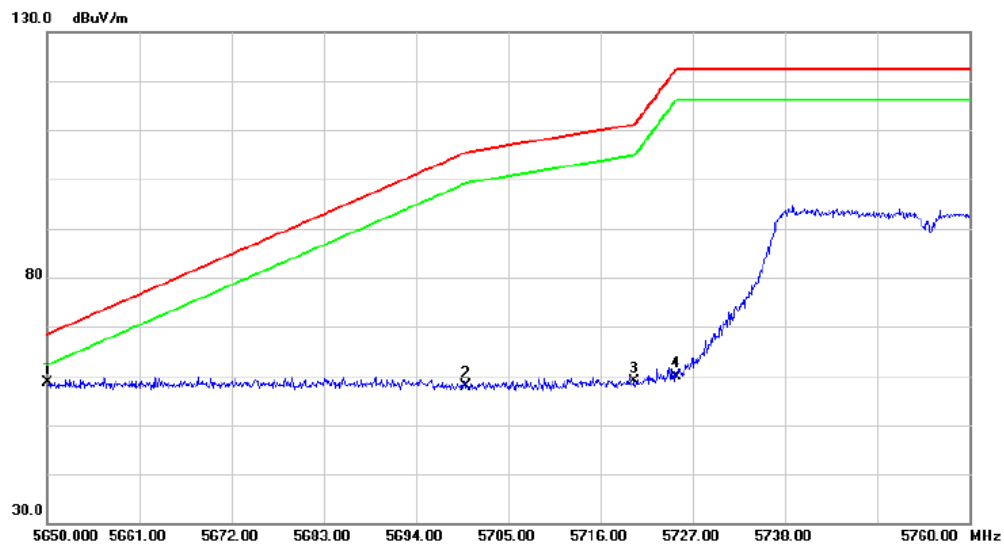

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	53.14	5.56	58.70	68.20	-9.50	peak		
2		5700.000	52.14	5.70	57.84	105.20	-47.36	peak		
3		5720.000	53.48	5.47	58.95	110.80	-51.85	peak		
4		5725.000	54.54	5.42	59.96	122.20	-62.24	peak		


HORIZONTAL

Radiated Emission

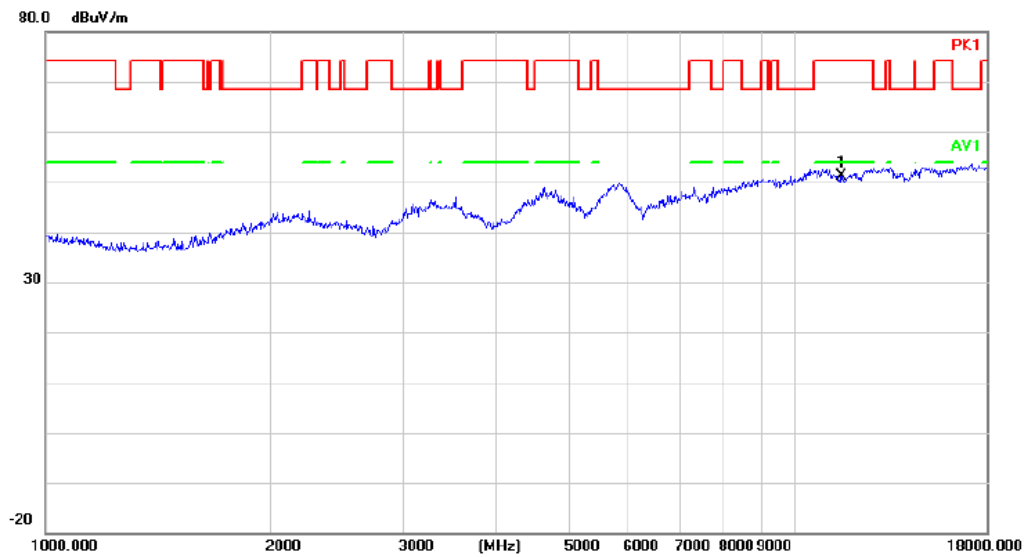

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11510.000	44.41	6.69	51.10	74.00	-22.90	peak		


Radiated Emission

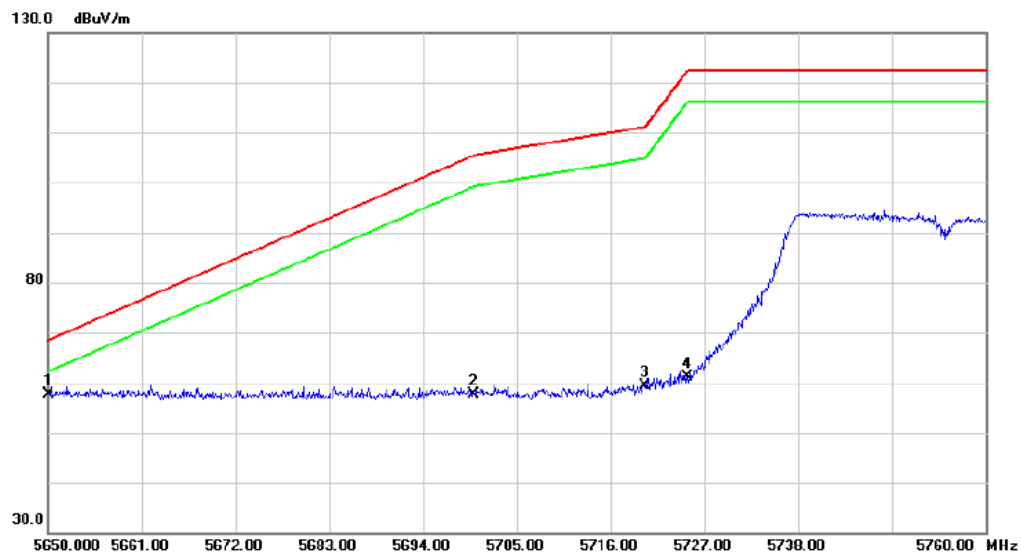

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	51.97	5.56	57.53	68.20	-10.67	peak		
2		5700.000	51.97	5.70	57.67	105.20	-47.53	peak		
3		5720.000	54.02	5.47	59.49	110.80	-51.31	peak		
4		5725.000	55.76	5.42	61.18	122.20	-61.02	peak		


VERTICAL

Radiated Emission

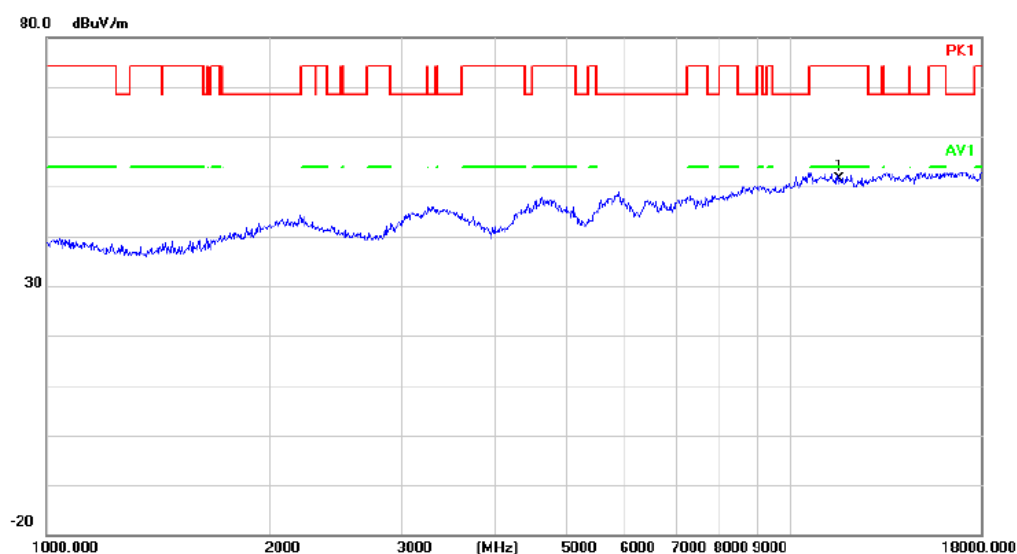

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11590.000	45.01	6.47	51.48	74.00	-22.52	peak		Comment


Radiated Emission

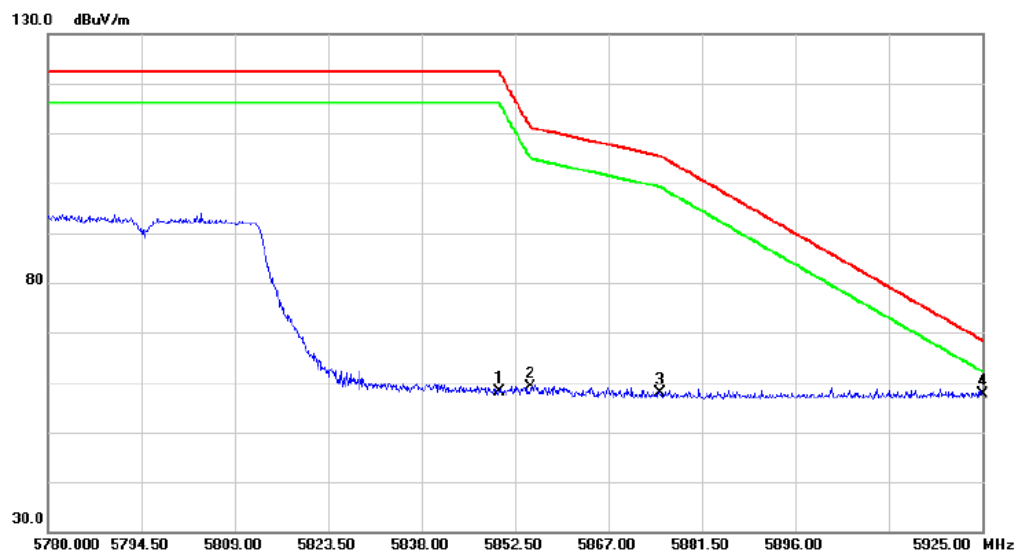

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	51.93	6.29	58.22	122.20	-63.98	peak		Comment
2		5855.000	52.92	6.22	59.14	110.80	-51.66	peak		
3		5875.000	51.81	5.99	57.80	105.20	-47.40	peak		
4	*	5925.000	51.49	6.06	57.55	68.20	-10.65	peak		


HORIZONTAL

Radiated Emission

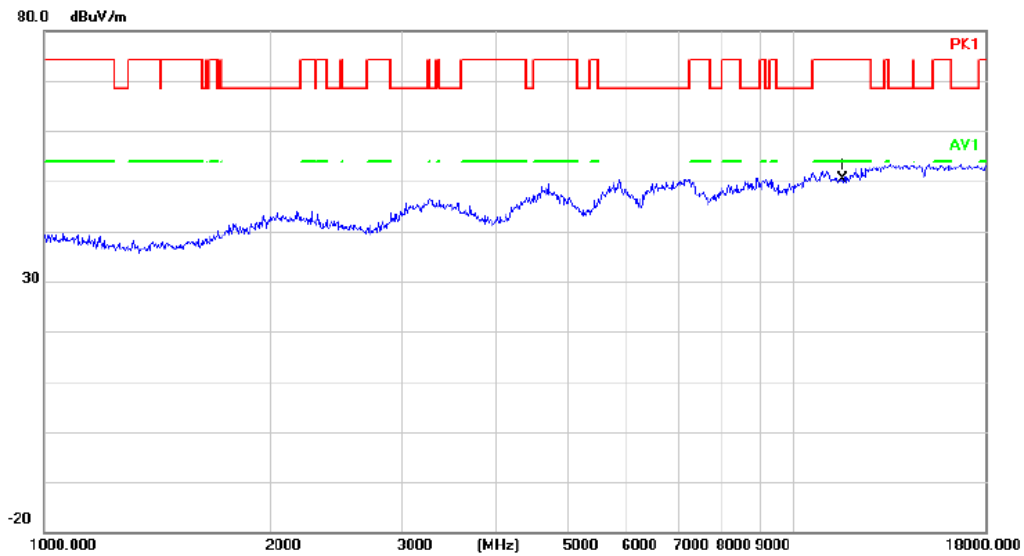

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11590.000	44.03	6.47	50.50	74.00	-23.50	peak		


Radiated Emission

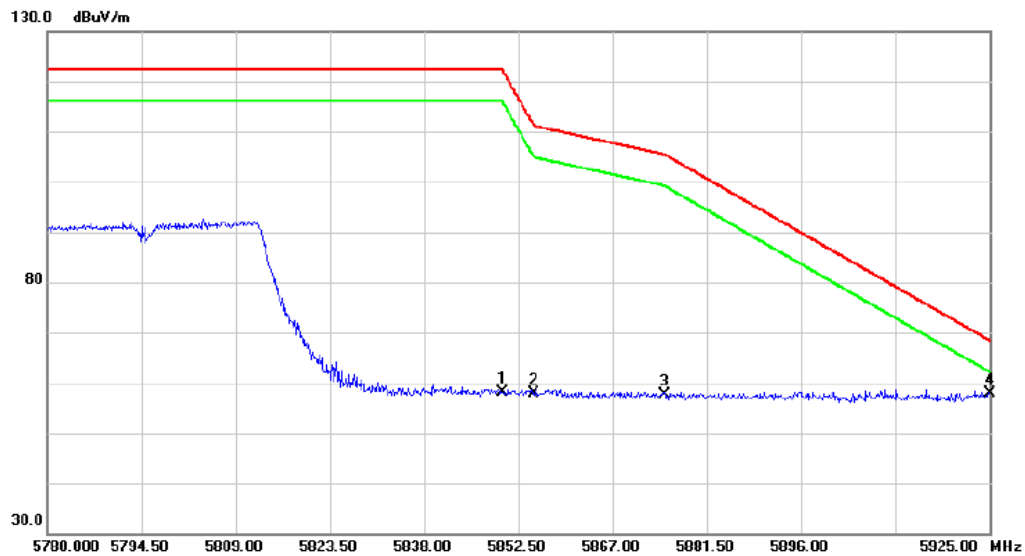

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	51.90	6.29	58.19	122.20	-64.01	peak		
2		5855.000	51.69	6.22	57.91	110.80	-52.89	peak		
3		5875.000	51.60	5.99	57.59	105.20	-47.61	peak		
4	*	5925.000	51.76	6.06	57.82	68.20	-10.38	peak		


VERTICAL

Radiated Emission

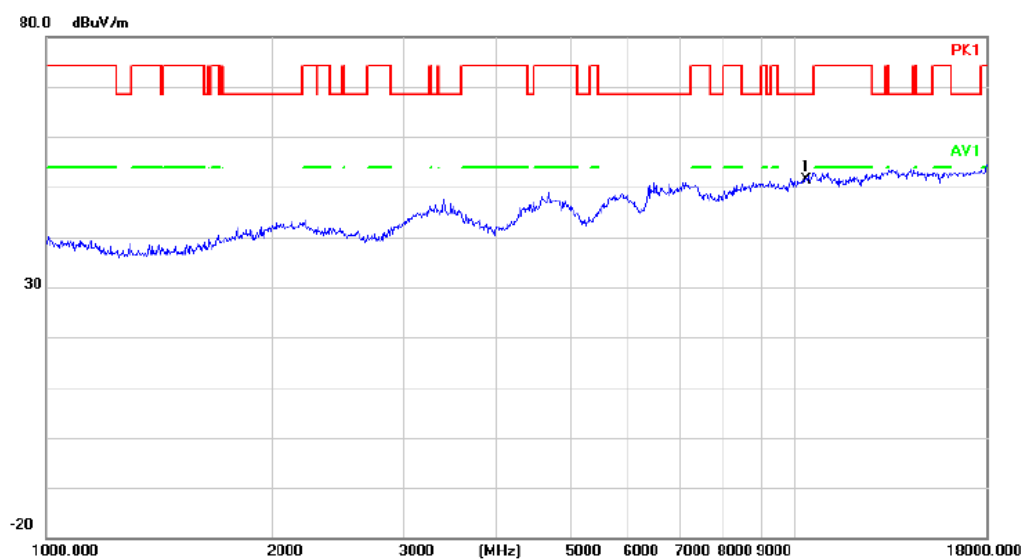

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10360.000	45.35	6.07	51.42	68.20	-16.78	peak	


Radiated Emission

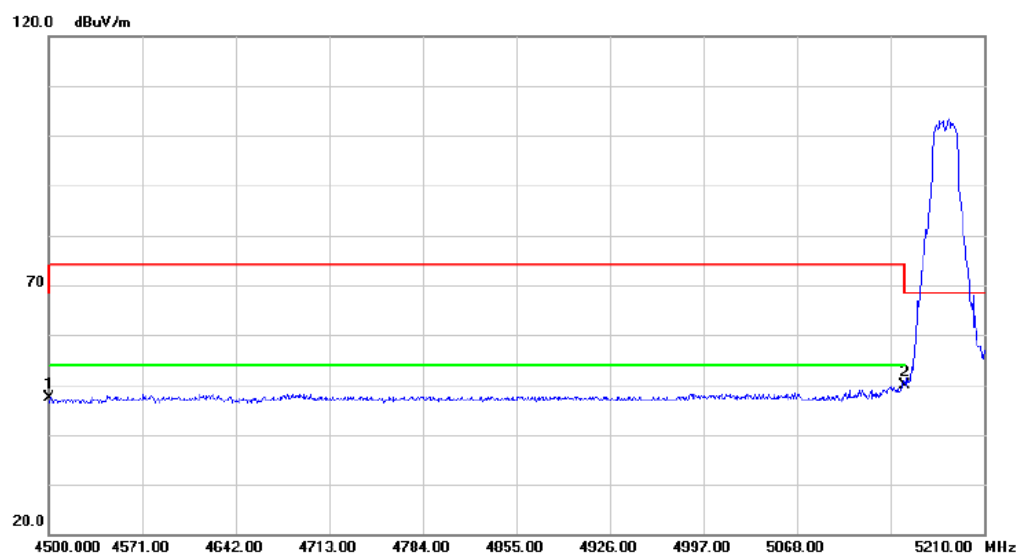

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	43.38	3.92	47.30	68.20	-20.90	peak	
2	*	5150.000	44.44	5.56	50.00	68.20	-18.20	peak	


HORIZONTAL

Radiated Emission

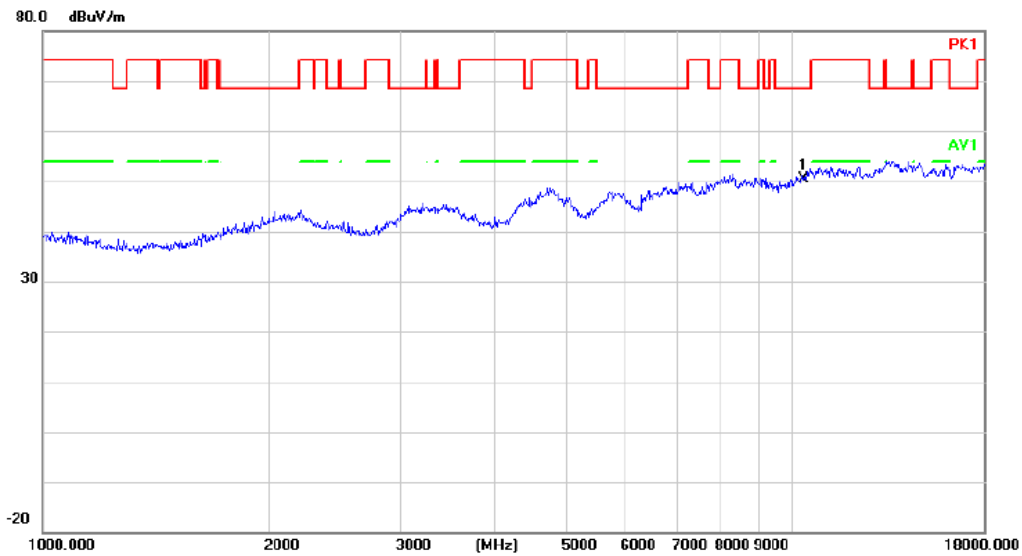

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10360.000	44.35	6.07	50.42	68.20	-17.78	peak	


Radiated Emission

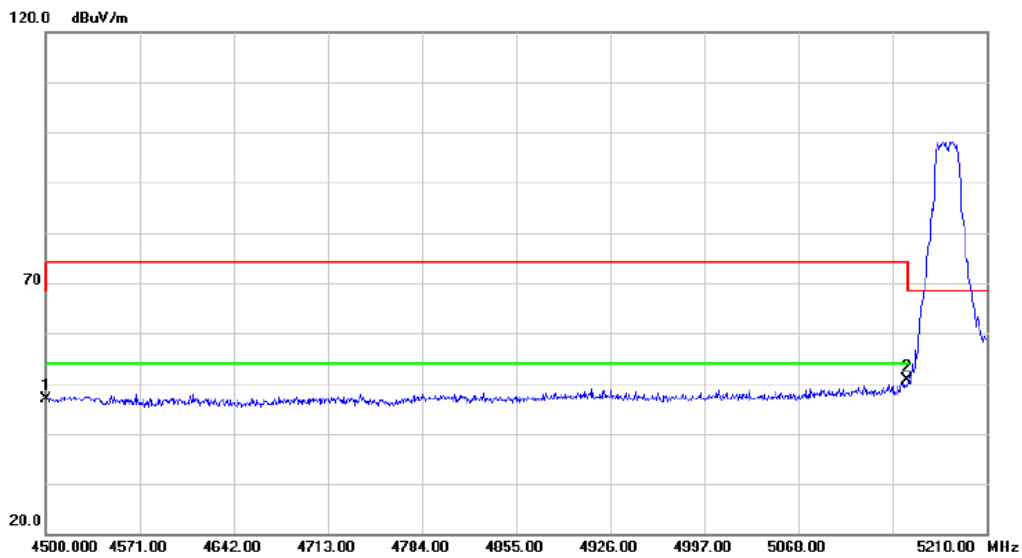

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	42.99	3.92	46.91	68.20	-21.29	peak	
2	*	5150.000	45.02	5.56	50.58	68.20	-17.62	peak	

VERTICAL


Radiated Emission

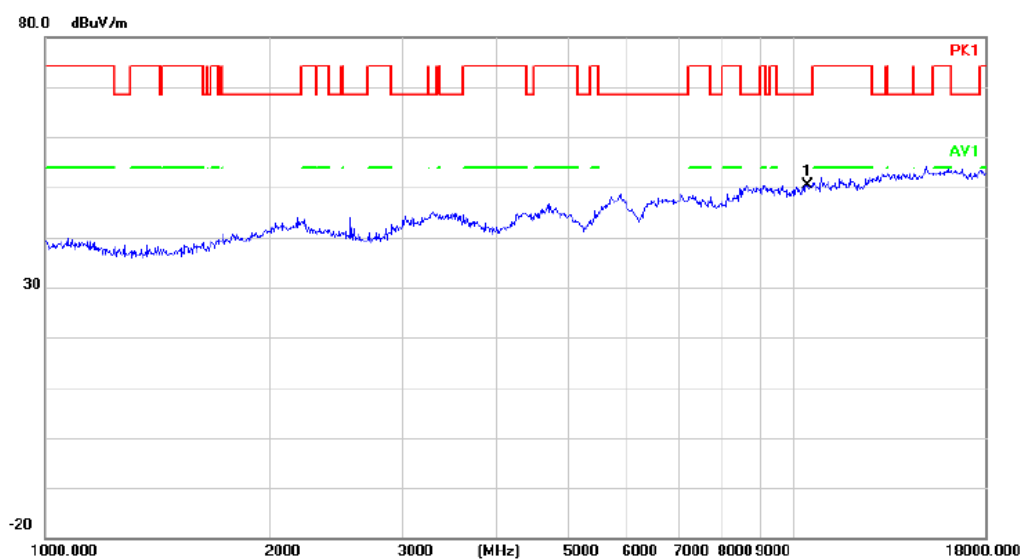

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	44.17	6.20	50.37	68.20	-17.83	peak		Comment

HORIZONTAL


Radiated Emission

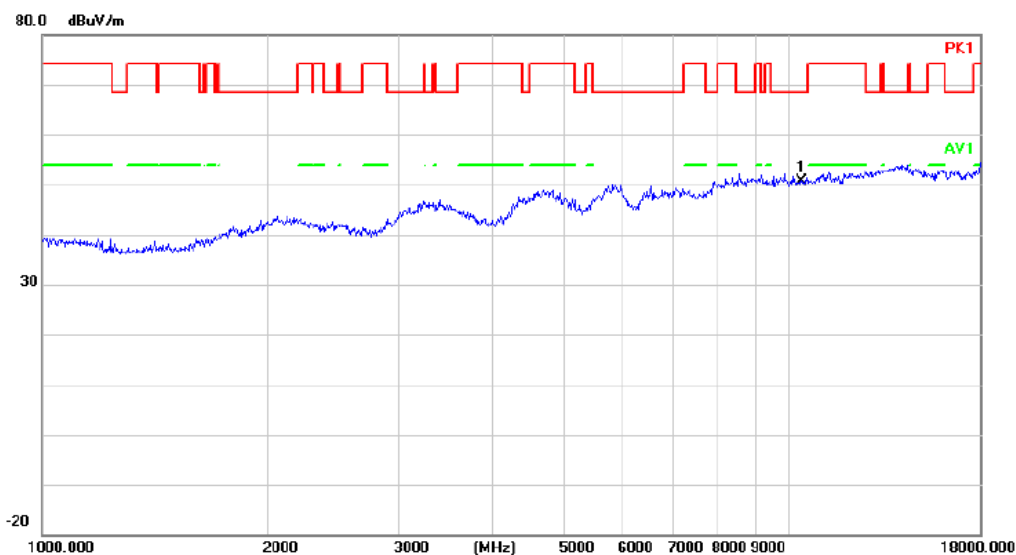

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	44.41	6.20	50.61	68.20	-17.59	peak		Comment

VERTICAL


Radiated Emission

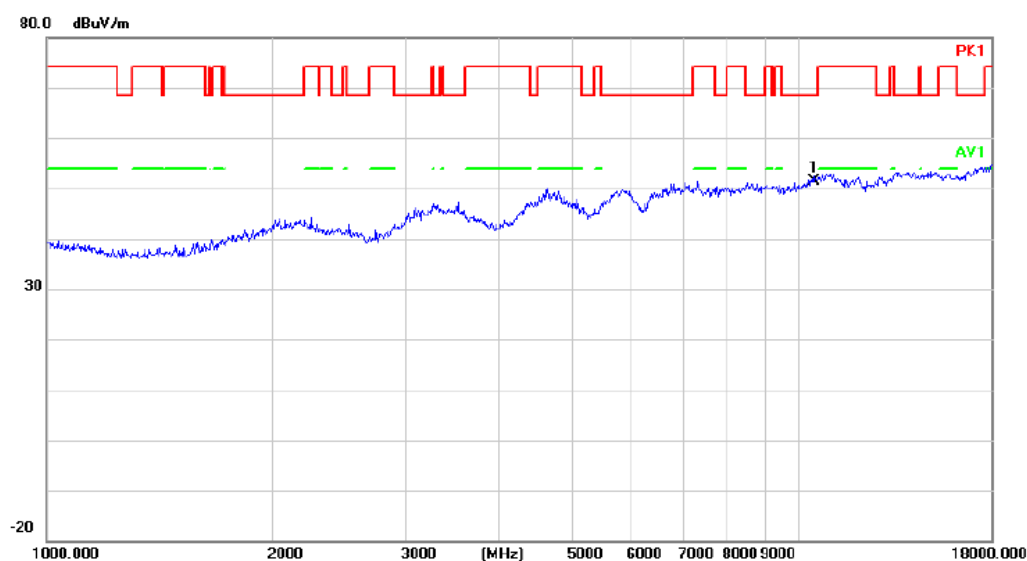

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10480.000	44.93	6.38	51.31	68.20	-16.89	peak	

HORIZONTAL


Radiated Emission

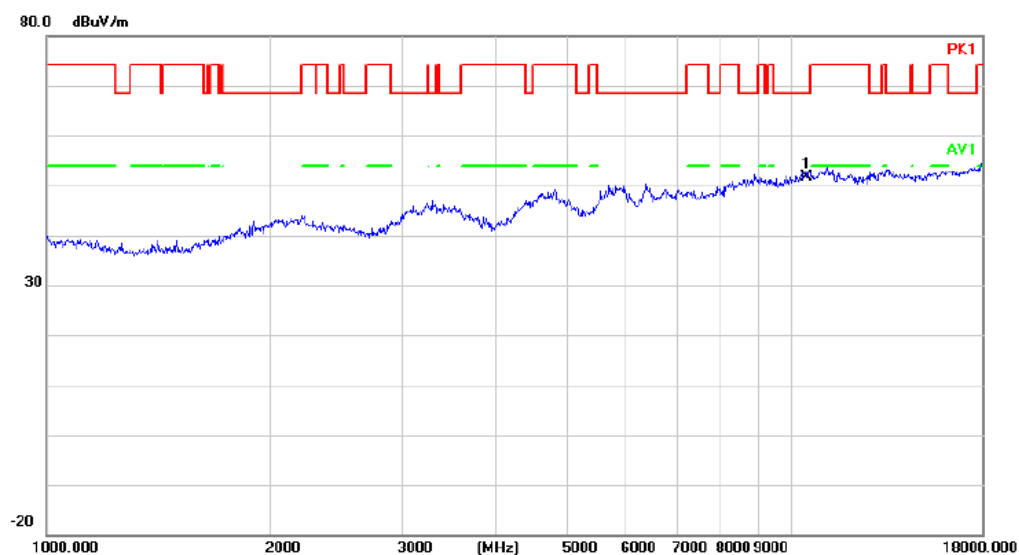

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10480.000	45.32	6.38	51.70	68.20	-16.50	peak	


VERTICAL

Radiated Emission

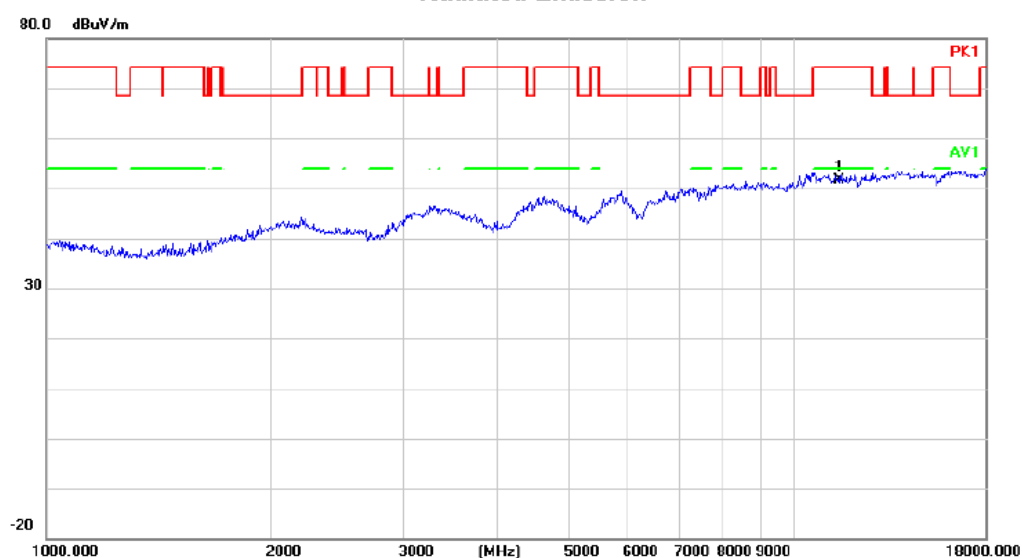

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	44.98	6.70	51.68	74.00	-22.32	peak		Comment


Radiated Emission

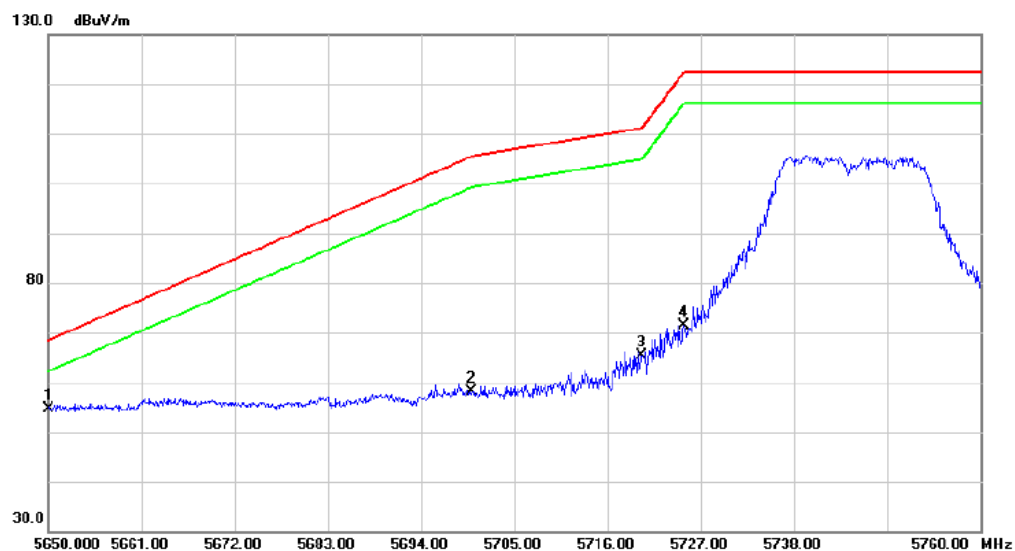

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	49.07	5.56	54.63	88.20	-13.57	peak		Comment
2		5700.000	52.36	5.70	58.06	105.20	-47.14	peak		
3		5720.000	80.01	5.47	85.48	110.80	-45.32	peak		
4		5725.000	85.99	5.42	71.41	122.20	-50.79	peak		


HORIZONTAL

Radiated Emission

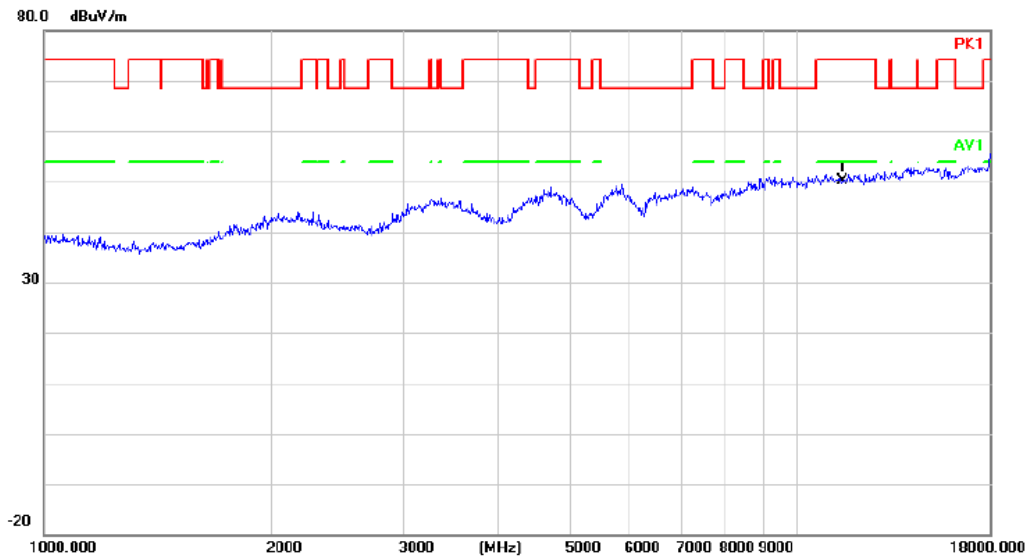

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11490.000	43.42	6.70	50.12	74.00	-23.88	peak	


Radiated Emission

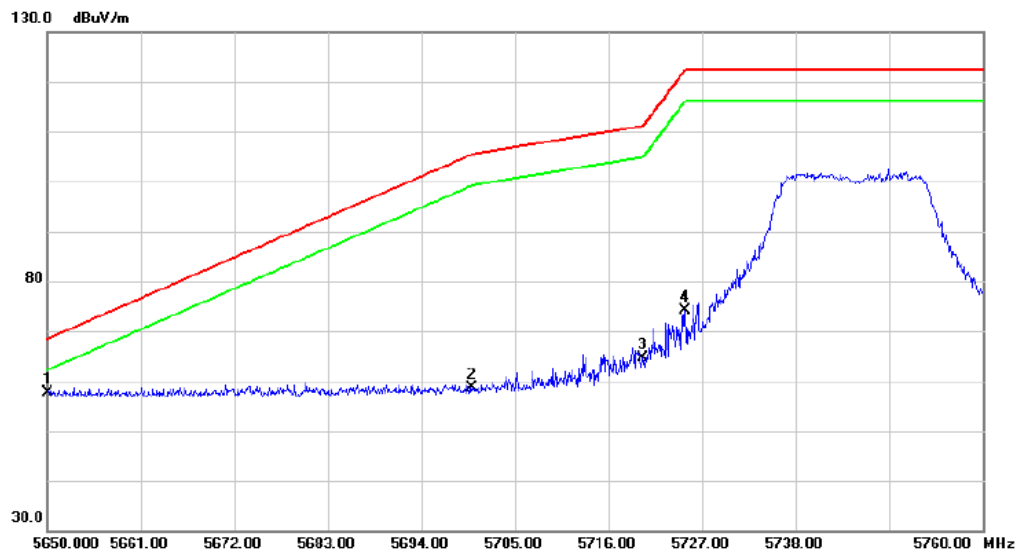

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	52.17	5.56	57.73	68.20	-10.47	peak	
2		5700.000	52.82	5.70	58.52	105.20	-46.68	peak	
3		5720.000	59.06	5.47	64.53	110.80	-46.27	peak	
4		5725.000	68.62	5.42	74.04	122.20	-48.16	peak	

VERTICAL


Radiated Emission

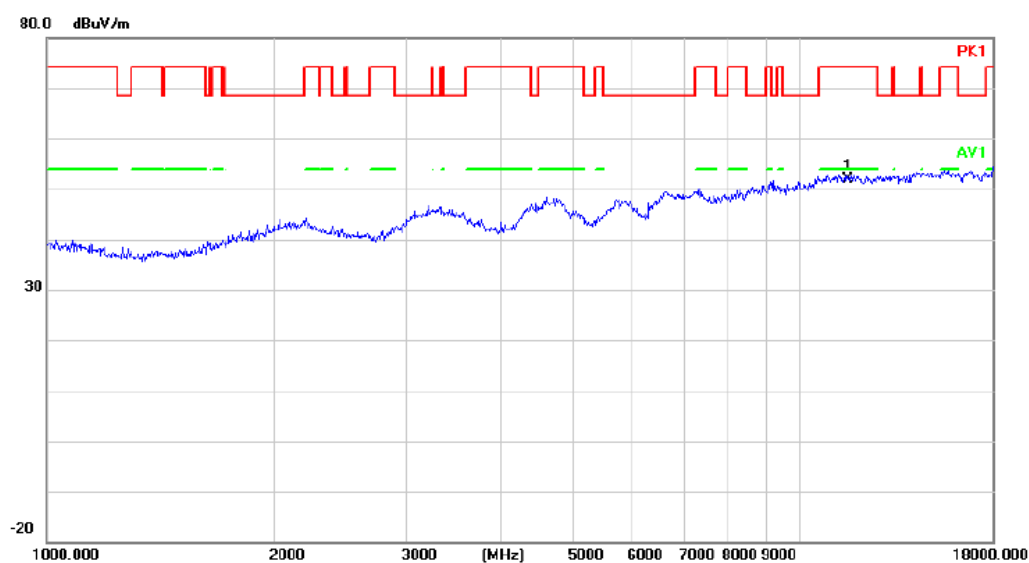

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	45.27	6.52	51.79	74.00	-22.21	peak		Comment

HORIZONTAL


Radiated Emission

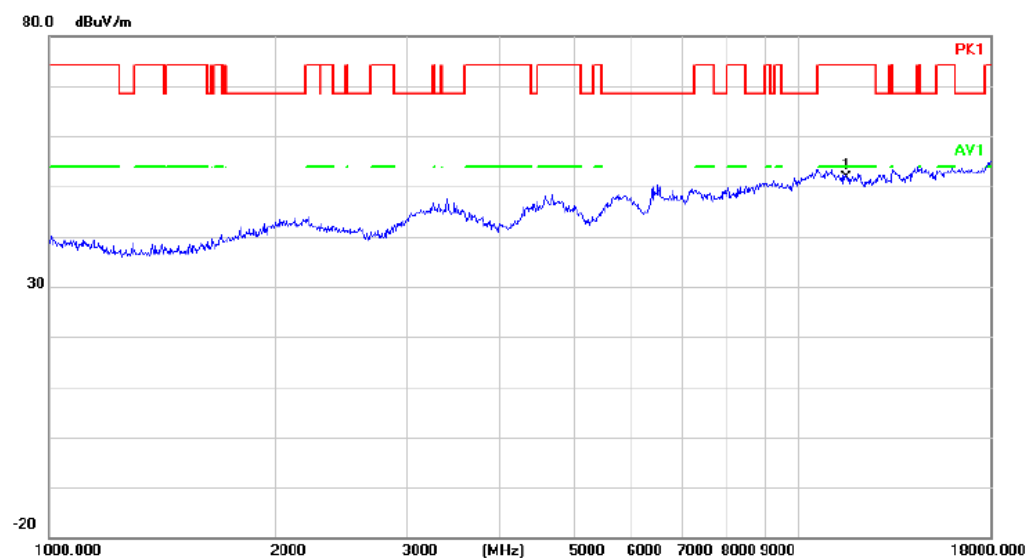

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	45.20	6.52	51.72	74.00	-22.28	peak		Comment


VERTICAL

Radiated Emission

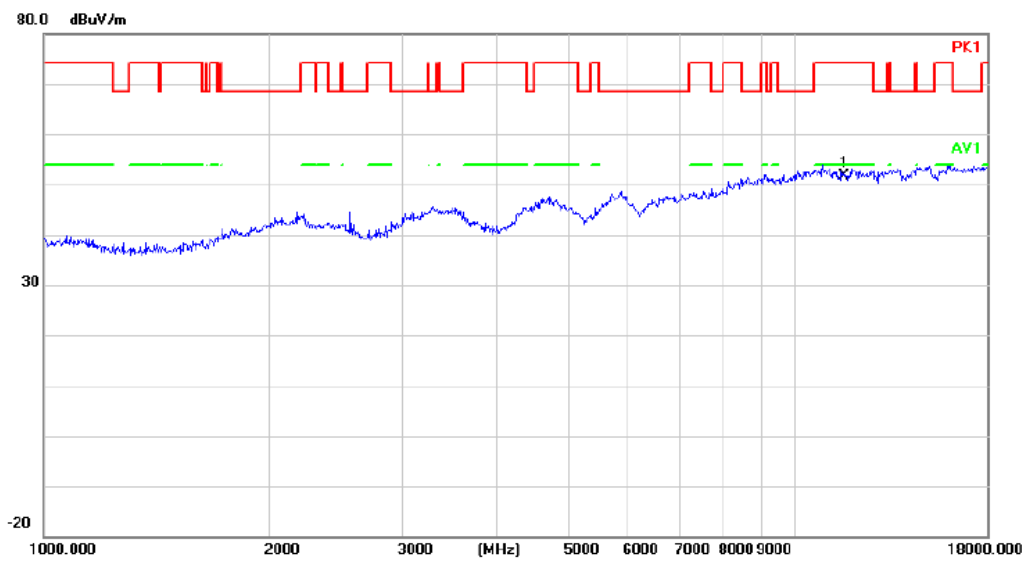

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	45.24	6.35	51.59	74.00	-22.41	peak		


Radiated Emission

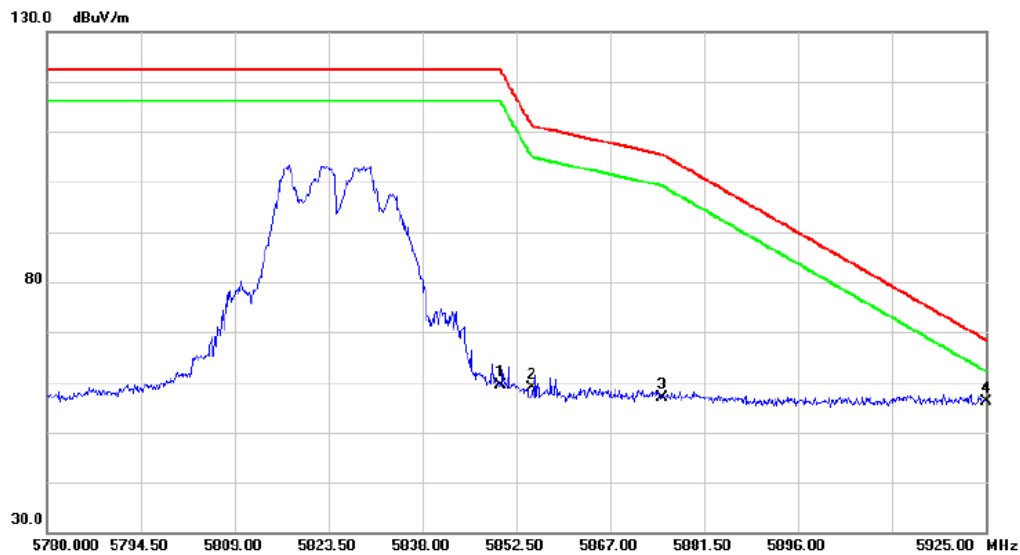

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	52.98	6.29	59.27	122.20	-62.93	peak		
2		5855.000	52.66	6.22	58.88	110.80	-51.92	peak		
3		5875.000	50.95	5.99	56.94	105.20	-48.26	peak		
4	*	5925.000	50.17	6.06	56.23	68.20	-11.97	peak		


HORIZONTAL

Radiated Emission

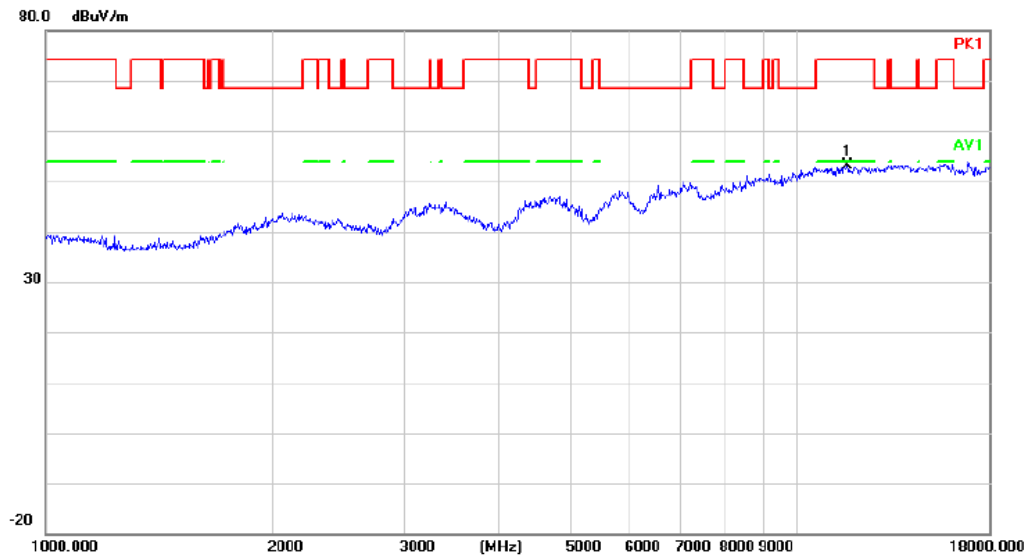

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11650.000	46.71	6.35	53.06	74.00	-20.94	peak		Comment


Radiated Emission

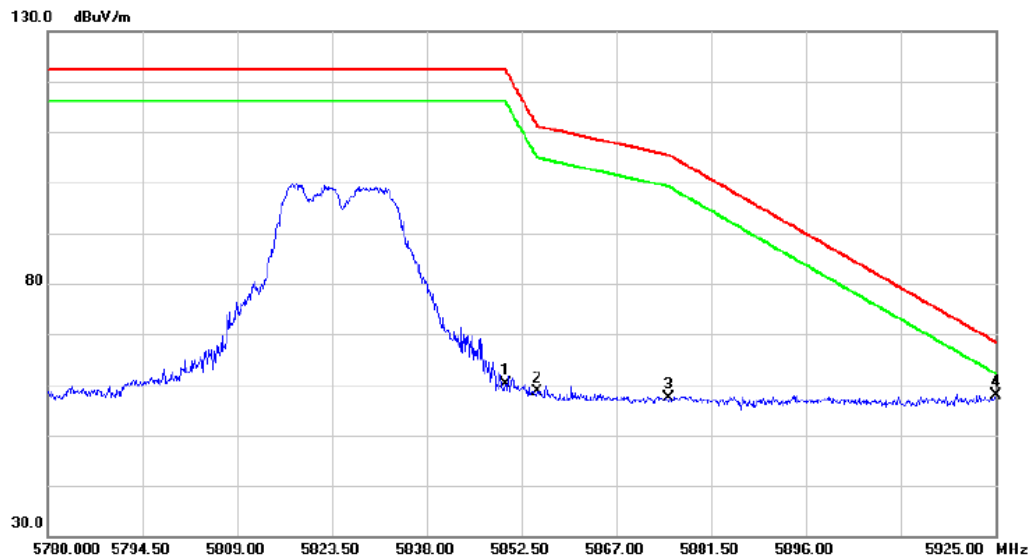

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	53.88	6.29	60.17	122.20	-62.03	peak		Comment
2		5855.000	52.45	6.22	58.67	110.80	-52.13	peak		
3		5875.000	51.43	5.99	57.42	105.20	-47.78	peak		
4	*	5925.000	51.73	6.06	57.79	68.20	-10.41	peak		


VERTICAL

Radiated Emission

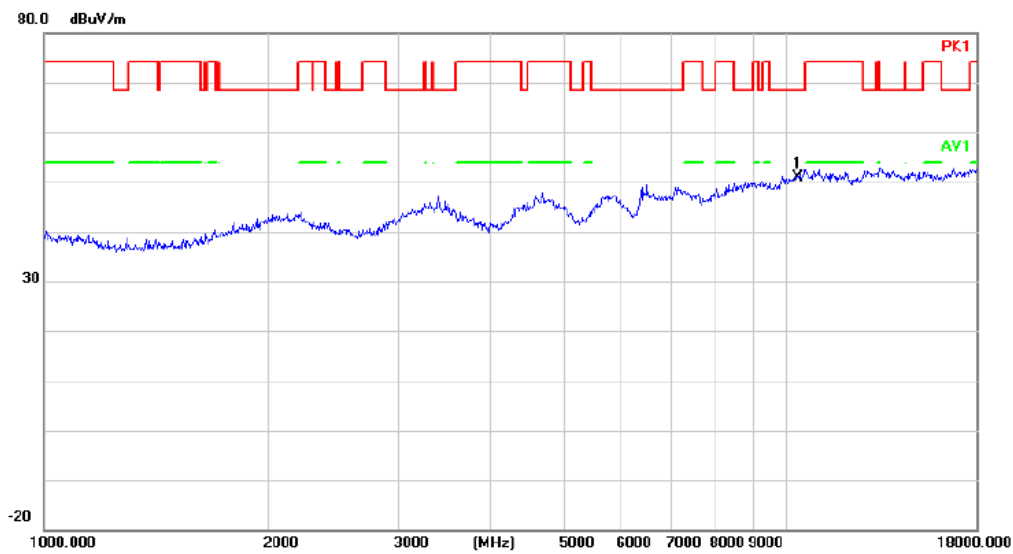

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.000	44.78	6.14	50.92	68.20	-17.28	peak		Comment


Radiated Emission

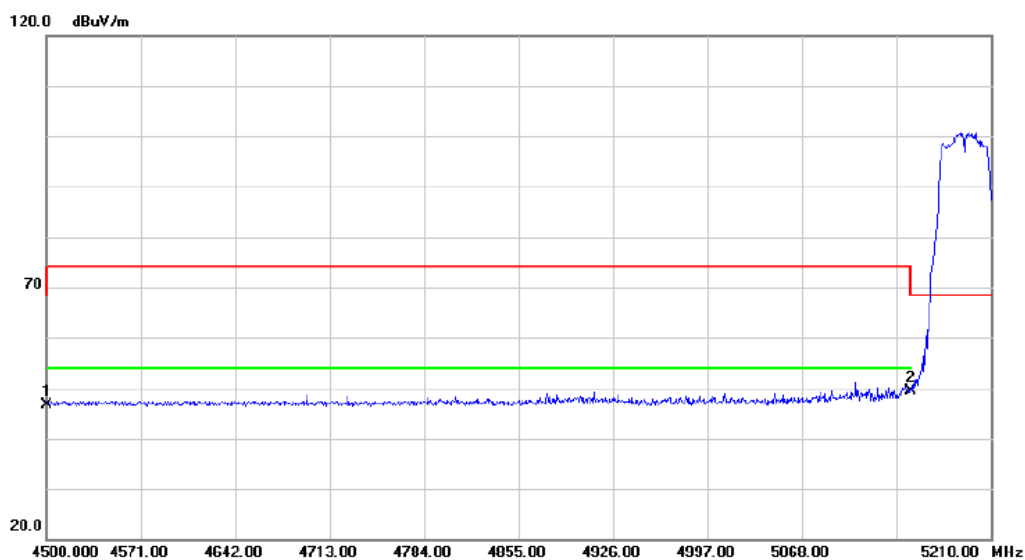

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	42.59	3.92	46.51	68.20	-21.69	peak		Comment
2	*	5150.000	43.77	5.56	49.33	68.20	-18.87	peak		Comment


HORIZONTAL

Radiated Emission

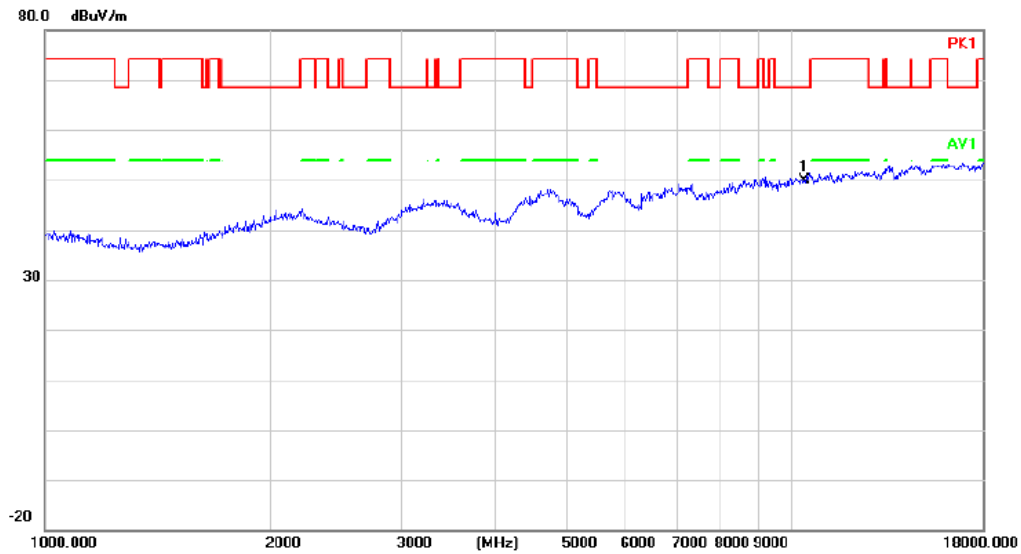

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.000	43.85	6.14	49.99	68.20	-18.21	peak		


Radiated Emission

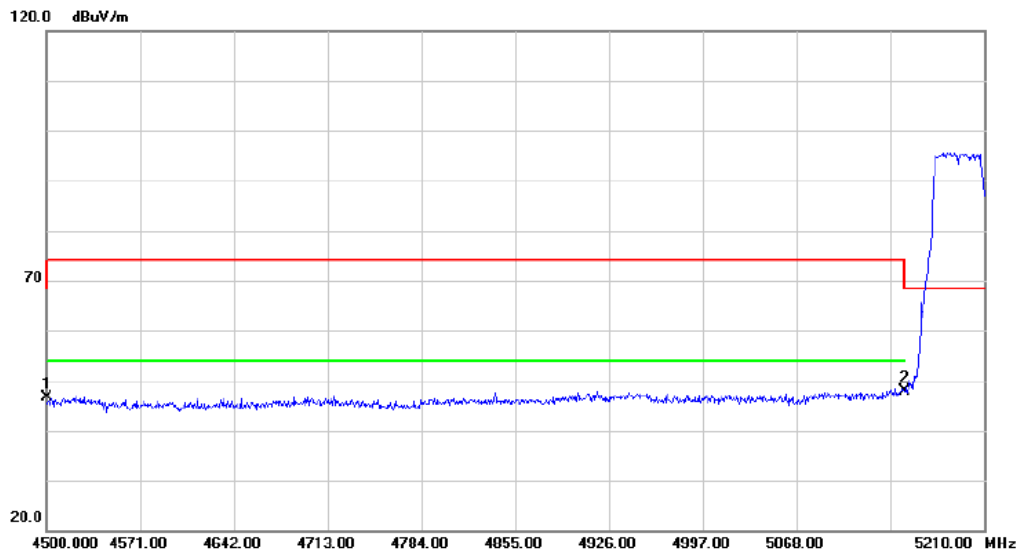

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	42.73	3.92	46.65	68.20	-21.55	peak		
2	*	5150.000	42.21	5.56	47.77	68.20	-20.43	peak		

VERTICAL


Radiated Emission

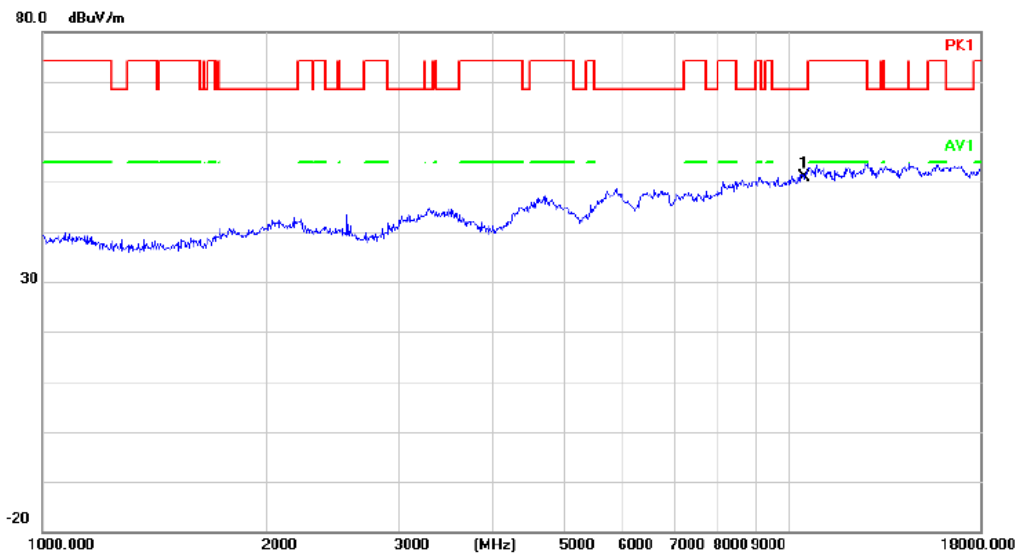

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	10460.000	44.53	6.34	50.87	68.20	-17.33	peak			

HORIZONTAL


Radiated Emission

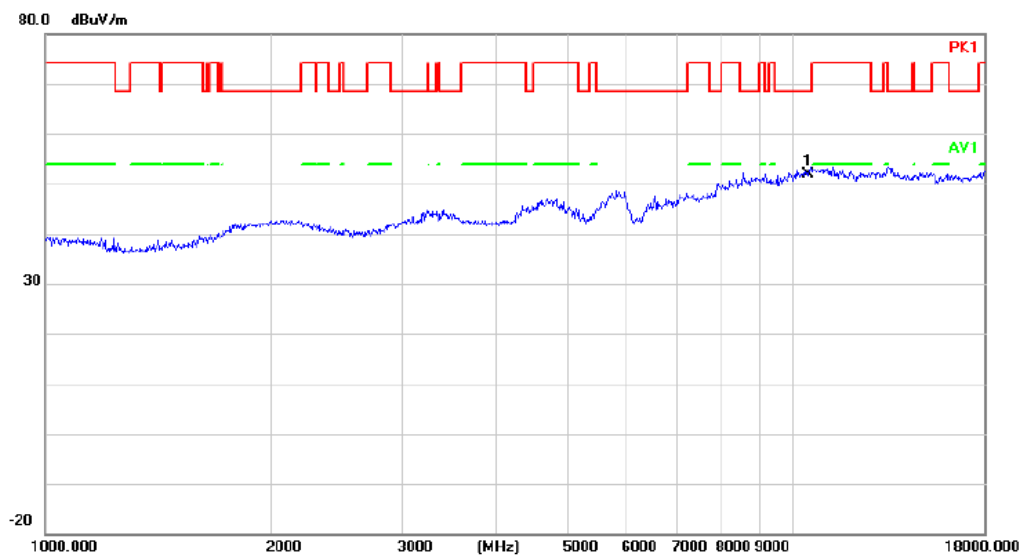

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	10460.000	45.65	6.34	51.99	68.20	-16.21	peak			


VERTICAL

Radiated Emission

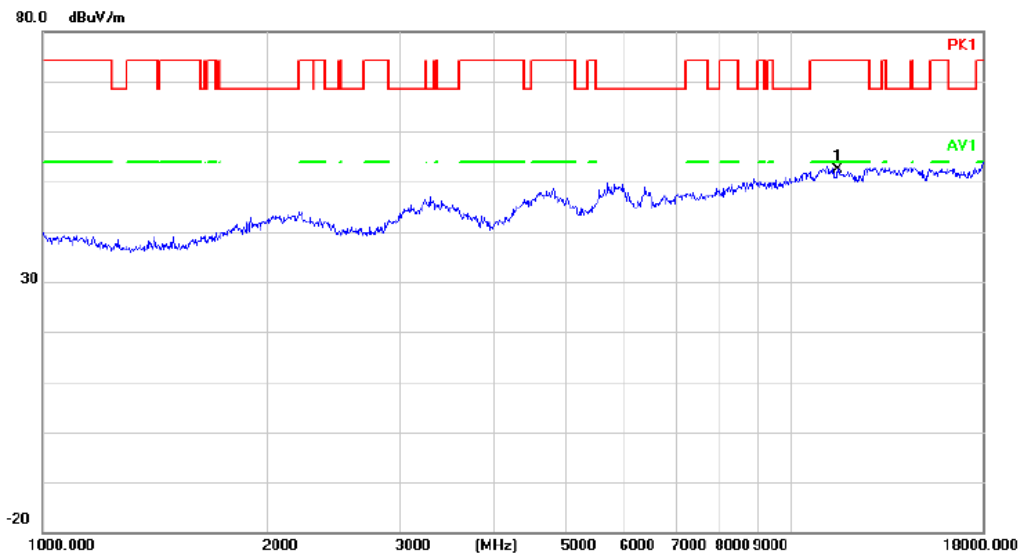

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11510.000	45.78	6.69	52.47	74.00	-21.53	peak	


Radiated Emission

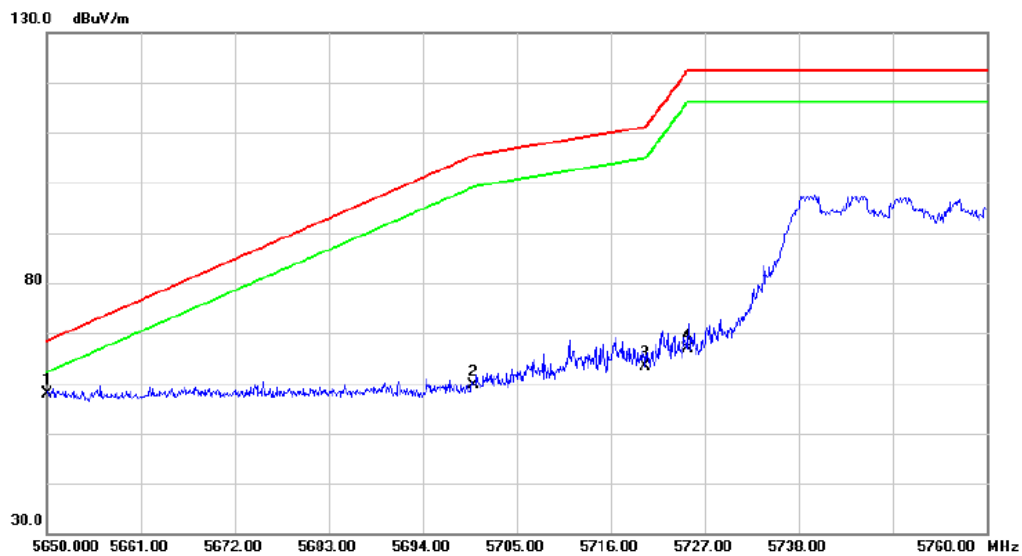

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	52.31	5.56	57.87	68.20	-10.33	peak	
2		5700.000	53.91	5.70	59.61	105.20	-45.59	peak	
3		5720.000	57.79	5.47	63.26	110.80	-47.54	peak	
4		5725.000	61.56	5.42	66.98	122.20	-55.22	peak	


HORIZONTAL

Radiated Emission

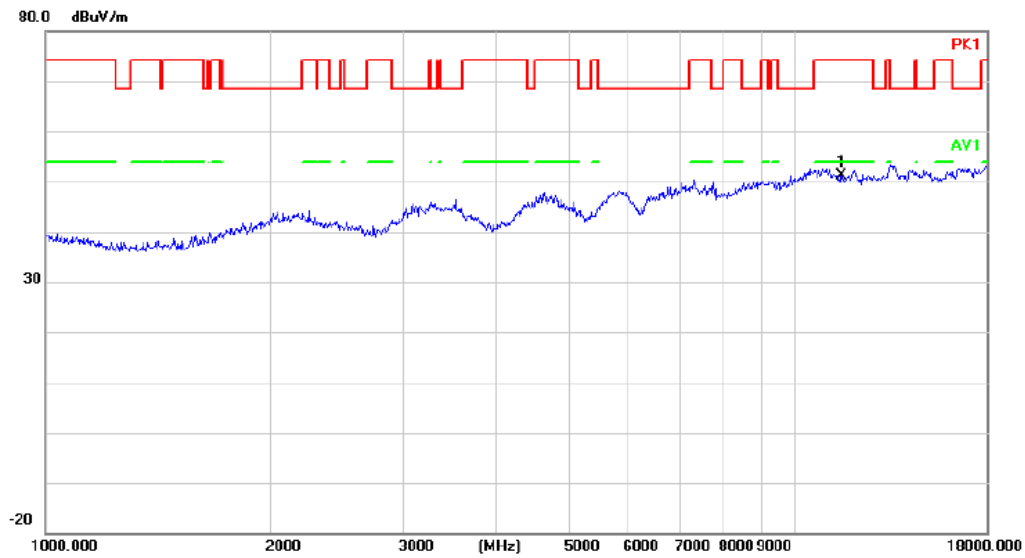

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11510.000	44.41	6.69	51.10	74.00	-22.90	peak	


Radiated Emission

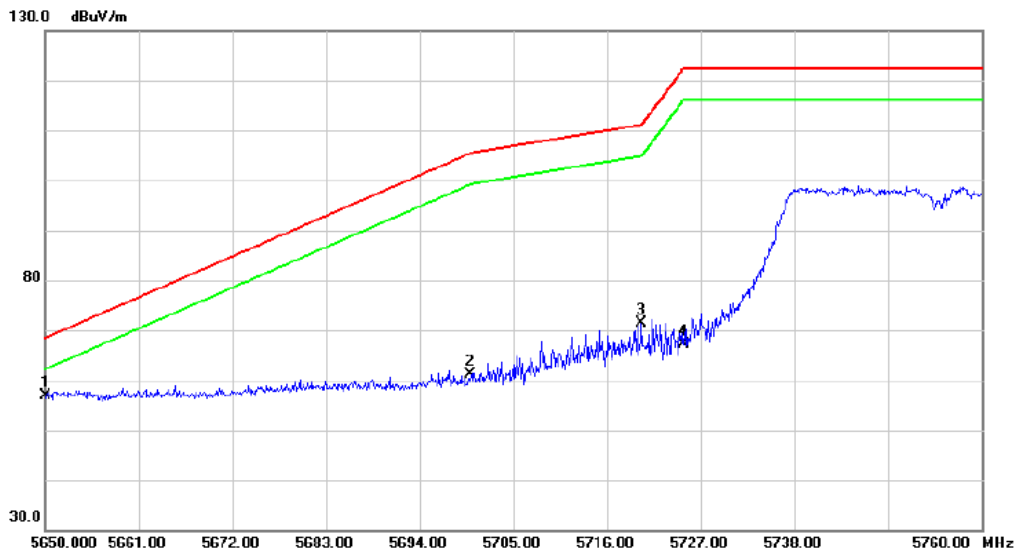

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	51.22	5.58	56.78	88.20	-11.42	peak	
2		5700.000	55.53	5.70	61.23	105.20	-43.97	peak	
3		5720.000	65.90	5.47	71.37	110.80	-39.43	peak	
4		5725.000	61.68	5.42	67.10	122.20	-55.10	peak	


VERTICAL

Radiated Emission

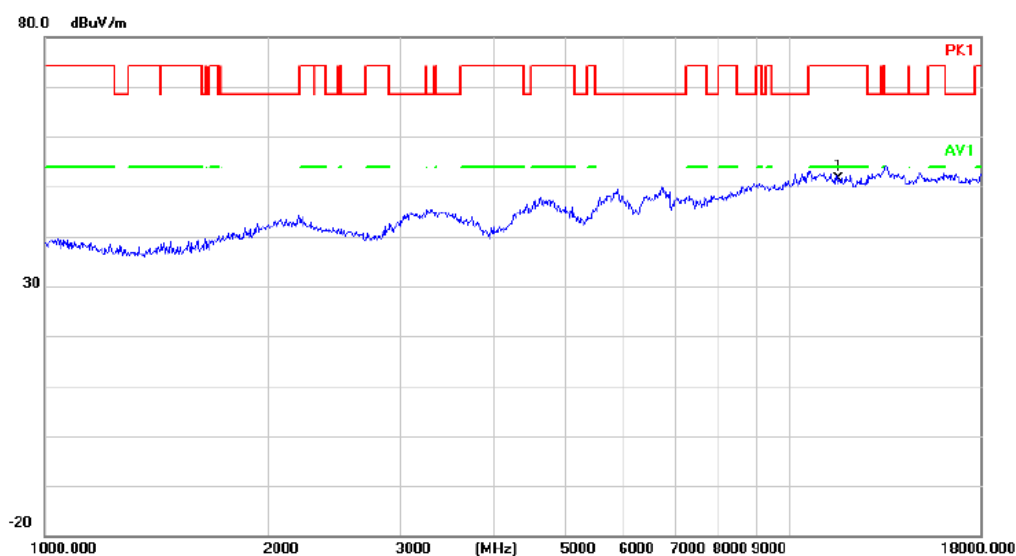

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11590.000	45.01	6.47	51.48	74.00	-22.52	peak		Comment


Radiated Emission

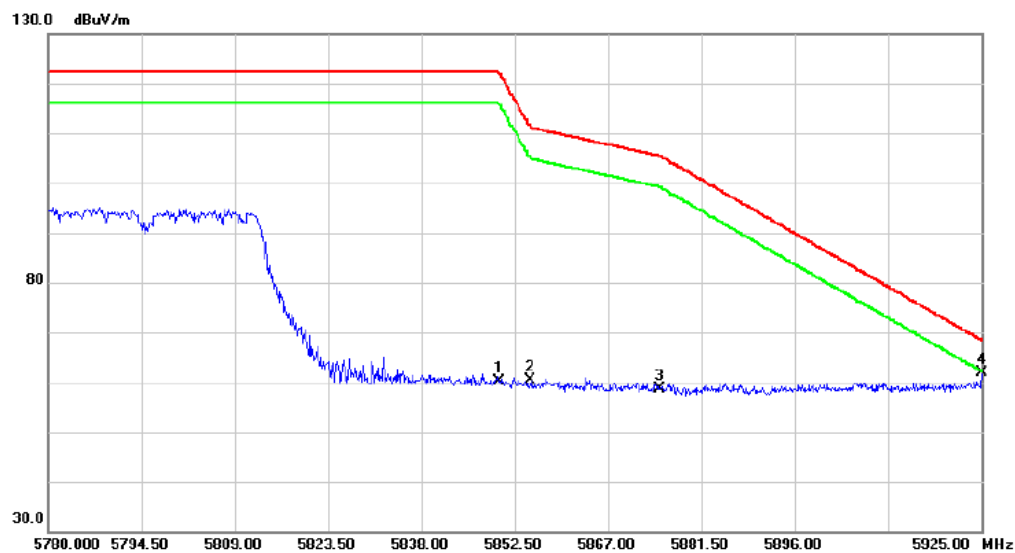

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	53.91	6.29	60.20	122.20	-62.00	peak		Comment
2		5855.000	54.19	6.22	60.41	110.80	-50.39	peak		
3		5875.000	52.74	5.99	58.73	105.20	-46.47	peak		
4	*	5925.000	55.80	6.06	61.86	68.20	-6.34	peak		


HORIZONTAL

Radiated Emission

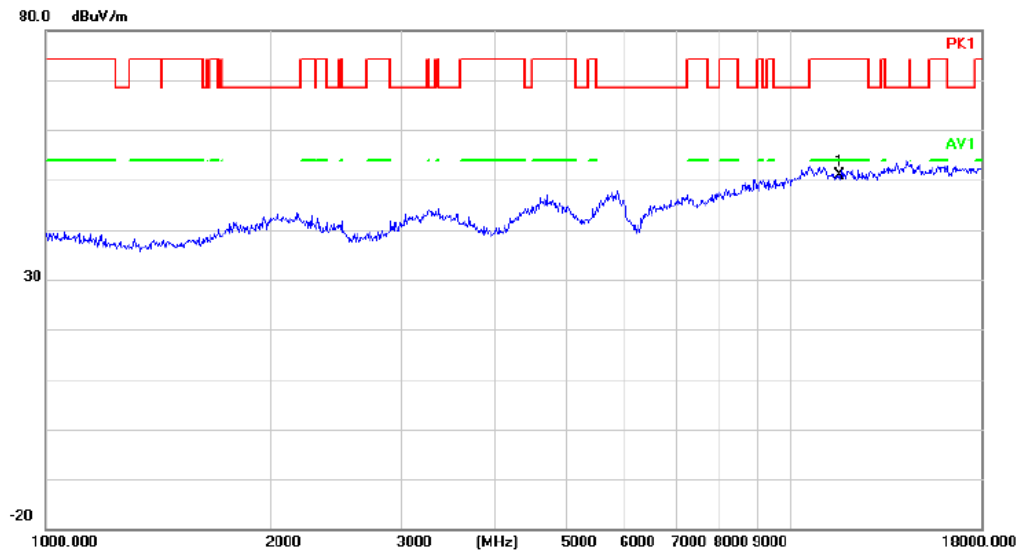

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11590.000	44.53	6.47	51.00	74.00	-23.00	peak	


Radiated Emission

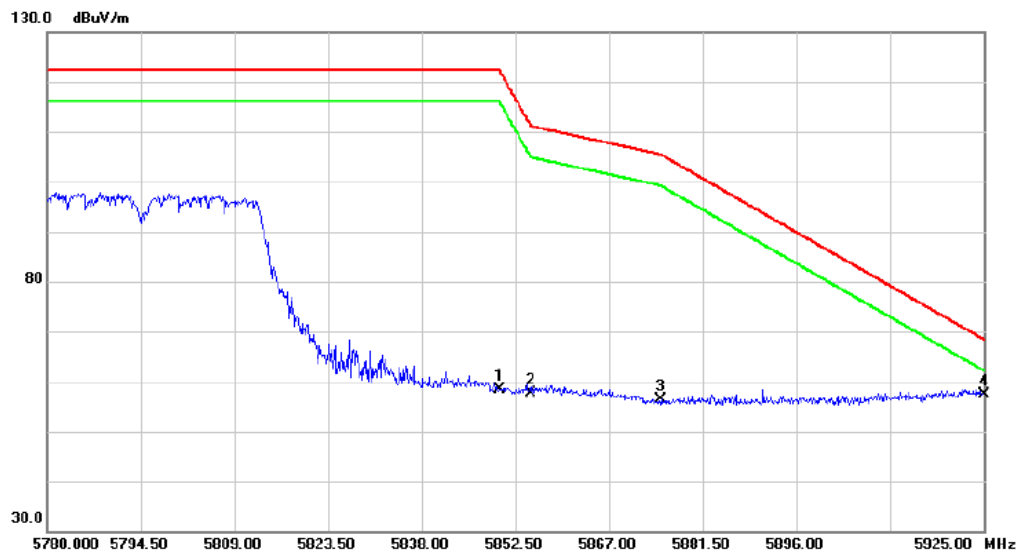

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5850.000	52.01	6.29	58.30	122.20	-63.90	peak	
2		5855.000	51.52	6.22	57.74	110.80	-53.06	peak	
3		5875.000	50.39	5.99	56.38	105.20	-48.82	peak	
4	*	5925.000	51.42	6.06	57.48	68.20	-10.72	peak	


VERTICAL

Radiated Emission

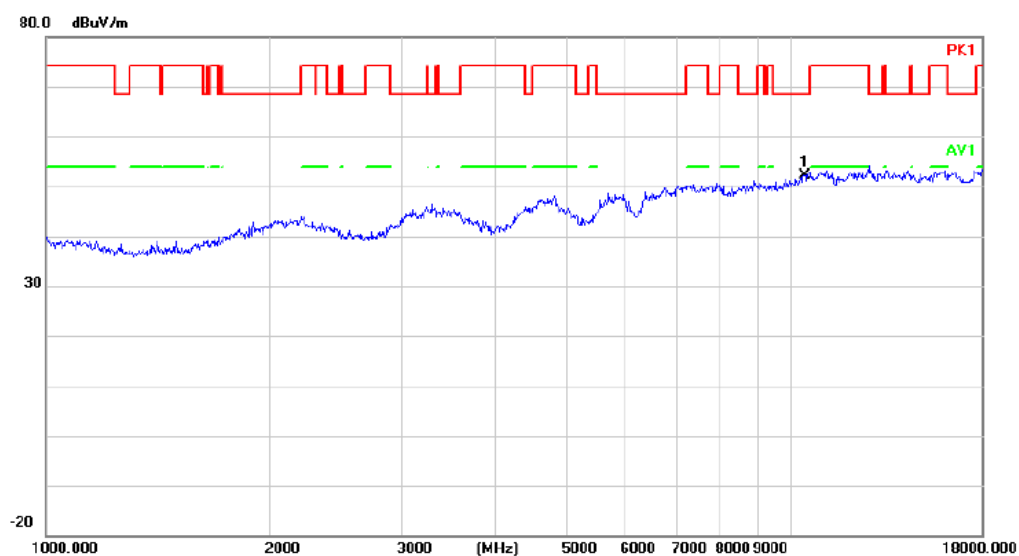

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10420.000	45.83	6.25	52.08	68.20	-16.12	peak		


Radiated Emission

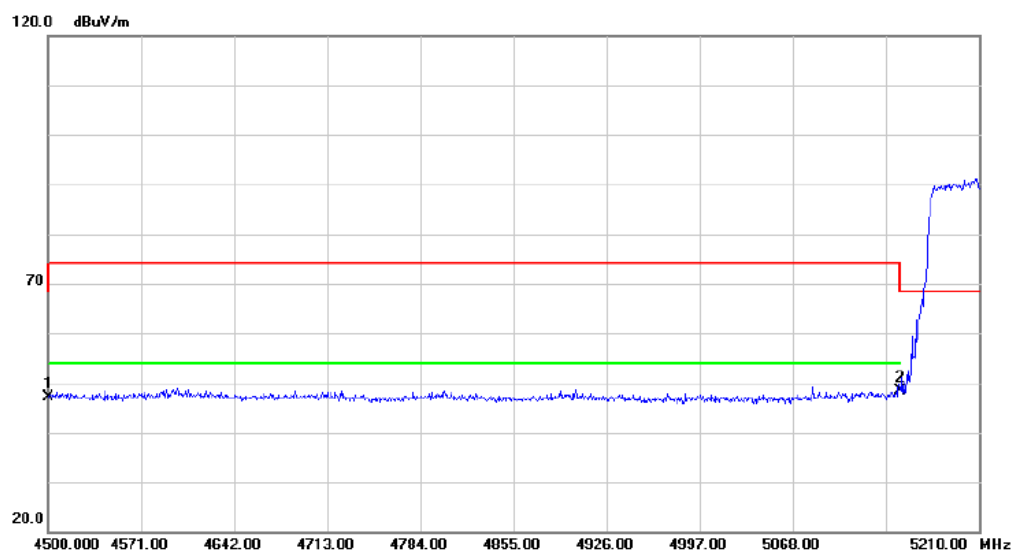

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	43.14	3.92	47.06	68.20	-21.14	peak		
2	*	5150.000	42.75	5.56	48.31	68.20	-19.89	peak		


HORIZONTAL

Radiated Emission

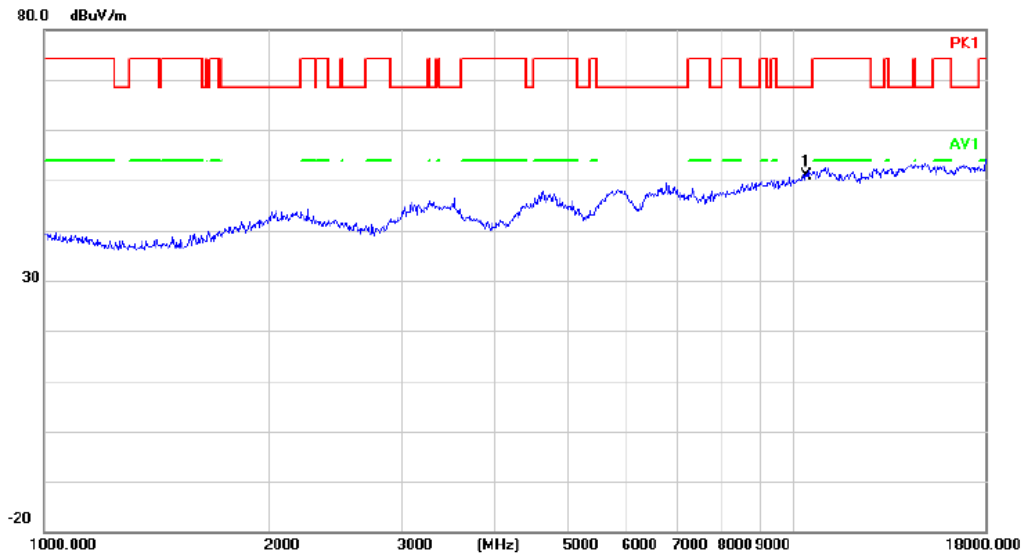

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10420.000	44.67	6.25	50.92	68.20	-17.28	peak	


Radiated Emission

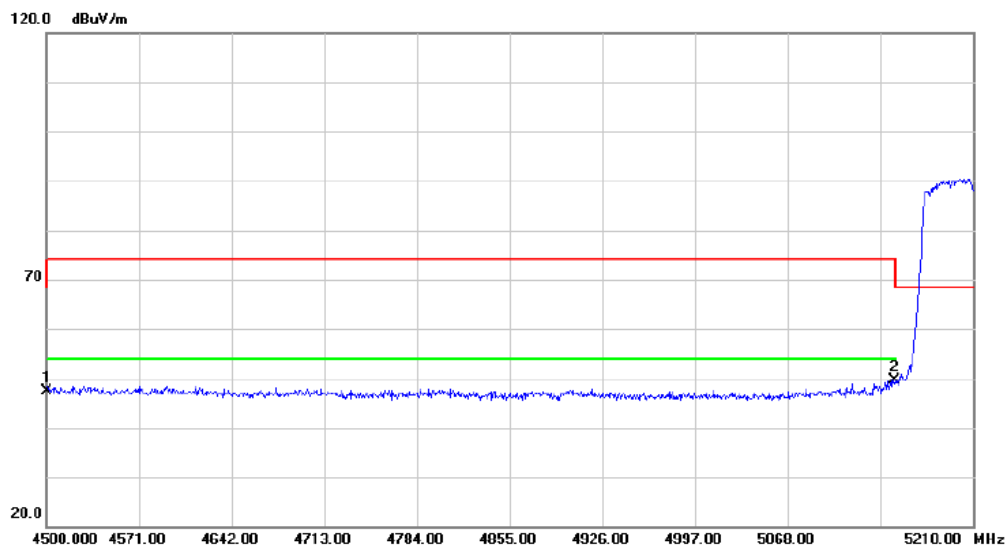

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	43.34	3.92	47.26	68.20	-20.94	peak	
2	*	5150.000	44.06	5.56	49.62	68.20	-18.58	peak	


VERTICAL

Radiated Emission

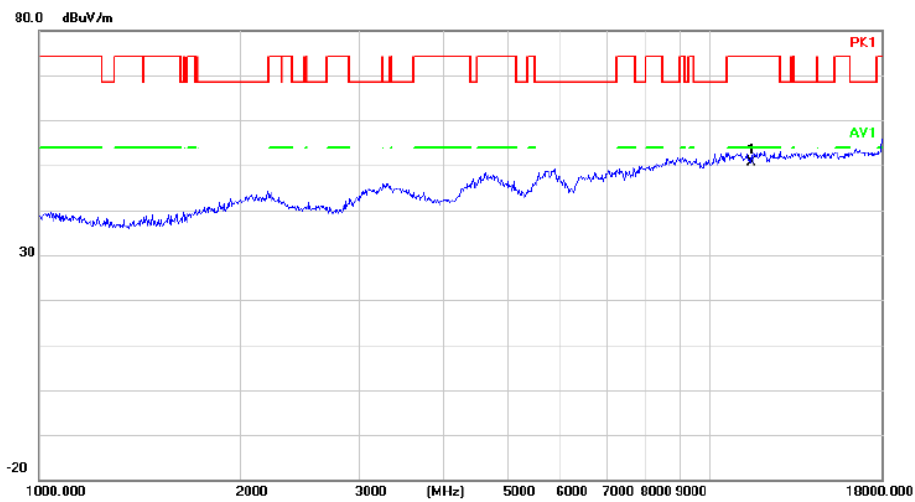

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11550.000	44.02	6.58	50.60	74.00	-23.40	peak		Comment


Radiated Emission

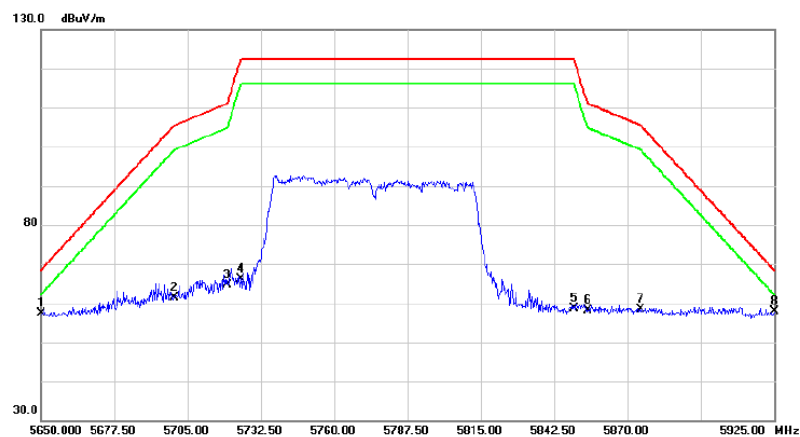

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5650.000	51.93	5.56	57.49	68.20	-10.71	peak		Comment
2		5700.000	55.64	5.70	61.34	105.20	-43.86	peak		
3		5720.000	59.11	5.47	64.58	110.80	-46.22	peak		
4		5725.000	60.75	5.42	66.17	122.20	-56.03	peak		
5		5850.000	52.24	6.29	58.53	122.20	-63.67	peak		
6		5855.000	52.00	6.22	58.22	110.80	-52.58	peak		
7		5875.000	52.32	5.99	58.31	105.20	-46.89	peak		
8	*	5925.000	51.72	6.06	57.78	68.20	-10.42	peak		


HORIZONTAL

Radiated Emission

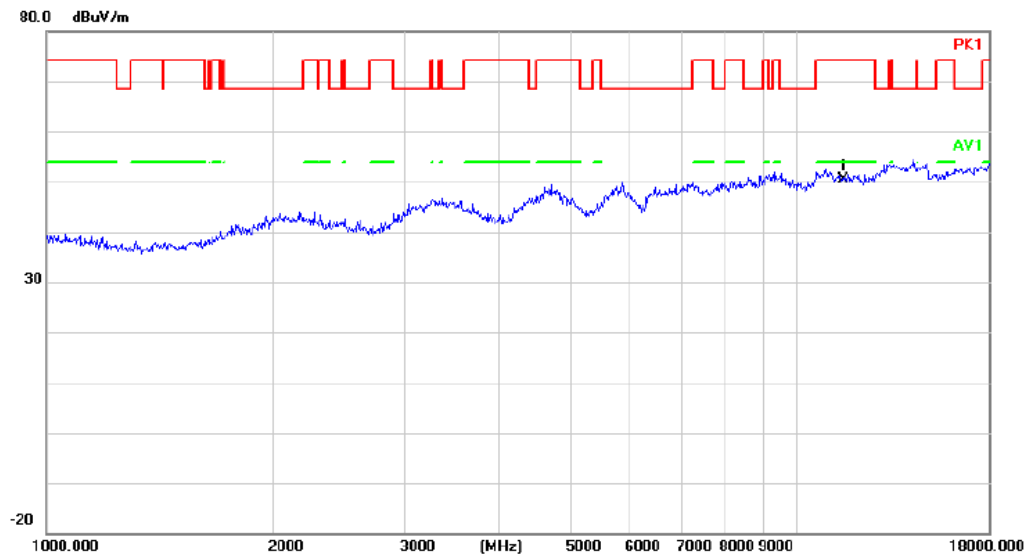

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11550.000	43.88	6.58	50.46	74.00	-23.54	peak	


Radiated Emission

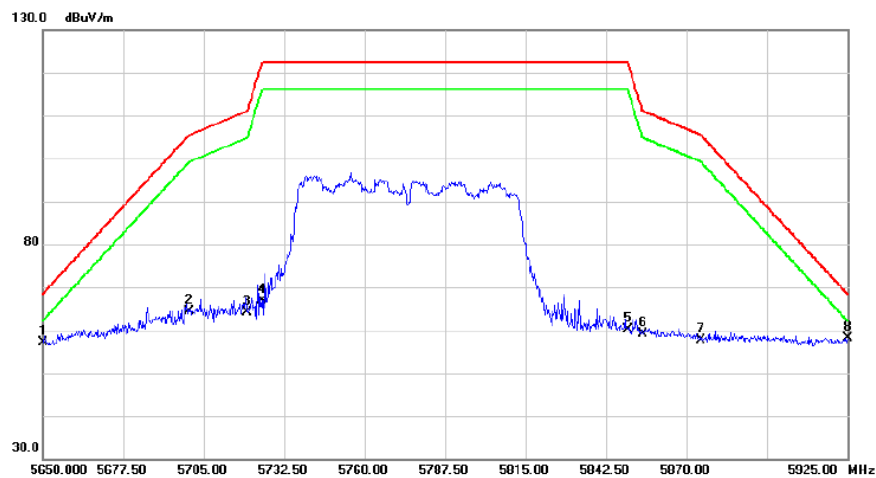

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5650.000	51.66	5.56	57.22	68.20	-10.98	peak	
2		5700.000	58.62	5.70	64.32	105.20	-40.88	peak	
3		5720.000	58.70	5.47	64.17	110.80	-46.63	peak	
4		5725.000	61.55	5.42	66.97	122.20	-55.23	peak	
5		5850.000	53.82	6.29	60.11	122.20	-62.09	peak	
6		5855.000	53.02	6.22	59.24	110.80	-51.56	peak	
7		5875.000	51.66	5.99	57.65	105.20	-47.55	peak	
8	*	5925.000	52.07	6.06	58.13	68.20	-10.07	peak	


VERTICAL

Radiated Emission

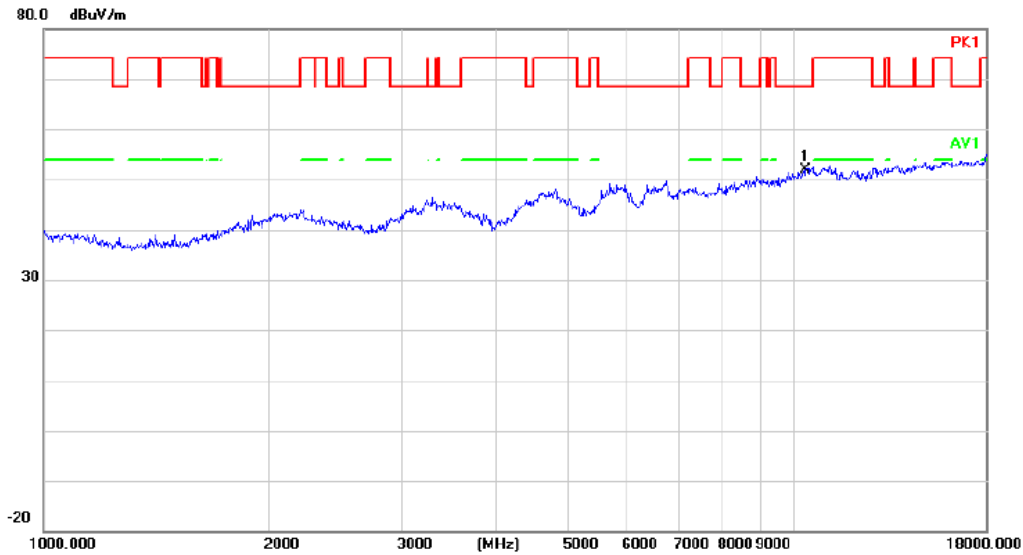

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	45.74	6.07	51.81	68.20	-16.39	peak		


Radiated Emission

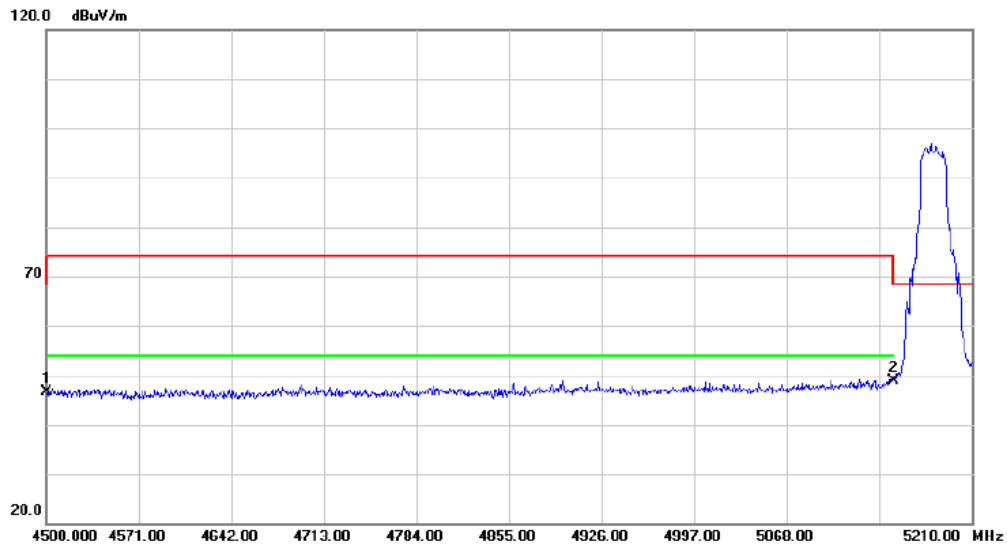

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	42.59	3.92	46.51	68.20	-21.69	peak		
2	*	5150.000	43.38	5.56	48.94	68.20	-19.26	peak		


HORIZONTAL

Radiated Emission

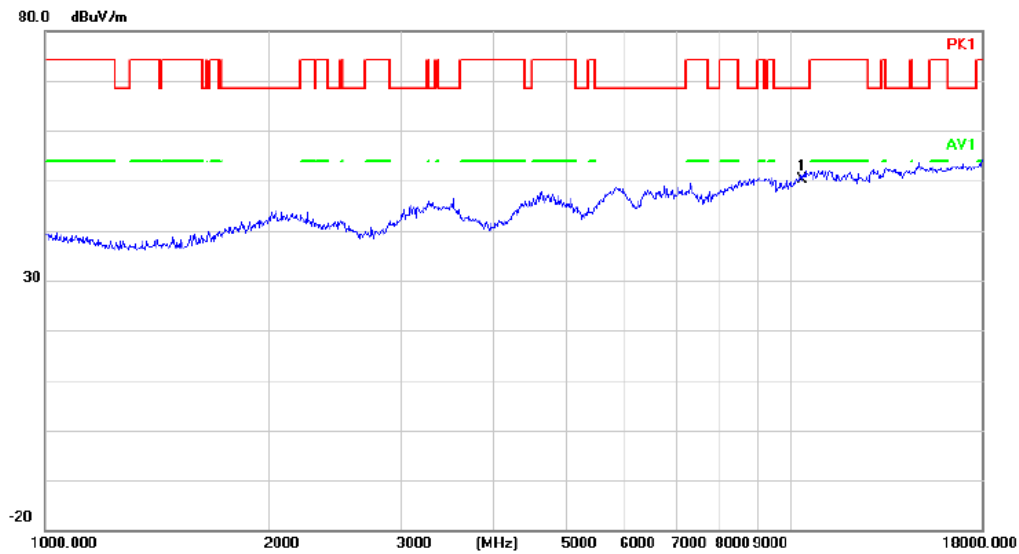

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	43.95	6.07	50.02	68.20	-18.18	peak		


Radiated Emission

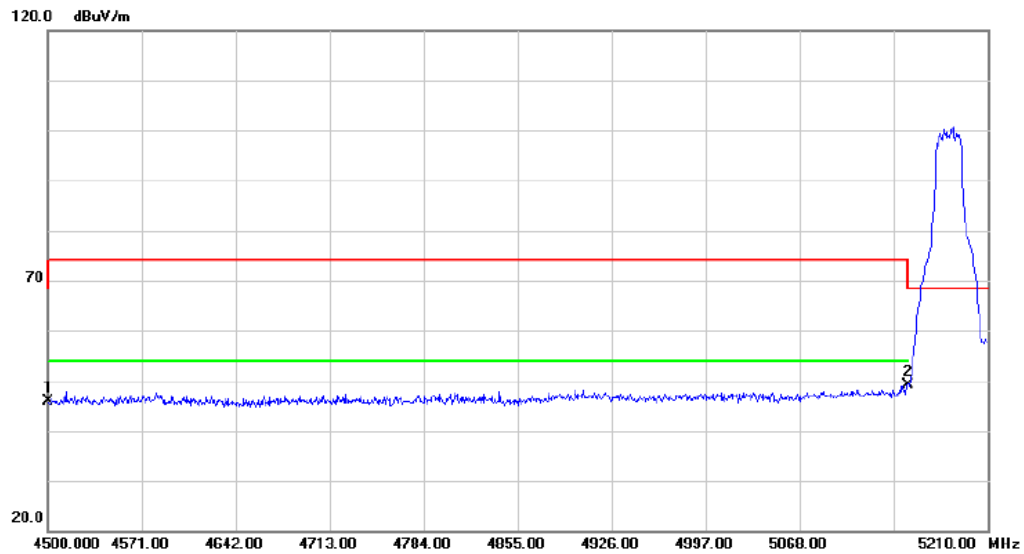

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	42.03	3.92	45.95	68.20	-22.25	peak		
2	*	5150.000	43.65	5.56	49.21	68.20	-18.99	peak		

VERTICAL


Radiated Emission

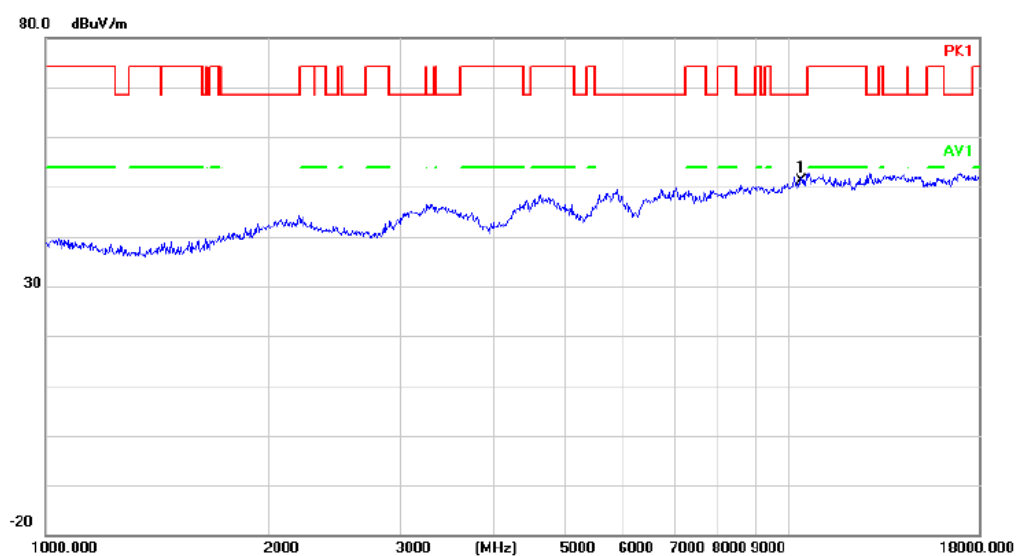

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	44.81	6.20	51.01	68.20	-17.19	peak		Comment

HORIZONTAL


Radiated Emission

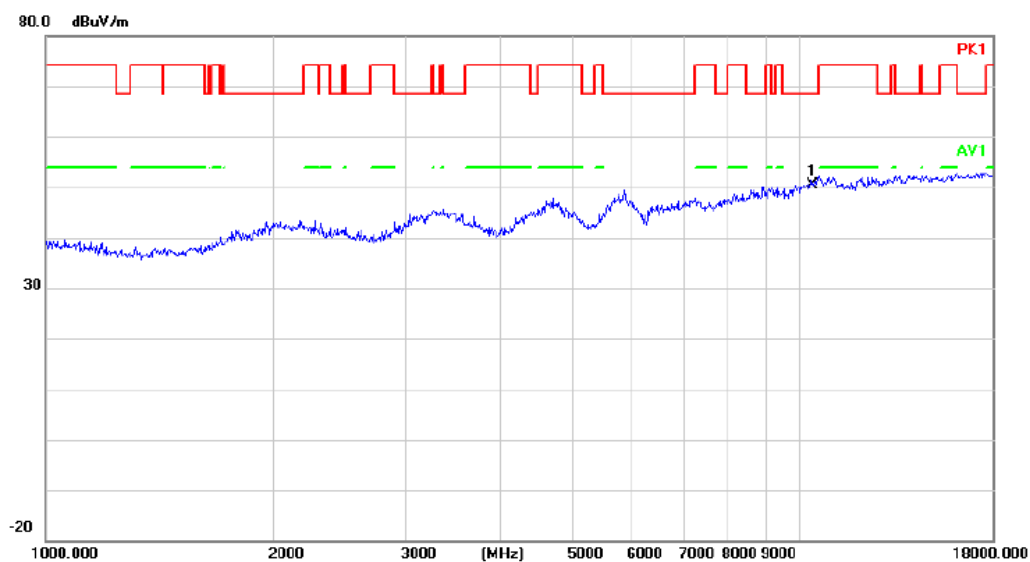

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	44.13	6.20	50.33	68.20	-17.87	peak		Comment

VERTICAL


Radiated Emission

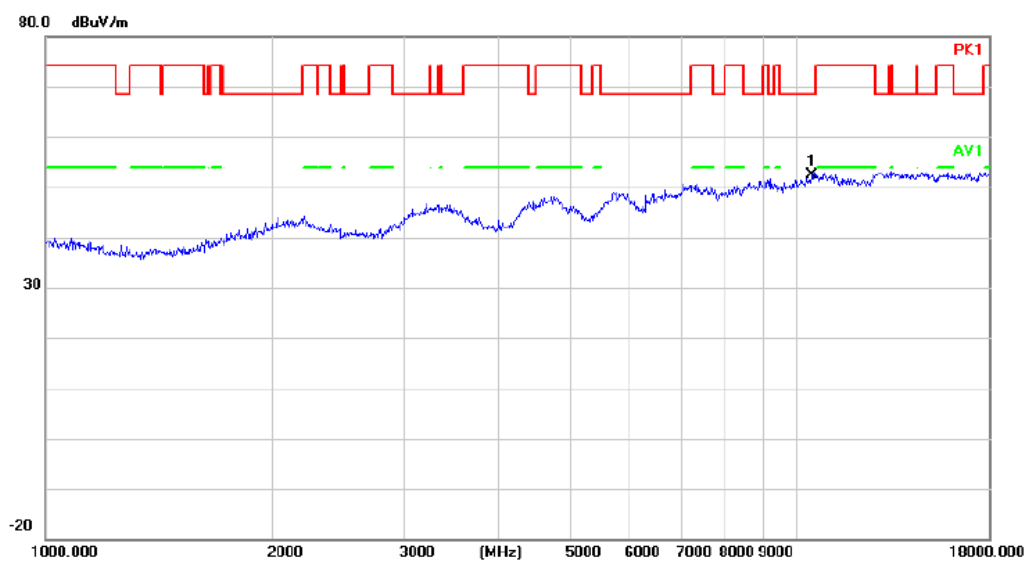

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	45.91	6.38	52.29	68.20	-15.91	peak		

HORIZONTAL


Radiated Emission

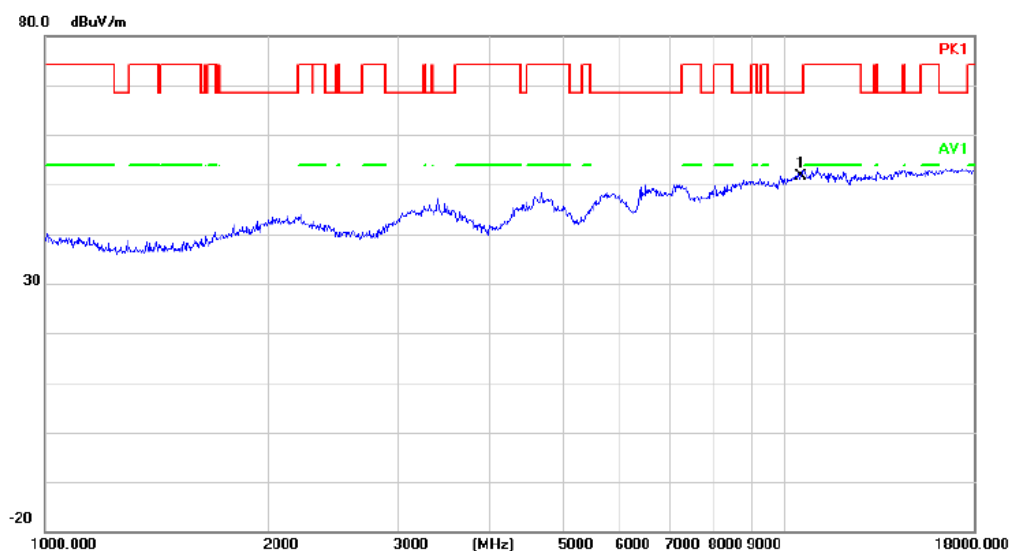

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	45.36	6.38	51.74	68.20	-16.46	peak		


VERTICAL

Radiated Emission

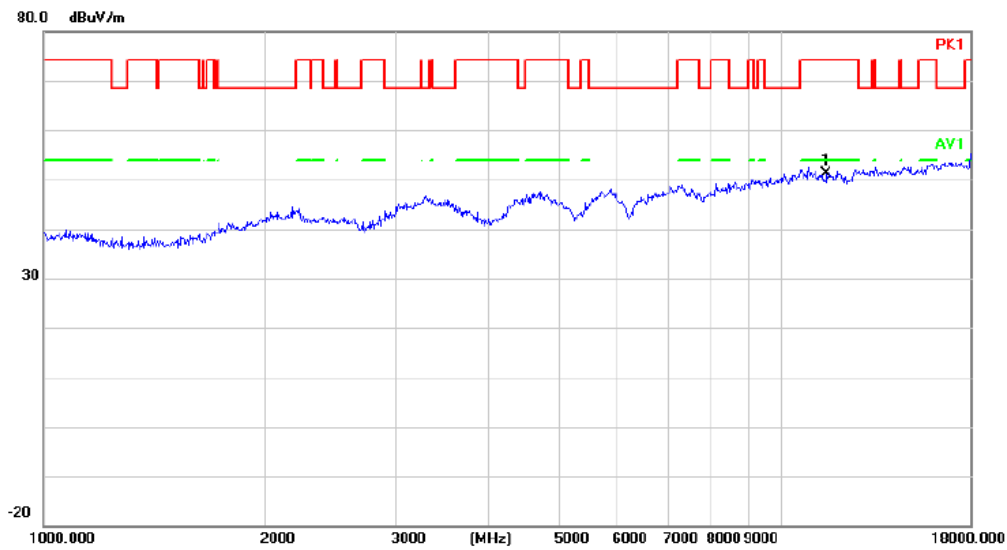

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	44.47	6.70	51.17	74.00	-22.83	peak		Comment


Radiated Emission

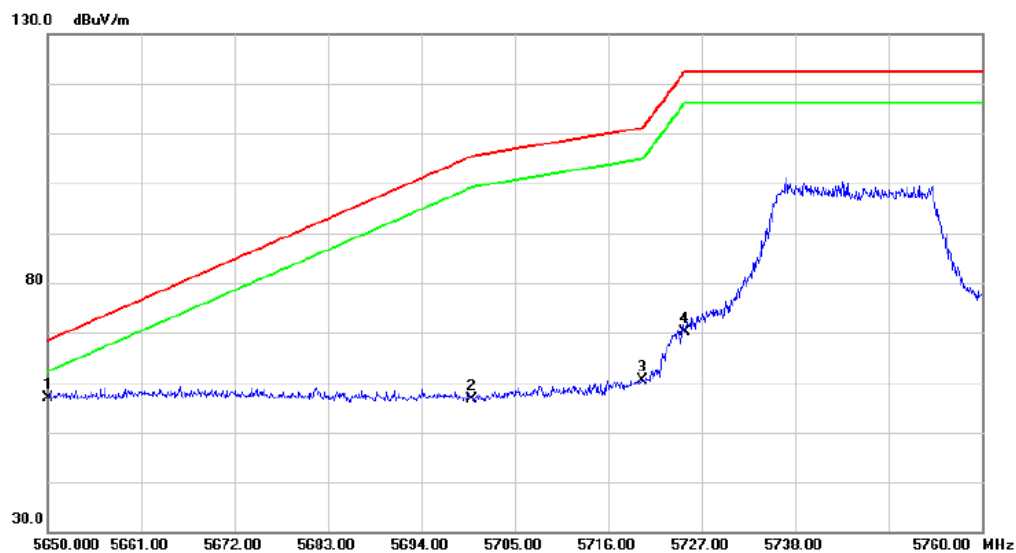

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	51.22	5.56	56.78	68.20	-11.42	peak		Comment
2		5700.000	50.92	5.70	56.62	105.20	-48.58	peak		
3		5720.000	54.87	5.47	60.34	110.80	-50.46	peak		
4		5725.000	64.59	5.42	70.01	122.20	-52.19	peak		


HORIZONTAL

Radiated Emission

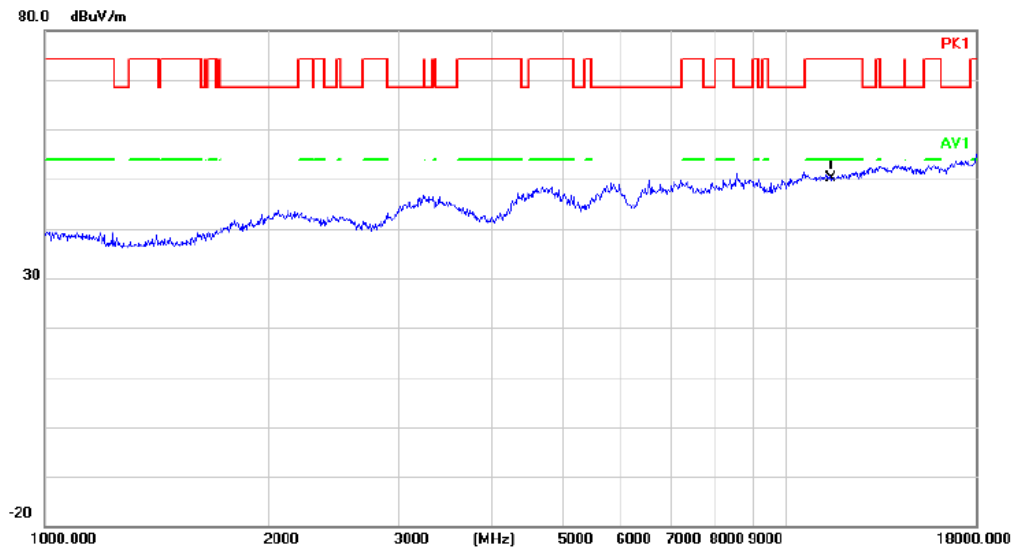

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11490.000	43.40	6.70	50.10	74.00	-23.90	peak		


Radiated Emission

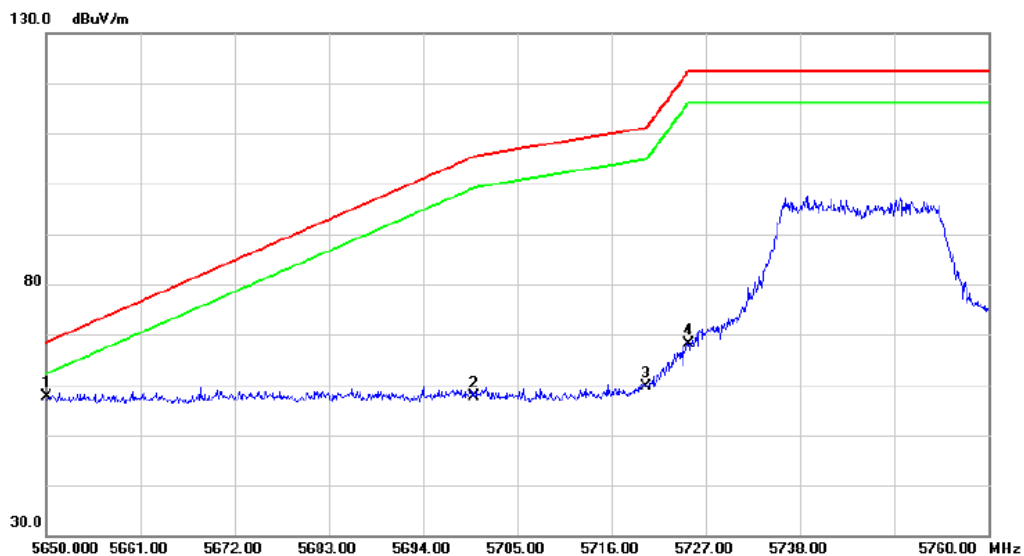

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	52.02	5.56	57.58	68.20	-10.62	peak		
2		5700.000	51.85	5.70	57.55	105.20	-47.65	peak		
3		5720.000	54.16	5.47	59.63	110.80	-51.17	peak		
4		5725.000	62.67	5.42	68.09	122.20	-54.11	peak		

VERTICAL


Radiated Emission

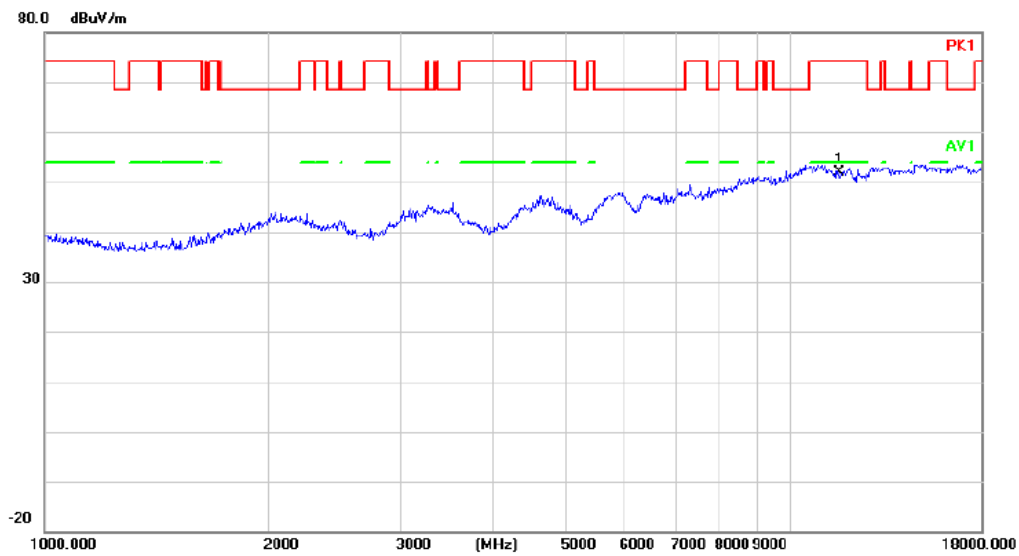

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	45.26	6.52	51.78	74.00	-22.22	peak		Comment

HORIZONTAL


Radiated Emission

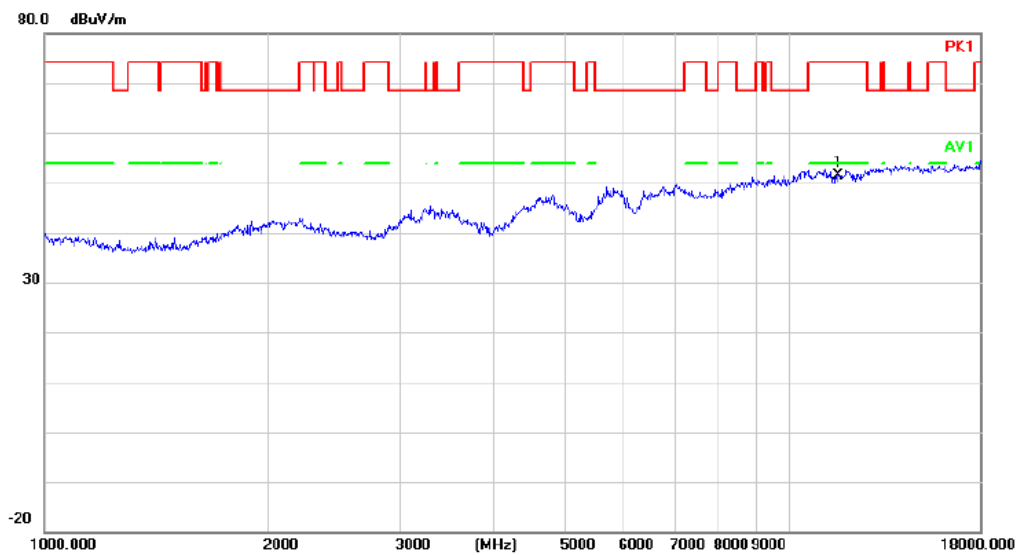

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	44.98	6.52	51.50	74.00	-22.50	peak		Comment


VERTICAL

Radiated Emission

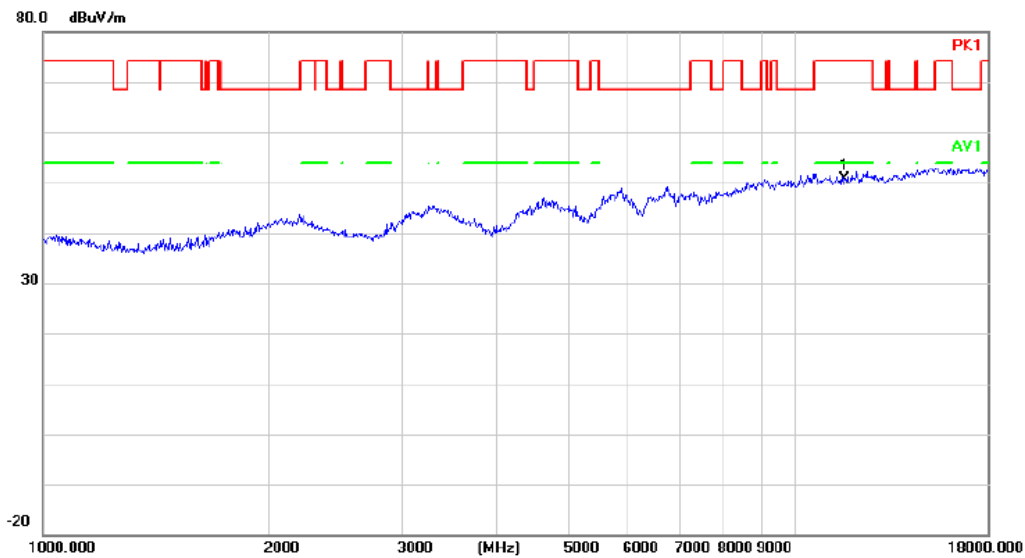

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11650.000	44.16	6.35	50.51	74.00	-23.49	peak		Comment


Radiated Emission

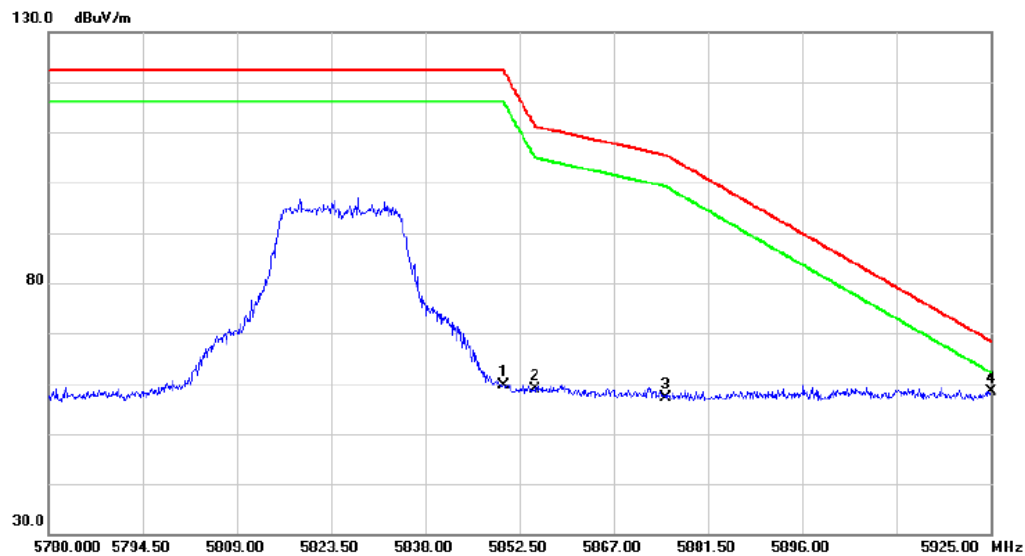

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	53.24	6.29	59.53	122.20	-62.67	peak		Comment
2		5855.000	52.64	6.22	58.86	110.80	-51.94	peak		
3		5875.000	51.11	5.99	57.10	105.20	-48.10	peak		
4	*	5925.000	52.25	6.06	58.31	68.20	-9.89	peak		


HORIZONTAL

Radiated Emission

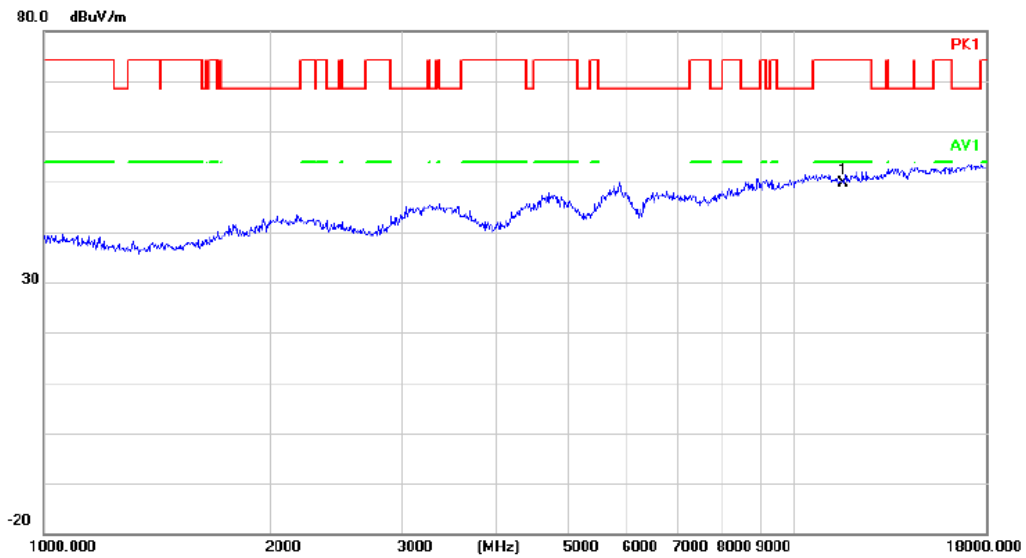

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11650.000	43.22	6.35	49.57	74.00	-24.43	peak	


Radiated Emission

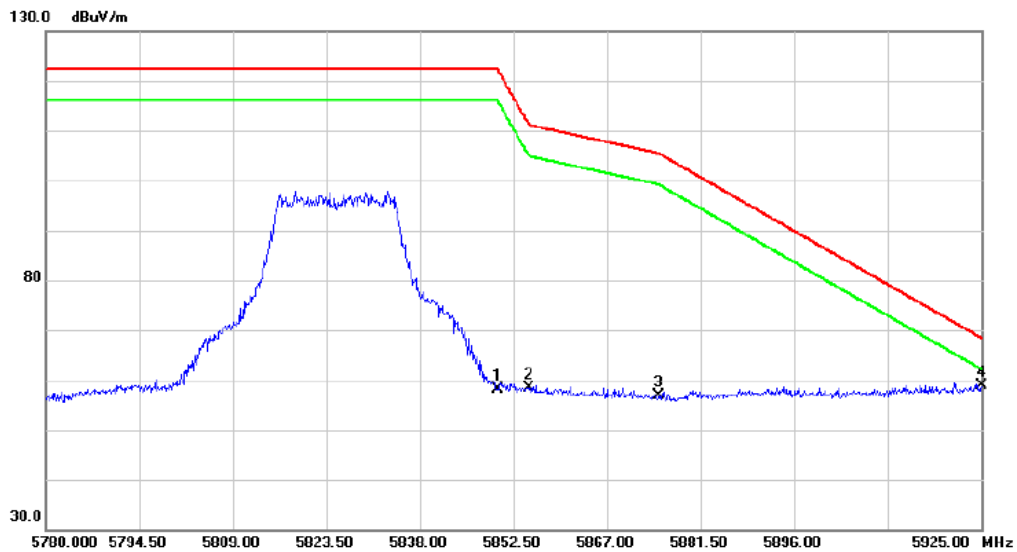

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5850.000	51.83	6.29	58.12	122.20	-64.08	peak	
2		5855.000	52.12	6.22	58.34	110.80	-52.46	peak	
3		5875.000	50.81	5.99	56.80	105.20	-48.40	peak	
4	*	5925.000	52.75	6.06	58.81	68.20	-9.39	peak	


VERTICAL

Radiated Emission

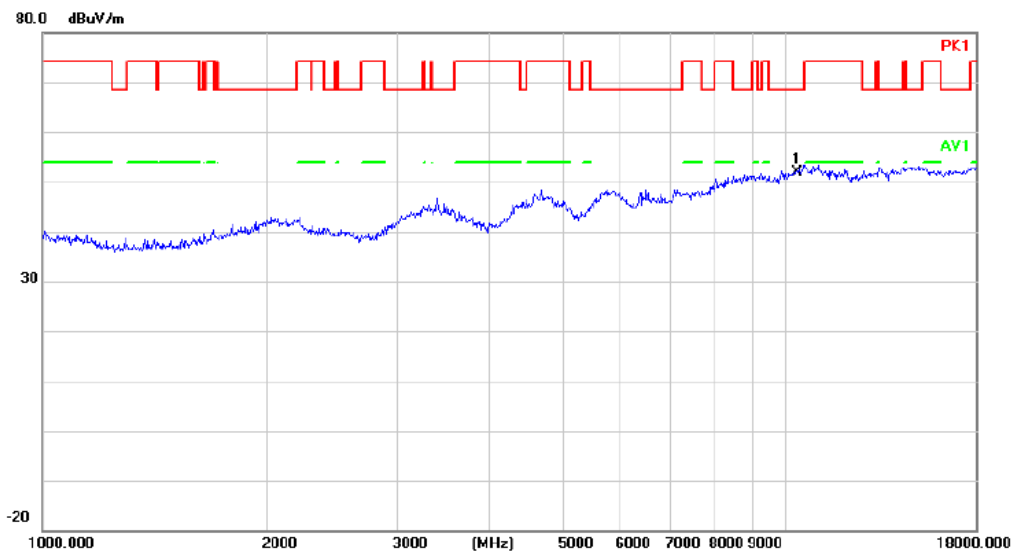

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10380.000	45.78	6.14	51.92	68.20	-16.28	peak		


Radiated Emission

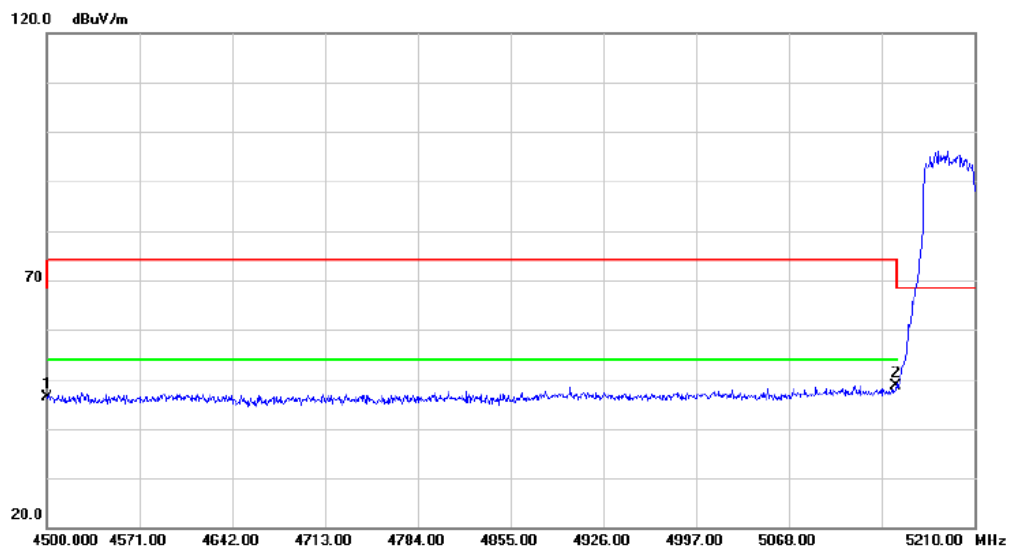

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	42.45	3.92	46.37	68.20	-21.83	peak		
2	*	5150.000	43.02	5.58	48.58	68.20	-19.62	peak		


HORIZONTAL

Radiated Emission

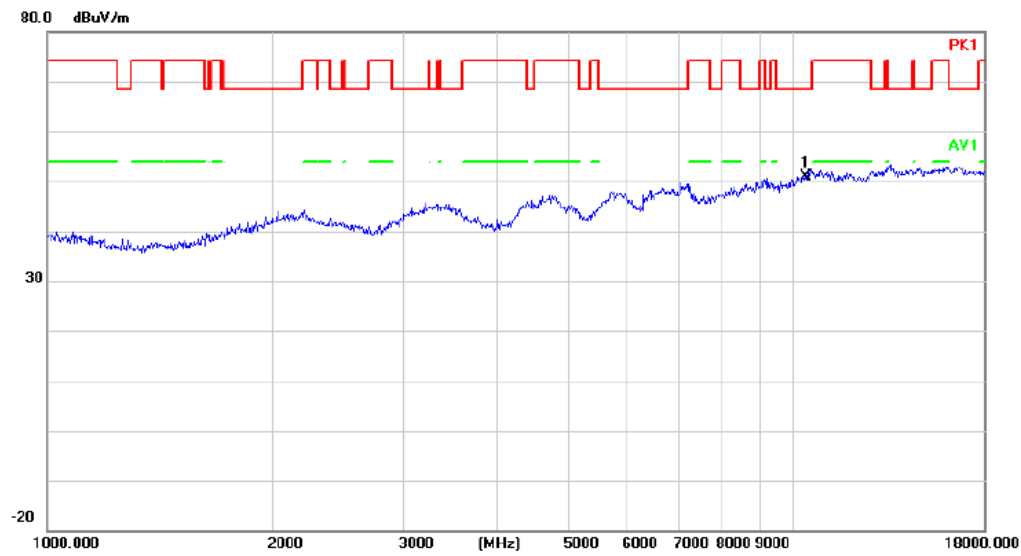

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10380.000	44.85	6.14	50.99	68.20	-17.21	peak	


Radiated Emission

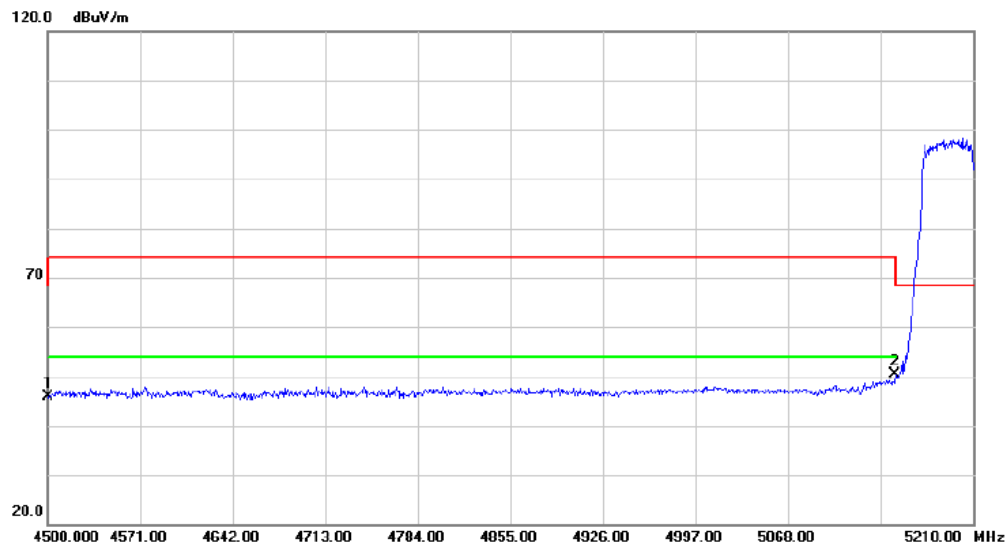

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	42.06	3.92	45.98	68.20	-22.22	peak	
2	*	5150.000	44.93	5.56	50.49	68.20	-17.71	peak	

VERTICAL


Radiated Emission

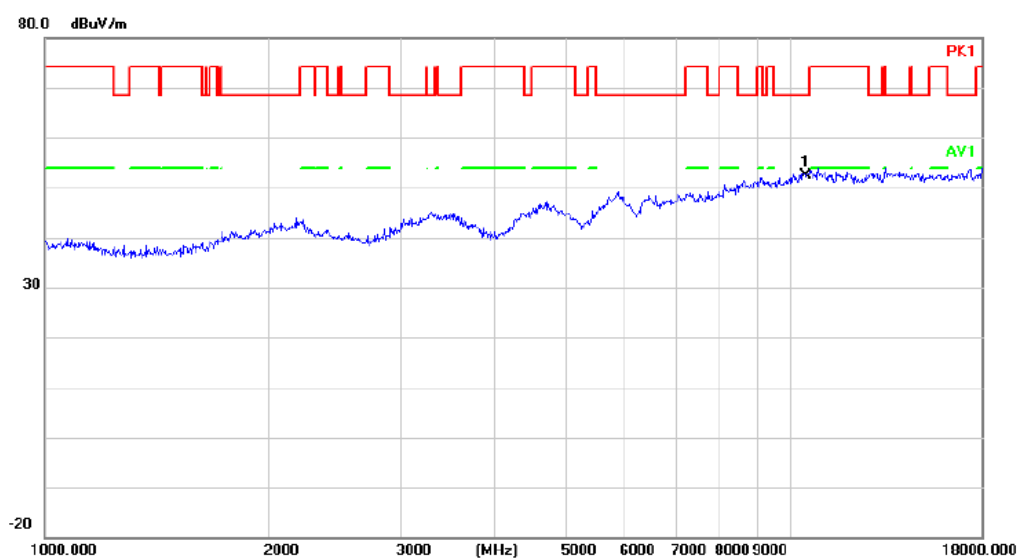

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.000	46.03	6.34	52.37	68.20	-15.83	peak		Comment

HORIZONTAL


Radiated Emission

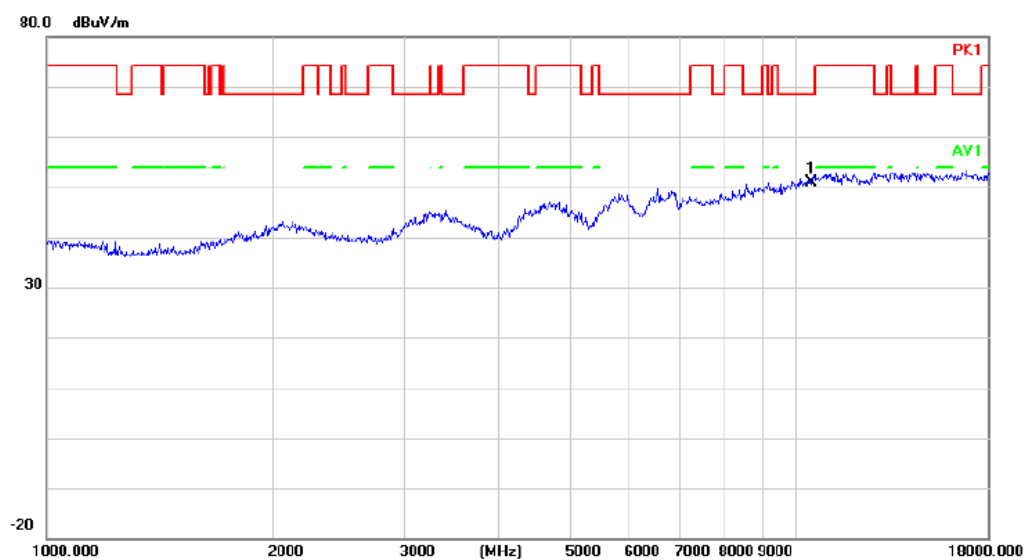

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.000	44.65	6.34	50.99	68.20	-17.21	peak		Comment


VERTICAL

Radiated Emission

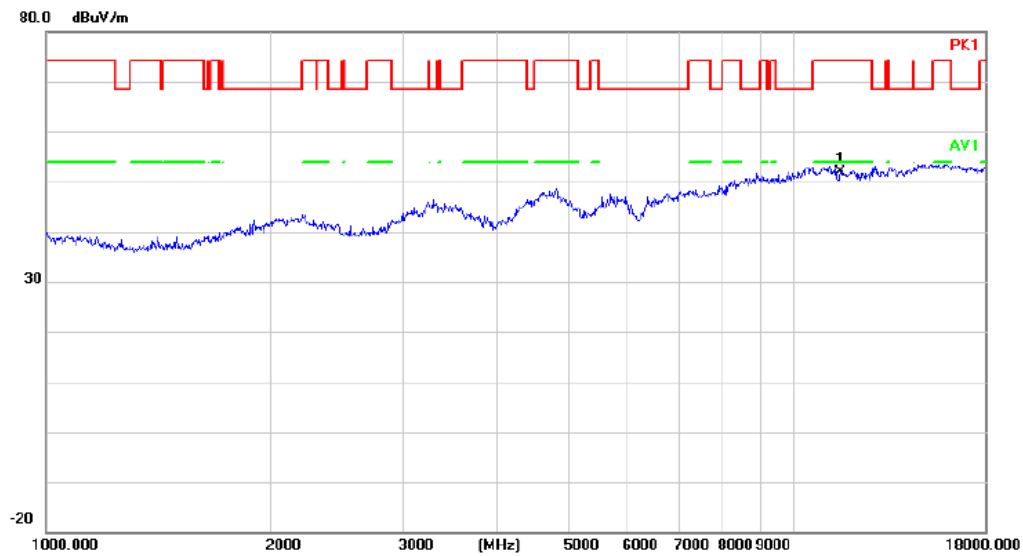

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11510.000	45.28	6.69	51.97	74.00	-22.03	peak		Comment


Radiated Emission

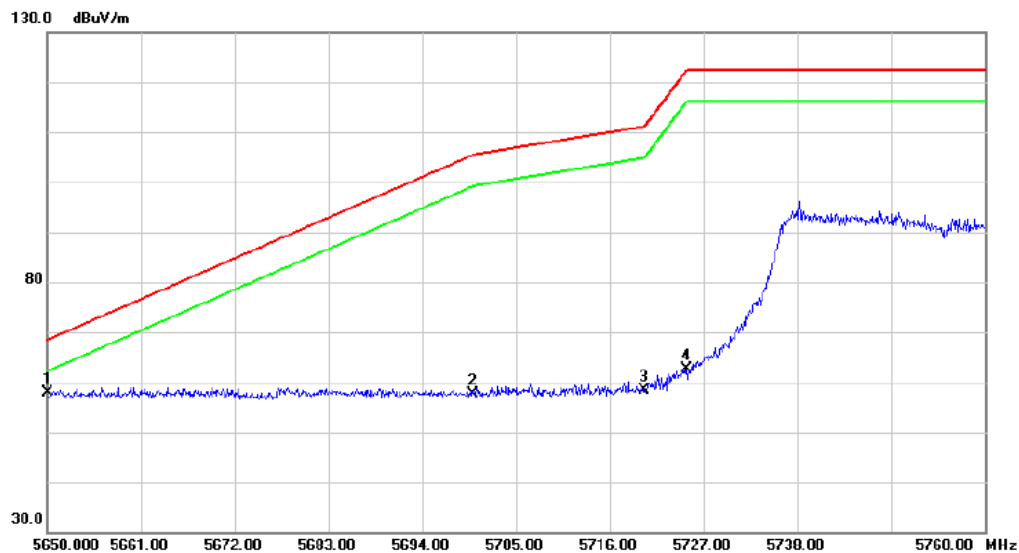

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	52.33	5.56	57.89	68.20	-10.31	peak		Comment
2		5700.000	51.86	5.70	57.56	105.20	-47.64	peak		
3		5720.000	52.87	5.47	58.34	110.80	-52.46	peak		
4		5725.000	57.29	5.42	62.71	122.20	-59.49	peak		


HORIZONTAL

Radiated Emission

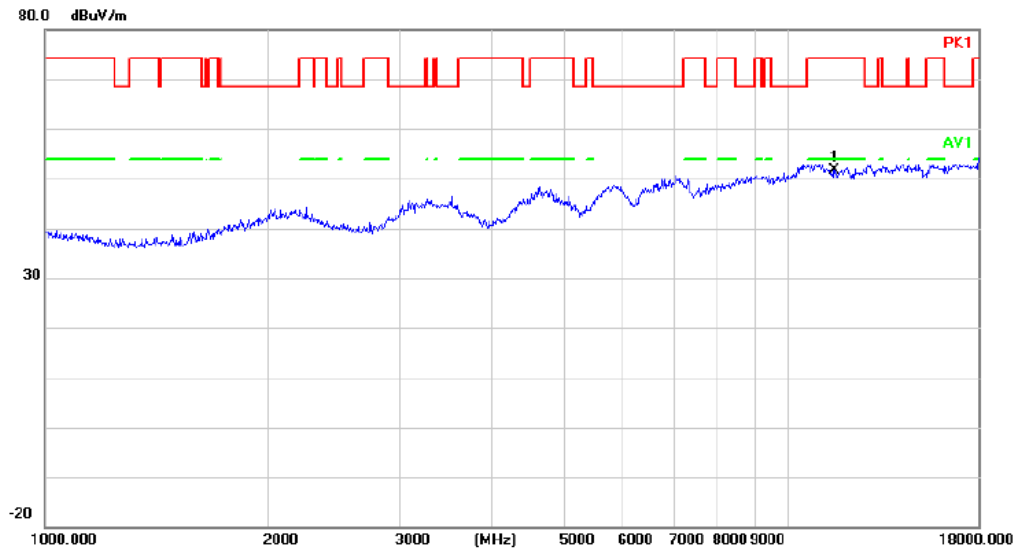

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11510.000	44.91	6.89	51.60	74.00	-22.40	peak		


Radiated Emission

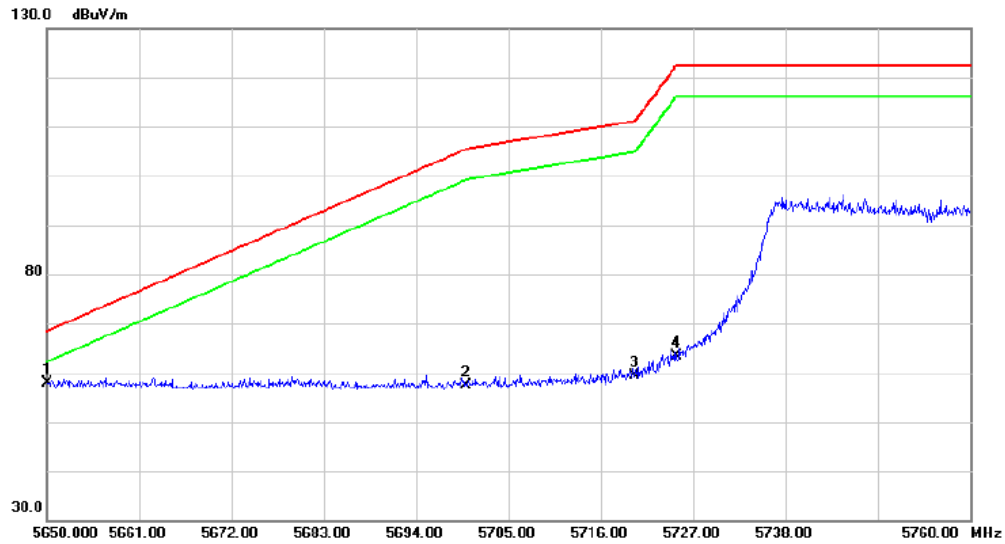

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	52.42	5.56	57.98	88.20	-10.22	peak		
2		5700.000	51.67	5.70	57.37	105.20	-47.83	peak		
3		5720.000	53.90	5.47	59.37	110.80	-51.43	peak		
4		5725.000	57.86	5.42	63.28	122.20	-58.92	peak		


VERTICAL

Radiated Emission

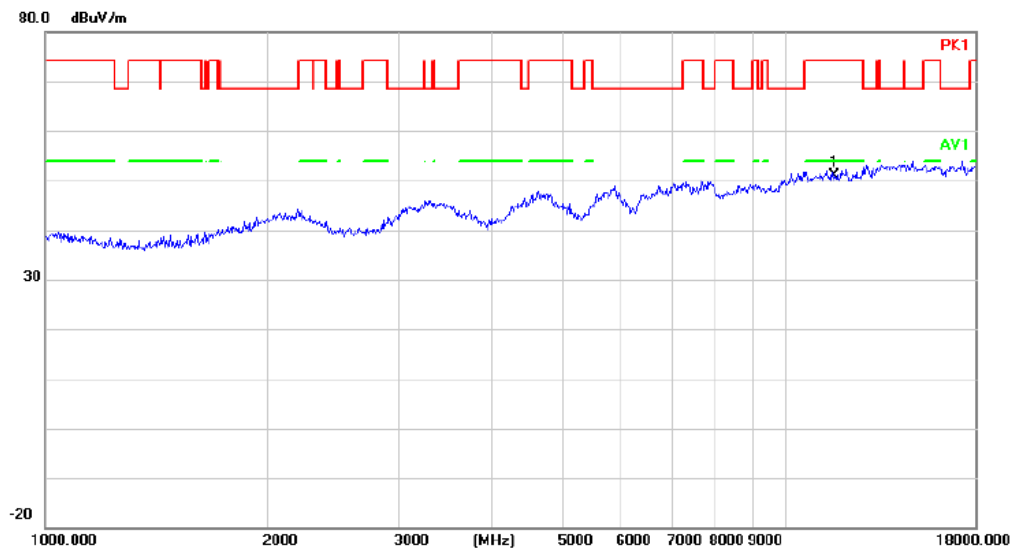

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11590.000	44.51	6.47	50.98	74.00	-23.02	peak		


Radiated Emission

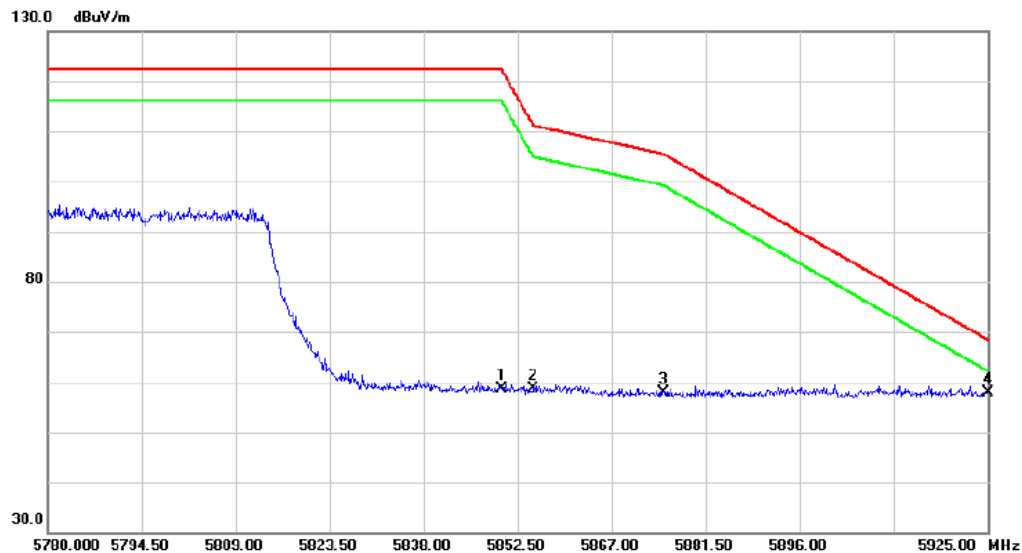

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	52.30	6.29	58.59	122.20	-63.61	peak		
2		5855.000	52.41	6.22	58.63	110.80	-52.17	peak		
3		5875.000	51.86	5.99	57.85	105.20	-47.35	peak		
4	*	5925.000	51.79	6.06	57.85	68.20	-10.35	peak		


HORIZONTAL

Radiated Emission

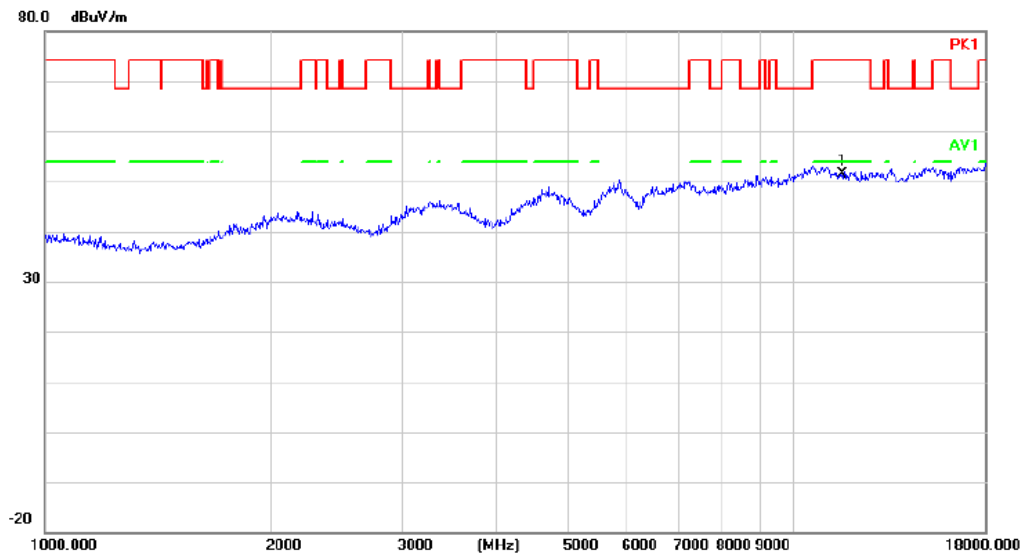

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11590.000	45.03	6.47	51.50	74.00	-22.50	peak		Comment


Radiated Emission

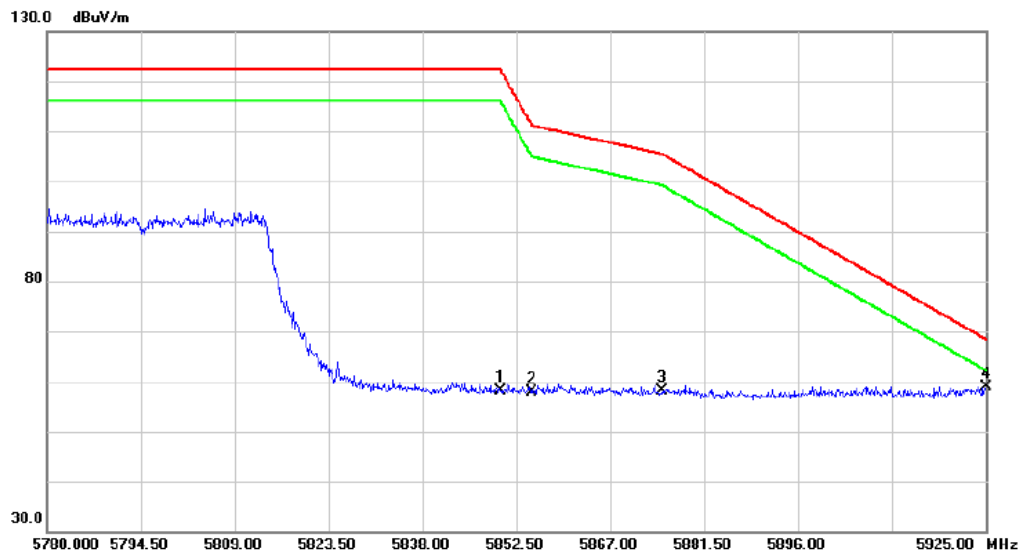

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5850.000	51.92	6.29	58.21	122.20	-63.99	peak			
2		5855.000	51.78	6.22	58.00	110.80	-52.80	peak			
3		5875.000	52.06	5.99	58.05	105.20	-47.15	peak			
4	*	5925.000	52.88	6.06	58.94	68.20	-9.26	peak			


VERTICAL

Radiated Emission

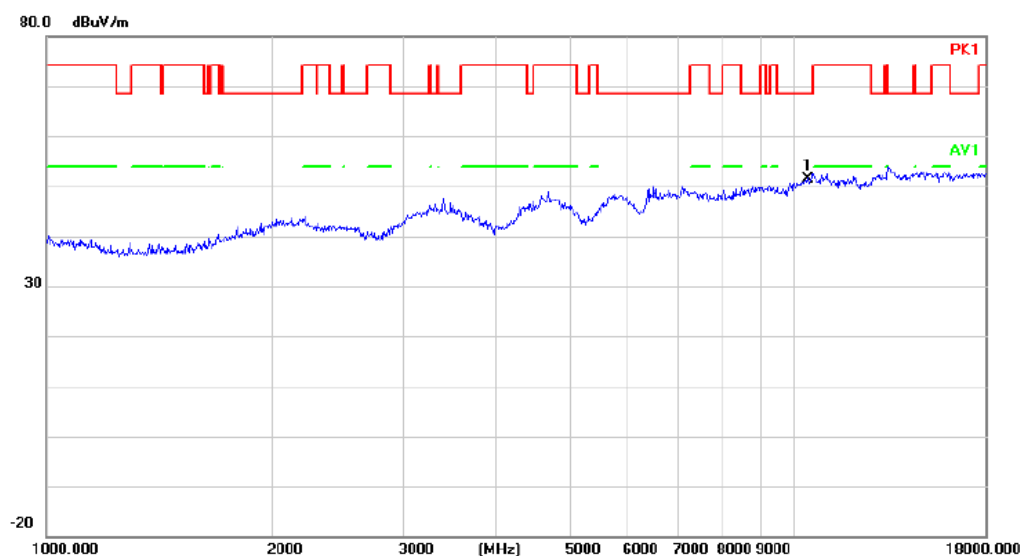

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10420.000	45.16	6.25	51.41	68.20	-16.79	peak		Comment


Radiated Emission

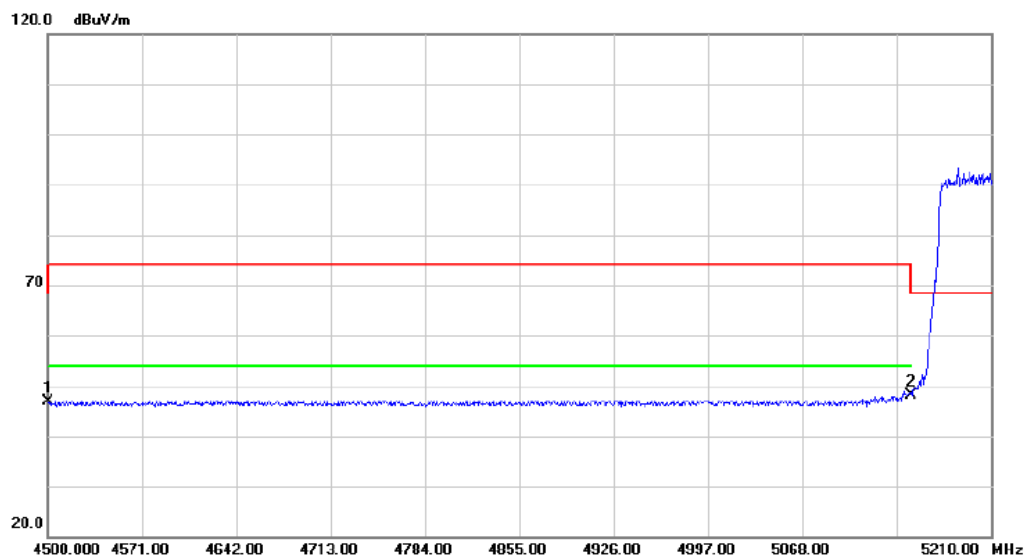

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	43.06	3.92	46.98	68.20	-21.22	peak		Comment
2	*	5150.000	42.67	5.56	48.23	68.20	-19.97	peak		Comment


HORIZONTAL

Radiated Emission

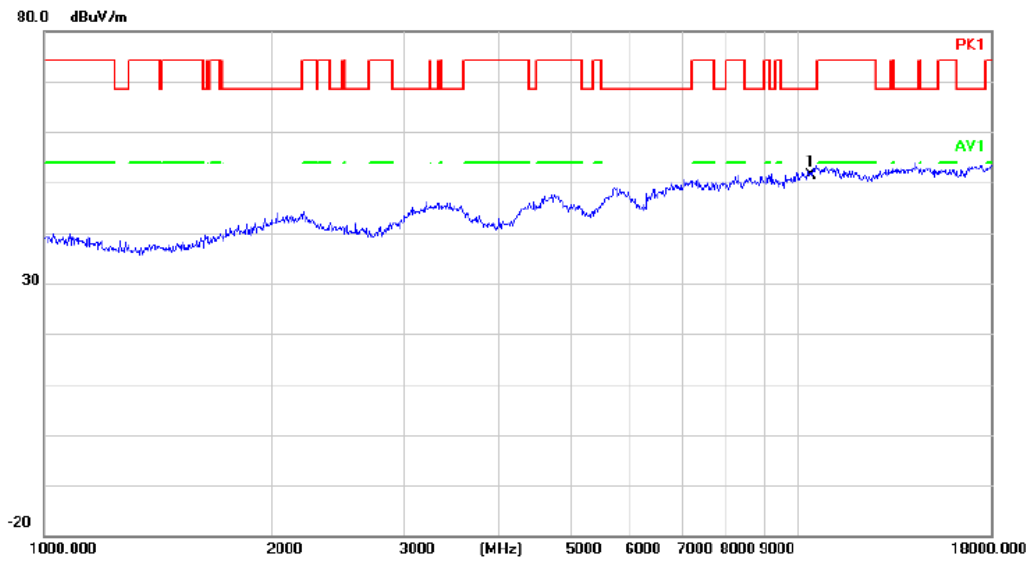

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10420.000	45.10	6.25	51.35	68.20	-16.85	peak		


Radiated Emission

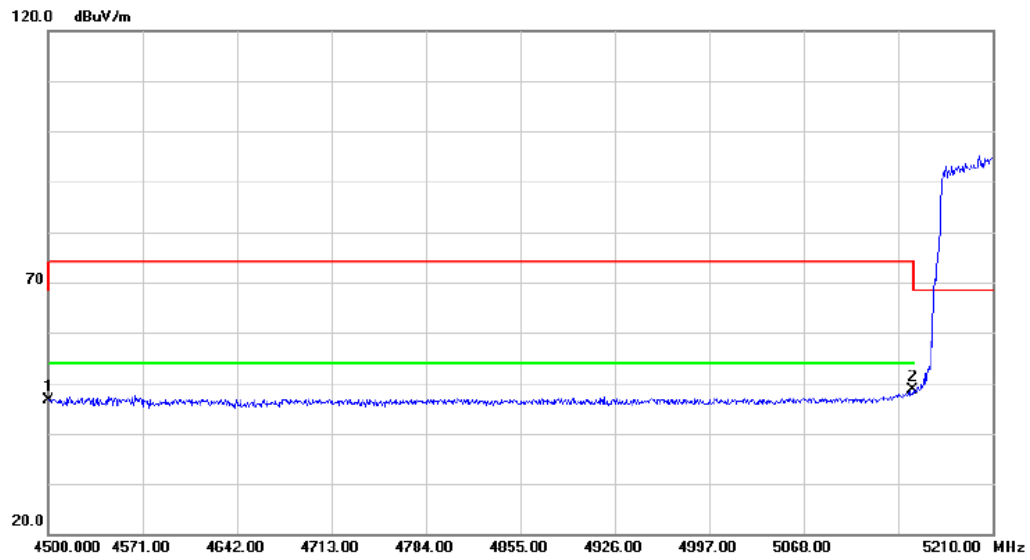

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	42.81	3.92	46.73	68.20	-21.47	peak		
2	*	5150.000	43.12	5.56	48.68	68.20	-19.52	peak		


VERTICAL

Radiated Emission

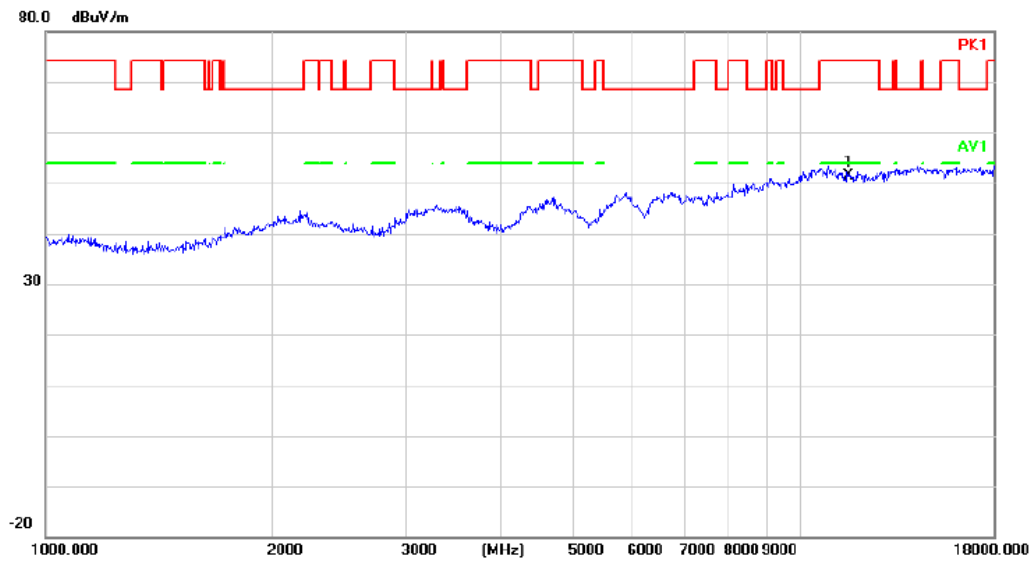

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11550.000	44.80	6.58	51.38	74.00	-22.62	peak		


Radiated Emission

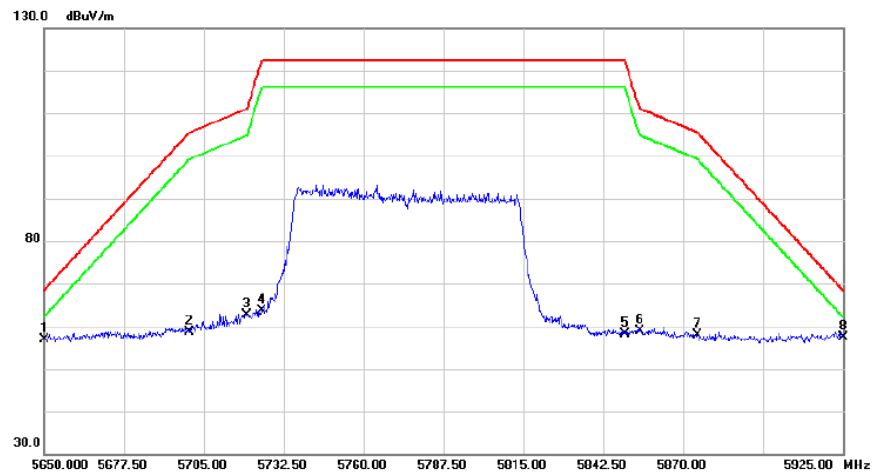

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5650.000	51.28	5.56	56.84	68.20	-11.36	peak		
2		5700.000	52.82	5.70	58.52	105.20	-46.68	peak		
3		5720.000	57.07	5.47	62.54	110.80	-48.26	peak		
4		5725.000	58.27	5.42	63.69	122.20	-58.51	peak		
5		5850.000	51.75	6.29	58.04	122.20	-64.16	peak		
6		5855.000	52.70	6.22	58.92	110.80	-51.88	peak		
7		5875.000	51.95	5.99	57.94	105.20	-47.26	peak		
8	*	5925.000	51.29	6.06	57.35	68.20	-10.85	peak		


HORIZONTAL

Radiated Emission

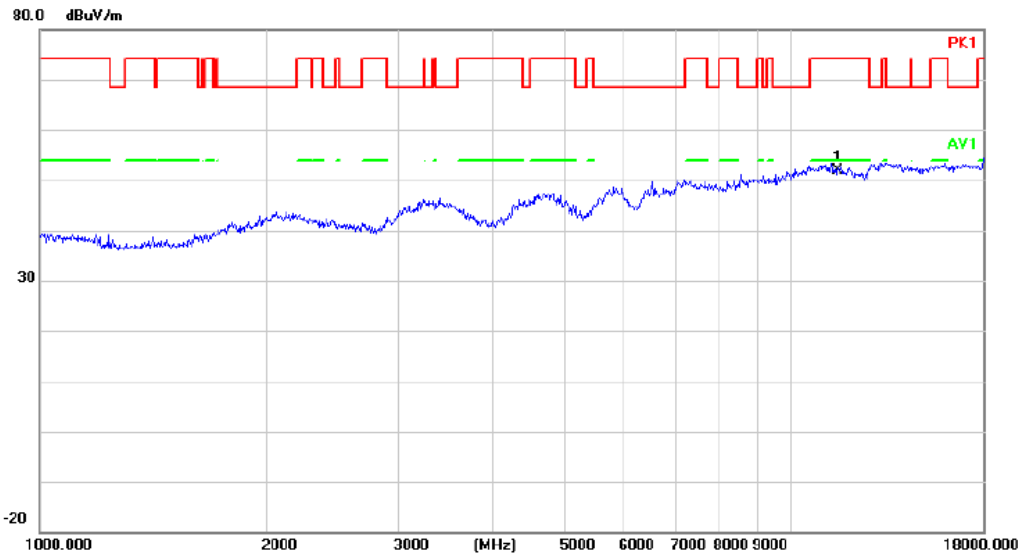

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11550.000	45.36	6.58	51.94	74.00	-22.06	peak	

Radiated Emission

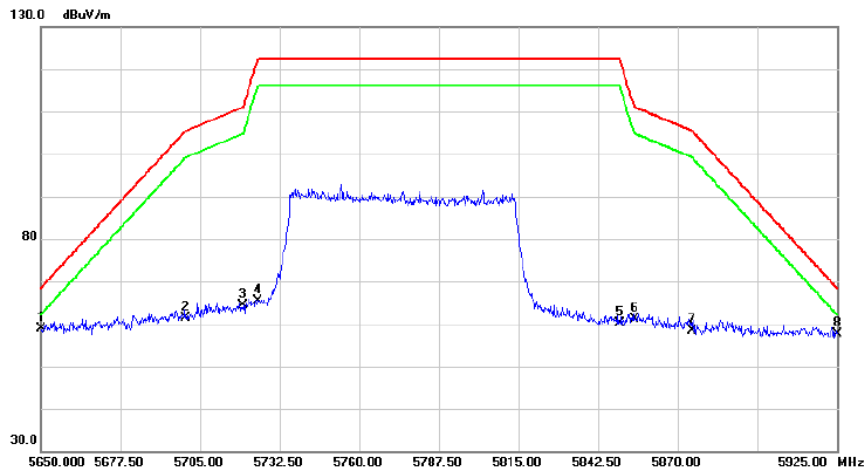

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	53.22	5.56	58.78	68.20	-9.42	peak	
2		5700.000	55.69	5.70	61.39	105.20	-43.81	peak	
3		5720.000	58.96	5.47	64.43	110.80	-46.37	peak	
4		5725.000	59.97	5.42	65.39	122.20	-56.81	peak	
5		5850.000	53.92	6.29	60.21	122.20	-61.99	peak	
6		5855.000	54.82	6.22	61.04	110.80	-49.76	peak	
7		5875.000	52.28	5.99	58.27	105.20	-46.93	peak	
8		5925.000	51.49	6.06	57.55	68.20	-10.65	peak	

The high frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.