


Product specification

Quick Reference Date

	Antenna module on the system board
Frequency	2.45GHz*1
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr – loss pwr)
Peak EIRP(dBm)	1.3
Directivity (dBi)	1 (all direction antenna)
Efficiency (dB)	-2.3 (58.5%)
Gain (dBi)	1.7 (Peak Gain XZ-plane)
Maximum Power (dBm)	1.3 (XY-plane)
Minimum Power (dBm)	-4(XY-plane)
Avg. Power (dBm)	-0.5(XY-plane)
Max/Min Ratio (dB)	5.3(XY-plane)
Max/Avg Ratio (dB)	1.8(XY-plane)
Min/Avg Ratio (dB)	-3.5(XY-plane)
Average Gain (dB)	-0.5 (Avg Gain XY-plane)
Manufacturer	Shenzhen Digital Cloud Technology Co.,LTD.
Address	2nd Floor, Building 3, Xinkecheng Industrial Zone, No.51 Dabao Road, Bao'an District, Shenzhen City


All the technical data and information contained herein are subject to change without prior notice

Antenna Layout on the system board


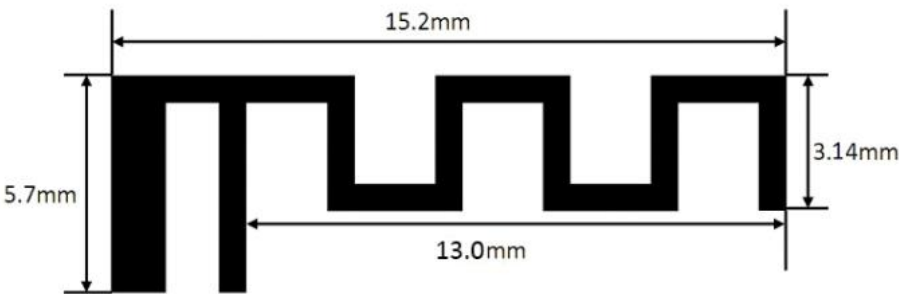


Antenna Gain
Gain Table


Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.3	-0.5	1.7	-3.8	1.1	-3.0	58.5%

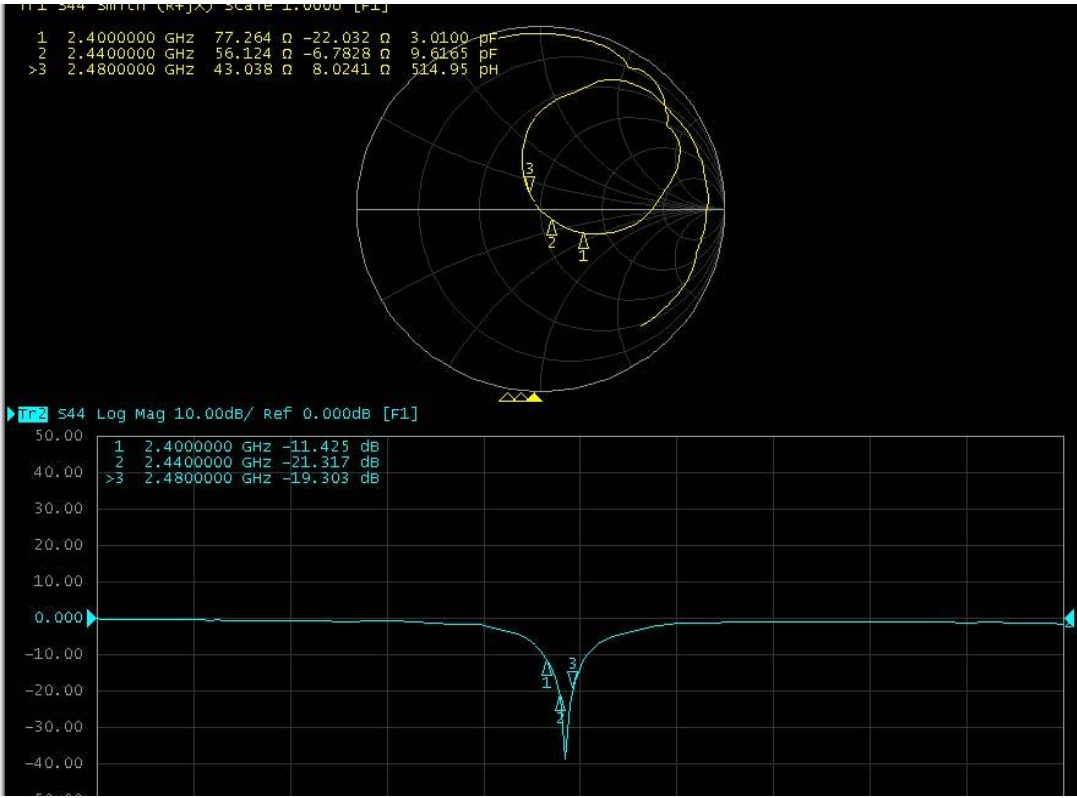


Return Loss

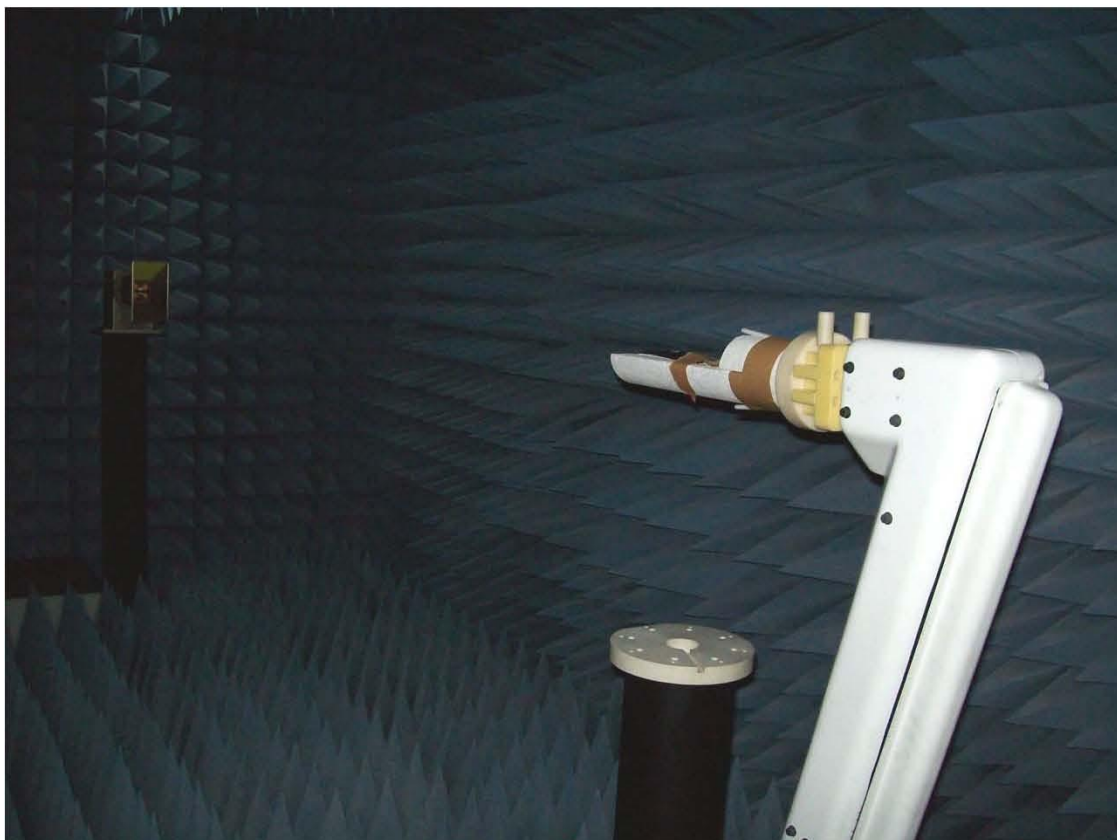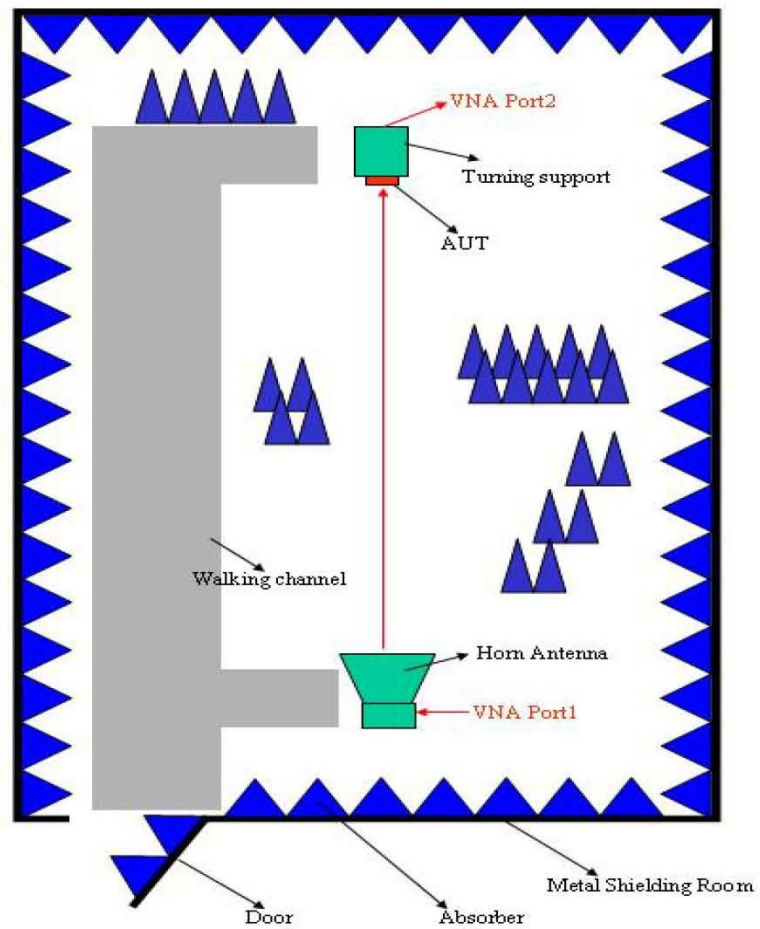


The Environment of Antenna Radiation Pattern

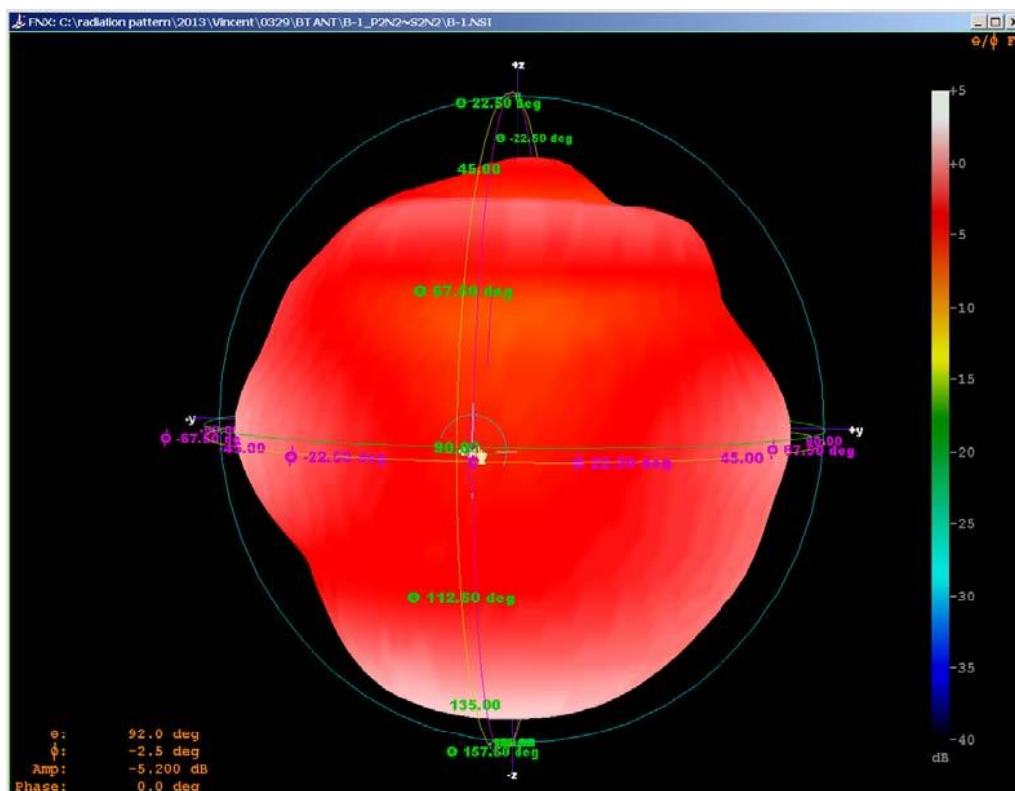


3D radiation pattern diagram

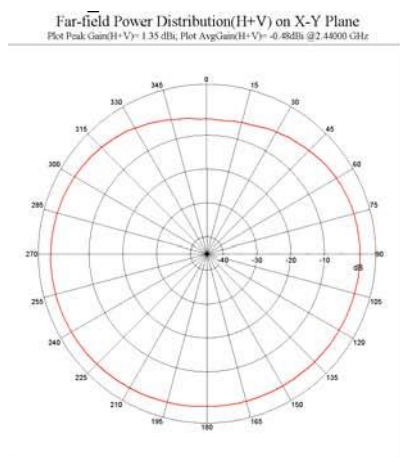

XY-plane

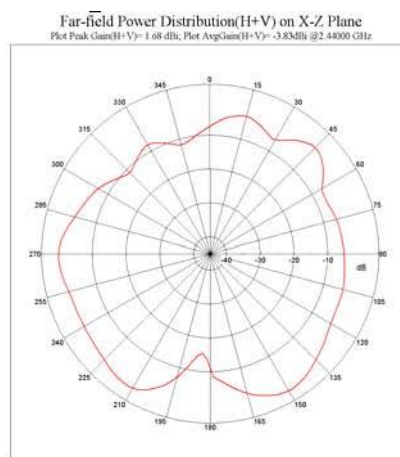

XZ-plane

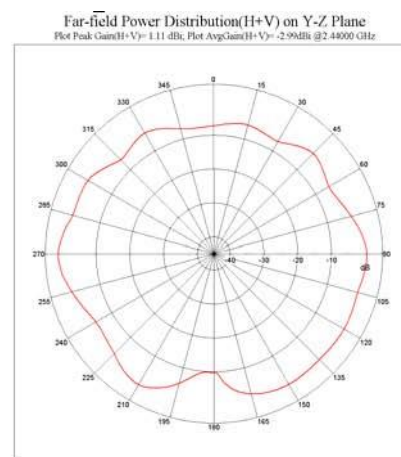

YZ-plane