

Acknowledgment Letter

C u s t o m e r N a m e : Shenzhen Ruituo Technology Co., Ltd.

Customer material number: 03020800085

Our company's model: RC-G25-6.3UH-20MM

Sample submission date: February 2nd, 2026

Supplier: Dongguan Jierestech Technology Co., Ltd.

Draw	Review	Approve
Wang Lizi	Deng Xianggui	Li Ru Shi

The customer acknowledges:

Qualified	Unqualified	Admit
Note		

Dongguan Jierestech Technology Co., Ltd.



Tel: _____

Fax: 86+13632701380

Address: No. 96, Langhu Road, Dalinshan Town, Dongguan (Building L, 3rd Floor, Jinxiangda Science and Technology Park)

Customer name	Customer material number	Our company's model	Version	Date
Ruituo	03020800085	RC-G25-6.3UH-20MM	A0	2026.2.2

一、 Plan view diagram: Unit: MM

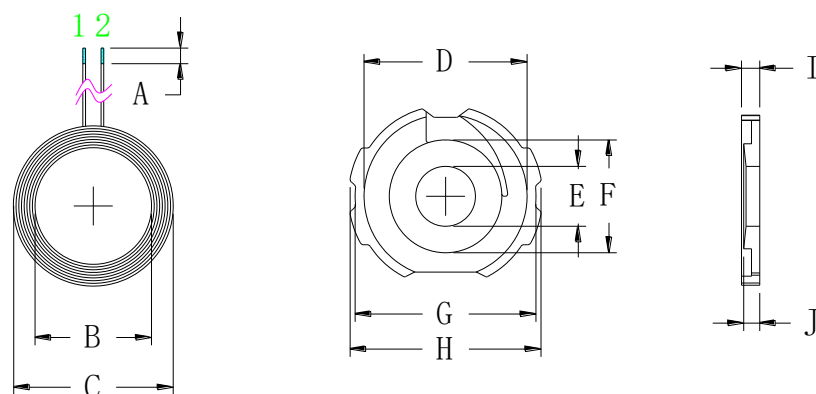

A	2.0 ± 1
B	15 ± 0.2
C	20.5 ± 0.5
D	21.5 ± 0.1
E	7.7 ± 0.1
F	13.5 ± 0.2
G	23.5 ± 0.2
H	25 ± 0.2
I	2.5 ± 0.2
J	2.25 ± 0.1
K	20 ± 1

二、 Product parameters:

Position of the foot	Diameter	Number of circles	Note
1 - 2	0.08*24P	12T	Hot air twisted yarn

三、 Technical requirements:

1. Fix the ends of the wires securely to prevent any loosening or breakage of the wires.
2. According to the customer's requirements, cut the excessively long wire ends, apply tin plating, and ensure that the tin plating depth is uniformly 2 ± 1 MM.
3. Apply the appropriate white glue on the soft magnetic sheet, attach the coil, and during the process, ensure that the surface of the product is clean and tidy.
4. The soft magnetic sheet used has circular holes and is free from any damage.
5. Supplementary process (as per customer requirements): Apply back adhesive without installing magnets, semi-finished product packaging



四、Electrical parameters:

1. Inductance value, Q value:

PIN 1 — 2 = 6.3UH ± 5%

Q value ≥ 25

The above inductance and Q value were measured using the Quanhua 1062A instrument, with a standard of 100 KHz/1.0 Vrms or an equivalent instrument.。

五、Materials List::

NO	Name	Material	Supplier	Note
1	Hot air twisted yarn	0.08*24P	Uyghur-Tan or equivalent	
2	Disk	G25 Soft Base Material	Tianton or equivalent	
3	Tin	High-temperature environmental protection	Thousand Islands or equivalent	
4	White glue	BY882	Bao Yue or equivalent	
5	Double-sided adhesive tape	513-Ø20*10MM		Circular
6	Pipeline	Double-root cable 0.8*18MM black heat shrink tube		