




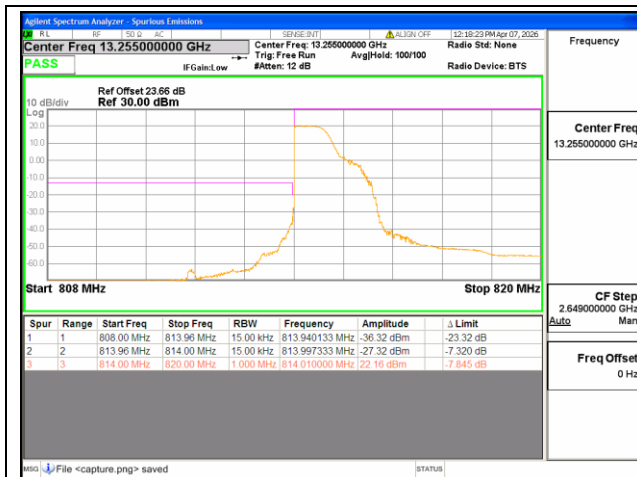


B26 Part90 / 1.4MHz / Low CH / QPSK / 1 RB

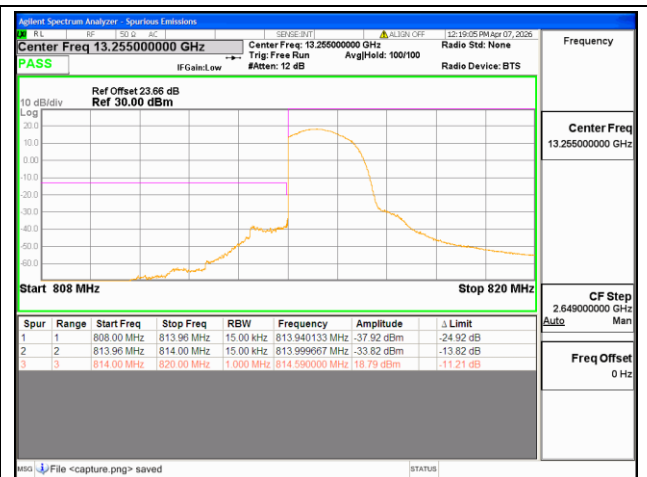


B26 Part90 / 1.4MHz / Low CH / QPSK / FULL RB

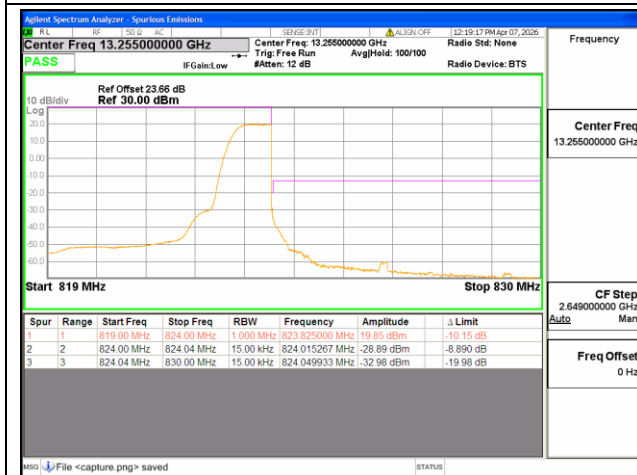


B26 Part90 / 1.4MHz / High CH / QPSK / 1 RB

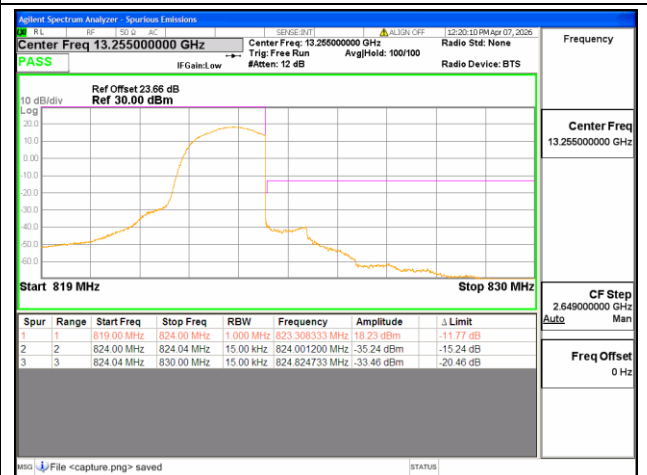


B26 Part90 / 1.4MHz / High CH / QPSK / FULL RB

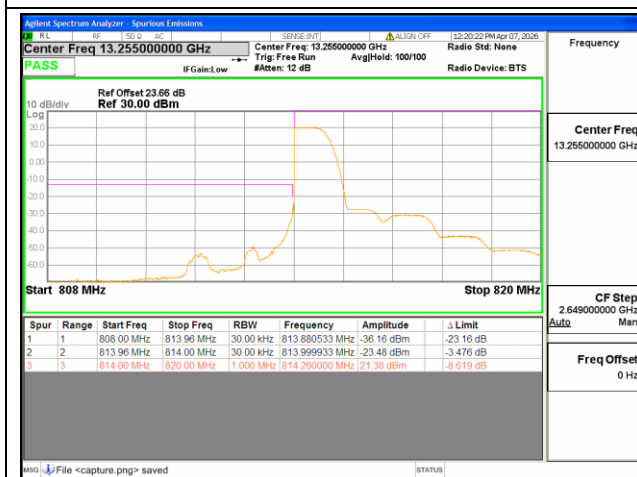


B26 Part90 / 3MHz / Low CH / QPSK / 1 RB

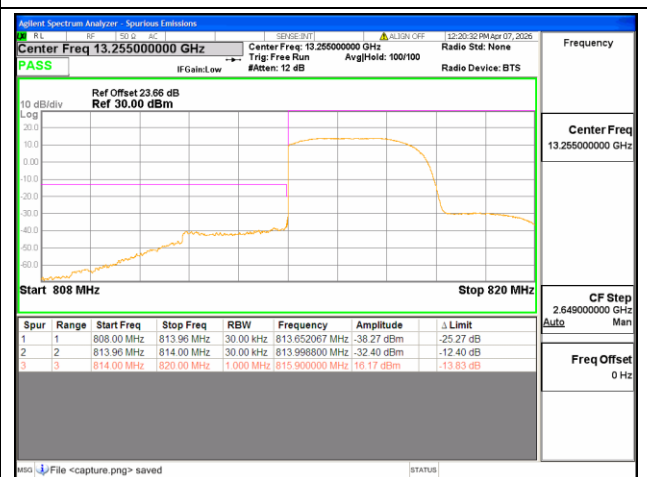


B26 Part90 / 3MHz / Low CH / QPSK / FULL RB

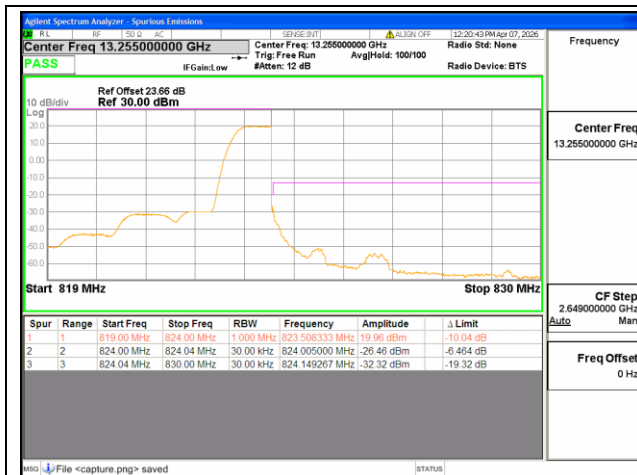


B26 Part90 / 3MHz / High CH / QPSK / 1 RB

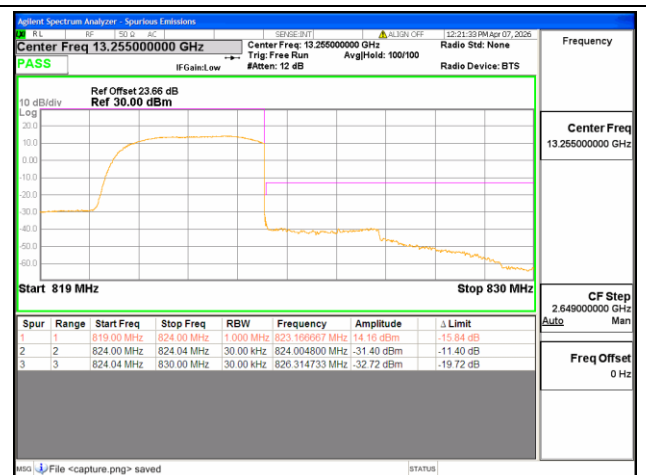


B26 Part90 / 3MHz / High CH / QPSK / FULL RB

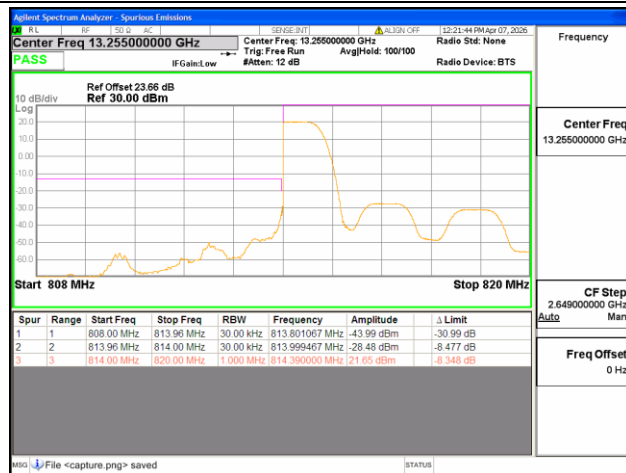


B26 Part90 / 5MHz / Low CH / QPSK / 1 RB

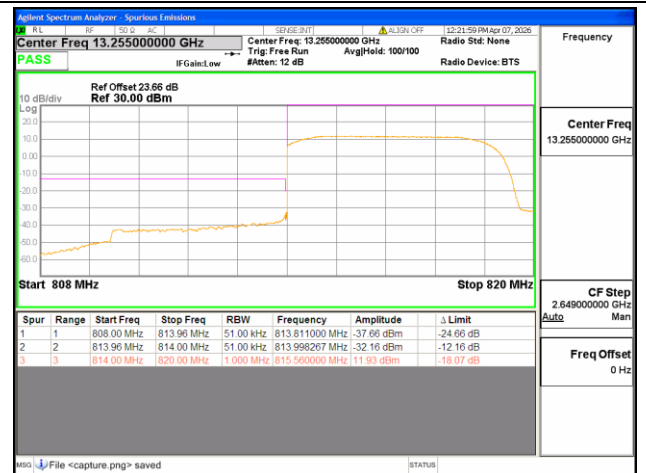


B26 Part90 / 5MHz / Low CH / QPSK / FULL RB

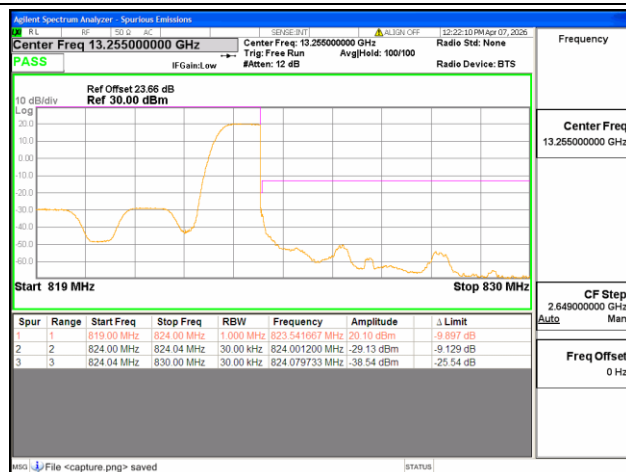


B26 Part90 / 5MHz / High CH / QPSK / 1 RB

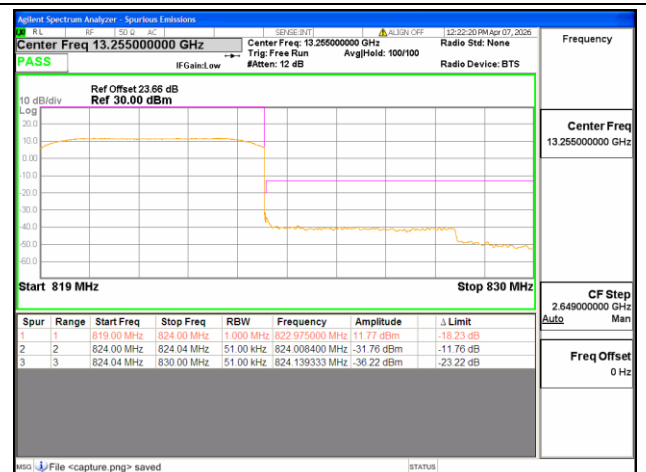


B26 Part90 / 5MHz / High CH / QPSK / FULL RB

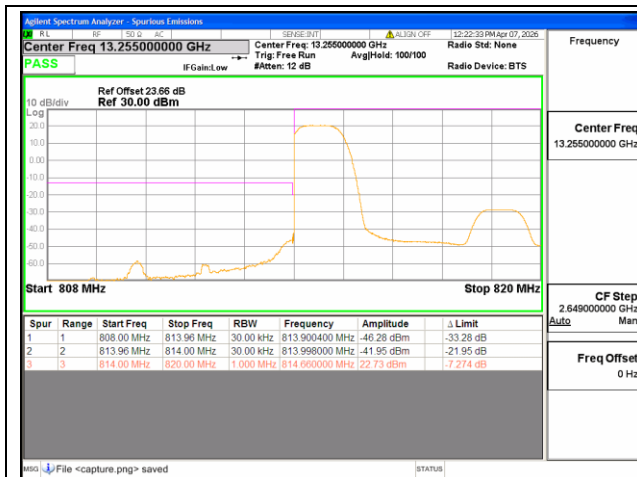


B26 Part90 / 10MHz / Low CH / QPSK / 1 RB

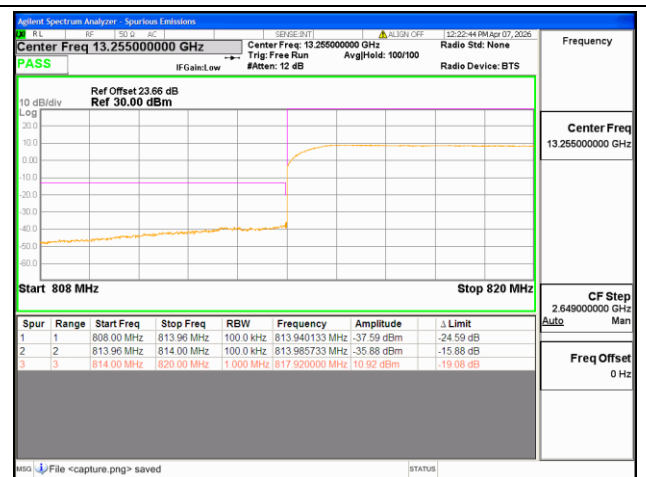

B26 Part90 / 10MHz / Low CH / QPSK / FULL RB

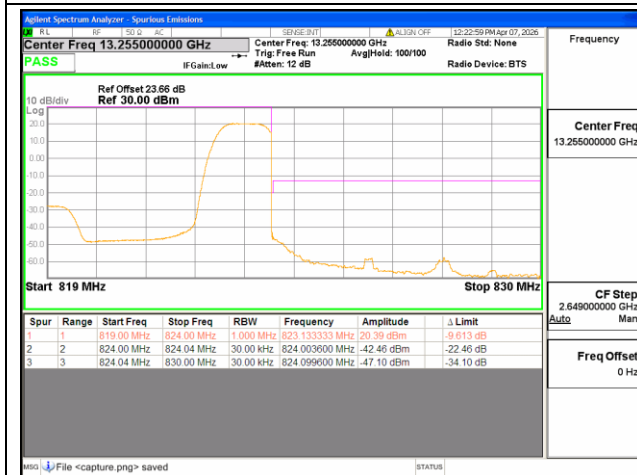

B26 Part90 / 10MHz / High CH / QPSK / 1 RB

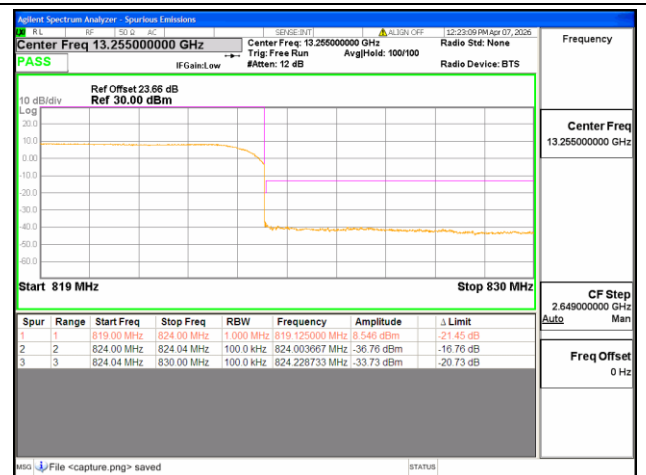


B26 Part90 / 10MHz / High CH / QPSK / FULL RB


2.6. Radiated Spurious Emissions

2.6.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

2.6.2. Test Description

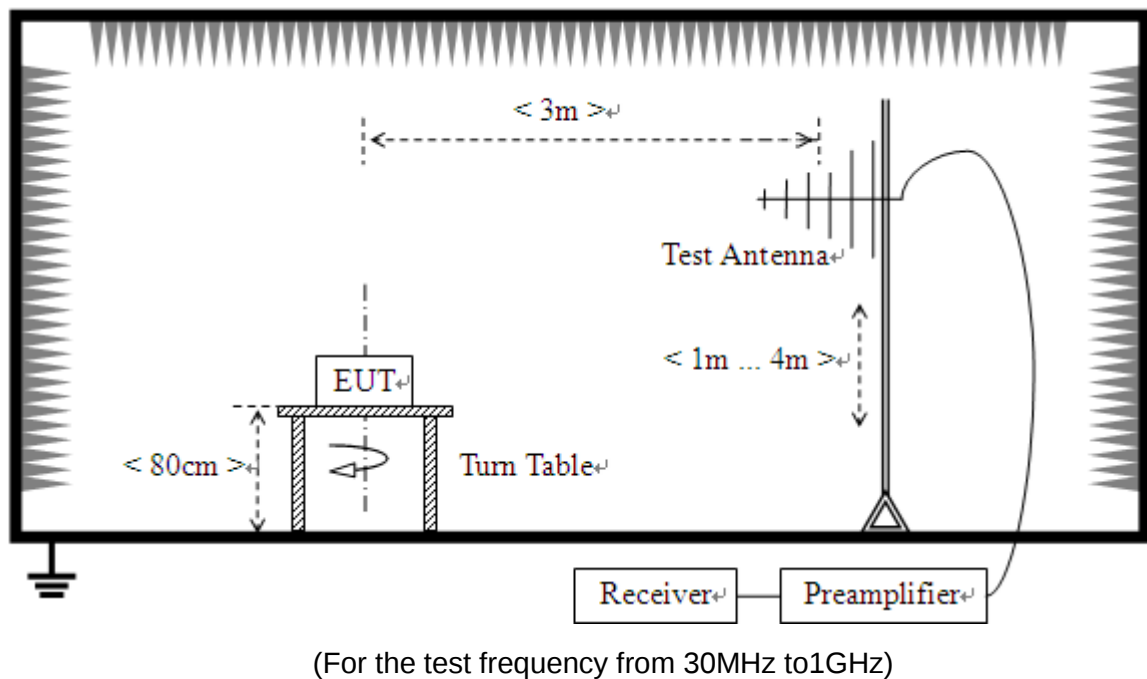

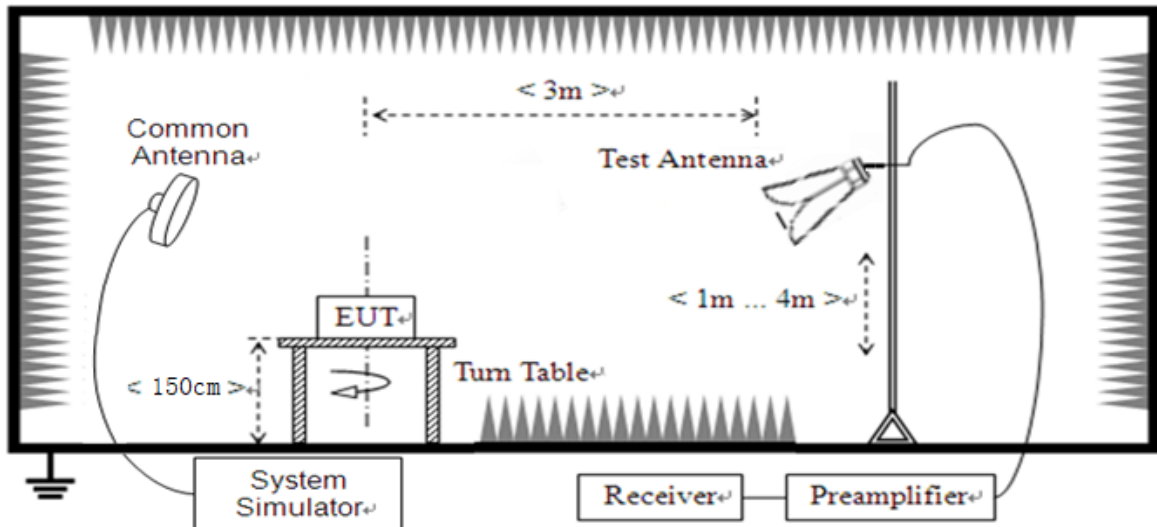

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.6.3. Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.



2.6.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of A_{TOT} .


Note1: The power of the EUT transmitting frequency should be ignored.

Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note3: All bandwidth and modulation were considered and evaluated respectively by performing full test for each band, only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.

Note 4: N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.


Note 5: The amplitude of emissions(18GHz to 10th harmonics) which are attenuated more than 20 dB below the limit are not be reported.

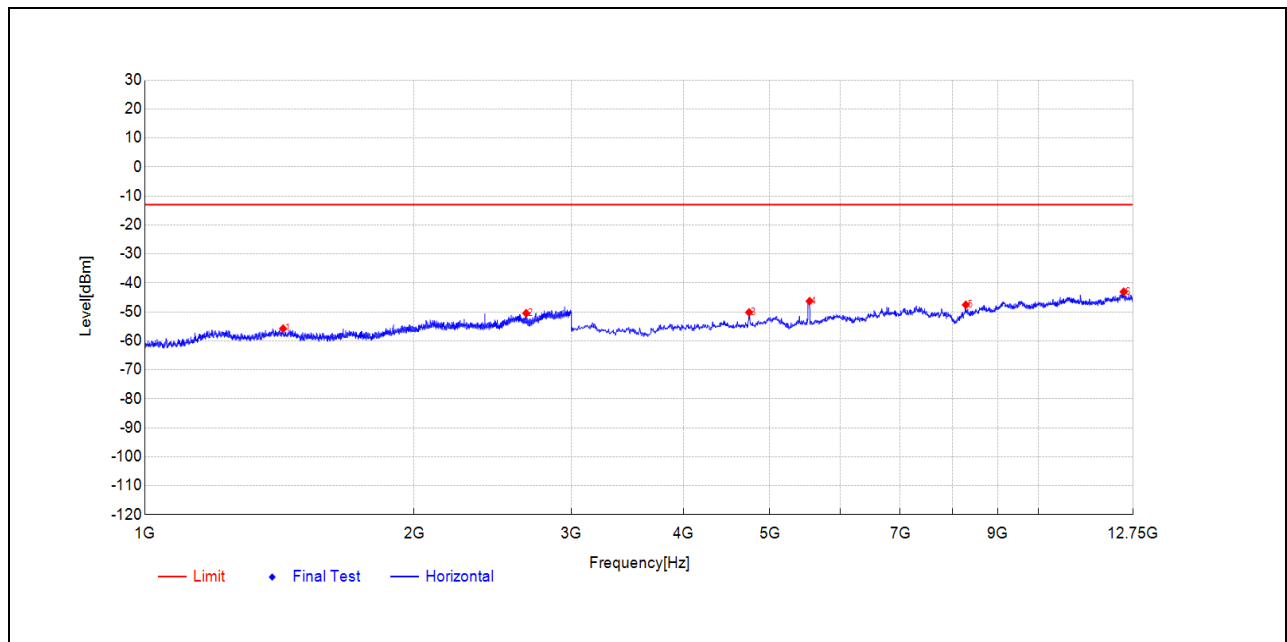

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1426.8854	-58.17	-55.79	2.4	-13.0	42.8	Horizontal	PK	PASS
2	2669.5339	-57.13	-50.48	6.7	-13.0	37.5	Horizontal	PK	PASS
3	4741.2456	-50.17	-50.19	0.0	-13.0	37.2	Horizontal	PK	PASS
4	5541.1456	-47.95	-46.31	1.6	-13.0	33.3	Horizontal	PK	PASS
5	8287.1436	-55.46	-47.59	7.9	-13.0	34.6	Horizontal	PK	PASS
6	12447.5988	-57.81	-43.07	14.7	-13.0	30.1	Horizontal	PK	PASS


H_LTE_B14_LOW 5M 1G-12.75G

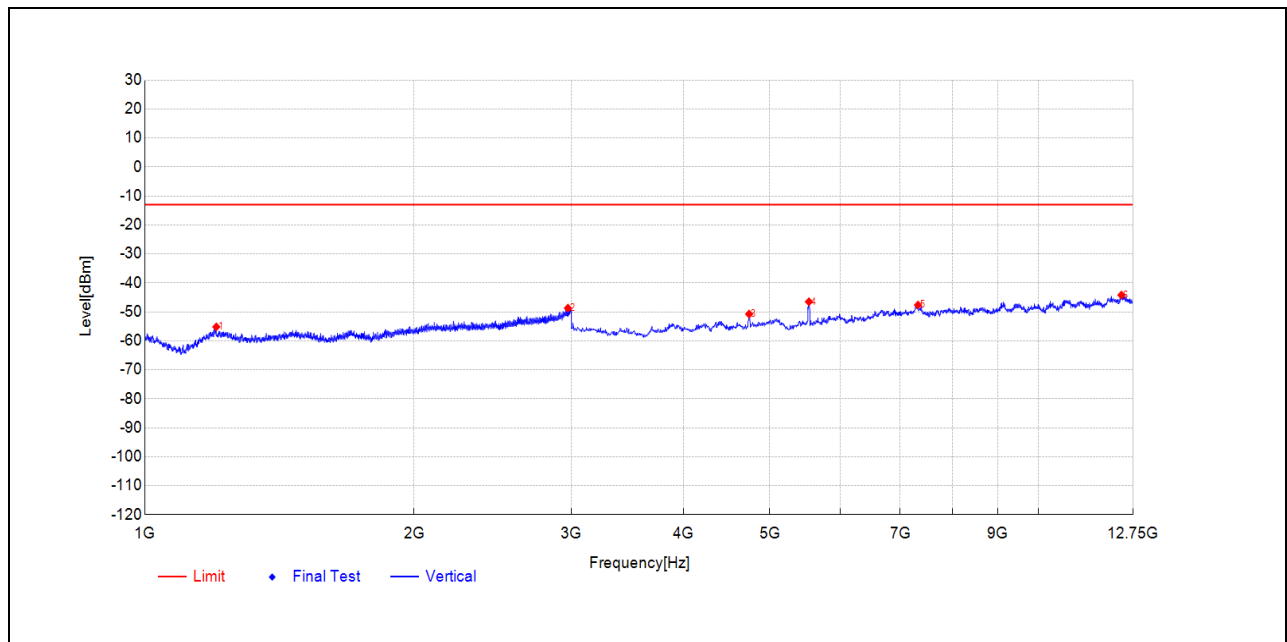

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1201.2402	-57.62	-55.18	2.4	-13.0	42.2	Vertical	PK	PASS
2	2972.3945	-59.06	-48.71	10.4	-13.0	35.7	Vertical	PK	PASS
3	4741.2456	-50.27	-50.75	-0.5	-13.0	37.8	Vertical	PK	PASS
4	5531.3907	-47.86	-46.51	1.4	-13.0	33.5	Vertical	PK	PASS
5	7326.2881	-55.35	-47.64	7.7	-13.0	34.6	Vertical	PK	PASS
6	12374.4372	-57.95	-44.20	13.8	-13.0	31.2	Vertical	PK	PASS


V_LTE_B14_LOW 5M 1G-12.75G

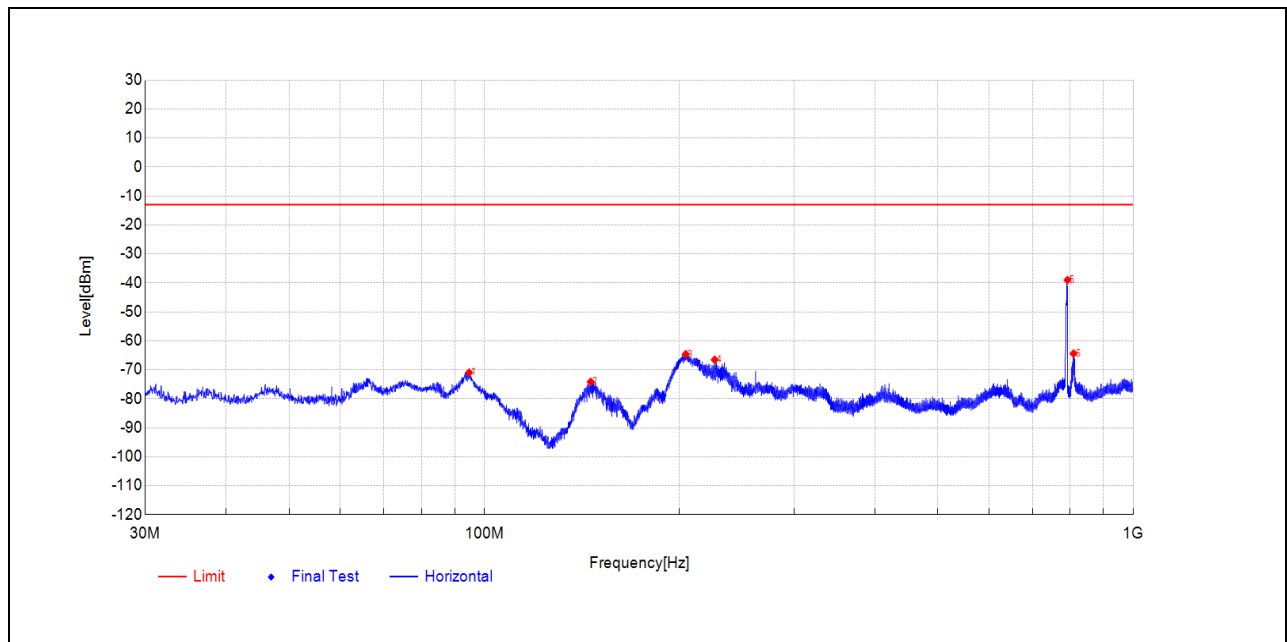

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	94.7507	-48.70	-70.97	-22.3	-13.0	58.0	Horizontal	PK	PASS
2	145.8723	-47.57	-74.16	-26.6	-13.0	61.2	Horizontal	PK	PASS
3	204.4147	-48.35	-64.61	-16.3	-13.0	51.6	Horizontal	PK	PASS
4	226.5318	-58.62	-66.53	-7.9	-13.0	53.5	Horizontal	PK	PASS
5	792.4581	-34.30	-39.04	-4.7	-	-	Horizontal	PK	NA
6	809.628	-58.84	-64.39	-5.6	-	-	Horizontal	PK	NA


H_LTE_B14_LOW 5M 30M-1G

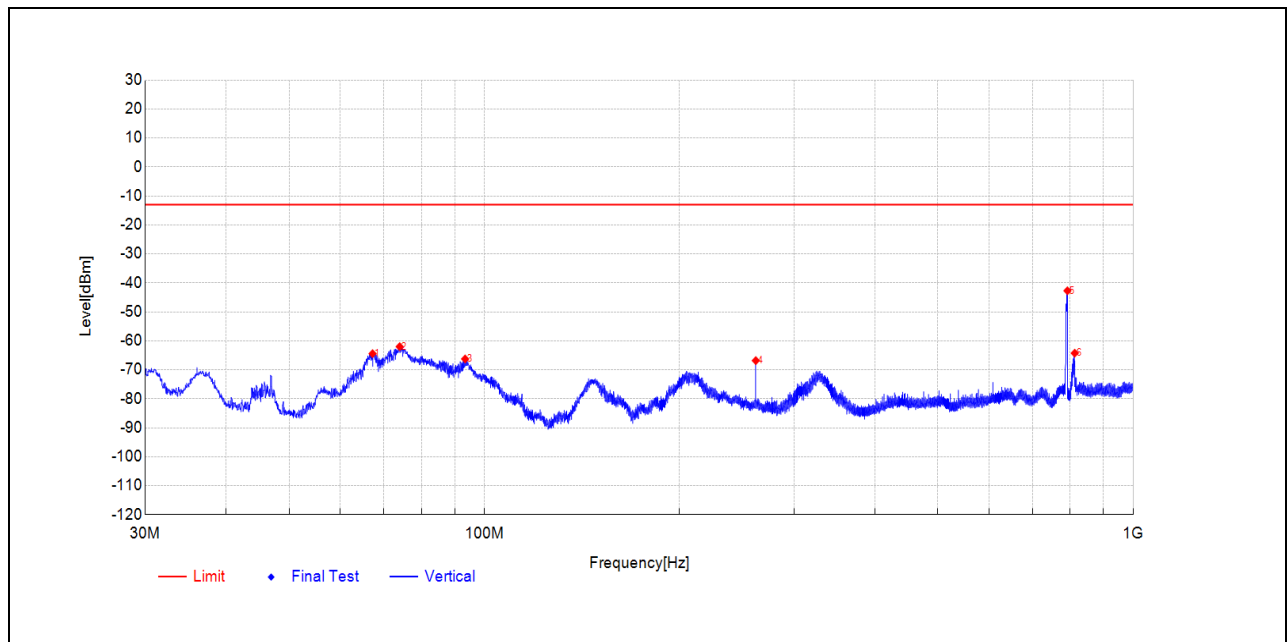

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	67.2499	-43.18	-64.41	-21.2	-13.0	51.4	Vertical	PK	PASS
2	74.0402	-40.06	-61.99	-21.9	-13.0	49.0	Vertical	PK	PASS
3	93.3927	-46.68	-66.25	-19.6	-13.0	53.3	Vertical	PK	PASS
4	262.0841	-48.72	-66.81	-18.1	-13.0	53.8	Vertical	PK	PASS
5	792.3126	-36.16	-42.72	-6.6	-	-	Vertical	PK	NA
6	813.1202	-58.12	-64.25	-6.1	-	-	Vertical	PK	NA


V_LTE_B14_LOW 5M 30M-1G

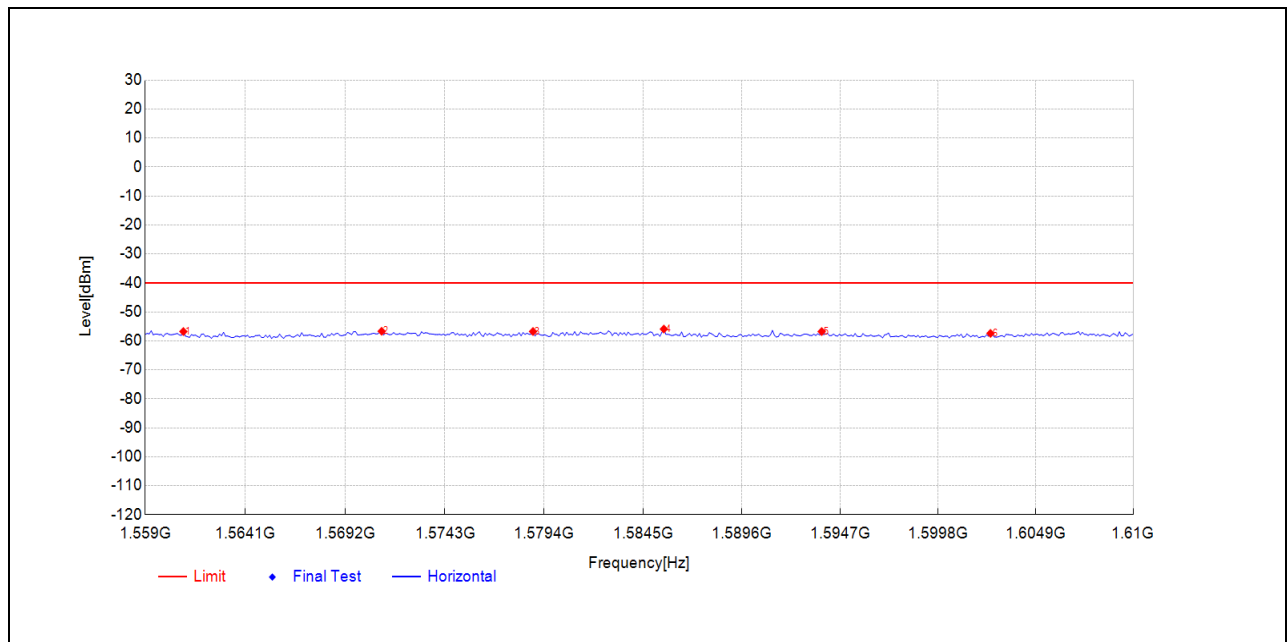

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1560.9419	-57.81	-56.79	1.0	-40.0	16.8	Horizontal	PK	PASS
2	1571.0601	-57.65	-56.70	1.0	-40.0	16.7	Horizontal	PK	PASS
3	1578.8277	-57.67	-56.78	0.9	-40.0	16.8	Horizontal	PK	PASS
4	1585.5731	-56.77	-55.93	0.8	-40.0	15.9	Horizontal	PK	PASS
5	1593.7495	-57.57	-56.79	0.8	-40.0	16.8	Horizontal	PK	PASS
6	1602.5391	-58.18	-57.42	0.8	-40.0	17.4	Horizontal	PK	PASS


H_LTE_B14_LOW_5M_1559-1610_-40

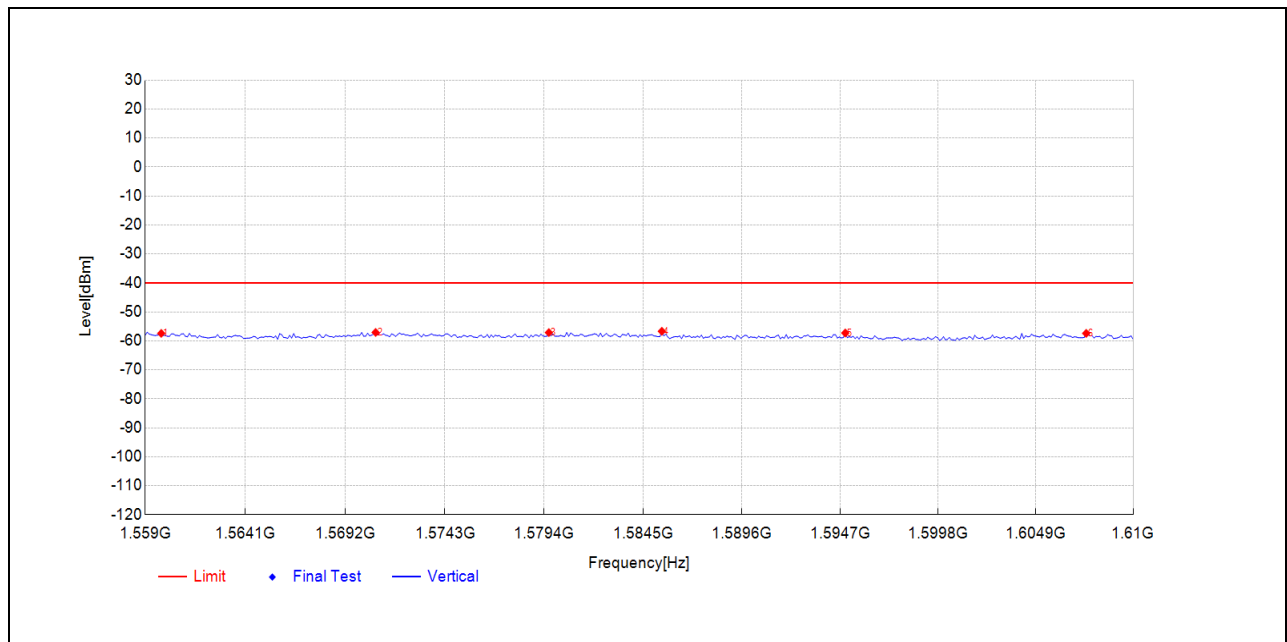

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1559.8176	-58.25	-57.42	0.8	-40.0	17.4	Vertical	PK	PASS
2	1570.7535	-57.69	-57.10	0.6	-40.0	17.1	Vertical	PK	PASS
3	1579.6453	-57.54	-57.15	0.4	-40.0	17.2	Vertical	PK	PASS
4	1585.4709	-56.97	-56.71	0.3	-40.0	16.7	Vertical	PK	PASS
5	1594.976	-57.35	-57.29	0.1	-40.0	17.3	Vertical	PK	PASS
6	1607.5471	-57.47	-57.42	0.1	-40.0	17.4	Vertical	PK	PASS


V_LTE_B14_LOW_5M_1559-1610_-40

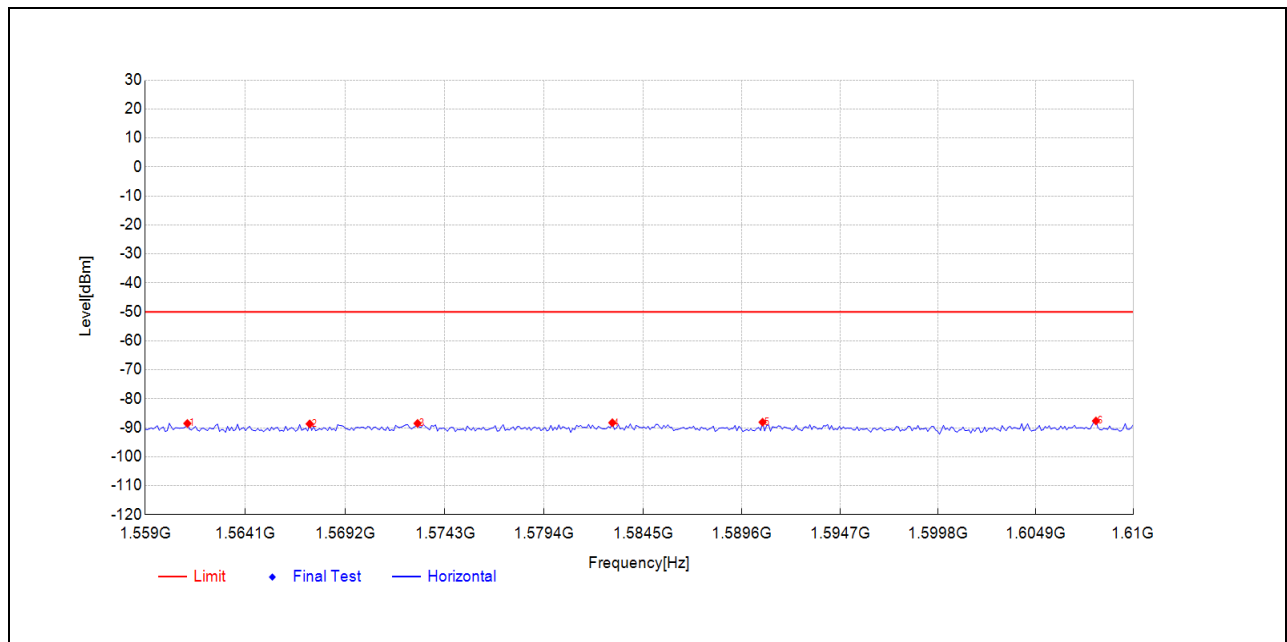

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1561.1463	-89.51	-88.50	1.0	-50.0	38.5	Horizontal	PK	PASS
2	1567.3808	-89.62	-88.65	1.0	-50.0	38.7	Horizontal	PK	PASS
3	1572.8998	-89.41	-88.48	0.9	-50.0	38.5	Horizontal	PK	PASS
4	1582.9158	-89.12	-88.25	0.9	-50.0	38.3	Horizontal	PK	PASS
5	1590.6834	-88.89	-88.08	0.8	-50.0	38.1	Horizontal	PK	PASS
6	1608.0581	-88.43	-87.63	0.8	-50.0	37.6	Horizontal	PK	PASS


H_LTE_B14_LOW_5M_1559-1610_-50

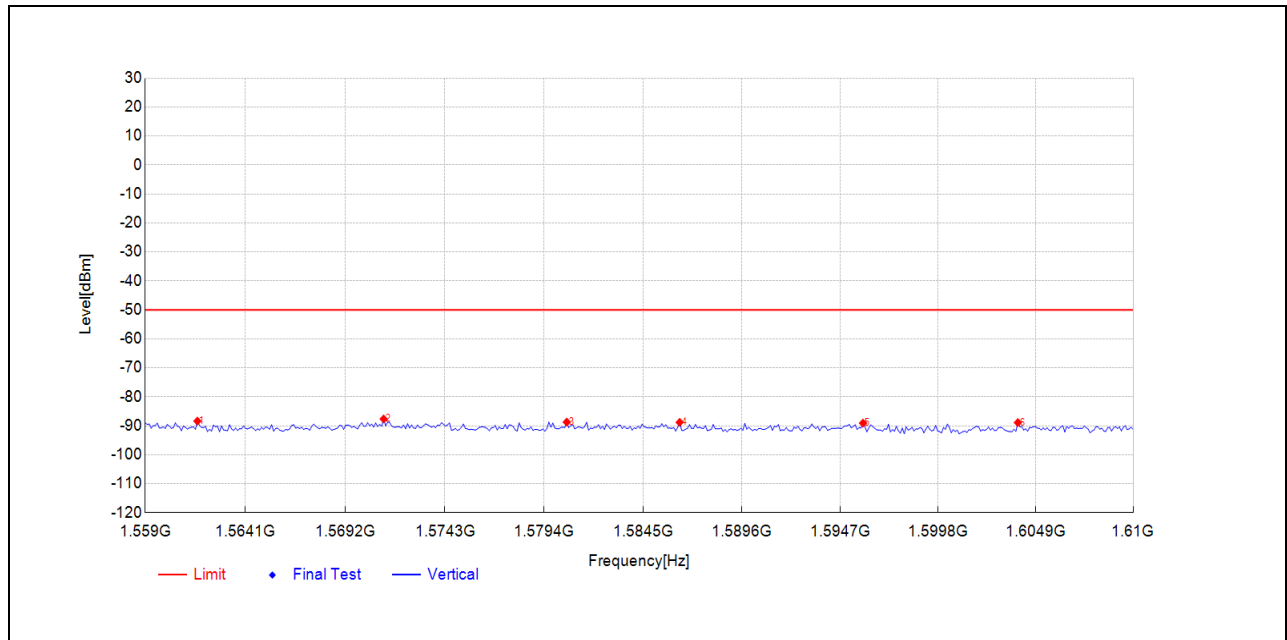

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1561.6573	-89.17	-88.38	0.8	-50.0	38.4	Vertical	PK	PASS
2	1571.1623	-88.22	-87.64	0.6	-50.0	37.6	Vertical	PK	PASS
3	1580.5651	-89.08	-88.71	0.4	-50.0	38.7	Vertical	PK	PASS
4	1586.3908	-89.05	-88.81	0.2	-50.0	38.8	Vertical	PK	PASS
5	1595.8958	-89.12	-89.08	0.0	-50.0	39.1	Vertical	PK	PASS
6	1603.9699	-88.88	-88.88	0.0	-50.0	38.9	Vertical	PK	PASS


V_LTE_B14_LOW_5M_1559-1610_-50

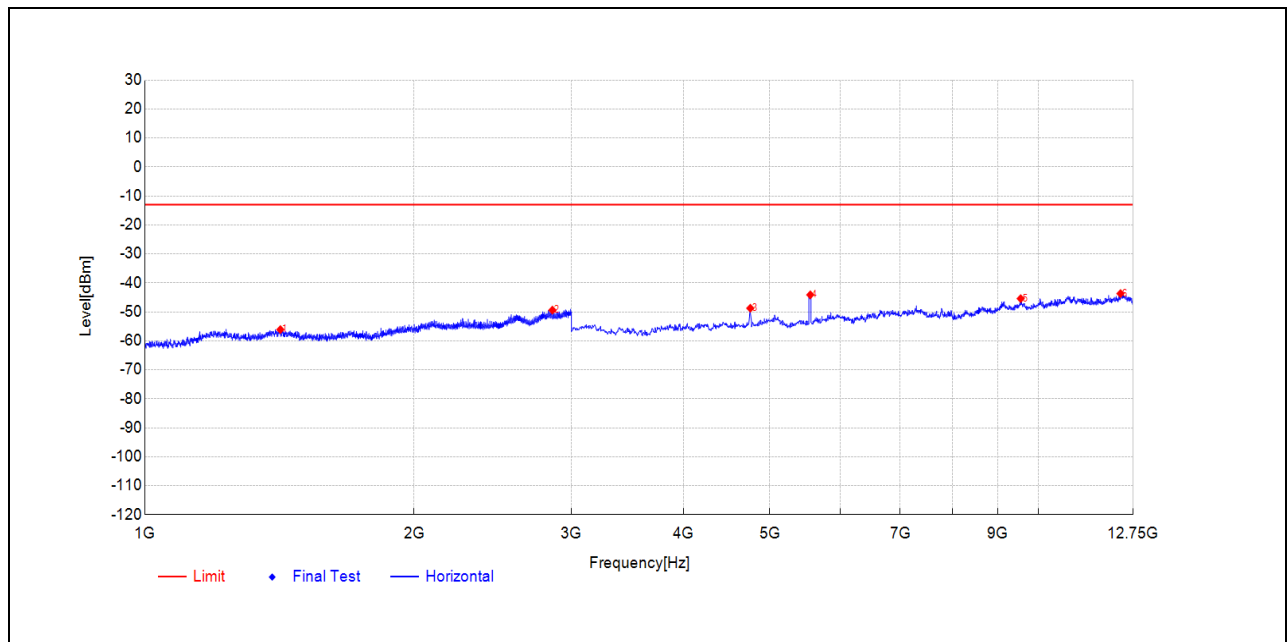

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1416.8834	-58.58	-56.11	2.5	-13.0	43.1	Horizontal	PK	PASS
2	2855.9712	-58.44	-49.40	9.0	-13.0	36.4	Horizontal	PK	PASS
3	4755.8779	-48.76	-48.75	0.0	-13.0	35.8	Horizontal	PK	PASS
4	5550.9004	-45.80	-44.12	1.7	-13.0	31.1	Horizontal	PK	PASS
5	9545.5228	-55.29	-45.43	9.9	-13.0	32.4	Horizontal	PK	PASS
6	12345.1726	-58.04	-43.69	14.4	-13.0	30.7	Horizontal	PK	PASS


H_LTE_B14_MID 5M 1G-12.75G

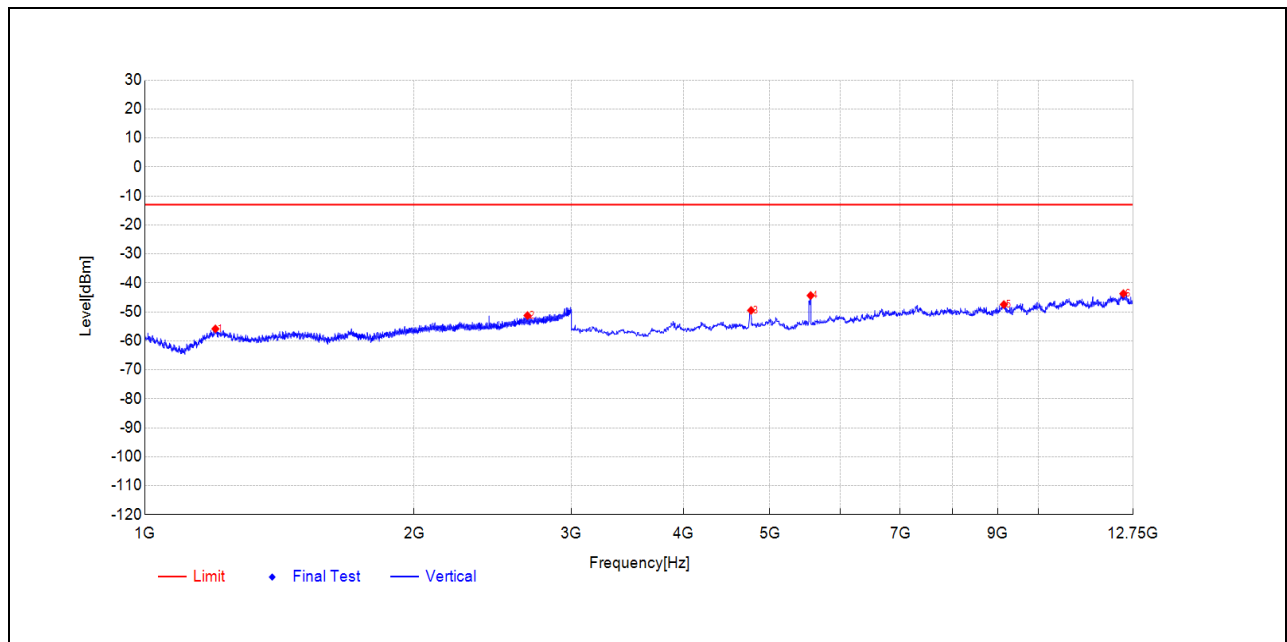

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1198.4397	-58.25	-55.87	2.4	-13.0	42.9	Vertical	PK	PASS
2	2678.3357	-57.84	-51.26	6.6	-13.0	38.3	Vertical	PK	PASS
3	4765.6328	-49.18	-49.49	-0.3	-13.0	36.5	Vertical	PK	PASS
4	5555.7779	-45.78	-44.37	1.4	-13.0	31.4	Vertical	PK	PASS
5	9140.6953	-56.06	-47.47	8.6	-13.0	34.5	Vertical	PK	PASS
6	12437.8439	-57.74	-43.72	14.0	-13.0	30.7	Vertical	PK	PASS


V_LTE_B14_MID 5M 1G-12.75G

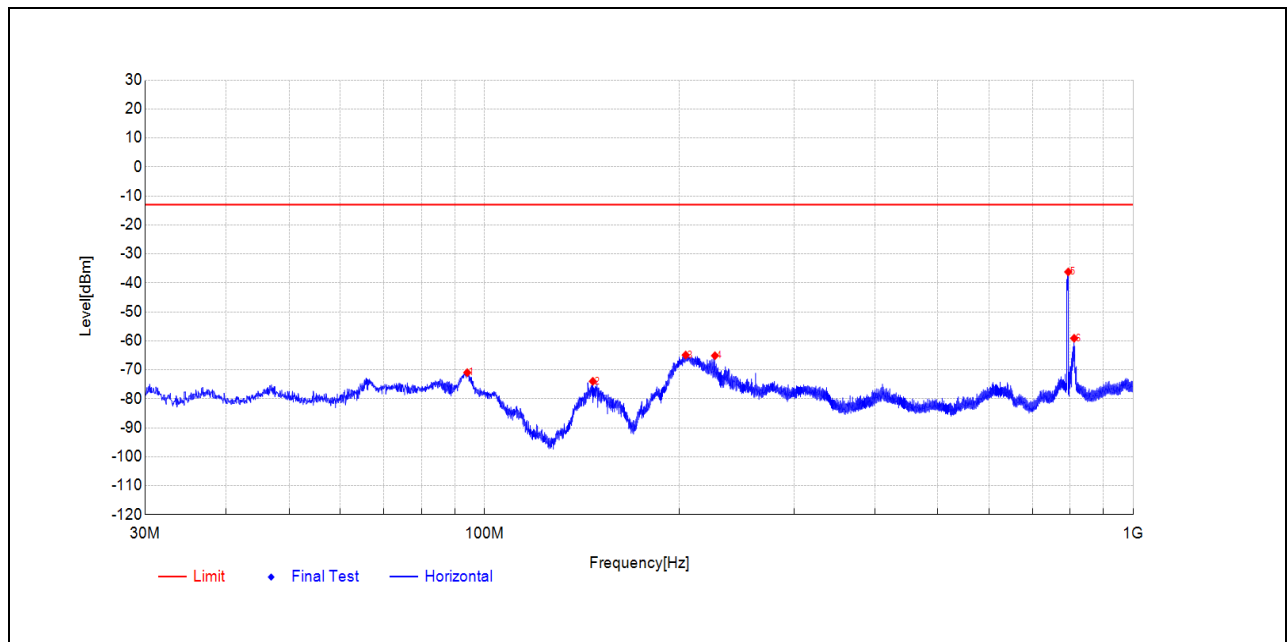

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	94.1202	-48.74	-70.97	-22.2	-13.0	58.0	Horizontal	PK	PASS
2	146.9878	-47.42	-73.96	-26.5	-13.0	61.0	Horizontal	PK	PASS
3	204.3662	-48.63	-64.90	-16.3	-13.0	51.9	Horizontal	PK	PASS
4	226.7258	-57.31	-65.13	-7.8	-13.0	52.1	Horizontal	PK	PASS
5	794.6407	-31.38	-36.22	-4.8	-	-	Horizontal	PK	NA
6	811.4711	-53.50	-59.11	-5.6	-	-	Horizontal	PK	NA


H_LTE_B14_MID 5M 30M-1G

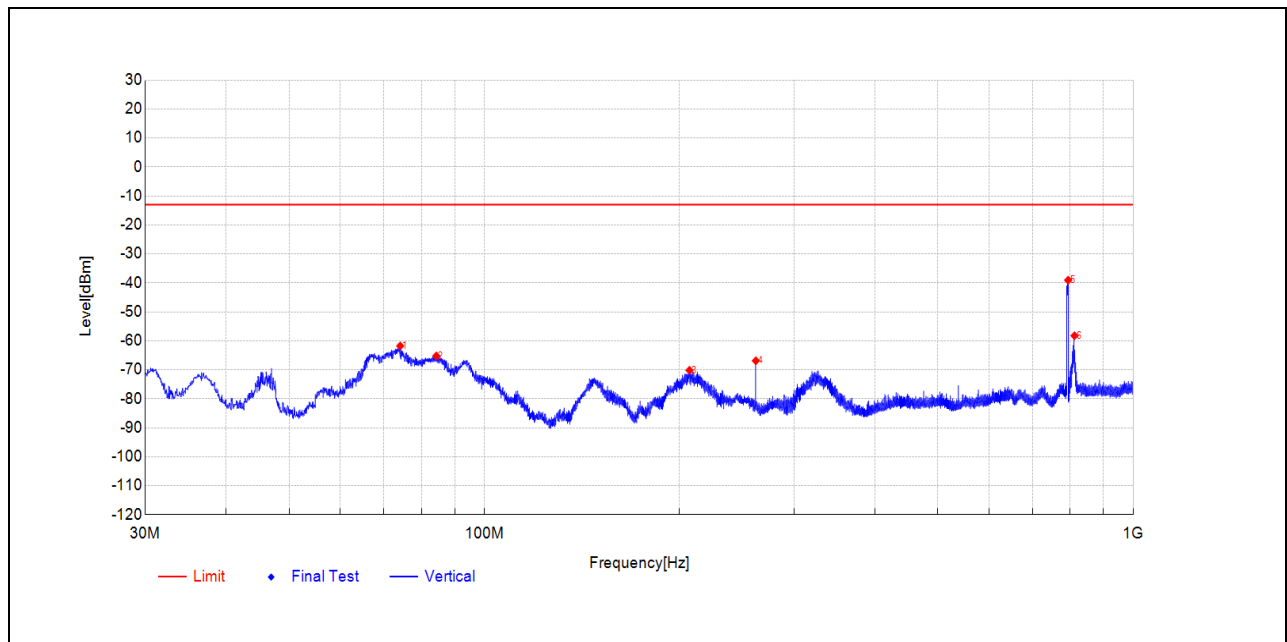

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	74.1857	-39.83	-61.75	-21.9	-13.0	48.8	Vertical	PK	PASS
2	84.3227	-44.40	-65.20	-20.8	-13.0	52.2	Vertical	PK	PASS
3	207.1309	-51.67	-70.16	-18.5	-13.0	57.2	Vertical	PK	PASS
4	262.1326	-48.78	-66.87	-18.1	-13.0	53.9	Vertical	PK	PASS
5	794.3497	-32.55	-39.07	-6.5	-	-	Vertical	PK	NA
6	812.4411	-52.08	-58.23	-6.2	-	-	Vertical	PK	NA


V_LTE_B14_MID 5M 30M-1G

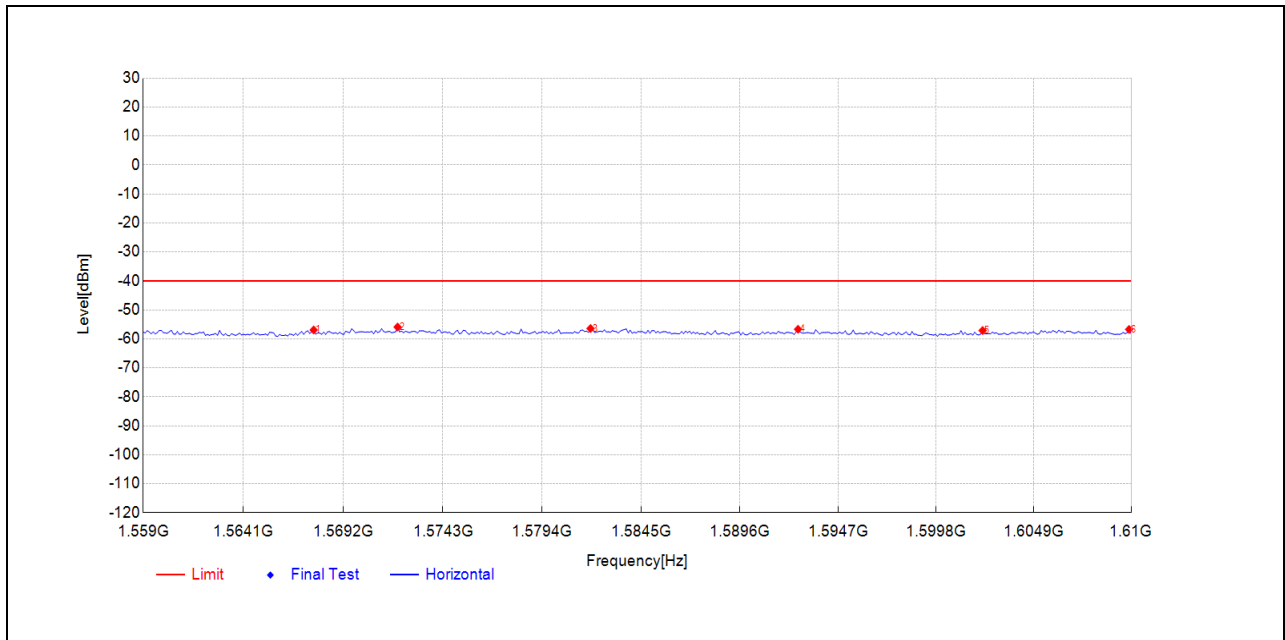

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1567.6874	-57.90	-56.93	1.0	-40.0	16.9	Horizontal	PK	PASS
2	1571.98	-56.87	-55.93	0.9	-40.0	15.9	Horizontal	PK	PASS
3	1581.8938	-57.32	-56.44	0.9	-40.0	16.4	Horizontal	PK	PASS
4	1592.6253	-57.48	-56.69	0.8	-40.0	16.7	Horizontal	PK	PASS
5	1602.2325	-57.88	-57.12	0.8	-40.0	17.1	Horizontal	PK	PASS
6	1609.8978	-57.55	-56.74	0.8	-40.0	16.7	Horizontal	PK	PASS


H_LTE_B14_MID_5M_1559-1610_-40

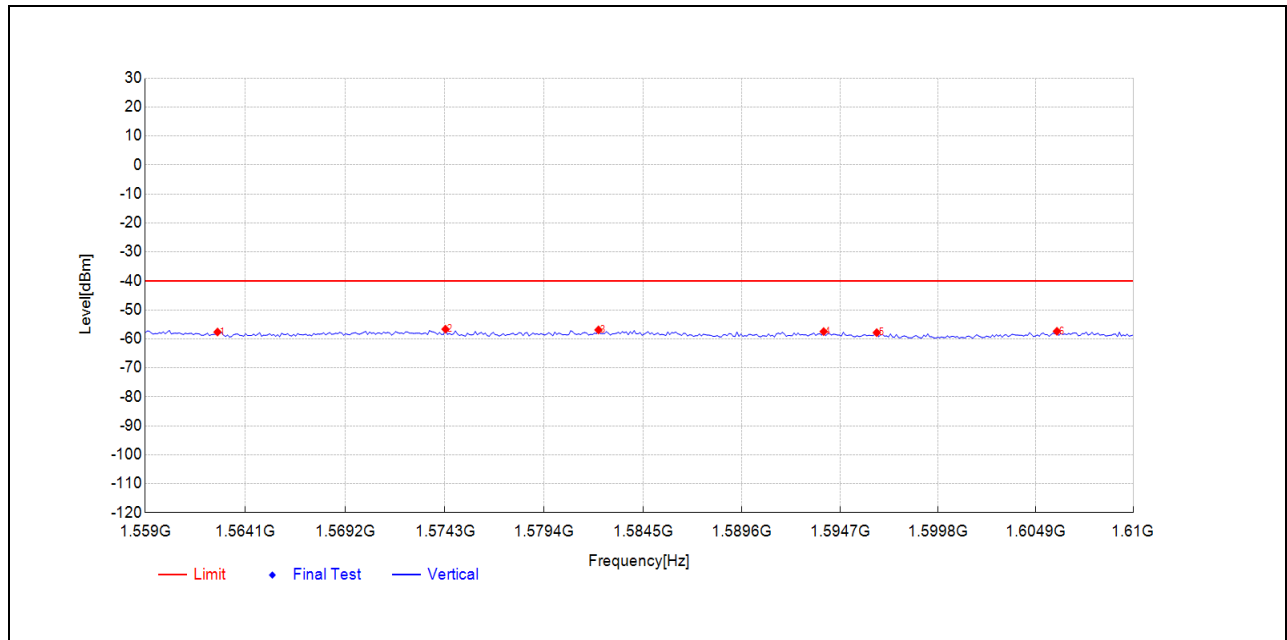

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1562.6794	-58.41	-57.64	0.8	-40.0	17.6	Vertical	PK	PASS
2	1574.3307	-57.18	-56.67	0.5	-40.0	16.7	Vertical	PK	PASS
3	1582.2004	-57.27	-56.93	0.3	-40.0	16.9	Vertical	PK	PASS
4	1593.8517	-57.57	-57.49	0.1	-40.0	17.5	Vertical	PK	PASS
5	1596.6112	-57.89	-57.87	0.0	-40.0	17.9	Vertical	PK	PASS
6	1606.014	-57.43	-57.40	0.0	-40.0	17.4	Vertical	PK	PASS


V_LTE_B14_MID_5M_1559-1610_-40

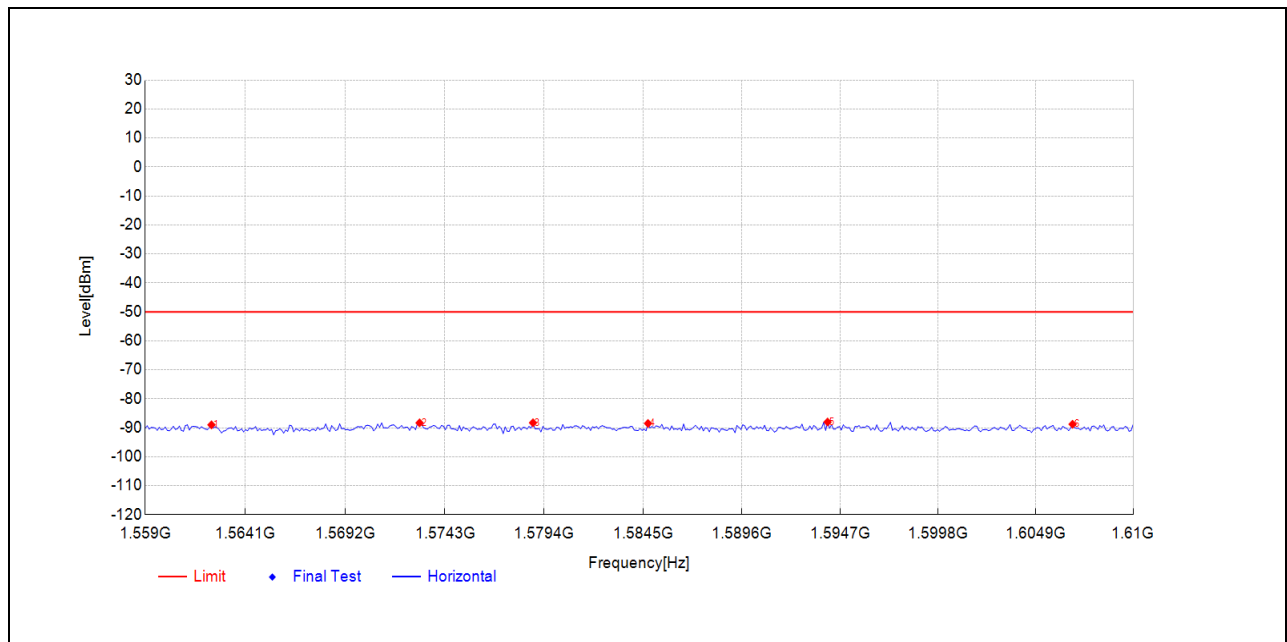

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1562.3727	-89.99	-88.98	1.0	-50.0	39.0	Horizontal	PK	PASS
2	1573.002	-89.23	-88.30	0.9	-50.0	38.3	Horizontal	PK	PASS
3	1578.8277	-89.15	-88.26	0.9	-50.0	38.3	Horizontal	PK	PASS
4	1584.7555	-89.35	-88.50	0.9	-50.0	38.5	Horizontal	PK	PASS
5	1594.0561	-88.79	-88.01	0.8	-50.0	38.0	Horizontal	PK	PASS
6	1606.8317	-89.56	-88.77	0.8	-50.0	38.8	Horizontal	PK	PASS


H_LTE_B14_MID_5M_1559-1610_-50

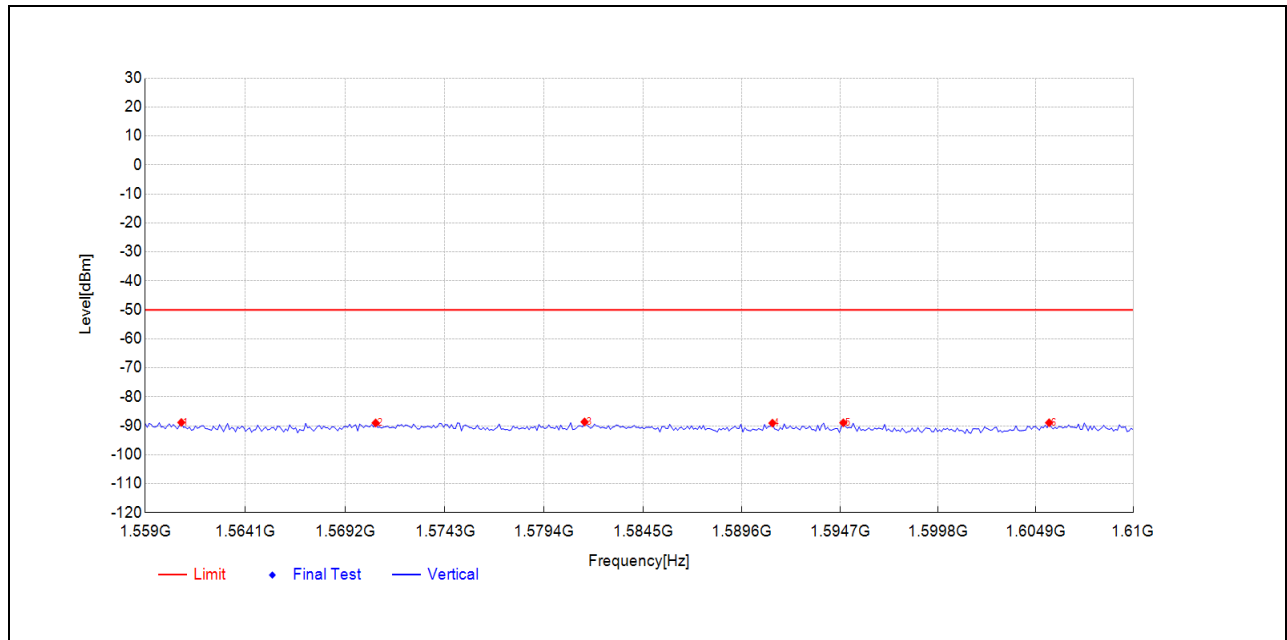

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1560.8397	-89.65	-88.85	0.8	-50.0	38.9	Vertical	PK	PASS
2	1570.7535	-89.61	-89.02	0.6	-50.0	39.0	Vertical	PK	PASS
3	1581.485	-89.03	-88.67	0.4	-50.0	38.7	Vertical	PK	PASS
4	1591.1944	-89.21	-89.07	0.1	-50.0	39.1	Vertical	PK	PASS
5	1594.8737	-89.03	-88.97	0.1	-50.0	39.0	Vertical	PK	PASS
6	1605.6052	-88.98	-88.95	0.0	-50.0	39.0	Vertical	PK	PASS


V_LTE_B14_MID_5M_1559-1610_-50

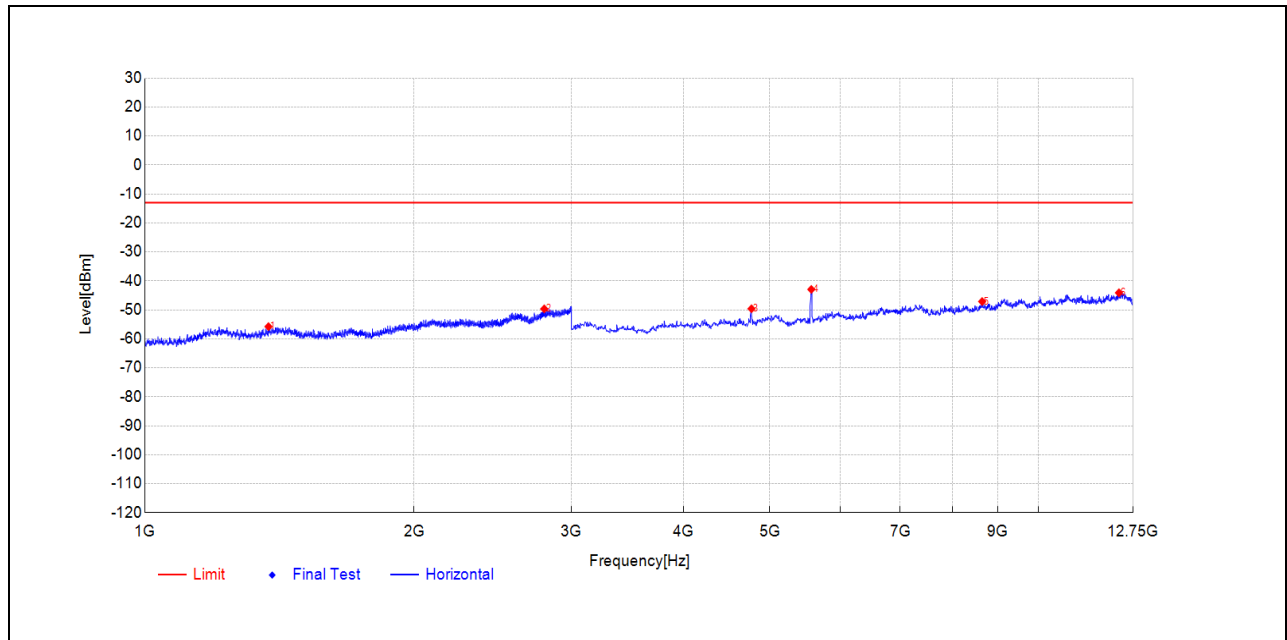

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1374.0748	-57.65	-55.79	1.9	-13.0	42.8	Horizontal	PK	PASS
2	2796.3593	-58.29	-49.65	8.6	-13.0	36.7	Horizontal	PK	PASS
3	4770.5103	-49.51	-49.61	-0.1	-13.0	36.6	Horizontal	PK	PASS
4	5565.5328	-44.65	-42.95	1.7	-13.0	30.0	Horizontal	PK	PASS
5	8643.1966	-54.72	-47.14	7.6	-13.0	34.1	Horizontal	PK	PASS
6	12296.3982	-57.92	-44.10	13.8	-13.0	31.1	Horizontal	PK	PASS


H_LTE_B14_HIGH 5M 1G-12.75G

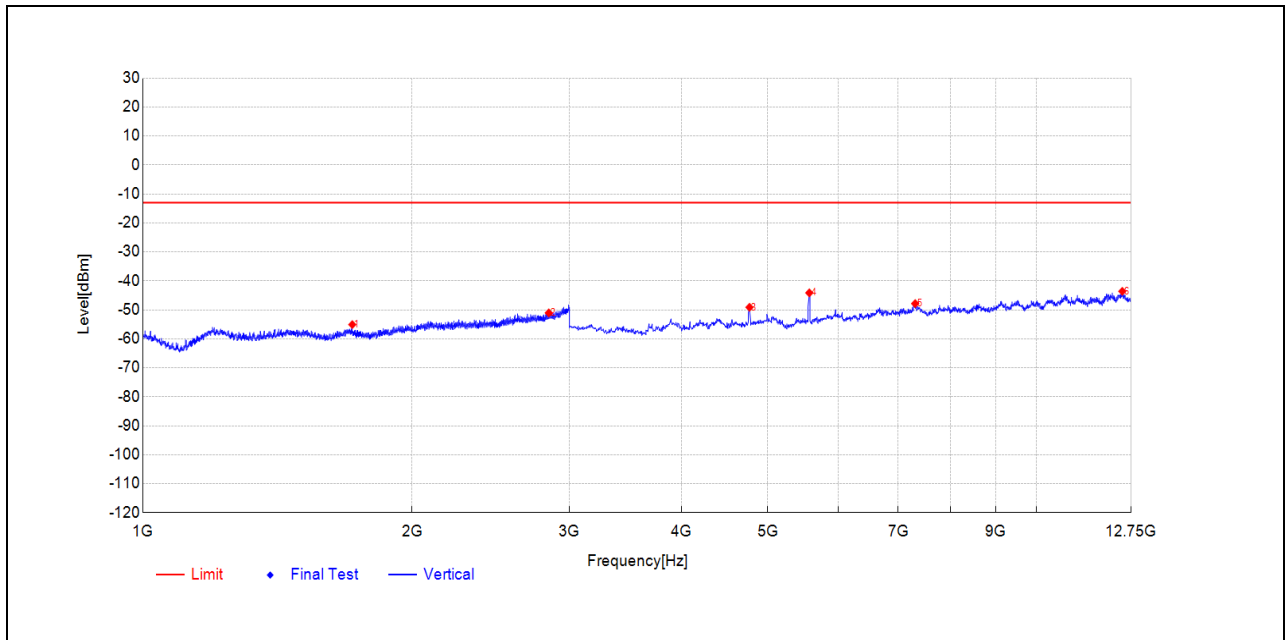

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1714.1428	-56.93	-55.09	1.8	-13.0	42.1	Vertical	PK	PASS
2	2843.9688	-58.95	-51.05	7.9	-13.0	38.1	Vertical	PK	PASS
3	4770.5103	-48.82	-49.12	-0.3	-13.0	36.1	Vertical	PK	PASS
4	5565.5328	-45.54	-44.14	1.4	-13.0	31.1	Vertical	PK	PASS
5	7311.6558	-55.77	-47.84	7.9	-13.0	34.8	Vertical	PK	PASS
6	12467.1086	-57.56	-43.60	14.0	-13.0	30.6	Vertical	PK	PASS


V_LTE_B14_HIGH 5M 1G-12.75G

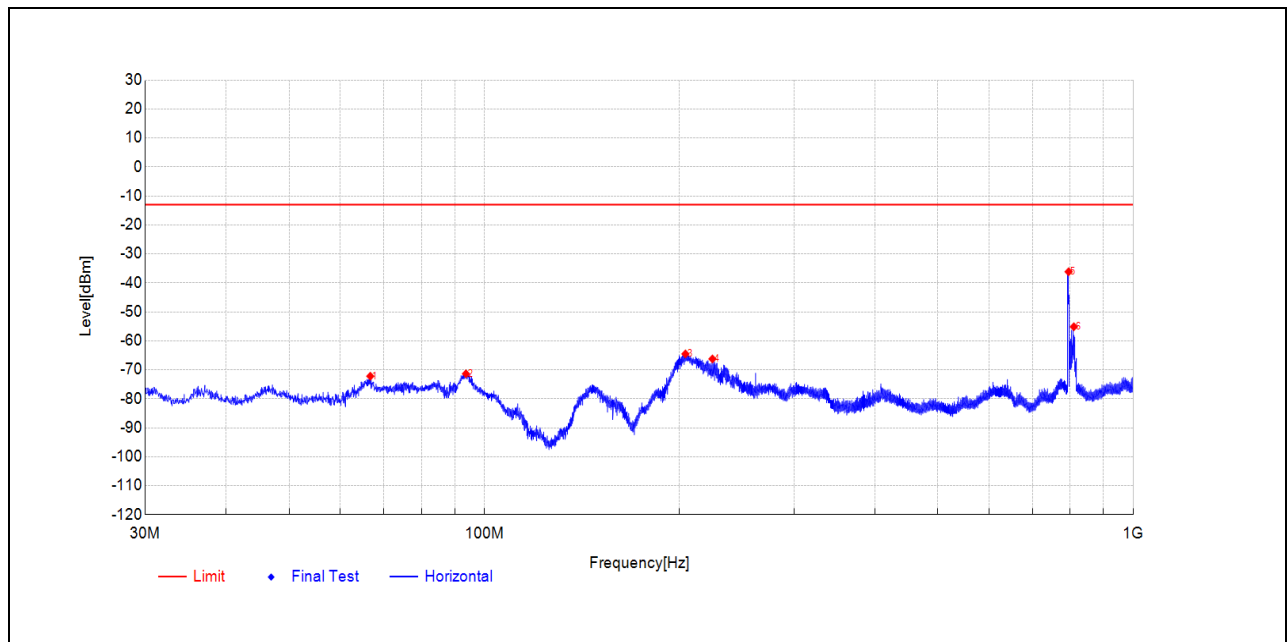

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	66.7163	-53.87	-72.20	-18.3	-13.0	59.2	Horizontal	PK	PASS
2	93.6837	-49.15	-71.35	-22.2	-13.0	58.4	Horizontal	PK	PASS
3	204.1722	-48.18	-64.50	-16.3	-13.0	51.5	Horizontal	PK	PASS
4	224.7372	-57.57	-66.25	-8.7	-13.0	53.3	Horizontal	PK	PASS
5	795.6108	-31.27	-36.16	-4.9	-	-	Horizontal	PK	NA
6	810.598	-49.55	-55.14	-5.6	-	-	Horizontal	PK	NA


H_LTE_B14_HIGH 5M 30M-1G

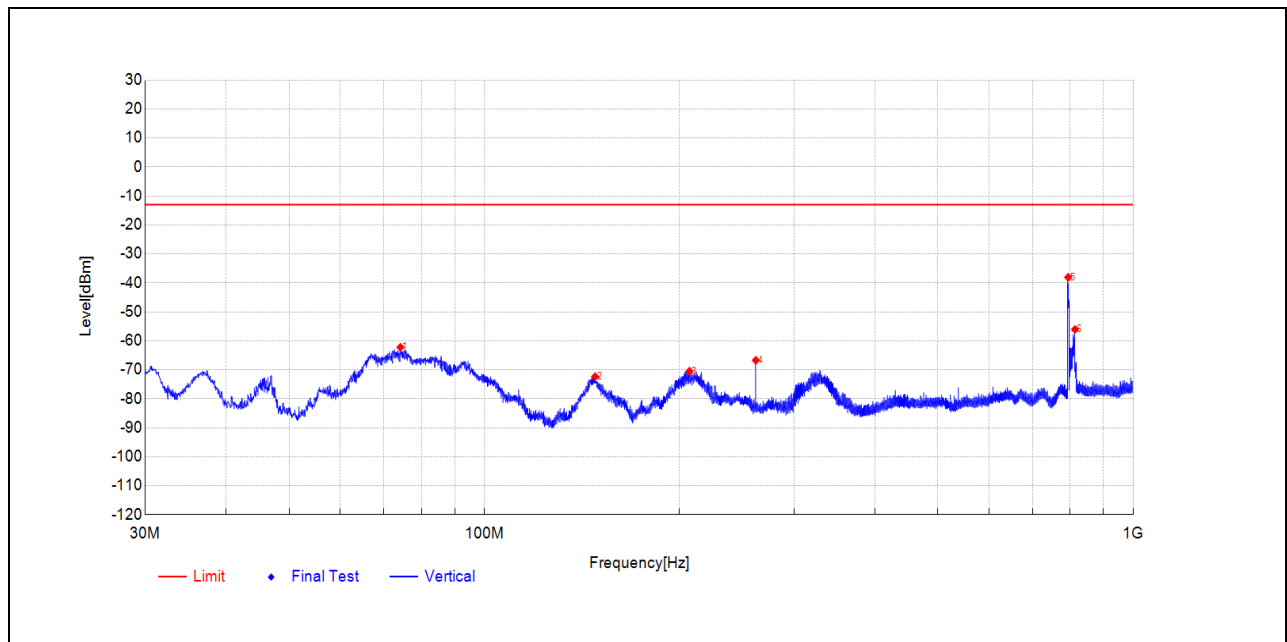

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	74.2342	-40.31	-62.23	-21.9	-13.0	49.2	Vertical	PK	PASS
2	148.1519	-52.78	-72.35	-19.6	-13.0	59.4	Vertical	PK	PASS
3	207.1309	-51.99	-70.48	-18.5	-13.0	57.5	Vertical	PK	PASS
4	262.1326	-48.64	-66.73	-18.1	-13.0	53.7	Vertical	PK	PASS
5	794.3497	-31.56	-38.08	-6.5	-	-	Vertical	PK	NA
6	813.7507	-49.96	-56.07	-6.1	-	-	Vertical	PK	NA


V_LTE_B14_HIGH 5M 30M-1G

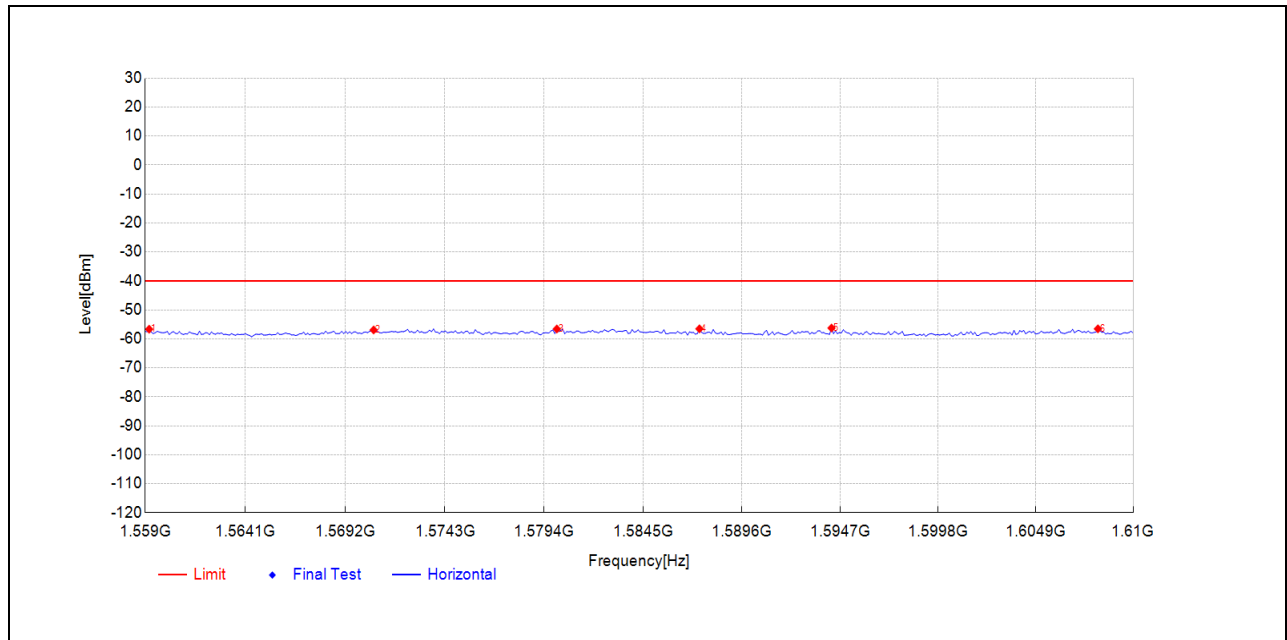

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1559.2044	-57.70	-56.67	1.0	-40.0	16.7	Horizontal	PK	PASS
2	1570.6513	-57.88	-56.93	1.0	-40.0	16.9	Horizontal	PK	PASS
3	1580.0541	-57.47	-56.59	0.9	-40.0	16.6	Horizontal	PK	PASS
4	1587.4128	-57.37	-56.54	0.8	-40.0	16.5	Horizontal	PK	PASS
5	1594.2605	-57.04	-56.26	0.8	-40.0	16.3	Horizontal	PK	PASS
6	1608.1603	-57.34	-56.54	0.8	-40.0	16.5	Horizontal	PK	PASS


H_LTE_B14_HIGH_5M_1559-1610_-40

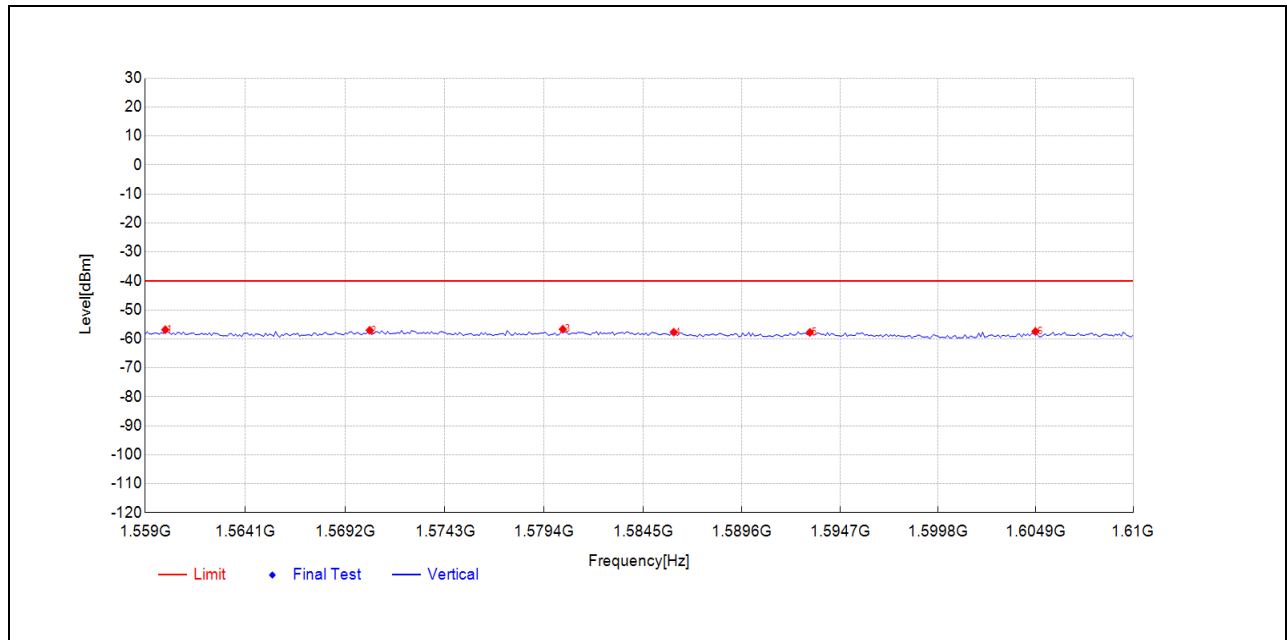

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1560.022	-57.67	-56.85	0.8	-40.0	16.9	Vertical	PK	PASS
2	1570.4469	-57.65	-57.05	0.6	-40.0	17.1	Vertical	PK	PASS
3	1580.3607	-57.05	-56.68	0.4	-40.0	16.7	Vertical	PK	PASS
4	1586.0842	-57.94	-57.69	0.3	-40.0	17.7	Vertical	PK	PASS
5	1593.1363	-57.88	-57.79	0.1	-40.0	17.8	Vertical	PK	PASS
6	1604.8898	-57.46	-57.44	0.0	-40.0	17.4	Vertical	PK	PASS


V_LTE_B14_HIGH_5M_1559-1610_-40

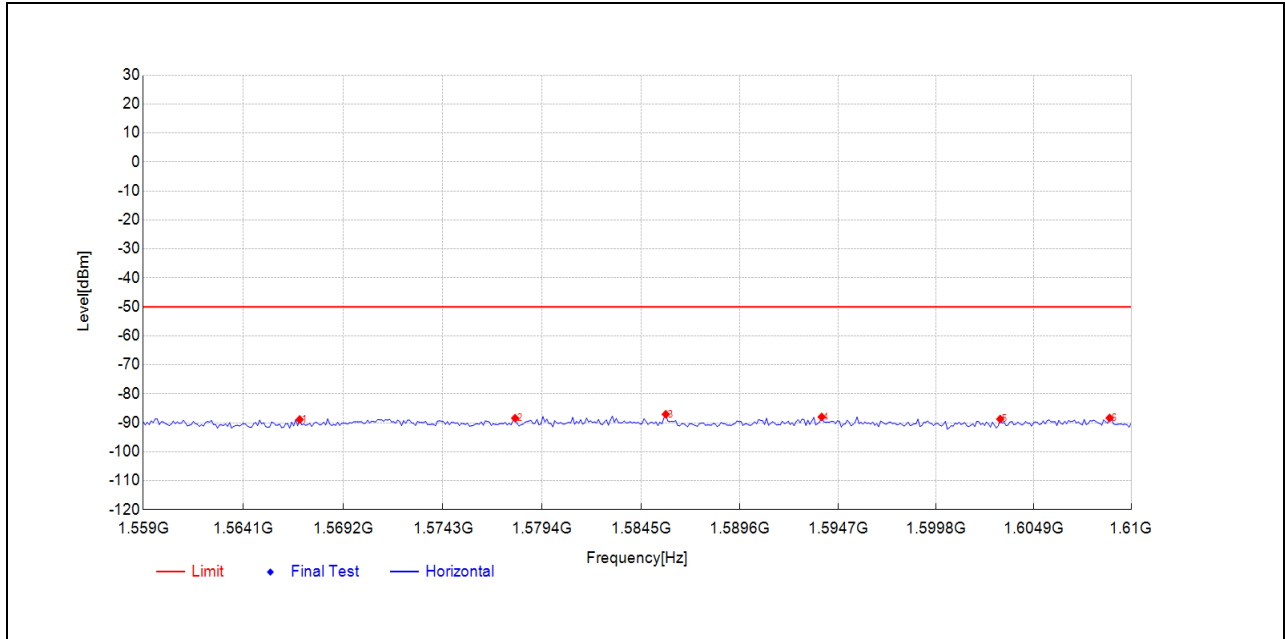

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1566.9719	-89.85	-88.88	1.0	-50.0	38.9	Horizontal	PK	PASS
2	1578.01	-89.31	-88.41	0.9	-50.0	38.4	Horizontal	PK	PASS
3	1585.7776	-87.91	-87.07	0.8	-50.0	37.1	Horizontal	PK	PASS
4	1593.8517	-88.76	-87.98	0.8	-50.0	38.0	Horizontal	PK	PASS
5	1603.1523	-89.50	-88.73	0.8	-50.0	38.7	Horizontal	PK	PASS
6	1608.8758	-89.15	-88.34	0.8	-50.0	38.3	Horizontal	PK	PASS


H_LTE_B14_HIGH_5M_1559-1610_-50

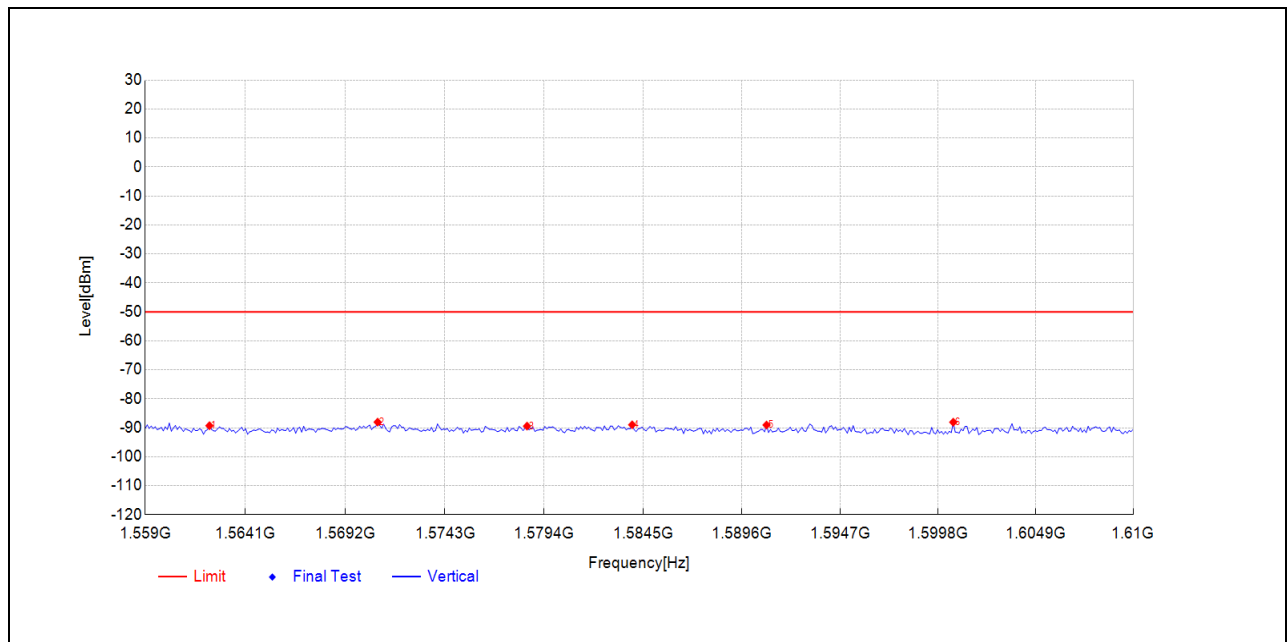

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1562.2705	-90.06	-89.28	0.8	-50.0	39.3	Vertical	PK	PASS
2	1570.8557	-88.64	-88.05	0.6	-50.0	38.1	Vertical	PK	PASS
3	1578.521	-89.83	-89.41	0.4	-50.0	39.4	Vertical	PK	PASS
4	1583.9379	-89.26	-88.96	0.3	-50.0	39.0	Vertical	PK	PASS
5	1590.8878	-89.19	-89.04	0.2	-50.0	39.0	Vertical	PK	PASS
6	1600.5972	-88.02	-88.07	-0.1	-50.0	38.1	Vertical	PK	PASS


V_LTE_B14_HIGH_5M_1559-1610_-50

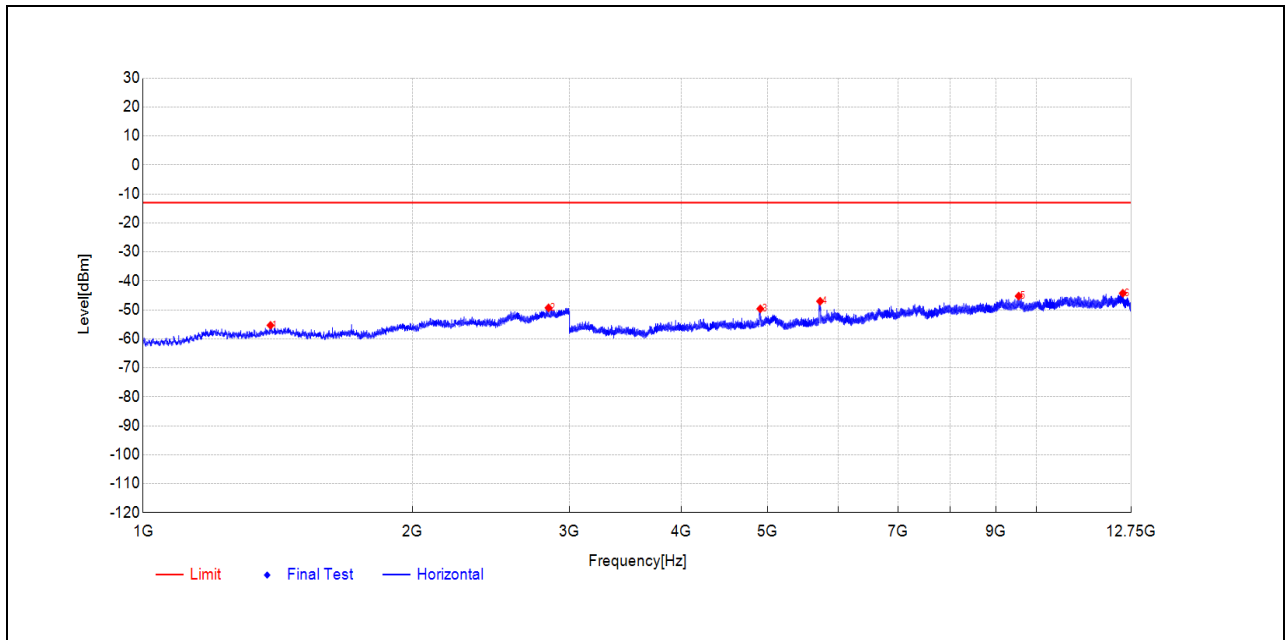

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1388.4777	-57.60	-55.34	2.3	-13.0	42.3	Horizontal	PK	PASS
2	2842.3685	-58.19	-49.30	8.9	-13.0	36.3	Horizontal	PK	PASS
3	4905.2453	-50.54	-49.65	0.9	-13.0	36.7	Horizontal	PK	PASS
4	5722.8236	-49.83	-47.04	2.8	-13.0	34.0	Horizontal	PK	PASS
5	9545.9898	-55.12	-45.26	9.9	-13.0	32.3	Horizontal	PK	PASS
6	12482.8366	-58.84	-44.28	14.6	-13.0	31.3	Horizontal	PK	PASS


H_LTE_B18_LOW 5M 1G-12.75G

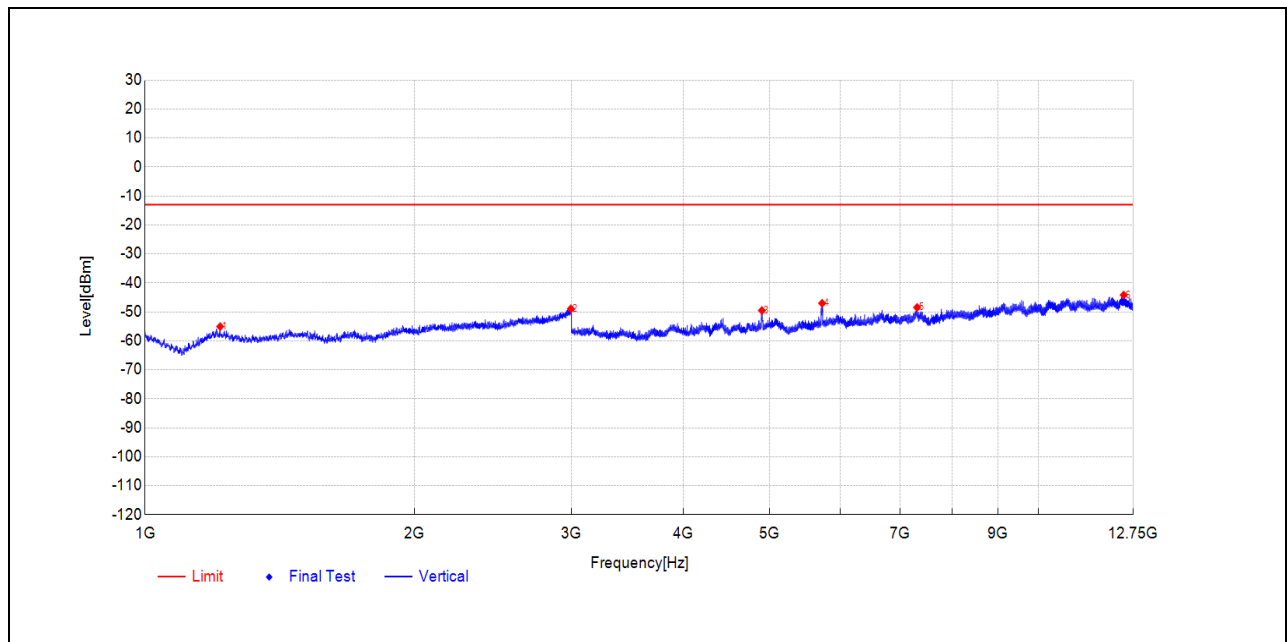

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1213.2426	-56.87	-55.09	1.8	-13.0	42.1	Vertical	PK	PASS
2	2995.199	-59.83	-48.94	10.9	-13.0	35.9	Vertical	PK	PASS
3	4899.8825	-49.66	-49.52	0.1	-13.0	36.5	Vertical	PK	PASS
4	5722.3361	-49.49	-47.04	2.5	-13.0	34.0	Vertical	PK	PASS
5	7308.7404	-56.44	-48.47	8.0	-13.0	35.5	Vertical	PK	PASS
6	12446.2723	-58.18	-44.18	14.0	-13.0	31.2	Vertical	PK	PASS


V_LTE_B18_LOW 5M 1G-12.75G

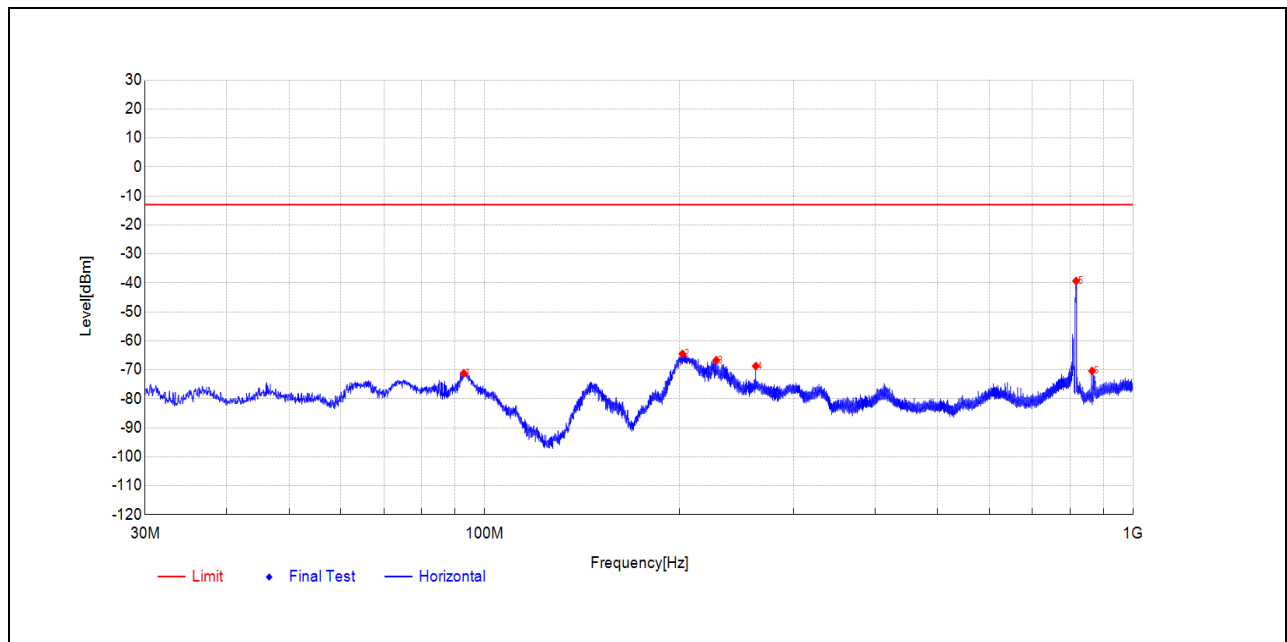

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	92.9561	-49.03	-71.20	-22.2	-13.0	58.2	Horizontal	PK	PASS
2	202.0866	-47.15	-64.50	-17.4	-13.0	51.5	Horizontal	PK	PASS
3	227.7929	-59.23	-66.66	-7.4	-13.0	53.7	Horizontal	PK	PASS
4	262.1326	-53.86	-68.69	-14.8	-13.0	55.7	Horizontal	PK	PASS
5	817.1944	-34.06	-39.35	-5.3	-	-	Horizontal	PK	NA
6	864.6297	-62.40	-70.39	-8.0	-	-	Horizontal	PK	NA


H_LTE_B18_LOW 5M 30M-1G

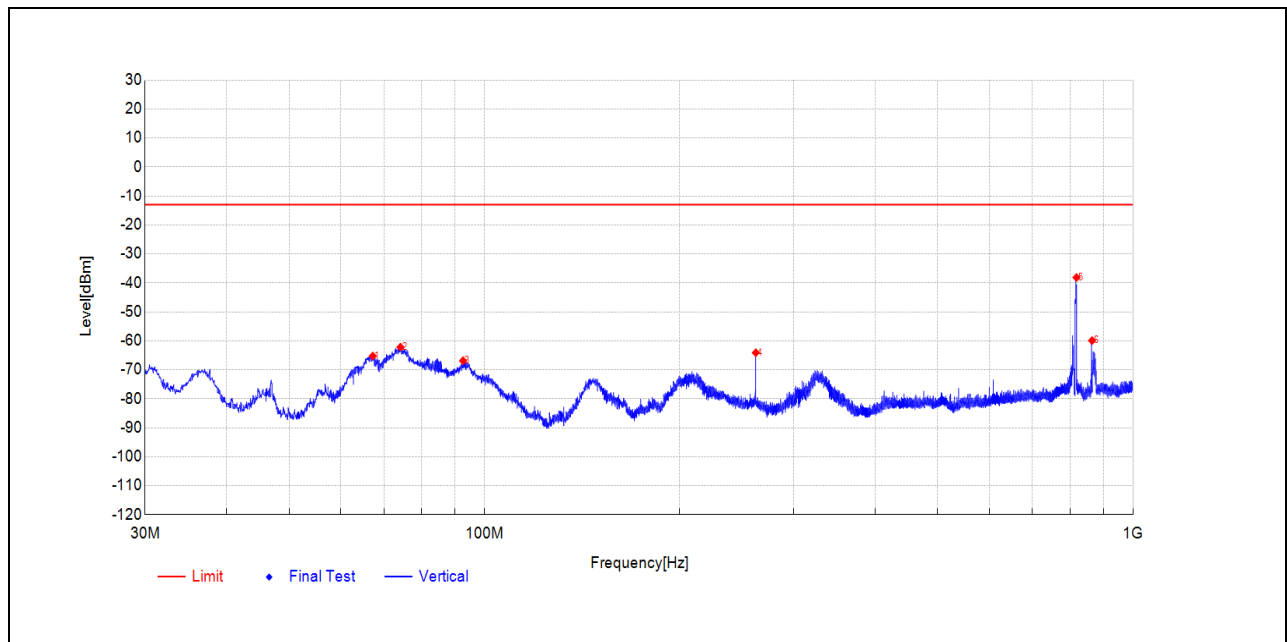

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	67.2984	-43.98	-65.24	-21.3	-13.0	52.2	Vertical	PK	PASS
2	74.2342	-40.30	-62.17	-21.9	-13.0	49.2	Vertical	PK	PASS
3	92.7136	-47.15	-66.87	-19.7	-13.0	53.9	Vertical	PK	PASS
4	262.0841	-45.98	-64.11	-18.1	-13.0	51.1	Vertical	PK	PASS
5	818.1159	-32.64	-38.14	-5.5	-	-	Vertical	PK	NA
6	864.6782	-53.54	-59.91	-6.4	-	-	Vertical	PK	NA


V_LTE_B18_LOW 5M 30M-1G

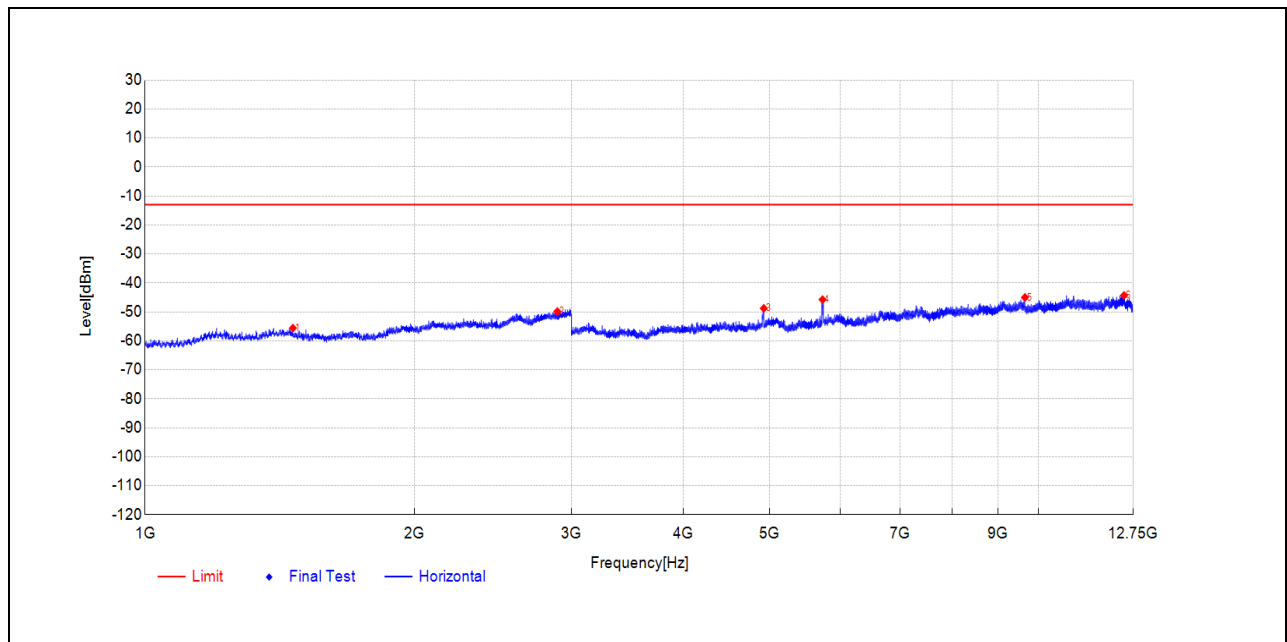

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1463.2927	-57.63	-55.60	2.0	-13.0	42.6	Horizontal	PK	PASS
2	2892.3785	-58.92	-49.89	9.0	-13.0	36.9	Horizontal	PK	PASS
3	4923.7712	-49.75	-48.79	1.0	-13.0	35.8	Horizontal	PK	PASS
4	5728.6739	-48.65	-45.77	2.9	-13.0	32.8	Horizontal	PK	PASS
5	9651.2951	-54.83	-45.03	9.8	-13.0	32.0	Horizontal	PK	PASS
6	12456.0228	-59.01	-44.32	14.7	-13.0	31.3	Horizontal	PK	PASS


H_LTE_B18_MID 5M 1G-12.75G

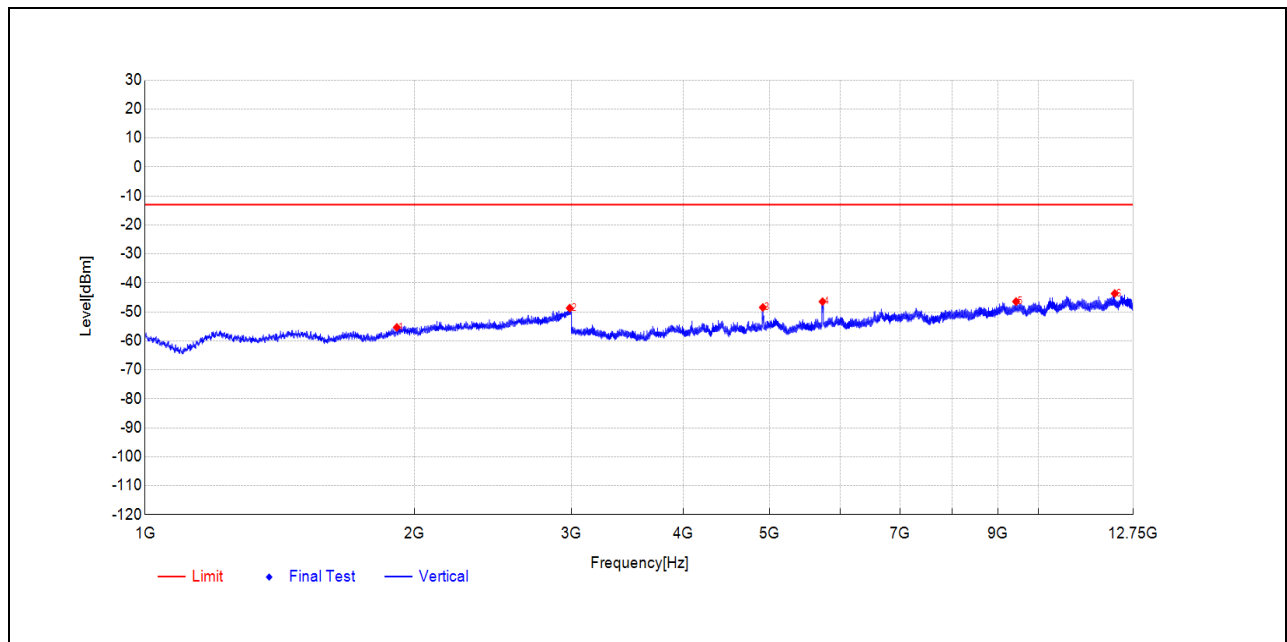

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1912.5825	-57.74	-55.34	2.4	-13.0	42.3	Vertical	PK	PASS
2	2986.3973	-59.32	-48.71	10.6	-13.0	35.7	Vertical	PK	PASS
3	4912.0706	-48.67	-48.47	0.2	-13.0	35.5	Vertical	PK	PASS
4	5728.6739	-49.00	-46.47	2.5	-13.0	33.5	Vertical	PK	PASS
5	9432.3966	-55.44	-46.47	9.0	-13.0	33.5	Vertical	PK	PASS
6	12163.5082	-56.82	-43.67	13.2	-13.0	30.7	Vertical	PK	PASS


V_LTE_B18_MID 5M 1G-12.75G

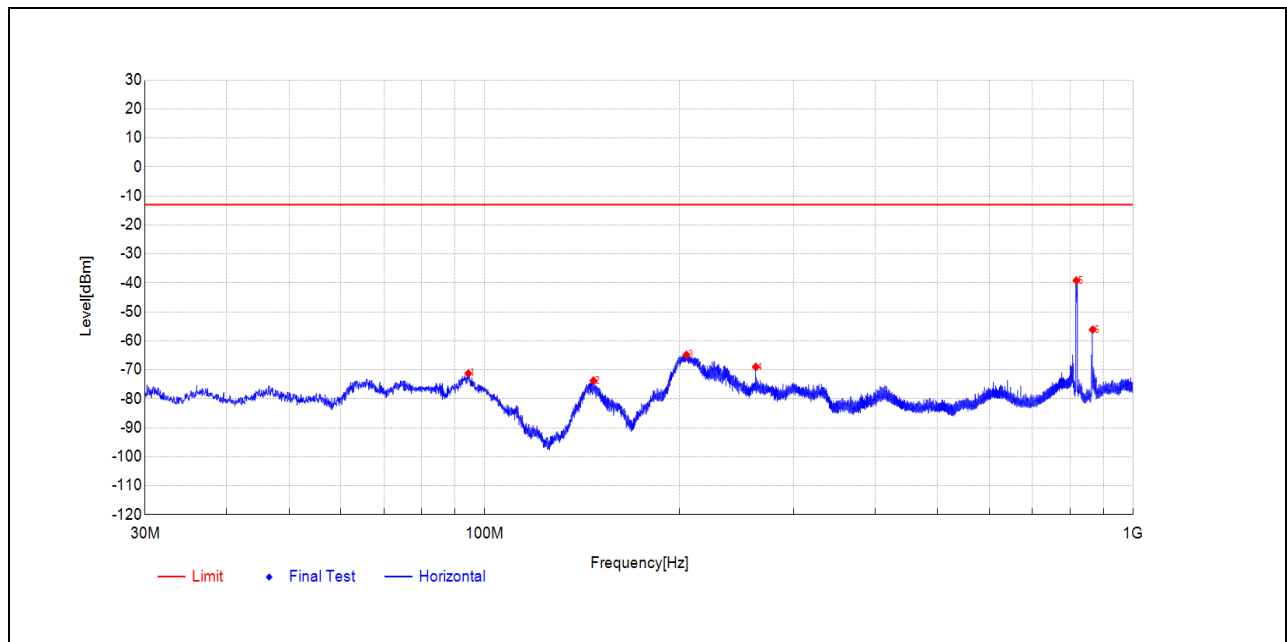

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	94.4597	-48.99	-71.28	-22.3	-13.0	58.3	Horizontal	PK	PASS
2	147.2789	-47.17	-73.74	-26.6	-13.0	60.7	Horizontal	PK	PASS
3	204.8997	-48.24	-64.86	-16.6	-13.0	51.9	Horizontal	PK	PASS
4	262.1326	-54.16	-68.99	-14.8	-13.0	56.0	Horizontal	PK	PASS
5	817.9219	-33.88	-39.20	-5.3	-	-	Horizontal	PK	NA
6	866.5213	-48.12	-56.13	-8.0	-	-	Horizontal	PK	NA


H_LTE_B18_MID 5M 30M-1G

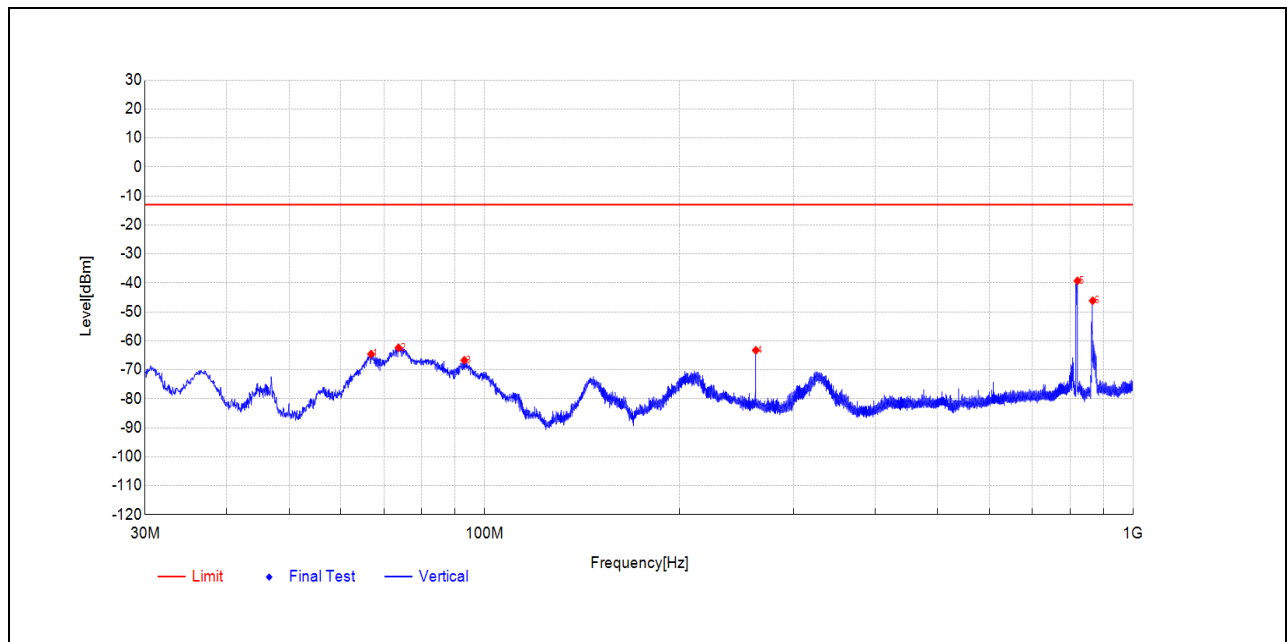

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	66.9103	-43.44	-64.55	-21.1	-13.0	51.6	Vertical	PK	PASS
2	73.7492	-40.45	-62.37	-21.9	-13.0	49.4	Vertical	PK	PASS
3	93.1502	-47.05	-66.69	-19.6	-13.0	53.7	Vertical	PK	PASS
4	262.1326	-45.14	-63.27	-18.1	-13.0	50.3	Vertical	PK	PASS
5	821.0746	-33.86	-39.28	-5.4	-	-	Vertical	PK	NA
6	866.6183	-39.81	-46.16	-6.4	-	-	Vertical	PK	NA


V_LTE_B18_MID 5M 30M-1G

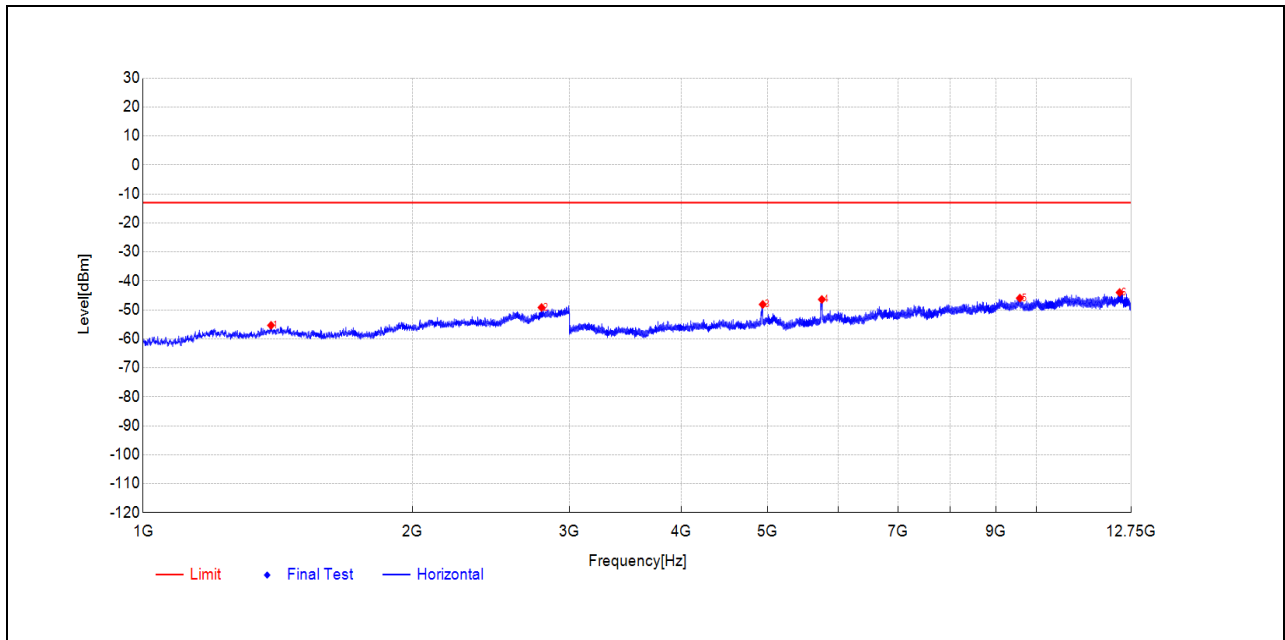

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1390.4781	-57.68	-55.35	2.3	-13.0	42.4	Horizontal	PK	PASS
2	2791.5583	-57.58	-49.19	8.4	-13.0	36.2	Horizontal	PK	PASS
3	4935.9593	-49.13	-48.13	1.0	-13.0	35.1	Horizontal	PK	PASS
4	5748.1749	-49.59	-46.42	3.2	-13.0	33.4	Horizontal	PK	PASS
5	9574.2662	-55.70	-45.95	9.8	-13.0	33.0	Horizontal	PK	PASS
6	12381.4316	-58.79	-44.02	14.8	-13.0	31.0	Horizontal	PK	PASS


H_LTE_B18_HIGH 5M 1G-12.75G

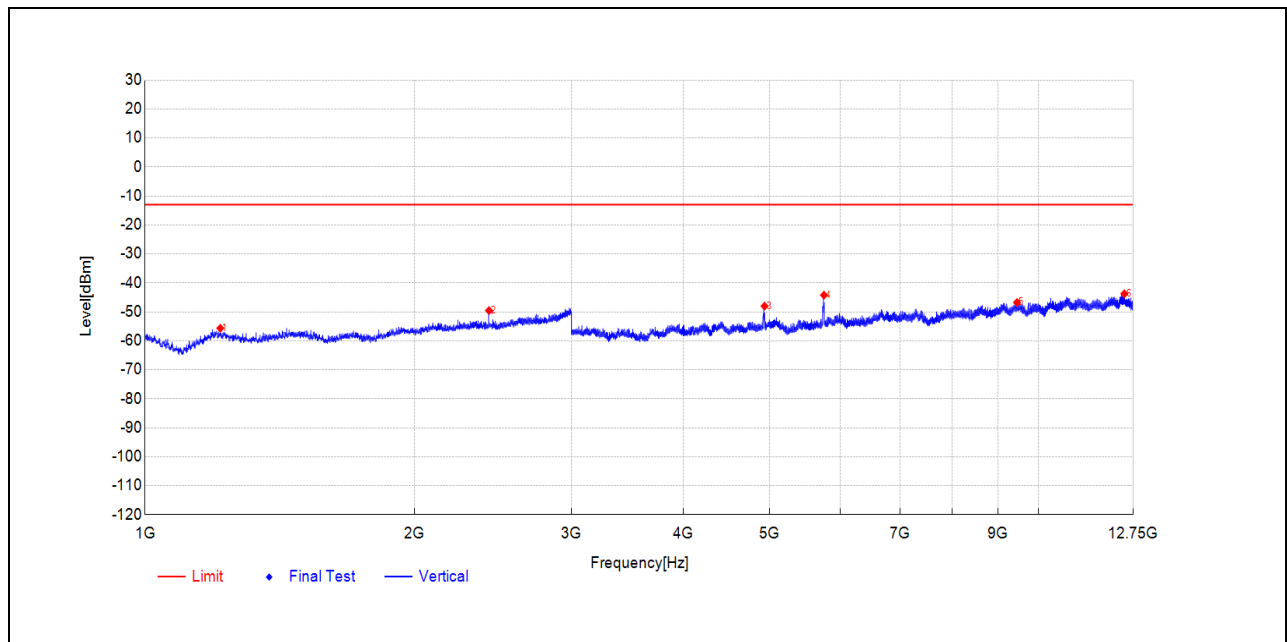

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	1213.6427	-57.43	-55.66	1.8	-13.0	42.7	Vertical	PK	PASS
2	2425.4851	-54.11	-49.56	4.6	-13.0	36.6	Vertical	PK	PASS
3	4933.5217	-48.31	-48.01	0.3	-13.0	35.0	Vertical	PK	PASS
4	5750.125	-47.01	-44.23	2.8	-13.0	31.2	Vertical	PK	PASS
5	9455.3103	-55.74	-46.76	9.0	-13.0	33.8	Vertical	PK	PASS
6	12469.186	-57.72	-43.77	14.0	-13.0	30.8	Vertical	PK	PASS


V_LTE_B18_HIGH 5M 1G-12.75G

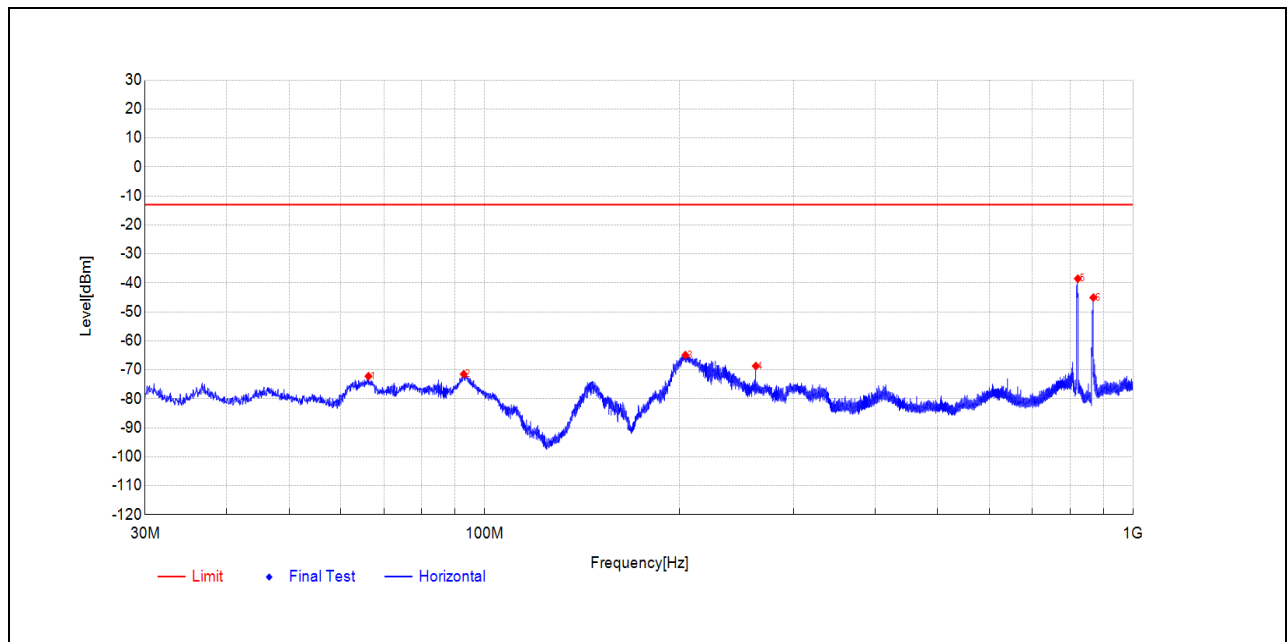

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	66.2798	-54.13	-72.21	-18.1	-13.0	59.2	Horizontal	PK	PASS
2	92.9561	-49.34	-71.51	-22.2	-13.0	58.5	Horizontal	PK	PASS
3	204.1237	-48.10	-64.92	-16.8	-13.0	51.9	Horizontal	PK	PASS
4	262.1326	-53.86	-68.69	-14.8	-13.0	55.7	Horizontal	PK	PASS
5	822.0446	-33.10	-38.55	-5.5	-	-	Horizontal	PK	NA
6	868.6069	-37.03	-45.07	-8.0	-	-	Horizontal	PK	NA


H_LTE_B18_HIGH 5M 30M-1G

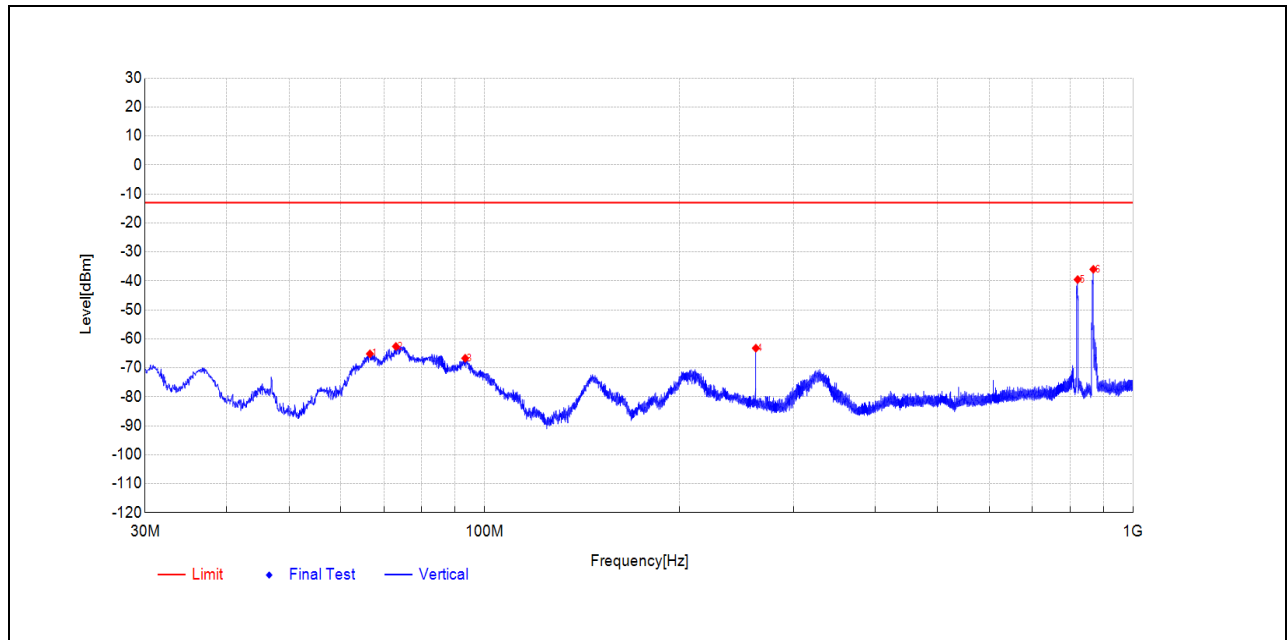

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	66.6193	-44.17	-65.17	-21.0	-13.0	52.2	Vertical	PK	PASS
2	73.0702	-40.65	-62.63	-22.0	-13.0	49.6	Vertical	PK	PASS
3	93.4412	-47.11	-66.70	-19.6	-13.0	53.7	Vertical	PK	PASS
4	262.1326	-45.09	-63.22	-18.1	-13.0	50.2	Vertical	PK	PASS
5	821.5596	-34.14	-39.54	-5.4	-	-	Vertical	PK	NA
6	868.7039	-29.68	-36.02	-6.3	-	-	Vertical	PK	NA


V_LTE_B18_HIGH 5M 30M-1G

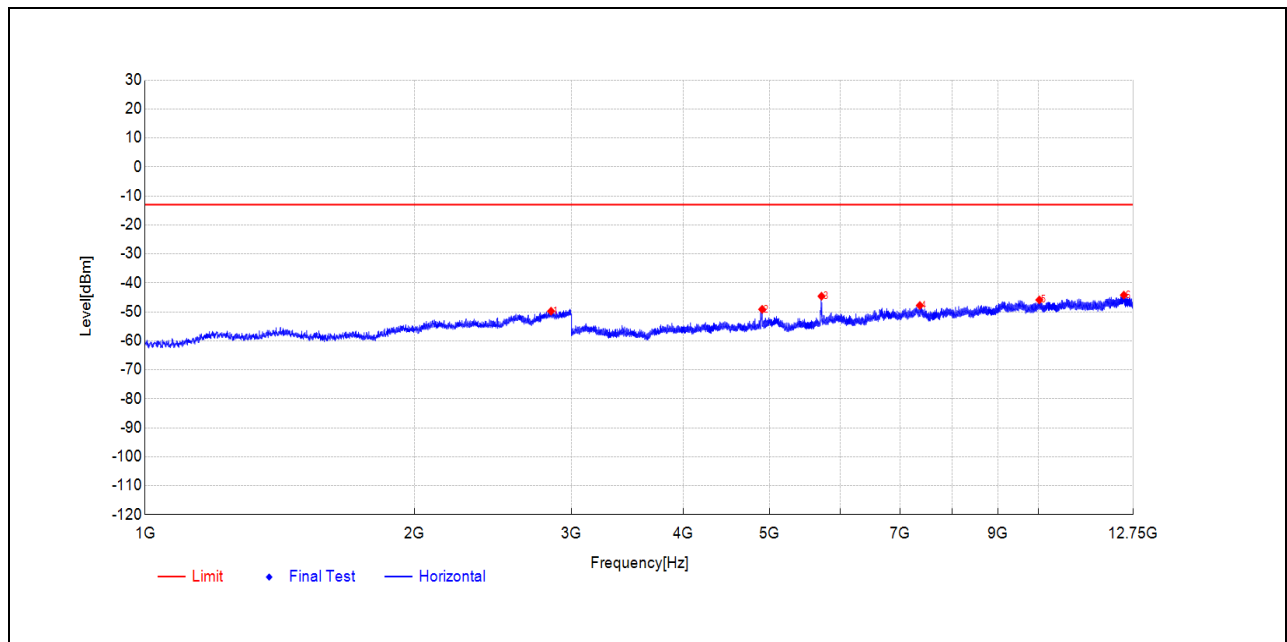

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	2845.9692	-58.69	-49.77	8.9	-13.0	36.8	Horizontal	PK	PASS
2	4903.2952	-50.03	-49.14	0.9	-13.0	36.1	Horizontal	PK	PASS
3	5714.0482	-47.28	-44.61	2.7	-13.0	31.6	Horizontal	PK	PASS
4	7361.3931	-55.22	-47.80	7.4	-13.0	34.8	Horizontal	PK	PASS
5	10015.4758	-56.13	-45.88	10.3	-13.0	32.9	Horizontal	PK	PASS
6	12452.6101	-58.94	-44.23	14.7	-13.0	31.2	Horizontal	PK	PASS


H_LTE_B26_LOW 5M 1G-12.75G

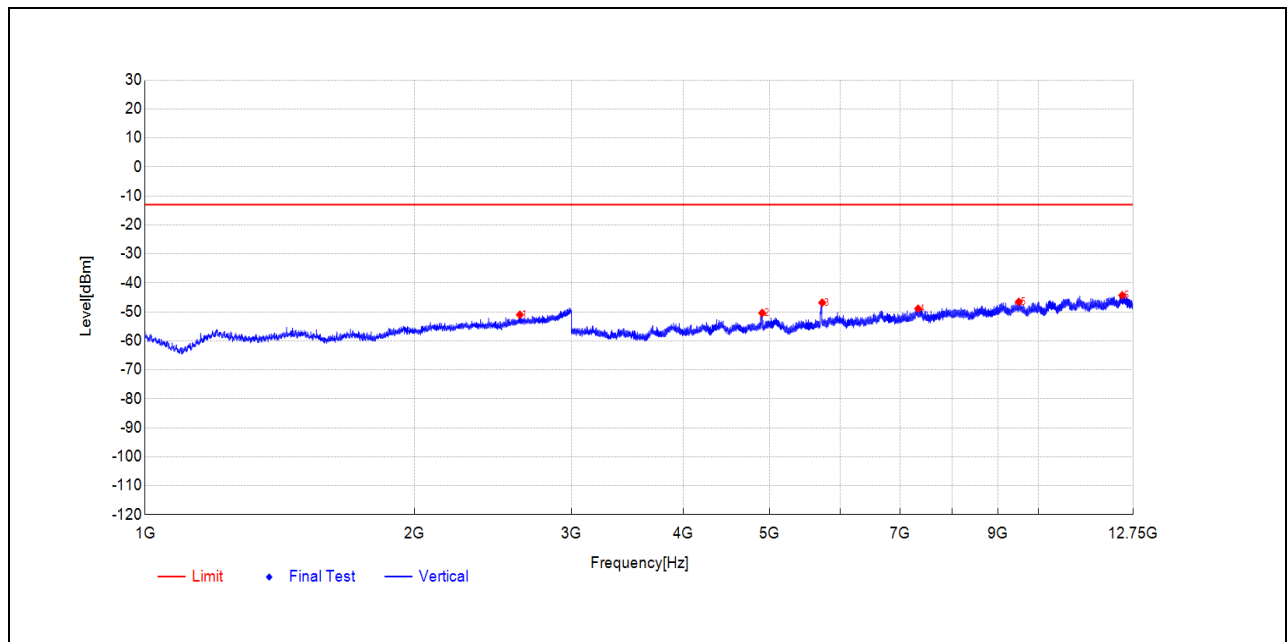

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	2626.3253	-57.33	-51.02	6.3	-13.0	38.0	Vertical	PK	PASS
2	4903.7827	-50.55	-50.40	0.2	-13.0	37.4	Vertical	PK	PASS
3	5723.3112	-49.29	-46.83	2.5	-13.0	33.8	Vertical	PK	PASS
4	7328.2414	-56.59	-48.91	7.7	-13.0	35.9	Vertical	PK	PASS
5	9500.65	-55.61	-46.56	9.1	-13.0	33.6	Vertical	PK	PASS
6	12399.47	-58.42	-44.31	14.1	-13.0	31.3	Vertical	PK	PASS


V_LTE_B26_LOW 5M 1G-12.75G

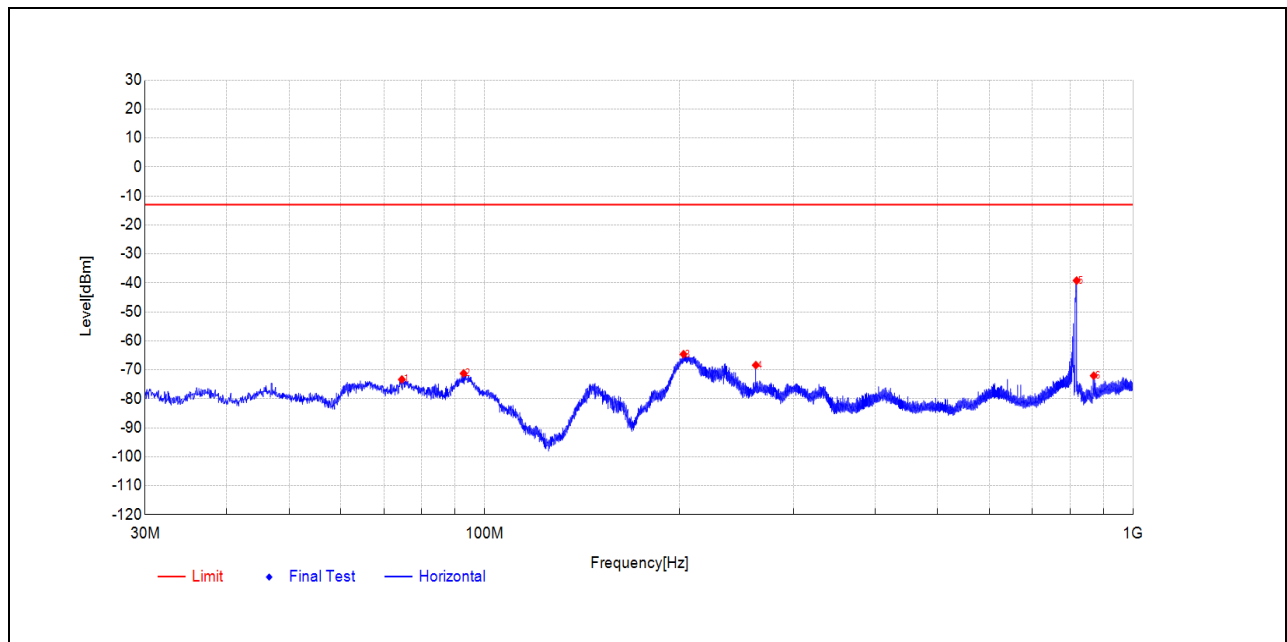

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	74.6222	-52.58	-73.34	-20.8	-13.0	60.3	Horizontal	PK	PASS
2	92.9076	-49.08	-71.24	-22.2	-13.0	58.2	Horizontal	PK	PASS
3	202.8141	-47.46	-64.62	-17.2	-13.0	51.6	Horizontal	PK	PASS
4	262.1326	-53.56	-68.39	-14.8	-13.0	55.4	Horizontal	PK	PASS
5	818.6009	-33.87	-39.21	-5.3	-	-	Horizontal	PK	NA
6	869.9165	-63.98	-72.03	-8.1	-	-	Horizontal	PK	NA


H_LTE_B26_LOW 5M 30M-1G

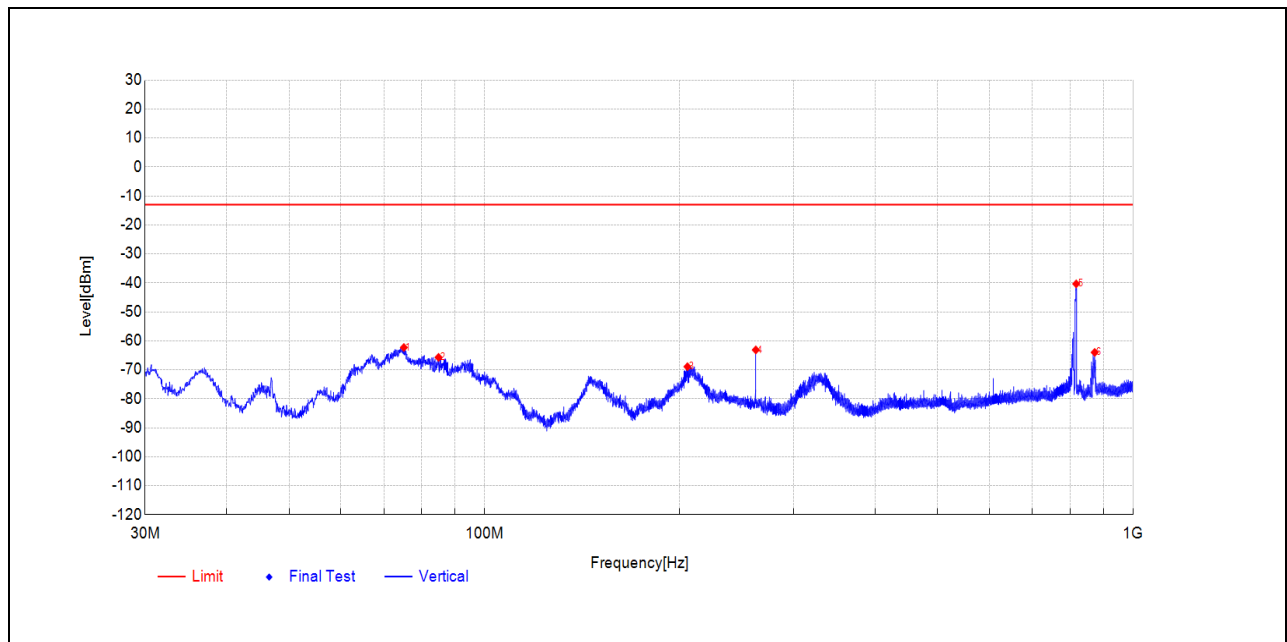

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	75.1558	-40.50	-62.28	-21.8	-13.0	49.3	Vertical	PK	PASS
2	85.0018	-44.98	-65.70	-20.7	-13.0	52.7	Vertical	PK	PASS
3	205.6273	-49.94	-68.91	-19.0	-13.0	55.9	Vertical	PK	PASS
4	262.1326	-45.00	-63.13	-18.1	-13.0	50.1	Vertical	PK	PASS
5	817.3884	-34.80	-40.33	-5.5	-	-	Vertical	PK	NA
6	872.7781	-57.75	-63.99	-6.2	-	-	Vertical	PK	NA


V_LTE_B26_LOW 5M 30M-1G

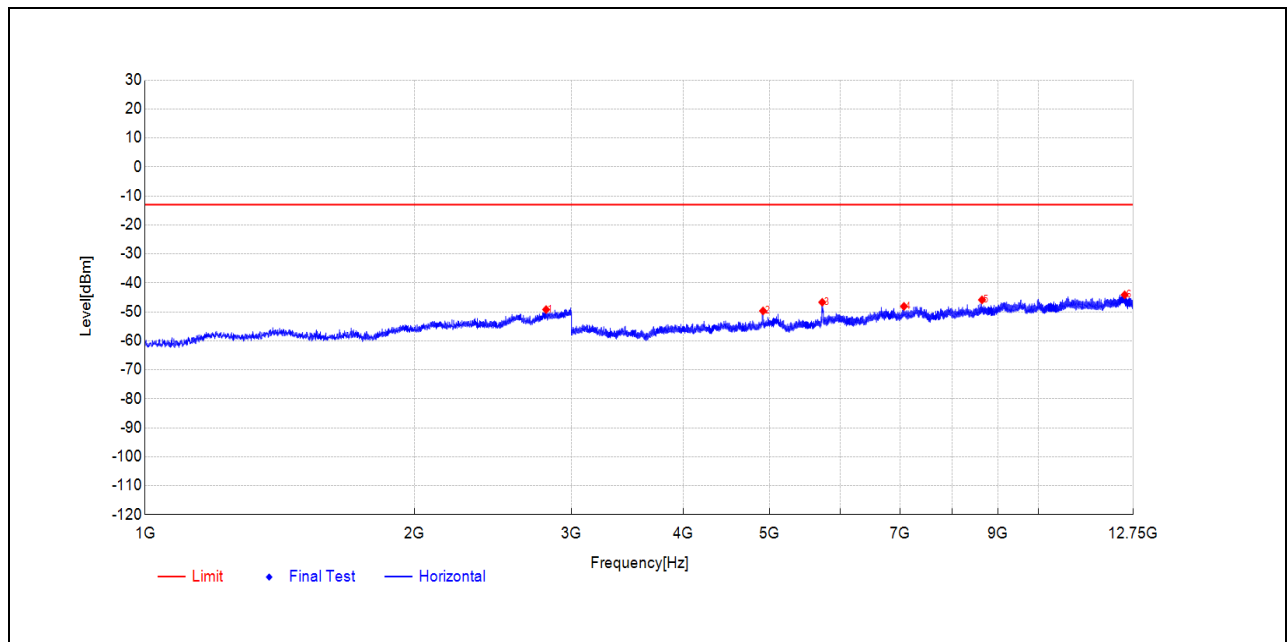

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	2810.3621	-57.90	-49.22	8.7	-13.0	36.2	Horizontal	PK	PASS
2	4914.0207	-50.60	-49.68	0.9	-13.0	36.7	Horizontal	PK	PASS
3	5724.2862	-49.50	-46.68	2.8	-13.0	33.7	Horizontal	PK	PASS
4	7065.9533	-54.27	-48.10	6.2	-13.0	35.1	Horizontal	PK	PASS
5	8639.682	-53.44	-45.86	7.6	-13.0	32.9	Horizontal	PK	PASS
6	12479.9115	-58.71	-44.14	14.6	-13.0	31.1	Horizontal	PK	PASS


H_LTE_B26_MID 5M 1G-12.75G

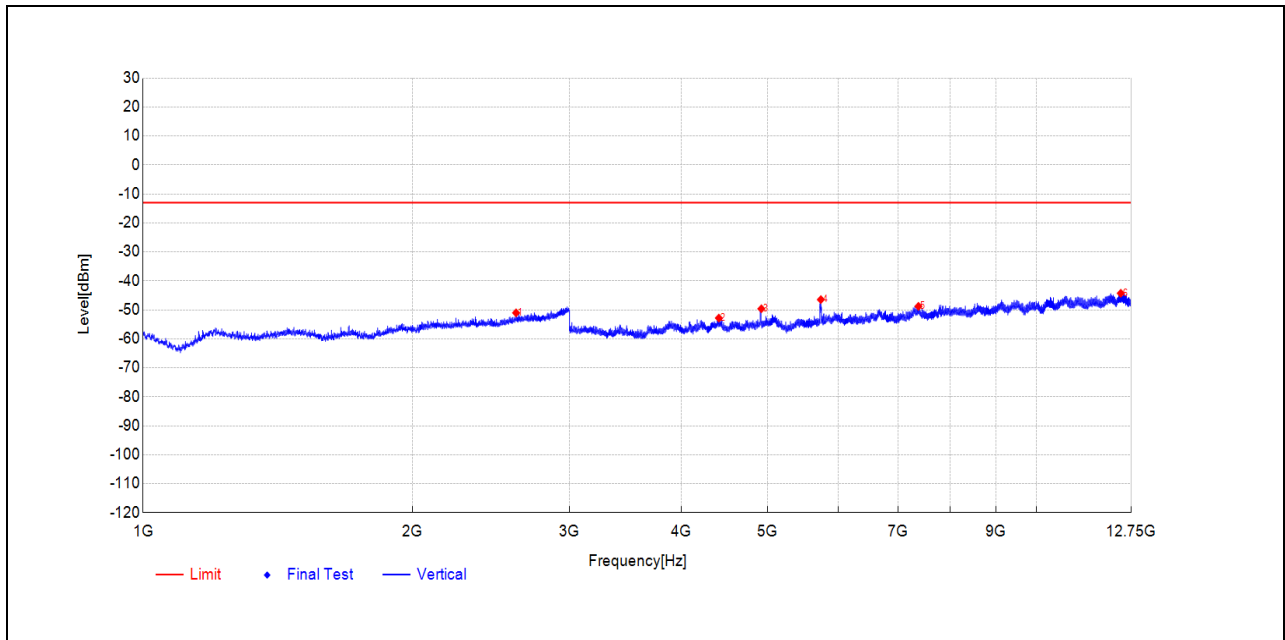

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	2614.3229	-57.18	-51.03	6.2	-13.0	38.0	Vertical	PK	PASS
2	4408.4579	-52.73	-52.83	-0.1	-13.0	39.8	Vertical	PK	PASS
3	4918.4084	-49.84	-49.61	0.2	-13.0	36.6	Vertical	PK	PASS
4	5733.0617	-49.04	-46.46	2.6	-13.0	33.5	Vertical	PK	PASS
5	7372.1186	-55.95	-48.79	7.2	-13.0	35.8	Vertical	PK	PASS
6	12417.5084	-58.34	-44.27	14.1	-13.0	31.3	Vertical	PK	PASS


V_LTE_B26_MID 5M 1G-12.75G

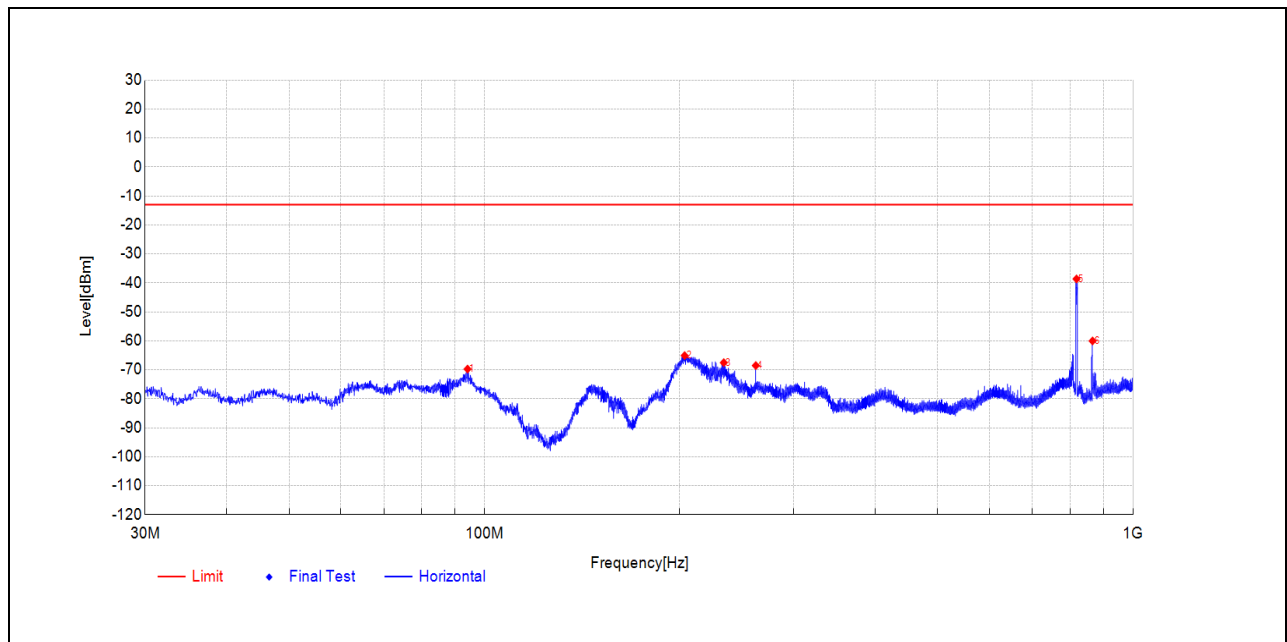

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	94.2172	-47.47	-69.74	-22.3	-13.0	56.7	Horizontal	PK	PASS
2	203.5902	-48.12	-65.08	-17.0	-13.0	52.1	Horizontal	PK	PASS
3	233.9527	-59.60	-67.51	-7.9	-13.0	54.5	Horizontal	PK	PASS
4	262.1326	-53.70	-68.53	-14.8	-13.0	55.5	Horizontal	PK	PASS
5	818.1644	-33.31	-38.64	-5.3	-	-	Horizontal	PK	NA
6	866.2303	-52.02	-60.03	-8.0	-	-	Horizontal	PK	NA


H_LTE_B26_MID 5M 30M-1G

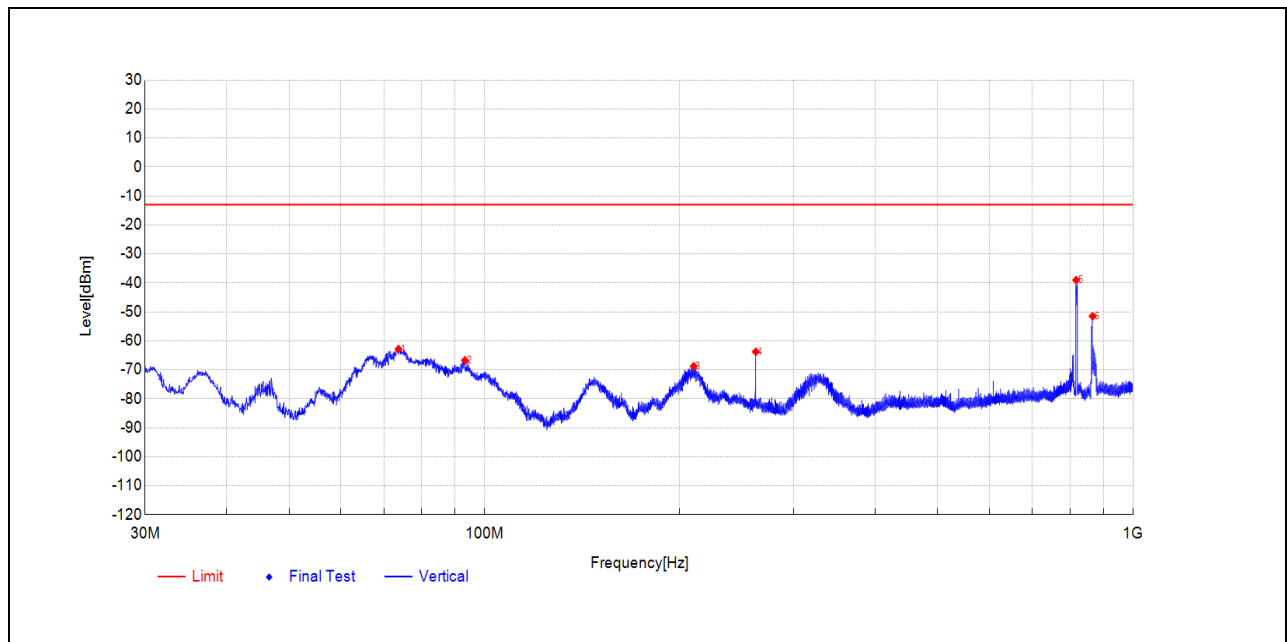

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	73.7492	-40.92	-62.84	-21.9	-13.0	49.8	Vertical	PK	PASS
2	93.3442	-47.12	-66.72	-19.6	-13.0	53.7	Vertical	PK	PASS
3	210.235	-49.93	-68.76	-18.8	-13.0	55.8	Vertical	PK	PASS
4	262.1326	-45.64	-63.77	-18.1	-13.0	50.8	Vertical	PK	PASS
5	817.2914	-33.49	-39.02	-5.5	-	-	Vertical	PK	NA
6	866.1818	-45.13	-51.49	-6.4	-	-	Vertical	PK	NA


V_LTE_B26_MID 5M 30M-1G

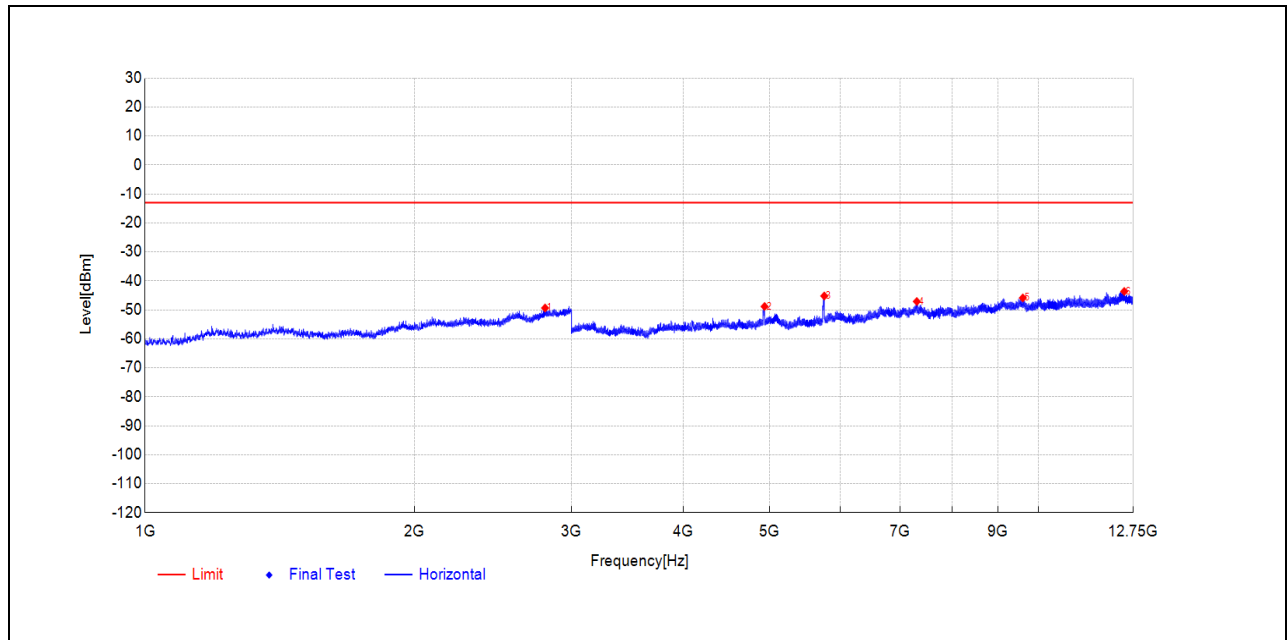

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	2802.7606	-57.98	-49.35	8.6	-13.0	36.4	Horizontal	PK	PASS
2	4934.0092	-49.82	-48.83	1.0	-13.0	35.8	Horizontal	PK	PASS
3	5754.0252	-48.41	-45.21	3.2	-13.0	32.2	Horizontal	PK	PASS
4	7303.8652	-55.17	-47.12	8.1	-13.0	34.1	Horizontal	PK	PASS
5	9598.1549	-55.47	-45.87	9.6	-13.0	32.9	Horizontal	PK	PASS
6	12464.7982	-58.30	-43.65	14.7	-13.0	30.7	Horizontal	PK	PASS


H_LTE_B26_HIGH 5M 1G-12.75G

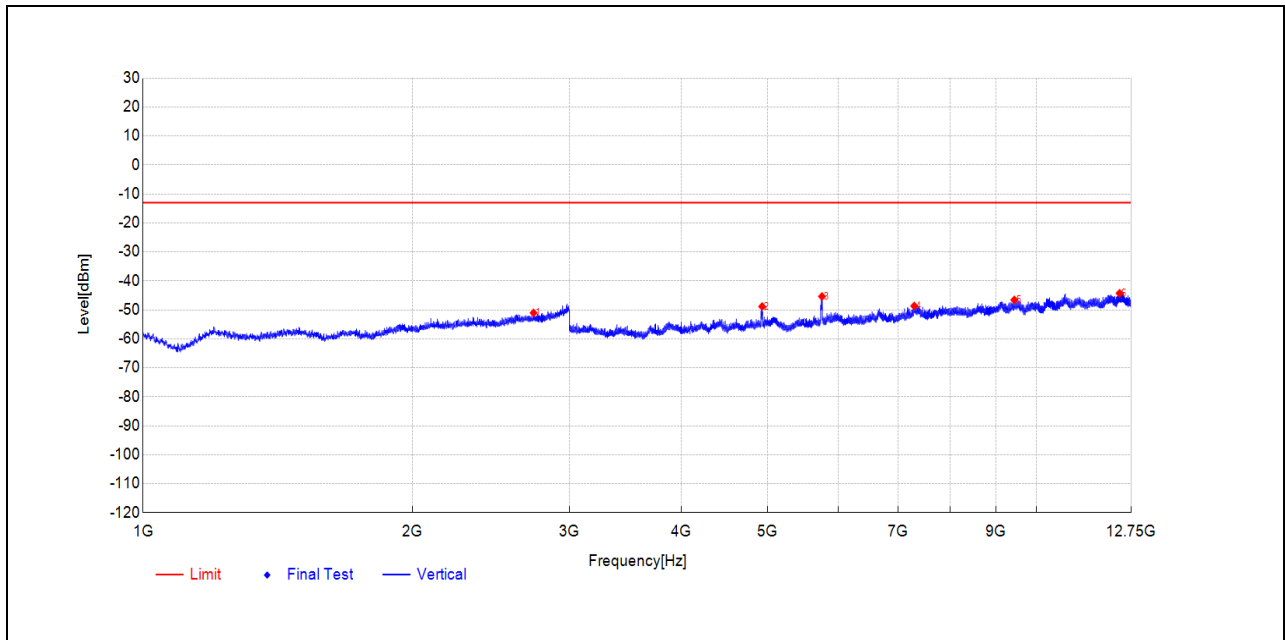

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	2734.7469	-57.89	-51.04	6.9	-13.0	38.0	Vertical	PK	PASS
2	4928.6464	-49.12	-48.84	0.3	-13.0	35.8	Vertical	PK	PASS
3	5750.125	-48.16	-45.38	2.8	-13.0	32.4	Vertical	PK	PASS
4	7293.6272	-56.54	-48.65	7.9	-13.0	35.7	Vertical	PK	PASS
5	9440.197	-55.55	-46.58	9.0	-13.0	33.6	Vertical	PK	PASS
6	12379.969	-58.12	-44.29	13.8	-13.0	31.3	Vertical	PK	PASS


V_LTE_B26_HIGH 5M 1G-12.75G

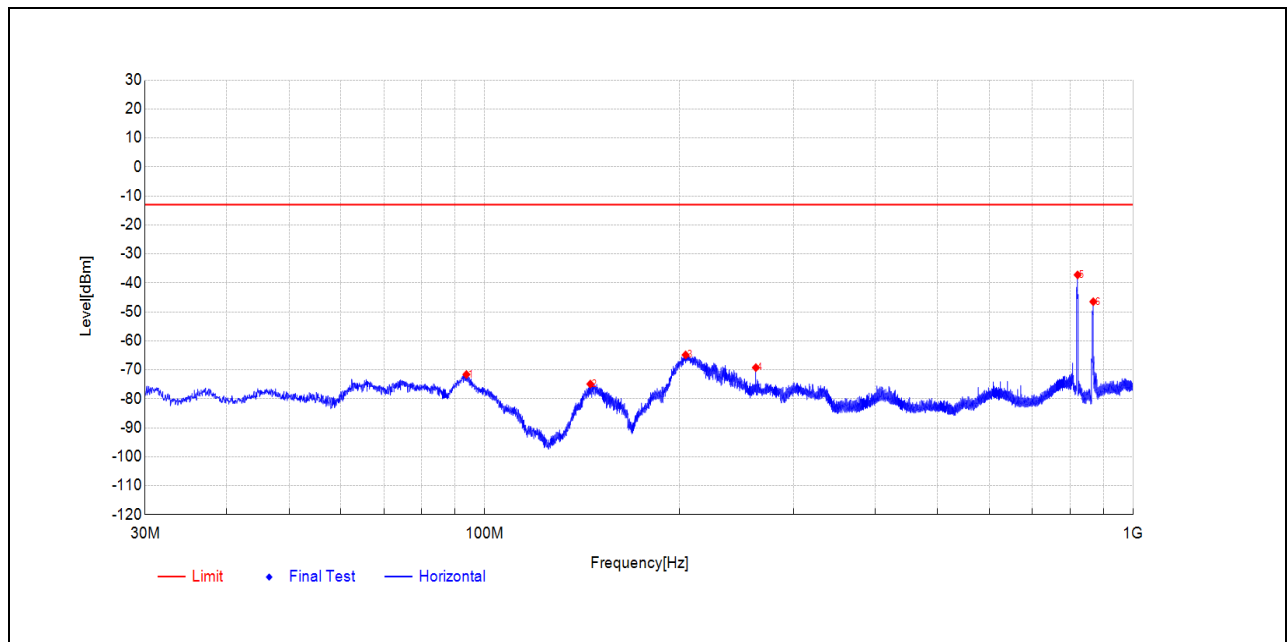

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	93.8292	-49.36	-71.60	-22.2	-13.0	58.6	Horizontal	PK	PASS
2	145.6783	-48.26	-74.89	-26.6	-13.0	61.9	Horizontal	PK	PASS
3	204.3177	-48.09	-64.86	-16.8	-13.0	51.9	Horizontal	PK	PASS
4	262.1326	-54.41	-69.24	-14.8	-13.0	56.2	Horizontal	PK	PASS
5	821.4141	-31.82	-37.25	-5.4	-	-	Horizontal	PK	NA
6	868.5099	-38.47	-46.50	-8.0	-	-	Horizontal	PK	NA

H_LTE_B26_HIGH 5M 30M-1G

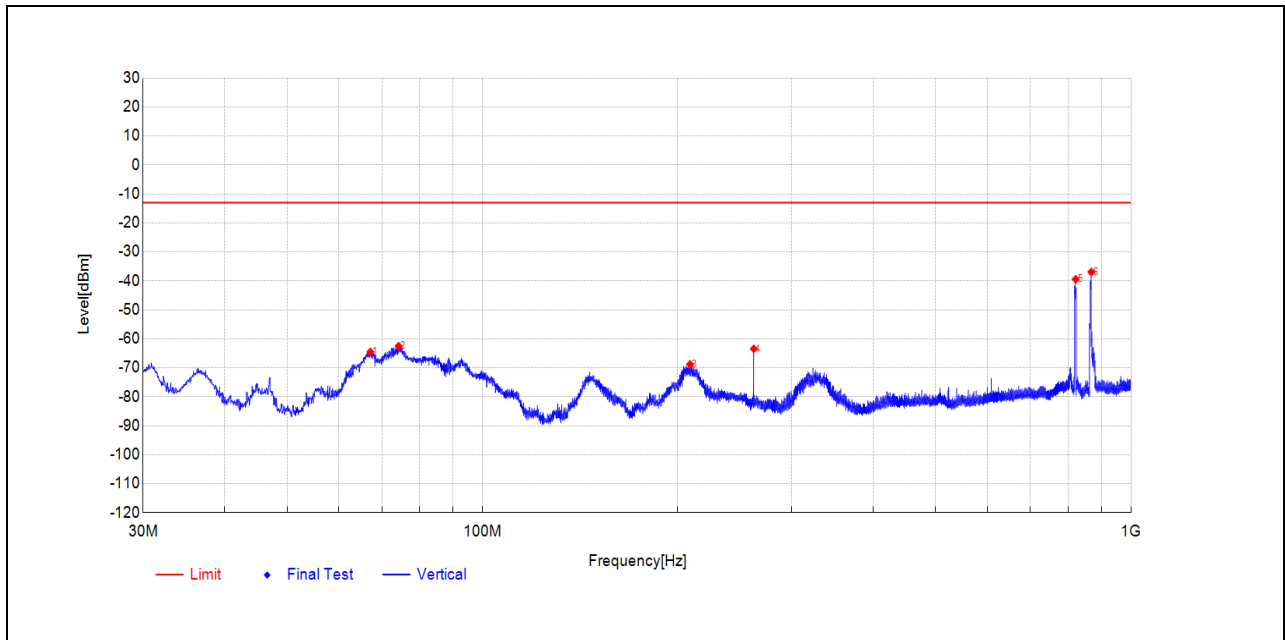

Data List

No.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	67.2014	-43.28	-64.50	-21.2	-13.0	51.5	Vertical	PK	PASS
2	74.2827	-40.67	-62.53	-21.9	-13.0	49.5	Vertical	PK	PASS
3	209.0225	-49.94	-68.80	-18.9	-13.0	55.8	Vertical	PK	PASS
4	262.1326	-45.32	-63.45	-18.1	-13.0	50.5	Vertical	PK	PASS
5	821.6081	-34.06	-39.46	-5.4	-	-	Vertical	PK	NA
6	868.5099	-30.59	-36.93	-6.3	-	-	Vertical	PK	NA

V_LTE_B26_HIGH 5M 30M-1G

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	± 2.22 dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	± 2.77 dB
Band Edge	± 2.77 dB
Equivalent Isotropic Radiated Power	± 2.22 dB
Radiated Spurious Emissions	± 6 dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.1-3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipment Utilized

4.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Power Splitter	NW521	1506A	Weinschel	N/A	N/A
Signal Analyzer	MY51511149	N9020A	Agilent	2025.05.15	2026.05.14
				2026.04.28	2027.04.27
Communication Test Station	6200995016	MT8820C	Anritsu	2025.09.02	2026.09.01
Temperature Chamber	S022177101 00089002	KMT-36LF1A0	KOMEG	2025.09.03	2026.09.02

4.2 List of Software Used

Description	Manufacturer	Software Version
MOR-2023E Test System	MORLAB	V7.99
JS36-RSE	Tonscend	5.0.0