



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

47 CFR Part 15, Subpart C

Report Reference No..... : CTL2606042011-WF

Compiled by:
(printed name+signature)


Jayden Zhuo

Reviewed by:
(printed name+signature)

Happy Guo

Approved by:
(printed name+signature)

Ivan Xie

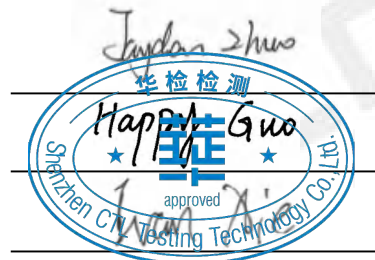

Applicant's name..... : E-filiate Incorporated

Address..... : 11321 White Rock Rd. Rancho Cordova, CA 95742, USA

Test specification:

Standard..... : 47 CFR Part 15, Subpart C

Master TRF..... : Dated 2011-01

Test item description..... : MAGNETIC PHONE CHARGING STAND-DOCKS TO BATTERY

FCC ID..... : 2ADH6-1410015

Trade Mark..... : DEWALT

Model/Type reference..... : 141 0015 DW

List Model(s) : Please check the next page

Antenna type..... : loop coil Antenna

Date of receipt of test item..... : July. 01, 2026

Date of Test Date..... : July. 01, 2026–July. 21, 2026

Data of Issue..... : July. 22, 2026

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2606042011-WF	July. 22, 2026
		Date of issue

Equipment under Test : MAGNETIC PHONE CHARGING STAND-DOCKS TO BATTERY

Sample No : CTL260604201004

Type / Model(s) : 141 0015 DW

Listed Models : 141 0015, 141 0015 DW2, 141 0015 DW3, 141 0015 DWG,
141 0015 DWE, 141 0015 DWM, 141 0015 DWJ, 141 0015 DWA,
141 0015 DWX, 141 0015 XXX, DXMA1410015,
DXMA1410015E, DXMA1410015A, DXMA1410015J,
DXMA1410015X, QTW79
(XXX=0-9, A-Z or Blank for marketing purpose)

Model Difference : All these models are identical in the same PCB, layout and electrical circuit, only the model number are different.

Applicant : **E-filliate Incorporated**

Address : 11321 White Rock Rd. Rancho Cordova, CA 95742, USA

Manufacturer : **E-filliate Incorporated**

Address : 11321 White Rock Rd. Rancho Cordova, CA 95742, USA

Test result	Pass *
--------------------	---------------

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

** Modified History **

[illegible]

Contents

1. TEST STANDARDS	5
2. SUMMARY	6
2.1. General Remarks.....	6
2.2. Equipment Under Test.....	6
2.3. Short description of the Equipment under Test (EUT).....	6
2.4. EUT operation mode.....	6
2.5. Related Submittal(s) / Grant (s).....	7
2.6. Modifications.....	7
2.7. Auxiliary test equipment information.....	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory.....	8
3.2. Test location.....	8
3.3. Test Facility.....	8
3.4. Environmental conditions.....	8
3.5. Statement of the measurement uncertainty.....	9
3.6. Equipments Used during the Test.....	9
4. TEST CONDITIONS AND RESULTS	11
4.1. AC Power Conducted Emission.....	11
4.2. Radiated Emission.....	15
4.3. 20dB Bandwidth/99% Bandwidth.....	24
5. TEST SETUP PHOTOS OF THE EUT	26
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	29

1. TEST STANDARDS

The tests were performed according to following standards:

[47 CFR Part 15, Subpart C 15.207,15.209, 15.215\(c\)](#)

[ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	July. 01, 2026
Testing commenced on	:	July. 01, 2026
Testing concluded on	:	July. 21, 2026

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	Input: 5V===3A 12V===2.25A Phone Output: 5W/10W/15W(Max) Watch Output: 2.5W(Max) Battery Input: 20V Max
----------------------	---	--

2.3. Short description of the Equipment under Test (EUT)

A MAGNETIC PHONE CHARGING STAND-DOCKS TO BATTERY work frequency range 160.76KHz(for mobile phone) and 306.47KHz(for watch).

Modulation type: CW (Continuous Wave)

Antenna type: loop coil Antenna

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting mode for testing.

Test Mode 1	AC Charging+Wireless output(15W MAX) full load+Wireless output(2.5W MAX) full load
Test Mode 2	AC Charging+Wireless output(15W MAX) half load+Wireless output(2.5W MAX) full load
Test Mode 3	AC Charging+Wireless output(15W MAX) no load+Wireless output(2.5W MAX) full load
Test Mode 4	Wireless output(15W MAX) full load+Wireless output(2.5W MAX) full load
Test Mode 5	Wireless output(15W MAX) half load+Wireless output(2.5W MAX) full load
Test Mode 6	Wireless output(15W MAX) no load+Wireless output(2.5W MAX) full load
Test Mode 7	AC Charging+Wireless output(15W MAX) full load
Test Mode 8	AC Charging+Wireless output(15W MAX) half load
Test Mode 9	AC Charging+Wireless output(15W MAX) no load
Test Mode 10	Wireless output(15W MAX) full load
Test Mode 11	Wireless output(15W MAX) half load
Test Mode 12	Wireless output(15W MAX) no load
Test Mode 13	AC Charging+Wireless output(2.5W MAX) full load
Test Mode 14	AC Charging+Wireless output(2.5W MAX) half load
Test Mode 15	AC Charging+Wireless output(2.5W MAX) no load
Test Mode 16	Wireless output(2.5W MAX) full load
Test Mode 17	Wireless output(2.5W MAX) half load
Test Mode 18	Wireless output(2.5W MAX) no load
Note: All modes have been tested, and the report only records the worst test modes, namely Test Mode 1 and Test Mode 4.	

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2ADH6-1410015** filing to comply with FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

2.7. Auxiliary test equipment information

Manufacturer	Description	Model	Serial Number
Lenovo	Power adapter	ADL100UCGC3A	/
DeWALT	Rechargeable battery	DCB183	/

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Company Name:	Shenzhen CTL Testing Technology Co., Ltd.
Address 1:	Zone A.1/F..Warehouse 2.Baisha Technology Park, No.3011,Shahexi Road, Nanshan District,Shenzhen.518055,P.R.C.
Address 2:	Fl.A1, Bldg.A3, No.2533 GuanGuang Road, Fenghuang Community Fenghuang Street, Guangming District, Shenzhen, Guangdong, PR.C

3.2. Test location

All tests were performed at:

Company Name:	Shenzhen CTL Testing Technology Co., Ltd.
☐ Main location	Zone A.1/F..Warehouse 2.Baisha Technology Park, No.3011,Shahexi Road, Nanshan District,Shenzhen.518055,P.R.C.
☒ Satellite location	Fl.A1, Bldg.A3, No.2533 GuanGuang Road, Fenghuang Community Fenghuang Street, Guangming District, Shenzhen, Guangdong, PR.C

3.3. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC CAB identifier: CN0041

Main Company Number :9618B

Satellite Company Number:35187

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Main Company Number:9618B and Satellite Company Number:35187.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No.: CN1216. Test Firm Registration 399832.

3.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MH	$\pm 3.66\text{dB}$	(1)
Radiated Emission	30~1000MHz	$\pm 4.5\text{dB}$	(1)
Radiated Emission	Above 1GHz	$\pm 5.08\text{dB}$	(1)
Conducted Disturbance	0.15~30MHz	$\pm 3.11\text{dB}$	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

3.6. Equipments Used during the Test

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Serial No.	Last calibration	Calibration Due
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2026/01/05	2027/01/04
LISN	ROHDE & SCHWARZ	ESH2-Z5	860014/010	2026/01/05	2027/01/04
Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2026/01/05	2027/01/04
Software:					
Name of Software:			Version:		
ES-K1			V1.71		


Radiated Emission					
Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
Active Loop Antenna	Da Ze	ZN30900A	/	2026/06/30	2027/06/29
ULTRA-BROADBAND ANTENNA	Sunol Sciences Corp.	JB1 Antenna	A061713	2026/06/28	2027/06/27
Amplifier	Brief&Smart	LNA-4018	2104197	2025/07/03	2026/07/02
Amplifier	Brief&Smart	LNA-4018	2104197	2026/06/30	2027/06/29
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	100434	2025/07/02	2026/07/01
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	100434	2026/07/01	2027/06/30
Software:					
Name of Software:			Version:		
EZ_EMC(Below 1GHz)			V1.1.4.2		
EZ_EMC(Above 1GHz)			V1.1.4.2		

RF Conducted					
Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
Spectrum Analyzer	Keysight	N9020A	MY53420874	2025/07/03	2026/07/02
Spectrum Analyzer	Keysight	N9020A	MY53420874	2026/06/29	2027/06/28
Temperature/Humidity Meter	Ji Yu	MC501	/	2025/07/03	2026/07/02
Temperature/Humidity Meter	Ji Yu	MC501	/	2026/07/02	2027/07/01
Software:					
Name of Software:			Version:		
TST-PASS			V2.0.2		

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

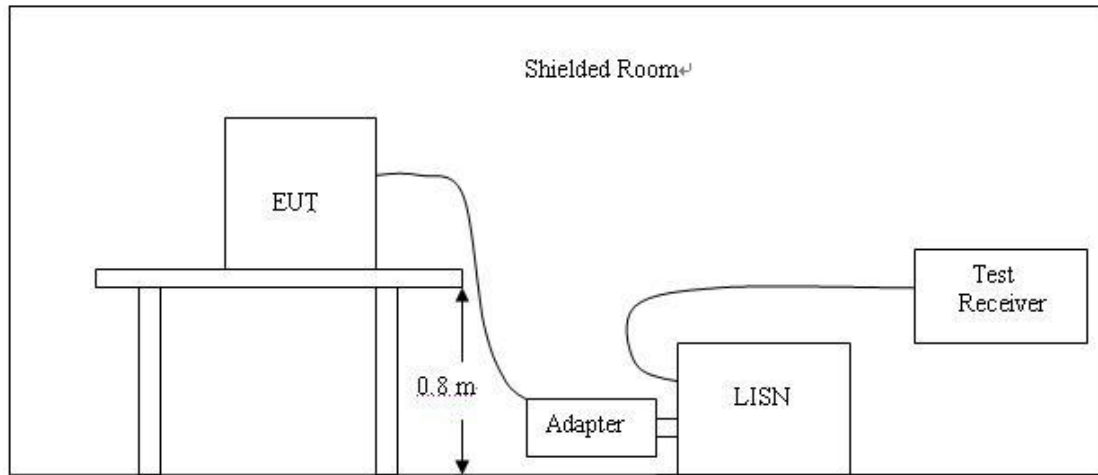

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
- 4 The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.
Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46

5.00 - 30.0	73	60	60	50
-------------	----	----	----	----


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

Test Mode 1

L

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

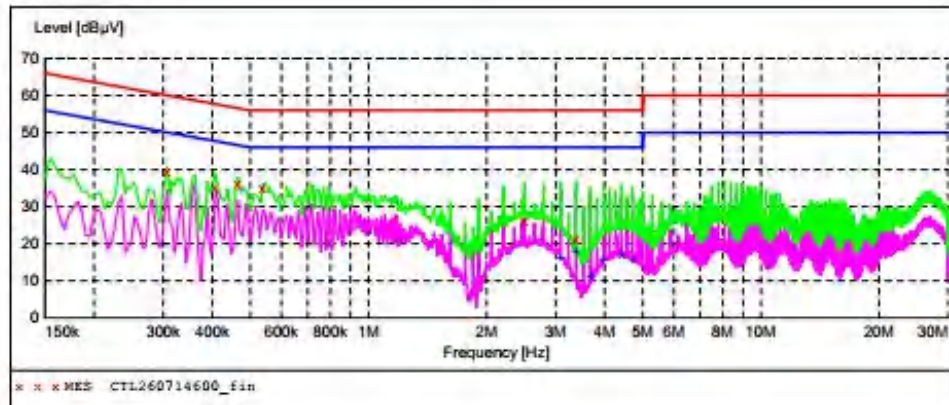

MEASUREMENT RESULT: "CTL260714600_fin"

7/14/2026 3:58PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.307500	39.30	10.0	60	20.7	QP	L1	GND
0.406500	35.20	10.0	58	22.5	QP	L1	GND
0.465000	36.10	10.0	57	20.5	QP	L1	GND
0.537000	34.80	10.0	56	21.2	QP	L1	GND
2.499000	26.00	10.2	56	30.0	QP	L1	GND
3.381000	21.10	10.4	56	34.9	QP	L1	GND

MEASUREMENT RESULT: "CTL260714600_fin2"

7/14/2026 3:58PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
3.088500	16.00	10.4	46	30.0	AV	L1	GND
3.381000	18.00	10.4	46	28.0	AV	L1	GND
3.678000	11.20	10.4	46	34.8	AV	L1	GND
3.970500	15.50	10.4	46	30.5	AV	L1	GND
4.411500	17.10	10.5	46	28.9	AV	L1	GND
4.704000	15.90	10.5	46	30.1	AV	L1	GND

Test Mode 1

N

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

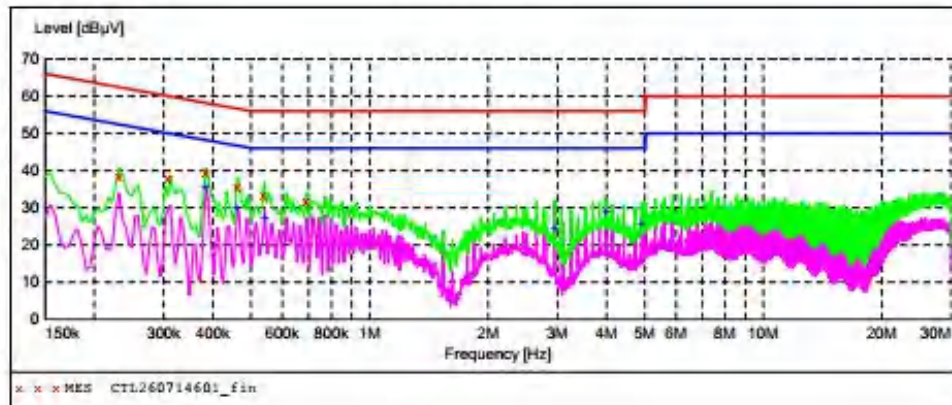**MEASUREMENT RESULT: "CTL260714601_fin"**

7/14/2026 4:02PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.231000	38.50	10.0	62	23.9	QP	N	GND
0.307500	38.10	10.0	60	21.9	QP	N	GND
0.384000	39.80	10.0	58	18.4	QP	N	GND
0.460500	35.80	10.0	57	20.9	QP	N	GND
0.537000	33.50	10.0	56	22.5	QP	N	GND
0.690000	31.60	10.0	56	24.4	QP	N	GND

MEASUREMENT RESULT: "CTL260714601_fin2"


7/14/2026 4:02PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.384000	35.60	10.0	48	12.6	AV	N	GND
0.460500	30.10	10.0	47	16.6	AV	N	GND
0.541500	27.20	10.0	46	18.8	AV	N	GND
2.953500	24.70	10.4	46	21.3	AV	N	GND
3.988500	29.10	10.4	46	16.9	AV	N	GND
4.906500	25.60	10.5	46	20.4	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION

Radiated Emission Test Set-Up
Frequency range 9KHz – 30MHz

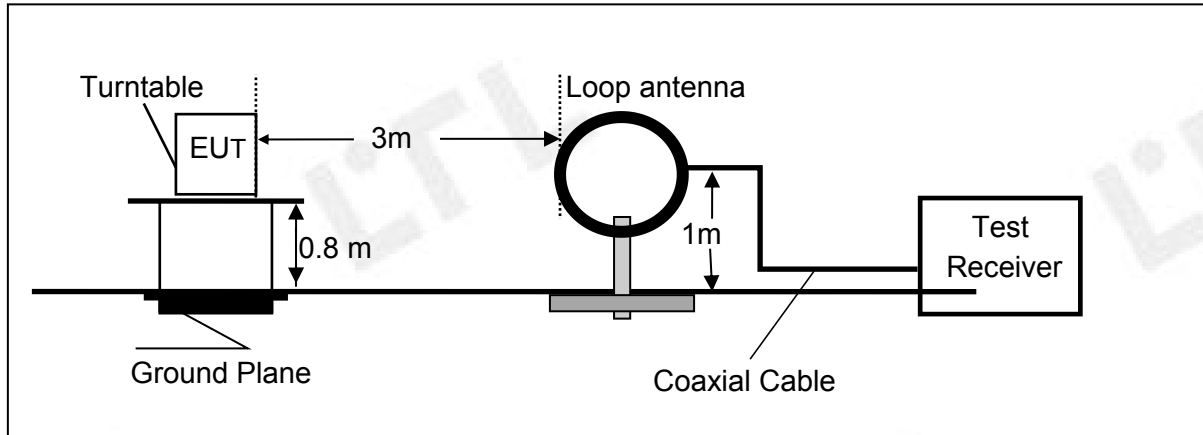

Frequency range 30MHz – 1000MHz

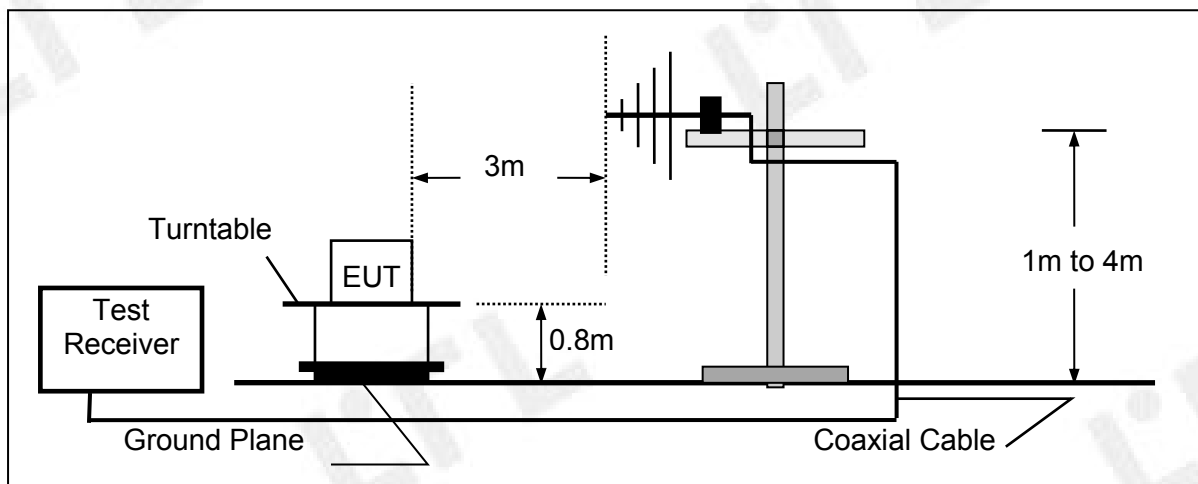

TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dBμV/m)	RA (dBμV/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	36.8	58.1	12.2	1.7	31.90	-18.0

$$\text{Transd} = AF + CL - AG$$

RADIATION LIMIT

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

9k~30MHz:

Frequency Range (MHz)	E-field Strength Limit @ 30m (mV/m)	E-field Strength Limit @ 3m (dBμV/m)
0.009-0.490	2400/F(kHz)	129-94
0.490-1.705	24000/F(kHz)	74-63
1.705-30	30	70

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

$$\text{Extrapolation(dB)} = 40\log_{10}(\text{Measurement Distance/Specification Distance})$$

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) dBuV/m = 20*log(uV/m)

30M~1GHz:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


Note:

(1) The tighter limit shall apply at the edge between two frequency bands.


(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

TEST RESULTS**WORST-CASE RADIATED EMISSION BELOW 30 MHz**

Test Mode 1

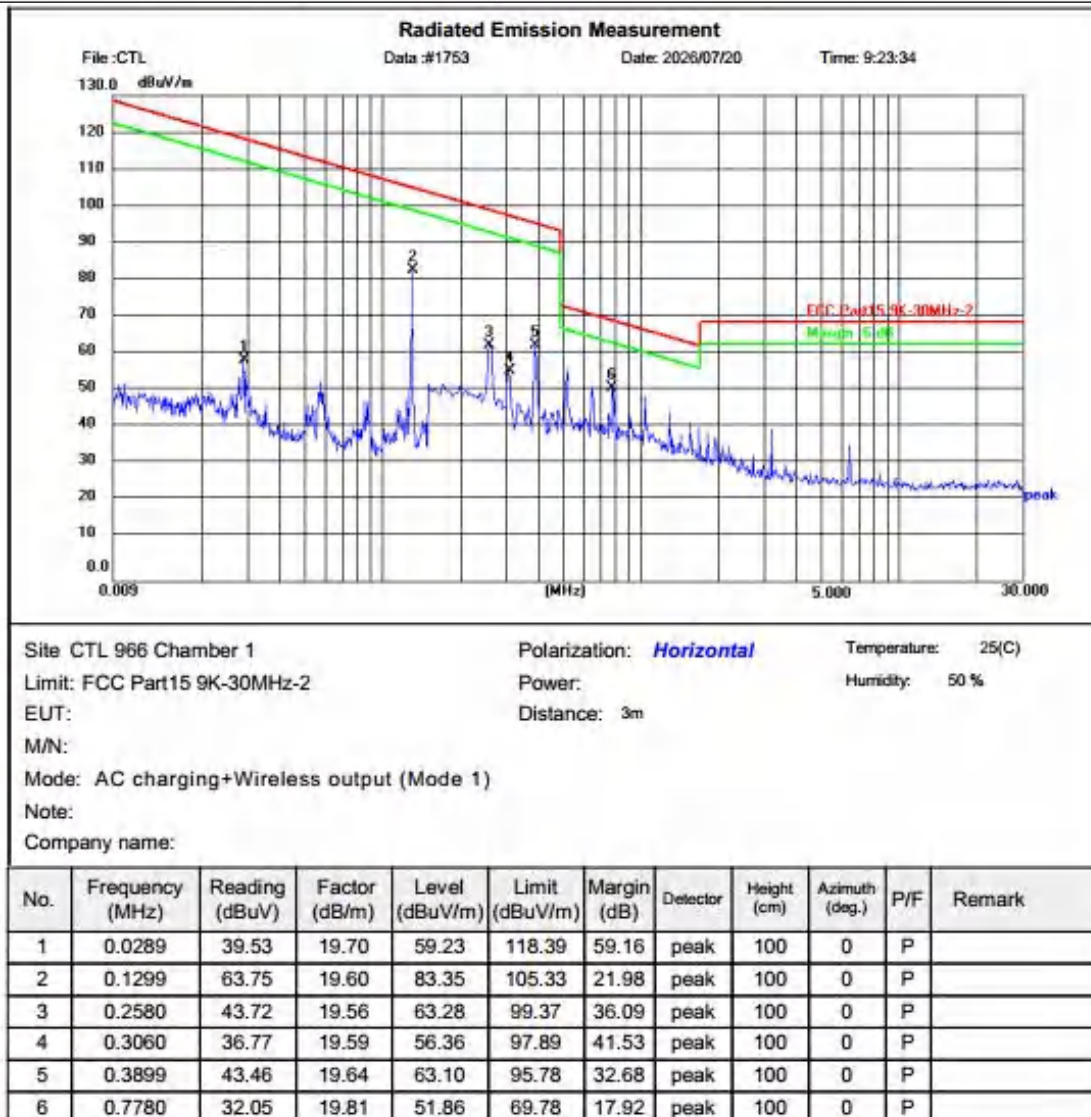

Test Mode 4

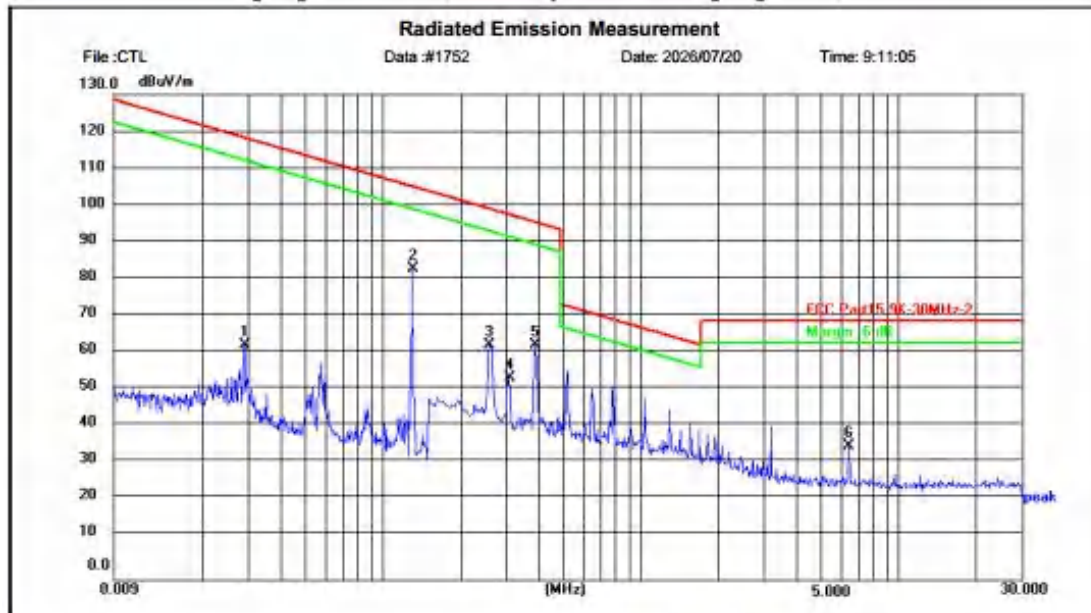

Site: CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part 15.9K-30MHz-2

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:


Mode: Wireless output (Mode 4)

Note:

Company name:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0290	43.04	19.70	62.74	118.36	55.62	peak	100	0	P	
2	0.1298	63.73	19.60	83.33	105.34	22.01	peak	100	0	P	
3	0.2580	43.17	19.56	62.73	99.37	36.64	peak	100	0	P	
4	0.3060	34.68	19.59	54.27	97.89	43.62	peak	100	0	P	
5	0.3899	43.23	19.64	62.87	95.78	32.91	peak	100	0	P	
6	6.4340	15.70	20.07	35.77	69.54	33.77	peak	100	0	P	

Radiated Emission Test Data 30-1000MHz:

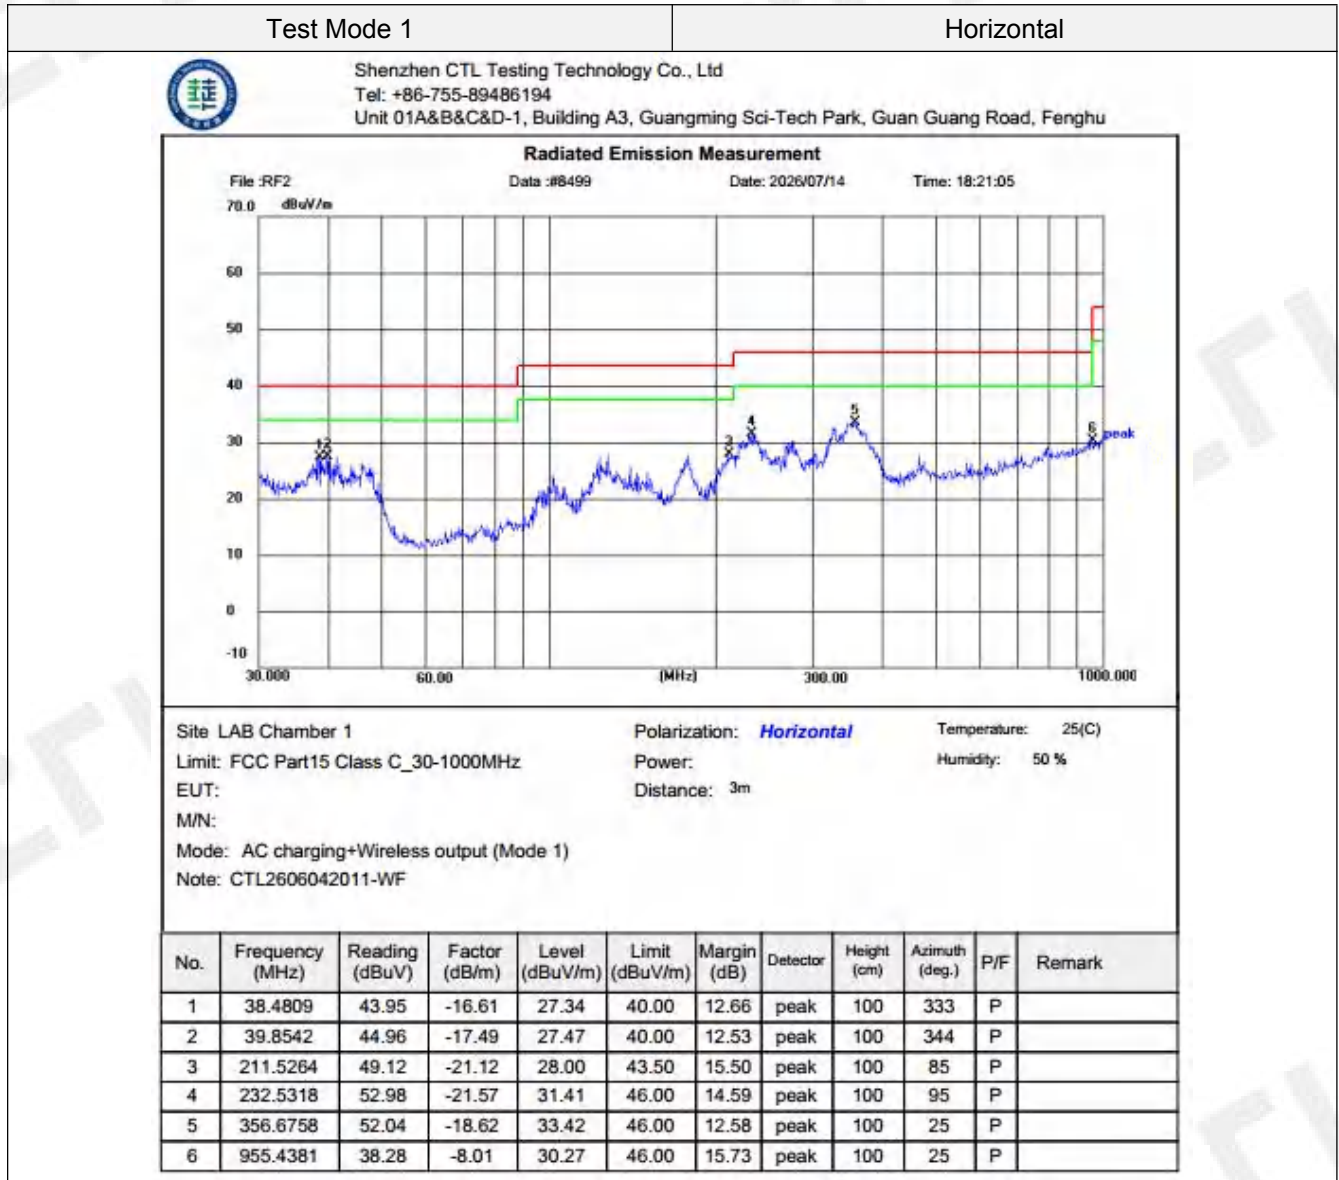

Test Mode 1

Vertical



Shenzhen CTL Testing Technology Co., Ltd

Tel: +86-755-89486194

Unit 01A&B&C&D-1, Building A3, Guangming Sci-Tech Park, Guan Guang Road, Fenghu

Radiated Emission Measurement


File :RF2

Data :#8500

Date: 2026/07/14

Time: 18:21:52

70.0 dBuV/m

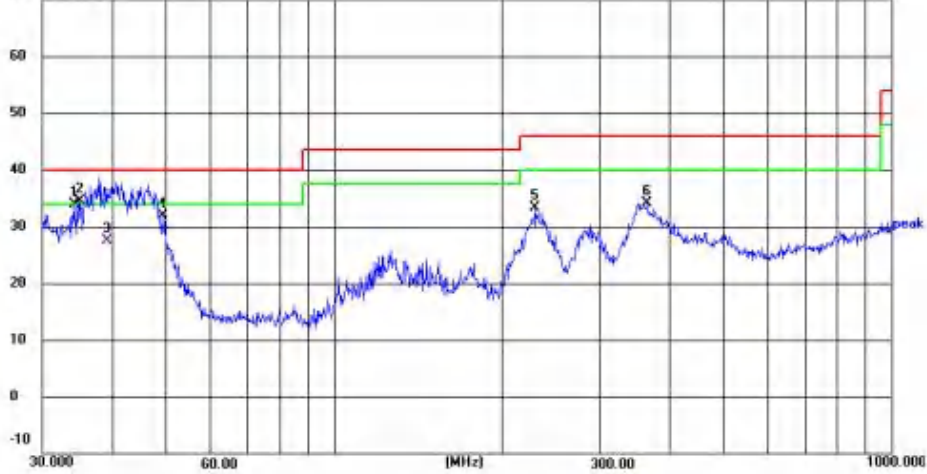

Site LAB Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 Class C_30-1000MHz

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:

Mode: AC charging+Wireless output (Mode 1)

Note: CTL2606042011-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	34.1561	47.26	-13.39	33.87	40.00	6.13	peak	100	355	P	
2	34.8823	48.44	-13.95	34.49	40.00	5.51	peak	100	256	P	
3	39.2900	44.59	-17.17	27.42	40.00	12.58	QP	100	360	P	
4	49.3594	55.51	-23.58	31.93	40.00	8.07	peak	100	86	P	
5	230.0985	54.97	-21.68	33.29	46.00	12.71	peak	100	47	P	
6	364.2595	52.48	-18.41	34.07	46.00	11.93	peak	100	345	P	

Test Mode 4

Horizontal



Shenzhen CTL Testing Technology Co., Ltd

Tel: +86-755-89486194

Unit 01A&B&C&D-1, Building A3, Guangming Sci-Tech Park, Guan Guang Road, Fenghu


Radiated Emission Measurement

File :RF2

Data :#8412

Date: 2026/07/13

Time: 16:36:33

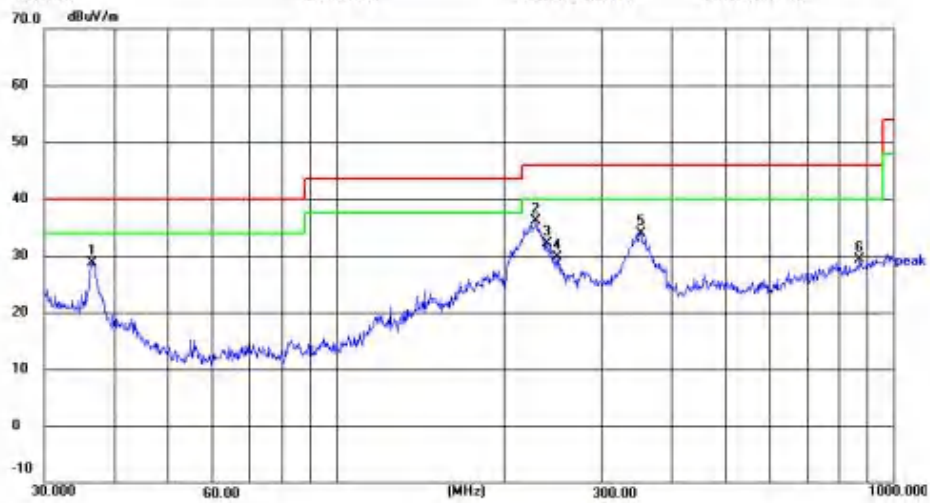

Site LAB Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 Class C_30-1000MHz

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:

Mode: Wireless output (Mode 4)

Note: CTL2606042011-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.5092	43.39	-14.68	28.71	40.00	11.29	peak	100	205	P	
2	228.4904	57.67	-21.53	36.14	46.00	9.86	peak	100	275	P	
3	239.1472	53.62	-21.42	32.20	46.00	13.80	peak	100	275	P	
4	249.4250	51.17	-21.38	29.79	46.00	16.21	peak	100	275	P	
5	352.9433	52.42	-18.58	33.84	46.00	12.16	peak	100	105	P	
6	872.1832	38.45	-9.19	29.26	46.00	16.74	peak	100	255	P	

Test Mode 4

Vertical



Shenzhen CTL Testing Technology Co., Ltd

Tel: +86-755-89486194

Unit 01A&B&C&D-1, Building A3, Guangming Sci-Tech Park, Guan Guang Road, Fenghu


Radiated Emission Measurement

File :RF2

Data :#8413

Date: 2026/07/13

Time: 16:37:20

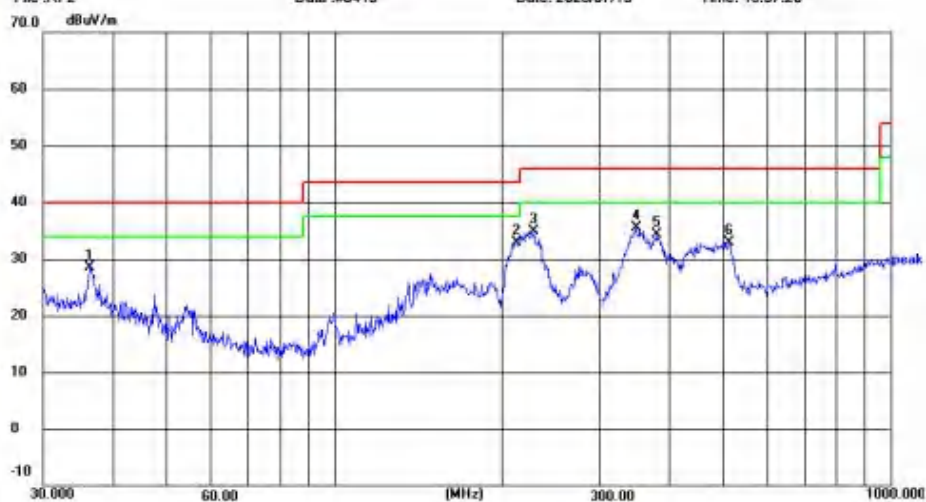

Site LAB Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 Class C_30-1000MHz

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:

Mode: Wireless output (Mode 4)

Note: CTL2606042011-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.3814	43.22	-14.67	28.55	40.00	11.45	peak	100	126	P	
2	213.0151	53.74	-20.83	32.91	43.50	10.59	peak	100	16	P	
3	228.4904	56.38	-21.53	34.85	46.00	11.15	peak	100	315	P	
4	349.2500	54.22	-18.68	35.54	46.00	10.46	peak	100	106	P	
5	379.9141	51.85	-17.61	34.24	46.00	11.76	peak	100	206	P	
6	513.6331	46.47	-13.60	32.87	46.00	13.13	peak	100	67	P	

4.3. 20dB Bandwidth/99% Bandwidth

TEST CONFIGURATION




TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


LIMIT

N/A

TEST RESULTS

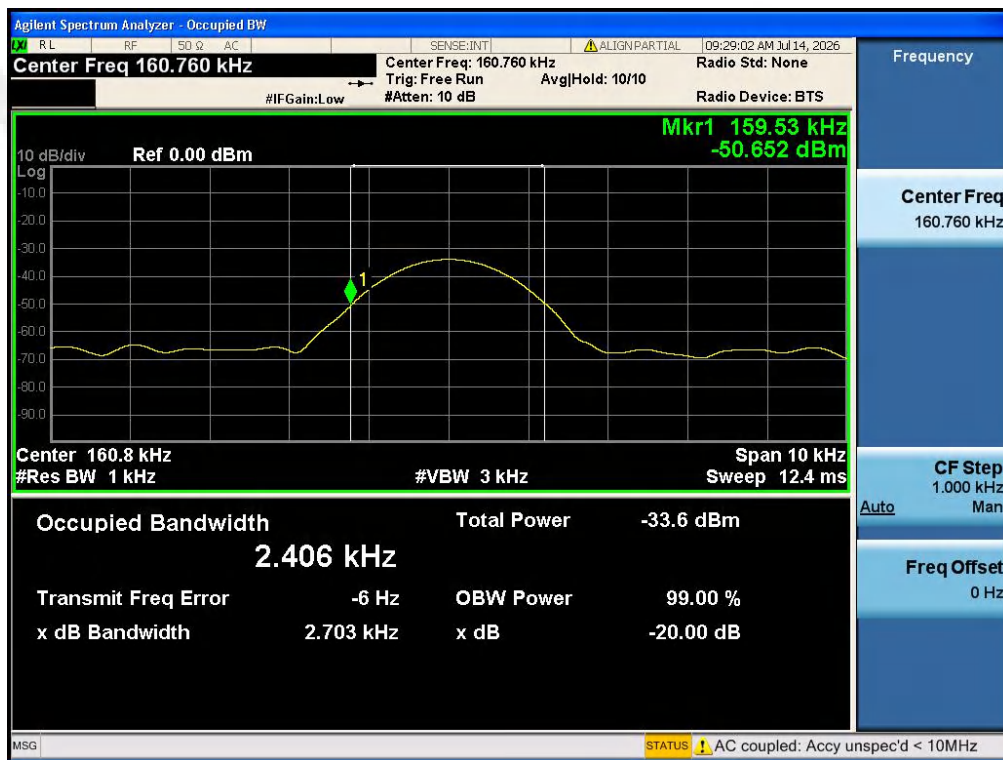



Frequency (kHz)	20dB Bandwidth (kHz)	Limit(kHz)	Verdict
160.76	2.703	/	PASS


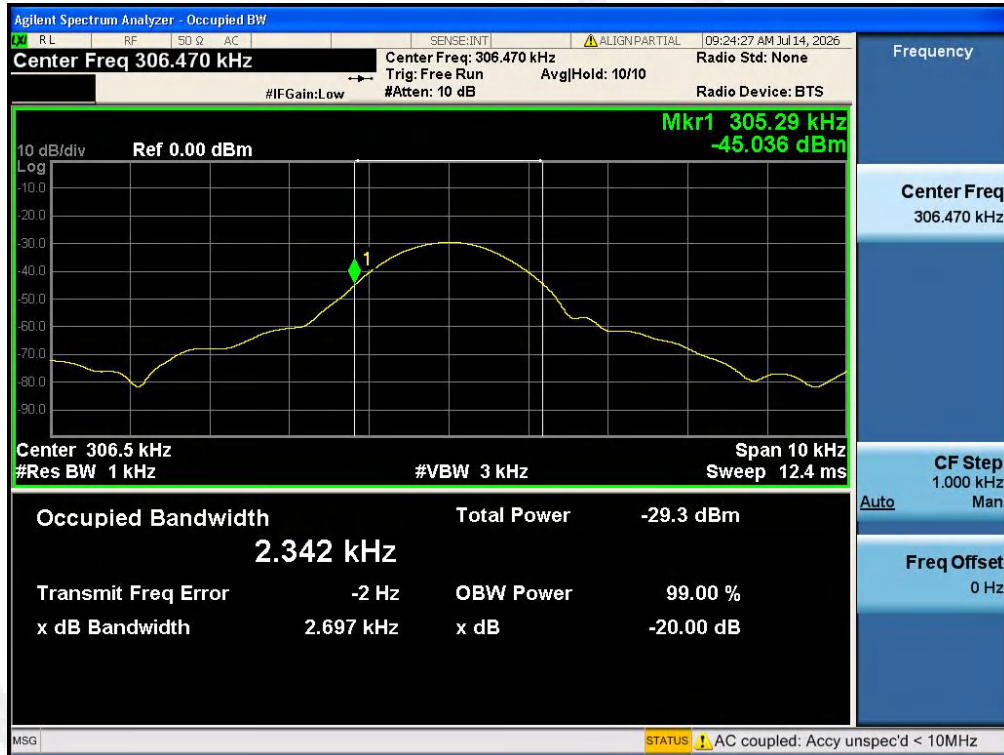



Frequency (kHz)	20dB Bandwidth (kHz)	Limit(kHz)	Verdict
306.47	2.697	/	PASS

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 1 kHz to perform the occupied bandwidth test.

5. Test Setup Photos of the EUT

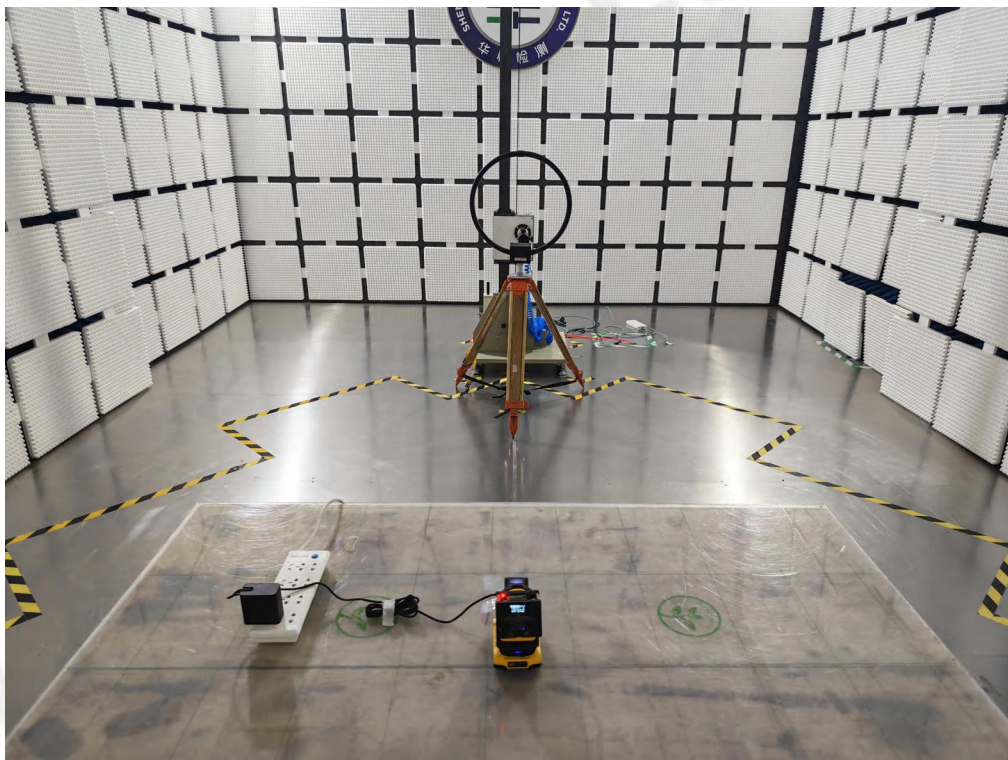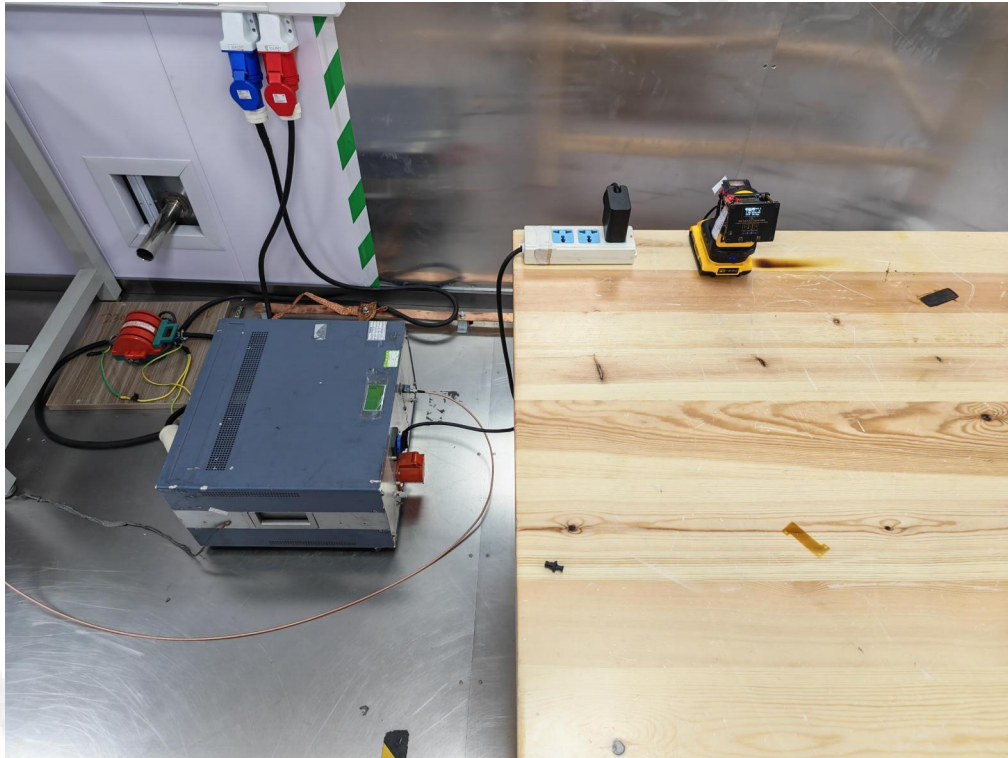


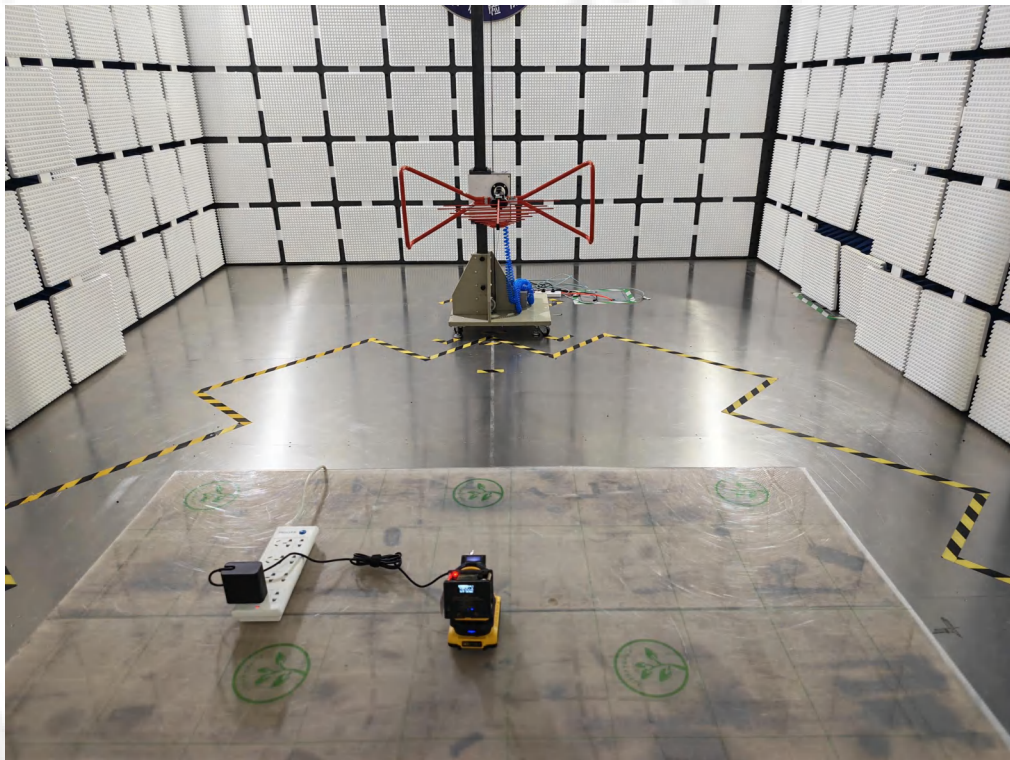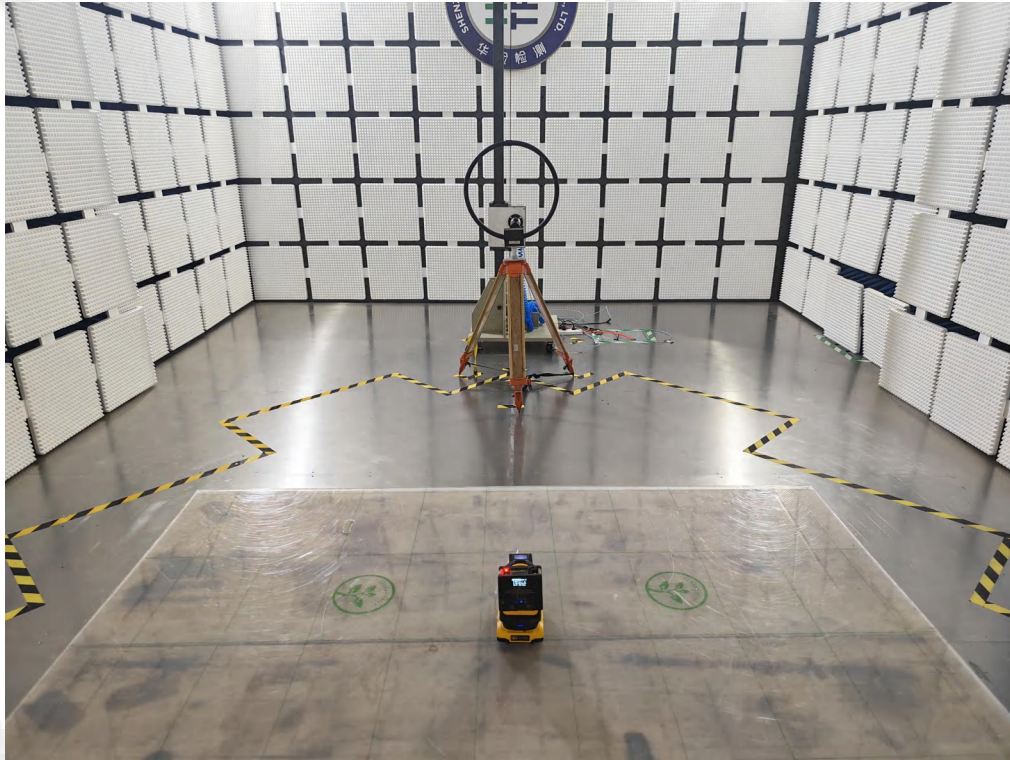

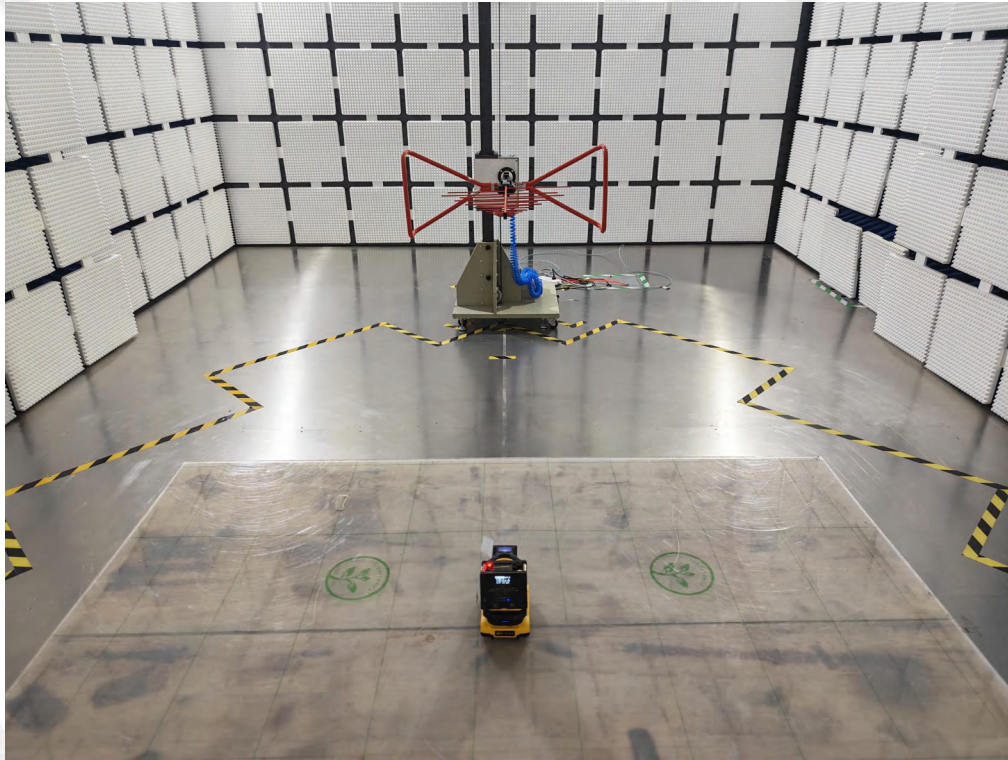

6. External and Internal Photos of the EUT



External Photos of EUT


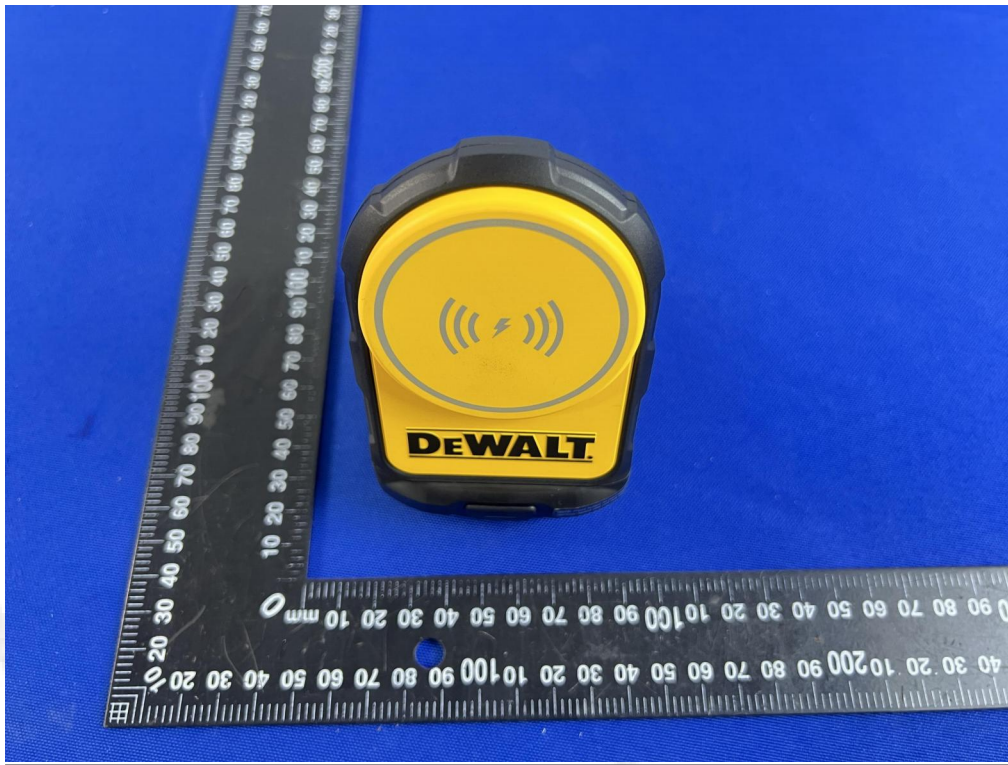









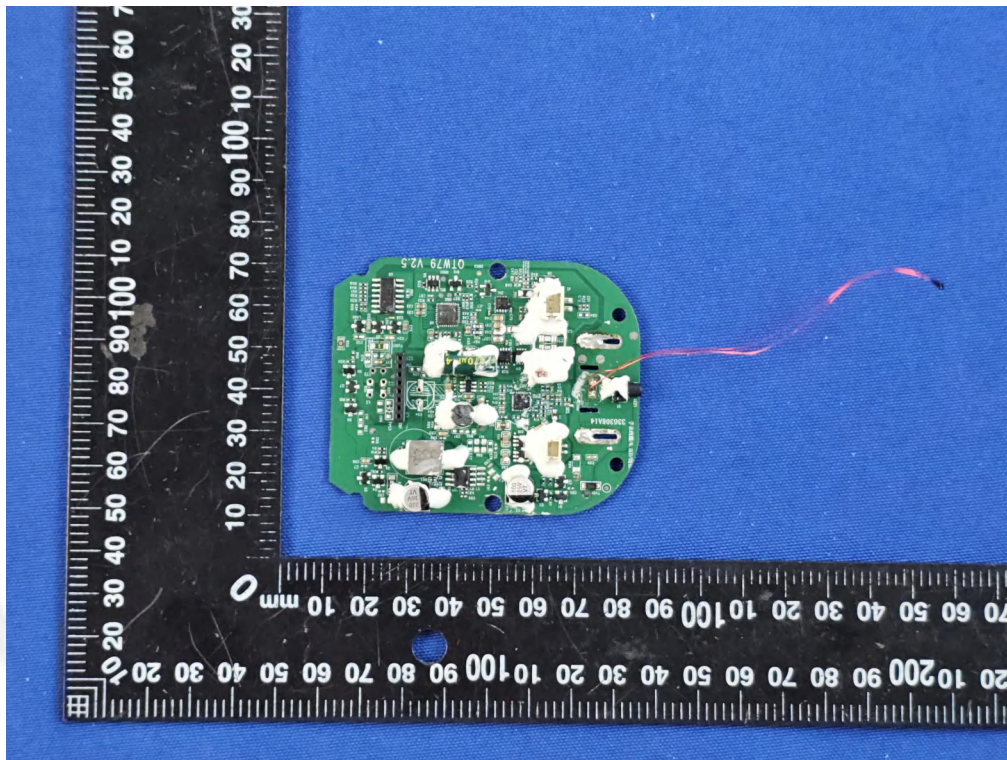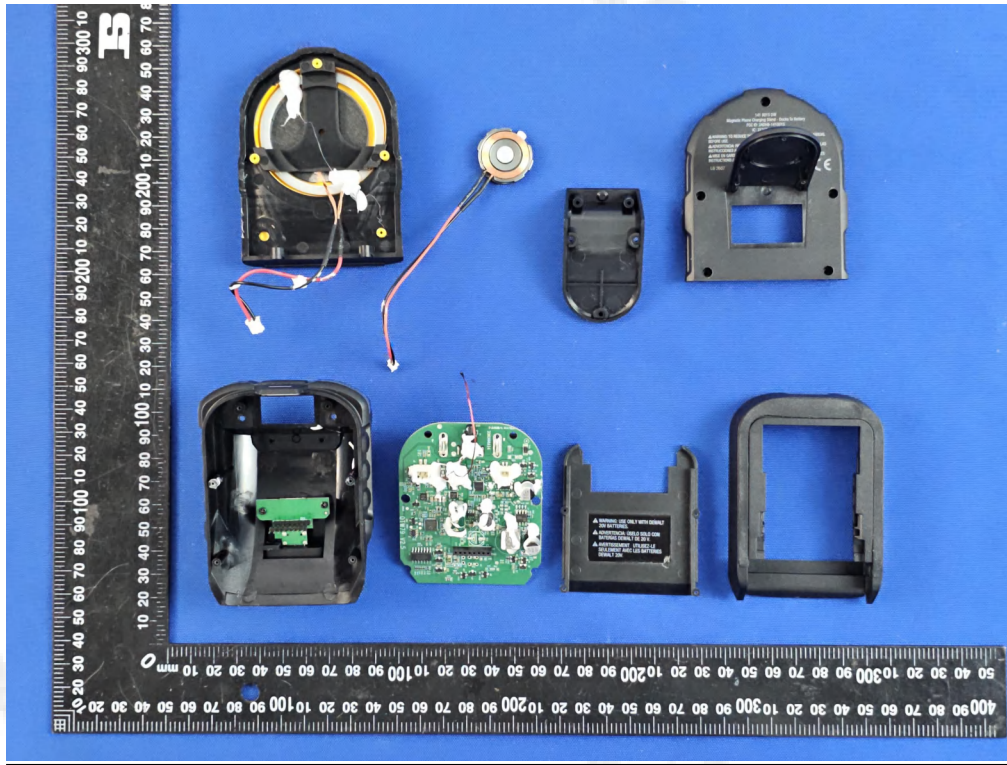

Internal Photos of EUT

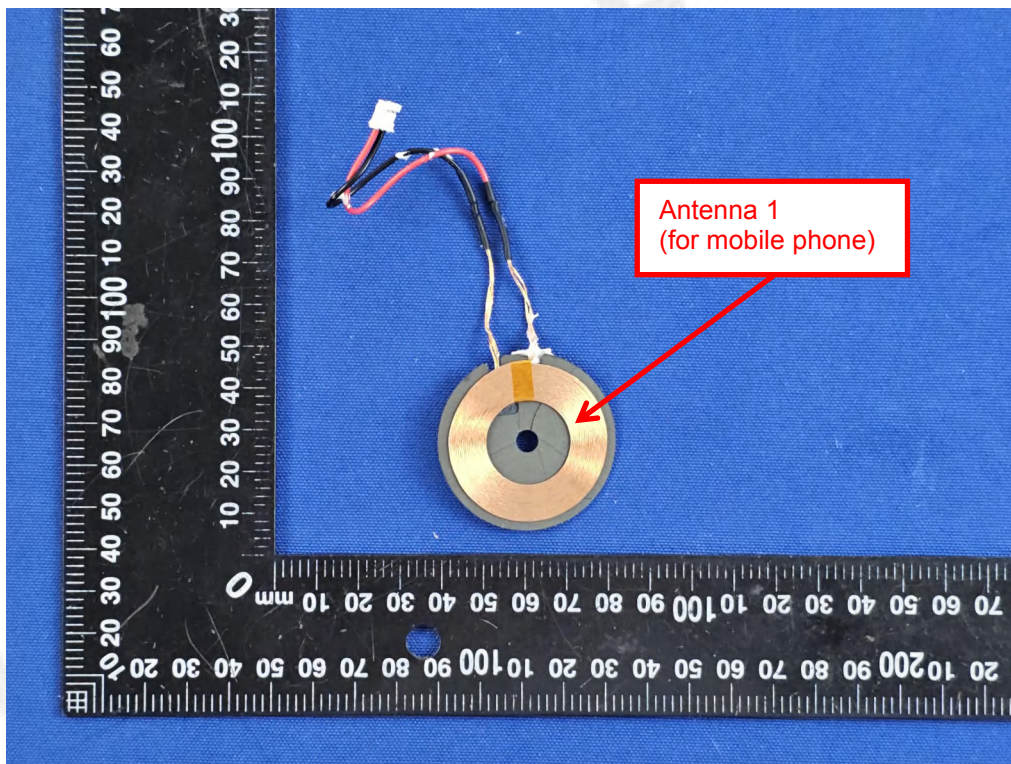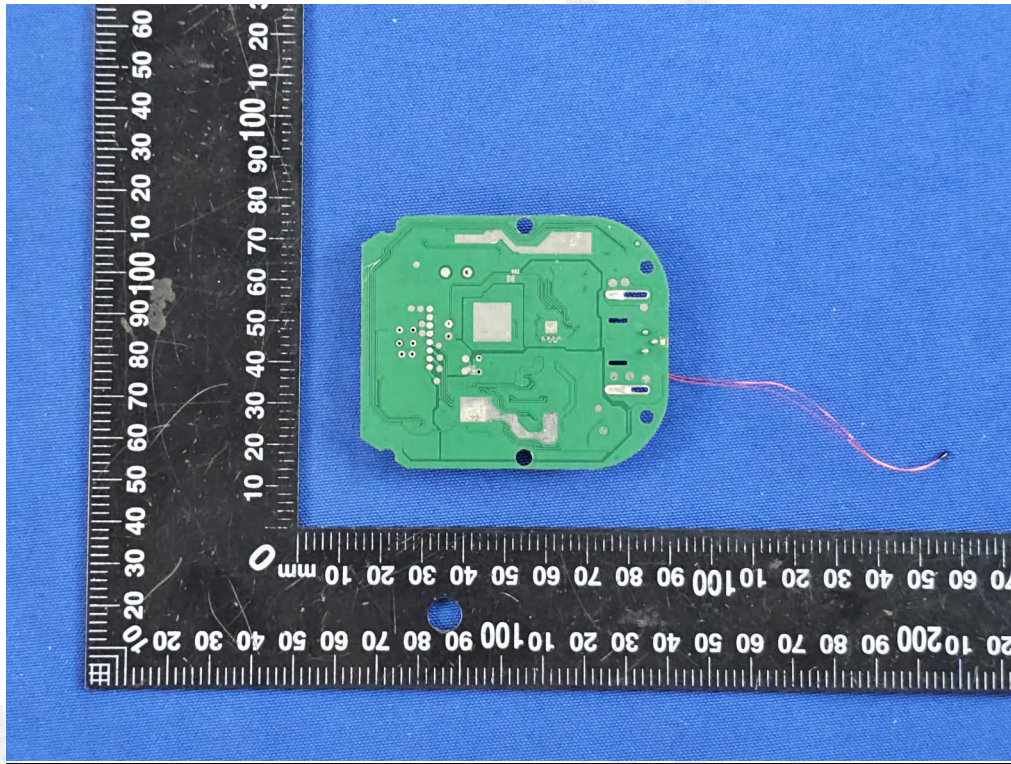

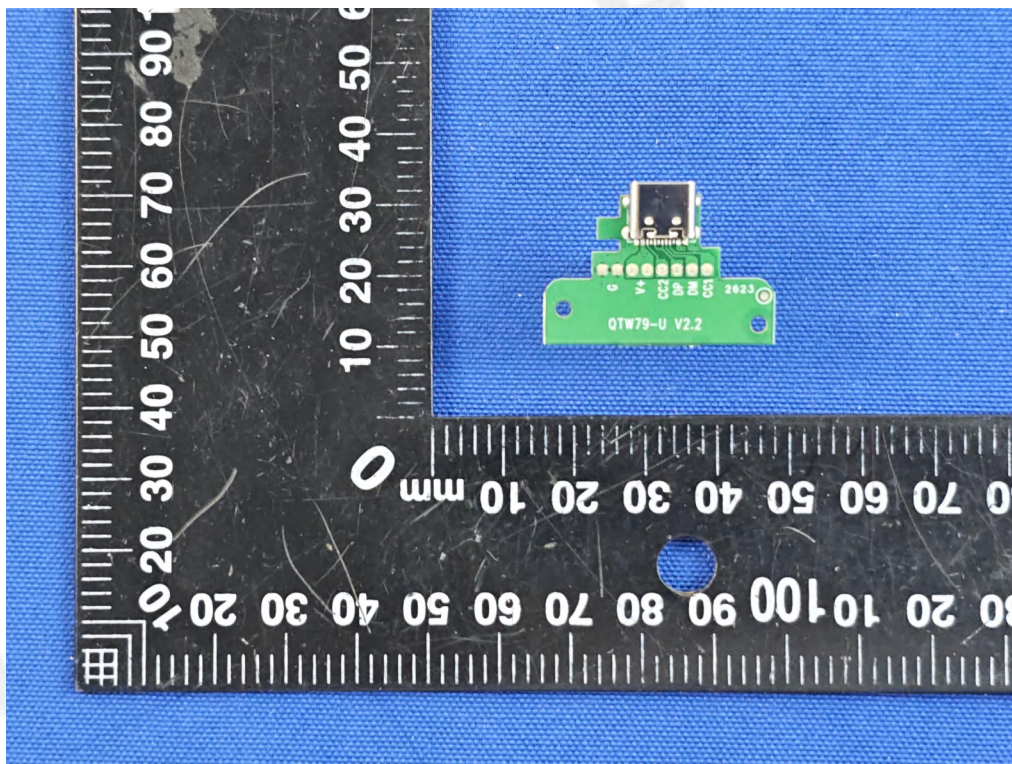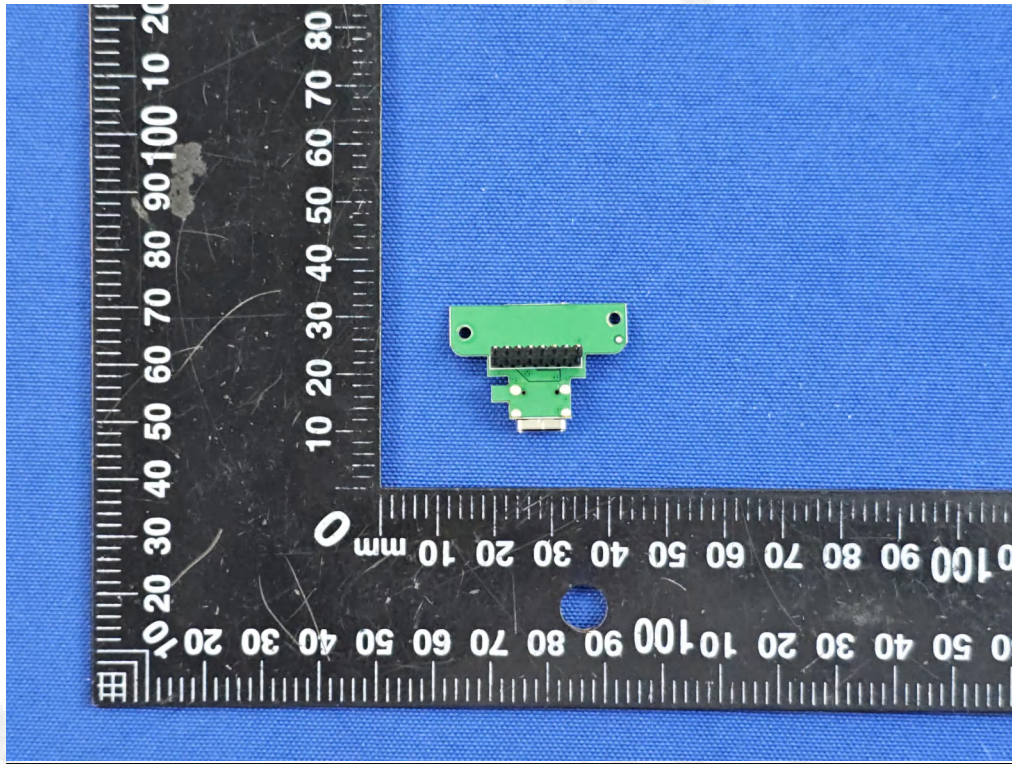

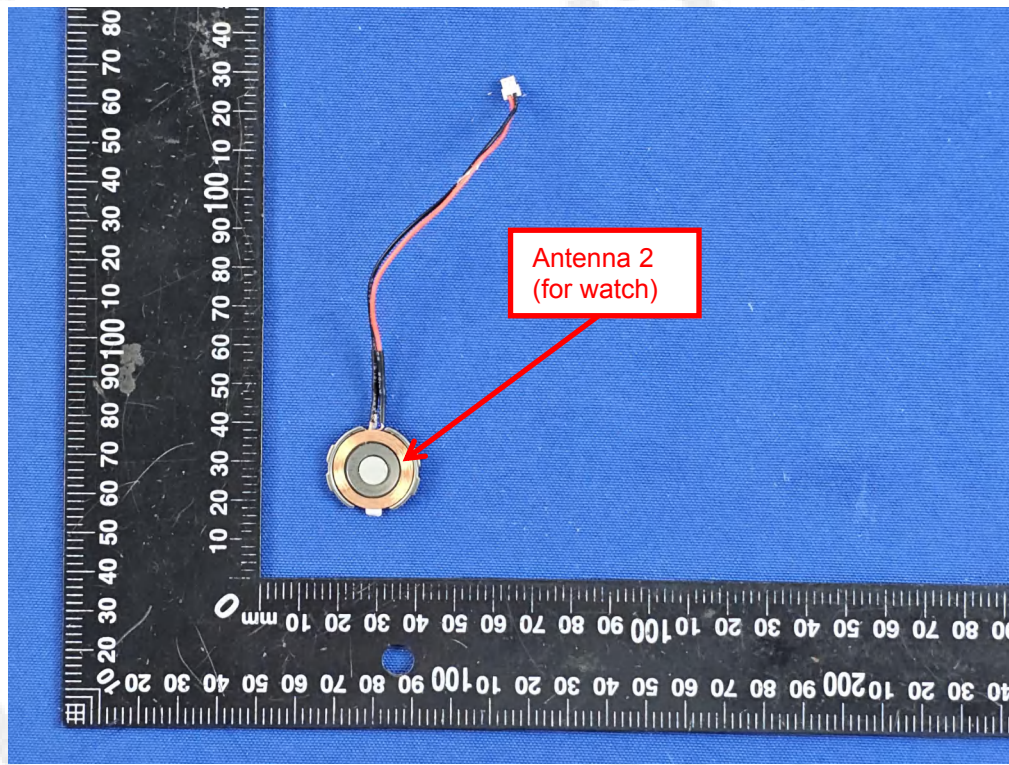

.....End of Report.....