



Appendix B. Duty Cycle


802.11b

| 1Mbps            |     |                                 |
|------------------|-----|---------------------------------|
| Duty On (ms):    | -   | Duty Cycle = Ton / (Ton + Toff) |
| Duty OnOff (ms): | -   |                                 |
| Duty Cycle (%):  | 100 |                                 |
| VBW (Hz):        | 10  |                                 |

\*Duty cycle = 1

\*If duty cycle of test signal is ≥ 98%, duty factor is not required.

\*If duty cycle of test signal is < 98%, duty factor shall be considered.

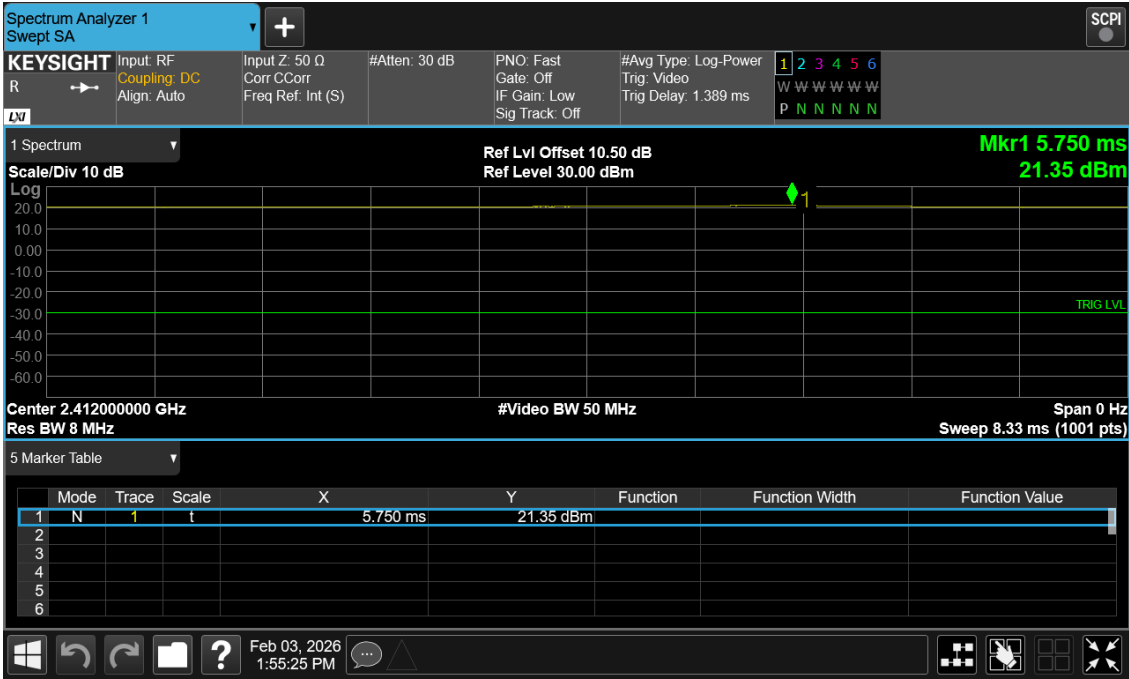




802.11g

| 6Mbps            |     |                                 |
|------------------|-----|---------------------------------|
| Duty On (ms):    | -   | Duty Cycle = Ton / (Ton + Toff) |
| Duty OnOff (ms): | -   |                                 |
| Duty Cycle (%):  | 100 |                                 |
| VBW (Hz):        | 10  |                                 |

\*Duty cycle = 1

\*If duty cycle of test signal is ≥ 98%, duty factor is not required.

\*If duty cycle of test signal is < 98%, duty factor shall be considered.

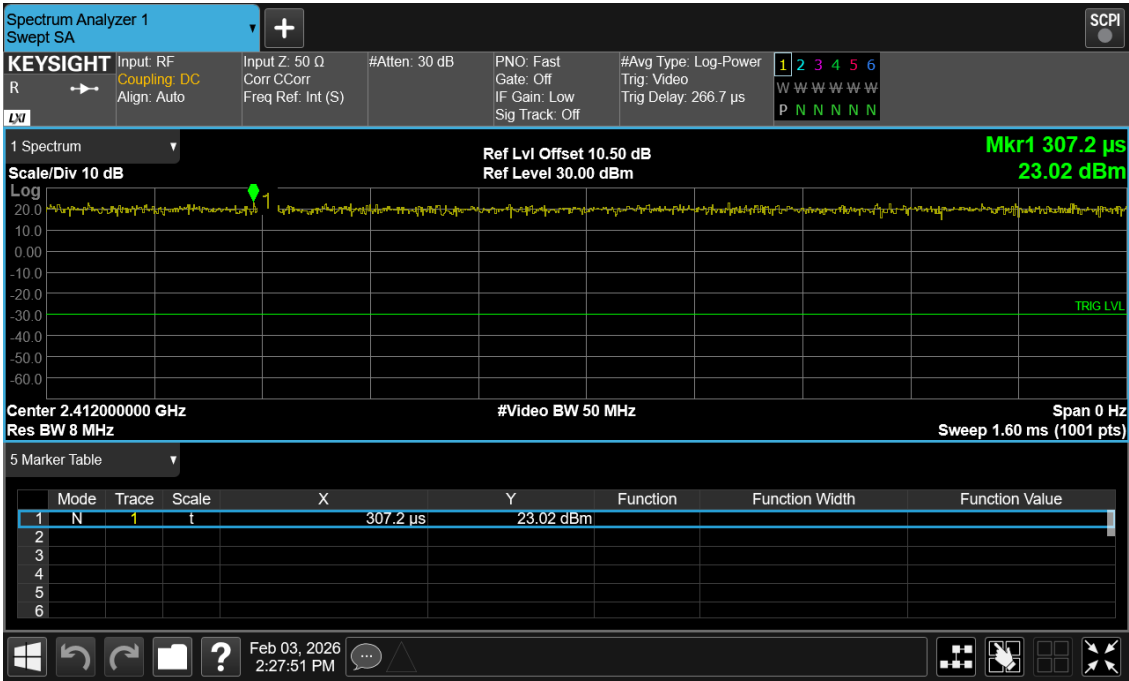




802.11n20

| MCS0             |     |                                 |
|------------------|-----|---------------------------------|
| Duty On (ms):    | -   | Duty Cycle = Ton / (Ton + Toff) |
| Duty OnOff (ms): | -   |                                 |
| Duty Cycle (%):  | 100 |                                 |
| VBW (Hz):        | 10  |                                 |

\*Duty cycle = 1

\*If duty cycle of test signal is ≥ 98%, duty factor is not required.

\*If duty cycle of test signal is < 98%, duty factor shall be considered.

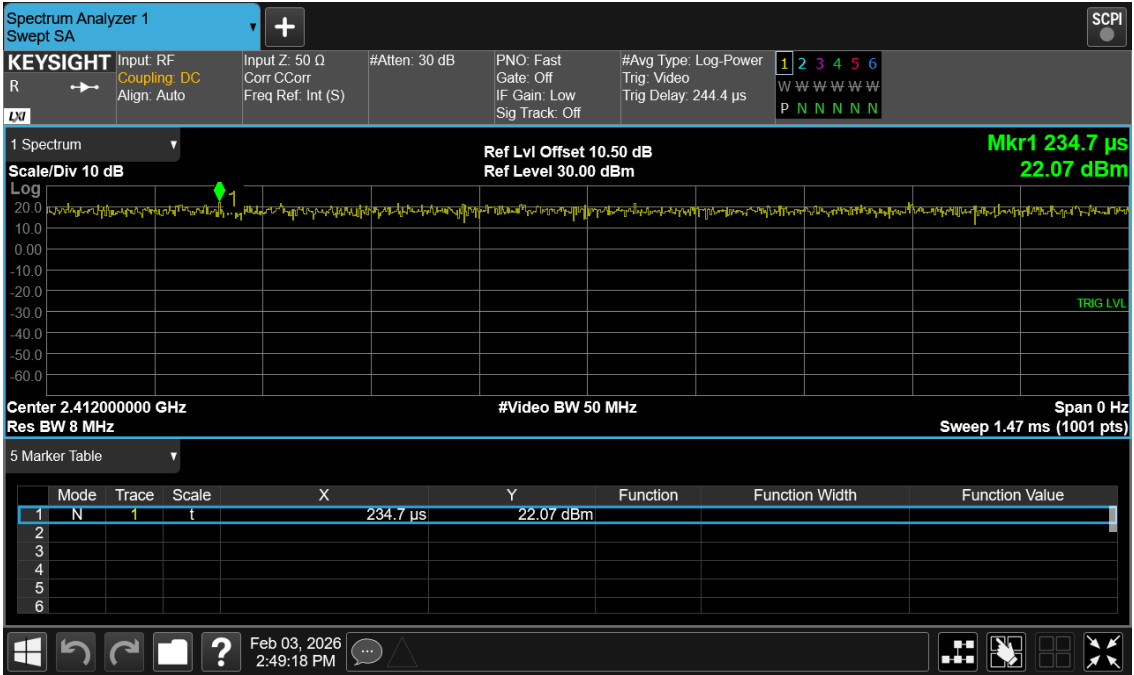

## Appendix C. Peak Conducted Output Power

### Peak Output Power

#### <11b>

| Channel | Channel Frequency | Peak Output Power |            | Average Output Power |            | Power Setting | Limit(dBm) |
|---------|-------------------|-------------------|------------|----------------------|------------|---------------|------------|
|         | (MHz)             | (dBm)             | (mW)       | (dBm)                | (mW)       |               |            |
| 1       | 2412              | 22.59             | 181.551566 | 19.17                | 82.603795  | 18            | 30         |
| 6       | 2437              | 23.46             | 221.819642 | 20.03                | 100.693167 | 18.5          | 30         |
| 11      | 2462              | 23.64             | 231.206479 | 20.32                | 107.646521 | 18.5          | 30         |

#### <11g >

| Channel | Channel Frequency | Peak Output Power |            | Average Output Power |            | Power Setting | Limit(dBm) |
|---------|-------------------|-------------------|------------|----------------------|------------|---------------|------------|
|         | (MHz)             | (dBm)             | (mW)       | (dBm)                | (mW)       |               |            |
| 1       | 2412              | 24.93             | 311.171634 | 17.92                | 61.944108  | 16.5          | 30         |
| 2       | 2417              | 26.11             | 408.319386 | 20.02                | 100.461579 | 18.5          | 30         |
| 6       | 2437              | 26.09             | 406.443329 | 20.48                | 111.686325 | 18.5          | 30         |
| 10      | 2457              | 25.76             | 376.703799 | 18.79                | 75.683290  | 17            | 30         |
| 11      | 2462              | 25.38             | 345.143739 | 15.87                | 38.636698  | 14            | 30         |

#### <11n20>

| Channel | Channel Frequency | Peak Output Power |            | Average Output Power |            | Power Setting | Limit(dBm) |
|---------|-------------------|-------------------|------------|----------------------|------------|---------------|------------|
|         | (MHz)             | (dBm)             | (mW)       | (dBm)                | (mW)       |               |            |
| 1       | 2412              | 25.81             | 381.065823 | 18.48                | 70.469307  | 17            | 30         |
| 2       | 2417              | 26.06             | 403.645393 | 20.02                | 100.461579 | 18.5          | 30         |
| 6       | 2437              | 26.14             | 411.149721 | 20.21                | 104.954243 | 18.5          | 30         |
| 10      | 2457              | 25.89             | 388.150366 | 18.58                | 72.110748  | 17            | 30         |
| 11      | 2462              | 24.97             | 314.050869 | 14.91                | 30.974193  | 13            | 30         |

Cable loss has been offset in the measurement result.



Appendix D. Bandwidth Measurement

6dB Bandwidth

<11b>

| Channel | Channel Frequency | 6dB Bandwidth | > 0.5 MHz |
|---------|-------------------|---------------|-----------|
|         | (MHz)             | (MHz)         |           |
| 1       | 2412              | 6.550         | 0.5       |
| 6       | 2437              | 7.000         | 0.5       |
| 11      | 2462              | 7.000         | 0.5       |





6dB Bandwidth

<11g>

| Channel | Channel Frequency | 6dB Bandwidth | > 0.5 MHz |
|---------|-------------------|---------------|-----------|
|         | (MHz)             | (MHz)         |           |
| 1       | 2412              | 15.100        | 0.5       |
| 6       | 2437              | 15.100        | 0.5       |
| 11      | 2462              | 15.100        | 0.5       |





6dB Bandwidth

<11n>

| Channel | Channel Frequency | 6dB Bandwidth | > 0.5 MHz |
|---------|-------------------|---------------|-----------|
|         | (MHz)             | (MHz)         |           |
| 1       | 2412              | 15.100        | 0.5       |
| 6       | 2437              | 15.100        | 0.5       |
| 11      | 2462              | 15.100        | 0.5       |





99% Bandwidth

<11b>

| Channel | Channel Frequency | 99% Bandwidth |
|---------|-------------------|---------------|
|         | (MHz)             | (MHz)         |
| 1       | 2412              | 12.516        |
| 6       | 2437              | 12.518        |
| 11      | 2462              | 12.528        |








99% Bandwidth

<11g>

| Channel | Channel Frequency | 99% Bandwidth |
|---------|-------------------|---------------|
|         | (MHz)             | (MHz)         |
| 1       | 2412              | 16.628        |
| 6       | 2437              | 16.724        |
| 11      | 2462              | 16.466        |

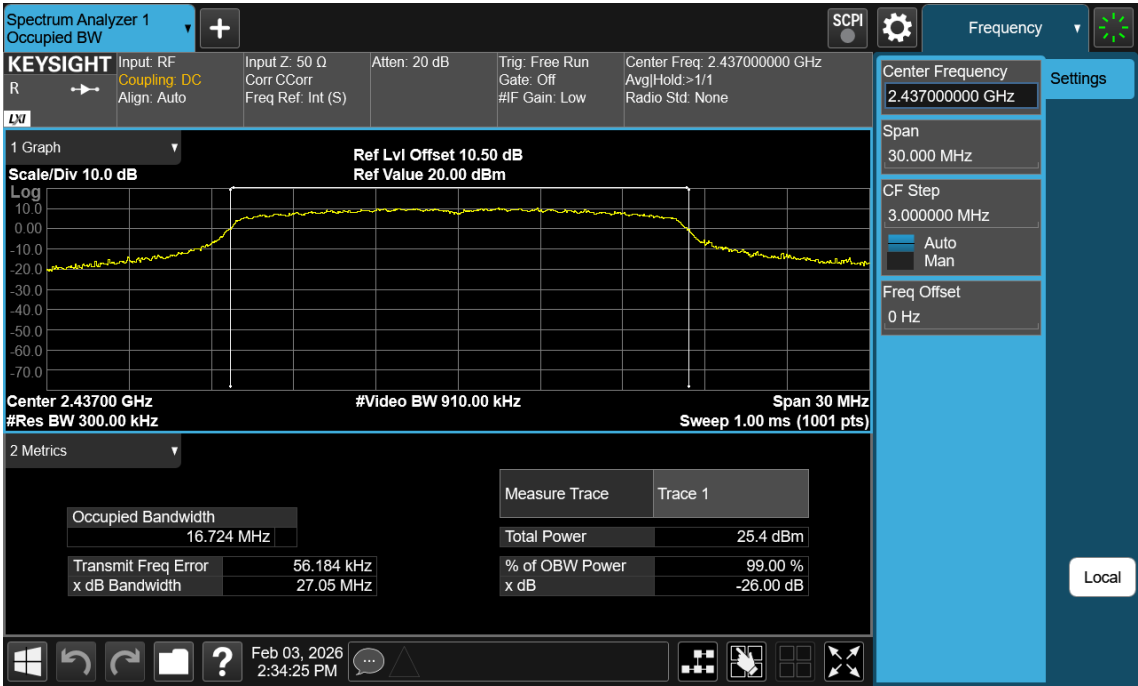




99% Bandwidth

<11n>

| Channel | Channel Frequency | 99% Bandwidth |
|---------|-------------------|---------------|
|         | (MHz)             | (MHz)         |
| 1       | 2412              | 17.617        |
| 6       | 2437              | 17.682        |
| 11      | 2462              | 17.625        |

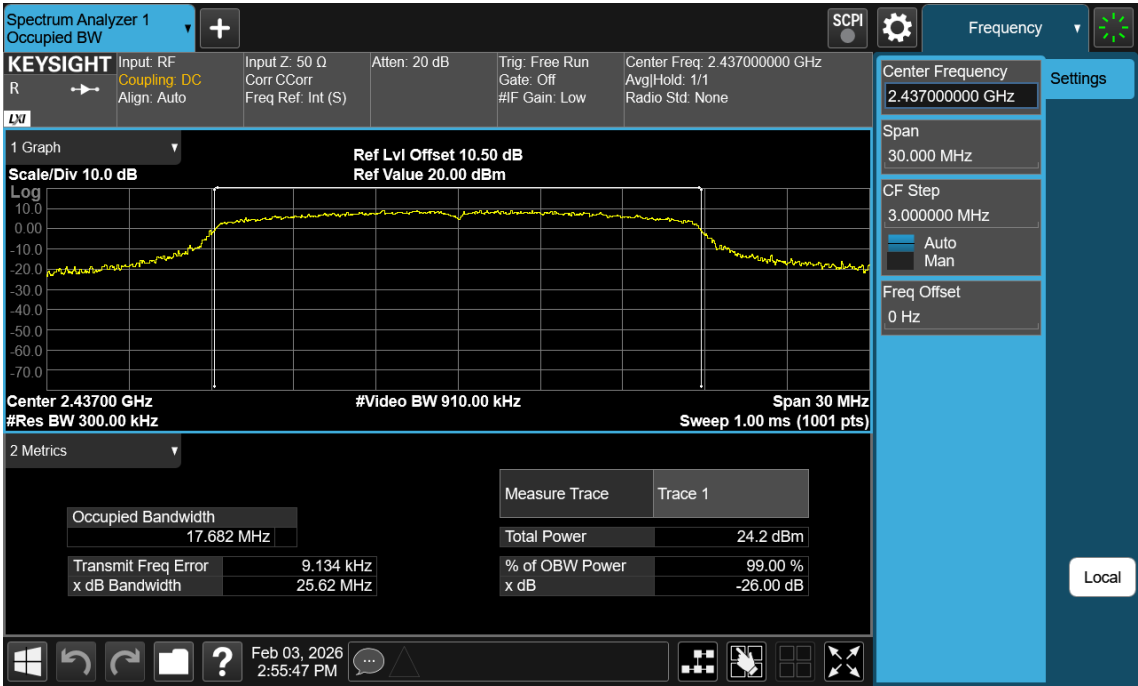

Only the worst-case plots are presented herein. all of which were found to be in compliance with the rule.



Appendix E Peak Power Spectral Density

Power Density

<11b>

| Channel | Channel Frequency | Power Density | Limit (dBm/3kHz) |
|---------|-------------------|---------------|------------------|
|         | (MHz)             | (dBm/3kHz)    |                  |
| 1       | 2412              | -3.942        | 8                |
| 6       | 2437              | -3.744        | 8                |
| 11      | 2462              | -4.145        | 8                |






Power Density

<11g>

| Channel | Channel Frequency | Power Density | Limit (dBm/3kHz) |
|---------|-------------------|---------------|------------------|
|         | (MHz)             | (dBm/3kHz)    |                  |
| 1       | 2412              | -7.623        | 8                |
| 6       | 2437              | -6.314        | 8                |
| 11      | 2462              | -8.894        | 8                |

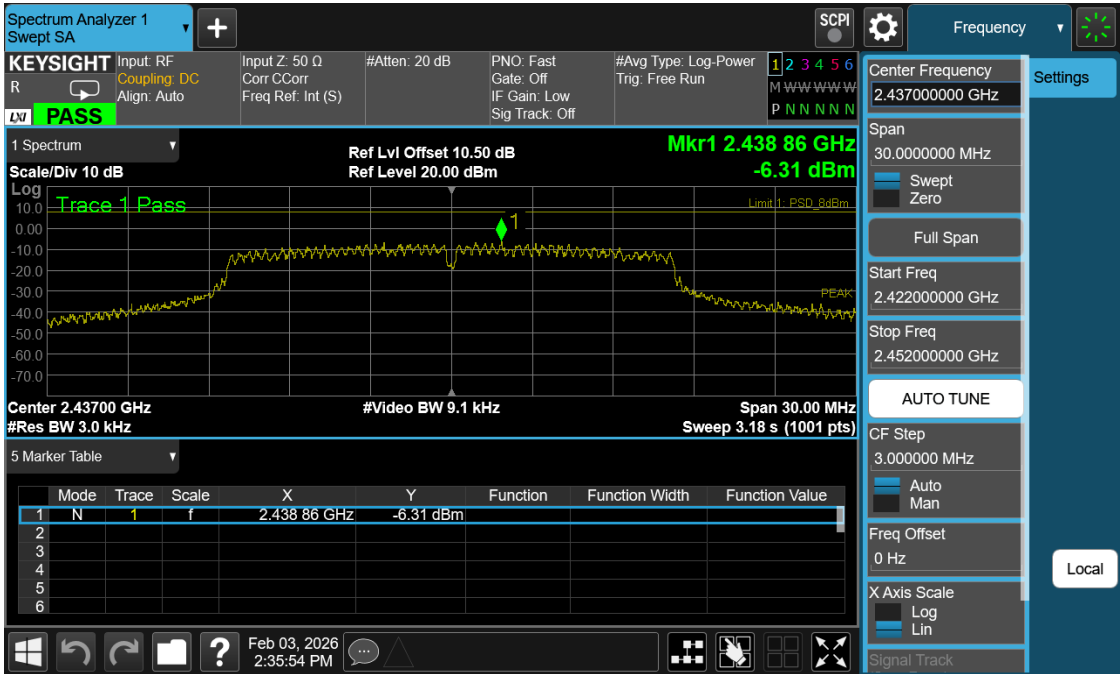




Power Density

<11n>

| Channel | Channel Frequency | Power Density | Limit (dBm/3kHz) |
|---------|-------------------|---------------|------------------|
|         | (MHz)             | (dBm/3kHz)    |                  |
| 1       | 2412              | -8.978        | 8                |
| 6       | 2437              | -6.116        | 8                |
| 11      | 2462              | -10.641       | 8                |

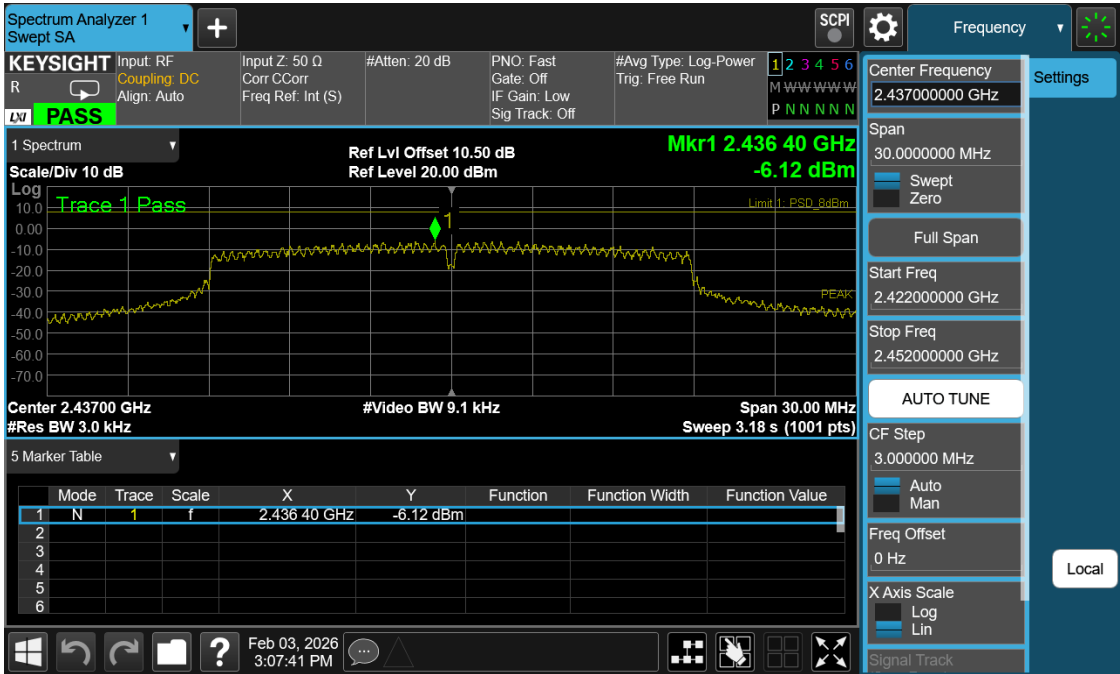

Cable loss has been offset in the measurement result.  
Only the worst-case plots are presented herein  
The 802.11b mode was found to be the worst-case after a full scan of all operating modes, all of which were found to be in compliance with the rule



Appendix F. Conducted Spurious Emission

Reference <11b>

<Lowest Channel>



<Middle Channel>






< Highest Channel >





Reference <11g>

<Lowest Channel>

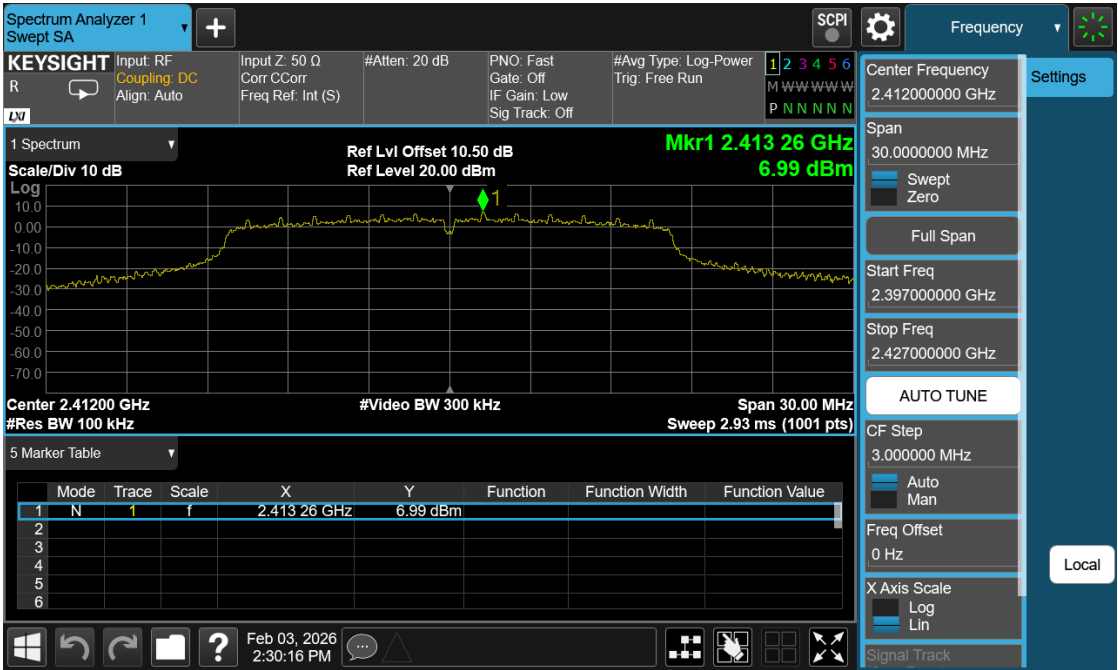


<Middle Channel>








< Highest Channel >

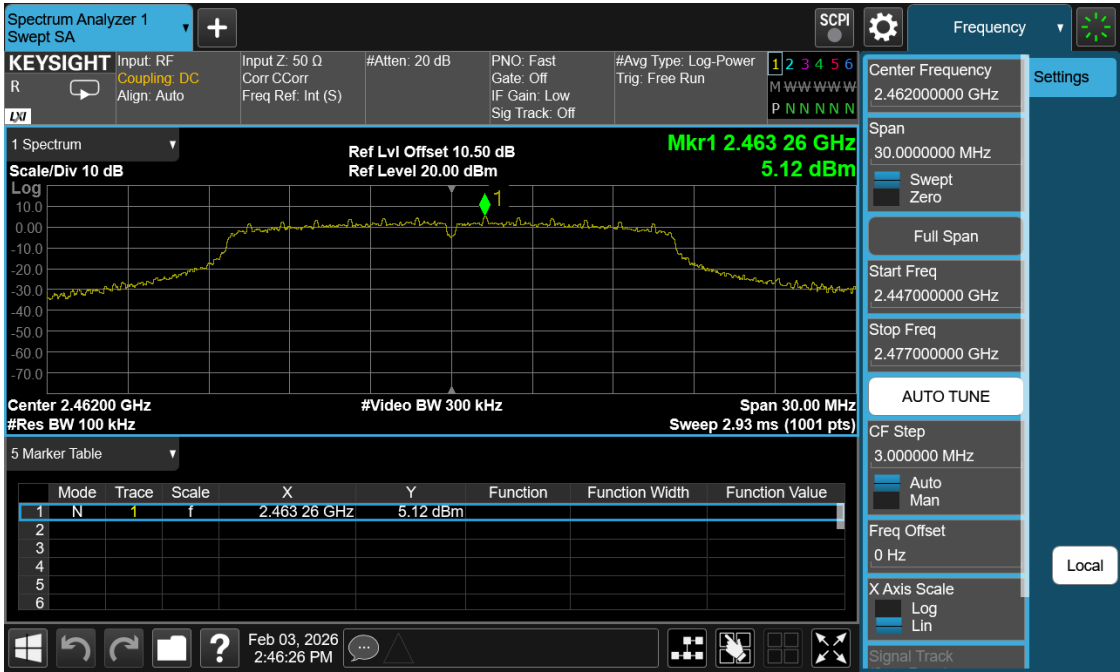




Reference <11n20>

<Lowest Channel>

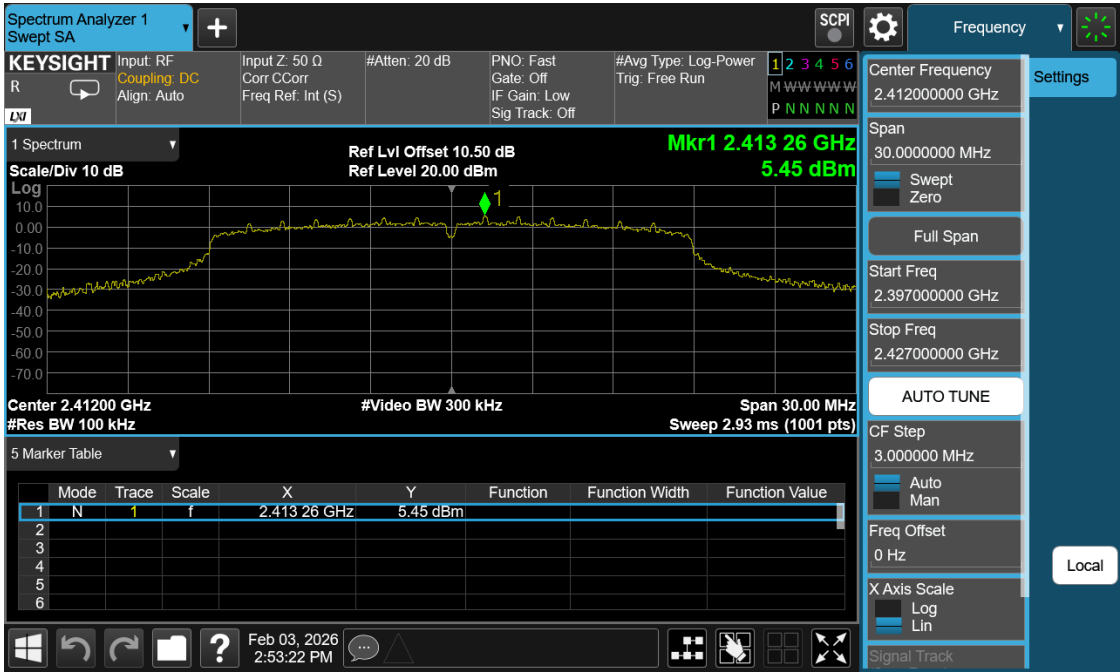


<Middle Channel>

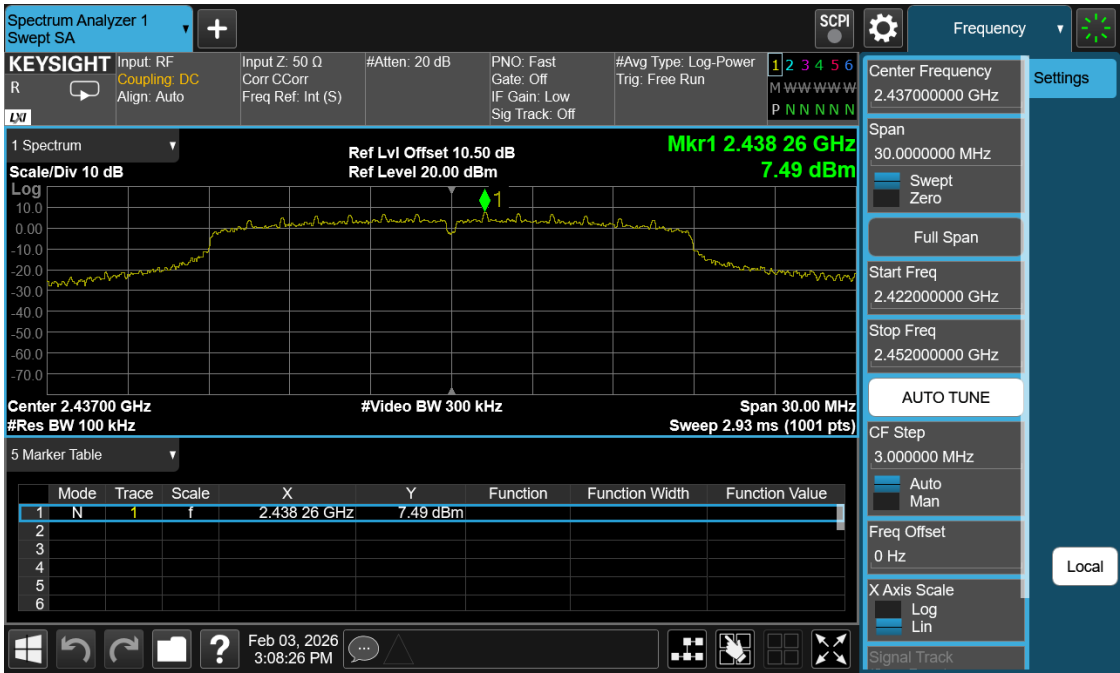



< Highest Channel >

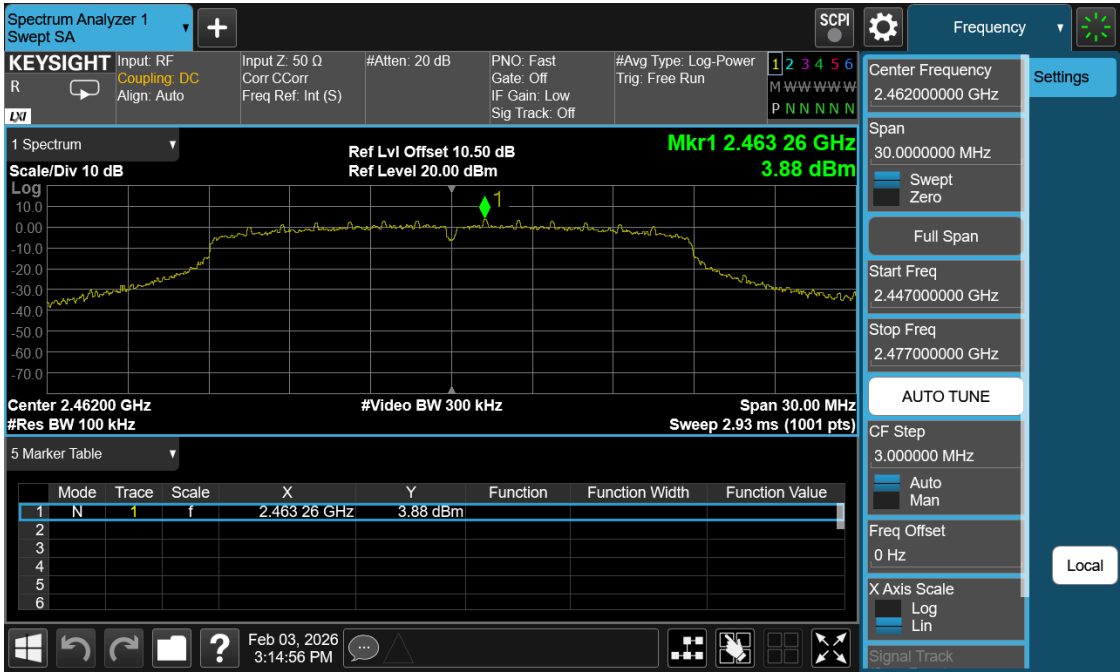



Band Edges<11b>

<Lowest Channel>




<Highest Channel>






Band Edges<11g>

<Lowest Channel>

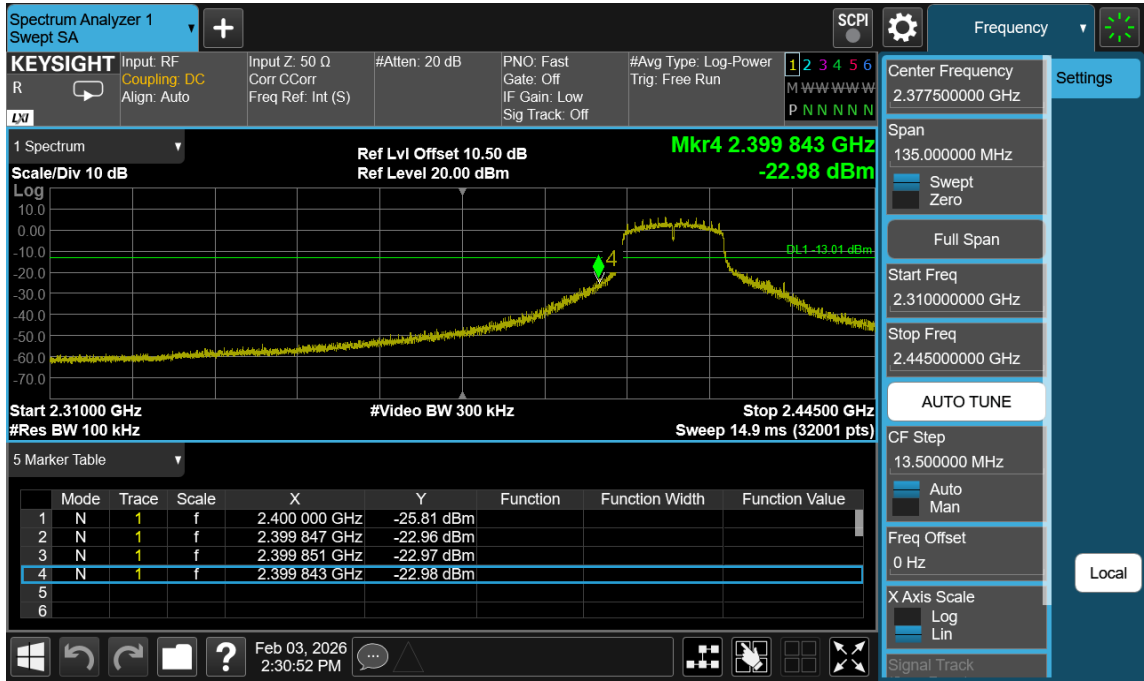


<Highest Channel>

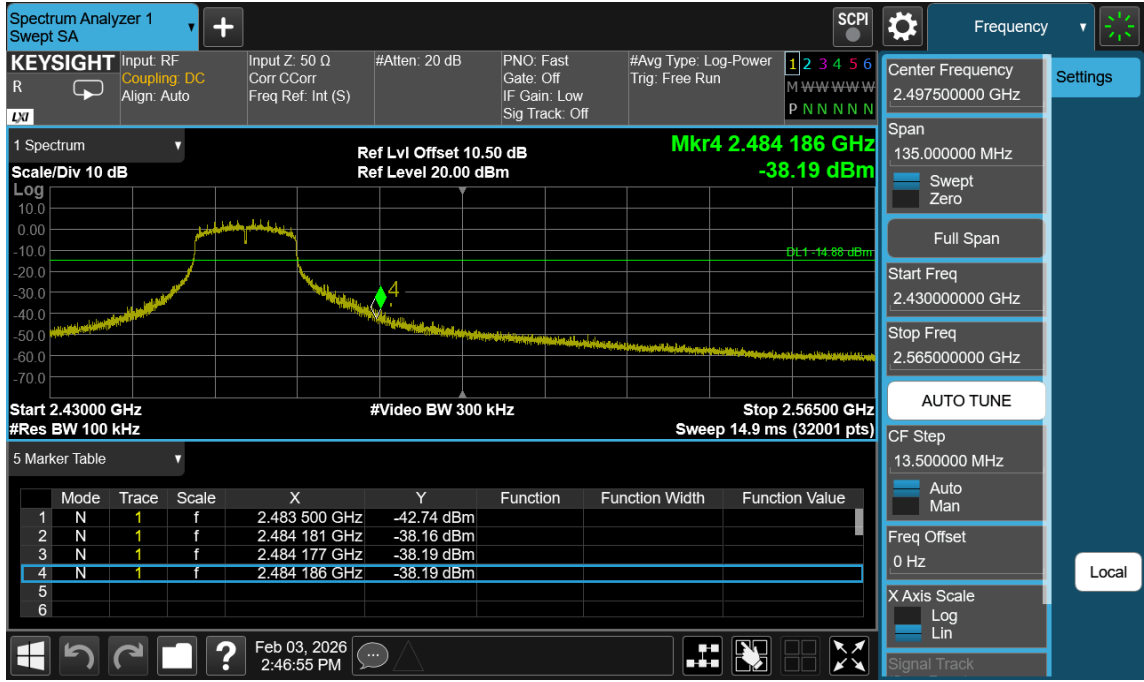



Band Edges<11n20>

<Lowest Channel>

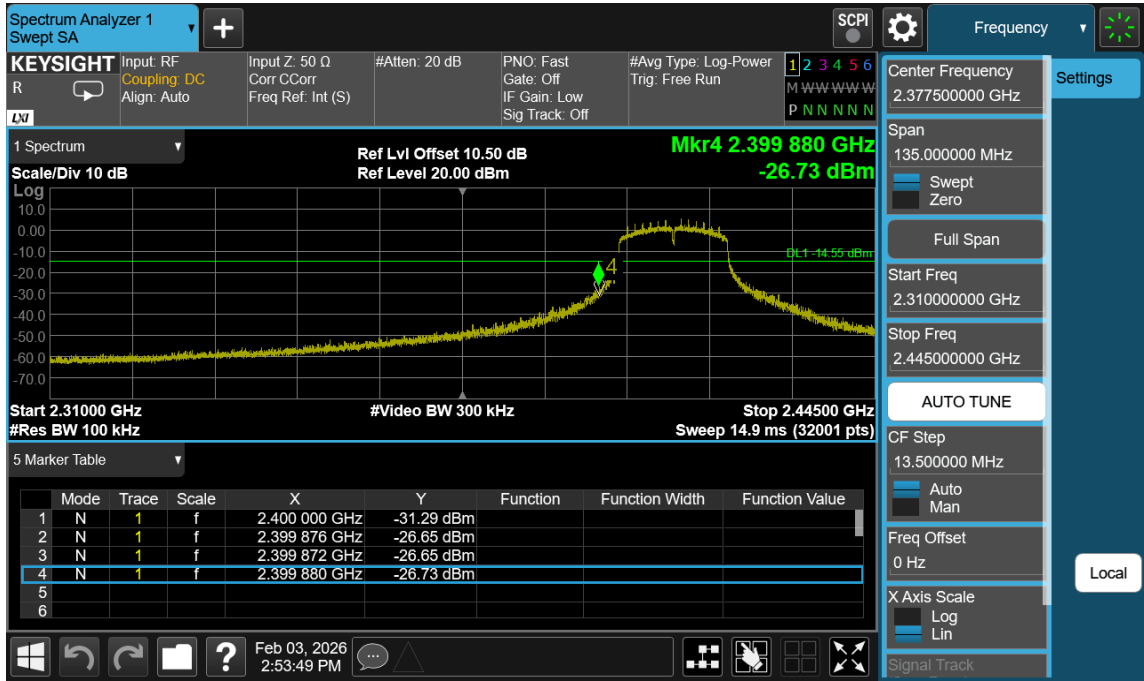


<Highest Channel>






Conducted Spurious Emissions<11b>

<Lowest Channel>

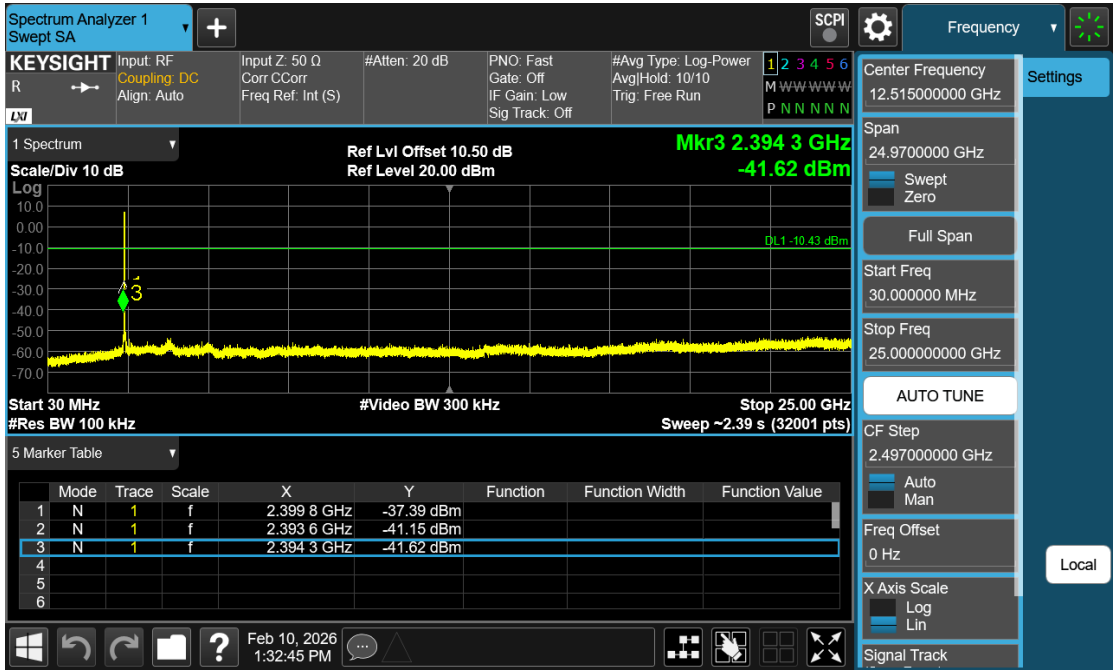


<Middle Channel>

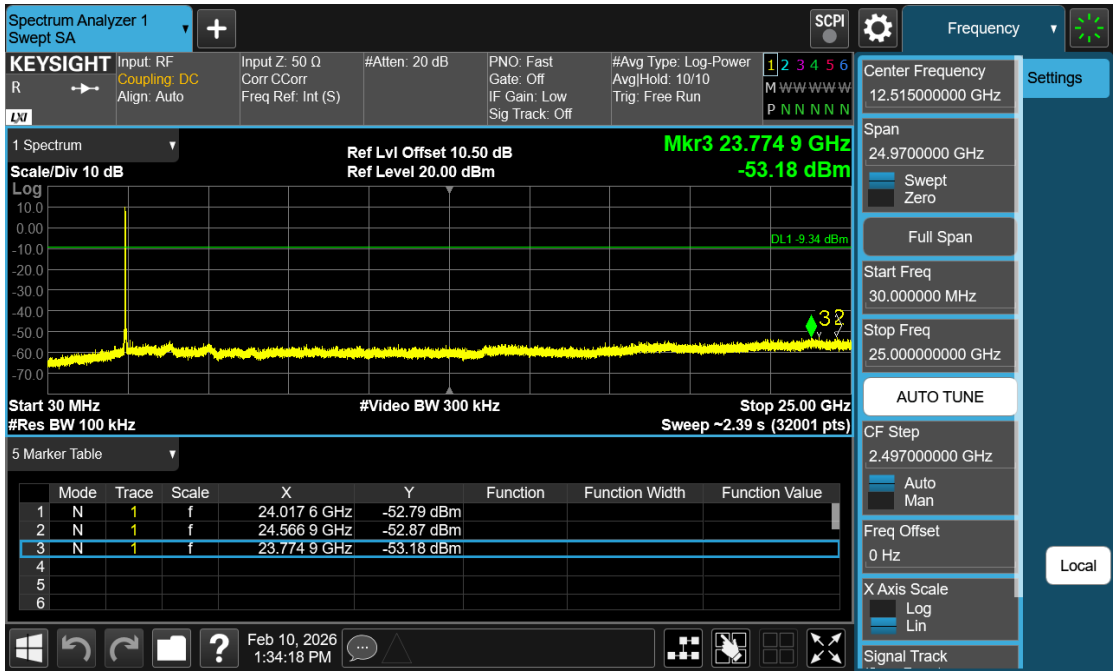



< Highest Channel >

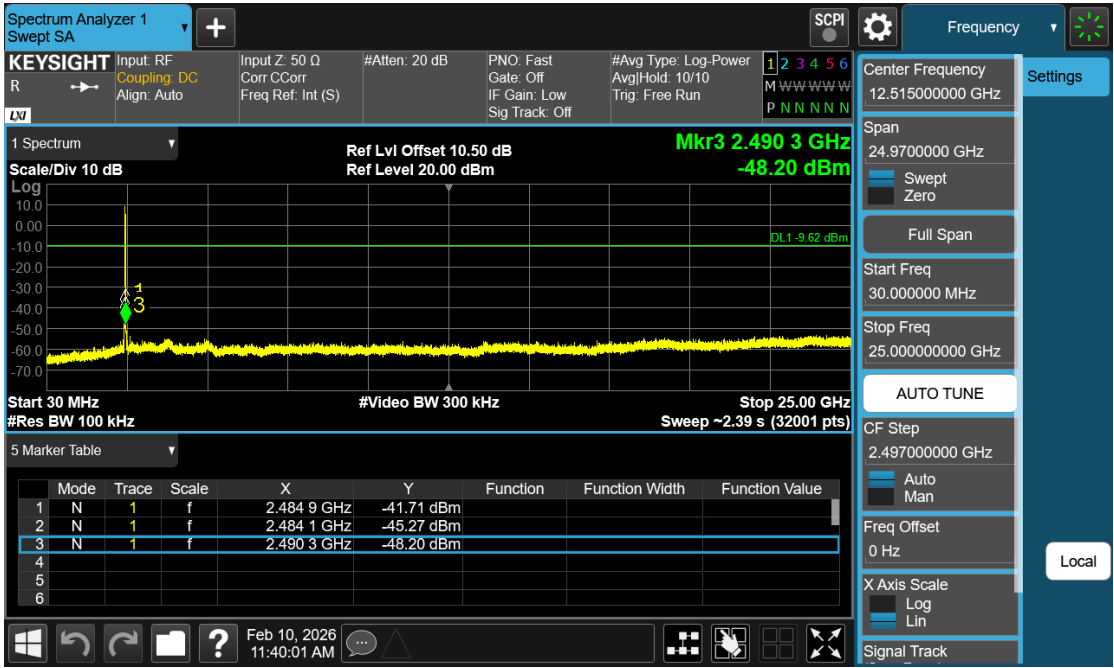







Conducted Spurious Emissions<11g>

<Lowest Channel>

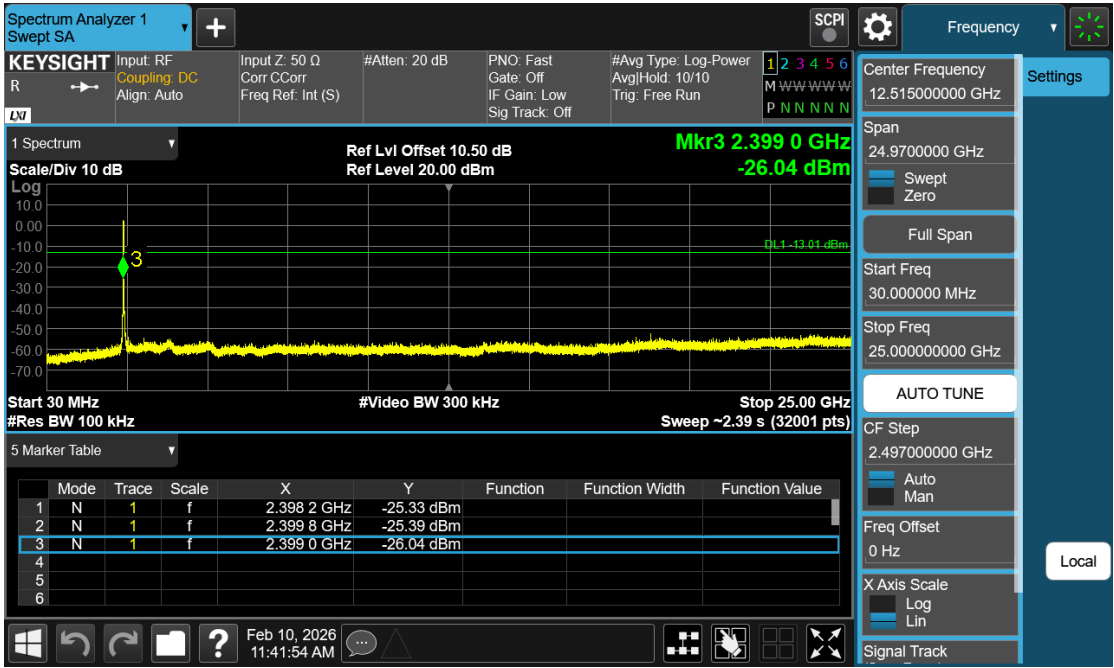


<Middle Channel>

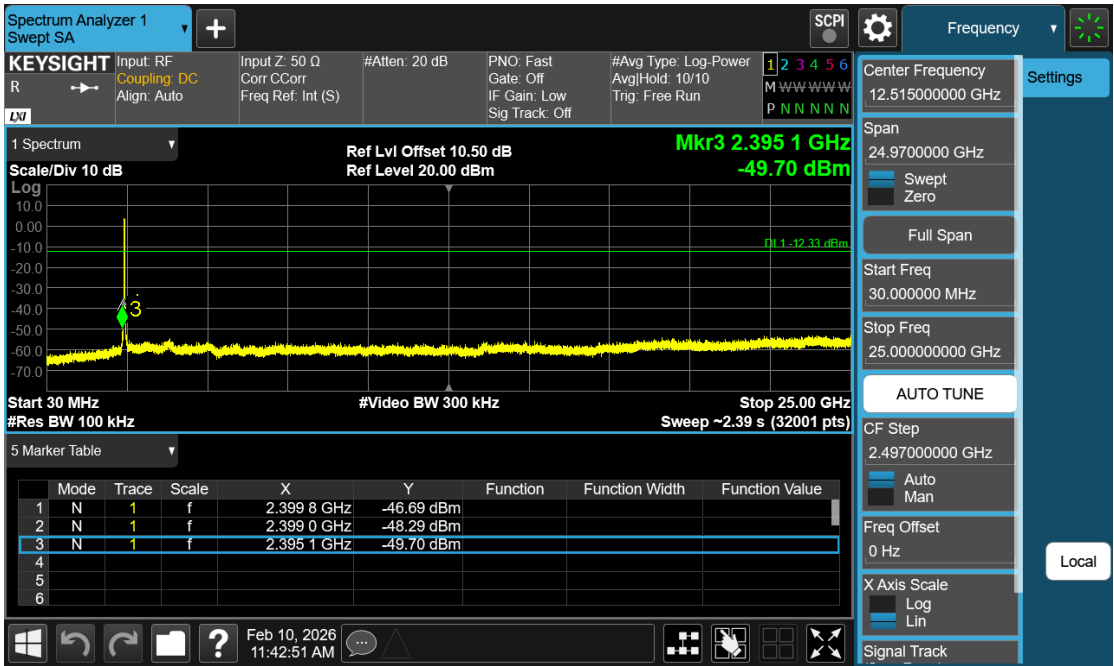




< Highest Channel >

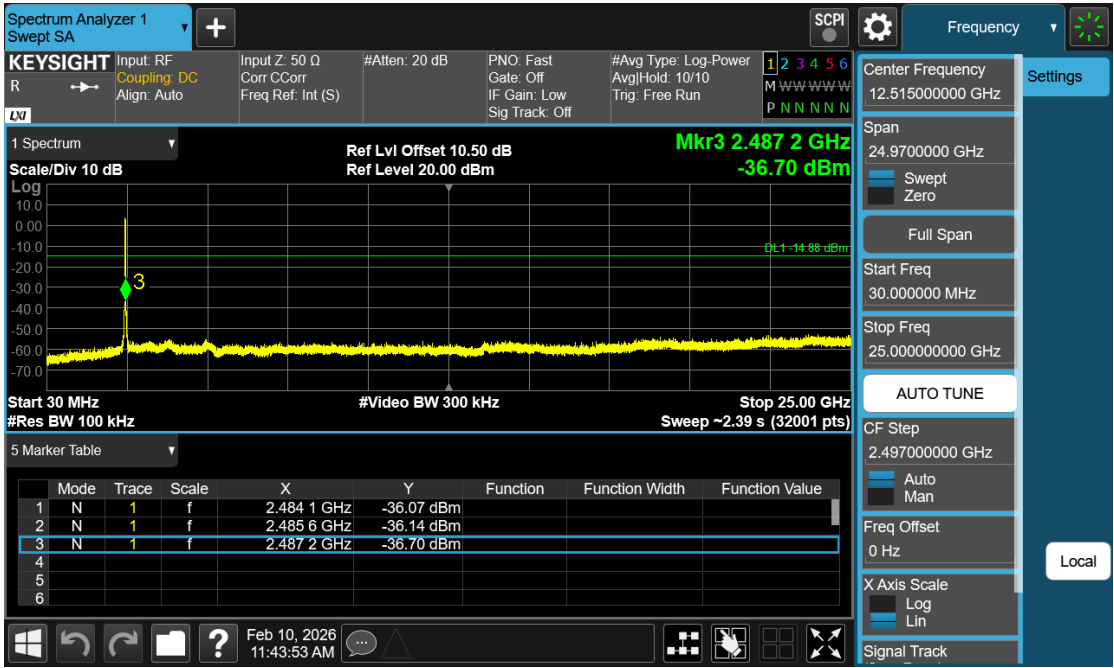




Conducted Spurious Emissions<11n20>

<Lowest Channel>

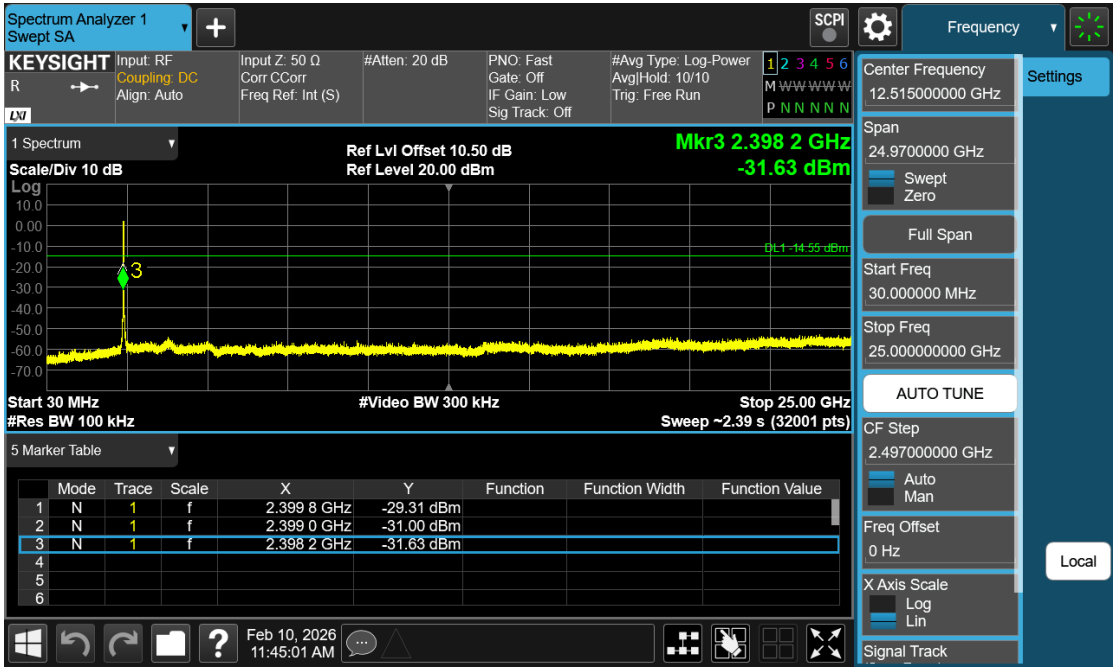


<Middle Channel>

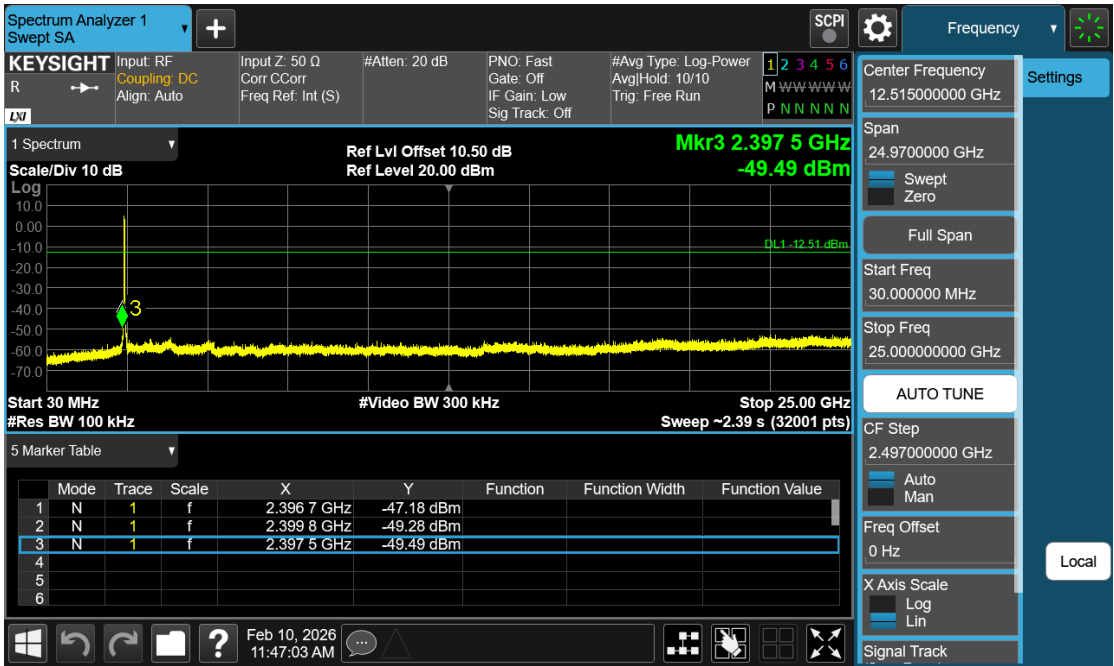




< Highest Channel >

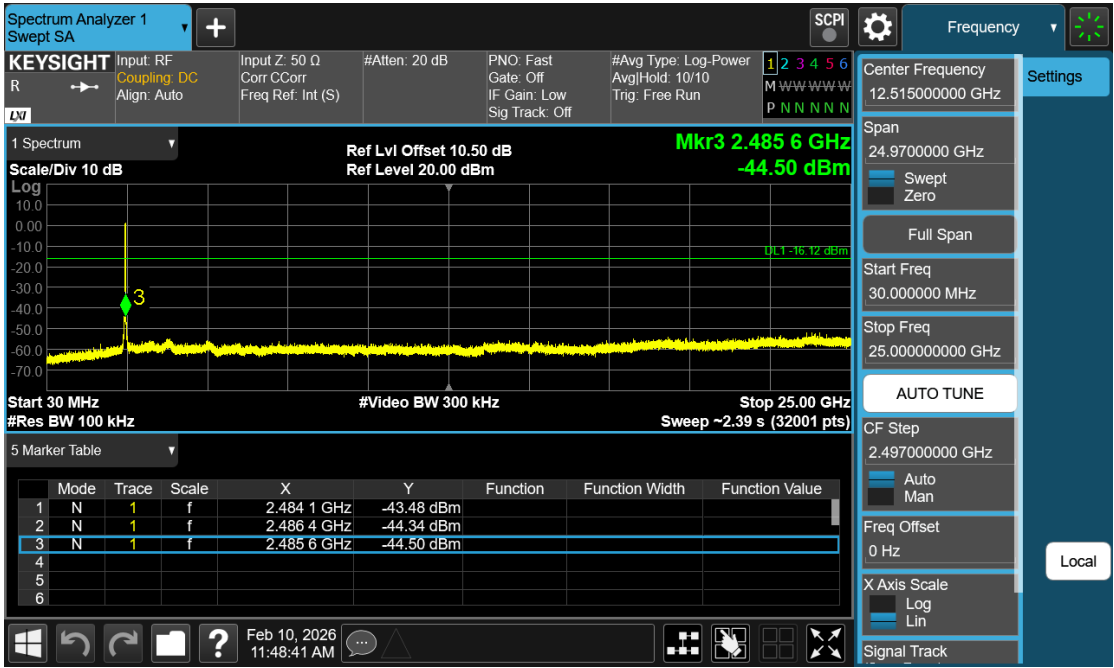



Appendix G. Radiated Spurious Emissions and Band Edges


|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

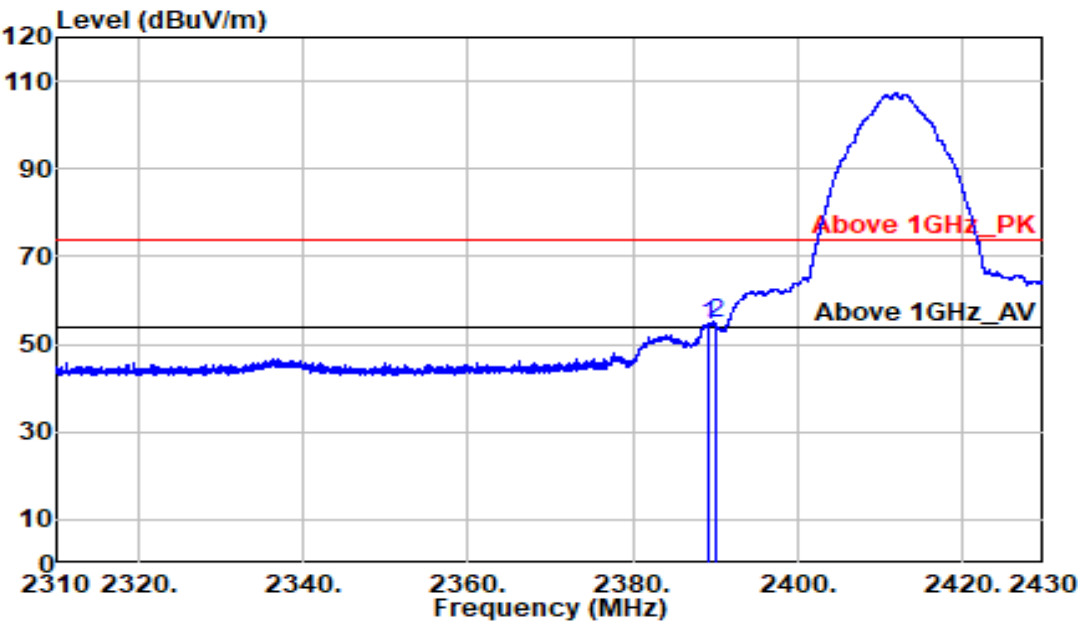

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.170 | 65.75 | -11.39 | 54.36    | 74.00  | -19.64 | Peak     | 216  | 42   |
| 2390.000 | 66.13 | -11.39 | 54.74    | 74.00  | -19.26 | Peak     | 216  | 42   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

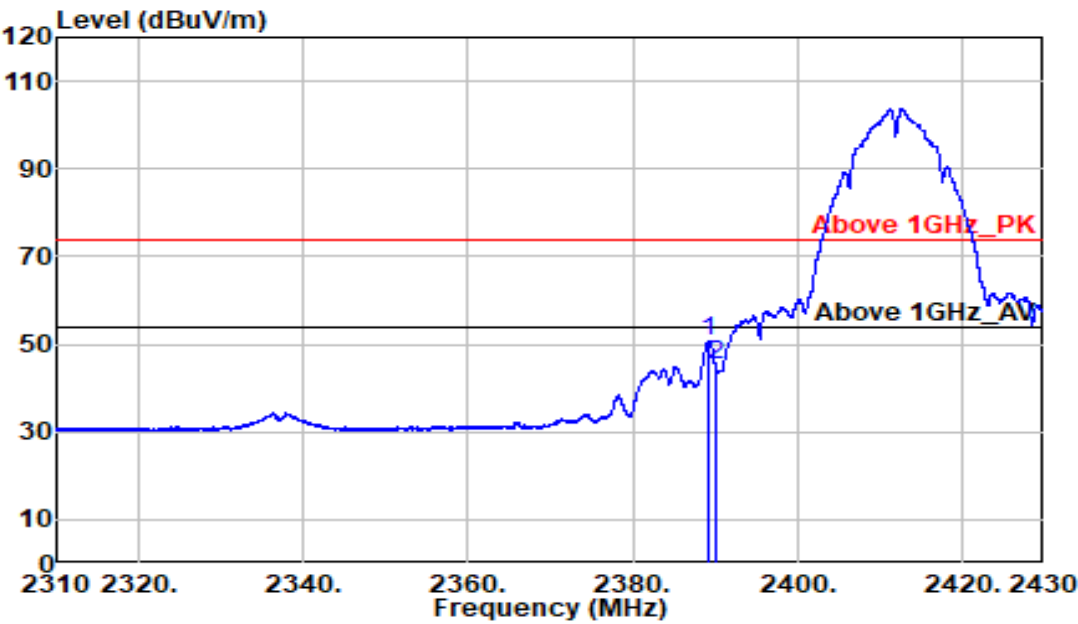

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.170 | 62.22 | -11.39 | 50.83    | 54.00  | -3.17  | Average  | 216  | 42   |
| 2390.000 | 56.52 | -11.39 | 45.13    | 54.00  | -8.87  | Average  | 216  | 42   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

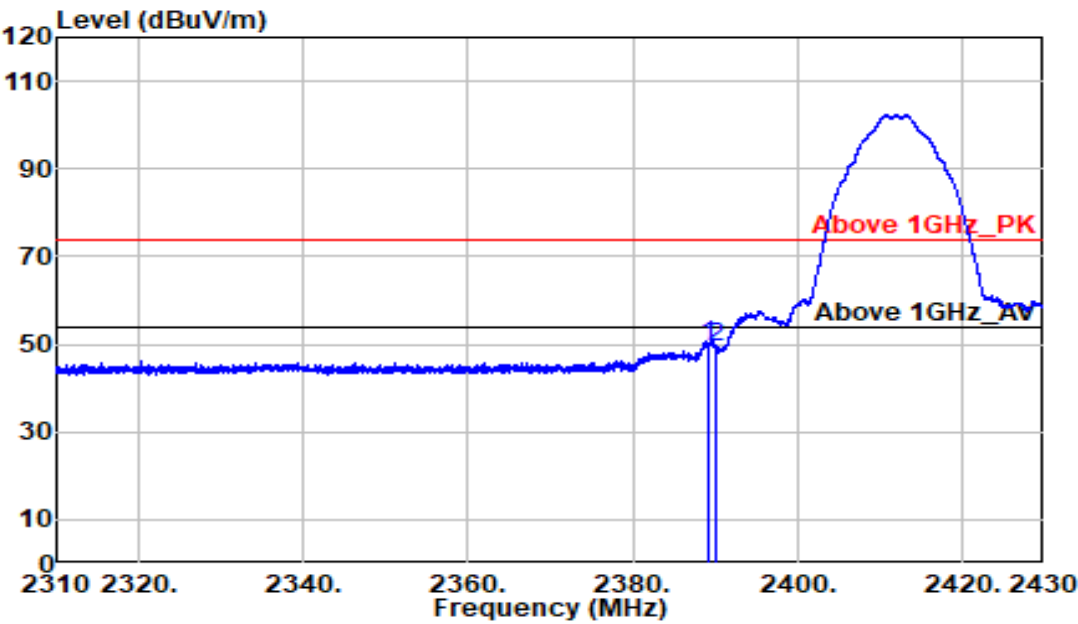

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.140 | 61.31 | -11.39 | 49.92    | 74.00  | -24.08 | Peak     | 111  | 312  |
| 2390.000 | 60.88 | -11.39 | 49.49    | 74.00  | -24.51 | Peak     | 111  | 312  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

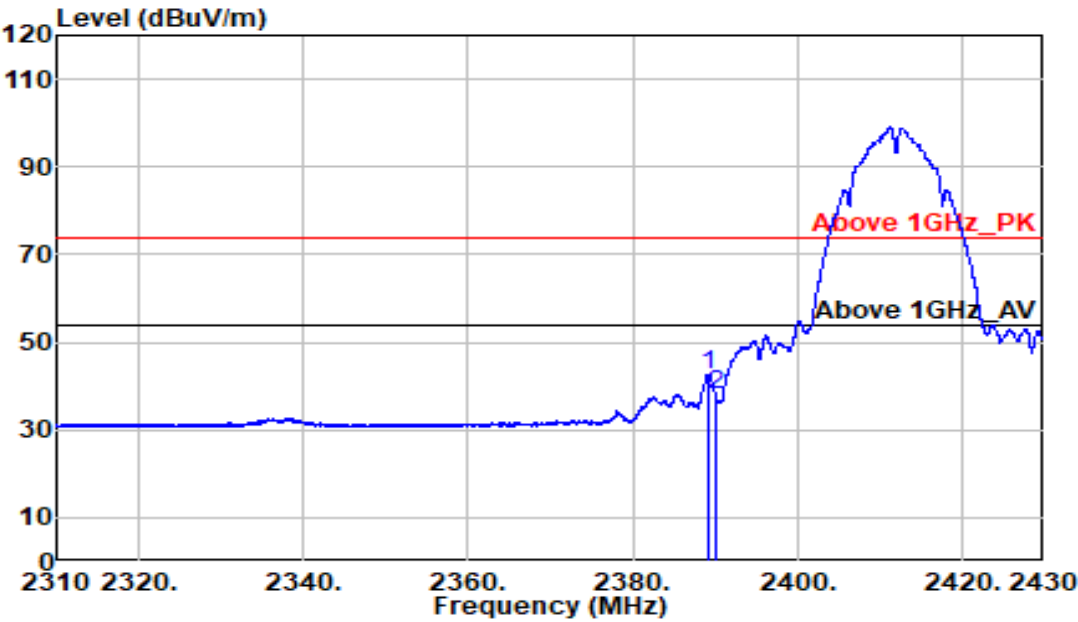


| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.140 | 54.16 | -11.39 | 42.77    | 54.00  | -11.23 | Average  | 111  | 312  |
| 2390.000 | 49.45 | -11.39 | 38.06    | 54.00  | -15.94 | Average  | 111  | 312  |






|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

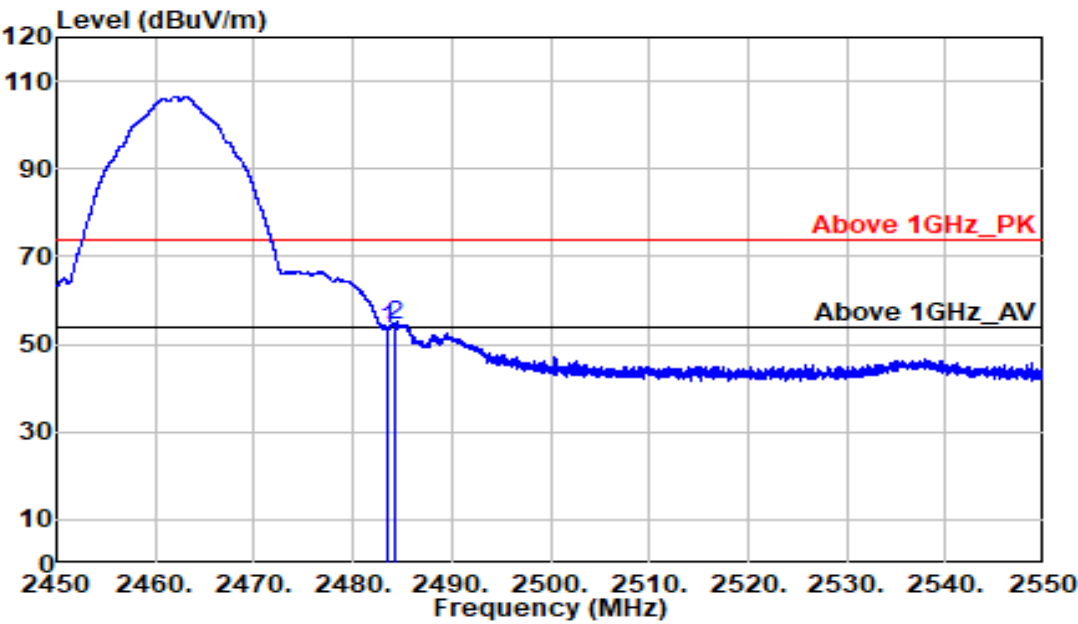

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 64.82 | -11.17 | 53.65    | 74.00  | -20.35 | Peak     | 244  | 51   |
| 2484.300 | 65.54 | -11.17 | 54.37    | 74.00  | -19.63 | Peak     | 244  | 51   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

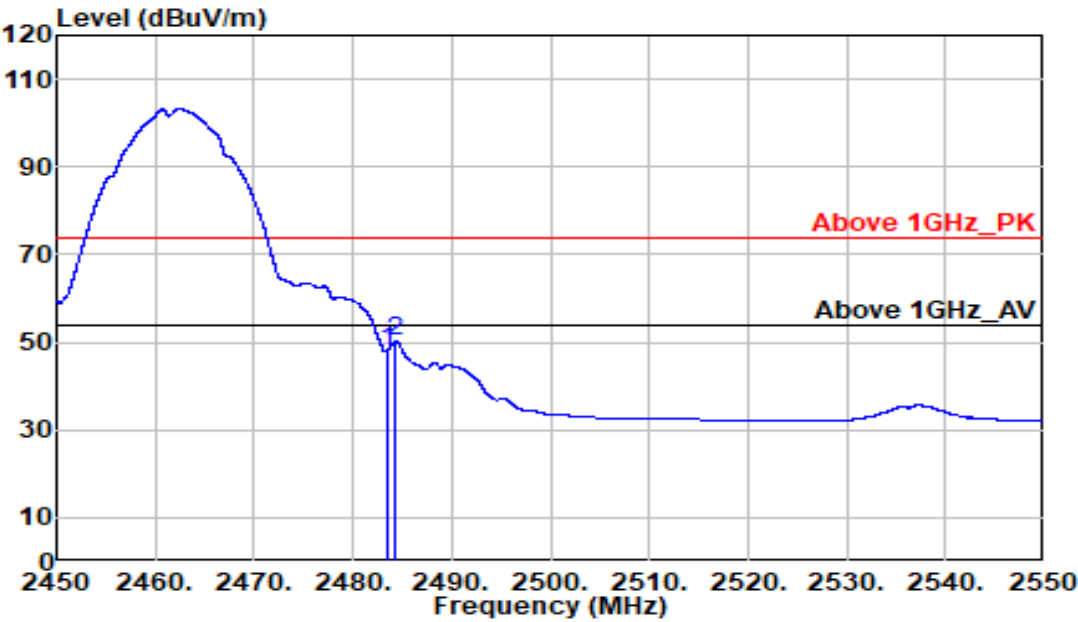

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 59.22 | -11.17 | 48.05    | 54.00  | -5.95  | Average  | 244  | 51   |
| 2484.325 | 61.39 | -11.17 | 50.22    | 54.00  | -3.78  | Average  | 244  | 51   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

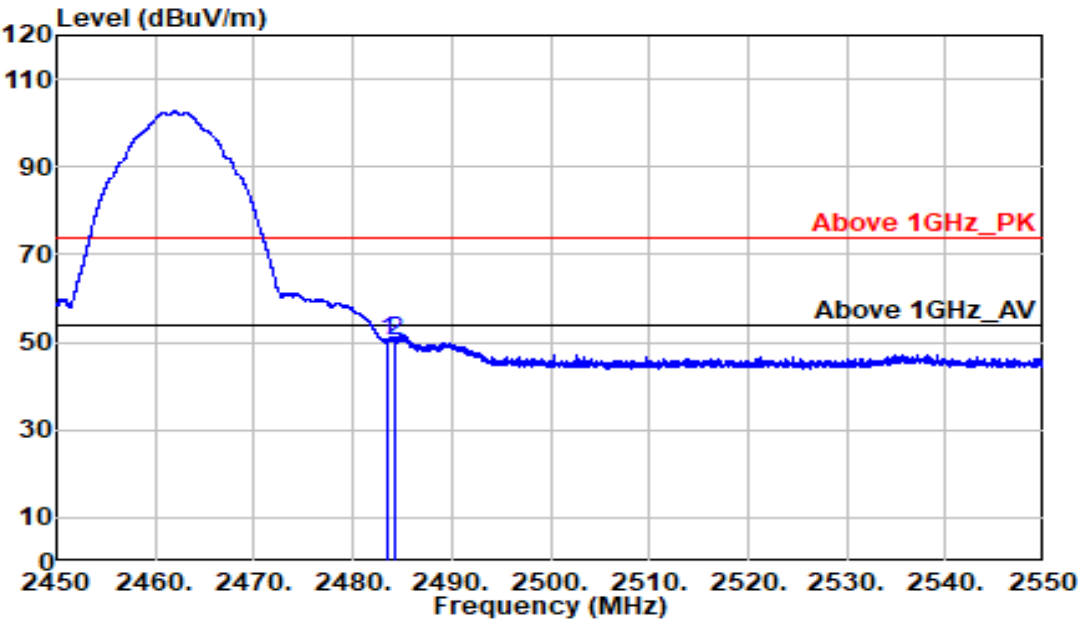

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 61.23 | -11.17 | 50.07    | 74.00  | -23.93 | Peak     | 297  | 342  |
| 2484.225 | 61.60 | -11.17 | 50.43    | 74.00  | -23.57 | Peak     | 297  | 342  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

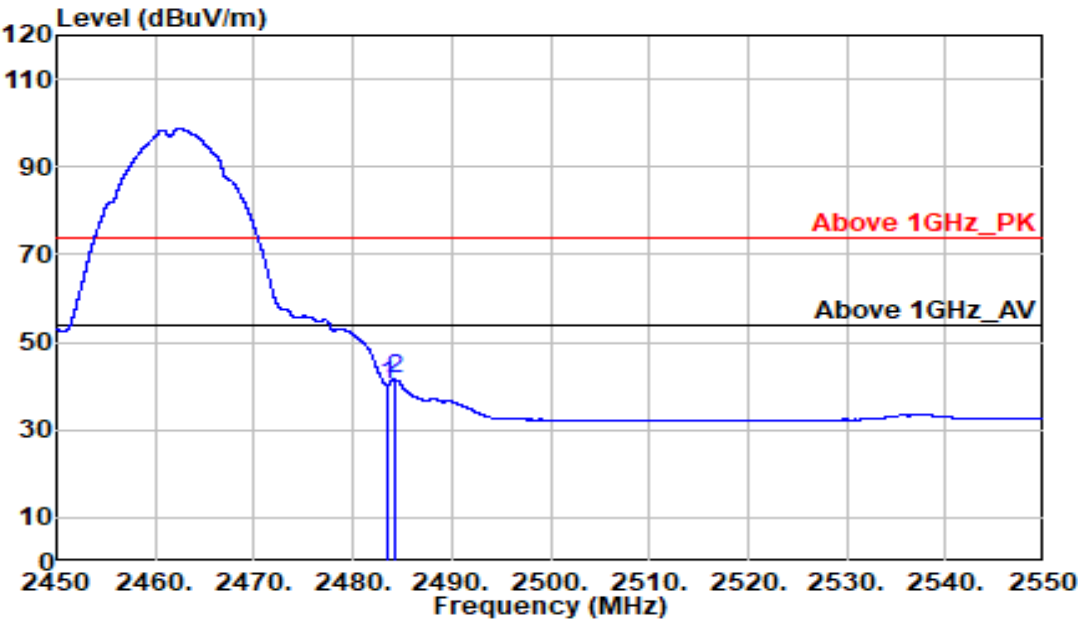

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 51.46 | -11.17 | 40.29    | 54.00  | -13.71 | Average  | 297  | 342  |
| 2484.225 | 52.67 | -11.17 | 41.50    | 54.00  | -12.50 | Average  | 297  | 342  |


|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

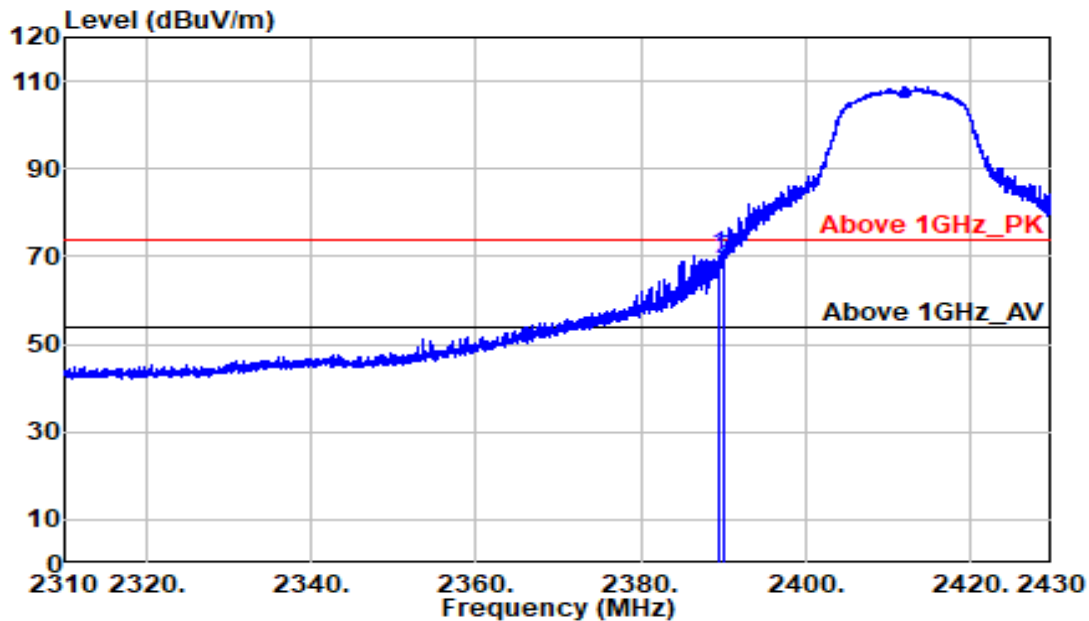

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.410 | 81.66 | -11.39 | 70.27    | 74.00  | -3.73  | Peak     | 217  | 47   |
| 2390.000 | 80.71 | -11.39 | 69.32    | 74.00  | -4.68  | Peak     | 217  | 47   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

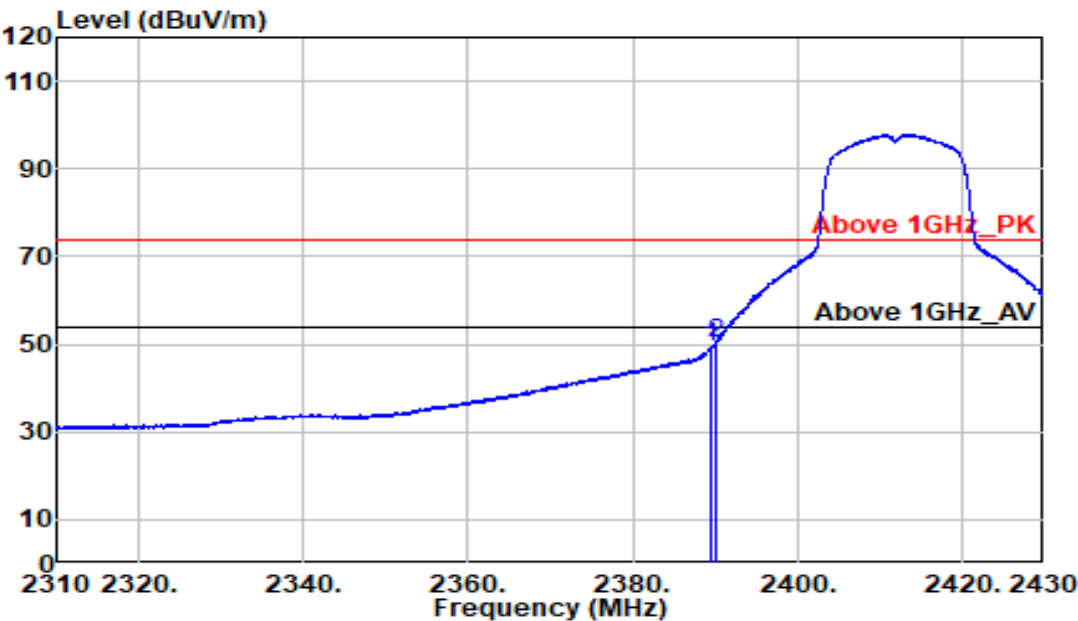

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.410 | 60.60 | -11.39 | 49.21    | 54.00  | -4.79  | Average  | 217  | 47   |
| 2390.000 | 61.73 | -11.39 | 50.34    | 54.00  | -3.66  | Average  | 217  | 47   |


|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

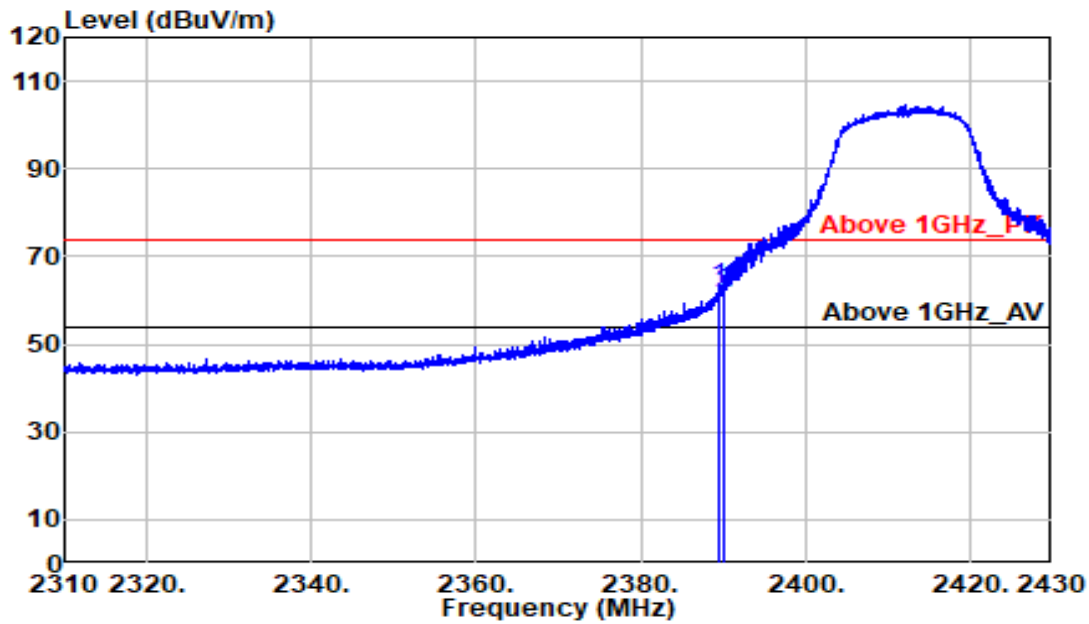

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.440 | 74.34 | -11.39 | 62.95    | 74.00  | -11.05 | Peak     | 100  | 314  |
| 2390.000 | 72.85 | -11.39 | 61.46    | 74.00  | -12.54 | Peak     | 100  | 314  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

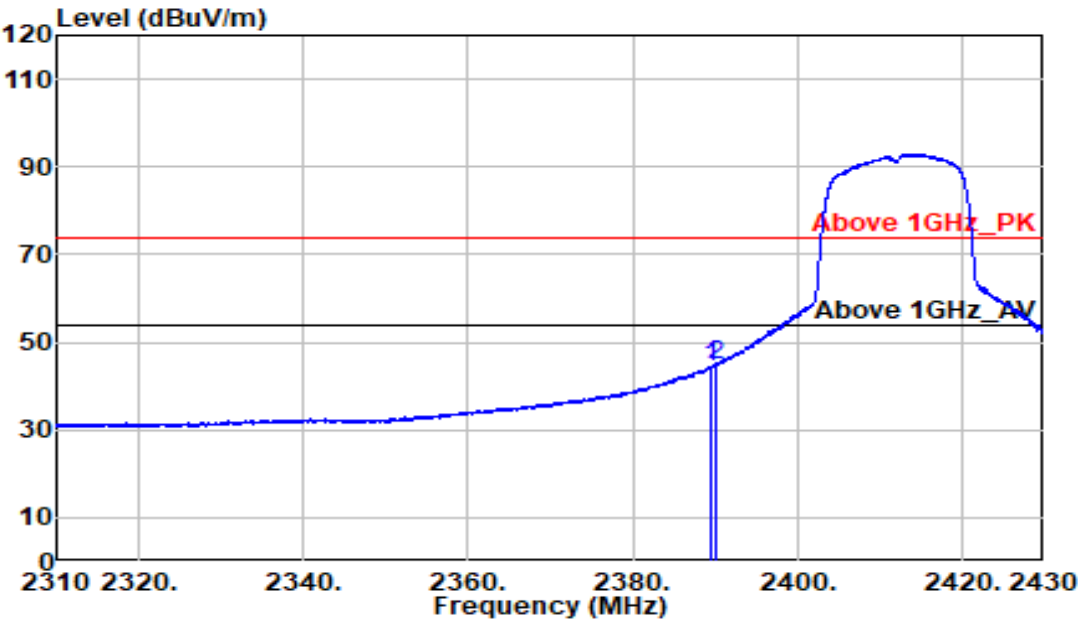


| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.440 | 55.60 | -11.39 | 44.21    | 54.00  | -9.79  | Average  | 100  | 314  |
| 2390.000 | 56.28 | -11.39 | 44.89    | 54.00  | -9.11  | Average  | 100  | 314  |






|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

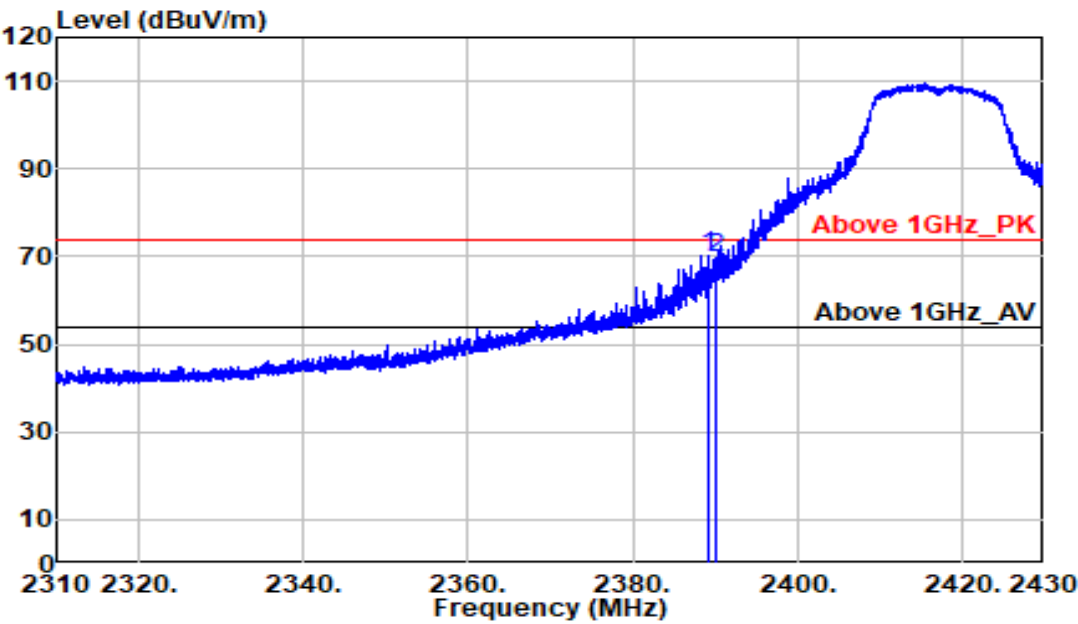

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.260 | 81.72 | -11.39 | 70.33    | 74.00  | -3.67  | Peak     | 217  | 60   |
| 2390.000 | 81.25 | -11.39 | 69.86    | 74.00  | -4.14  | Peak     | 217  | 60   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

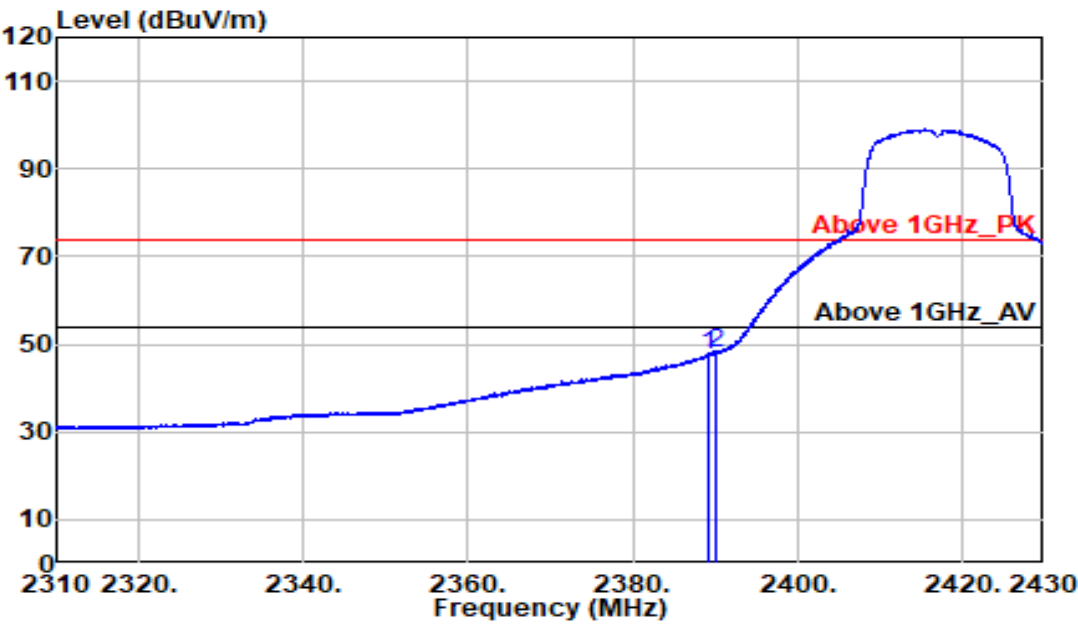

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.260 | 58.95 | -11.39 | 47.56    | 54.00  | -6.44  | Average  | 217  | 60   |
| 2390.000 | 59.34 | -11.39 | 47.95    | 54.00  | -6.05  | Average  | 217  | 60   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

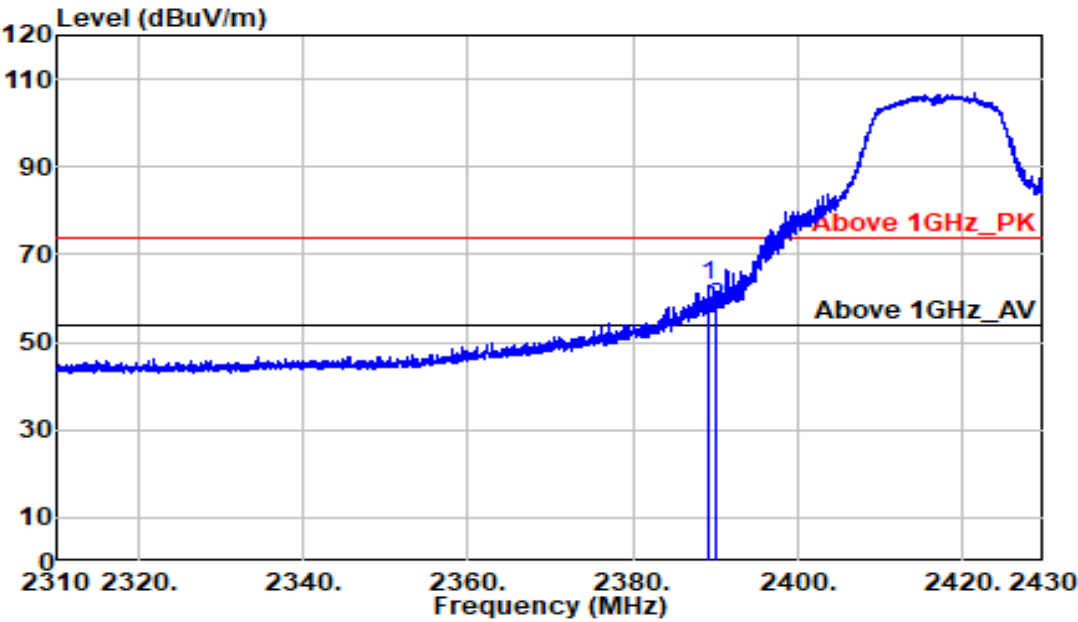

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.260 | 74.21 | -11.39 | 62.82    | 74.00  | -11.18 | Peak     | 219  | 204  |
| 2390.000 | 69.16 | -11.39 | 57.77    | 74.00  | -16.23 | Peak     | 219  | 204  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

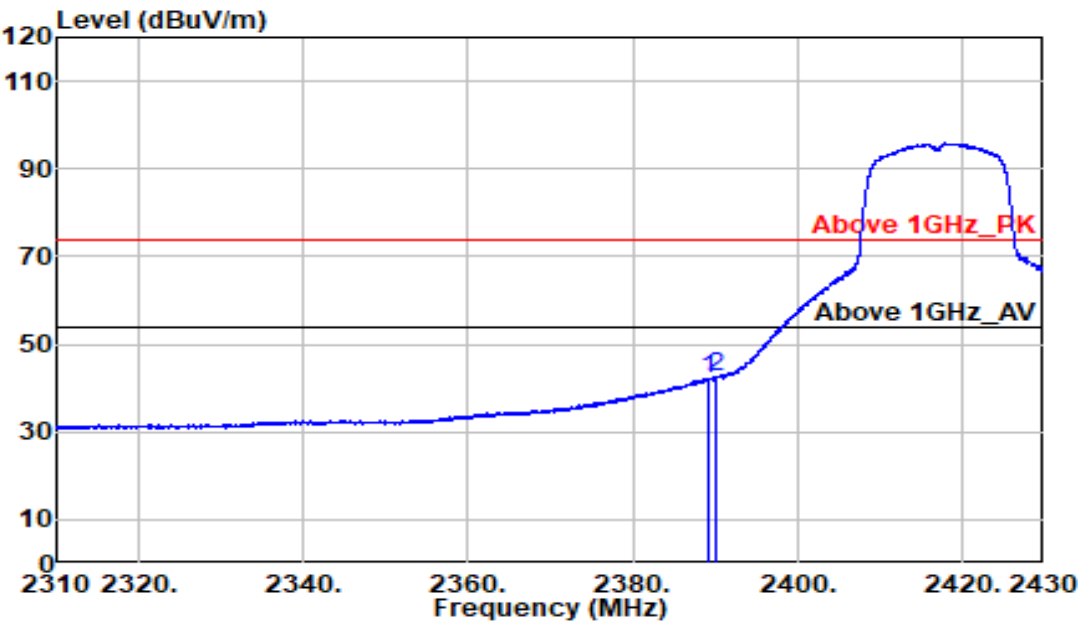

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       |        | dB     | PK/QP/AV | CM   | DEG  |
|          | dBuV  |        | dBuV/m   | dBuV/m |        |          |      |      |
| 2389.260 | 53.42 | -11.39 | 42.03    | 54.00  | -11.97 | Average  | 219  | 204  |
| 2390.000 | 53.98 | -11.39 | 42.59    | 54.00  | -11.41 | Average  | 219  | 204  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

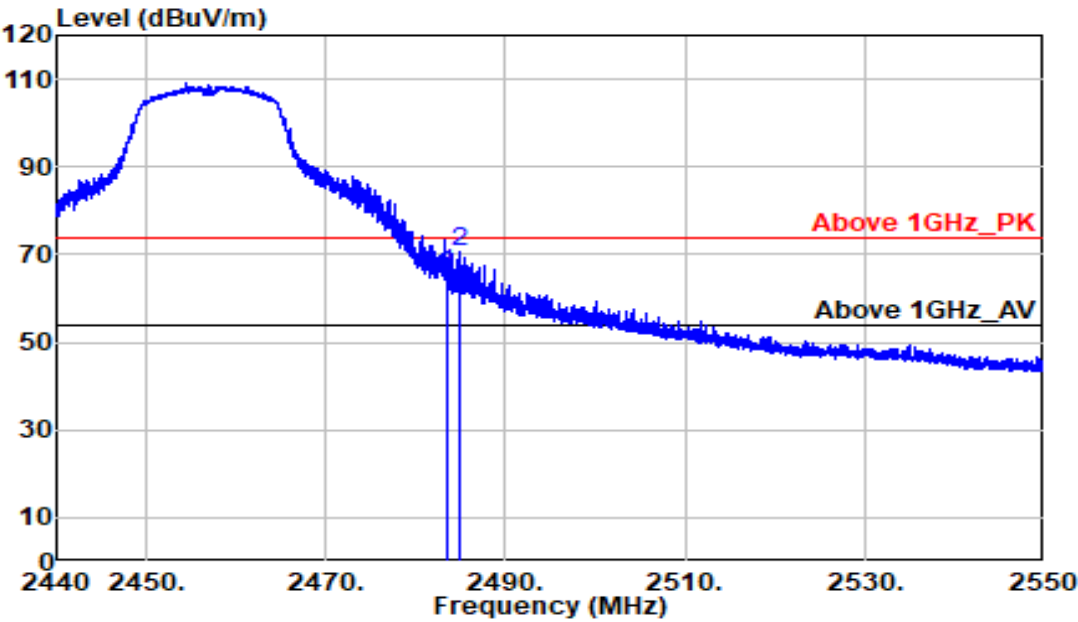

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 76.90 | -11.17 | 65.74    | 74.00  | -8.26  | Peak     | 245  | 52   |
| 2484.935 | 81.63 | -11.17 | 70.47    | 74.00  | -3.53  | Peak     | 245  | 52   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

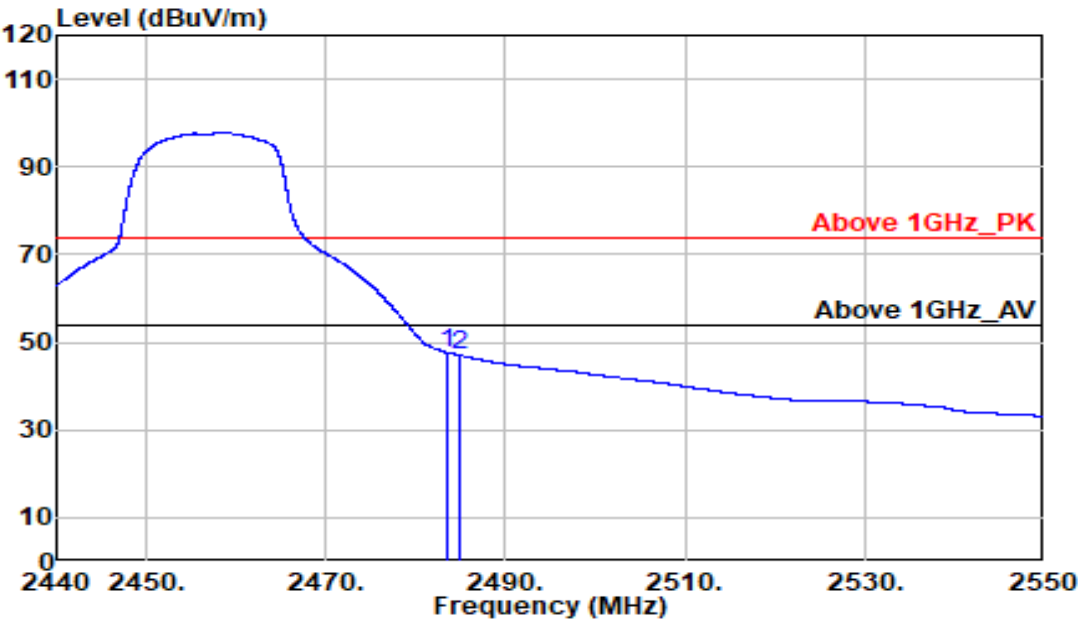

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 58.86 | -11.17 | 47.69    | 54.00  | -6.31  | Average  | 245  | 52   |
| 2484.935 | 58.21 | -11.17 | 47.04    | 54.00  | -6.96  | Average  | 245  | 52   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

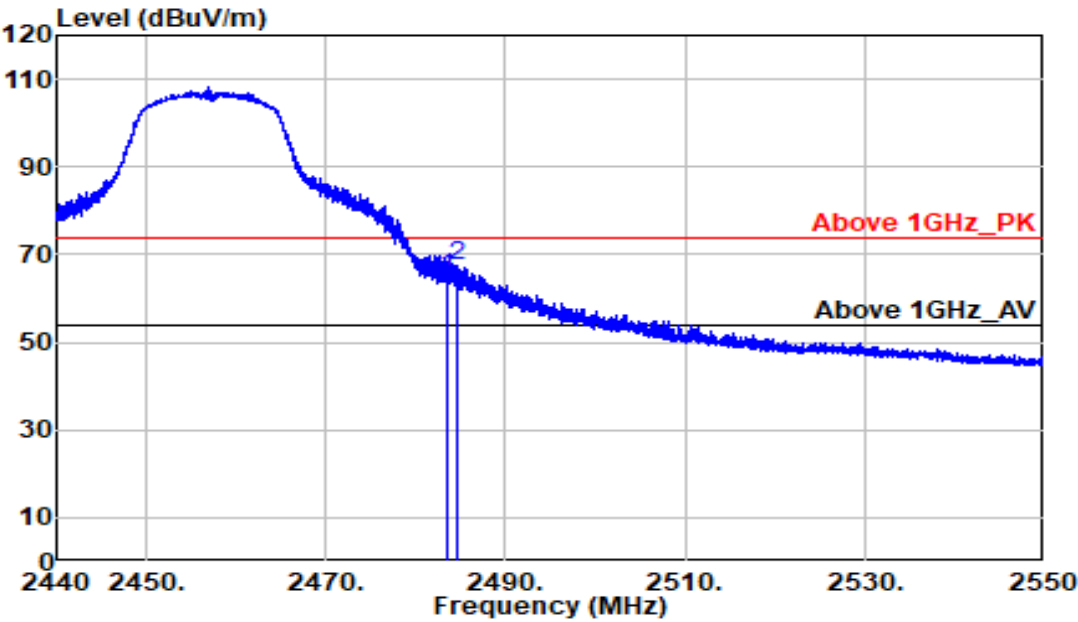

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 75.85 | -11.17 | 64.68    | 74.00  | -9.32  | Peak     | 162  | 164  |
| 2484.633 | 78.84 | -11.17 | 67.68    | 74.00  | -6.32  | Peak     | 162  | 164  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

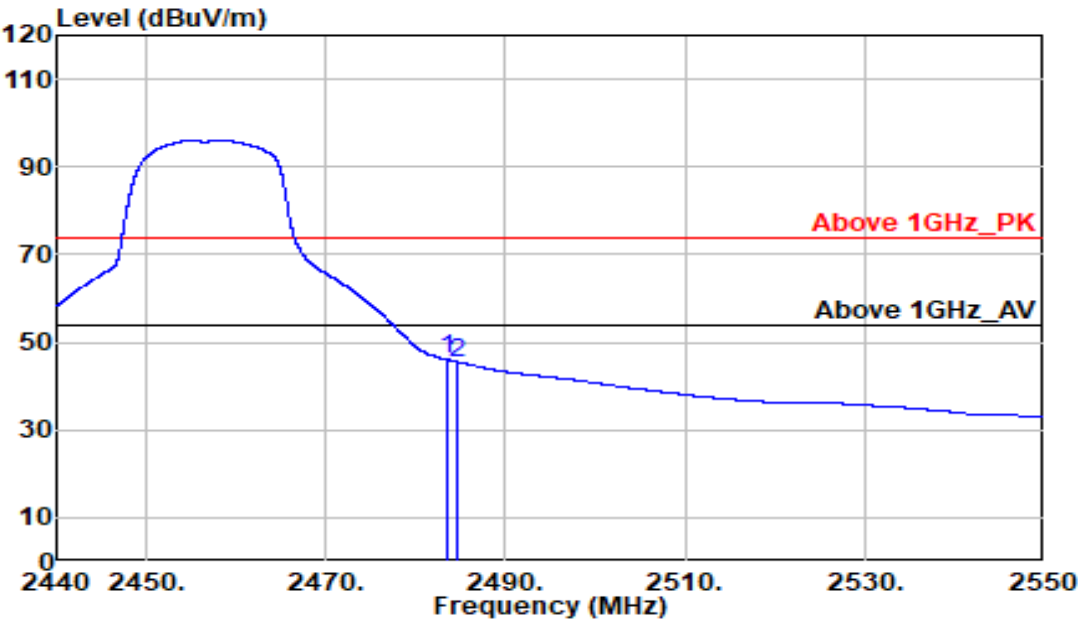

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 57.23 | -11.17 | 46.06    | 54.00  | -7.94  | Average  | 162  | 164  |
| 2484.633 | 56.65 | -11.17 | 45.49    | 54.00  | -8.51  | Average  | 162  | 164  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

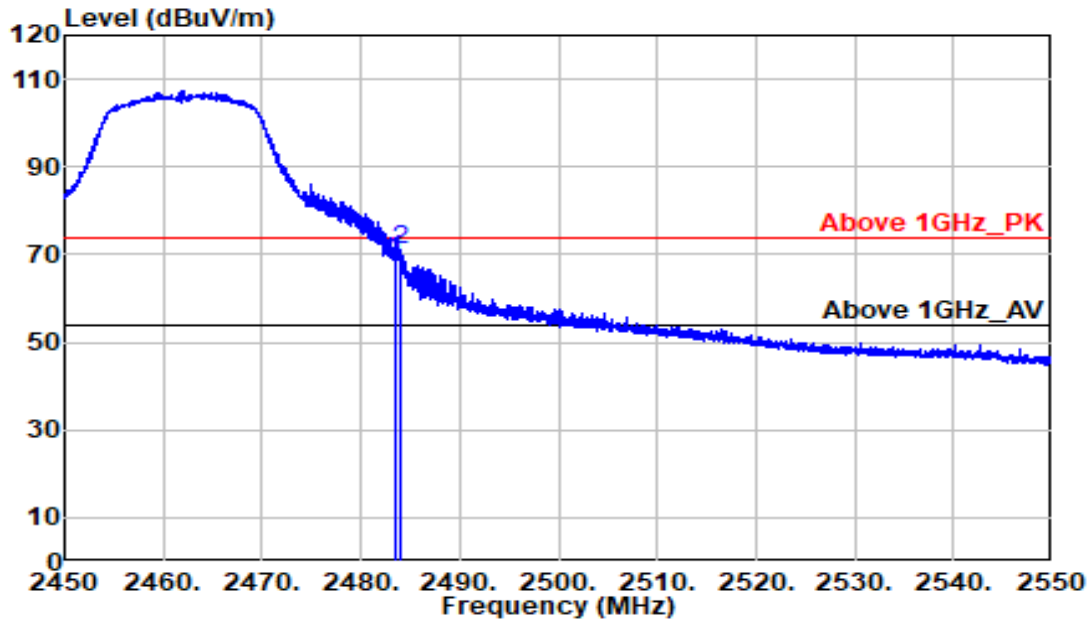

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 79.86 | -11.17 | 68.69    | 74.00  | -5.31  | Peak     | 243  | 37   |
| 2483.925 | 82.13 | -11.17 | 70.96    | 74.00  | -3.04  | Peak     | 243  | 37   |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

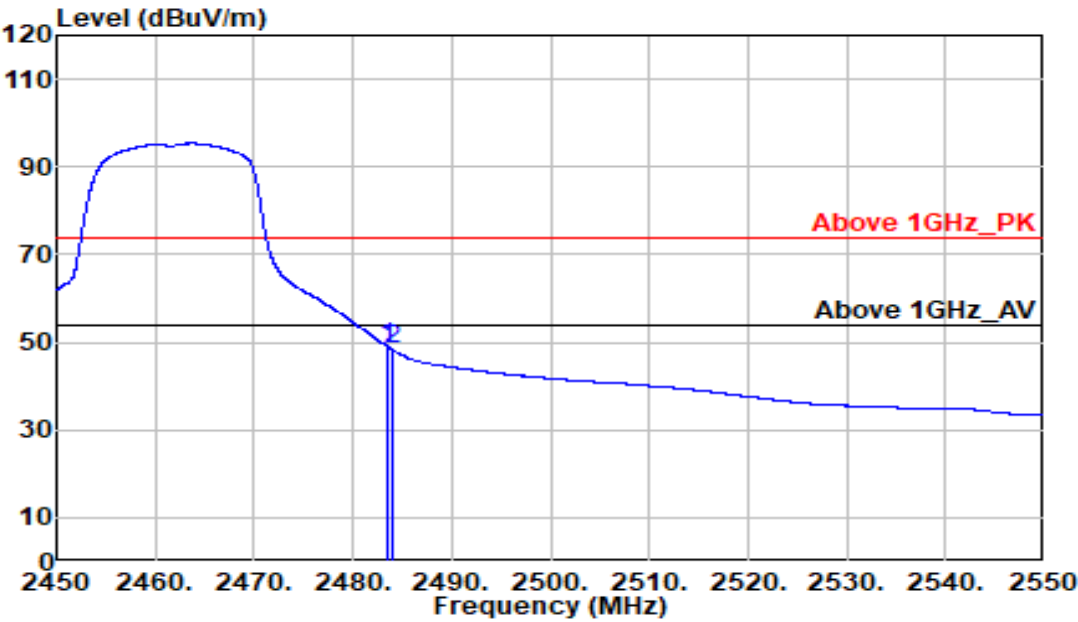

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 60.21 | -11.17 | 49.04    | 54.00  | -4.96  | Average  | 243  | 37   |
| 2483.925 | 59.56 | -11.17 | 48.39    | 54.00  | -5.61  | Average  | 243  | 37   |




Report No.  
Product Name  
  
Operation Band  
Channel  
Mode  
Plane  
Note

:6128626011401  
:Wired Video Doorbell  
:802.11g  
:2462 MHz  
:Bandedge  
:X Plane  
:

Test Date  
Model Name  
  
Temp/Humi  
Antenna Pol  
Test Engineer  
Test Site  
Voltage


:2026-03-20  
:BDM00500U  
  
:22.1C/57%  
:Horizontal  
:Sam Huang  
:chamber B  
:24Vdc From Adapter

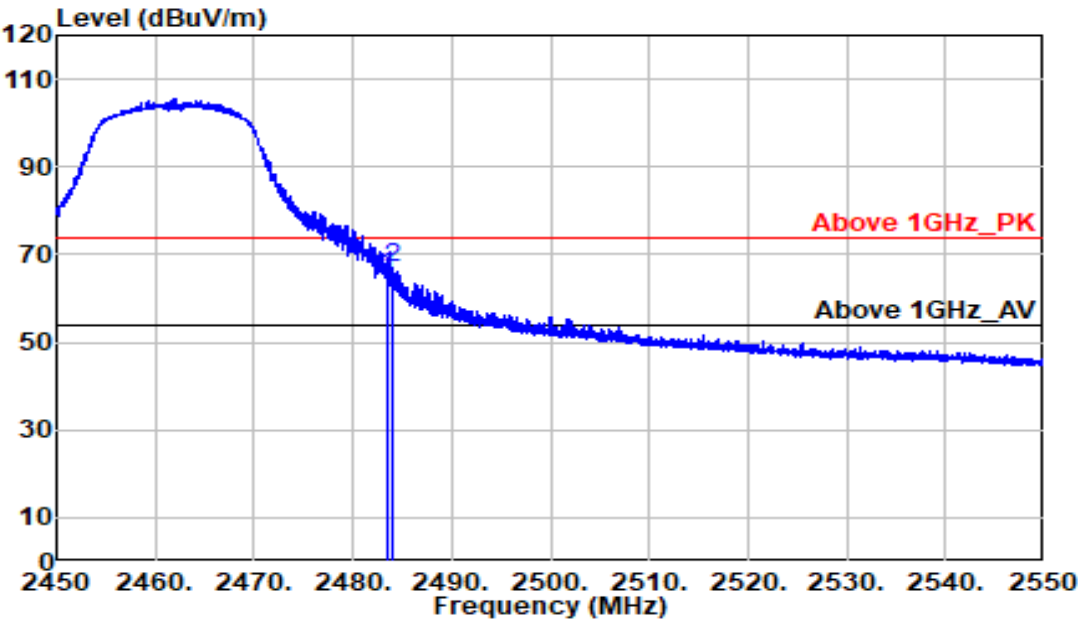

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 76.40 | -11.17 | 65.23    | 74.00  | -8.77  | Peak     | 192  | 163  |
| 2484.125 | 78.19 | -11.17 | 67.02    | 74.00  | -6.98  | Peak     | 192  | 163  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/57%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

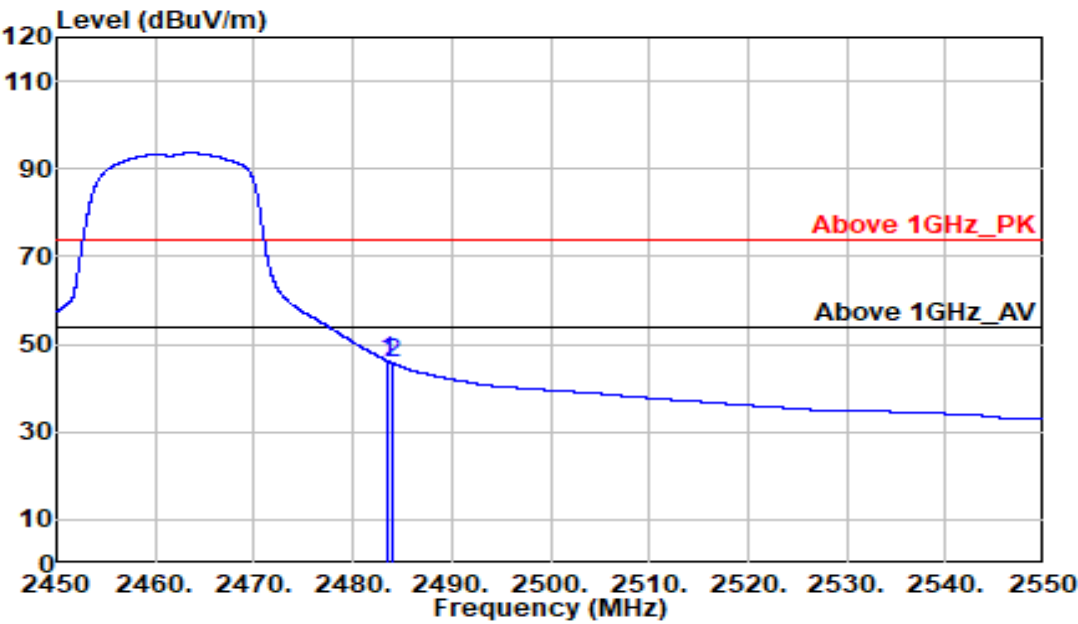

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 57.46 | -11.17 | 46.29    | 54.00  | -7.71  | Average  | 192  | 163  |
| 2484.125 | 56.77 | -11.17 | 45.60    | 54.00  | -8.40  | Average  | 192  | 163  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

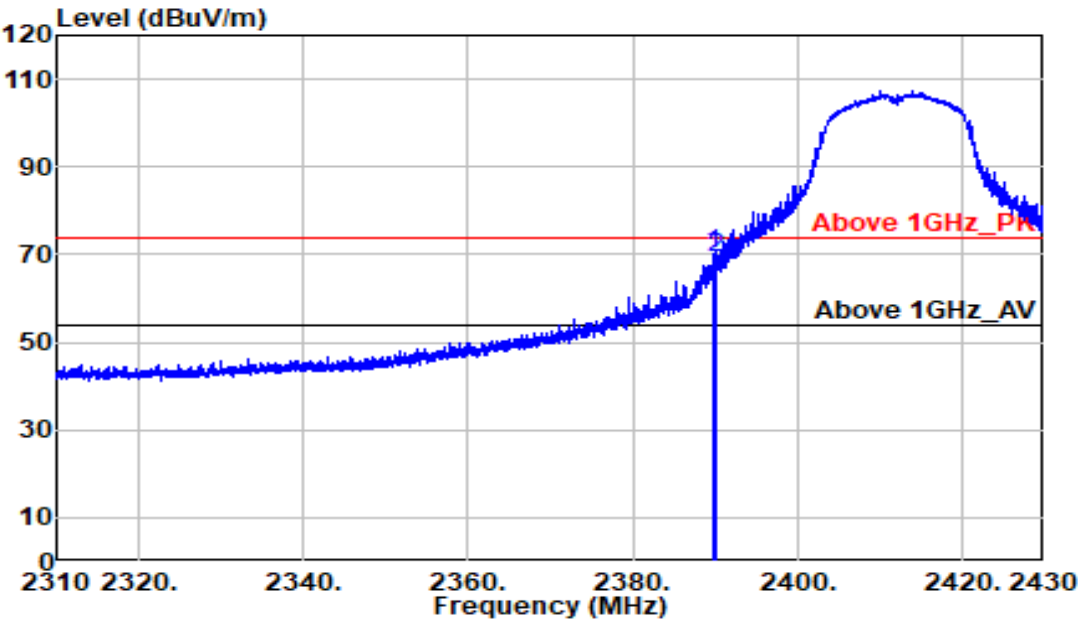

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.710 | 81.70 | -11.39 | 70.31    | 74.00  | -3.69  | Peak     | 110  | 19   |
| 2390.000 | 80.70 | -11.39 | 69.31    | 74.00  | -4.69  | Peak     | 110  | 19   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

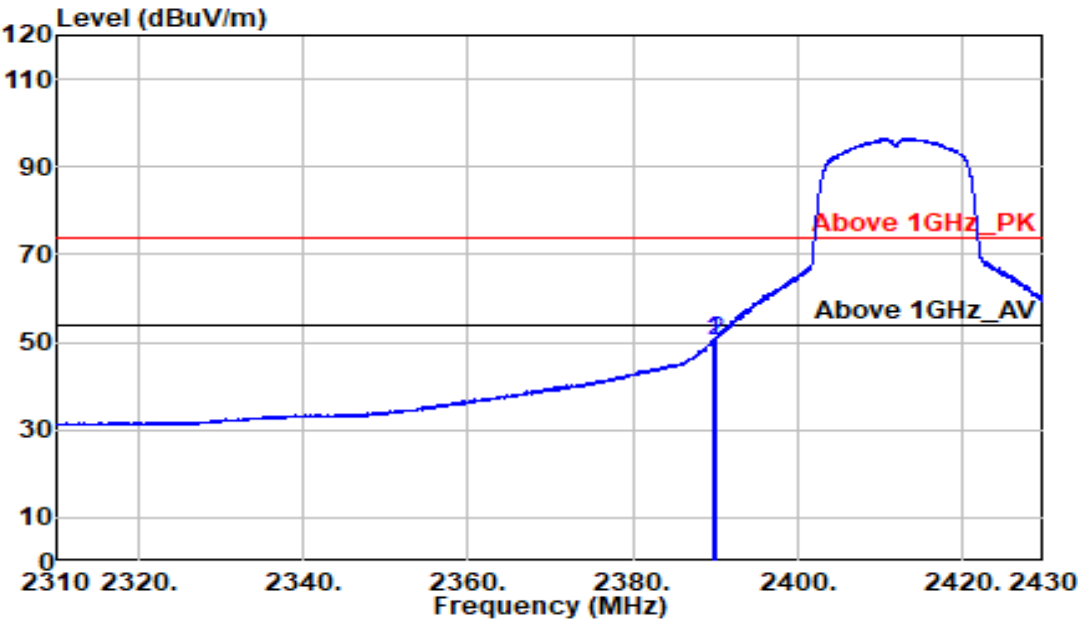

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.710 | 61.45 | -11.39 | 50.06    | 54.00  | -3.94  | Average  | 110  | 19   |
| 2390.000 | 61.78 | -11.39 | 50.39    | 54.00  | -3.61  | Average  | 110  | 19   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

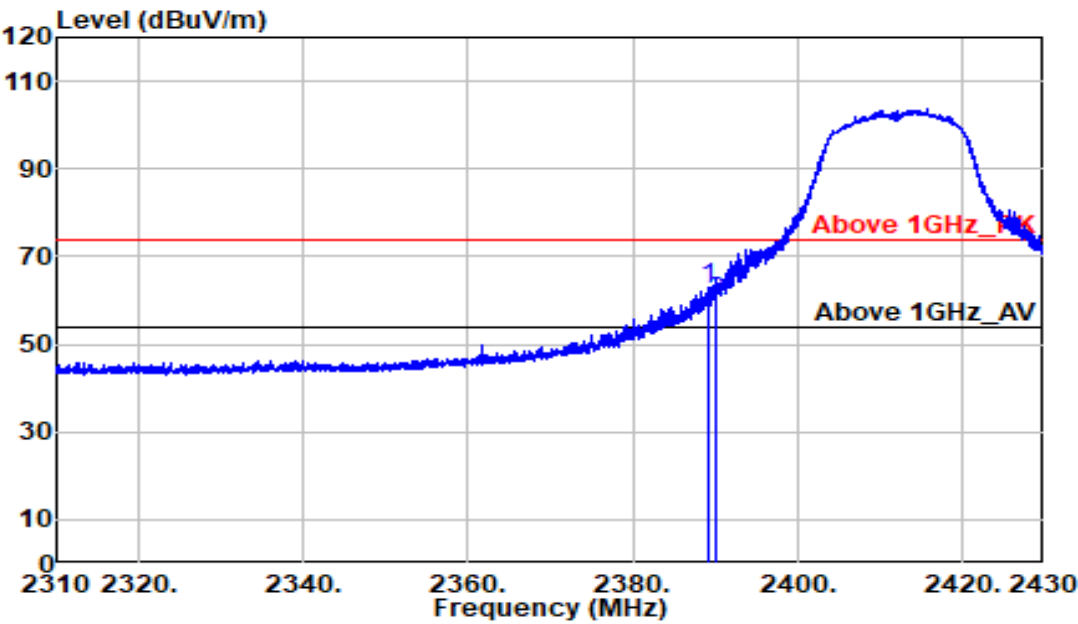

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.200 | 74.49 | -11.39 | 63.10    | 74.00  | -10.90 | Peak     | 120  | 324  |
| 2390.000 | 71.10 | -11.39 | 59.71    | 74.00  | -14.29 | Peak     | 120  | 324  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/57%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

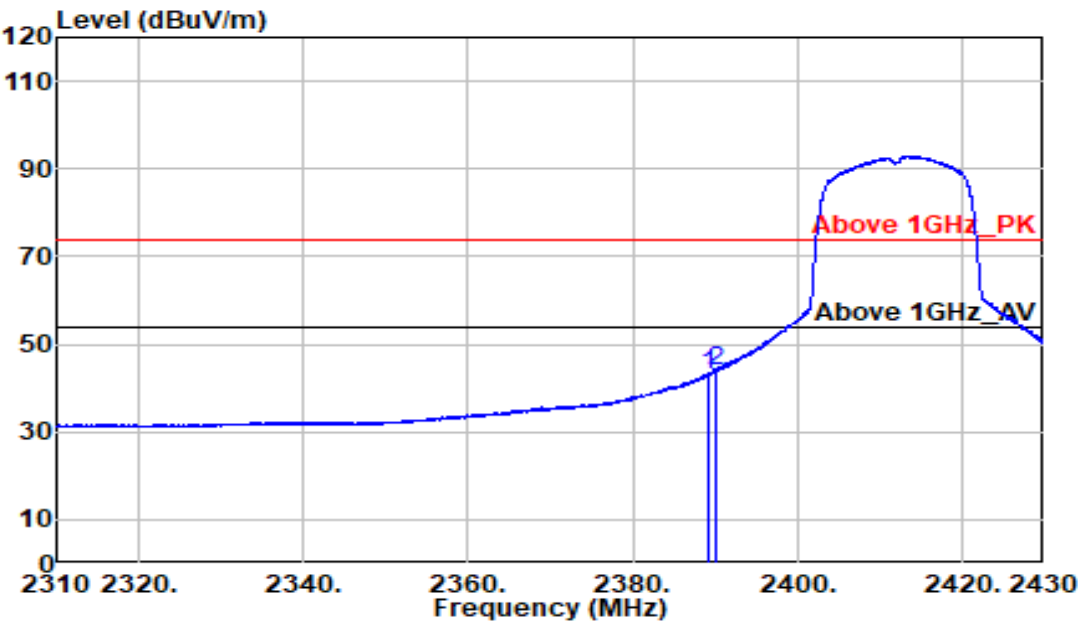


| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.200 | 54.50 | -11.39 | 43.11    | 54.00  | -10.89 | Average  | 120  | 324  |
| 2390.000 | 55.10 | -11.39 | 43.71    | 54.00  | -10.29 | Average  | 120  | 324  |






|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/57%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

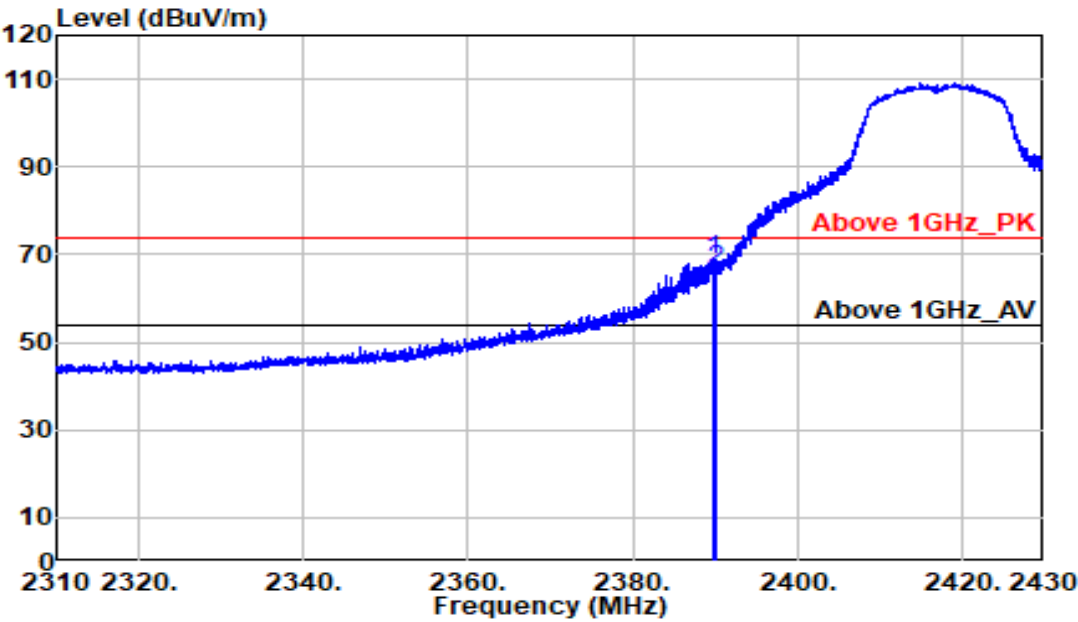

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.800 | 80.44 | -11.39 | 69.05    | 74.00  | -4.95  | Peak     | 239  | 20   |
| 2390.000 | 78.08 | -11.39 | 66.69    | 74.00  | -7.31  | Peak     | 239  | 20   |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/57%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

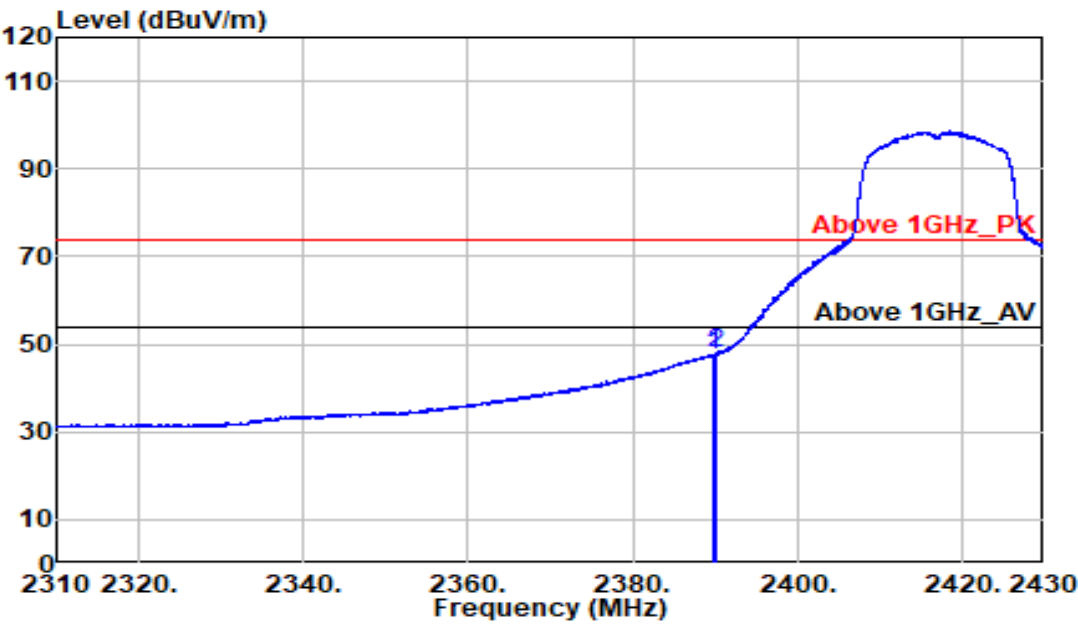

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       |        | dB     | PK/QP/AV | CM   | DEG  |
|          | dBuV  |        | dBuV/m   | dBuV/m |        |          |      |      |
| 2389.800 | 58.97 | -11.39 | 47.58    | 54.00  | -6.42  | Average  | 239  | 20   |
| 2390.000 | 59.40 | -11.39 | 48.01    | 54.00  | -5.99  | Average  | 239  | 20   |



Report No.

Product Name

Operation Band

Channel

Mode

Plane

Note

:6128626011401

:Wired Video Doorbell

:802.11n20

:2417 MHz

:Bandedge

:X Plane

:

Test Date

Model Name

Temp/Humi

Antenna Pol

Test Engineer

Test Site

Voltage

:2026-03-20

:BDM00500U


:22.1C/57%

:Horizontal

:Sam Huang

:chamber B


:24Vdc From Adapter

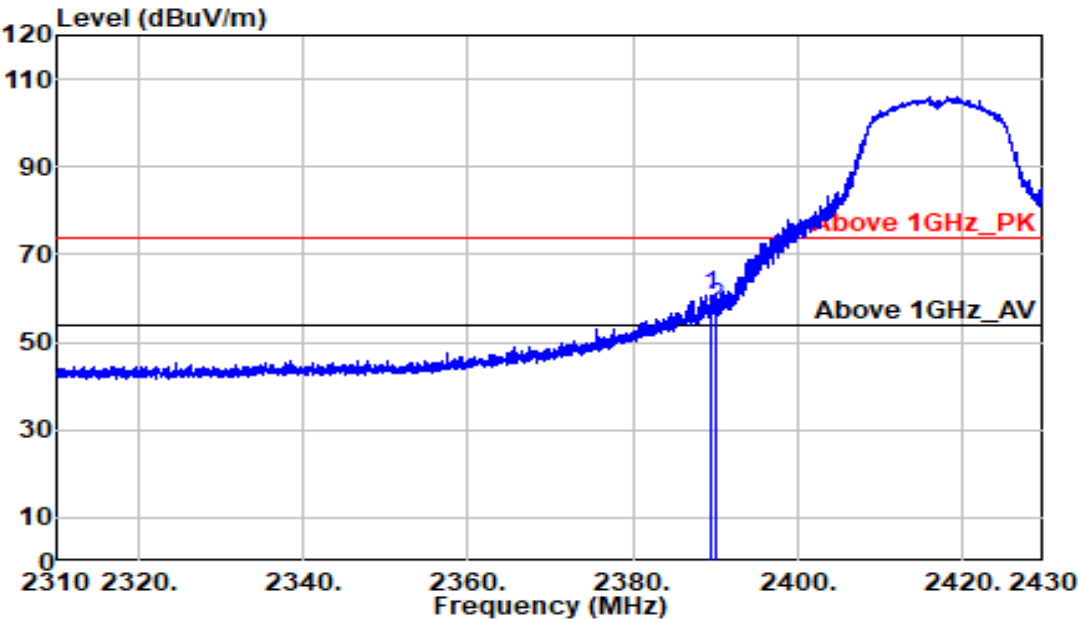

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.440 | 71.96 | -11.39 | 60.57    | 74.00  | -13.43 | Peak     | 100  | 324  |
| 2390.000 | 69.50 | -11.39 | 58.11    | 74.00  | -15.89 | Peak     | 100  | 324  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/57%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

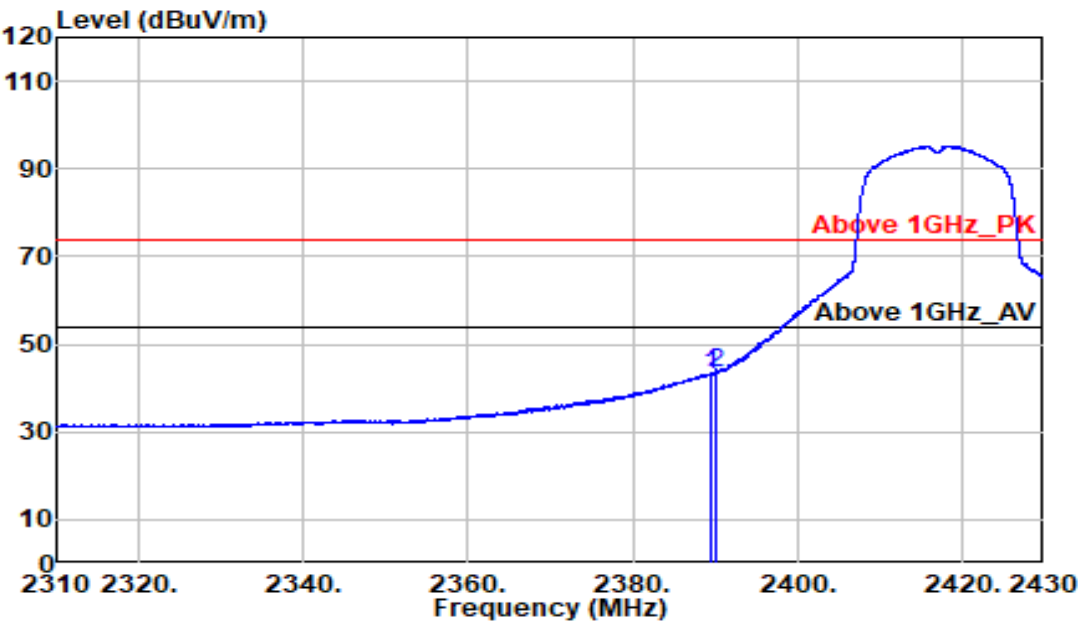

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2389.440 | 54.63 | -11.39 | 43.23    | 54.00  | -10.77 | Average  | 100  | 324  |
| 2390.000 | 54.91 | -11.39 | 43.52    | 54.00  | -10.48 | Average  | 100  | 324  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

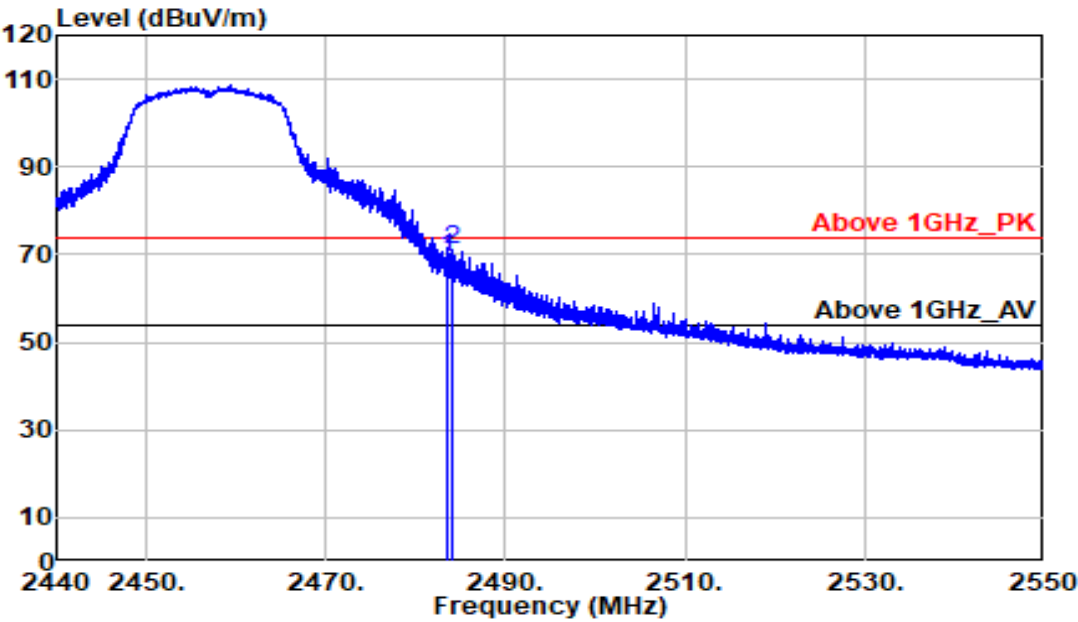

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 80.33 | -11.17 | 69.16    | 74.00  | -4.84  | Peak     | 250  | 46   |
| 2484.055 | 82.11 | -11.17 | 70.94    | 74.00  | -3.06  | Peak     | 250  | 46   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

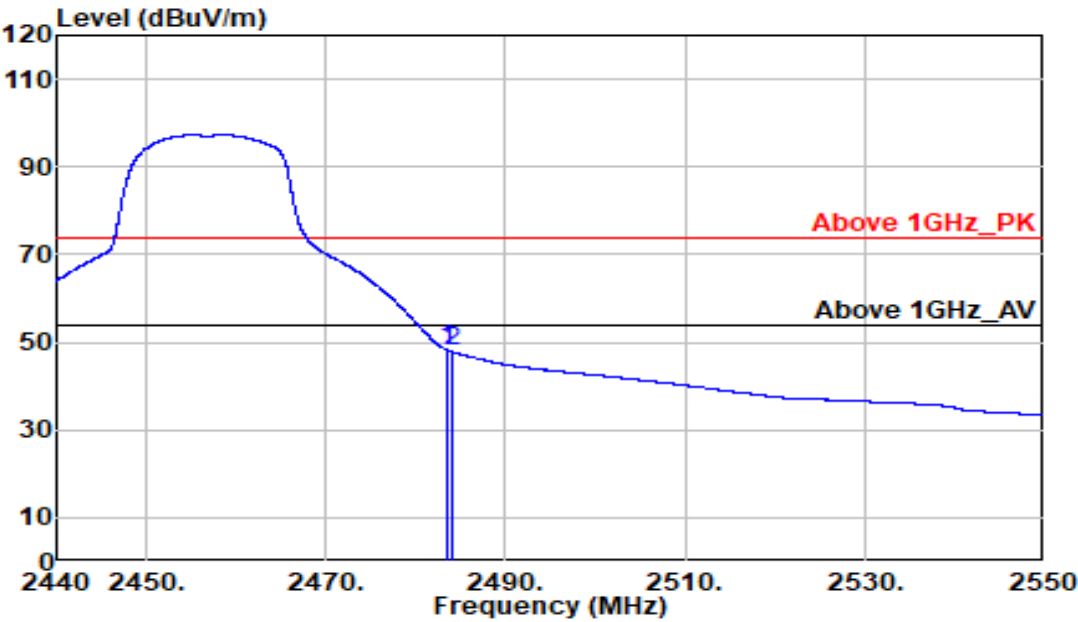

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 59.47 | -11.17 | 48.30    | 54.00  | -5.70  | Average  | 250  | 46   |
| 2484.055 | 59.02 | -11.17 | 47.85    | 54.00  | -6.15  | Average  | 250  | 46   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

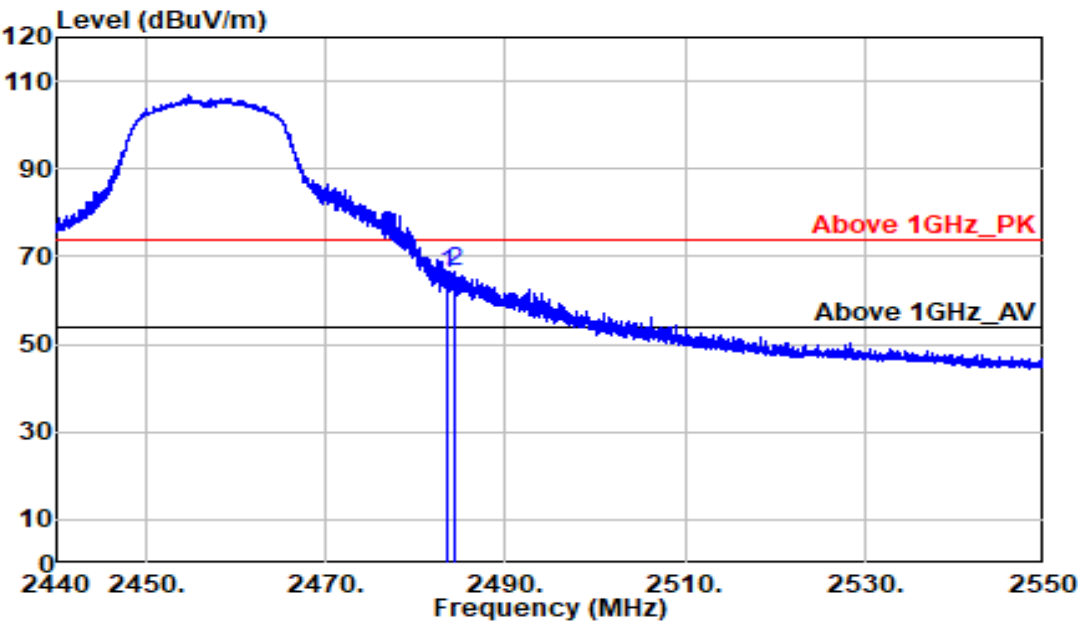

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 77.30 | -11.17 | 66.13    | 74.00  | -7.87  | Peak     | 167  | 161  |
| 2484.248 | 77.51 | -11.17 | 66.34    | 74.00  | -7.66  | Peak     | 167  | 161  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

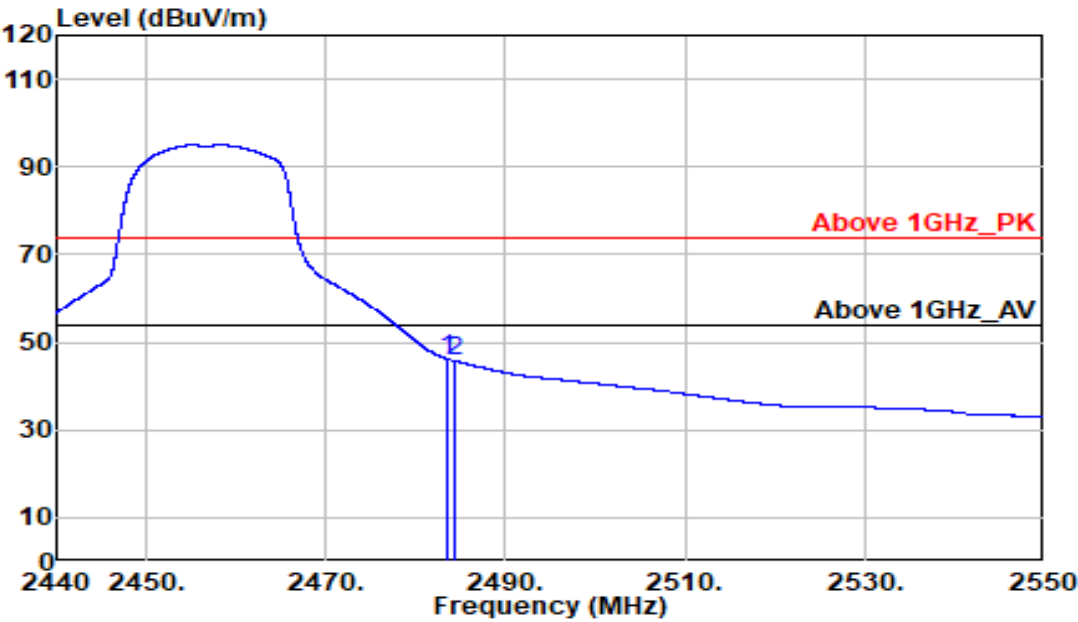

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 57.36 | -11.17 | 46.19    | 54.00  | -7.81  | Average  | 167  | 161  |
| 2484.248 | 56.93 | -11.17 | 45.76    | 54.00  | -8.24  | Average  | 167  | 161  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

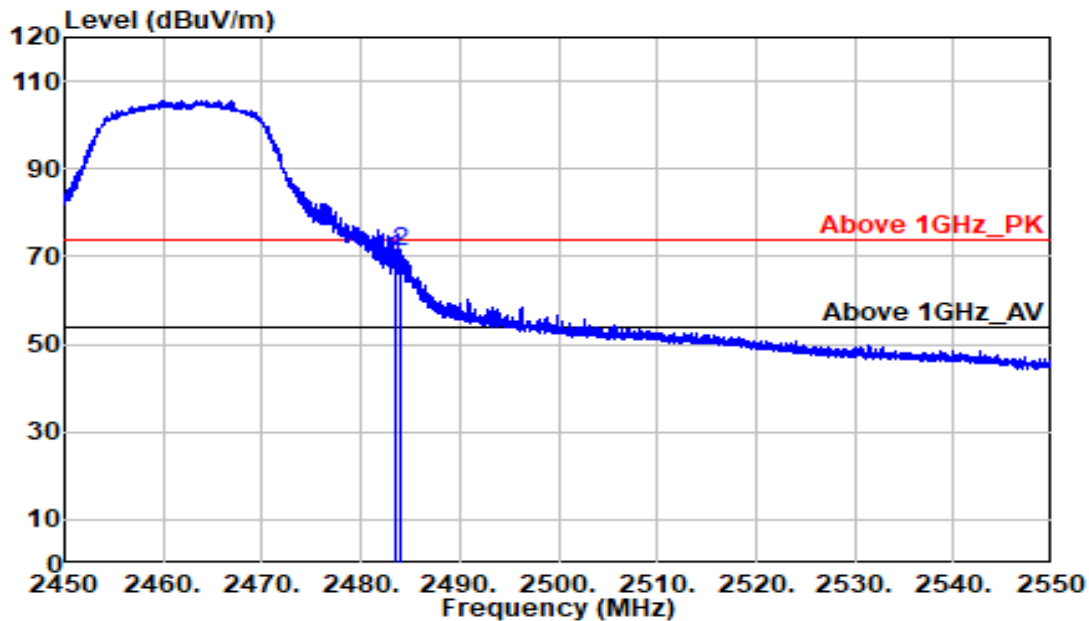

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 80.99 | -11.17 | 69.83    | 74.00  | -4.17  | Peak     | 284  | 37   |
| 2484.075 | 82.05 | -11.17 | 70.89    | 74.00  | -3.11  | Peak     | 284  | 37   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

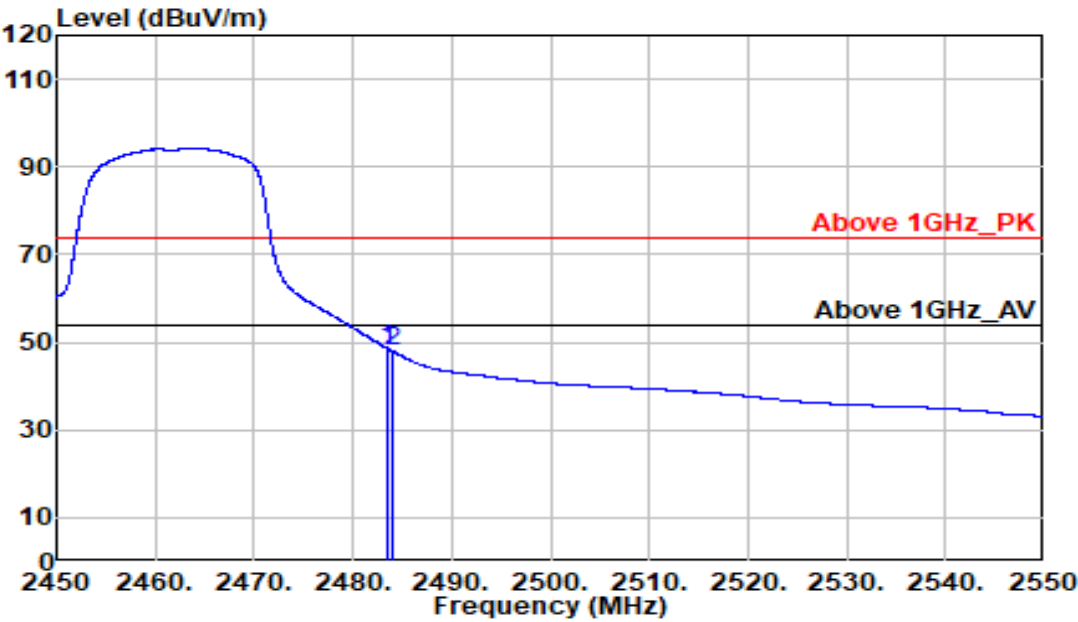

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
|          | dBuV  |        | dBuV/m   |        |        |          |      |      |
| 2483.500 | 59.79 | -11.17 | 48.62    | 54.00  | -5.38  | Average  | 284  | 37   |
| 2484.075 | 59.04 | -11.17 | 47.88    | 54.00  | -6.12  | Average  | 284  | 37   |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

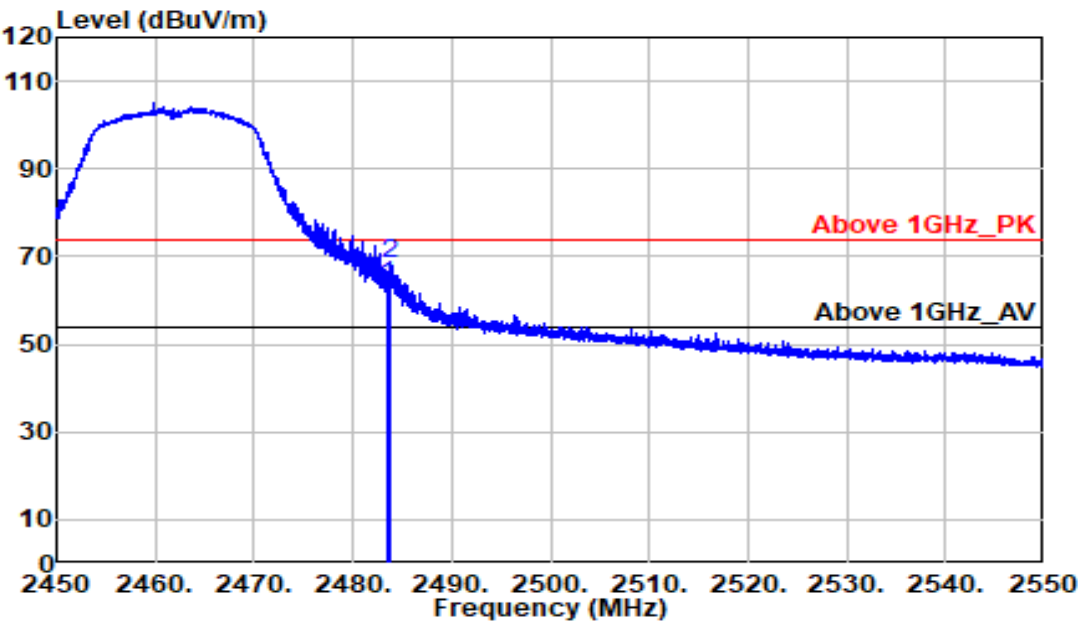

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 74.41 | -11.17 | 63.24    | 74.00  | -10.76 | Peak     | 196  | 166  |
| 2483.875 | 79.76 | -11.17 | 68.59    | 74.00  | -5.41  | Peak     | 196  | 166  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-03-20         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.3C/59%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Bandedge             | Test Engineer | :Sam Huang          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

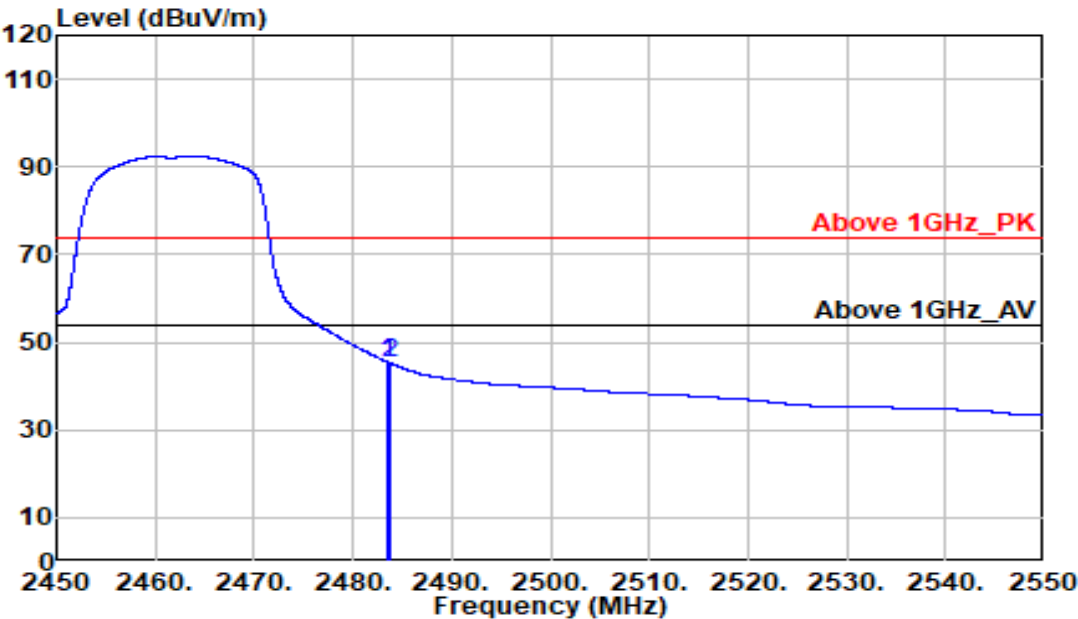


| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 2483.500 | 56.67 | -11.17 | 45.50    | 54.00  | -8.50  | Average  | 196  | 166  |
| 2483.875 | 56.32 | -11.17 | 45.15    | 54.00  | -8.85  | Average  | 196  | 166  |

|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2437 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

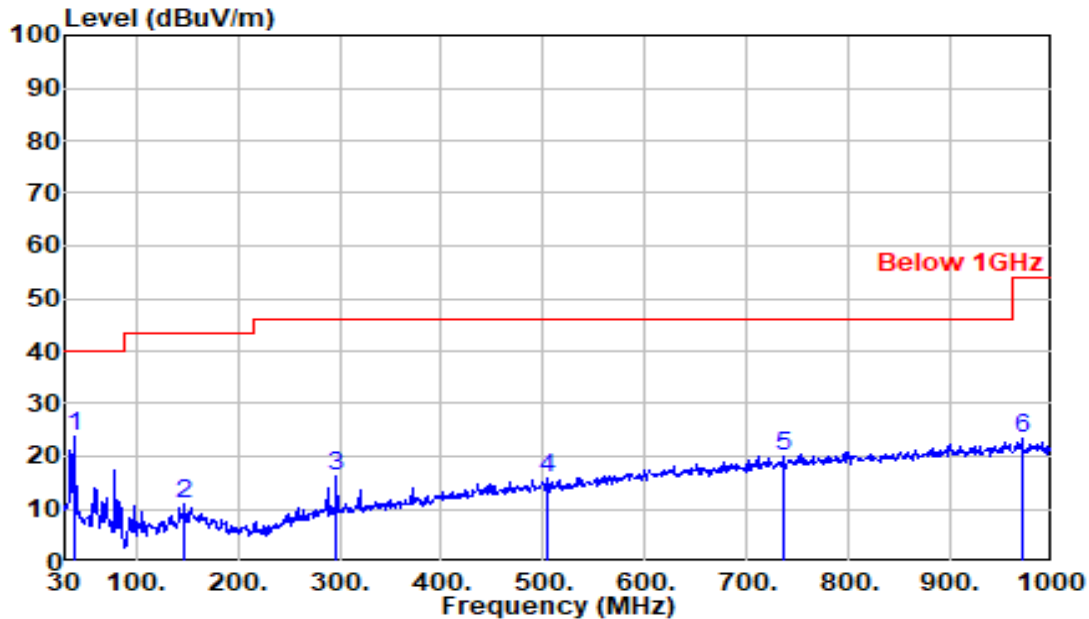

| Freq<br>MHz | Read<br>LV.<br>dBuV | Factor<br>dB/m | Emission<br>LV<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector<br>PK/QP/AV | Apos<br>CM | TPos<br>DEG |
|-------------|---------------------|----------------|--------------------------|-----------------|--------------|----------------------|------------|-------------|
| 39.700      | 54.20               | -30.28         | 23.92                    | 40.00           | -16.08       | Peak                 | 217        | 187         |
| 148.340     | 40.74               | -29.90         | 10.84                    | 43.50           | -32.66       | Peak                 | 154        | 218         |
| 296.750     | 45.08               | -29.00         | 16.08                    | 46.00           | -29.92       | Peak                 | 196        | 265         |
| 504.330     | 39.92               | -23.93         | 15.99                    | 46.00           | -30.01       | Peak                 | 304        | 243         |
| 736.160     | 39.01               | -19.11         | 19.90                    | 46.00           | -26.10       | Peak                 | 271        | 53          |
| 969.930     | 39.76               | -16.26         | 23.50                    | 54.00           | -30.50       | Peak                 | 266        | 241         |

|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2437 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

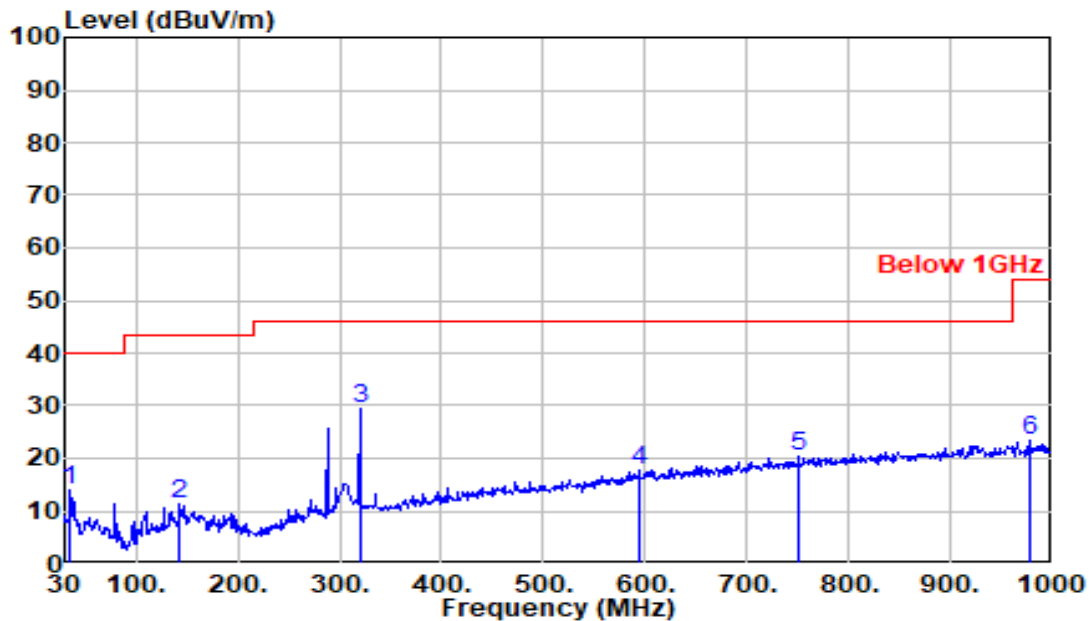

| Freq    | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|---------|-------|--------|----------|--------|--------|----------|------|------|
| MHz     | LV.   |        | LV       |        |        |          |      |      |
|         | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 35.820  | 44.56 | -30.67 | 13.89    | 40.00  | -26.11 | Peak     | 217  | 311  |
| 142.520 | 41.69 | -30.39 | 11.30    | 43.50  | -32.20 | Peak     | 124  | 171  |
| 320.030 | 57.77 | -28.44 | 29.33    | 46.00  | -16.67 | Peak     | 305  | 202  |
| 594.540 | 39.24 | -21.64 | 17.60    | 46.00  | -28.40 | Peak     | 229  | 286  |
| 750.710 | 39.04 | -18.82 | 20.22    | 46.00  | -25.78 | Peak     | 236  | 357  |
| 977.690 | 39.72 | -16.19 | 23.53    | 54.00  | -30.47 | Peak     | 173  | 329  |



Report No.

Product Name

Operation Band

Channel

Mode

Plane

Note

:6128626011401

:Wired Video Doorbell

:802.11b

:2412 MHz

:Tx

:X Plane

:

Test Date

Model Name

Temp/Humi

Antenna Pol

Test Engineer

Test Site

Voltage

:2026-02-03

:BDM00500U


:22.1C/61%

:Vertical

:Kevin Syu

:chamber B


:24Vdc From Adapter

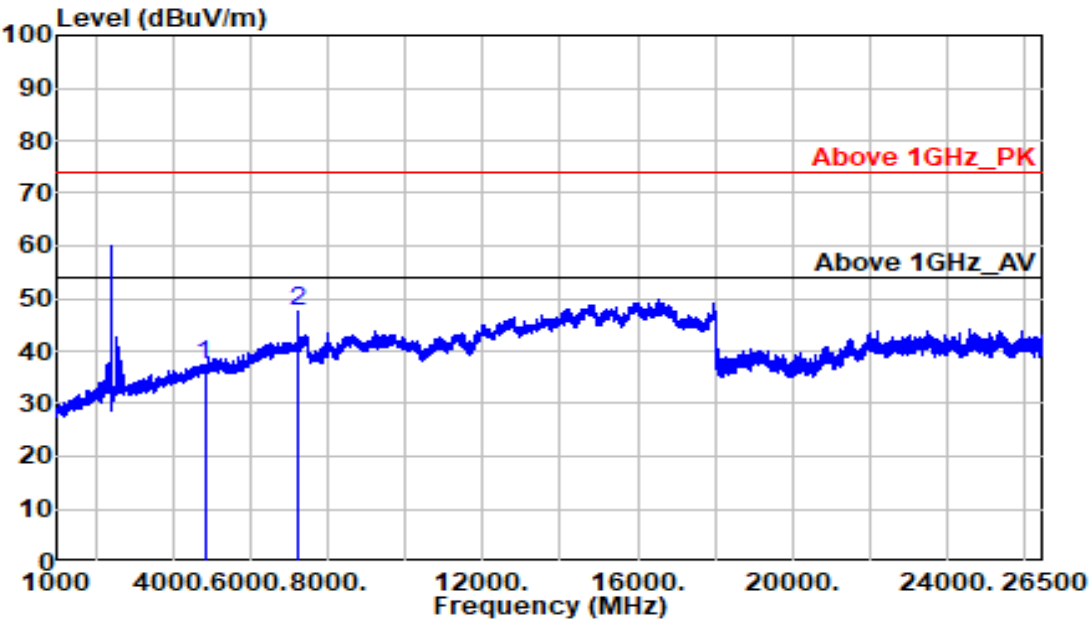

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4824.000 | 41.85 | -4.35  | 37.50    | 74.00  | -36.50 | Peak     | 217  | 66   |
| 7236.000 | 45.92 | 1.71   | 47.63    | 74.00  | -26.37 | Peak     | 241  | 225  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

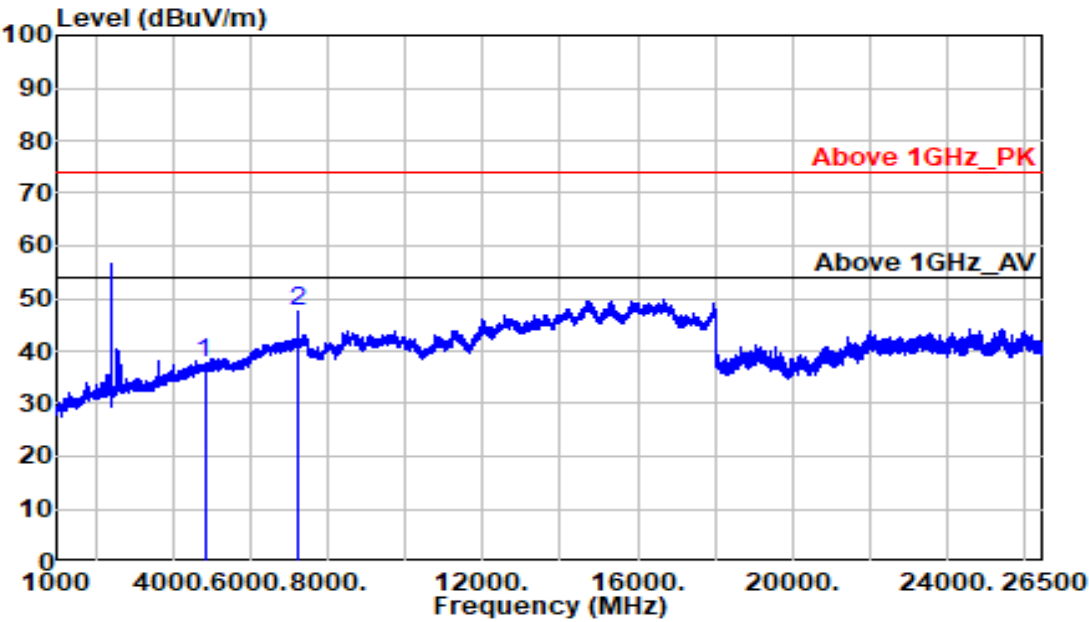


| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4824.000 | 42.22 | -4.35  | 37.87    | 74.00  | -36.13 | Peak     | 237  | 170  |
| 7236.000 | 45.81 | 1.71   | 47.52    | 74.00  | -26.48 | Peak     | 193  | 186  |






|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2437 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

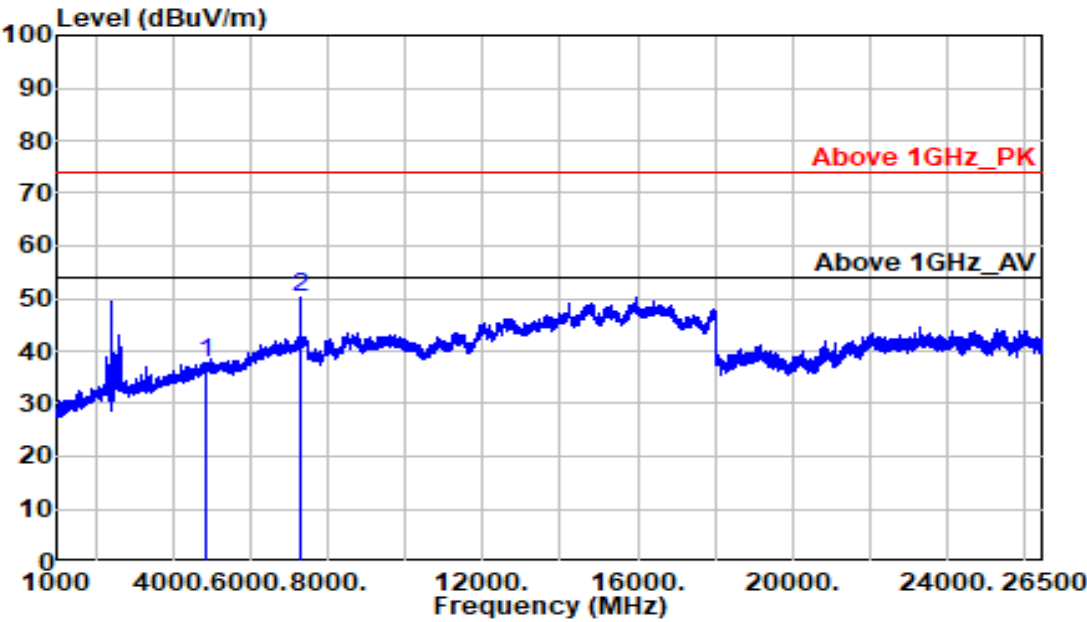

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4874.000 | 41.91 | -4.19  | 37.72    | 74.00  | -36.28 | Peak     | 167  | 327  |
| 7311.000 | 48.27 | 1.85   | 50.12    | 74.00  | -23.88 | Peak     | 201  | 224  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2437 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

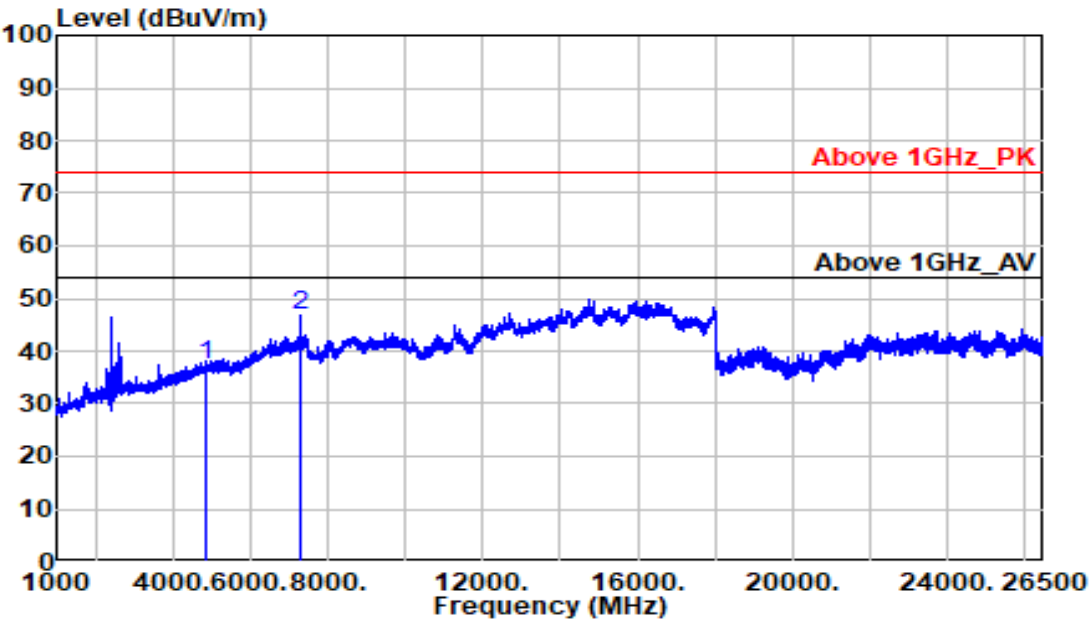

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4874.000 | 41.46 | -4.19  | 37.27    | 74.00  | -36.73 | Peak     | 241  | 99   |
| 7311.000 | 45.03 | 1.85   | 46.88    | 74.00  | -27.12 | Peak     | 286  | 144  |



Report No.

Product Name

Operation Band

Channel

Mode

Plane

Note

:6128626011401

:Wired Video Doorbell

:802.11b

:2462 MHz

:Tx

:X Plane

:

Test Date

Model Name

Temp/Humi

Antenna Pol

Test Engineer

Test Site

Voltage

:2026-02-03

:BDM00500U


:22.1C/61%

:Vertical

:Kevin Syu

:chamber B


:24Vdc From Adapter

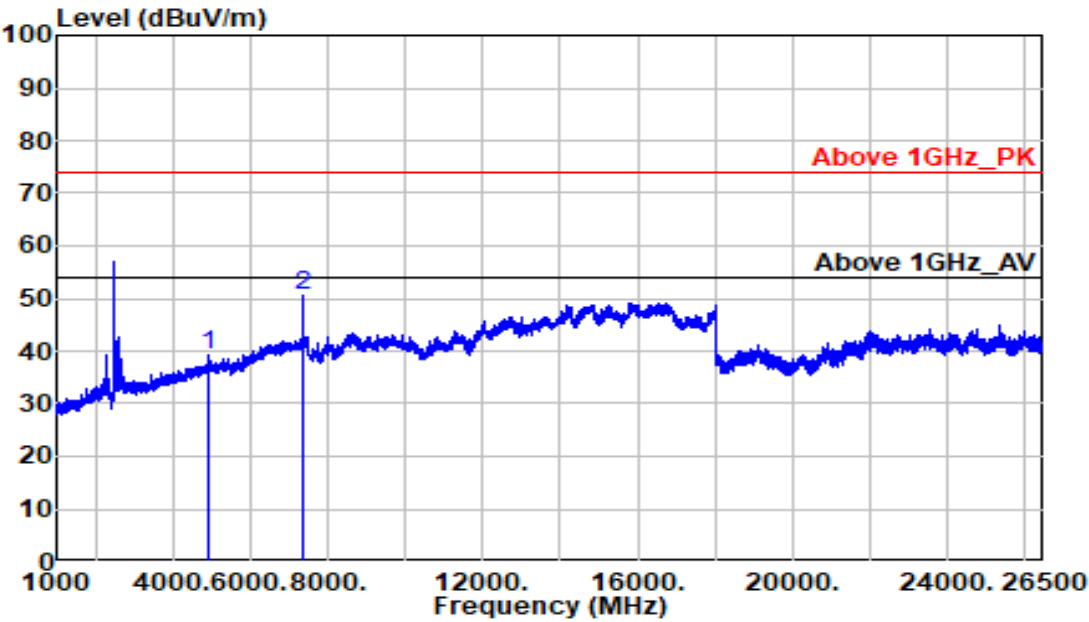

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4924.000 | 43.38 | -4.03  | 39.35    | 74.00  | -34.65 | Peak     | 273  | 143  |
| 7386.000 | 48.38 | 2.00   | 50.38    | 74.00  | -23.62 | Peak     | 183  | 223  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11b              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

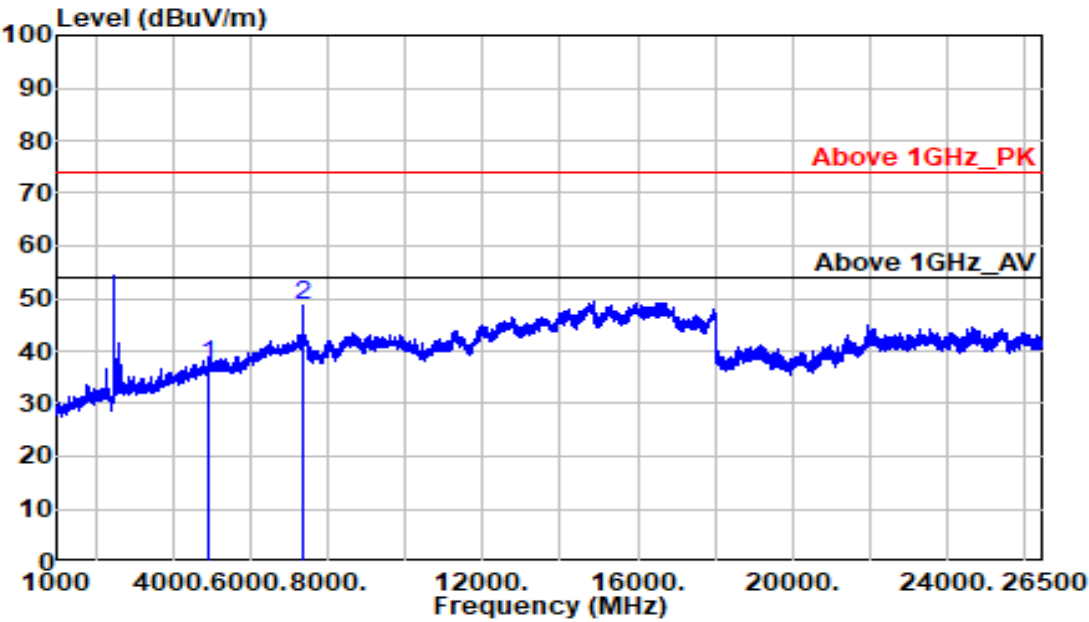

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4924.000 | 41.55 | -4.03  | 37.52    | 74.00  | -36.48 | Peak     | 249  | 286  |
| 7386.000 | 46.82 | 2.00   | 48.82    | 74.00  | -25.18 | Peak     | 226  | 182  |



Report No.

Product Name

Operation Band

Channel

Mode

Plane

Note

:6128626011401

:Wired Video Doorbell

:802.11g

:2412 MHz

:Tx

:X Plane

:

Test Date

Model Name

Temp/Humi

Antenna Pol

Test Engineer

Test Site

Voltage

:2026-02-03

:BDM00500U


:22.1C/61%

:Vertical

:Kevin Syu

:chamber B


:24Vdc From Adapter

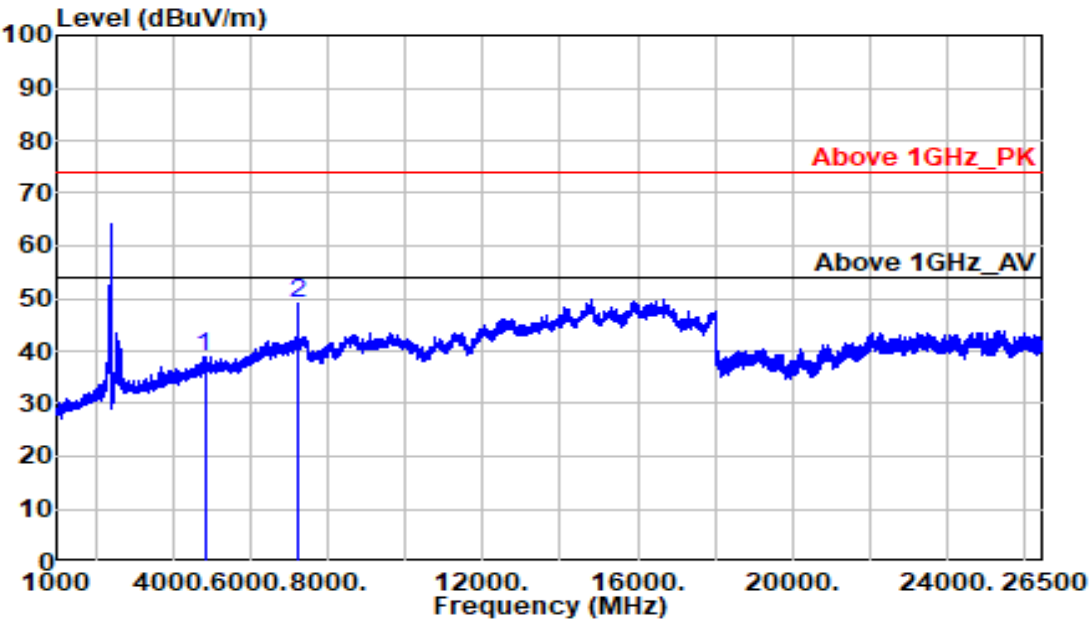

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4824.000 | 43.15 | -4.35  | 38.80    | 74.00  | -35.20 | Peak     | 191  | 142  |
| 7236.000 | 47.23 | 1.71   | 48.94    | 74.00  | -25.06 | Peak     | 274  | 226  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

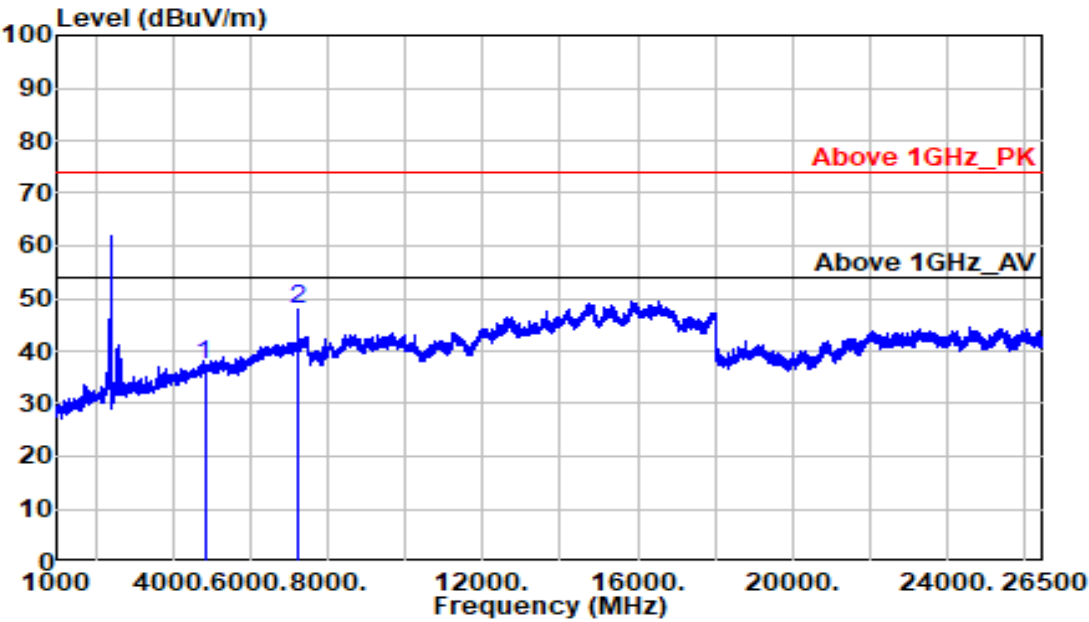

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4824.000 | 41.78 | -4.35  | 37.43    | 74.00  | -36.57 | Peak     | 215  | 166  |
| 7236.000 | 46.12 | 1.71   | 47.83    | 74.00  | -26.17 | Peak     | 196  | 53   |



Report No.

Product Name

Operation Band

Channel

Mode

Plane

Note

:6128626011401

:Wired Video Doorbell

:802.11g

:2417 MHz

:Tx

:X Plane

:

Test Date

Model Name

Temp/Humi

Antenna Pol

Test Engineer

Test Site

Voltage

:2026-02-03

:BDM00500U


:22.1C/61%

:Vertical

:Kevin Syu

:chamber B


:24Vdc From Adapter

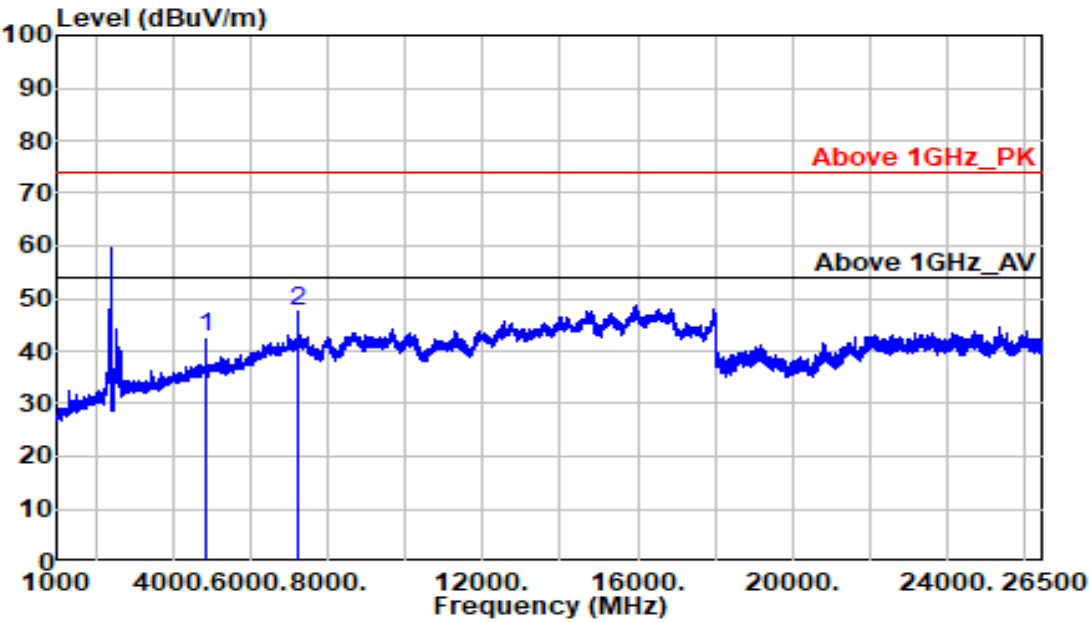

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4834.000 | 46.78 | -4.32  | 42.46    | 74.00  | -31.54 | Peak     | 311  | 109  |
| 7251.000 | 45.64 | 1.74   | 47.38    | 74.00  | -26.62 | Peak     | 197  | 264  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

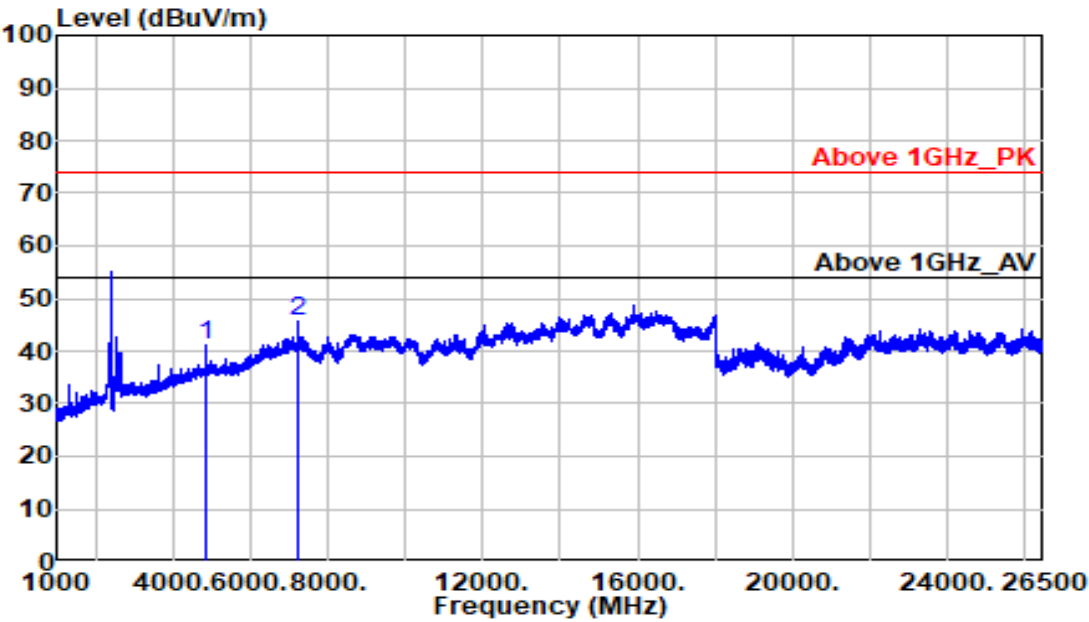


| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4834.000 | 45.37 | -4.32  | 41.05    | 74.00  | -32.95 | Peak     | 194  | 200  |
| 7251.000 | 43.82 | 1.74   | 45.56    | 74.00  | -28.44 | Peak     | 218  | 36   |






|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2437 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

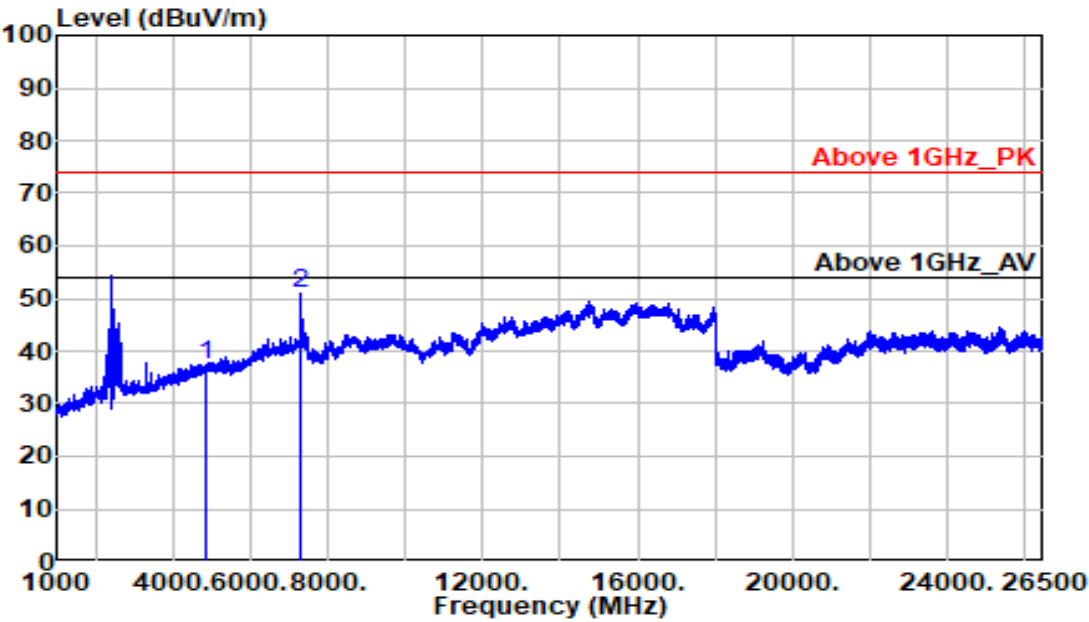

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4874.000 | 41.40 | -4.19  | 37.21    | 74.00  | -36.79 | Peak     | 181  | 360  |
| 7311.000 | 49.22 | 1.85   | 51.07    | 74.00  | -22.93 | Peak     | 293  | 222  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2437 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

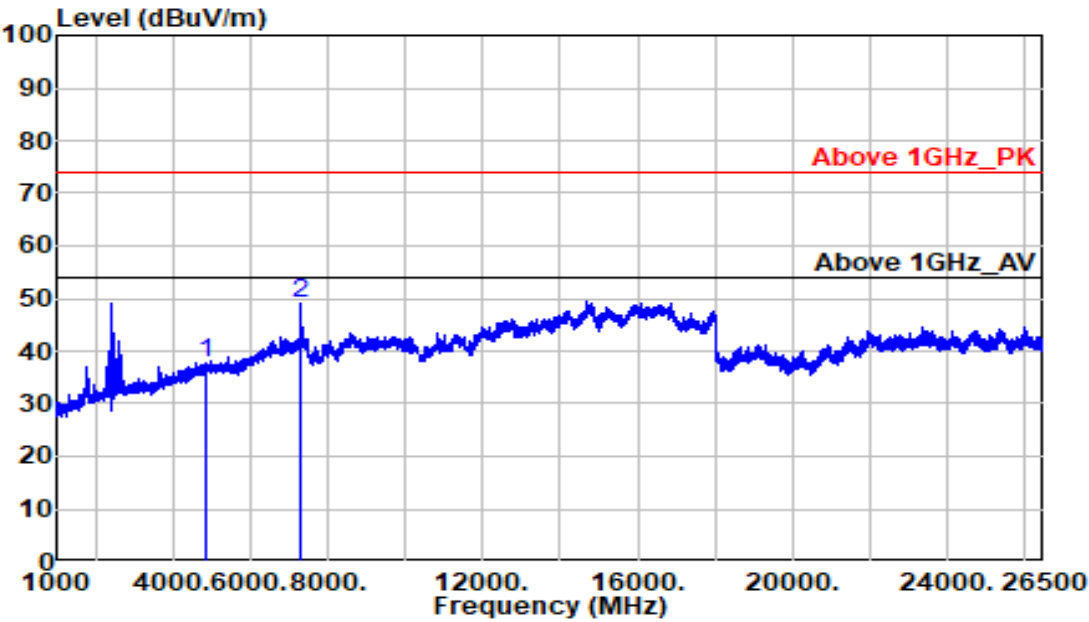

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4874.000 | 41.77 | -4.19  | 37.58    | 74.00  | -36.42 | Peak     | 217  | 182  |
| 7311.000 | 47.27 | 1.85   | 49.12    | 74.00  | -24.88 | Peak     | 303  | 140  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2457 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

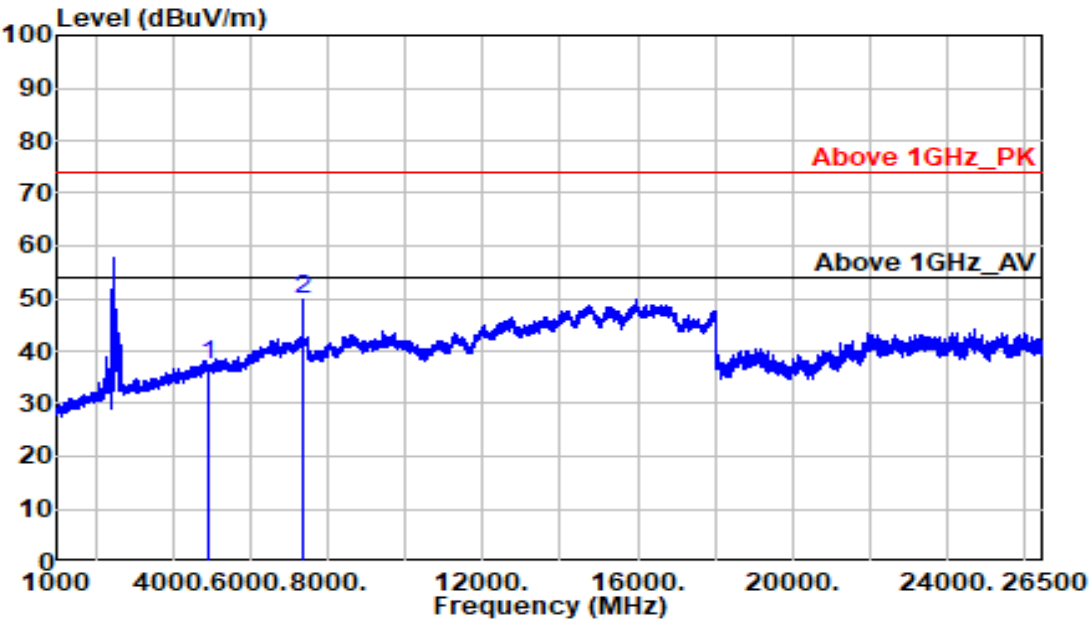

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4914.000 | 41.36 | -4.06  | 37.30    | 74.00  | -36.70 | Peak     | 271  | 52   |
| 7371.000 | 47.93 | 1.97   | 49.90    | 74.00  | -24.10 | Peak     | 311  | 226  |




Report No.  
Product Name  
  
Operation Band  
Channel  
Mode  
Plane  
Note

:6128626011401  
:Wired Video Doorbell  
:802.11g  
:2457 MHz  
:Tx  
:X Plane  
:

Test Date  
Model Name  
  
Temp/Humi  
Antenna Pol  
Test Engineer  
Test Site  
Voltage


:2026-02-03  
:BDM00500U  
  
:22.1C/61%  
:Horizontal  
:Kevin Syu  
:chamber B  
:24Vdc From Adapter

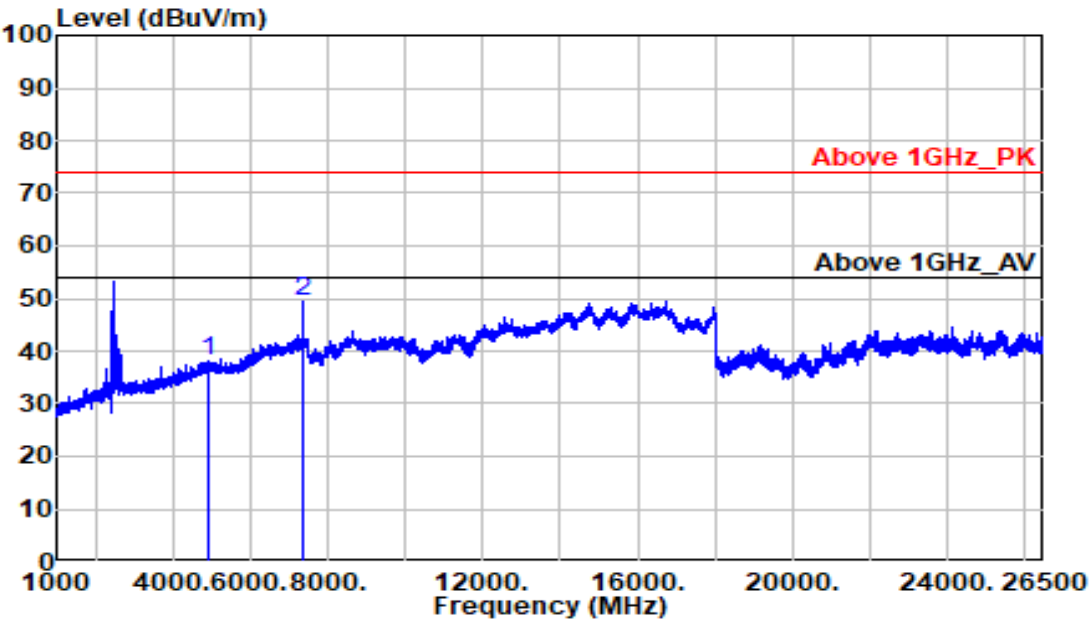

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4914.000 | 42.24 | -4.06  | 38.18    | 74.00  | -35.82 | Peak     | 241  | 346  |
| 7371.000 | 47.36 | 1.97   | 49.33    | 74.00  | -24.67 | Peak     | 297  | 186  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

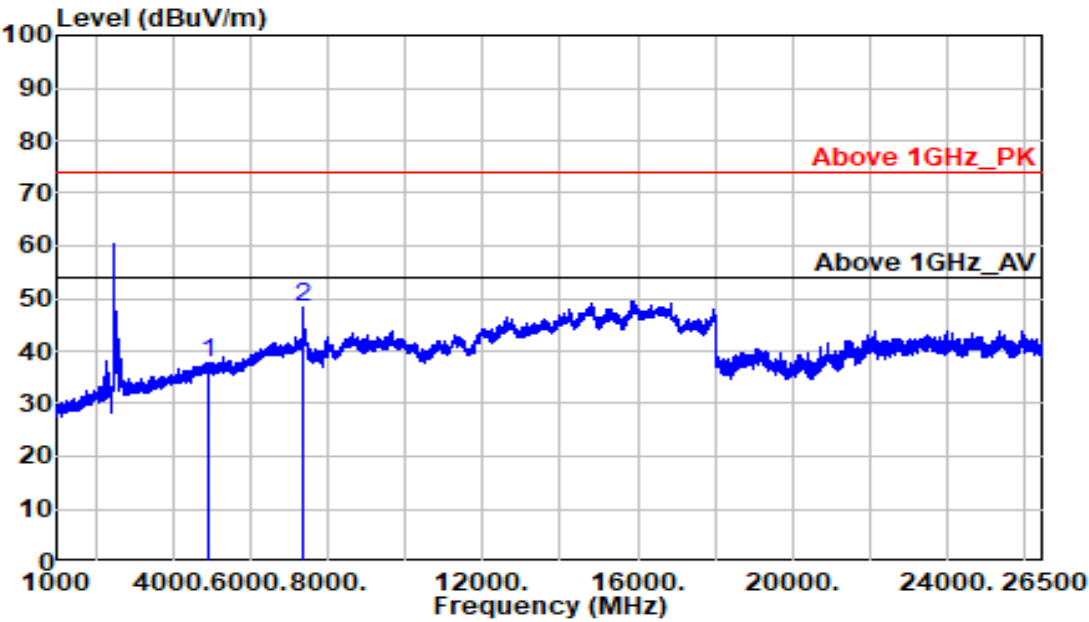

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4924.000 | 41.79 | -4.03  | 37.76    | 74.00  | -36.24 | Peak     | 218  | 279  |
| 7386.000 | 46.43 | 2.00   | 48.43    | 74.00  | -25.57 | Peak     | 229  | 218  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11g              | Temp/Humi     | :22.1C/61%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

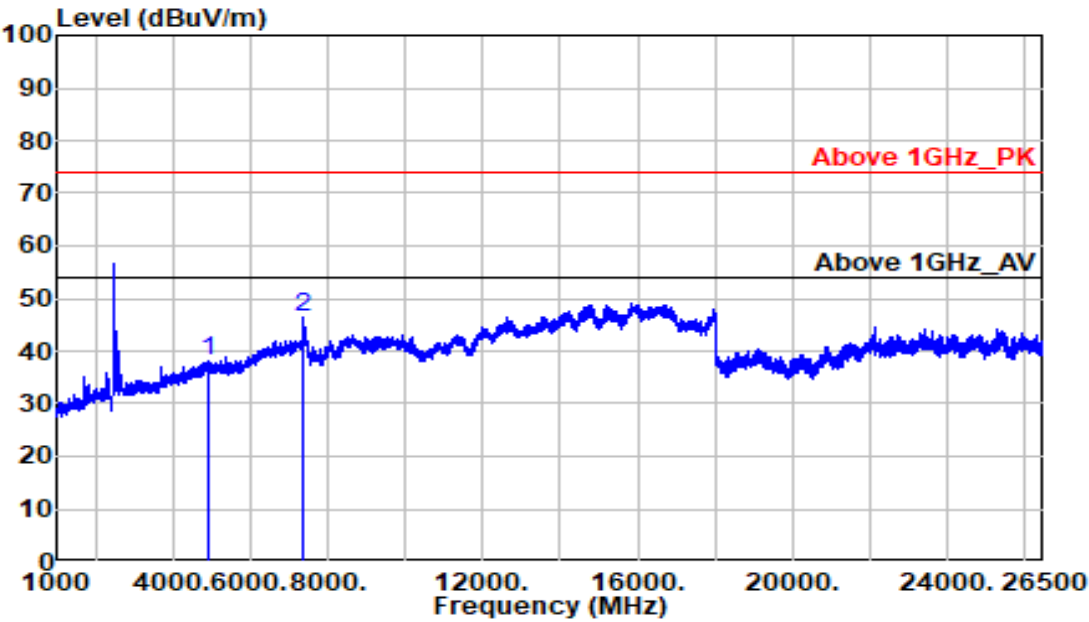

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4924.000 | 42.14 | -4.03  | 38.11    | 74.00  | -35.89 | Peak     | 197  | 137  |
| 7386.000 | 44.35 | 2.00   | 46.35    | 74.00  | -27.65 | Peak     | 307  | 299  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/61%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

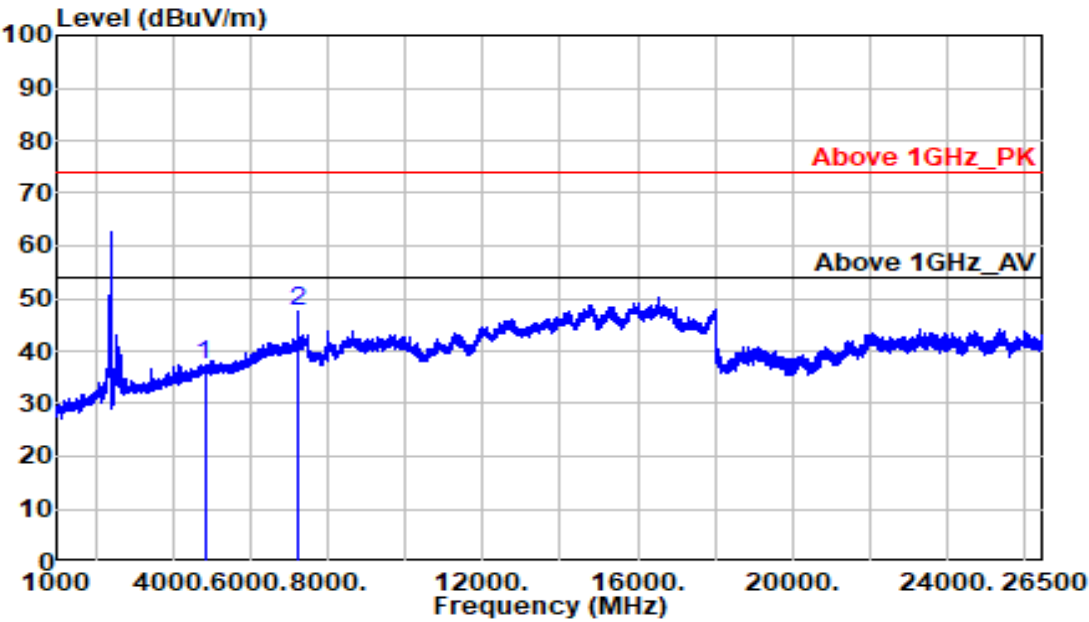

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       |        | dB     | PK/QP/AV | CM   | DEG  |
|          | dBuV  |        | dBuV/m   | dBuV/m |        |          |      |      |
| 4824.000 | 41.65 | -4.35  | 37.30    | 74.00  | -36.70 | Peak     | 271  | 354  |
| 7236.000 | 45.82 | 1.71   | 47.53    | 74.00  | -26.47 | Peak     | 197  | 219  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/61%          |
| Channel        | :2412 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

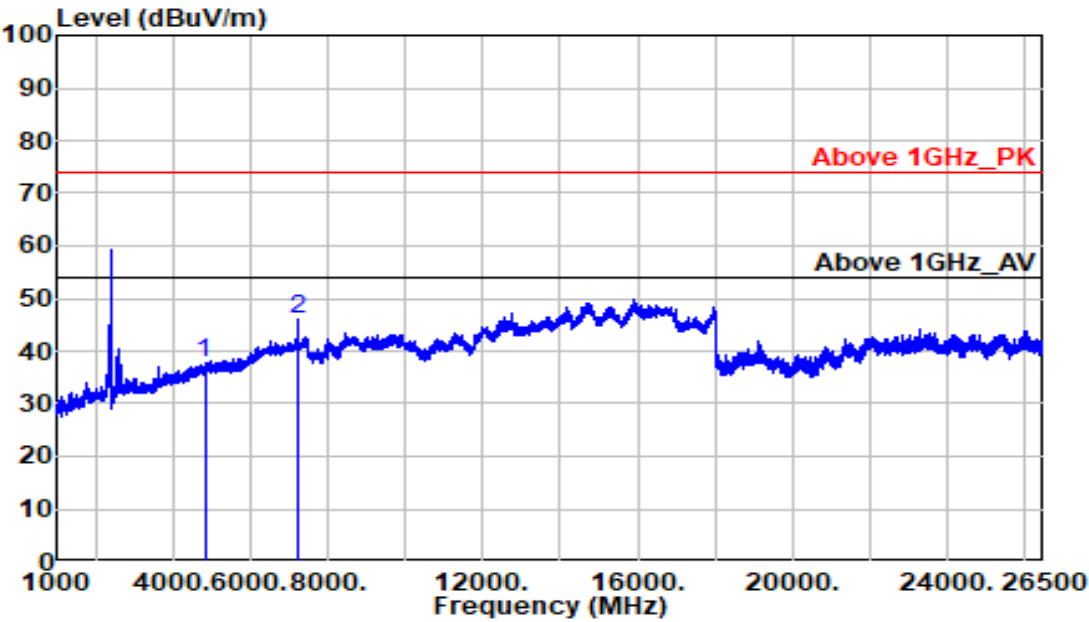

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4824.000 | 42.00 | -4.35  | 37.65    | 74.00  | -36.35 | Peak     | 214  | 162  |
| 7236.000 | 44.42 | 1.71   | 46.13    | 74.00  | -27.87 | Peak     | 319  | 278  |





Report No.

Product Name

Operation Band

Channel

Mode

Plane

Note

:6128626011401

:Wired Video Doorbell

:802.11n20

:2417 MHz

:Tx

:X Plane

:

Test Date

Model Name

Temp/Humi

Antenna Pol

Test Engineer

Test Site

Voltage

:2026-02-03

:BDM00500U


:22.1C/61%

:Vertical

:Kevin Syu

:chamber B


:24Vdc From Adapter

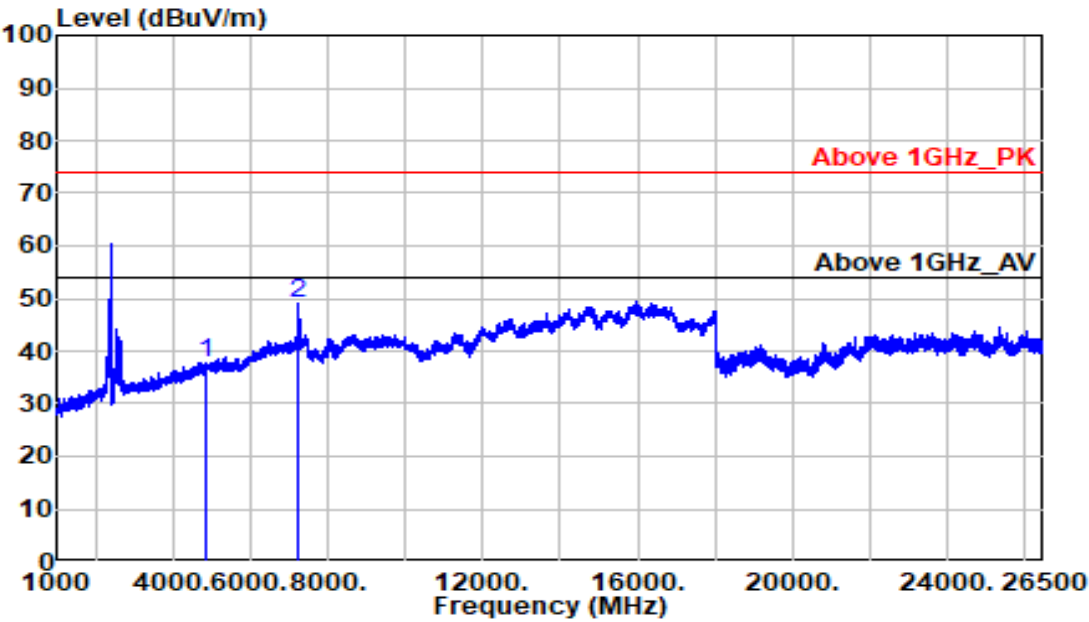

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4834.000 | 41.99 | -4.32  | 37.67    | 74.00  | -36.33 | Peak     | 231  | 242  |
| 7251.000 | 47.45 | 1.74   | 49.19    | 74.00  | -24.81 | Peak     | 297  | 208  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/61%          |
| Channel        | :2417 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

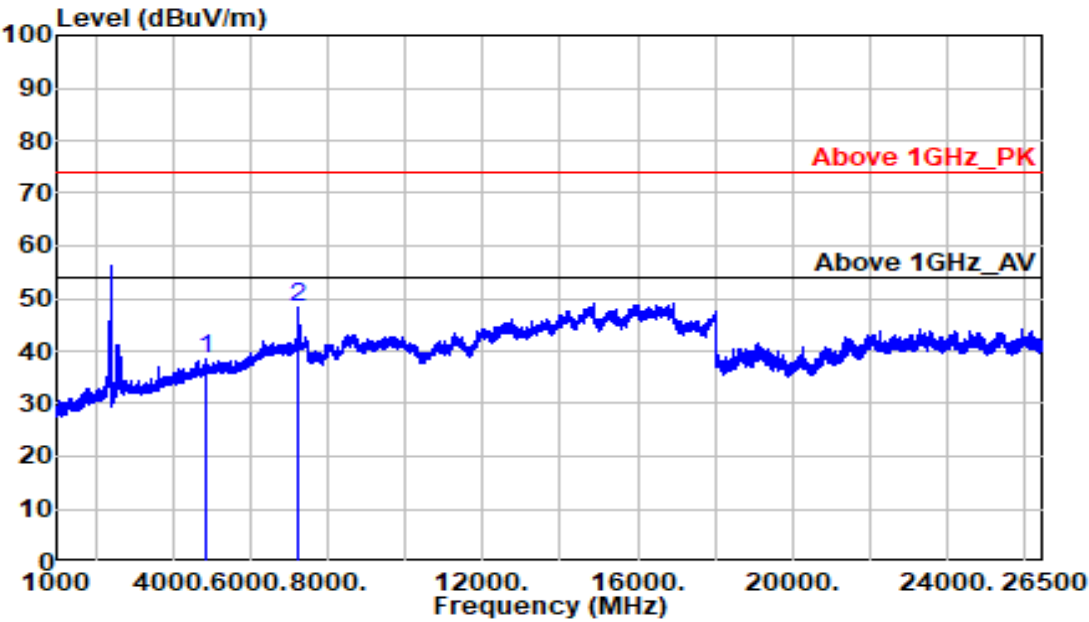

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4834.000 | 42.70 | -4.32  | 38.38    | 74.00  | -35.62 | Peak     | 274  | 101  |
| 7251.000 | 46.50 | 1.74   | 48.24    | 74.00  | -25.76 | Peak     | 311  | 52   |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/61%          |
| Channel        | :2437 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

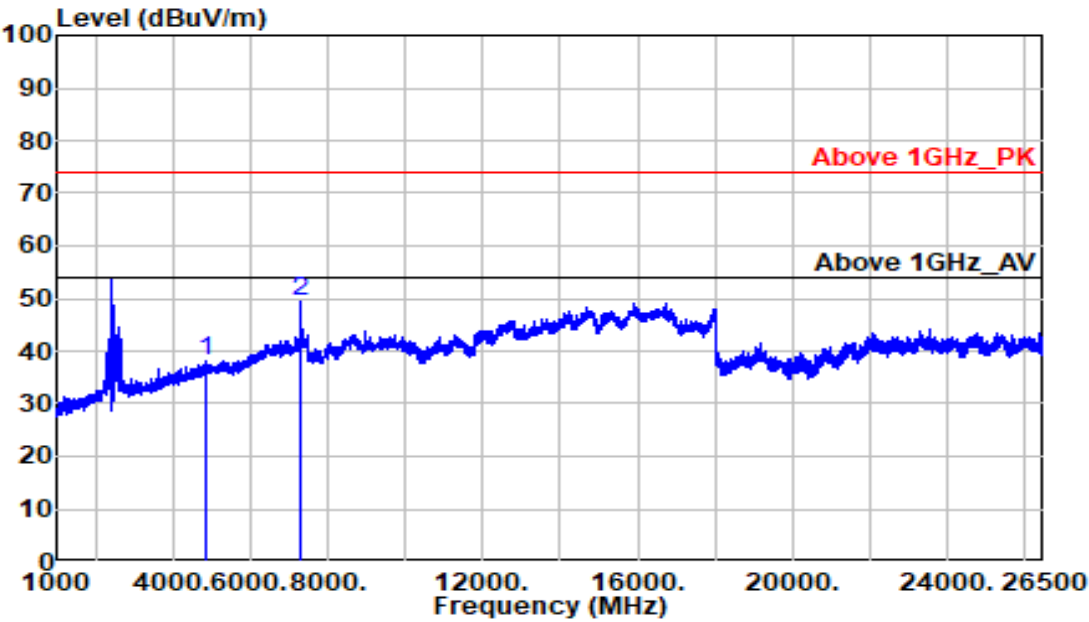

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4874.000 | 42.12 | -4.19  | 37.93    | 74.00  | -36.07 | Peak     | 189  | 100  |
| 7311.000 | 47.74 | 1.85   | 49.59    | 74.00  | -24.41 | Peak     | 246  | 209  |




Report No.  
Product Name  
  
Operation Band  
Channel  
Mode  
Plane  
Note

:6128626011401  
:Wired Video Doorbell  
:802.11n20  
:2437 MHz  
:Tx  
:X Plane  
:

Test Date  
Model Name  
  
Temp/Humi  
Antenna Pol  
Test Engineer  
Test Site  
Voltage

:2026-02-03  
:BDM00500U  
  
:22.1C/61%  
:Horizontal  
:Kevin Syu  
:chamber B  
:24Vdc From Adapter

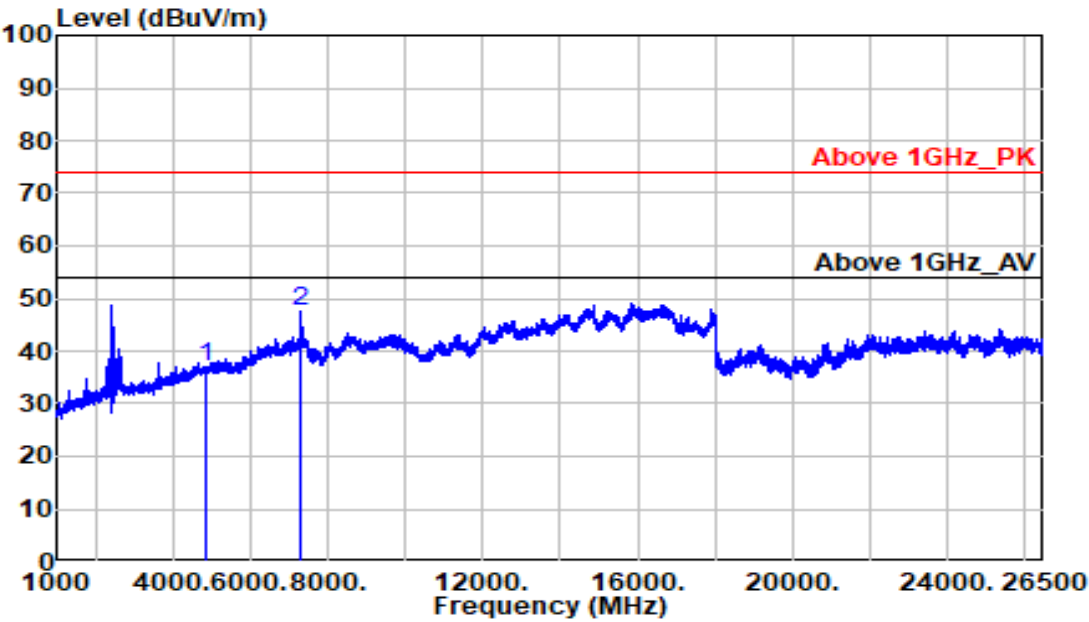

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4874.000 | 41.18 | -4.19  | 36.99    | 74.00  | -37.01 | Peak     | 242  | 198  |
| 7311.000 | 45.88 | 1.85   | 47.73    | 74.00  | -26.27 | Peak     | 312  | 188  |




Report No.  
Product Name  
  
Operation Band  
Channel  
Mode  
Plane  
Note

:6128626011401  
:Wired Video Doorbell  
:802.11n20  
:2457 MHz  
:Tx  
:X Plane  
:

Test Date  
Model Name  
  
Temp/Humi  
Antenna Pol  
Test Engineer  
Test Site  
Voltage

:2026-02-03  
:BDM00500U  
  
:22.1C/61%  
:Vertical  
:Kevin Syu  
:chamber B  
:24Vdc From Adapter

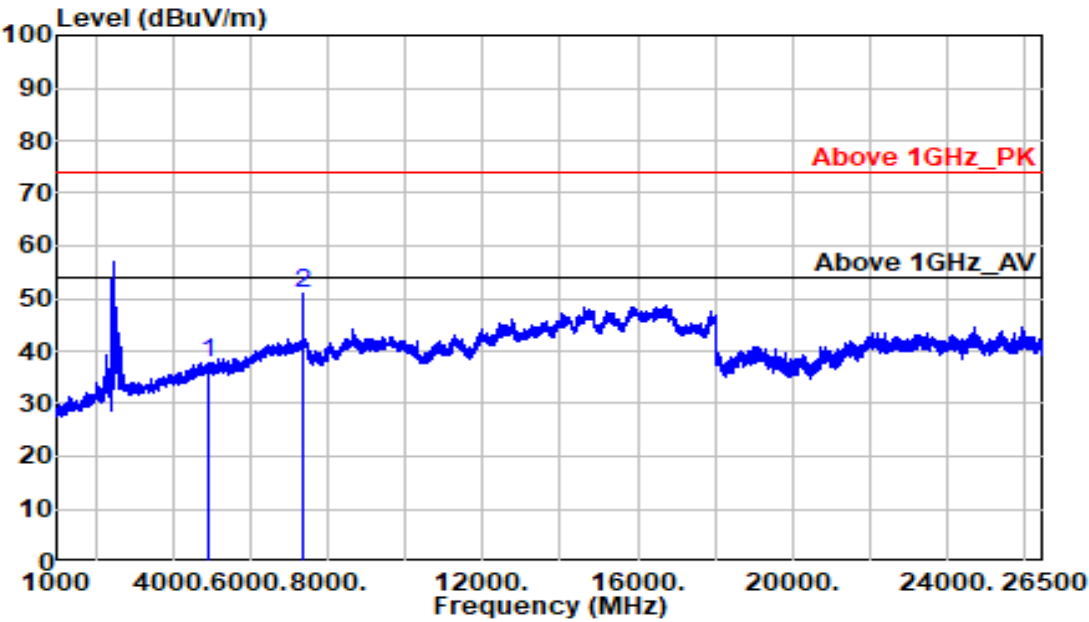

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4914.000 | 41.78 | -4.06  | 37.72    | 74.00  | -36.28 | Peak     | 241  | 117  |
| 7371.000 | 48.87 | 1.97   | 50.84    | 74.00  | -23.16 | Peak     | 269  | 231  |




Report No.  
Product Name  
  
Operation Band  
Channel  
Mode  
Plane  
Note

:6128626011401  
:Wired Video Doorbell  
:802.11n20  
:2457 MHz  
:Tx  
:X Plane  
:

Test Date  
Model Name  
  
Temp/Humi  
Antenna Pol  
Test Engineer  
Test Site  
Voltage


:2026-02-03  
:BDM00500U  
  
:22.1C/61%  
:Horizontal  
:Kevin Syu  
:chamber B  
:24Vdc From Adapter

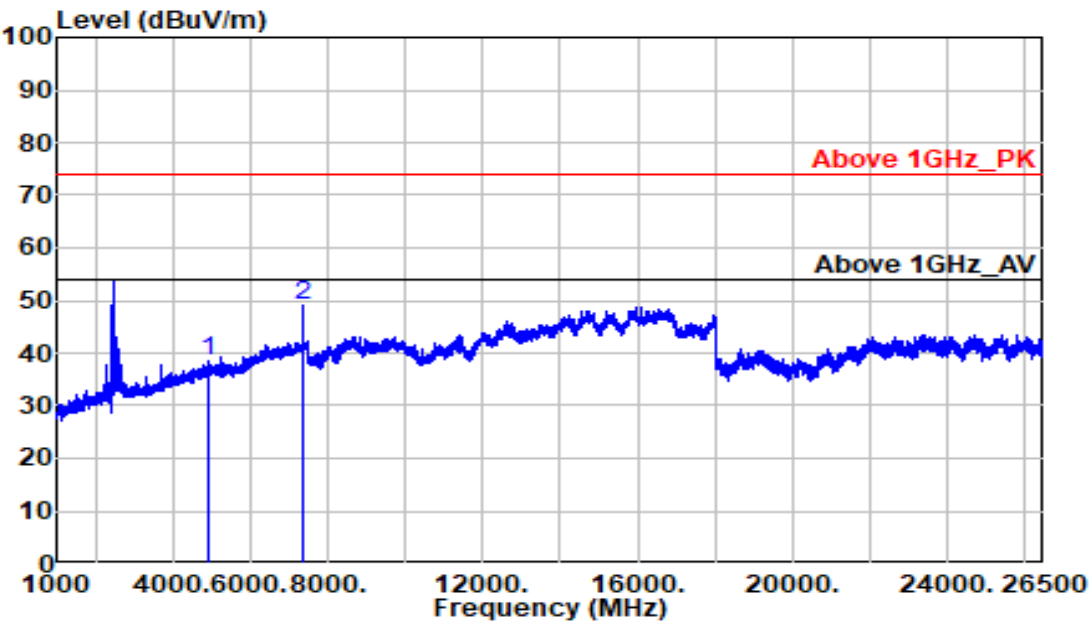

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4914.000 | 42.66 | -4.06  | 38.60    | 74.00  | -35.40 | Peak     | 217  | 176  |
| 7371.000 | 46.96 | 1.97   | 48.93    | 74.00  | -25.07 | Peak     | 331  | 139  |




|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/61%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Vertical           |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

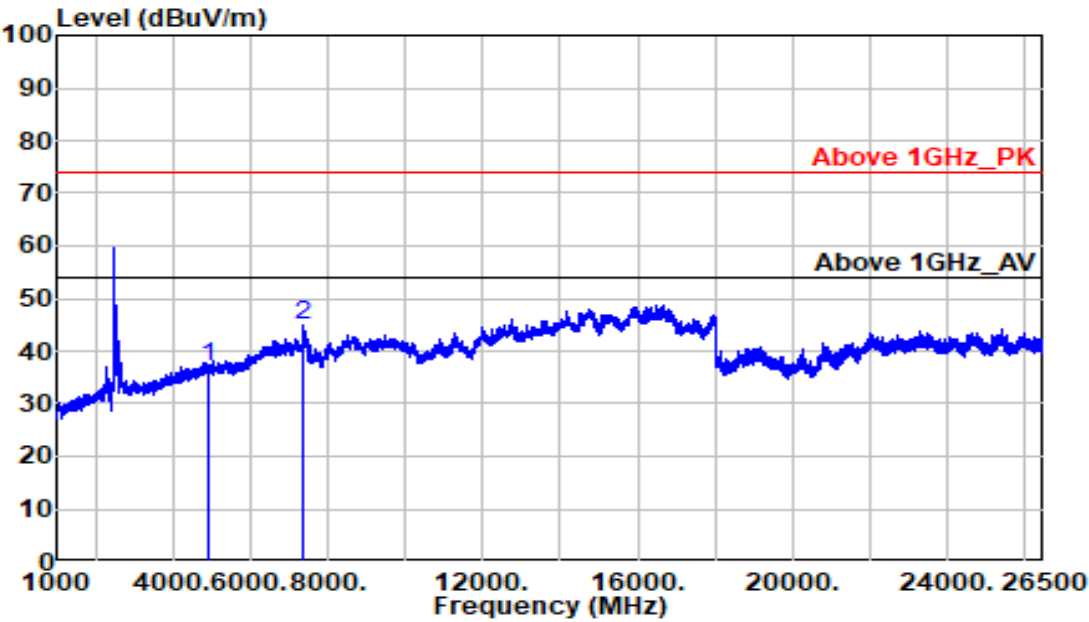

| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   |        | LV       |        |        |          |      |      |
|          | dBuV  | dB/m   | dBuV/m   | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4924.000 | 41.17 | -4.03  | 37.14    | 74.00  | -36.86 | Peak     | 241  | 246  |
| 7386.000 | 42.85 | 2.00   | 44.85    | 74.00  | -29.15 | Peak     | 193  | 238  |



|                |                       |               |                     |
|----------------|-----------------------|---------------|---------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-03         |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U          |
| Operation Band | :802.11n20            | Temp/Humi     | :22.1C/61%          |
| Channel        | :2462 MHz             | Antenna Pol   | :Horizontal         |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu          |
| Plane          | :X Plane              | Test Site     | :chamber B          |
| Note           | :                     | Voltage       | :24Vdc From Adapter |

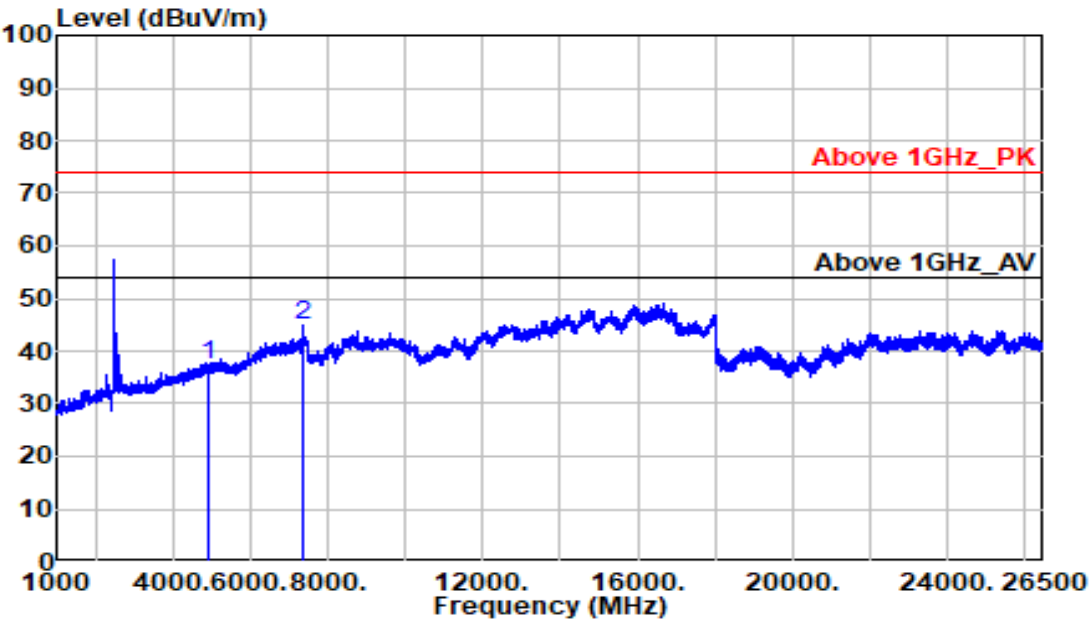


| Freq     | Read  | Factor | Emission | Limit  | Margin | Detector | Apos | TPos |
|----------|-------|--------|----------|--------|--------|----------|------|------|
| MHz      | LV.   | dB/m   | LV       | dBuV/m | dB     | PK/QP/AV | CM   | DEG  |
| 4924.000 | 41.21 | -4.03  | 37.18    | 74.00  | -36.82 | Peak     | 278  | 189  |
| 7386.000 | 42.93 | 2.00   | 44.93    | 74.00  | -29.07 | Peak     | 317  | 184  |



## Appendix H. AC Power Line Conducted Emission


|                |                       |               |                  |
|----------------|-----------------------|---------------|------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-04      |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U       |
| Operation Band | :2.4G                 | Temp/Humi     | :21.5C/62%       |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu       |
| Power          | :120V/60Hz            | Test Site     | :Shielded Room A |
| Condition      | :Line                 | Note          | :AC in           |

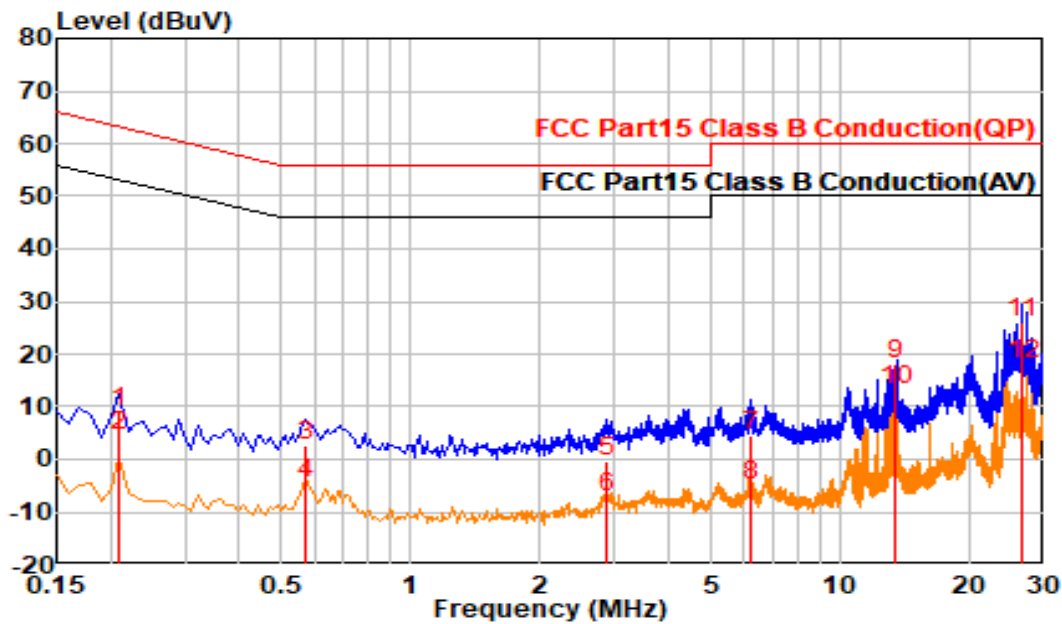

Trace: 1

| Freq   | Read LV. | Factor | Cable Loss | LISN Factor | Emission LV | Limit | Margin | Detect  |
|--------|----------|--------|------------|-------------|-------------|-------|--------|---------|
| MHz    | dBuV     | dB     | dB         | dB          | dBuV        | dBuV  | dB     | QP/AV   |
| 0.210  | -0.73    | 9.62   | 0.01       | 9.61        | 8.89        | 63.22 | -54.33 | QP      |
| 0.210  | -5.11    | 9.62   | 0.01       | 9.61        | 4.51        | 53.22 | -48.71 | Average |
| 0.569  | -7.09    | 9.63   | 0.01       | 9.61        | 2.54        | 56.00 | -53.46 | QP      |
| 0.569  | -14.00   | 9.63   | 0.01       | 9.61        | -4.37       | 46.00 | -50.37 | Average |
| 2.876  | -9.92    | 9.66   | 0.03       | 9.64        | -0.26       | 56.00 | -56.26 | QP      |
| 2.876  | -17.01   | 9.66   | 0.03       | 9.64        | -7.35       | 46.00 | -53.35 | Average |
| 6.222  | -5.06    | 9.69   | 0.04       | 9.65        | 4.63        | 60.00 | -55.37 | QP      |
| 6.222  | -14.57   | 9.69   | 0.04       | 9.65        | -4.87       | 50.00 | -54.87 | Average |
| 13.559 | 8.56     | 9.70   | 0.06       | 9.64        | 18.25       | 60.00 | -41.75 | QP      |
| 13.559 | 3.38     | 9.70   | 0.06       | 9.64        | 13.08       | 50.00 | -36.92 | Average |
| 26.608 | 16.60    | 9.59   | 0.08       | 9.50        | 26.19       | 60.00 | -33.81 | QP      |
| 26.608 | 8.41     | 9.59   | 0.08       | 9.50        | 18.00       | 50.00 | -32.00 | Average |


|                |                       |               |                  |
|----------------|-----------------------|---------------|------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-04      |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U       |
| Operation Band | :2.4G                 | Temp/Humi     | :21.5C/62%       |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu       |
| Power          | :120V/60Hz            | Test Site     | :Shielded Room A |
| Condition      | :Neutral              | Note          | :AC in           |

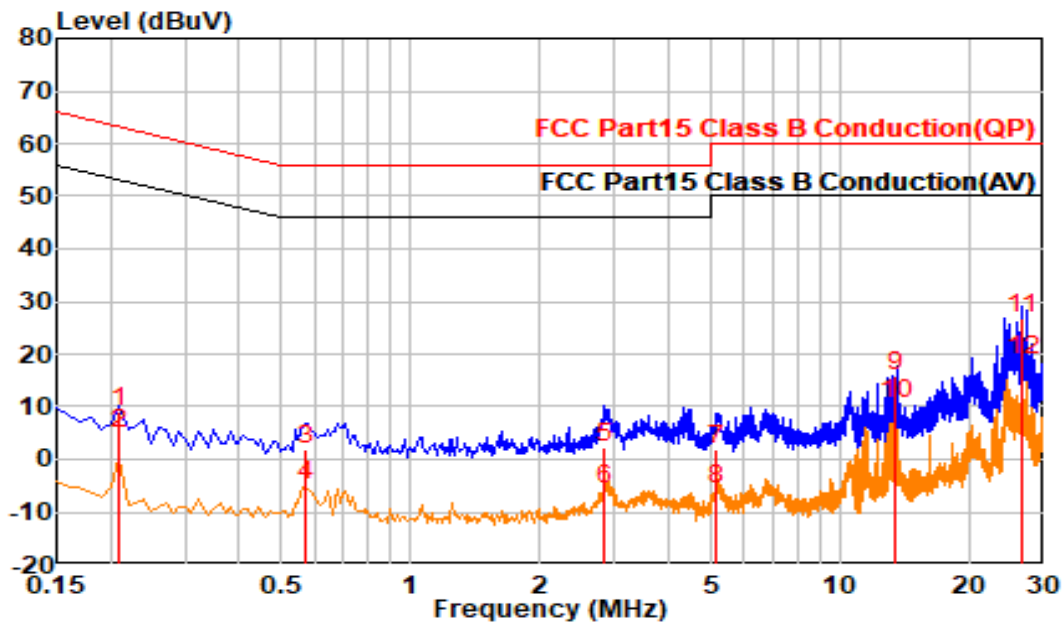

Trace: 1

| Freq   | Read LV. | Factor | Cable Loss | LISN Factor | Emission LV | Limit | Margin | Detect  |
|--------|----------|--------|------------|-------------|-------------|-------|--------|---------|
| MHz    | dBuV     | dB     | dB         | dB          | dBuV        | dBuV  | dB     | QP/AV   |
| 0.210  | -0.62    | 9.62   | 0.01       | 9.61        | 9.00        | 63.21 | -54.21 | QP      |
| 0.210  | -4.60    | 9.62   | 0.01       | 9.61        | 5.02        | 53.21 | -48.19 | Average |
| 0.570  | -7.66    | 9.62   | 0.01       | 9.61        | 1.96        | 56.00 | -54.04 | QP      |
| 0.570  | -14.36   | 9.62   | 0.01       | 9.61        | -4.74       | 46.00 | -50.74 | Average |
| 2.834  | -7.34    | 9.65   | 0.03       | 9.63        | 2.31        | 56.00 | -53.69 | QP      |
| 2.834  | -15.27   | 9.65   | 0.03       | 9.63        | -5.62       | 46.00 | -51.62 | Average |
| 5.162  | -7.64    | 9.68   | 0.04       | 9.64        | 2.04        | 60.00 | -57.96 | QP      |
| 5.162  | -15.43   | 9.68   | 0.04       | 9.64        | -5.75       | 50.00 | -55.75 | Average |
| 13.558 | 6.04     | 9.73   | 0.06       | 9.67        | 15.78       | 60.00 | -44.22 | QP      |
| 13.558 | 1.00     | 9.73   | 0.06       | 9.67        | 10.73       | 50.00 | -39.27 | Average |
| 26.608 | 17.15    | 9.71   | 0.08       | 9.63        | 26.86       | 60.00 | -33.14 | QP      |
| 26.608 | 9.04     | 9.71   | 0.08       | 9.63        | 18.75       | 50.00 | -31.25 | Average |


|                |                       |               |                  |
|----------------|-----------------------|---------------|------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-04      |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U       |
| Operation Band | :2.4G                 | Temp/Humi     | :21.5C/62%       |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu       |
| Power          | :120V/60Hz            | Test Site     | :Shielded Room A |
| Condition      | :Line                 | Note          | :DC in           |

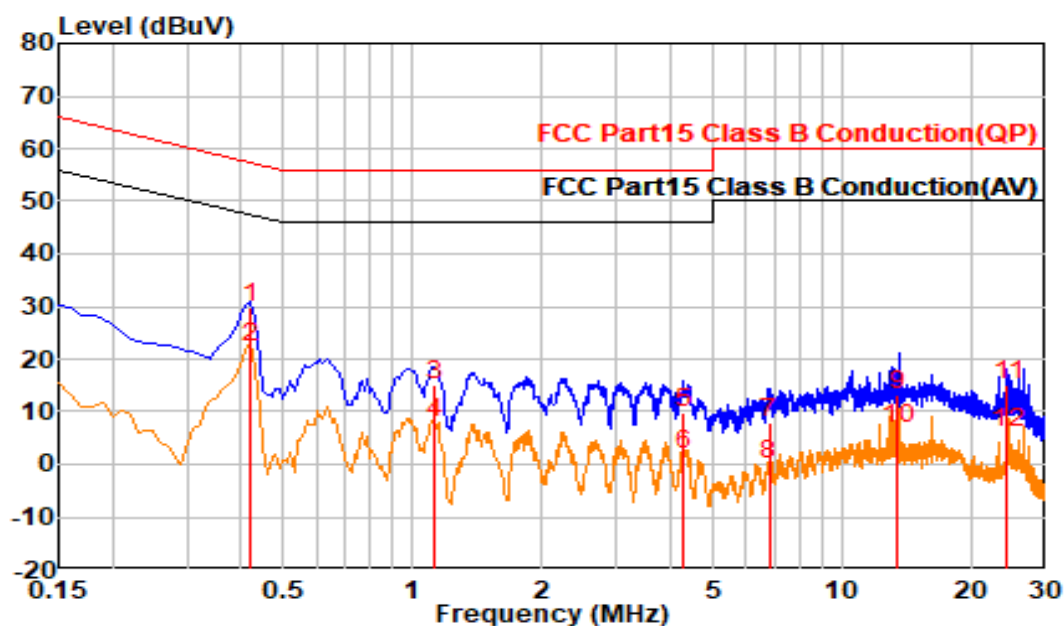

Trace: 1

| Freq   | Read LV. | Factor | Cable Loss | LISN Factor | Emission LV | Limit | Margin | Detect  |
|--------|----------|--------|------------|-------------|-------------|-------|--------|---------|
| MHz    | dBuV     | dB     | dB         | dB          | dBuV        | dBuV  | dB     | QP/AV   |
| 0.419  | 20.02    | 9.62   | 0.01       | 9.61        | 29.64       | 57.46 | -27.83 | QP      |
| 0.419  | 12.67    | 9.62   | 0.01       | 9.61        | 22.29       | 47.46 | -25.17 | Average |
| 1.119  | 5.62     | 9.64   | 0.02       | 9.62        | 15.26       | 56.00 | -40.74 | QP      |
| 1.119  | -1.89    | 9.64   | 0.02       | 9.62        | 7.75        | 46.00 | -38.25 | Average |
| 4.294  | 0.17     | 9.68   | 0.04       | 9.64        | 9.84        | 56.00 | -46.16 | QP      |
| 4.294  | -7.81    | 9.68   | 0.04       | 9.64        | 1.87        | 46.00 | -44.13 | Average |
| 6.777  | -1.80    | 9.70   | 0.04       | 9.65        | 7.89        | 60.00 | -52.11 | QP      |
| 6.777  | -9.55    | 9.70   | 0.04       | 9.65        | 0.14        | 50.00 | -49.86 | Average |
| 13.556 | 3.47     | 9.70   | 0.06       | 9.64        | 13.16       | 60.00 | -46.84 | QP      |
| 13.556 | -2.96    | 9.70   | 0.06       | 9.64        | 6.74        | 50.00 | -43.26 | Average |
| 24.350 | 5.36     | 9.62   | 0.08       | 9.54        | 14.98       | 60.00 | -45.02 | QP      |
| 24.350 | -3.47    | 9.62   | 0.08       | 9.54        | 6.14        | 50.00 | -43.86 | Average |

|                |                       |               |                  |
|----------------|-----------------------|---------------|------------------|
| Report No.     | :6128626011401        | Test Date     | :2026-02-04      |
| Product Name   | :Wired Video Doorbell | Model Name    | :BDM00500U       |
| Operation Band | :2.4G                 | Temp/Humi     | :21.5C/62%       |
| Mode           | :Tx                   | Test Engineer | :Kevin Syu       |
| Power          | :120V/60Hz            | Test Site     | :Shielded Room A |
| Condition      | :Neutral              | Note          | :DC in           |

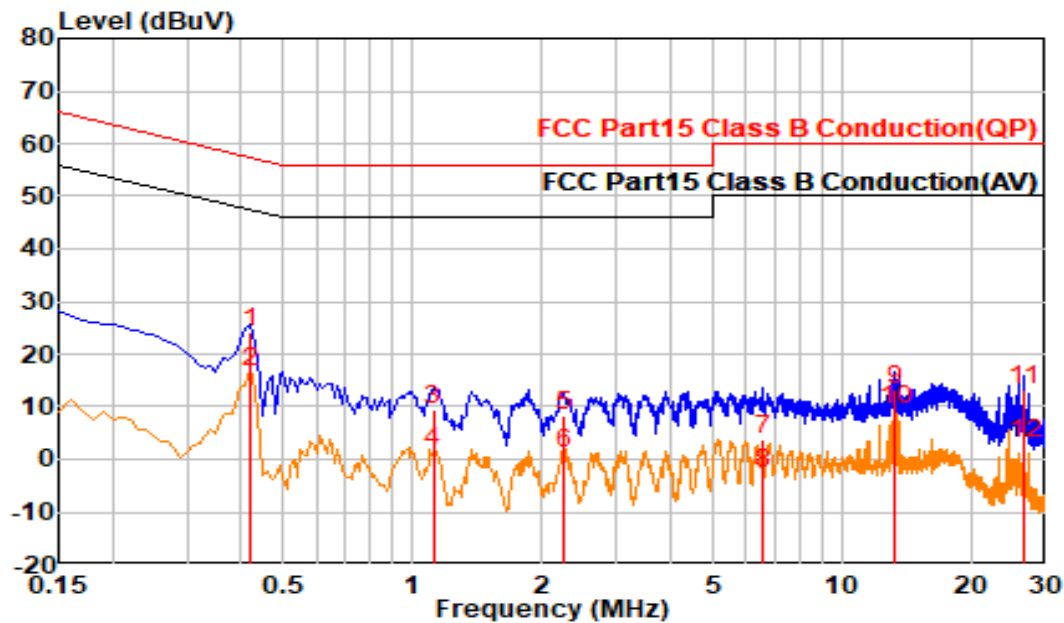

Trace: 1

| Freq   | Read LV. | Factor | Cable Loss | LISN Factor | Emission LV | Limit | Margin | Detect  |
|--------|----------|--------|------------|-------------|-------------|-------|--------|---------|
| MHz    | dBuV     | dB     | dB         | dB          | dBuV        | dBuV  | dB     | QP/AV   |
| 0.420  | 14.36    | 9.62   | 0.01       | 9.61        | 23.98       | 57.44 | -33.46 | QP      |
| 0.420  | 6.92     | 9.62   | 0.01       | 9.61        | 16.54       | 47.44 | -30.90 | Average |
| 1.118  | -0.31    | 9.63   | 0.02       | 9.61        | 9.33        | 56.00 | -46.67 | QP      |
| 1.118  | -8.13    | 9.63   | 0.02       | 9.61        | 1.50        | 46.00 | -44.50 | Average |
| 2.242  | -1.41    | 9.65   | 0.03       | 9.62        | 8.23        | 56.00 | -47.77 | QP      |
| 2.242  | -8.56    | 9.65   | 0.03       | 9.62        | 1.08        | 46.00 | -44.92 | Average |
| 6.532  | -6.05    | 9.69   | 0.04       | 9.65        | 3.65        | 60.00 | -56.35 | QP      |
| 6.532  | -12.16   | 9.69   | 0.04       | 9.65        | -2.46       | 50.00 | -52.46 | Average |
| 13.305 | 3.44     | 9.73   | 0.06       | 9.67        | 13.17       | 60.00 | -46.83 | QP      |
| 13.305 | -0.41    | 9.73   | 0.06       | 9.67        | 9.32        | 50.00 | -40.68 | Average |
| 26.611 | 3.44     | 9.71   | 0.08       | 9.63        | 13.16       | 60.00 | -46.84 | QP      |
| 26.611 | -6.75    | 9.71   | 0.08       | 9.63        | 2.96        | 50.00 | -47.04 | Average |