



Antenna Specification Approval Document

CUSTOMER NAME:	NOVA STAR				
Customer Material Code:	120010003				
TYPE NAME:	FS-3020-2450				
SPECIFICATION:	Rubber Antenna-2.4GHz 5dBi-Rubber Sleeve - RP-SMA Male- L=195mm (JB-049)				
一、 Newly Approved ☐					
二、 Material Approved ☐					
三、 SPEC Approved ☒					
Manufacturer/Supplier R&D Acknowledgment			Customer Confirmation		
(APPROVAL BY) :			(APPROVAL BY) :		
(APPROVAL DATE) : 2026-05-27			(APPROVAL DATE) :		
SUPPLIER			CUSTOMER		
RF:	Structures:	Business	TESTED	CHECKED	APPROVED
Guo Xi	Xu Long	Li sheng			

Feisheng Electronics Co., Ltd.


Address: Feisheng Electronics, 3rd Floor, Building A8, Guangxingteng Industrial Park, Longdong
Community, Baolong Street, Longgang District, Shenzhen
Phone number: 0755-85218289 FAX: 0755-85223189

INDEX.

1)	Cover cover.....	1
2)	Catalog.....	2
3)	2D drawings.....	3
4)	Product specification parameters.....	4
5)	Test report of passive waveform loss value.....	5-10
6)	Environmental test report.....	11-14

Modify the record

Versions	Dates	RF	Modify the content
A0	2019-07-03	Chen Yanghui	
A1	2026-05-27	Hu Yongqi	Provide English specification acknowledgment

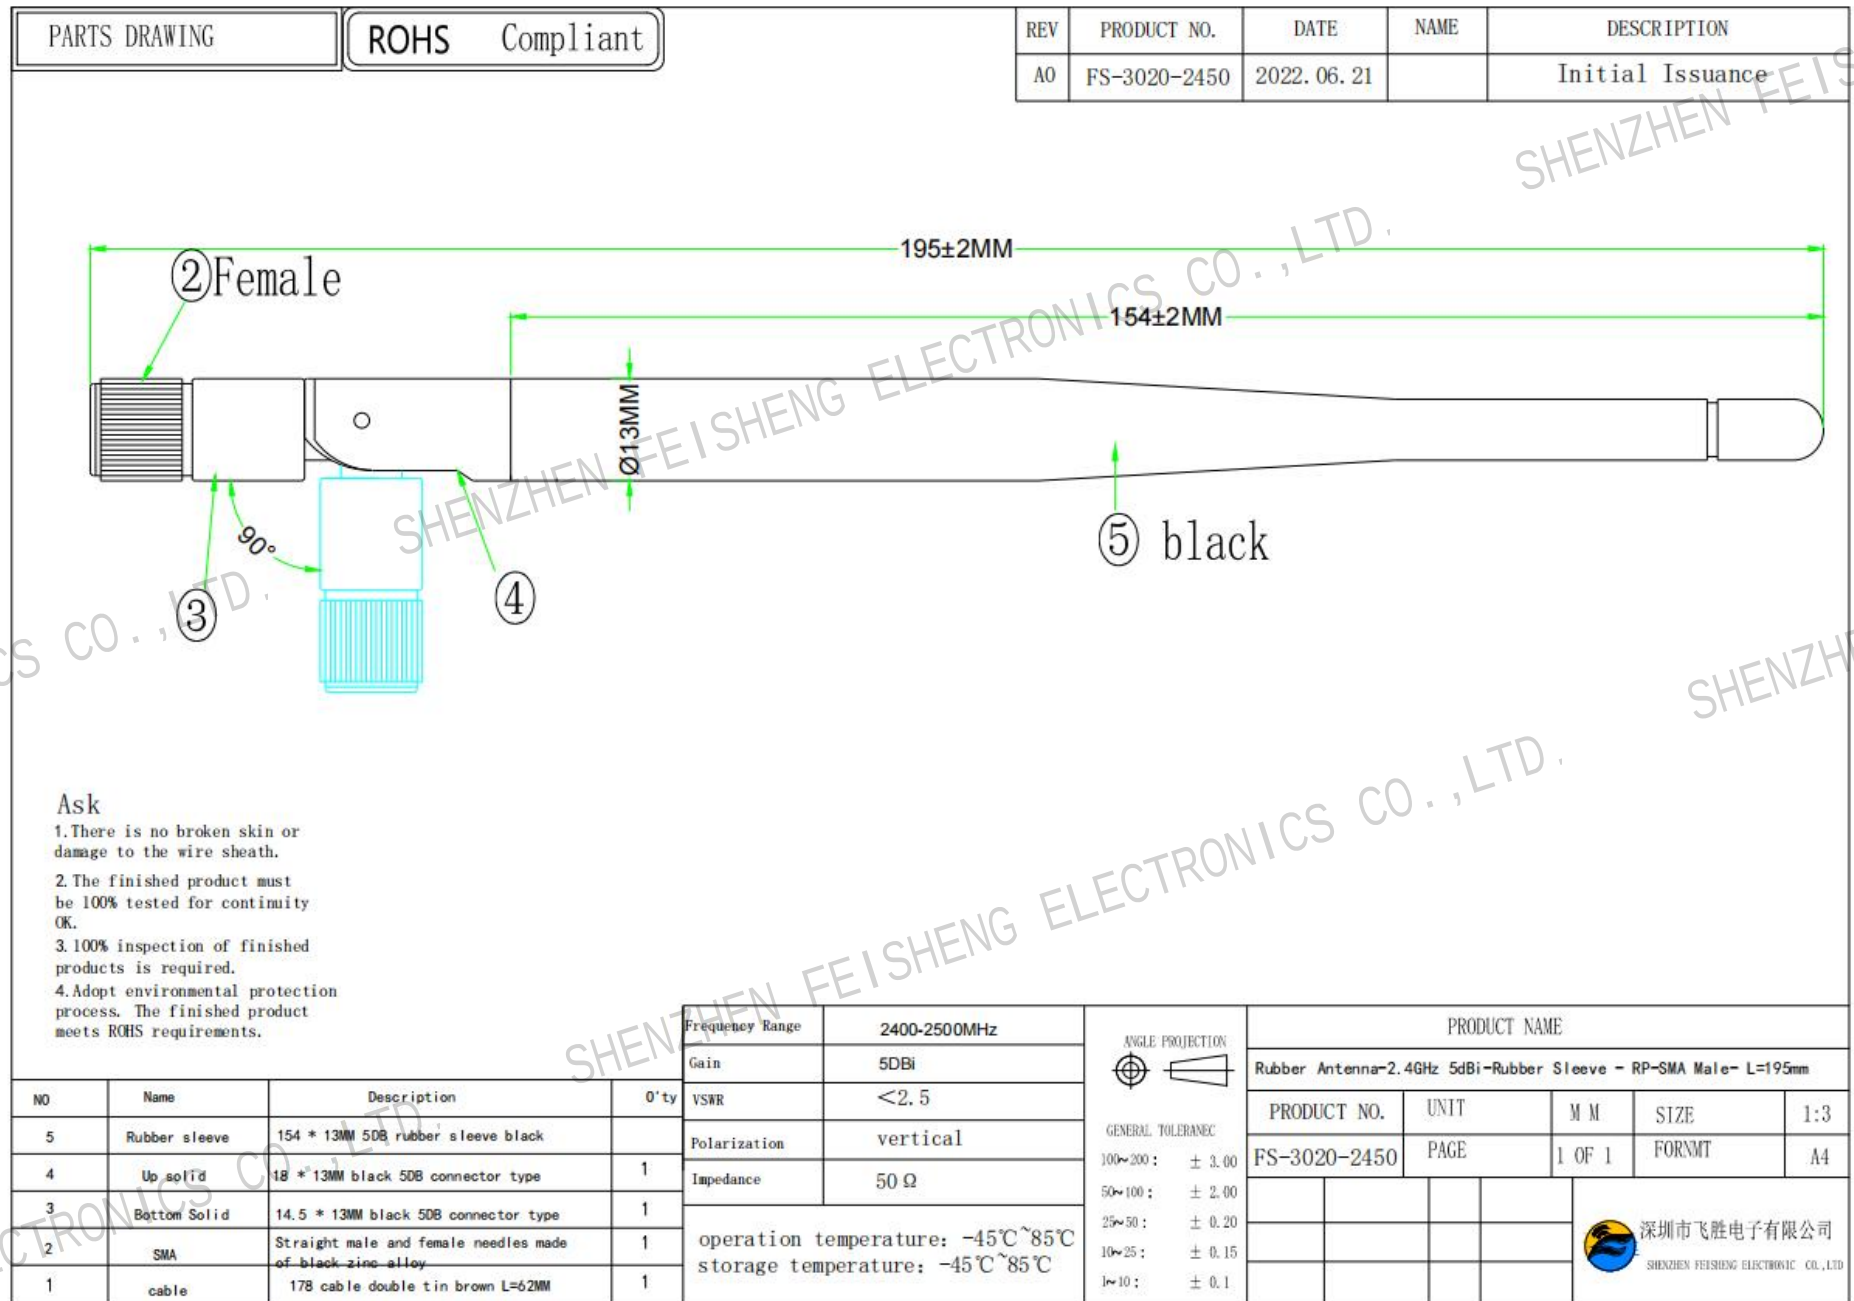

Product Features Specification Table

一、Basic characteristics of the product:

DESCRIPTION	VALUE
Frequency Range	2400-2500MHz
Impedance	50 Ω
VSWR	<2.5
Gain	5DBi
Radiation	Omni-directional
Polarization	linear Vertical
Connector model	RP-SMA-male
Operating temperature	-40℃~+80℃
Storage temperature	-45℃~+85℃

二、Product size:

Dimensions (mm)	195* φ 13	Fixing method	/
Shell color	Black	Connector Model	RP-SMA-male
cable	RG178 cable, double tin, brown		

Test data and graphs

1. Summary:

This report to account for the measurement setup and result of the Antenna. The measurement setup includes s-parameter, The measured data for Antenna are presented and analysis.

2. S-Parameter Measurement S:

A. Reflection coefficient :

(a) Instrument: Network Analyzer

(b) Setup:

(1) Calibrate the Network Analyzer by one port calibration using O.S.L. calibration kits.

(2) Connect the antenna under test to the Network Analyzer.

(3) Measure the S11(reflection coefficient) shown in Fig. 1.

(4) Generally, the S11 is less than -10dB to ensure the 90% VSWR 2.0:1 power into antenna and only less than 10% power back to system.

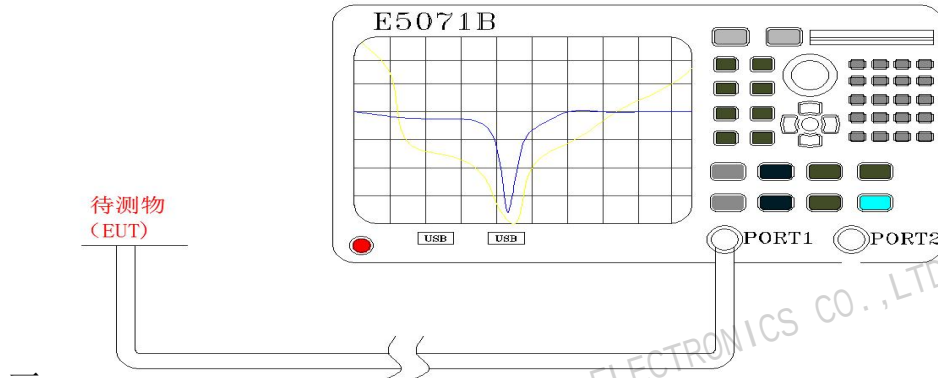



Fig.1 Antenna measured in Network Analyzer

3. S-Parameter Measurement Result S:

S-Parameter test data :

Frequency MHz	2400	2450	2500
Loss DB value	1.55	1.67	1.95


S-Parameter test image :

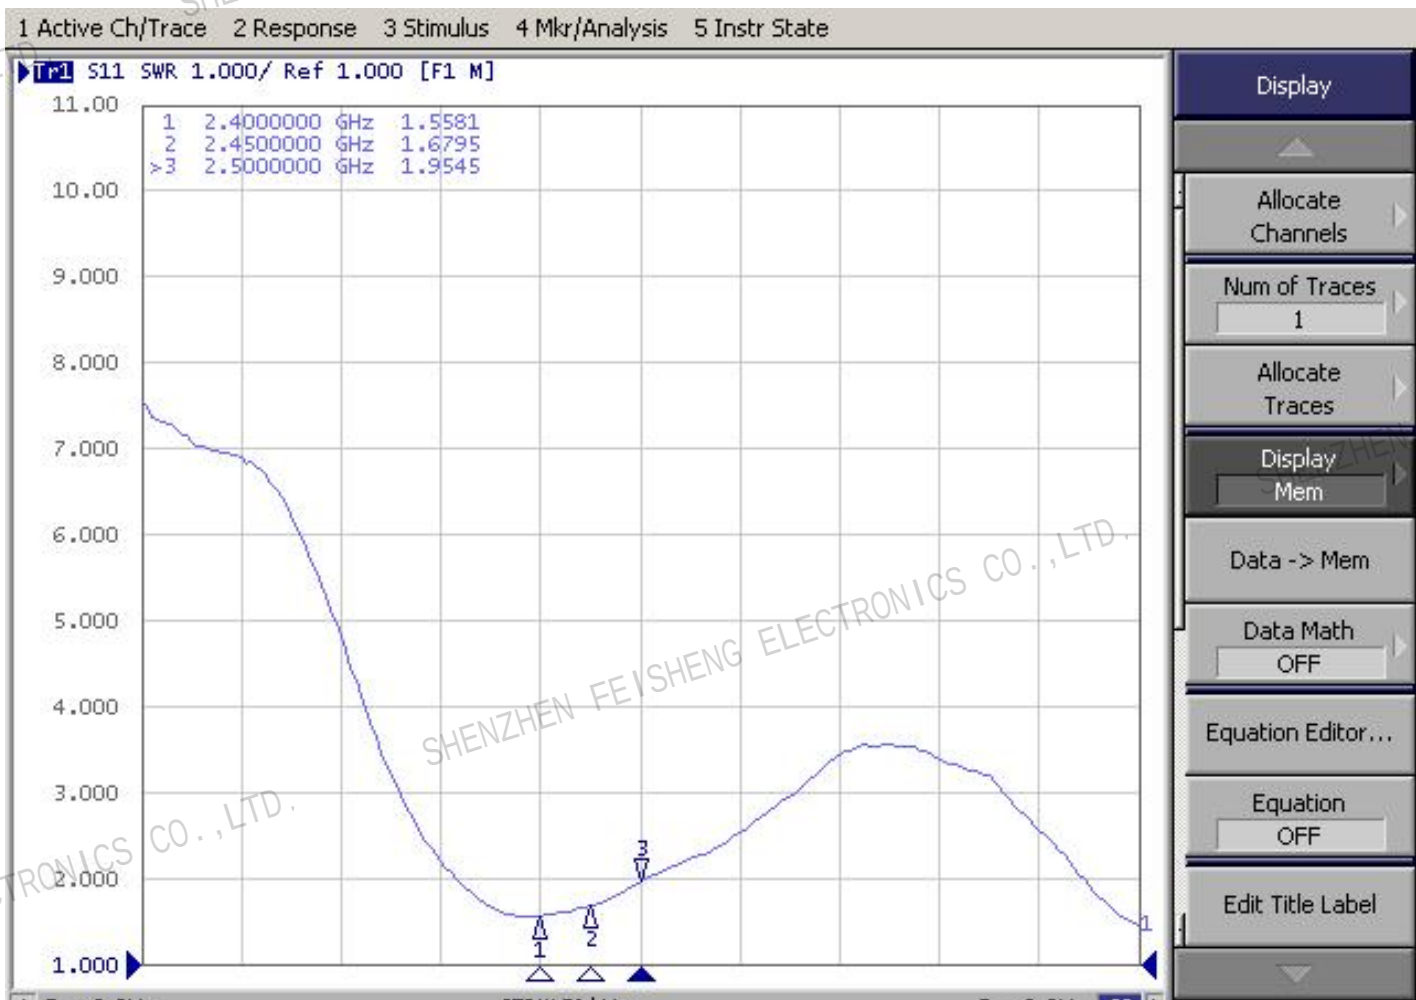

Product actual photo:







Darkroom test environment:

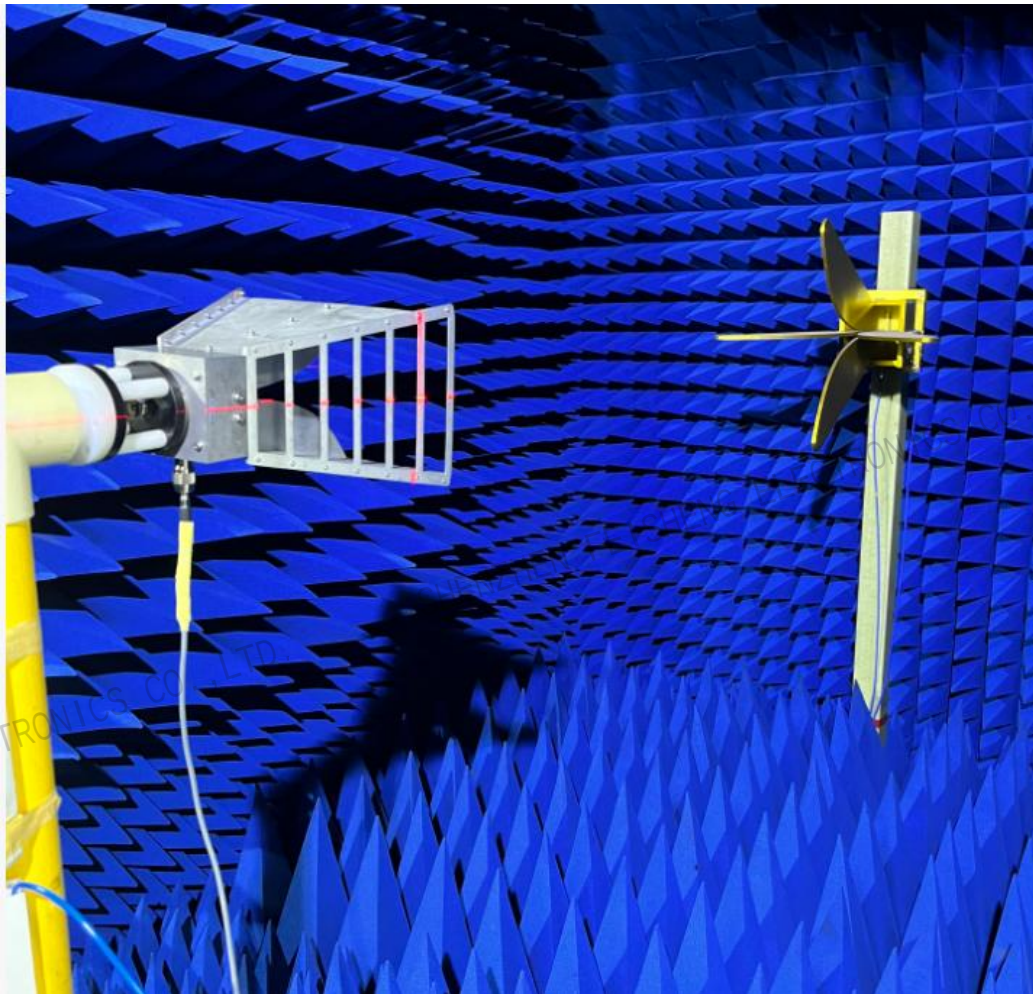





Passive numerical value:

Passive Test For 2400-2500		
Freq (MHz)	Effi (%)	Gain (dBi)
2400	86.6	4.45
2410	93.61	4.73
2420	90.54	4.59
2430	85.88	4.45
2440	89.45	4.64
2450	94.94	4.93
2460	95.39	5.03
2470	91.53	4.81
2480	89.47	4.63
2490	91.67	4.67
2500	91.9	4.64

2D/3D:

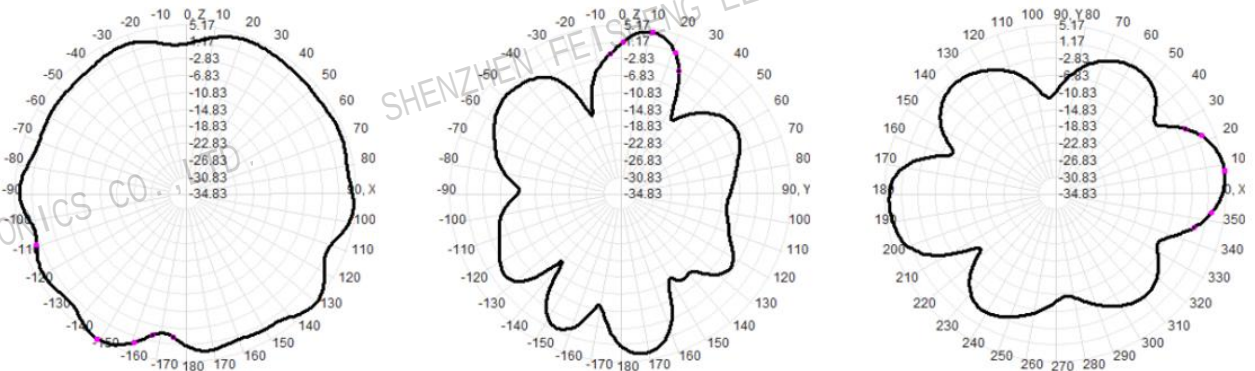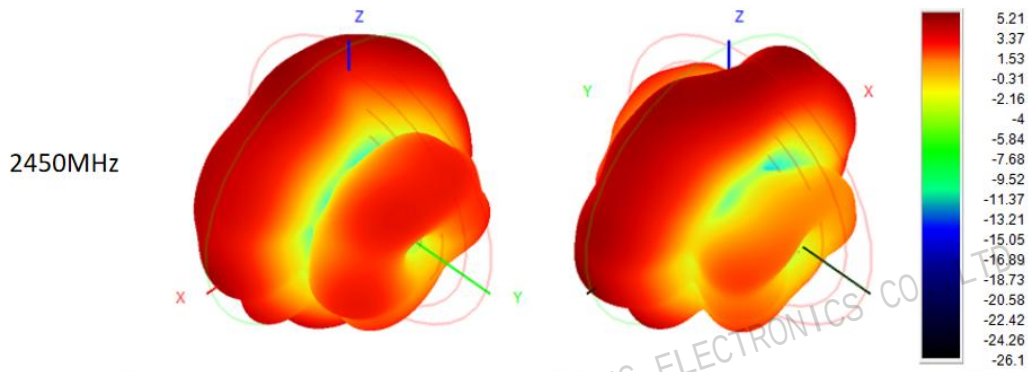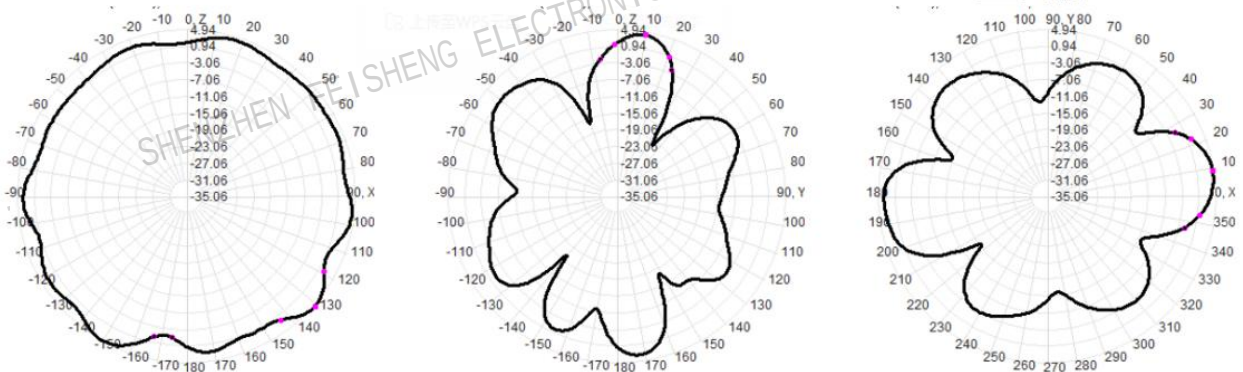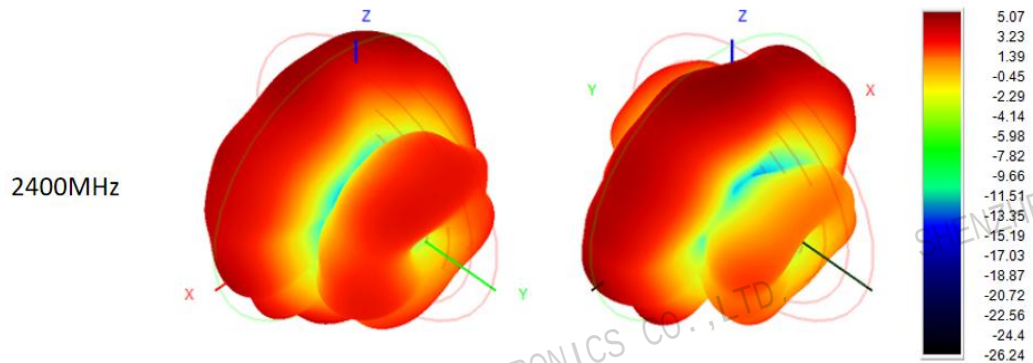

2500MHz

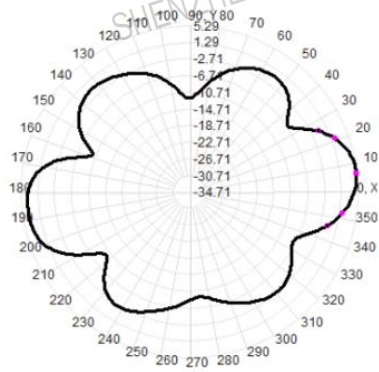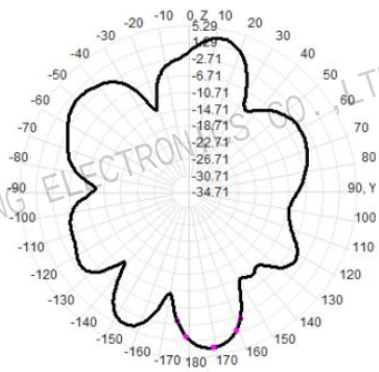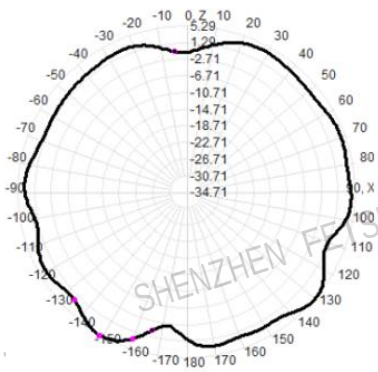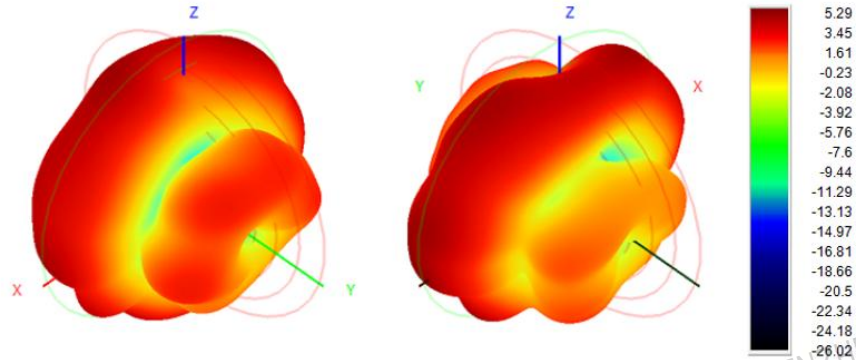

Environmental test requirements

Preface	Test items	Test methods and conditions	Test equipment	Test results
1	Temperature and humidity test	Reference EIA 364-31 Method Three, Test Condition A The purpose of this test process is to conduct detailed standard tests. The products used are affected by high humidity and heat. Influence the performance of the material for evaluation. Requirements: Temperature: 85℃ Humidity: 90~95% (R.H) Time : 72 hours	K. SON INS THS-A4L-150	Qualified
2	Low temperature test	Refer to Feisheng Electronic Test Specification The measured sample should be traveled in a temperature-balanced environment, and its temperature setting Set at -45 ° C Requirements : Time : 24 hours	K. SON INS THS-A4L-150	Qualified
3	High temperature test	Refer to Feisheng Electronic Test Specification: The measured sample should be placed in a constant temperature environment, and the gas temperature should be set at 70℃. Requirements : Time : 24 hours	K. SON INS THS-A4L-150	Qualified

4	Hot and cold tests	Refer to Feisheng Electronic Test Specification: The measured sample should be placed in a fixed environment, and the temperature should be set at -45~85℃. Requirements : More than 8 hours. (30 minutes/time, 12 cycles)	K. SON INS THS-A4L-150	Qualified
5	Salt spray test	Refer to Feisheng Electronic Test Specification: The tested sample should be placed in a fixed environment: NaCL Concentration: 40-60g/1Kg PH value: 6.5-7.2 Test time: 24 hours 1. Gold-plated products are not allowed to peel with rust spots. 2. Other nickel-plated, tinned and galvanized products shall not have more than two rust points on the same shaft or surface.	Salt spray tester	Qualified

Mechanical test requirements

Preface	Test items	Test methods and conditions	Test equipment	Test results
1	Vibration test	Test condition A The purpose of this test process is to evaluate the products used in the detailed standard test methods, which are moved or moved to affect the performance of the material. Requirements : Vibration range: 10-55HZ Displacement amplitude value: 0.35mm Acceleration amplitude: 50.0M/S Number of frequency sweeping cycles: 30Times	Vibration tester	Qualified
2	DROP TESTS	Refer to Feisheng Electronic Test Specification: The measured sample should be placed at a certain height, and its height should be set to 1 meter, and it should fall freely 3 times in the direction of 6 surfaces. Requirements : The mechanical characteristics of the product are normal after the drop test.	Drop test fixtures	Qualified

3	Tula test	Refer to Feisheng Electronic Test Specification: Fix the object under test through the fixture, and after applying a certain force in the opposite direction, the product assembly shall not fall off.	Tile tester	Qualified
		Requirements: 1. The product assembly cannot fall off. 2. Minimum tensile force: 1.2KG		

Note: Feisheng Electronics performs the above mechanical and environmental parameter tests before R&D and trial delivery.