



Reference level:

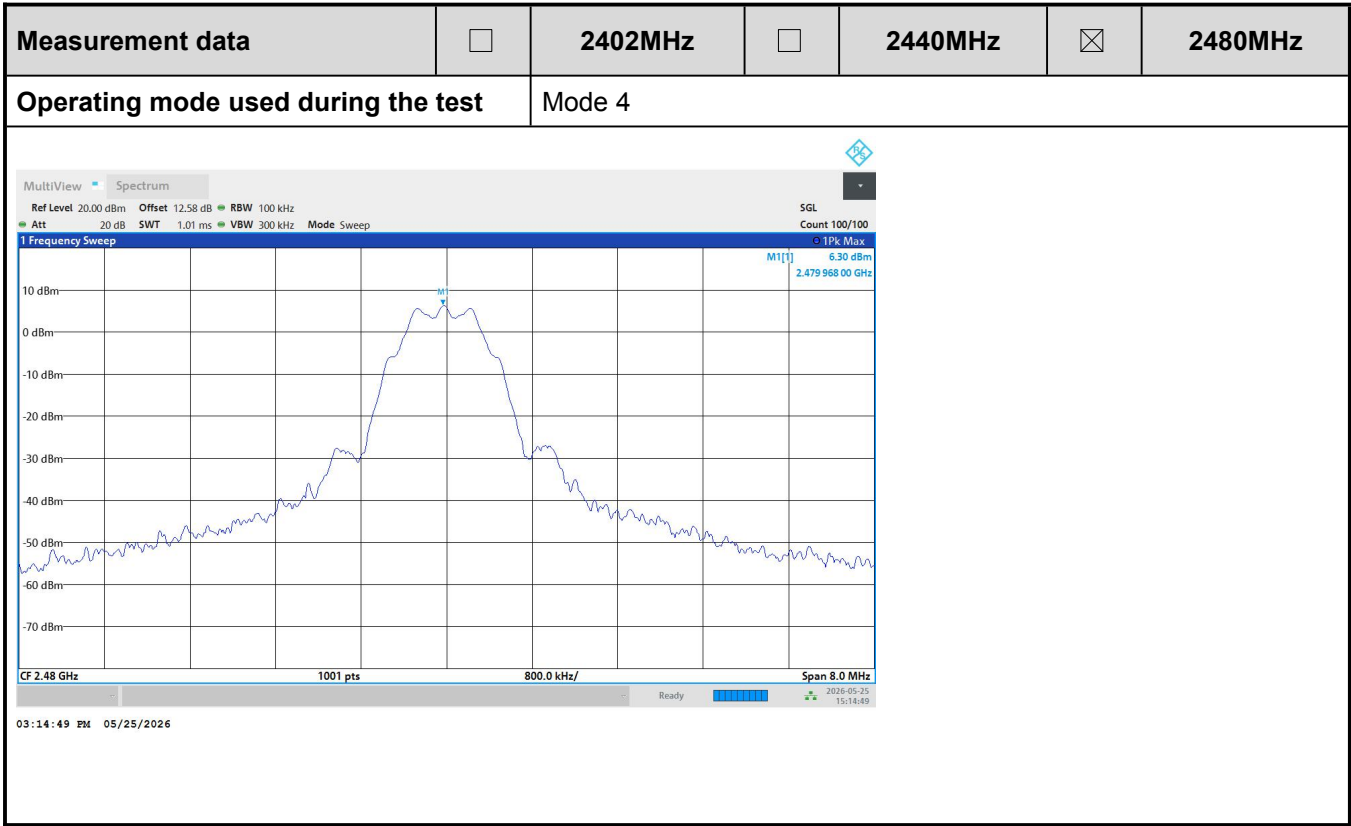

Conducted spurious emission on encompass frequency range:

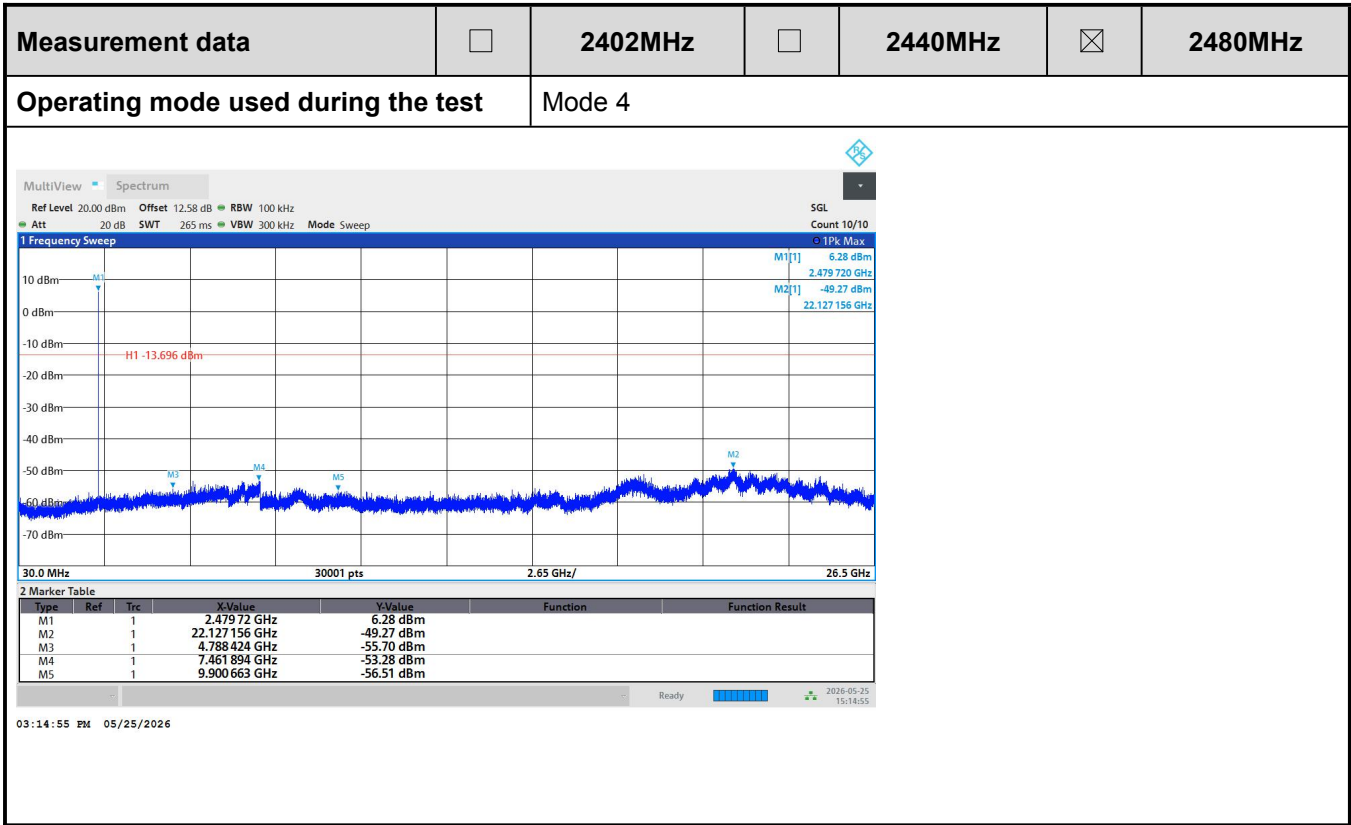

5.7	Duty cycle	VERDICT: PASS
-----	------------	---------------

Standard	ANSI C63.10-2020 ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024
Requirement:	
No Limit has been set to this test case.	

Clause 11.6	Duty cycle (D), transmission duration (T), and maximum power control level
Measurements of duty cycle and transmission duration shall be performed using one of the following techniques: a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal. b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal: ■ Set the center frequency of the instrument to the center frequency of the transmission. ■ Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value. ■ Set VBW $\geq$ RBW. Set detector = peak or average. ■ The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)	



Performed measurements



Test method applied	☒	Section 3.1 Conducted measurement
	☐	Section 3.2 Radiated measurement
Test setup	Refer to Appendix test setup photo(s).	
Operating mode(s) used	Mode 1, 2, 3, 4	
Remark	---	



See next page



Results:



Operating Mode	Frequency (MHz)	DC (%)	Correction Factor (dB)	1/T (KHz)
Mode 1	2402	100	0	0
	2440	100	0	0
	2480	100	0	0
Mode 2	2402	100	0	0
	2440	100	0	0
	2480	100	0	0
Mode 3	2402	100	0	0
	2440	100	0	0
	2480	100	0	0
Mode 4	2402	100	0	0
	2440	100	0	0
	2480	100	0	0

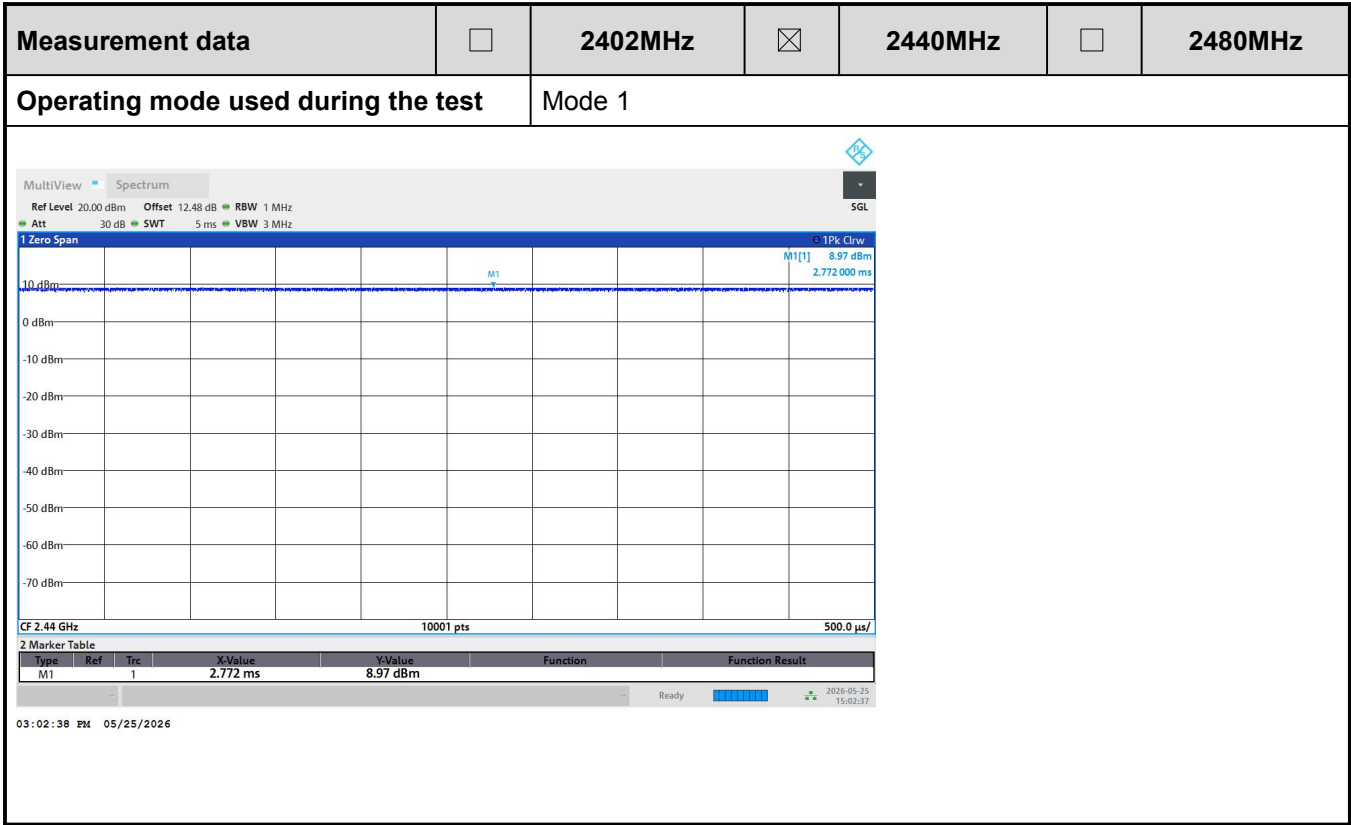
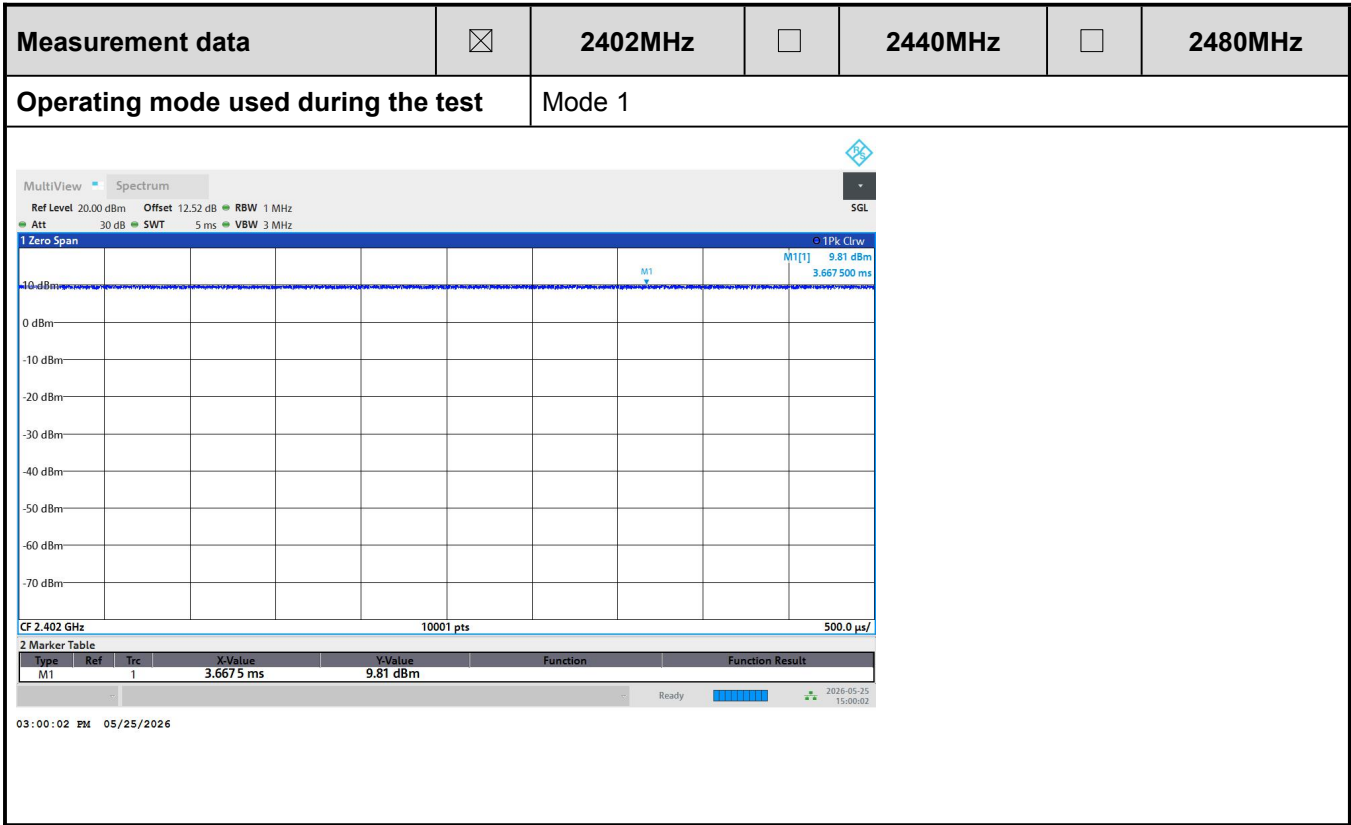


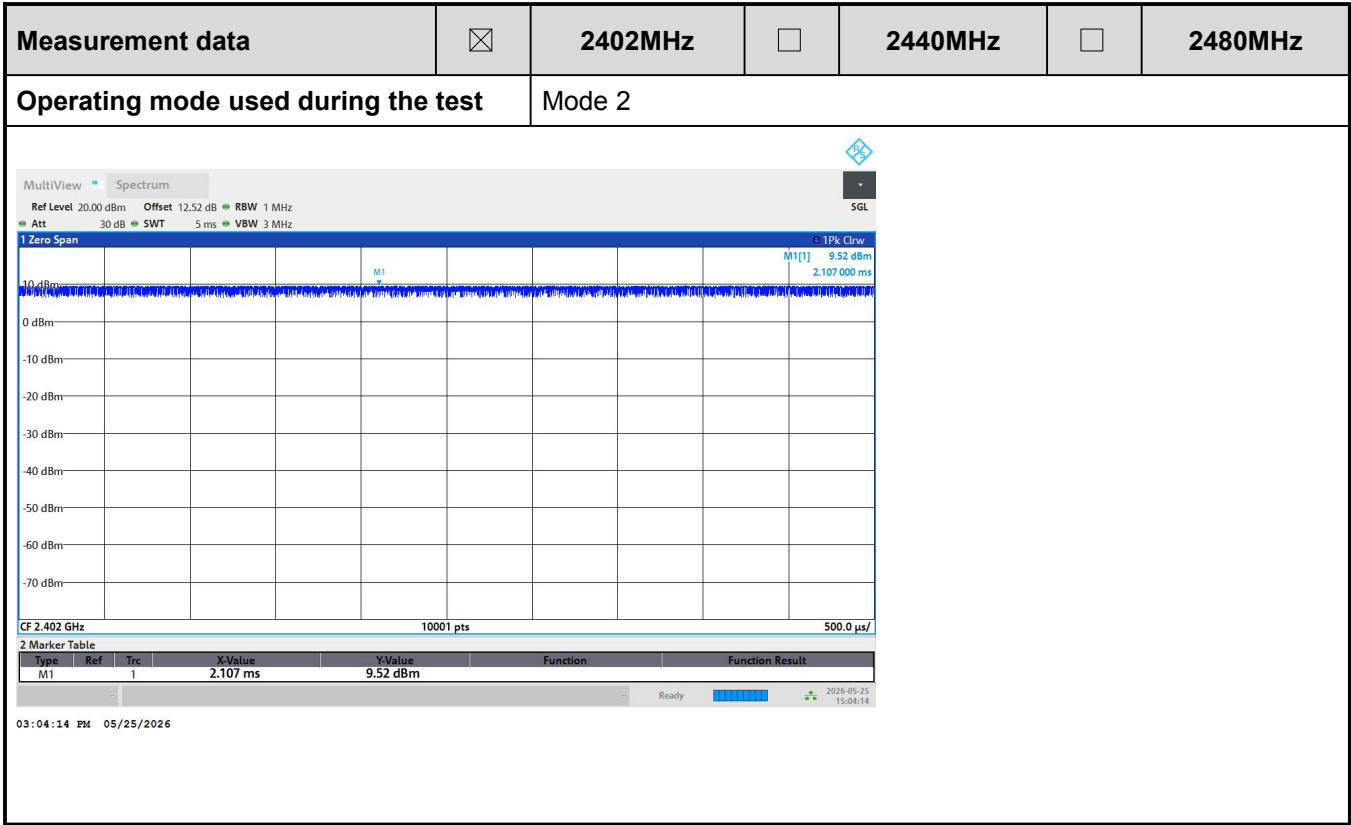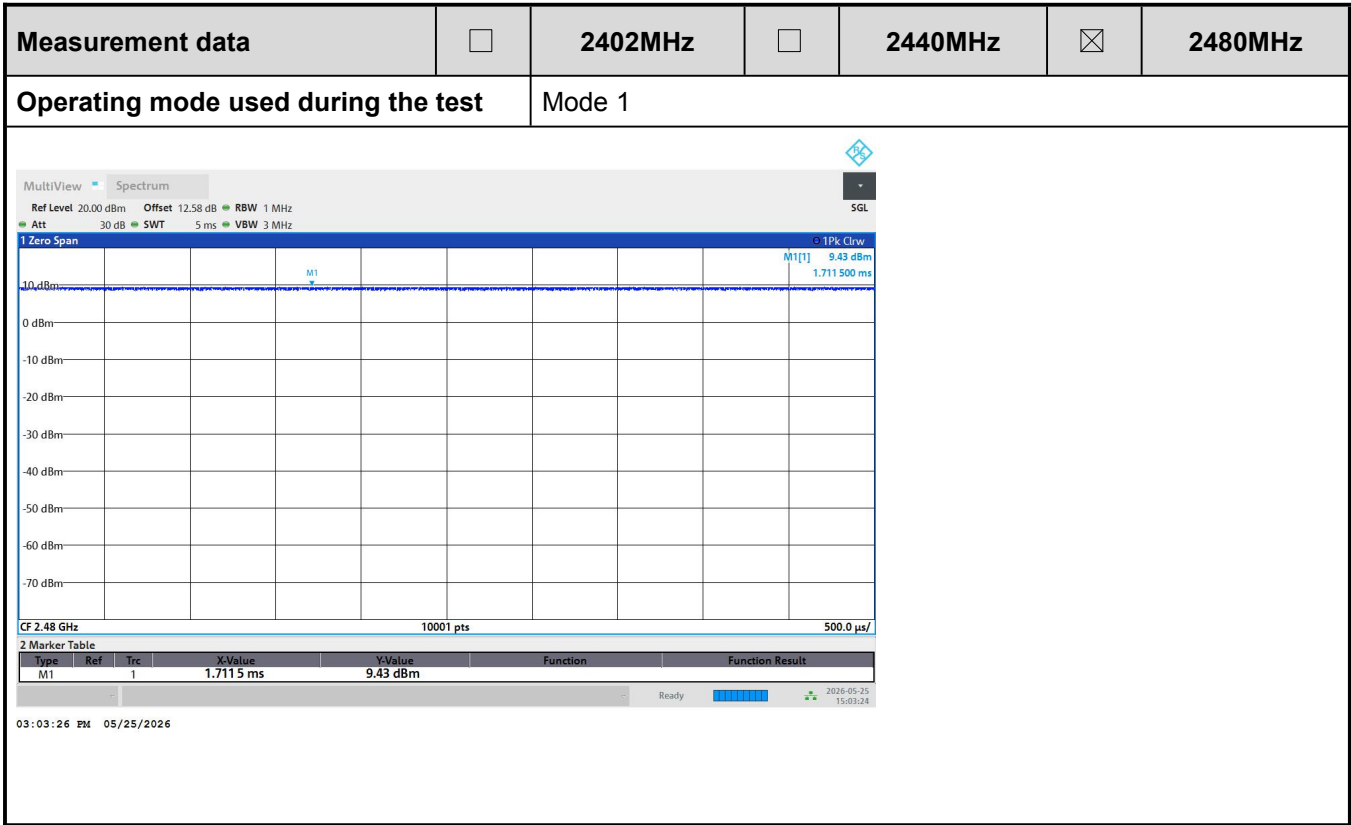

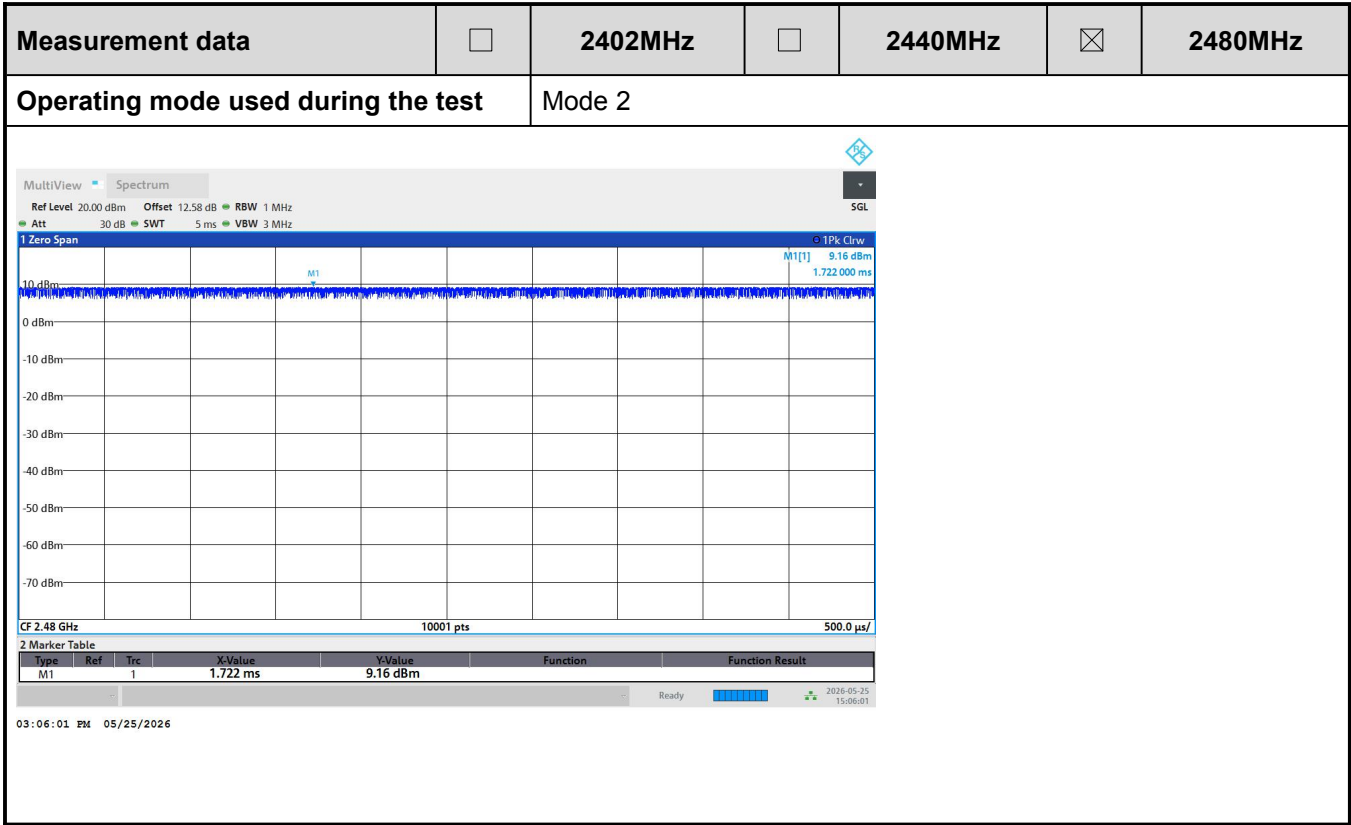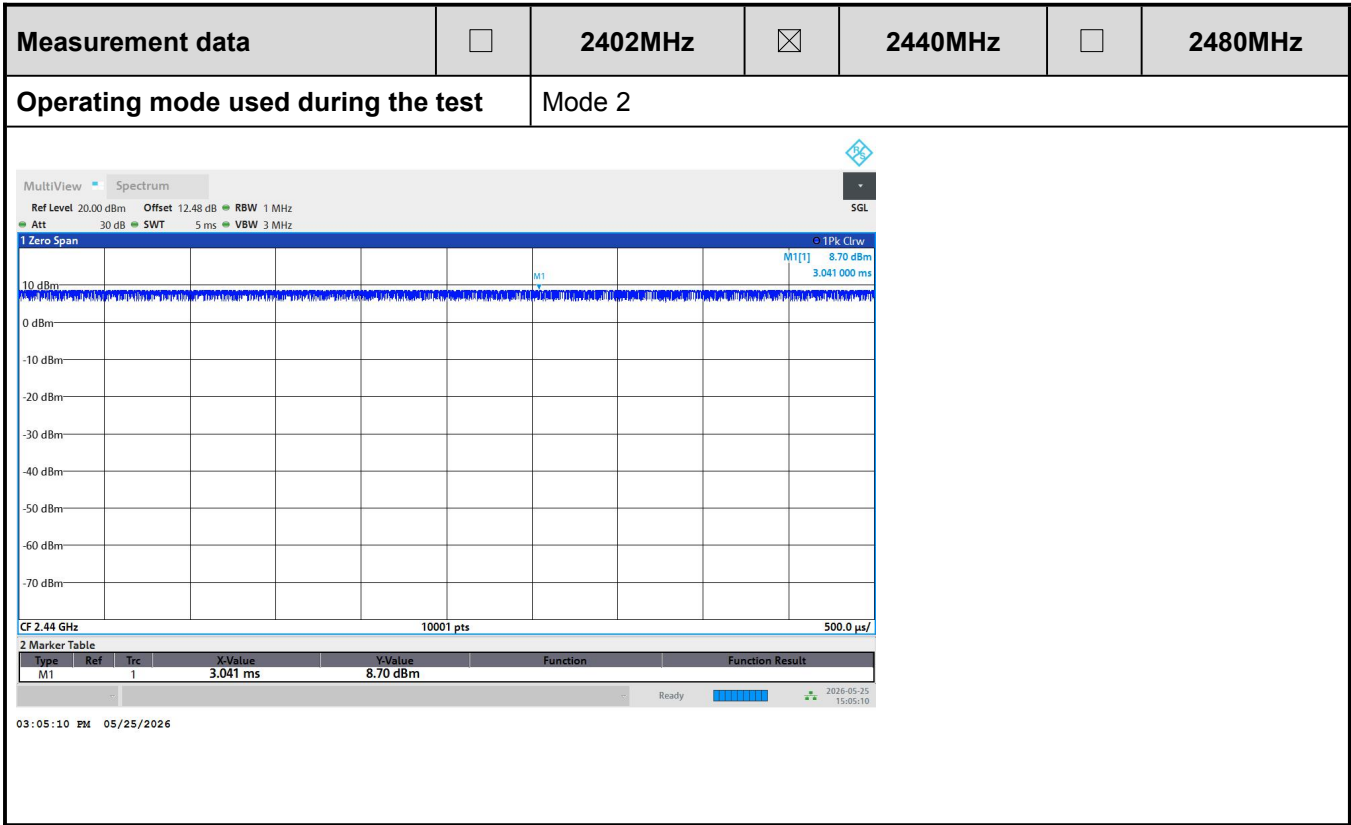

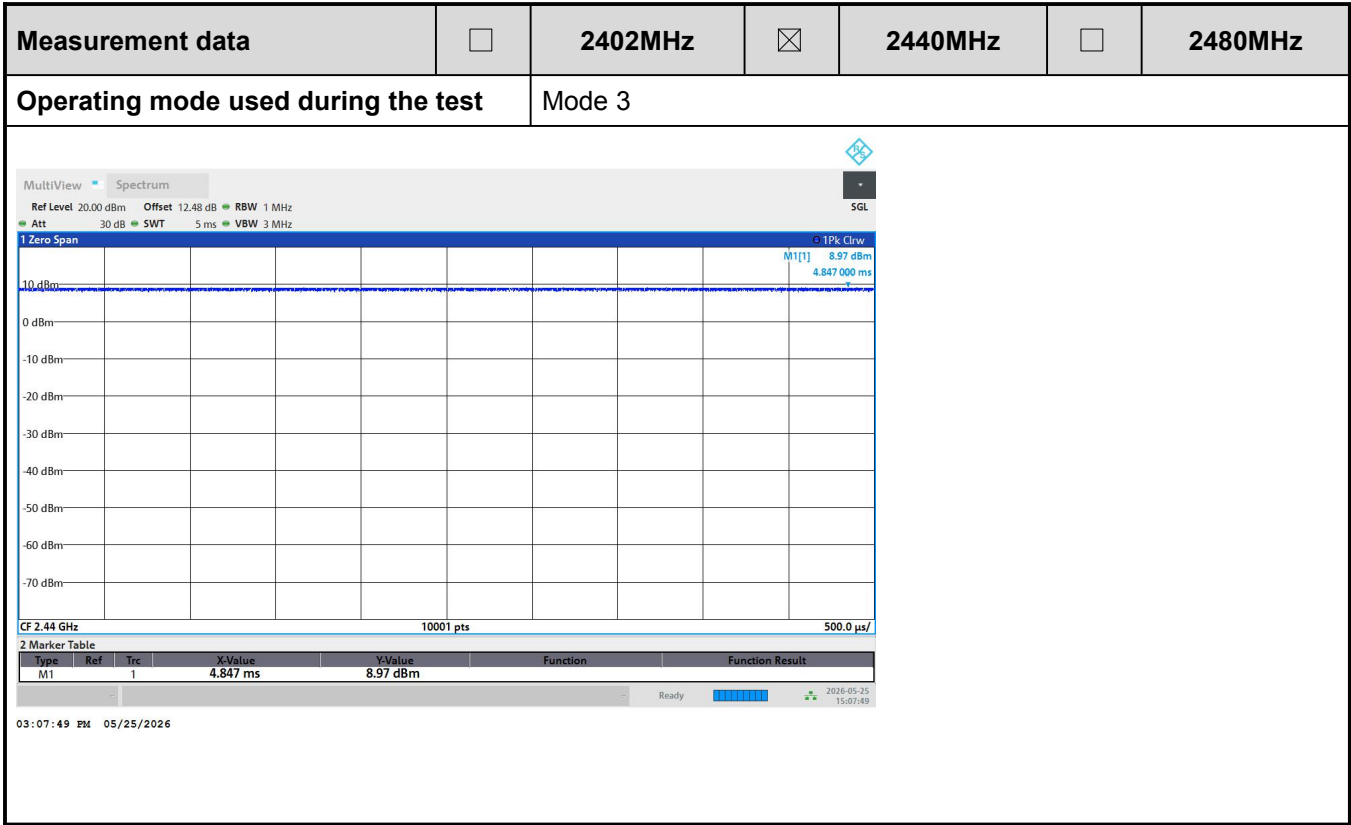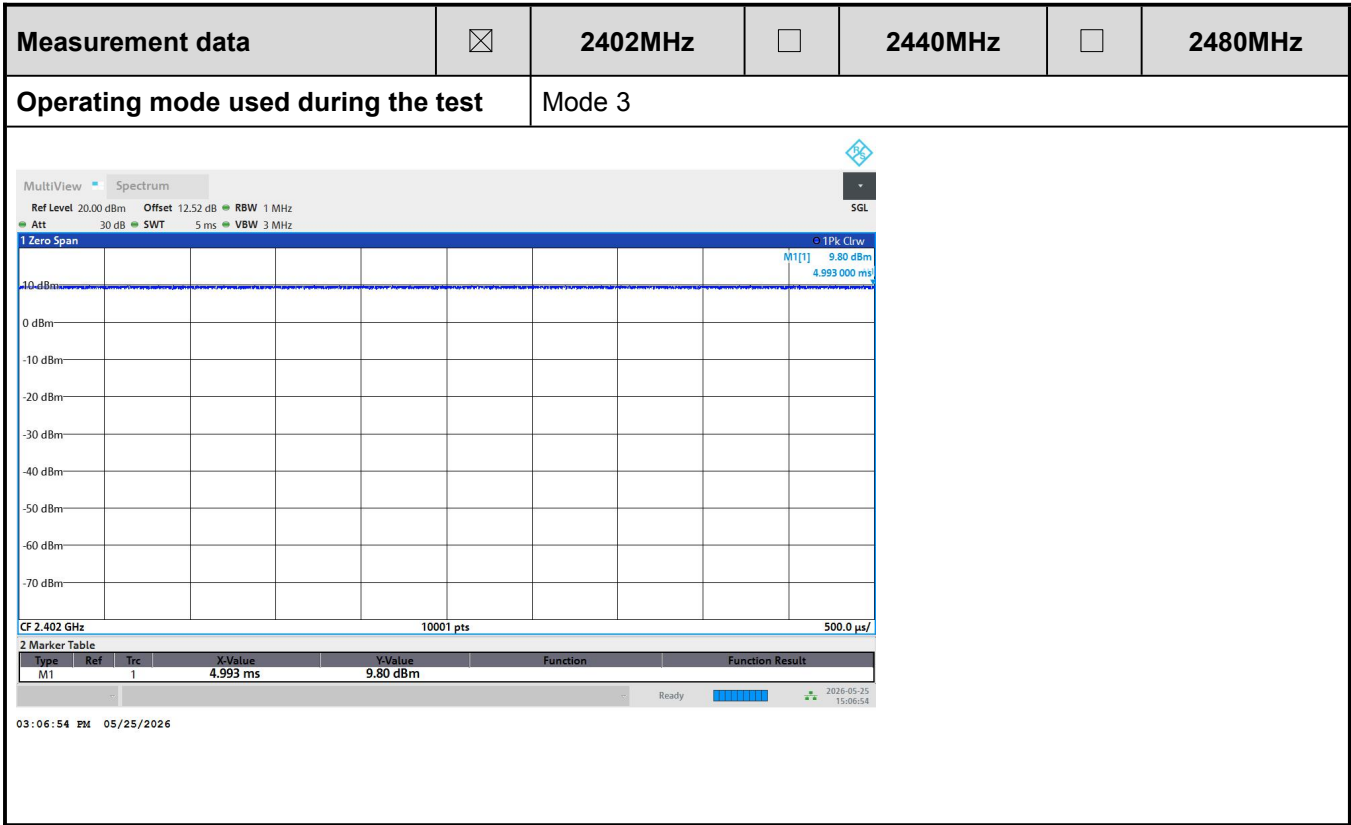

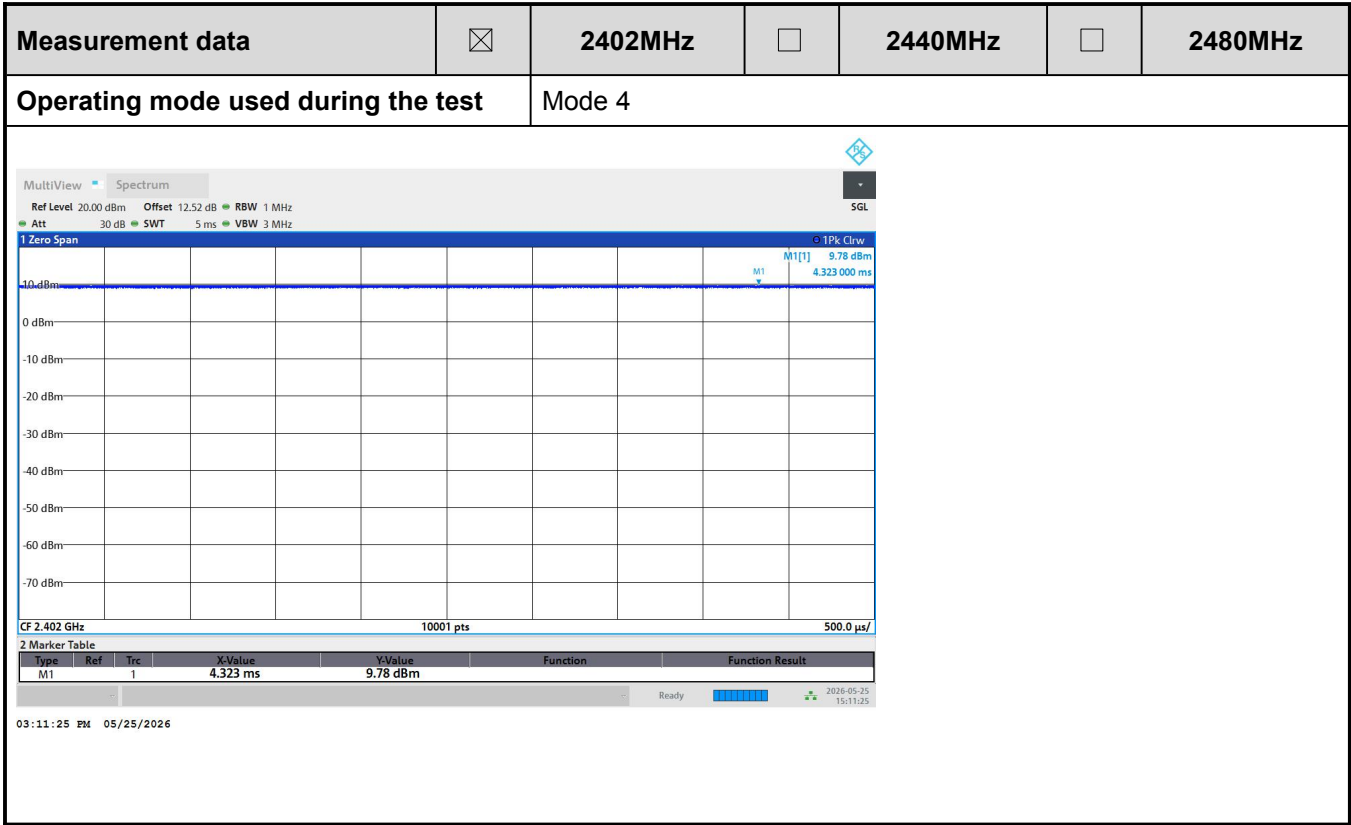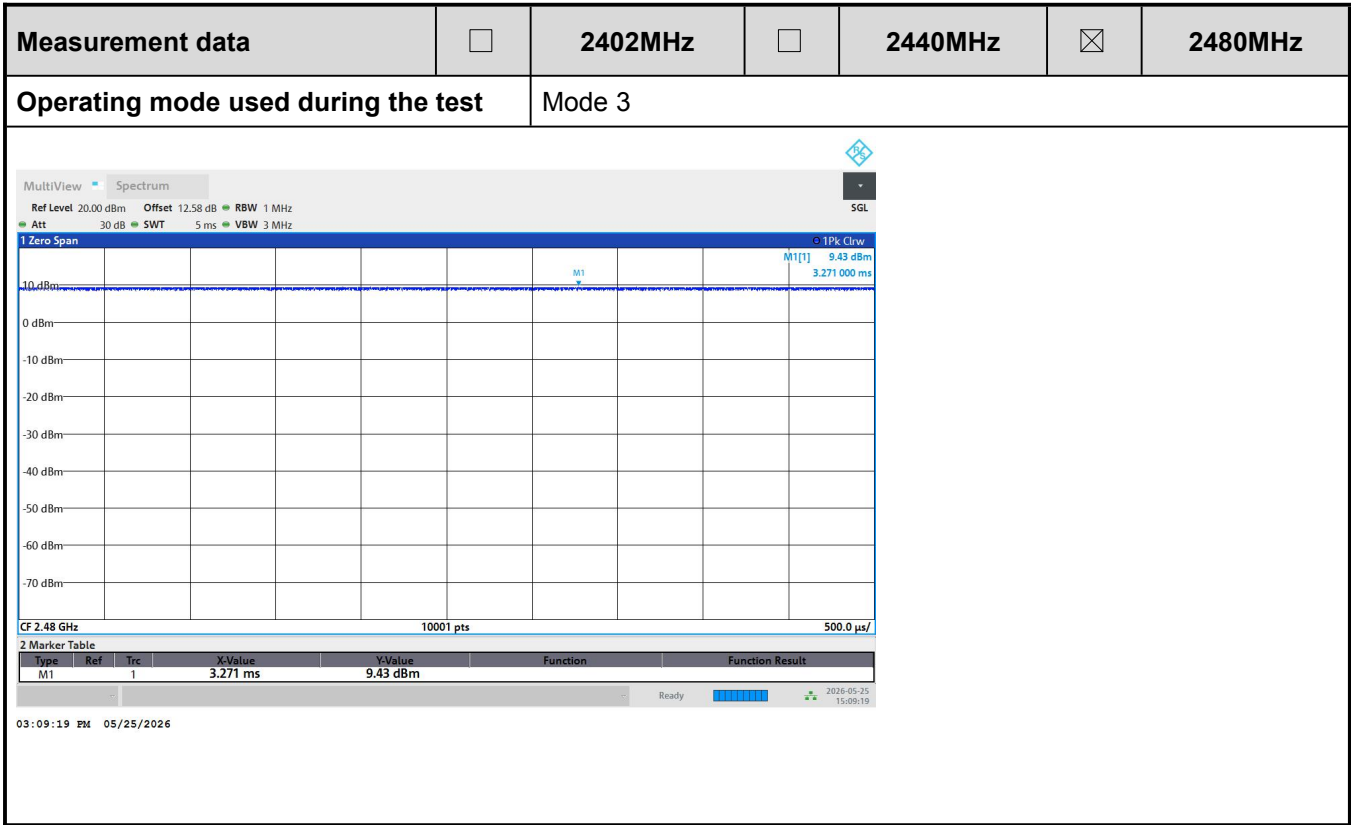

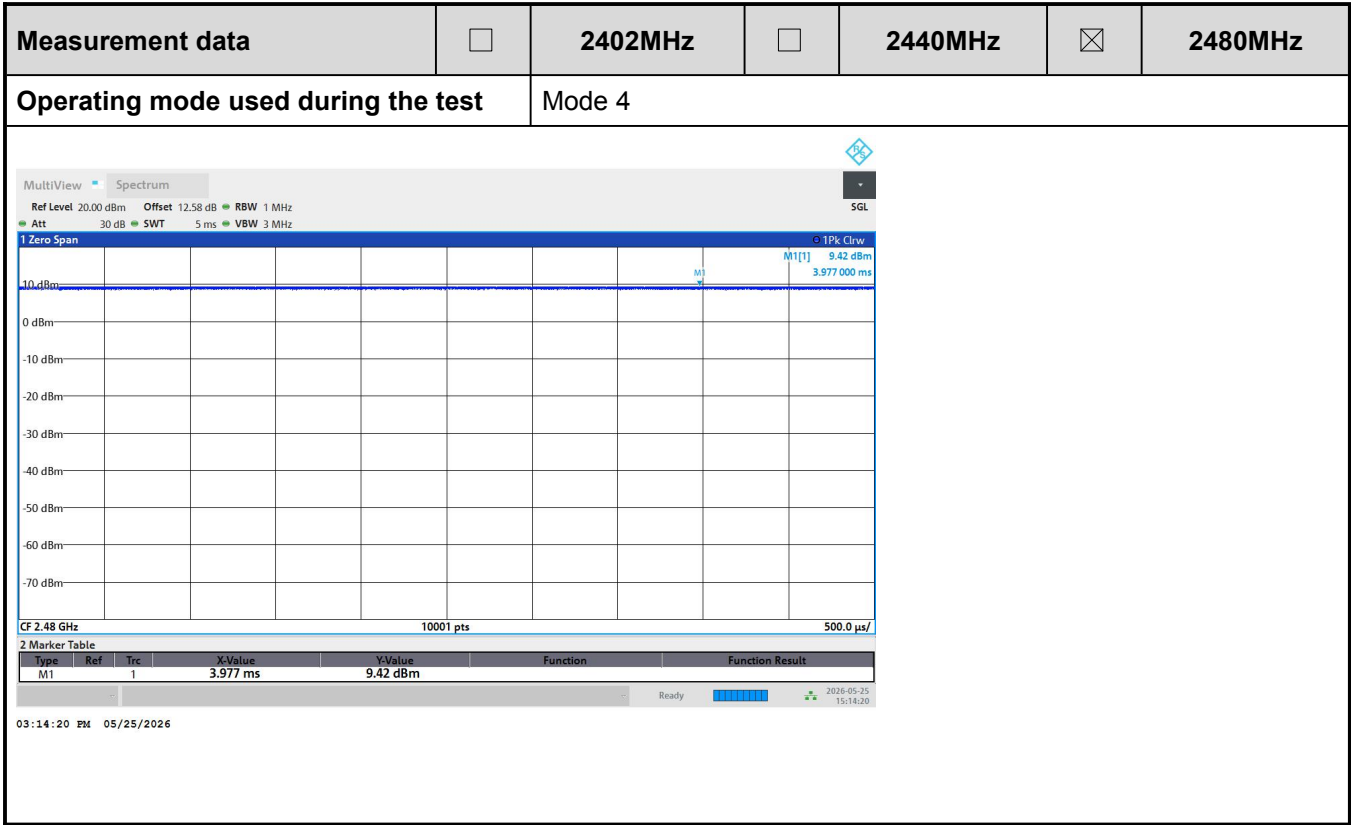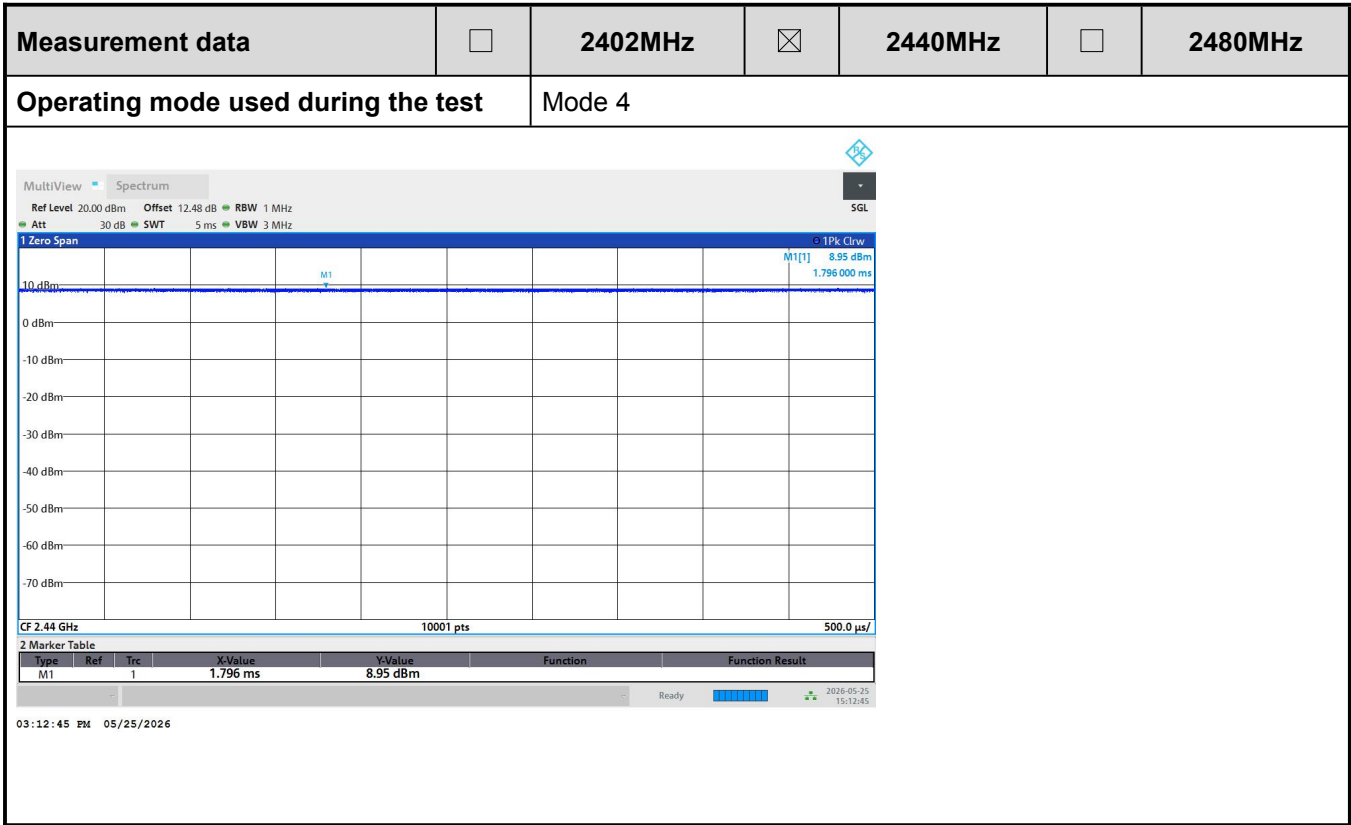

5.8	Emissions in restricted bands	VERDICT: PASS
------------	--------------------------------------	----------------------

Standard	FCC Part 15.247(d), FCC Part 15.209, FCC Part 15.205 RSS-Gen Issue 5 Amendment 2 Clause 8.9, Clause 8.10		
----------	---	--	--

Limits:

Radiated emissions which fall in the restricted bands, as defined in FCC Part 15.205(a), must also comply with the radiated emission limits specified in FCC Part 15.209(a):

FCC Part 15.209(a):

For any intentional radiator, the field strength of emissions appearing within these frequency bands shall not exceed the values given in the next table:

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	48.5-13.8	300
0.490-1.705	24000/F(kHz)	33.8-23	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3


RSS-Gen Issue 5 Amendment 2 Clause 8.9, Clause 8.10

Frequency (MHz)	Field strength	Field strength (dBµV/m)	Measurement distance (meters)
0.009-0.490	6.37/F(kHz) µA/m	48.5 – 13.8	300
0.490-1.705	63.7/F(kHz) µA/m	33.8 - 23	30
1.705-30.0	30 µV/m	29.5	30
30-88	100 µV/m	40	3
88-216	150 µV/m	43.5	3
216-960	200 µV/m	46	3
Above 960	500 µV/m	54	3

Performed measurements


Test method applied	☐	Section 3.1 Conducted measurement
	☒	Section 3.2 Radiated measurement
Test setup	Refer to Appendix test setup photo(s).	
Operating mode(s) used	Mode 1, 2, 3, 4	
Remark	For emissions up to 1 GHz, pre-scan has been conducted to determine the worst-case mode from all possible combinations with different modes and modulation schemes. Only the worst case was shown in the report.	
	The EUT was evaluated in X-axis, Y-axis and Z-axis orientations. The worst-case orientation was found to be the Z-axis ; therefore, this orientation was used for the final measurements.	
	The frequency range from 18 GHz to 26 GHz was investigated. No emissions above the noise floor were observed, and the measured peak levels were below the applicable average limit. Therefore, no emissions were considered reportable in this frequency range, and no data are presented in this report.	

Results of model 9290043459:

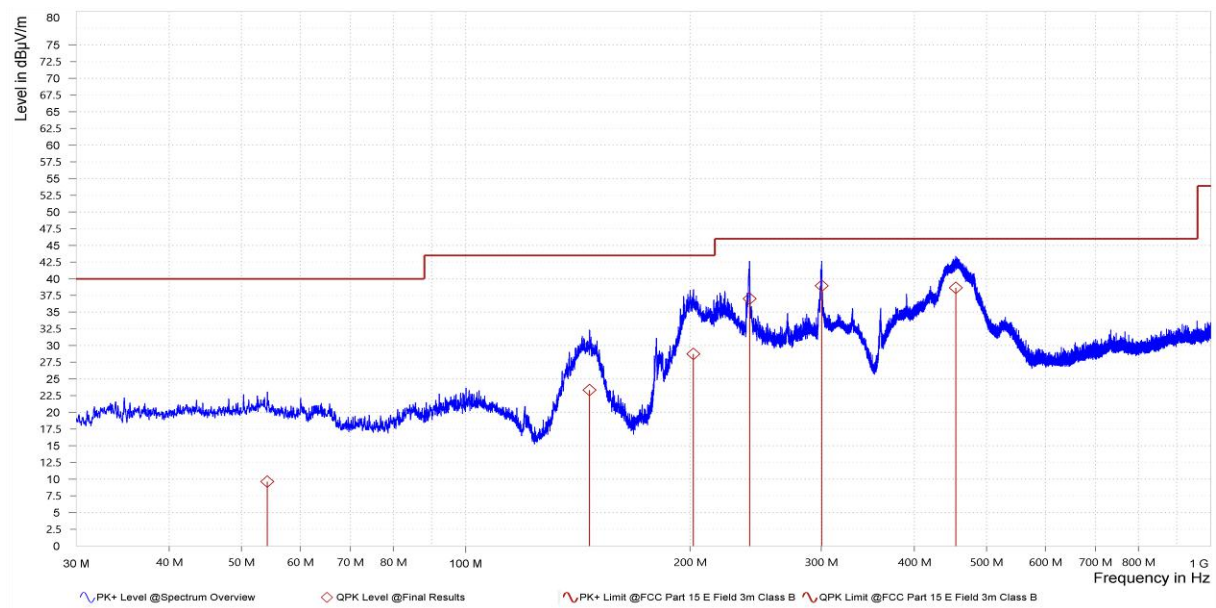


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2402	H	54.180	9.62	19.93	40.00	30.38	QP
		H	146.670	23.34	14.39	43.50	20.16	QP
		H	202.170	28.76	17.60	43.50	14.74	QP
		H	240.420	37.01	19.00	46.00	8.99	QP
		H	300.390	38.94	20.09	46.00	7.06	QP
		H	454.770	38.66	23.23	46.00	7.34	QP

Results of model 9290043459:

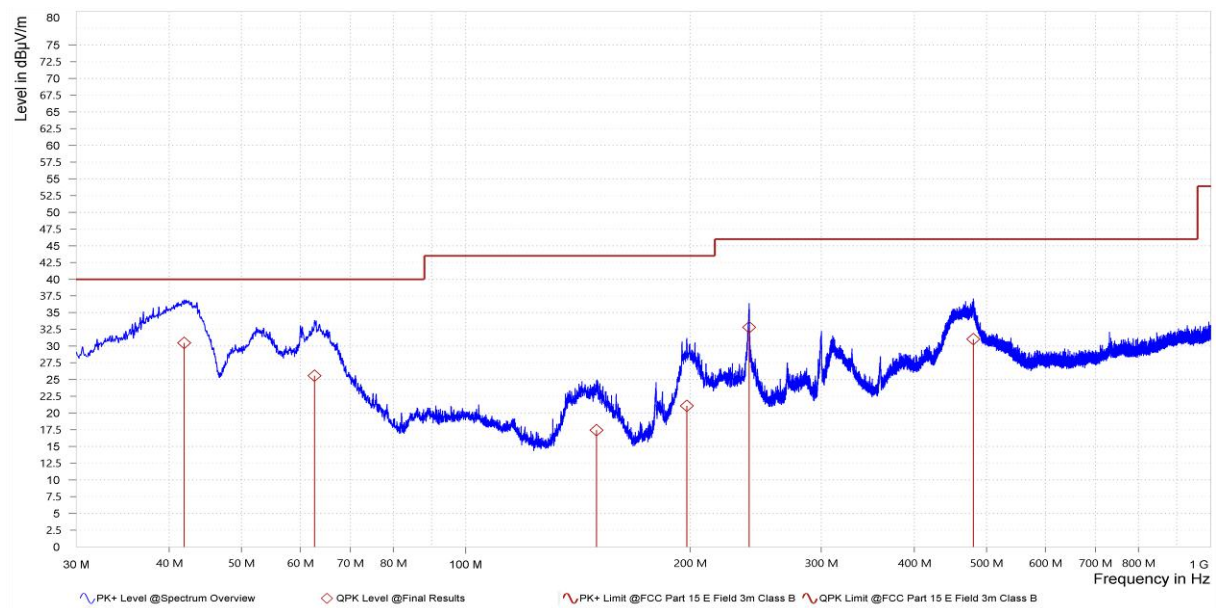


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2402	V	41.910	30.49	19.38	40.00	9.51	QP
		V	62.700	25.58	18.27	40.00	14.42	QP
		V	149.850	17.44	14.48	43.50	26.06	QP
		V	198.030	21.06	18.10	43.50	22.44	QP
		V	240.060	32.80	18.99	46.00	13.20	QP
		V	479.940	31.04	23.76	46.00	14.96	QP

Results of model 9290043459:

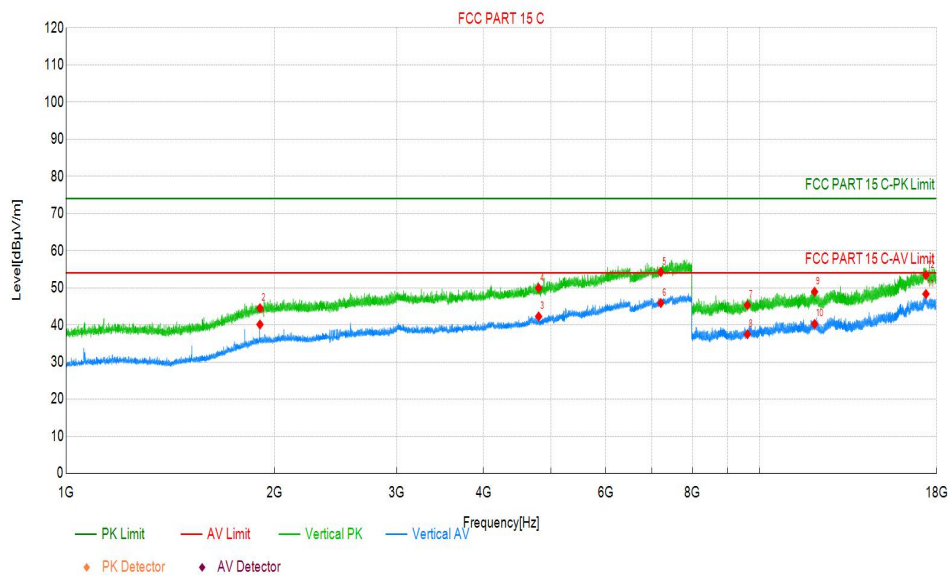


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2402	H	1812.50	34.7	39.84	5.150	54.00	14.16	AV
		H	1812.50	40.4	45.55	5.150	74.00	28.45	PK
		H	4804.00	37.8	49.52	11.740	74.00	24.48	PK
		H	4804.00	30.3	42.00	11.740	54.00	12.00	AV
		H	7206.00	28.5	45.98	17.510	54.00	8.02	AV
		H	7206.00	37.1	54.62	17.510	74.00	19.38	PK
		H	9608.00	30.0	37.06	7.100	54.00	16.94	AV
		H	9608.00	37.1	44.24	7.100	74.00	29.76	PK
		H	12010.00	30.0	39.99	9.980	54.00	14.01	AV
		H	12010.00	38.7	48.66	9.980	74.00	25.34	PK
		H	17396.00	27.9	47.96	20.050	54.00	6.04	AV
		H	17396.00	33.4	53.46	20.050	74.00	20.54	AV

Results of model 9290043459:

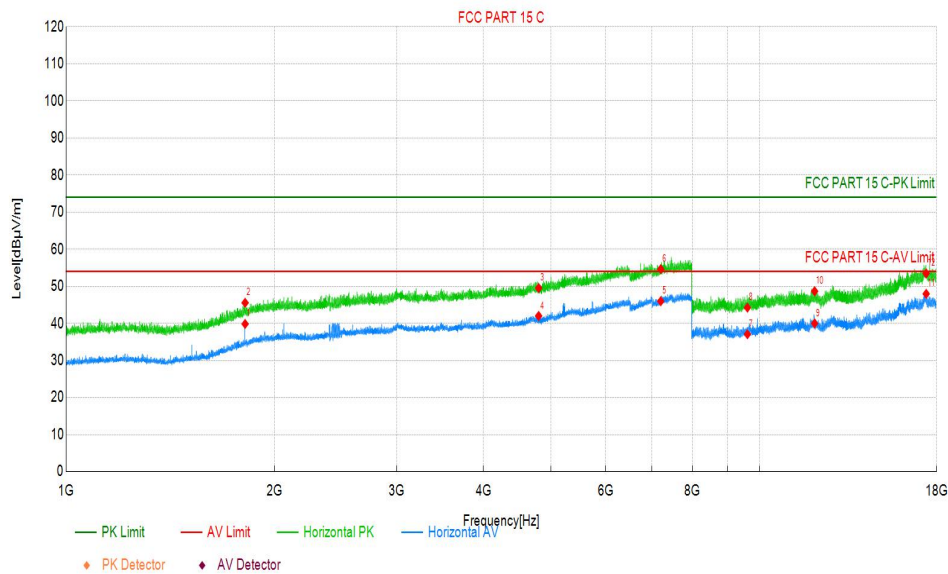


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2402	V	1904.00	33.8	40.12	6.330	54.00	13.88	AV
		V	1904.00	38.2	44.50	6.330	74.00	29.50	PK
		V	4804.00	30.5	42.28	11.740	54.00	11.72	AV
		V	4804.00	38.2	49.92	11.740	74.00	24.08	PK
		V	7206.00	36.7	54.22	17.510	74.00	19.78	PK
		V	7206.00	28.4	45.89	17.510	54.00	8.11	AV
		V	9608.00	38.2	45.34	7.100	74.00	28.66	PK
		V	9608.00	30.4	37.48	7.100	54.00	16.52	AV
		V	12010.00	39.0	48.93	9.980	74.00	25.07	PK
		V	12010.00	30.3	40.25	9.980	54.00	13.75	AV
		V	17381.33	28.3	48.33	20.050	54.00	5.67	AV
		V	17381.33	33.4	53.44	20.050	74.00	20.56	PK

Results of model 9290043459:

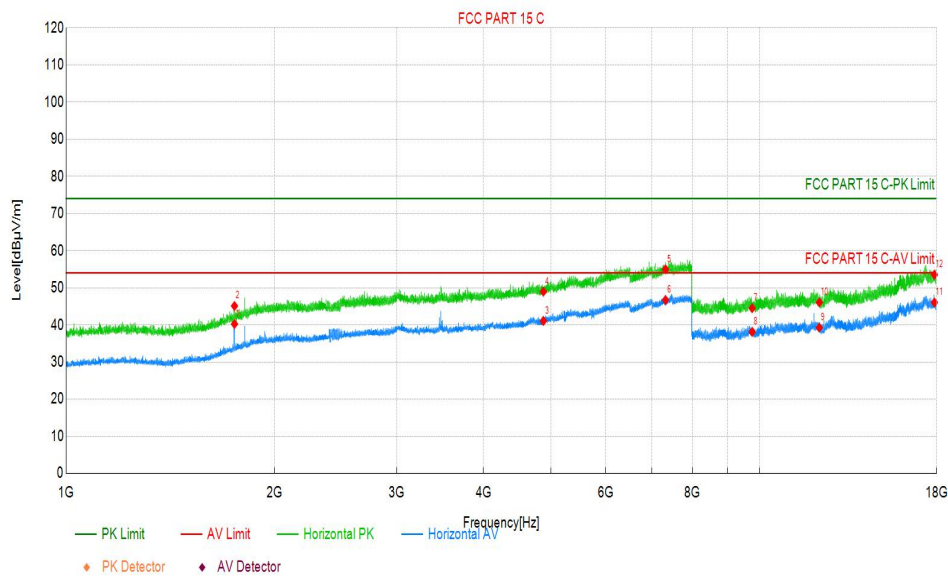


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2440	H	1749.75	36.1	40.24	4.140	54.00	13.76	AV
		H	1749.75	41.0	45.11	4.140	74.00	28.89	PK
		H	4880.00	29.2	41.08	11.890	54.00	12.92	AV
		H	4880.00	37.1	48.96	11.890	74.00	25.04	PK
		H	7320.00	37.3	54.96	17.710	74.00	19.04	PK
		H	7320.00	29.0	46.71	17.710	54.00	7.29	AV
		H	9760.00	37.0	44.50	7.520	74.00	29.50	PK
		H	9760.00	30.6	38.14	7.520	54.00	15.86	AV
		H	12200.00	29.6	39.26	9.710	54.00	14.74	AV
		H	12200.00	36.3	46.05	9.710	74.00	27.95	PK
		H	17877.33	26.8	46.05	19.260	54.00	7.95	AV
		H	17877.33	34.3	53.51	19.260	74.00	20.49	PK

Results of model 9290043459:

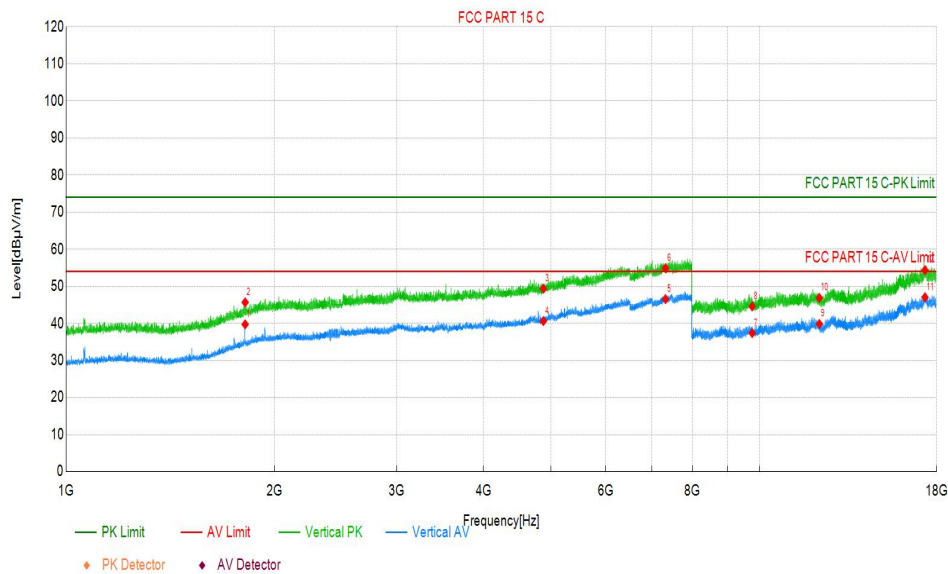


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2440	V	1812.75	34.6	39.73	5.160	54.00	14.27	AV
		V	1812.75	40.5	45.67	5.160	74.00	28.33	PK
		V	4880.00	37.5	49.35	11.890	74.00	24.65	PK
		V	4880.00	28.7	40.61	11.890	54.00	13.39	AV
		V	7320.00	28.8	46.55	17.710	54.00	7.45	AV
		V	7320.00	37.2	54.89	17.710	74.00	19.11	PK
		V	9760.00	29.9	37.38	7.520	54.00	16.62	AV
		V	9760.00	37.0	44.56	7.520	74.00	29.44	PK
		V	12200.00	30.1	39.84	9.710	54.00	14.16	AV
		V	12200.00	37.2	46.87	9.710	74.00	27.13	PK
		V	17323.33	26.9	47.02	20.080	54.00	6.98	AV
		V	17323.33	34.2	54.32	20.080	74.00	19.68	PK

Results of model 9290043459:

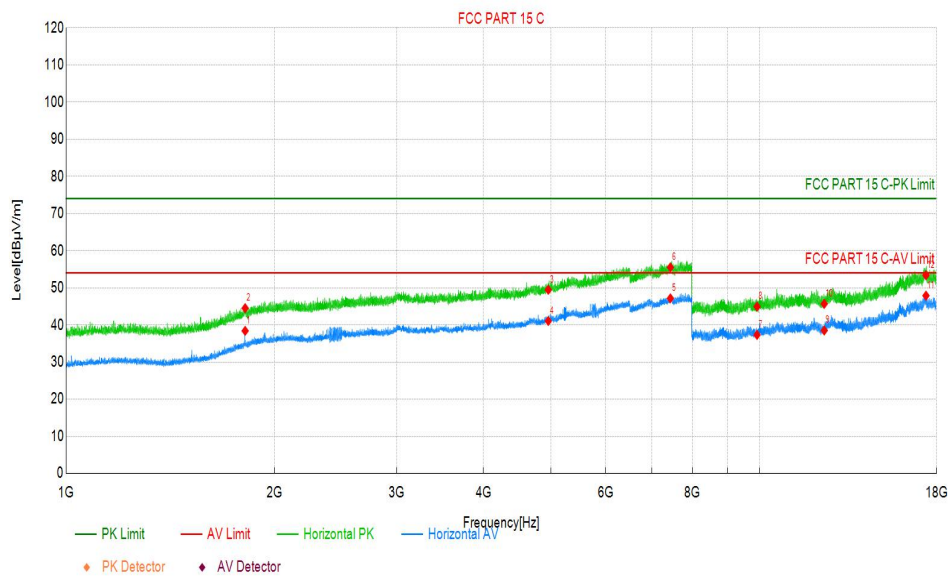


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2480	H	1812.75	33.2	38.40	5.160	54.00	15.60	AV
		H	1812.75	39.4	44.51	5.160	74.00	29.49	PK
		H	4960.00	37.0	49.46	12.450	74.00	24.54	AV
		H	4960.00	28.6	41.06	12.450	54.00	12.94	PK
		H	7440.00	29.2	47.15	17.950	54.00	6.85	PK
		H	7440.00	37.5	55.49	17.950	74.00	18.51	AV
		H	9920.00	30.1	37.31	7.260	54.00	16.69	PK
		H	9920.00	37.7	44.93	7.260	74.00	29.07	AV
		H	12400.00	29.4	38.51	9.160	54.00	15.49	AV
		H	12400.00	36.5	45.67	9.160	74.00	28.33	PK
		H	17383.33	27.8	47.87	20.050	54.00	6.13	AV
		H	17383.33	33.3	53.37	20.050	74.00	20.63	PK

Results of model 9290043459:

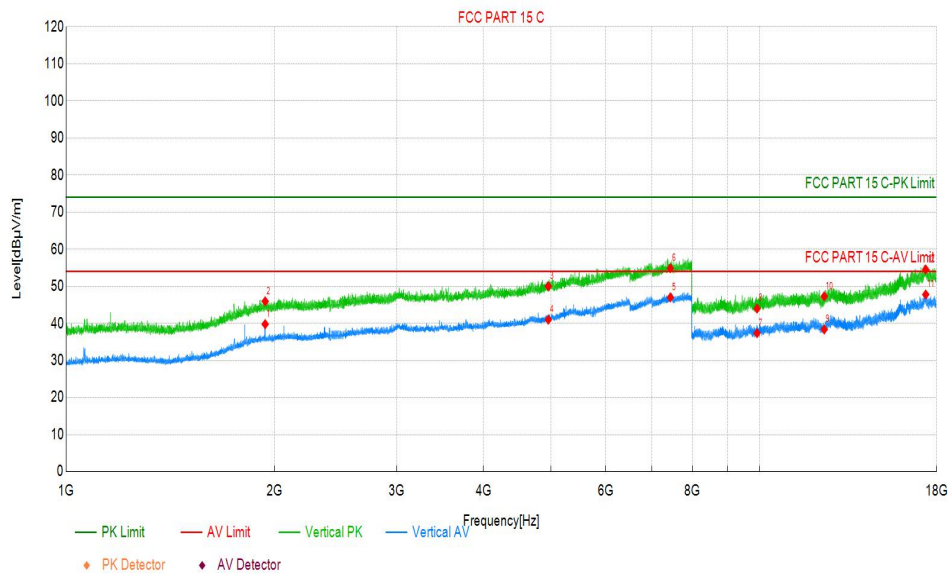


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 1	2480	V	1937.25	33.3	39.79	6.470	54.00	14.21	AV
		V	1937.50	39.5	45.95	6.470	74.00	28.05	PK
		V	4960.00	37.5	49.99	12.450	74.00	24.01	PK
		V	4960.00	28.5	40.99	12.450	54.00	13.01	AV
		V	7440.00	29.0	46.99	17.950	54.00	7.01	AV
		V	7440.00	36.9	54.86	17.950	74.00	19.14	PK
		V	9920.00	30.1	37.35	7.260	54.00	16.65	AV
		V	9920.00	36.7	43.99	7.260	74.00	30.01	PK
		V	12400.00	29.2	38.36	9.160	54.00	15.64	AV
		V	12400.00	38.1	47.28	9.160	74.00	26.72	PK
		V	17368.00	27.7	47.78	20.060	54.00	6.22	AV
		V	17368.00	34.5	54.53	20.060	74.00	19.47	PK

Results of model 9290043459:

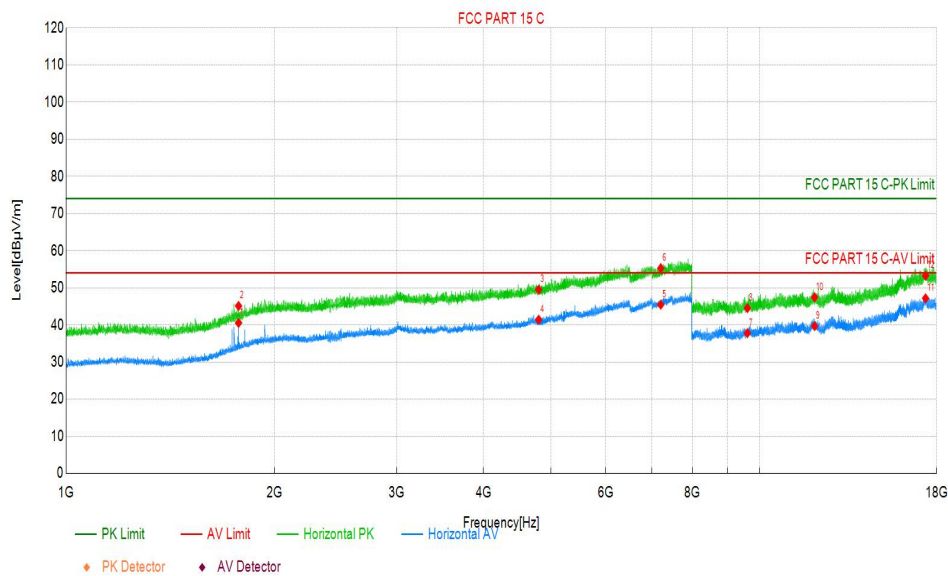


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 2	2402	H	1773.50	36.0	40.53	4.540	54.00	13.47	AV
		H	1773.50	40.6	45.11	4.540	74.00	28.89	PK
		H	4804.00	37.8	49.49	11.740	74.00	24.51	PK
		H	4804.00	29.7	41.42	11.740	54.00	12.58	AV
		H	7206.00	27.9	45.45	17.510	54.00	8.55	AV
		H	7206.00	37.8	55.27	17.510	74.00	18.73	PK
		H	9608.00	30.7	37.79	7.100	54.00	16.21	AV
		H	9608.00	37.4	44.51	7.100	74.00	29.49	PK
		H	12010.00	29.7	39.69	9.980	54.00	14.31	AV
		H	12010.00	37.5	47.43	9.980	74.00	26.57	PK
		H	17359.33	27.1	47.16	20.070	54.00	6.84	AV
		H	17359.33	33.2	53.25	20.070	74.00	20.75	PK

Results of model 9290043459:

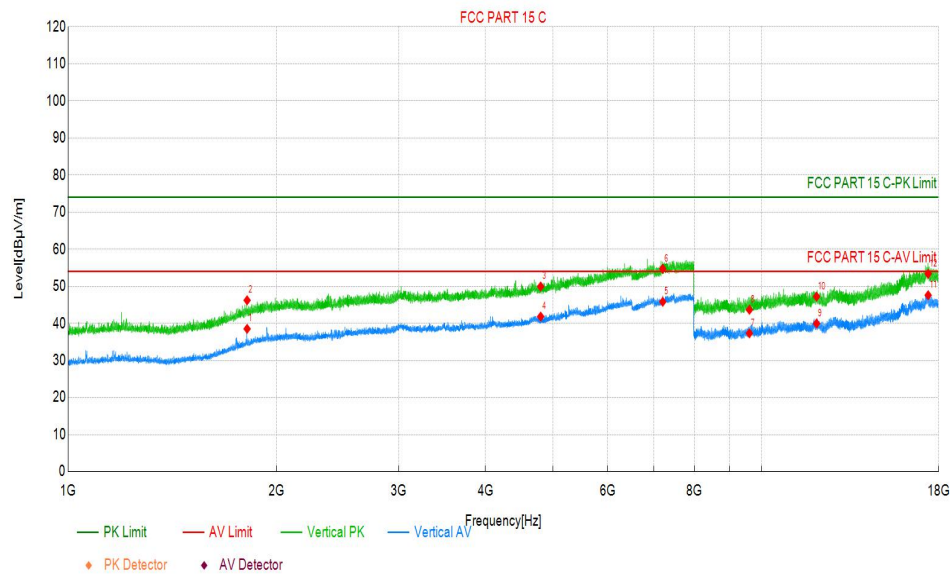


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Type
Mode 2	2402	V	1812.50	33.4	38.52	5.150	54.00	15.48	AV
		V	1812.50	41.1	46.22	5.150	74.00	27.78	PK
		V	4804.00	38.2	49.94	11.740	74.00	24.06	PK
		V	4804.00	30.1	41.82	11.740	54.00	12.18	AV
		V	7206.00	28.3	45.83	17.510	54.00	8.17	AV
		V	7206.00	37.2	54.73	17.510	74.00	19.27	PK
		V	9608.00	30.2	37.31	7.100	54.00	16.69	AV
		V	9608.00	36.6	43.67	7.100	74.00	30.33	PK
		V	12010.00	30.0	39.97	9.980	54.00	14.03	AV
		V	12010.00	37.2	47.22	9.980	74.00	26.78	PK
		V	17396.00	27.5	47.59	20.050	54.00	6.41	AV
		V	17396.00	33.3	53.37	20.050	74.00	20.63	PK

Results of model 9290043459:

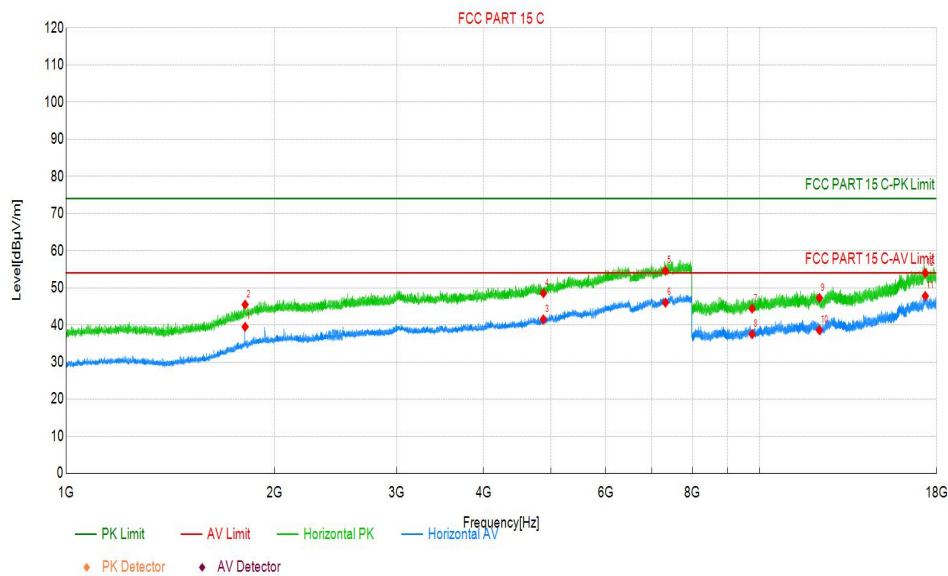


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 2	2440	H	1812.50	34.3	39.49	5.150	54.00	14.51	AV
		H	1812.50	40.3	45.47	5.150	74.00	28.53	PK
		H	4880.00	29.6	41.49	11.890	54.00	12.51	AV
		H	4880.00	36.6	48.53	11.890	74.00	25.47	PK
		H	7320.00	36.9	54.59	17.710	74.00	19.41	PK
		H	7320.00	28.3	46.00	17.710	54.00	8.00	AV
		H	9760.00	36.9	44.39	7.520	74.00	29.61	PK
		H	9760.00	30.0	37.50	7.520	54.00	16.50	AV
		H	12200.00	37.6	47.27	9.710	74.00	26.73	PK
		H	12200.00	28.9	38.59	9.710	54.00	15.41	AV
		H	17343.33	27.7	47.79	20.070	54.00	6.21	AV
		H	17343.33	33.9	53.98	20.070	74.00	20.02	PK

Results of model 9290043459:

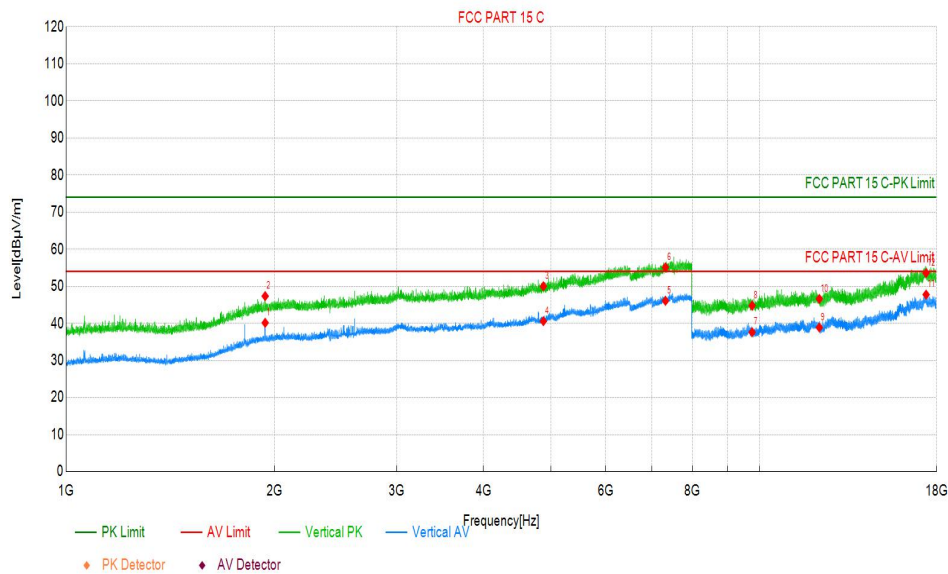


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 2	2440	V	1937.25	33.7	40.14	6.470	54.00	13.86	AV
		V	1937.25	40.9	47.34	6.470	74.00	26.66	PK
		V	4880.00	38.1	50.00	11.890	74.00	24.00	PK
		V	4880.00	28.7	40.59	11.890	54.00	13.41	AV
		V	7320.00	28.4	46.08	17.710	54.00	7.92	AV
		V	7320.00	37.4	55.11	17.710	74.00	18.89	PK
		V	9760.00	30.1	37.62	7.520	54.00	16.38	AV
		V	9760.00	37.3	44.79	7.520	74.00	29.21	PK
		V	12200.00	29.2	38.88	9.710	54.00	15.12	AV
		V	12200.00	36.9	46.60	9.710	74.00	27.40	PK
		V	17392.00	27.7	47.75	20.040	54.00	6.25	AV
		V	17392.00	33.5	53.56	20.040	74.00	20.44	PK

Results of model 9290043459:

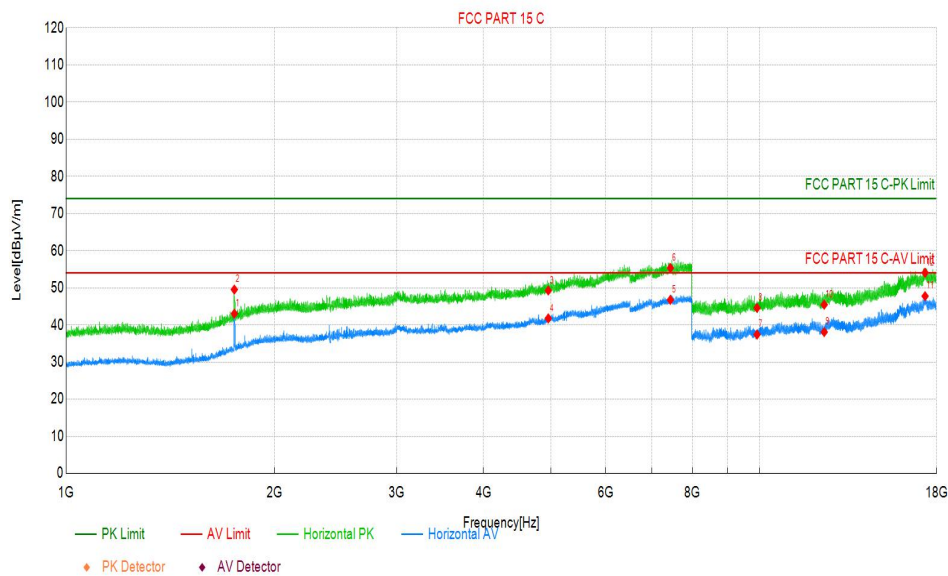


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 2	2480	H	1748.75	38.9	43.04	4.130	54.00	10.96	AV
		H	1748.75	45.4	49.51	4.130	74.00	24.49	PK
		H	4960.00	36.8	49.25	12.450	74.00	24.75	PK
		H	4960.00	29.3	41.76	12.450	54.00	12.24	AV
		H	7440.00	28.8	46.74	17.950	54.00	7.26	AV
		H	7440.00	37.4	55.32	17.950	74.00	18.68	PK
		H	9920.00	30.1	37.40	7.260	54.00	16.60	AV
		H	9920.00	37.3	44.58	7.260	74.00	29.42	PK
		H	12400.00	28.9	38.08	9.160	54.00	15.92	AV
		H	12400.00	36.3	45.45	9.160	74.00	28.55	PK
		H	17332.00	27.7	47.75	20.080	54.00	6.25	AV
		H	17332.00	34.0	54.05	20.080	74.00	19.95	PK

Results of model 9290043459:

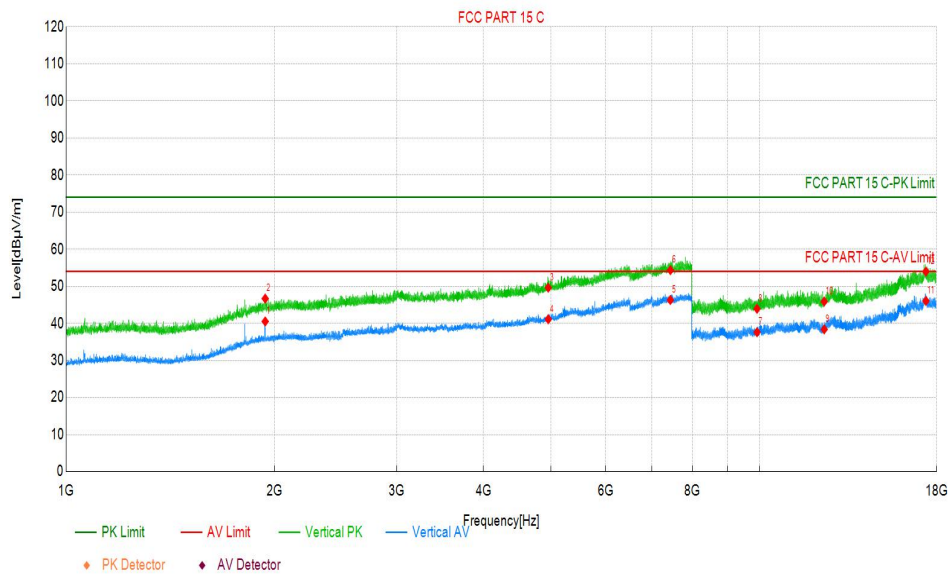


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 2	2480	V	1937.50	34.0	40.51	6.470	54.00	13.49	AV
		V	1937.50	40.2	46.67	6.470	74.00	27.33	PK
		V	4960.00	37.2	49.61	12.450	74.00	24.39	PK
		V	4960.00	28.7	41.11	12.450	54.00	12.89	AV
		V	7440.00	28.4	46.30	17.950	54.00	7.70	AV
		V	7440.00	36.4	54.35	17.950	74.00	19.65	PK
		V	9920.00	30.4	37.62	7.260	54.00	16.38	AV
		V	9920.00	36.7	43.93	7.260	74.00	30.07	PK
		V	12400.00	29.2	38.38	9.160	54.00	15.62	AV
		V	12400.00	36.7	45.89	9.160	74.00	28.11	PK
		V	17381.33	26.0	46.04	20.050	54.00	7.96	AV
		V	17381.33	33.9	53.97	20.050	74.00	20.03	PK

Results of model 9290043459:

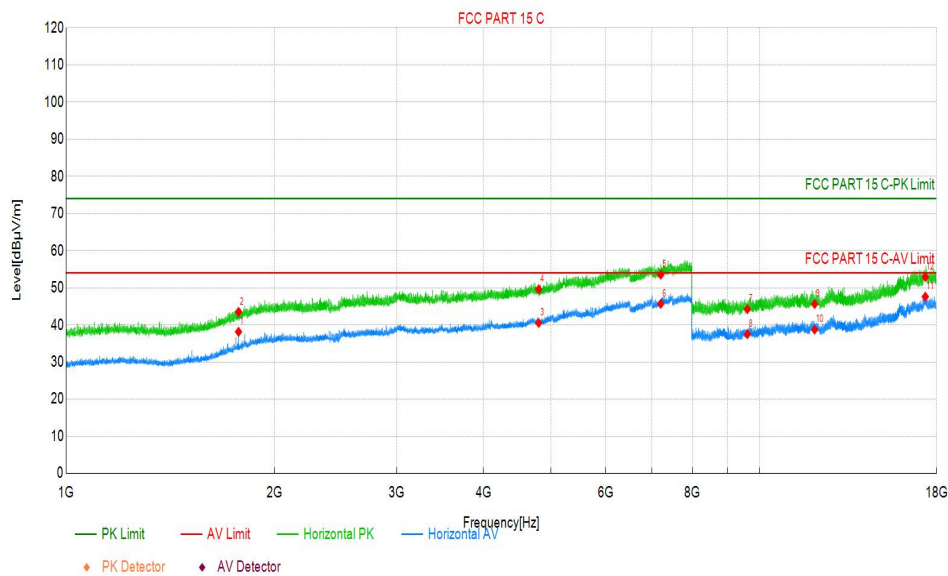


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 3	2402	H	1773.25	33.6	38.14	4.540	54.00	15.86	AV
		H	1773.25	39.0	43.50	4.540	74.00	30.50	PK
		H	4804.00	28.8	40.52	11.740	54.00	13.48	AV
		H	4804.00	37.8	49.58	11.740	74.00	24.42	PK
		H	7206.00	36.0	53.53	17.510	74.00	20.47	PK
		H	7206.00	28.2	45.68	17.510	54.00	8.32	AV
		H	9608.00	37.1	44.24	7.100	74.00	29.76	PK
		H	9608.00	30.4	37.50	7.100	54.00	16.50	AV
		H	12010.00	35.6	45.61	9.980	74.00	28.39	PK
		H	12010.00	28.8	38.75	9.980	54.00	15.25	AV
		H	17344.00	27.5	47.60	20.070	54.00	6.40	AV
		H	17344.00	32.9	52.93	20.070	74.00	21.07	PK

Results of model 9290043459:

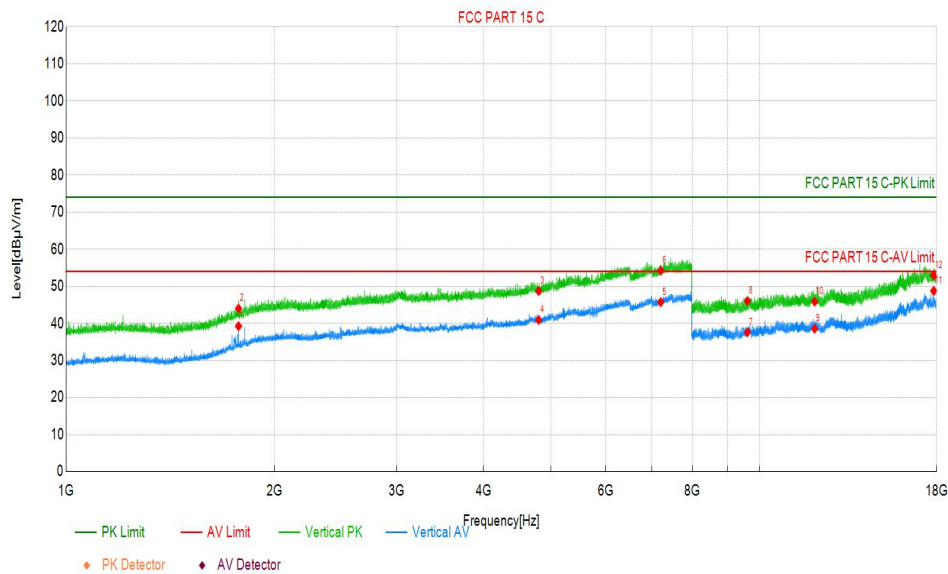


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 3	2402	V	1773.25	34.7	39.25	4.540	54.00	14.75	AV
		V	1773.25	39.5	43.99	4.540	74.00	30.01	PK
		V	4804.00	37.0	48.72	11.740	74.00	25.28	PK
		V	4804.00	29.2	40.92	11.740	54.00	13.08	AV
		V	7206.00	28.2	45.71	17.510	54.00	8.29	AV
		V	7206.00	36.7	54.21	17.510	74.00	19.79	PK
		V	9608.00	30.5	37.59	7.100	54.00	16.41	AV
		V	9608.00	38.9	46.02	7.100	74.00	27.98	PK
		V	12010.00	28.6	38.55	9.980	54.00	15.45	AV
		V	12010.00	35.9	45.85	9.980	74.00	28.15	PK
		V	17839.33	29.4	48.74	19.330	54.00	5.26	AV
		V	17839.33	33.7	52.98	19.330	74.00	21.02	PK

Results of model 9290043459:

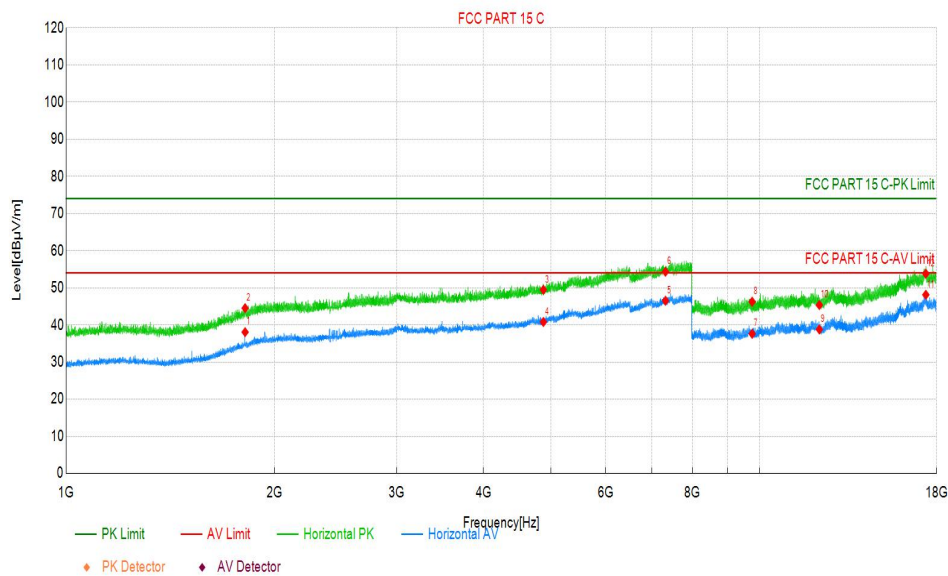


Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 3	2440	H	1812.50	32.9	38.06	5.150	54.00	15.94	AV
		H	1812.50	39.4	44.51	5.150	74.00	29.49	PK
		H	4880.00	37.6	49.45	11.890	74.00	24.55	PK
		H	4880.00	28.9	40.79	11.890	54.00	13.21	AV
		H	7320.00	28.8	46.50	17.710	54.00	7.50	AV
		H	7320.00	36.6	54.32	17.710	74.00	19.68	PK
		H	9760.00	30.1	37.62	7.520	54.00	16.38	AV
		H	9760.00	38.7	46.25	7.520	74.00	27.75	PK
		H	12200.00	29.1	38.78	9.710	54.00	15.22	AV
		H	12200.00	35.6	45.35	9.710	74.00	28.65	PK
		H	17376.00	28.1	48.12	20.060	54.00	5.88	AV
		H	17376.00	33.8	53.81	20.060	74.00	20.19	PK

Results of model 9290043459:

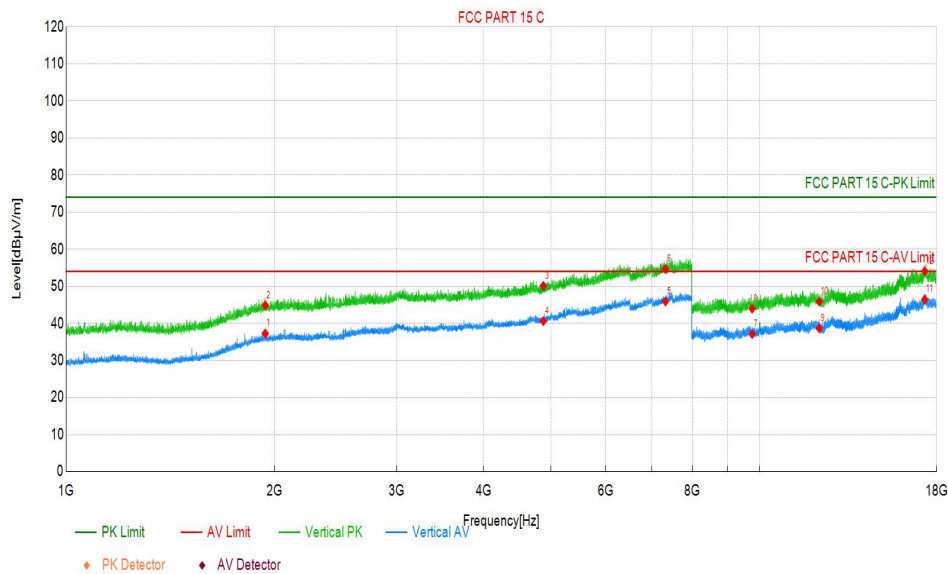

Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 3	2440	V	1937.75	30.8	37.26	6.480	54.00	16.74	AV
		V	1937.75	38.4	44.84	6.480	74.00	29.16	PK
		V	4880.00	38.2	50.10	11.890	74.00	23.90	PK
		V	4880.00	28.7	40.61	11.890	54.00	13.39	AV
		V	7320.00	28.2	45.91	17.710	54.00	8.09	AV
		V	7320.00	36.9	54.65	17.710	74.00	19.35	PK
		V	9760.00	29.6	37.11	7.520	54.00	16.89	AV
		V	9760.00	36.5	43.98	7.520	74.00	30.02	PK
		V	12200.00	29.0	38.68	9.710	54.00	15.32	AV
		V	12200.00	36.2	45.89	9.710	74.00	28.11	PK
		V	17309.33	26.3	46.41	20.100	54.00	7.59	AV
		V	17309.33	33.9	54.04	20.100	74.00	19.96	PK

Results of model 9290043459:

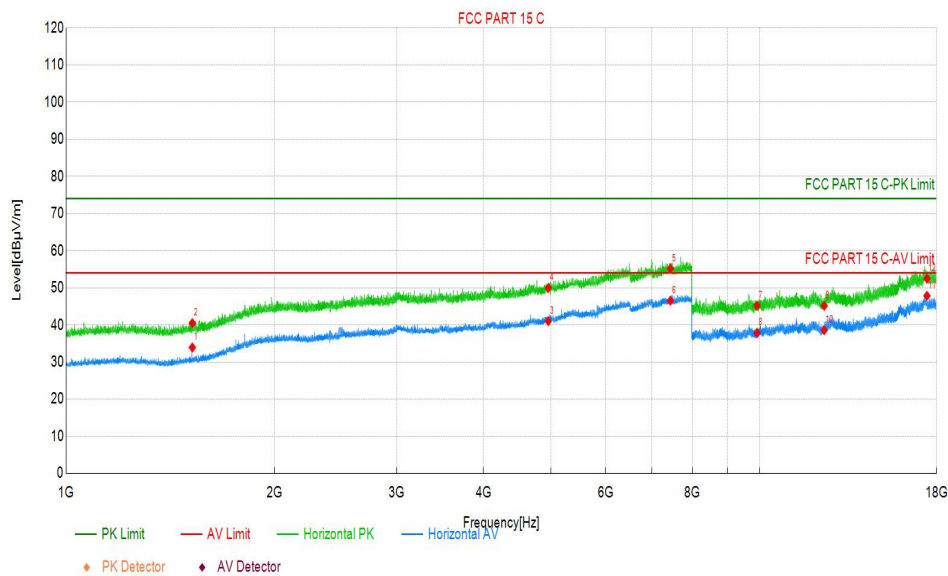

Operating Mode	Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBµV/m)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Type
Mode 3	2480	H	1521.00	33.0	33.93	0.980	54.00	20.07	AV
		H	1521.00	39.5	40.49	0.980	74.00	33.51	PK
		H	4960.00	28.6	41.01	12.450	54.00	12.99	AV
		H	4960.00	37.5	49.94	12.450	74.00	24.06	PK
		H	7440.00	37.2	55.17	17.950	74.00	18.83	PK
		H	7440.00	28.6	46.50	17.950	54.00	7.50	AV
		H	9920.00	37.9	45.19	7.260	74.00	28.81	PK
		H	9920.00	30.6	37.84	7.260	54.00	16.16	AV
		H	12400.00	36.0	45.14	9.160	74.00	28.86	PK
		H	12400.00	29.4	38.60	9.160	54.00	15.40	AV
		H	17440.00	28.0	47.83	19.840	54.00	6.17	AV
		H	17440.00	32.6	52.46	19.840	74.00	21.54	PK