

01_Bluetooth_DH5 1Mbps_On the Front of the Face_Ch78**Device Under Test Properties**

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.0, 78	7.87	1.85	39.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	82.0 x 44.3	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.5
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-19	2026-02-19
psSAR1g [W/Kg]	0.144	0.164
psSAR10g [W/Kg]	0.058	0.070
Power Drift [dB]	-0.02	-0.05

SAR Pattern

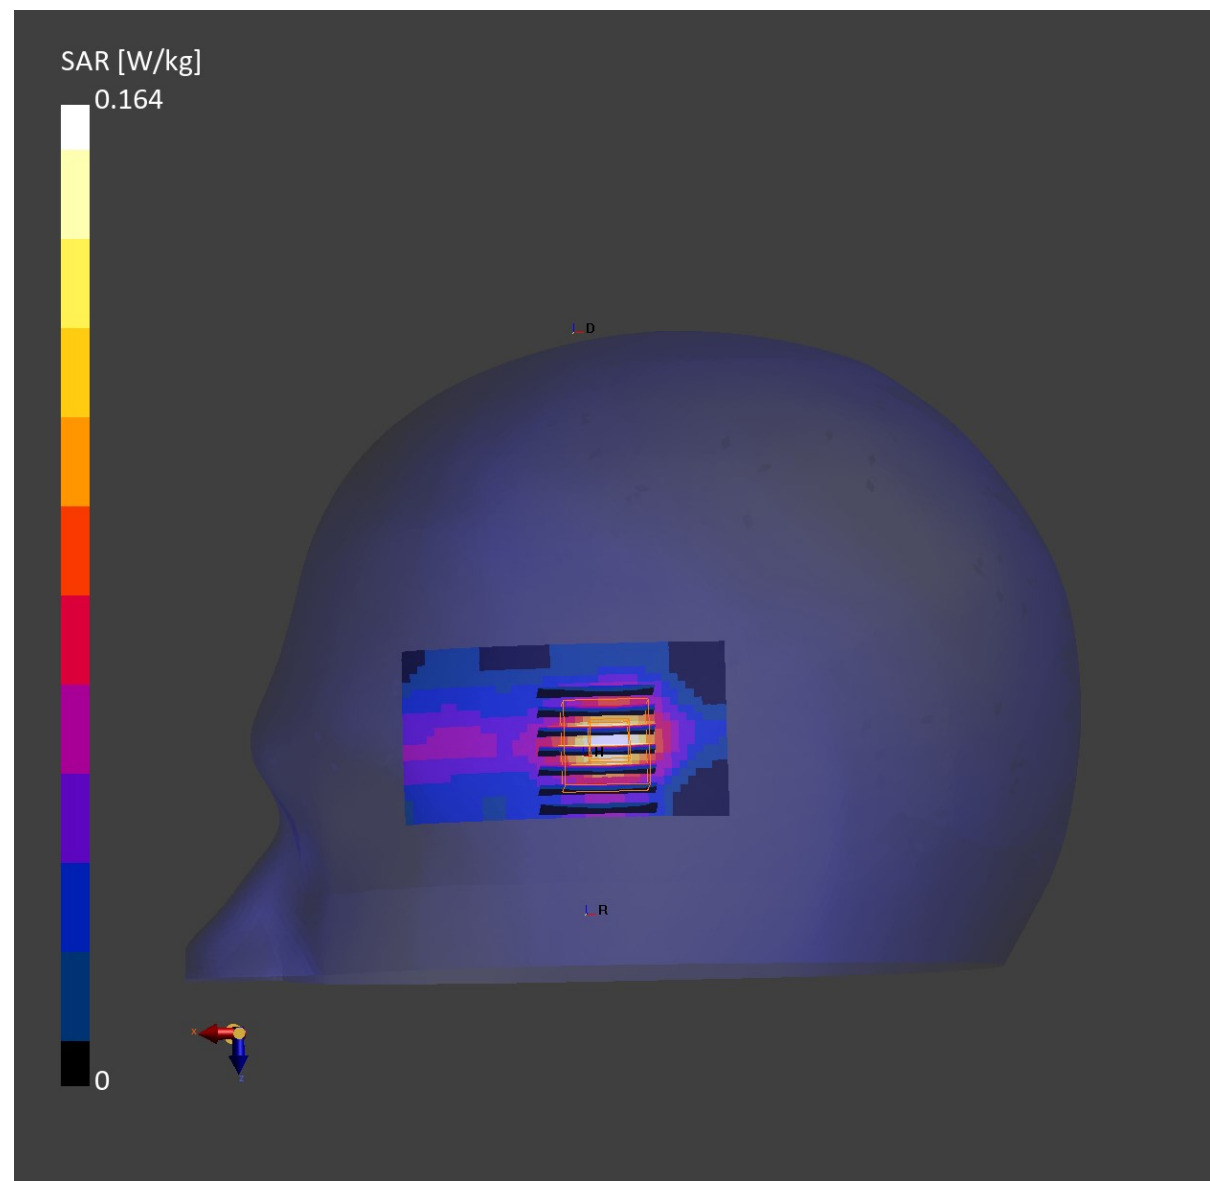

02_WLAN2.4GHz_802.11b 1Mbps_On the Front of the Face_0mm_Ch11

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, Head Simulating Liquid	DEFAULT, 0.00	WLAN 2.4GHz	WLAN, 10415-AAA	2462.0, 11	7.87	1.79	40.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	110.0 x 60.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-25	2026-02-25
psSAR1g [W/Kg]	0.576	0.597
psSAR10g [W/Kg]	0.242	0.259
Power Drift [dB]	-0.07	-0.04
SAR Pattern		

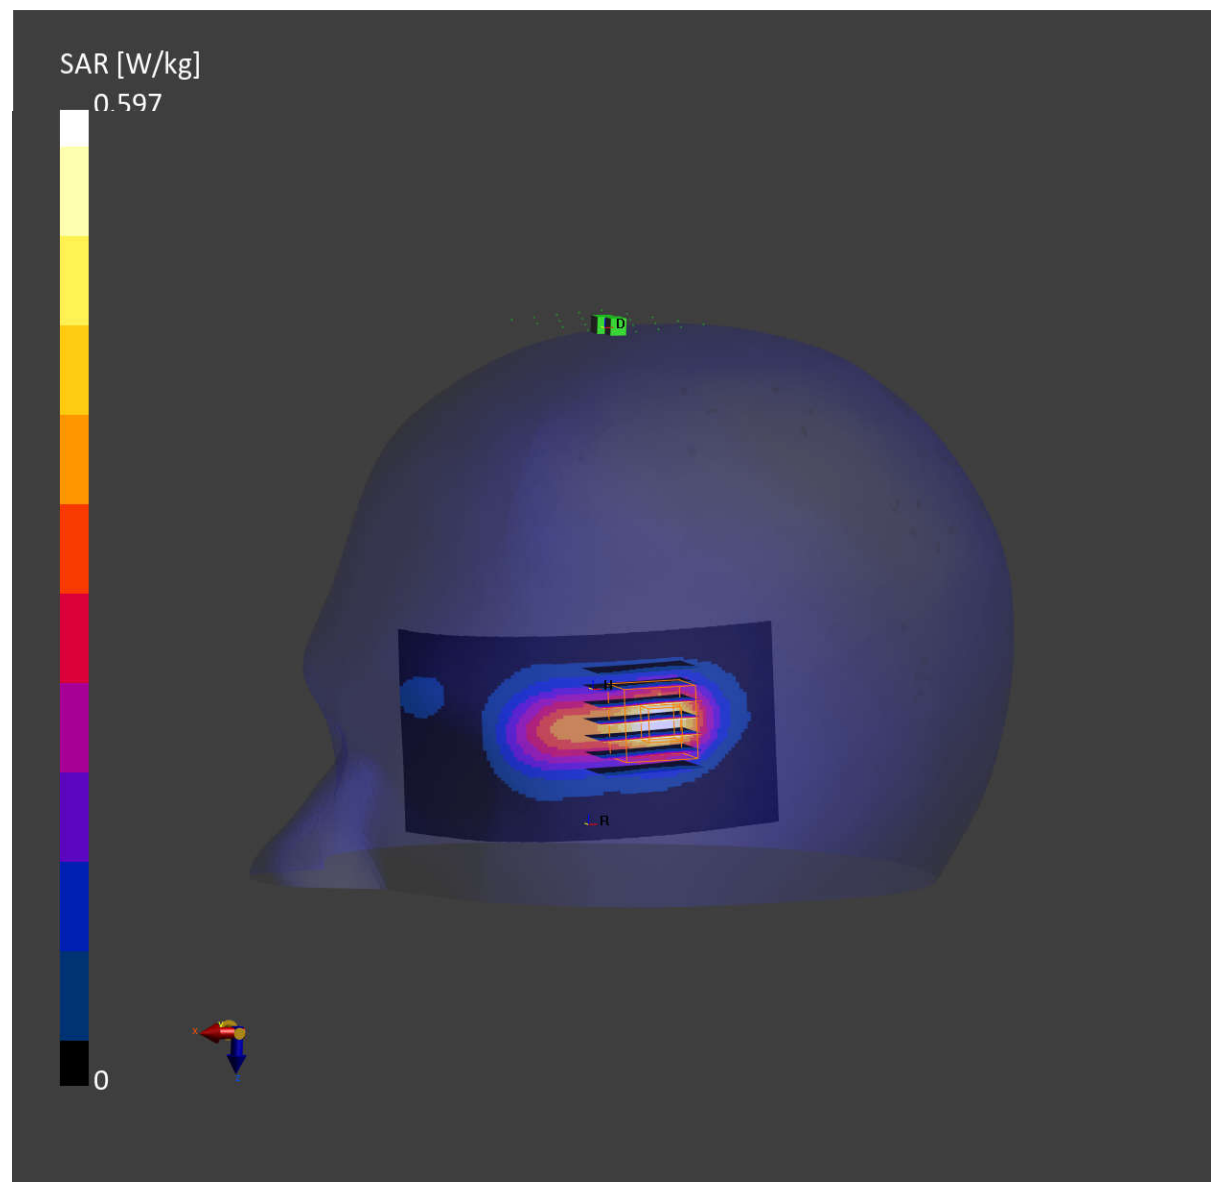

03_WLAN5GHz_802.11ac-VHT160 MCS0_On the Front of the Face_0mm_Ch50

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, Head Simulating Liquid	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10554-AAD	5250.0, 50	6.08	4.48	35.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	120.0 x 70.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-21	2026-02-21
psSAR1g [W/Kg]	0.353	0.353
psSAR10g [W/Kg]	0.112	0.112
Power Drift [dB]	-0.06	0.09
SAR Pattern		

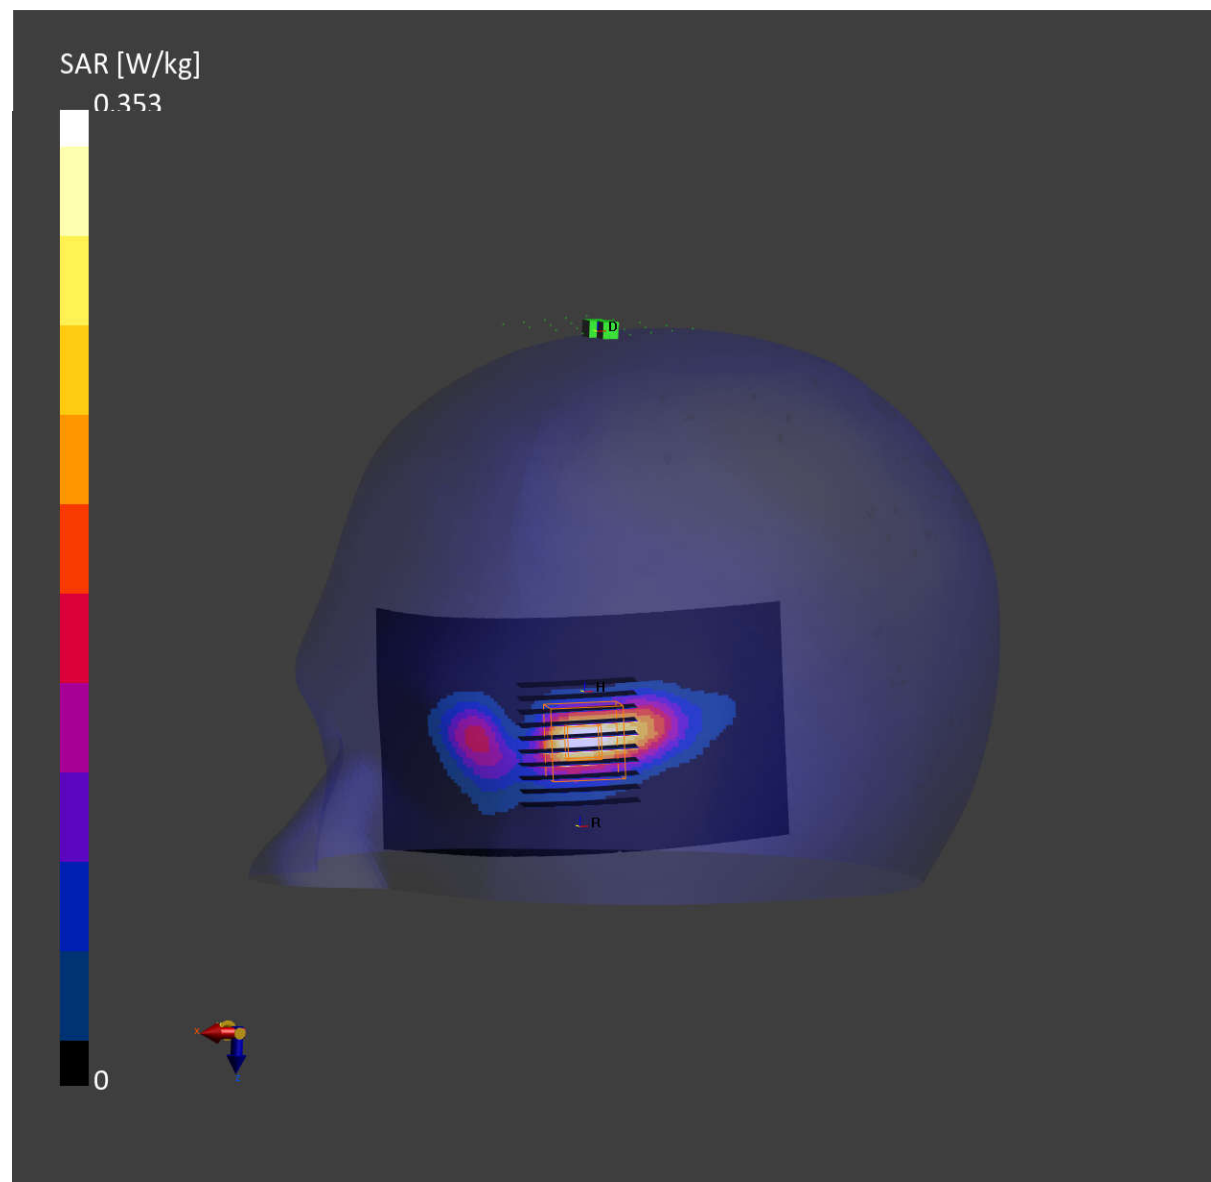

04_WLAN5GHz_802.11ac-VHT160 MCS0_On the Front of the Face_0mm_Ch114

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, Head Simulating Liquid	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10554-AAD	5570.0, 114	5.54	4.83	35.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28

Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	100.0 x 40.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-21	2026-02-21
psSAR1g [W/Kg]	0.518	0.489
psSAR10g [W/Kg]	0.158	0.150
Power Drift [dB]	-0.09	0.11
SAR Pattern		

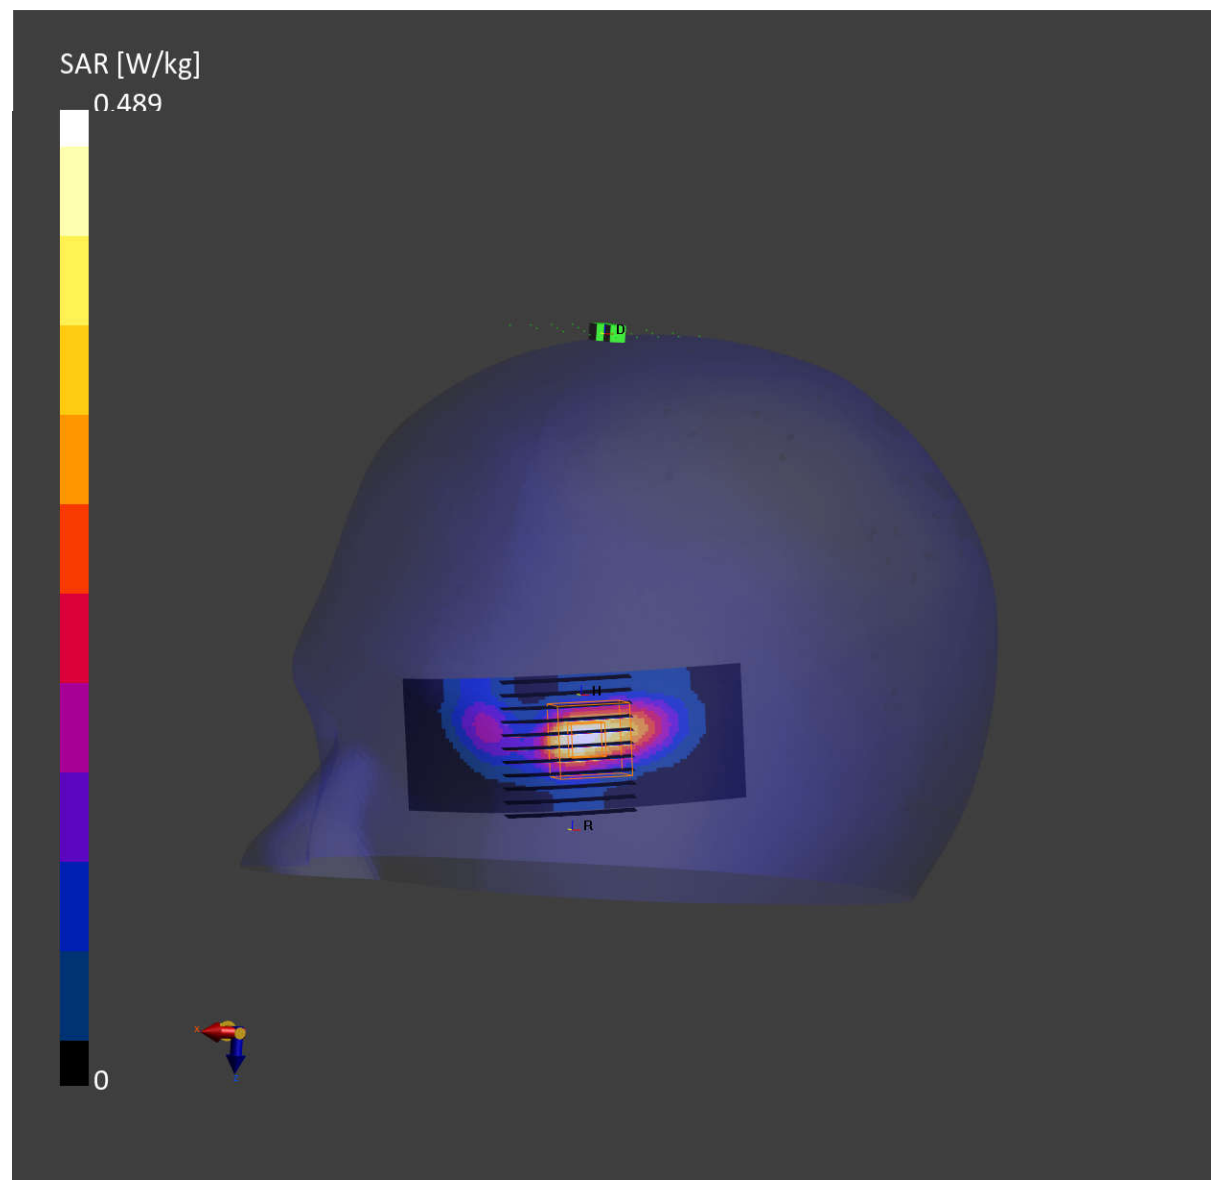

05_WLAN5GHz_802.11ac-VHT80 MCS0_On the Front of the Face_Ch155

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10544-AAC	5775.0, 155	5.52	5.14	36.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	80.7 x 42.7	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-18	2026-02-18
psSAR1g [W/Kg]	0.445	0.430
psSAR10g [W/Kg]	0.141	0.129
Power Drift [dB]	0.08	0.03

SAR Pattern

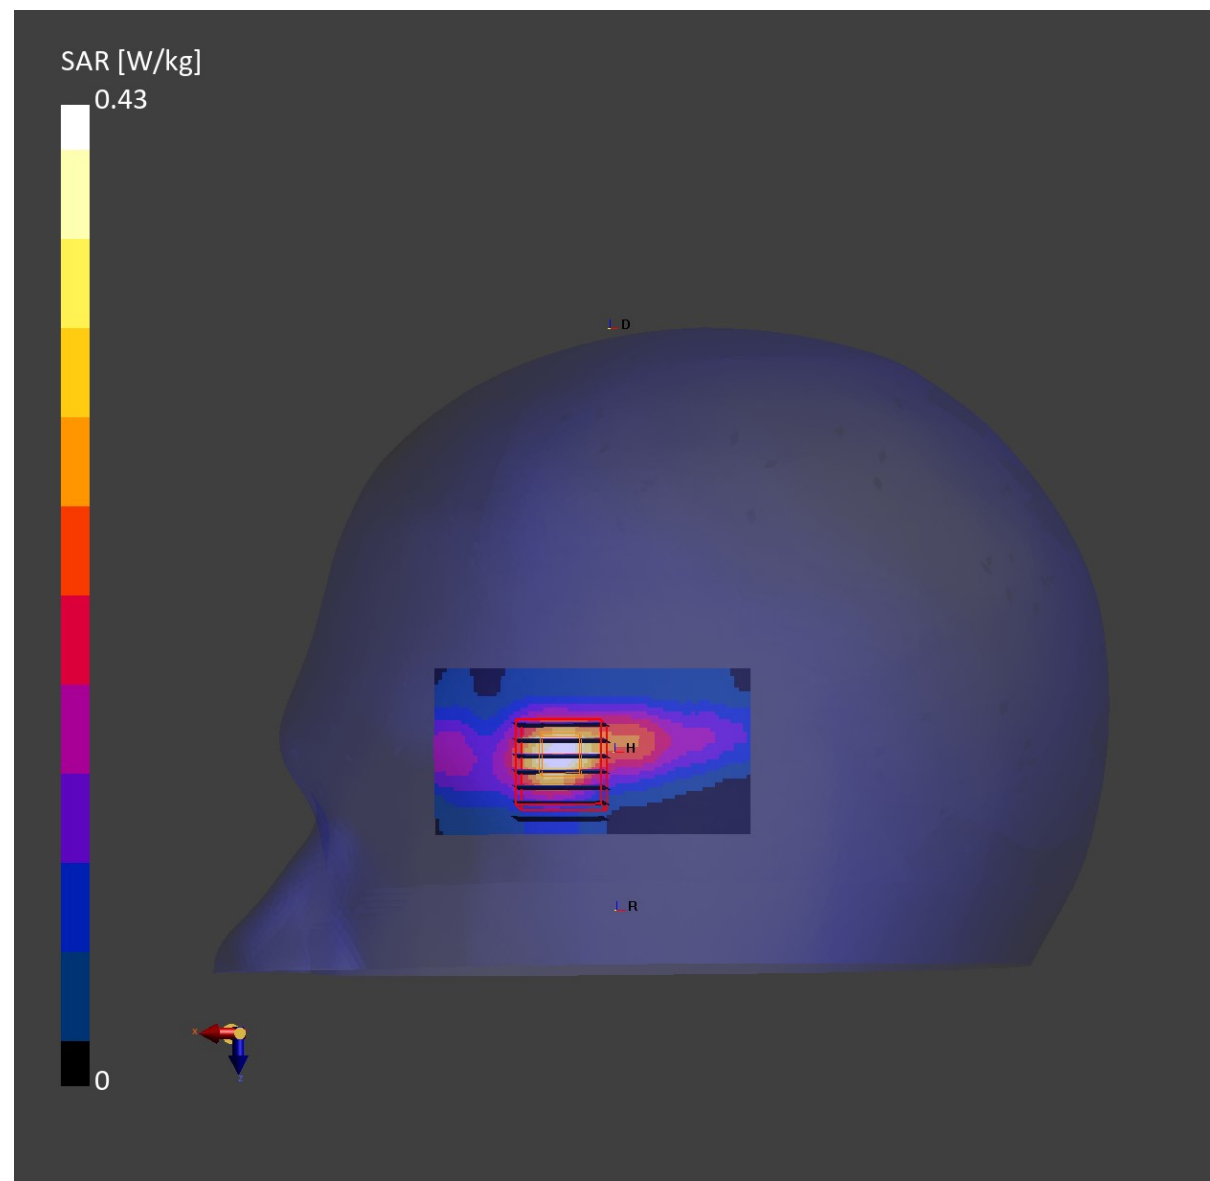

06_Bluetooth_DH5 1Mbps_On of the head_Ch39

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2441.0, 39	7.87	1.82	39.9

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	54.7 x 52.8	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.5
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-19	2026-02-19
psSAR1g [W/Kg]	0.097	0.125
psSAR10g [W/Kg]	0.041	0.052
Power Drift [dB]	-0.06	-0.14

SAR Pattern

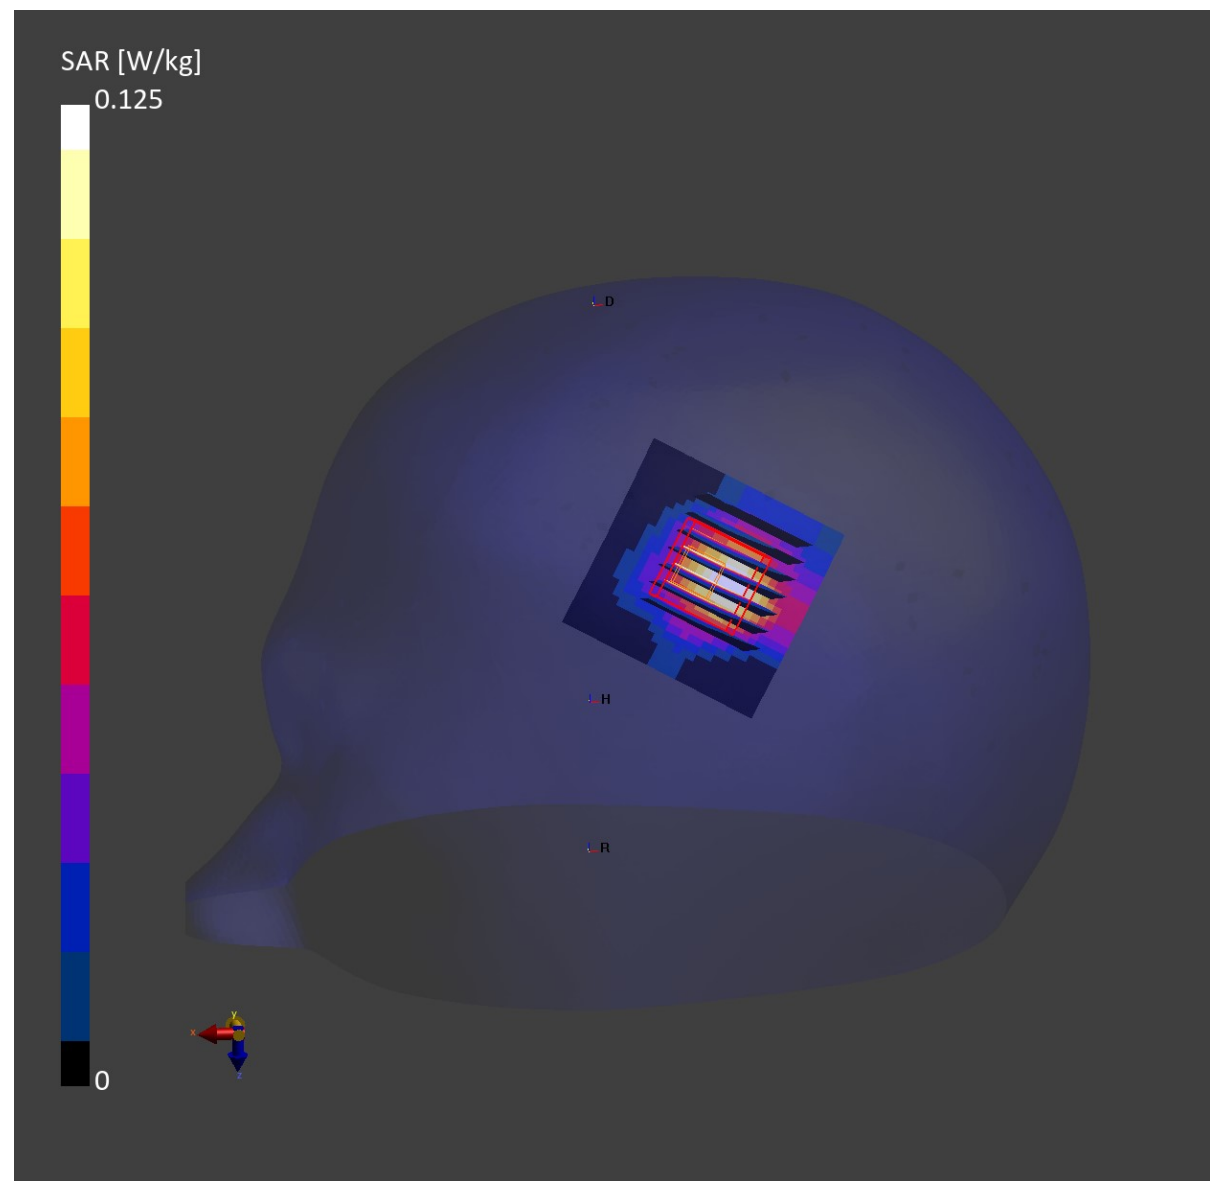

07_WLAN2.4GHz_802.11b 1Mbps_On of the head_Ch11

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 2.4GHz	WLAN, 10415-CAA	2462.0, 11	7.87	1.84	39.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	58.5 x 40.1	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	3.0
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.5
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-19	2026-02-19
psSAR1g [W/Kg]	0.469	0.559
psSAR10g [W/Kg]	0.193	0.249
Power Drift [dB]	-0.08	-0.04

SAR Pattern

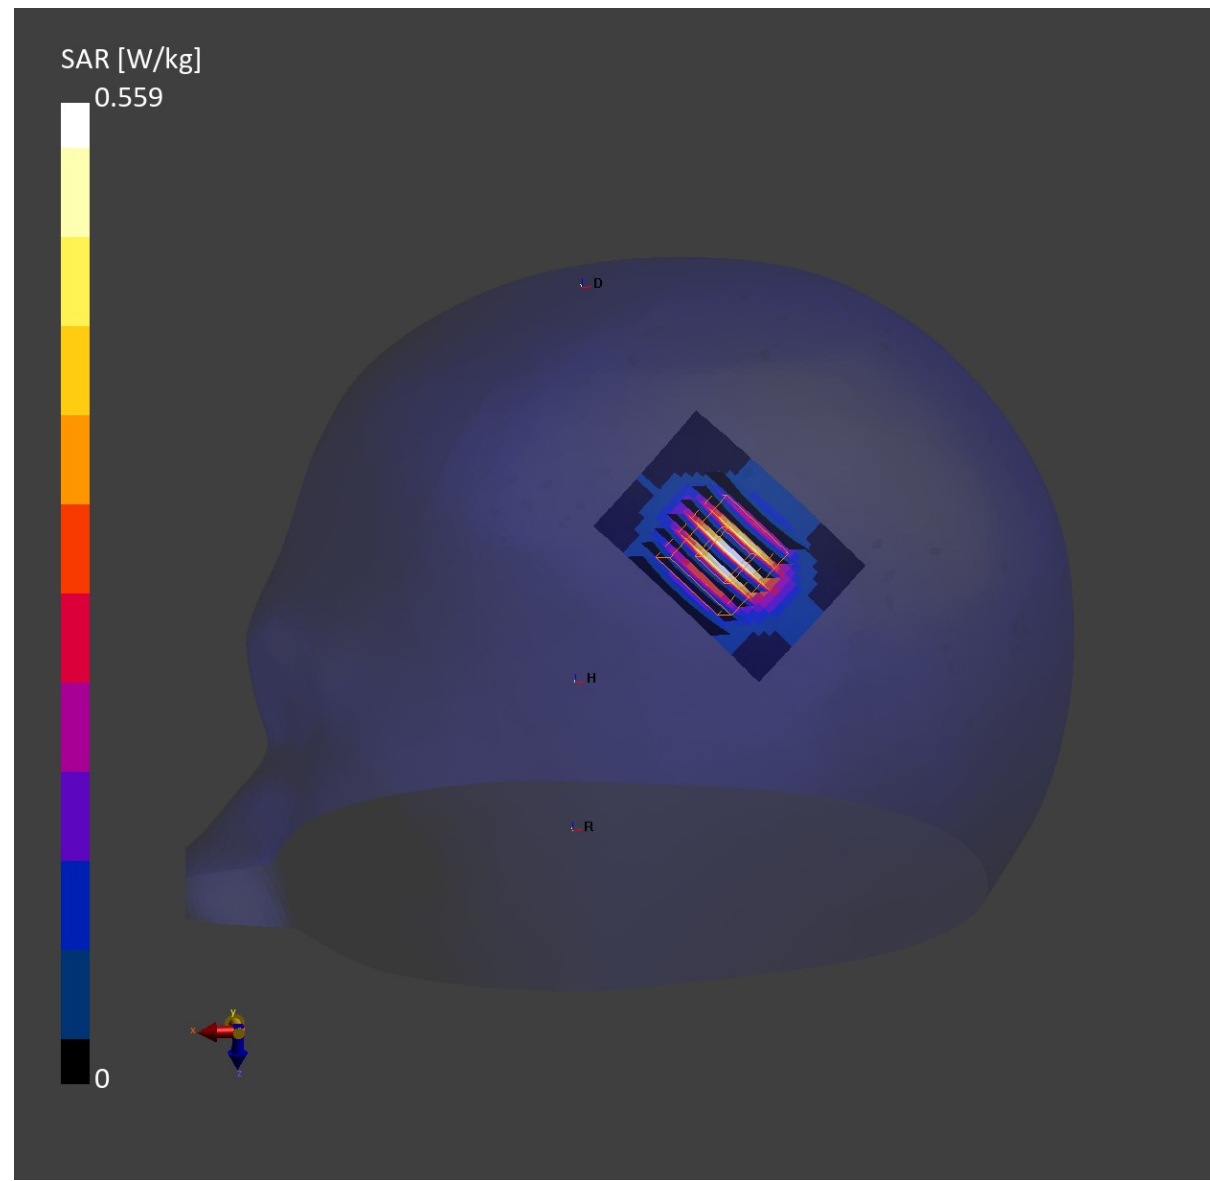

08_WLAN5GHz_802.11ac-VHT160 MCS0_On of the head_Ch50

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10554-AAD	5250.0, 50	6.08	4.58	36.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	109.1 x 50.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-15	2026-02-15
psSAR1g [W/Kg]	0.219	0.193
psSAR10g [W/Kg]	0.066	0.056
Power Drift [dB]	0.04	0.02

SAR Pattern

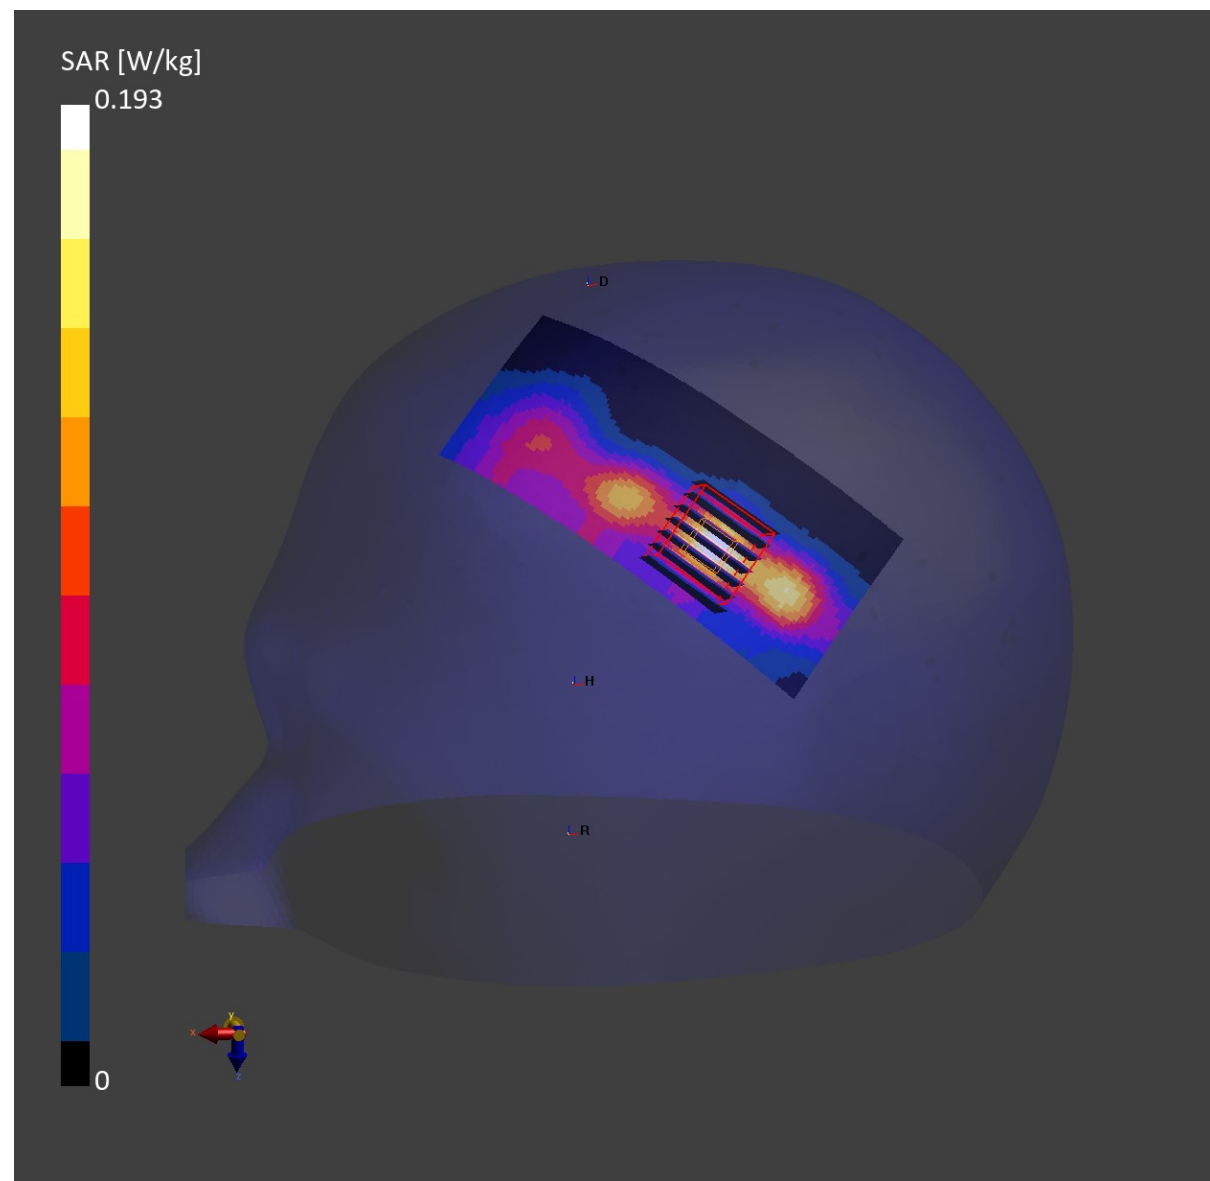

09_WLAN5GHz_802.11ac-VHT160 MCS0_On of the head_Ch114

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10554-AAD	5570.0, 114	5.54	4.95	35.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	109.1 x 50.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-15	2026-02-15
psSAR1g [W/Kg]	0.305	0.266
psSAR10g [W/Kg]	0.102	0.086
Power Drift [dB]	-0.05	-0.07

SAR Pattern

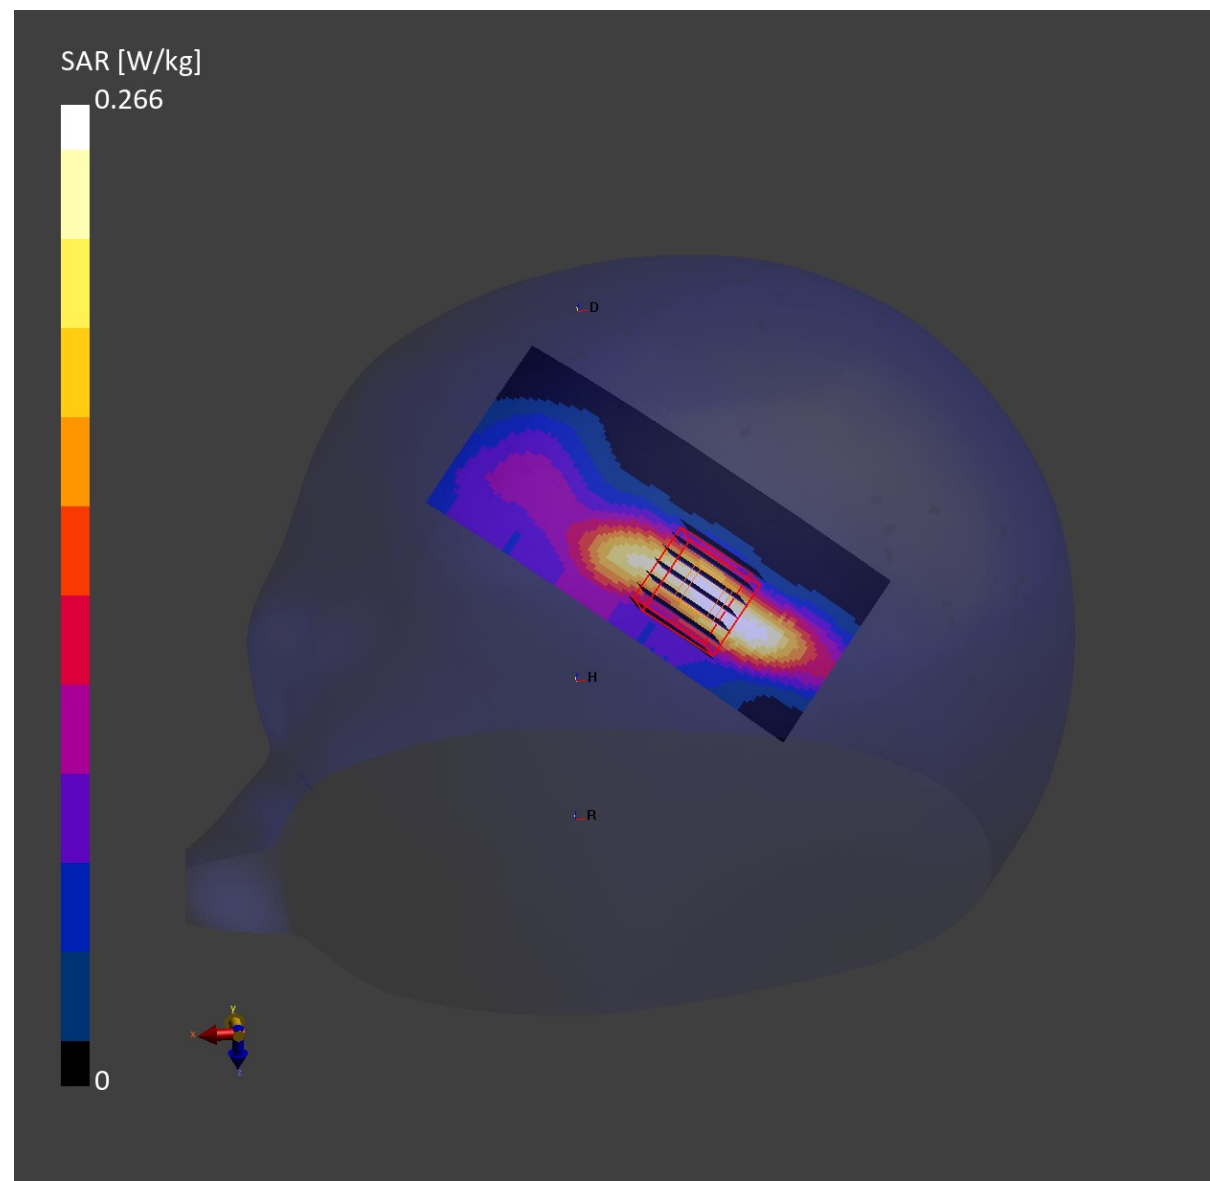

10_WLAN5GHz_802.11ac-VHT80 MCS0_On of the head_Ch155

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	158.2 x 77.9 x 8.0		Other

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Headstand, HSL	DEFAULT, 0.00	WLAN 5GHz	WLAN, 10544-AAC	5775.0, 155	5.52	5.19	35.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
SAM-HeadStand V10.0 – 1024	HBBL-600-10000 ,	EX3DV4 – SN7641, 2025-06-26	DAE4 Sn1210, 2025-11-28


Scans Setup

	FastVolume Scan	Zoom Scan
Grid Extents [mm]	109.1 x 50.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	5.0 x 5.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	3.0
Graded Grid	n/a	Yes
Grading Ratio	n/a	1.4
Scan Method	Measured	Measured

Measurement Results

	FastVolume Scan	Zoom Scan
Date	2026-02-15	2026-02-15
psSAR1g [W/Kg]	0.325	0.297
psSAR10g [W/Kg]	0.10	0.087
Power Drift [dB]	0.08	-0.11

SAR Pattern

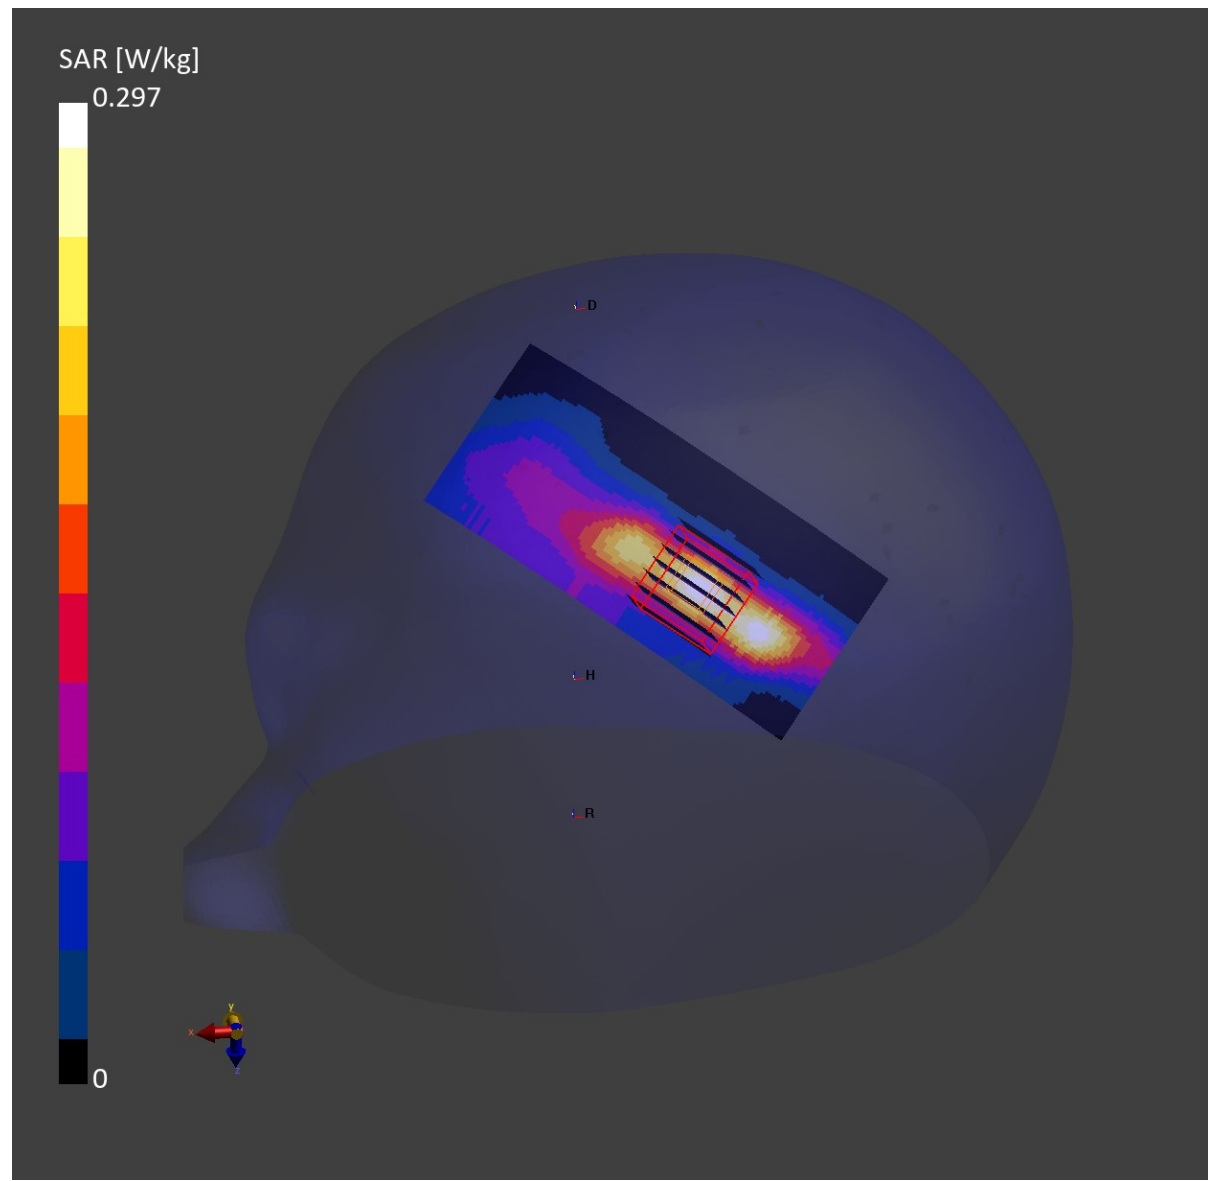

Date: 2026-02-21

11_Bluetooth_DH5 1Mbps_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402.000 MHz;
Duty Cycle: 1:1.086

Medium: Head Simulating Liquid Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 37.5$


Ambient Temperature: 23.6°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.220 W/kg; SAR (10g) = 0.092 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm
Power Drift = -0.18 dB
SAR (1g) = 0.254 W/kg; SAR (10g) = 0.087 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 72.8 %

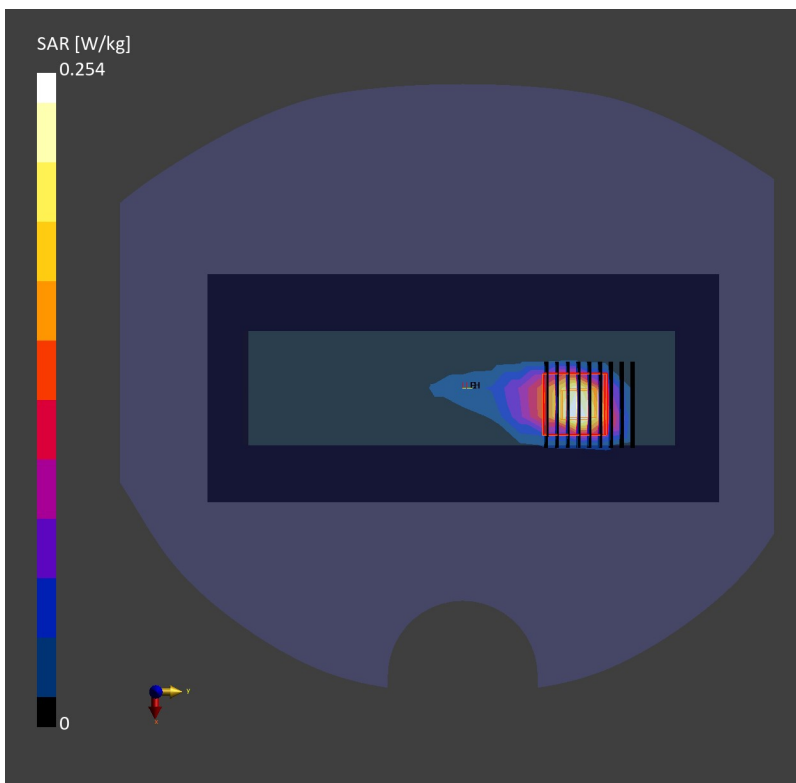

Date: 2026-02-26

12_WLAN2.4GHz_802.11b 1Mbps_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch12

Communication System: IEEE 802.11b ; Frequency: 2467.000MHz; Duty Cycle: 1:1
 Medium: Head Simulating Liquid Medium parameters used: $f = 2467.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 40.0$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.188 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.599 W/kg; SAR (10g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.9 %

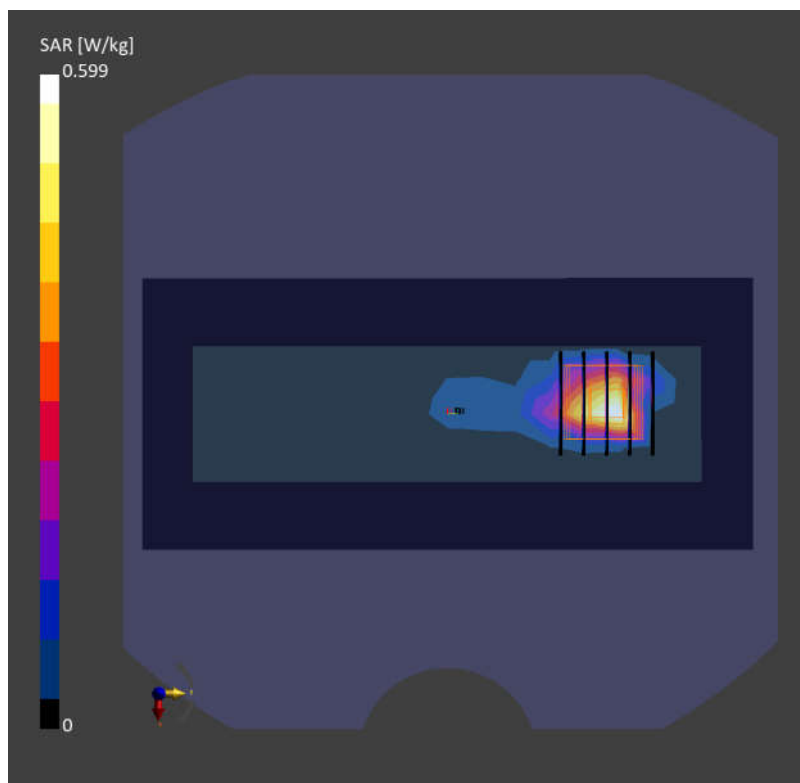

Date: 2026-02-16

13_WLAN5GHz_802.11ac-VHT160 MCS0_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch50


Communication System: IEEE 802.11ac ; Frequency: 5250.000 MHz; Duty Cycle: 1:1
 Medium: Head Simulating Liquid Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.5$ S/m; $\epsilon_r = 35.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.80, 5.57, 5.56); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.601 W/kg; SAR (10g) = 0.139 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
 Power Drift = -0.03 dB
 SAR (1g) = 0.649 W/kg; SAR (10g) = 0.129 W/kg
 Smallest distance from peaks to all points 3 dB below = 4.6 mm
 Ratio of SAR at M2 to SAR at M1 = 62.6 %

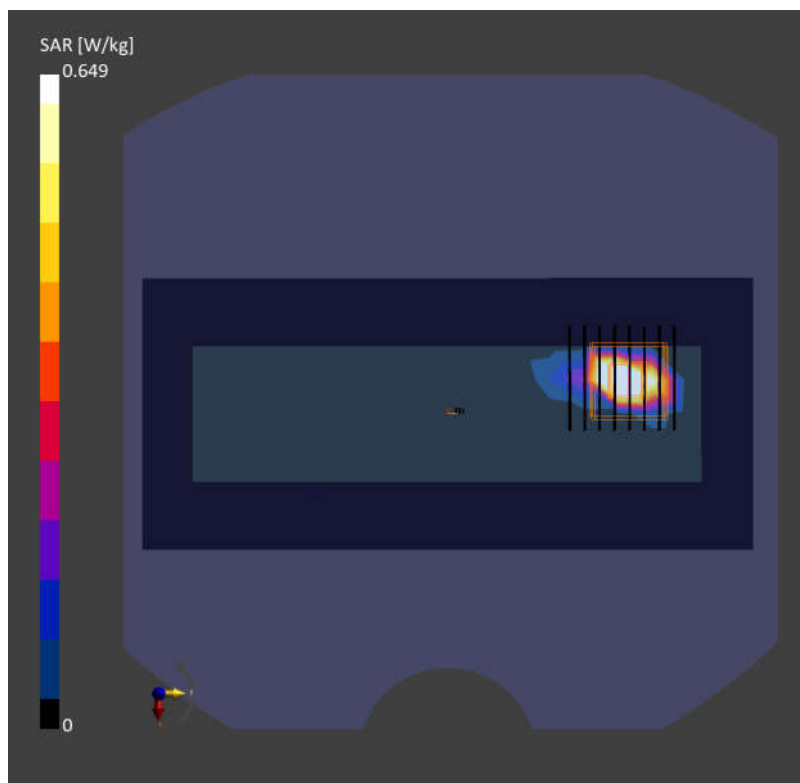

Date: 2026-02-23

**14_WLAN5GHz_802.11ac-VHT160 MCS0_Left Temple Arm Outer Edge
TouchingPhantom_0mm_Ch114**


Communication System: IEEE 802.11ac ; Frequency:5570.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.87$ S/m; $\epsilon_r = 36.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.298 W/kg; SAR (10g) = 0.082 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.06 dB
SAR (1g) = 0.455 W/kg; SAR (10g) = 0.093 W/kg
Smallest distance from peaks to all points 3 dB below = 4.2 mm
Ratio of SAR at M2 to SAR at M1 = 62.3 %

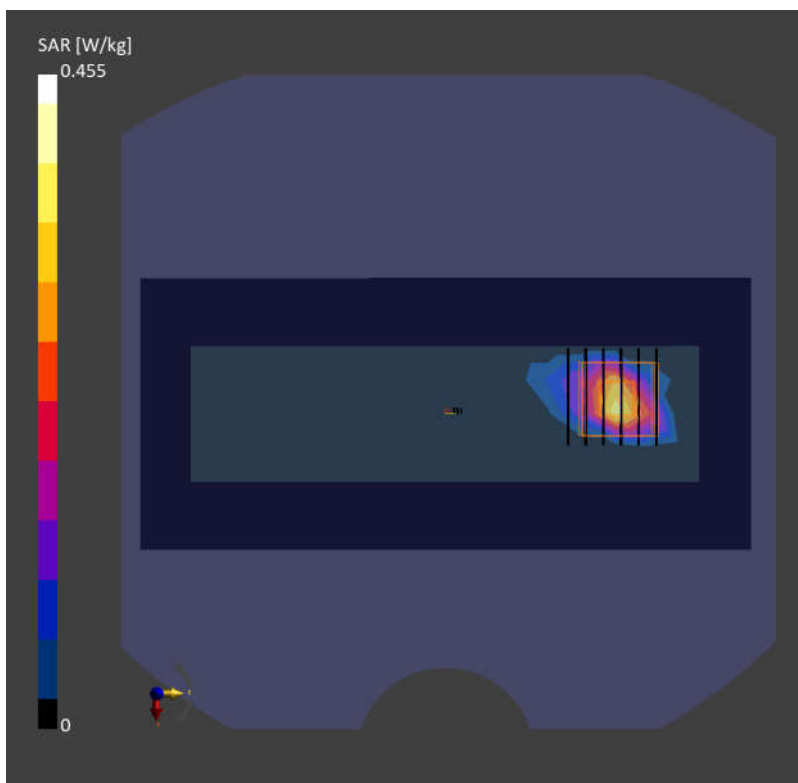

Date: 2026-02-21

15_WLAN5GHz_802.11ac-VHT80 MCS0_Left Temple Arm Outer Edge Touching Phantom_0mm_Ch155


Communication System: IEEE 802.11ax; Frequency: 5775.000MHz; Duty Cycle: 1:1
 Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.0$
 Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.251 W/kg; SAR (10g) = 0.062 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.3 mm x 2.3 mm x 1.2 mm
 Power Drift = -0.02 dB
 SAR (1g) = 0.309 W/kg; SAR (10g) = 0.061 W/kg
 Smallest distance from peaks to all points 3 dB below = 4.0 mm
 Ratio of SAR at M2 to SAR at M1 = 61.4 %

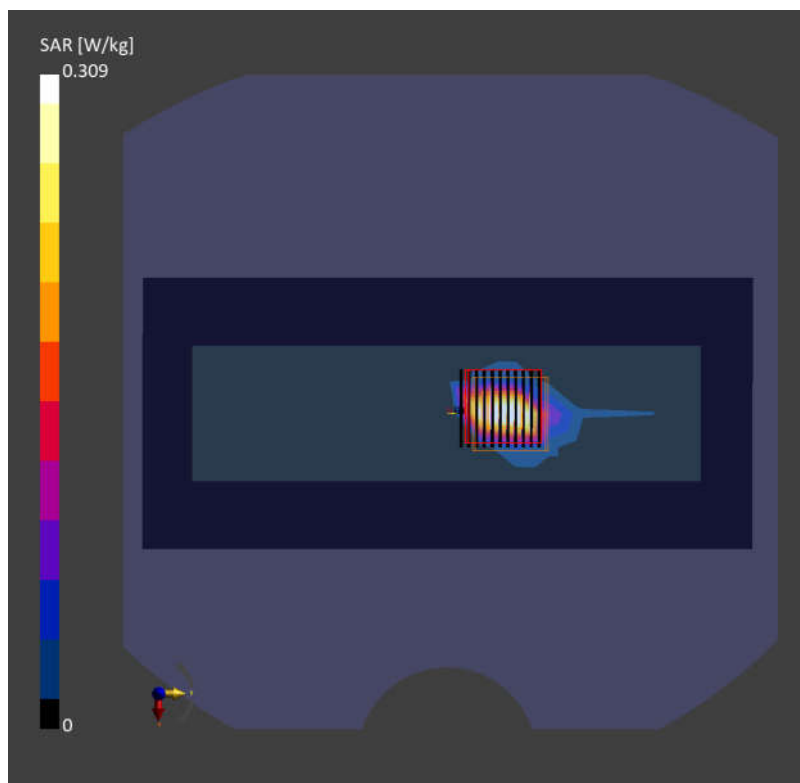

Date: 2026-02-15

16_Bluetooth_DH5 1Mbps_Left Lens Kept 5mm Distance from Phantom_5mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2402.000 MHz; Duty Cycle: 1:1.086

Medium: Head Simulating Liquid Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.008 W/kg; SAR (10g) = 0.004 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 0.008 W/kg; SAR (10g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 91.8 %

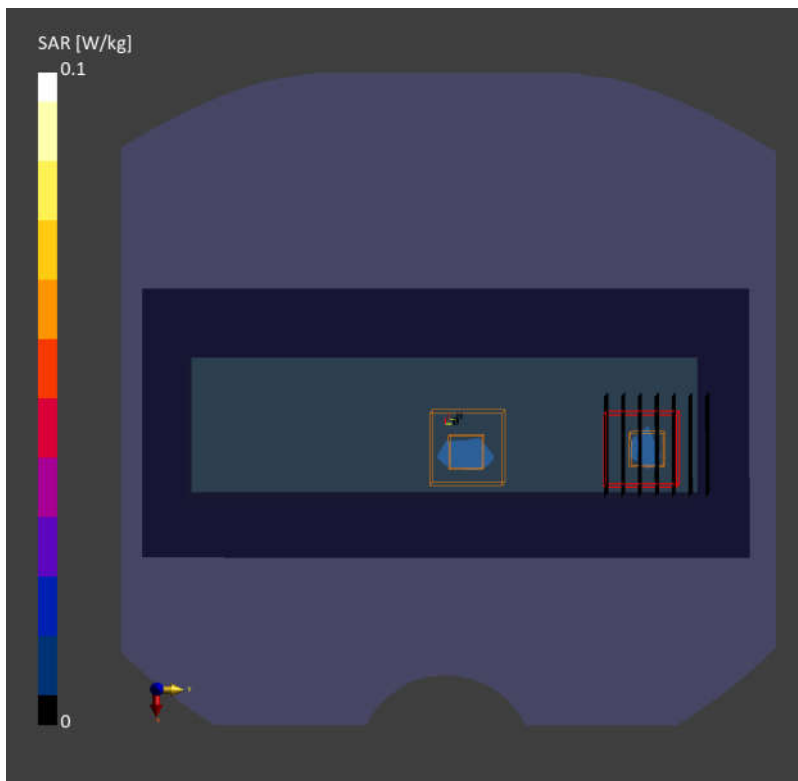

Date: 2026-02-26

17_WLAN2.4GHz_802.11b 1Mbps_Left Lens Kept 5mm Distance from Phantom_5mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 40.1$


Ambient Temperature: 23.4°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.019 W/kg; SAR (10g) = 0.01 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.10 dB
SAR (1g) = 0.023 W/kg; SAR (10g) = 0.010 W/kg
Smallest distance from peaks to all points 3 dB below = 9.9 mm
Ratio of SAR at M2 to SAR at M1 = 90.0 %

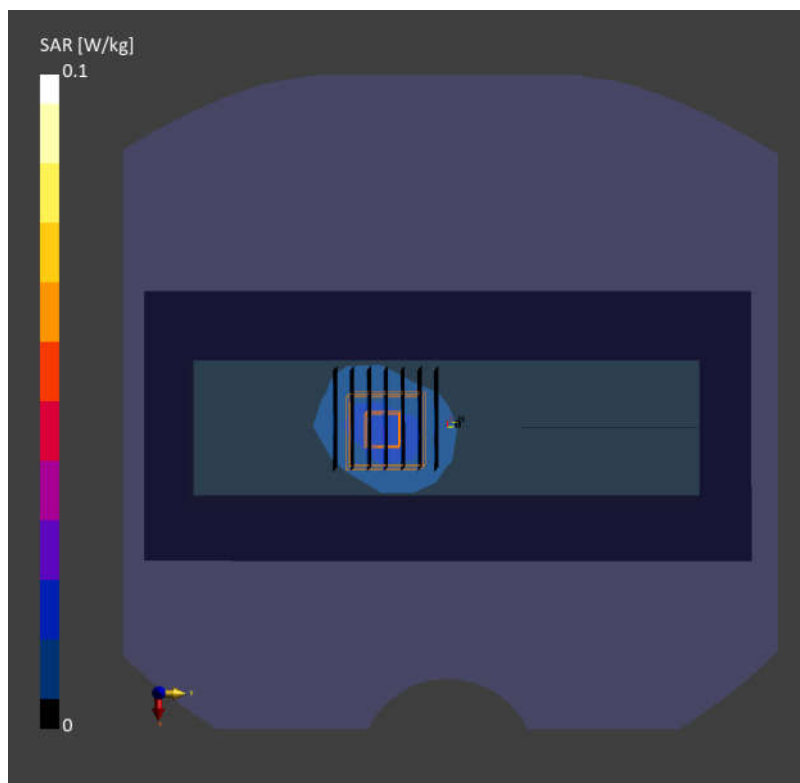

Date: 2026-02-18

18_WLAN5GHz_802.11ac-VHT160 MCS0_Left Lens Kept 5mm Distance from Phantom_5mm_Ch50

Communication System: IEEE 802.11ax; Frequency: 5250.000MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 35.8$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.00); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.028 W/kg; SAR (10g) = 0.011 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.031 W/kg; SAR (10g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 70.7 %

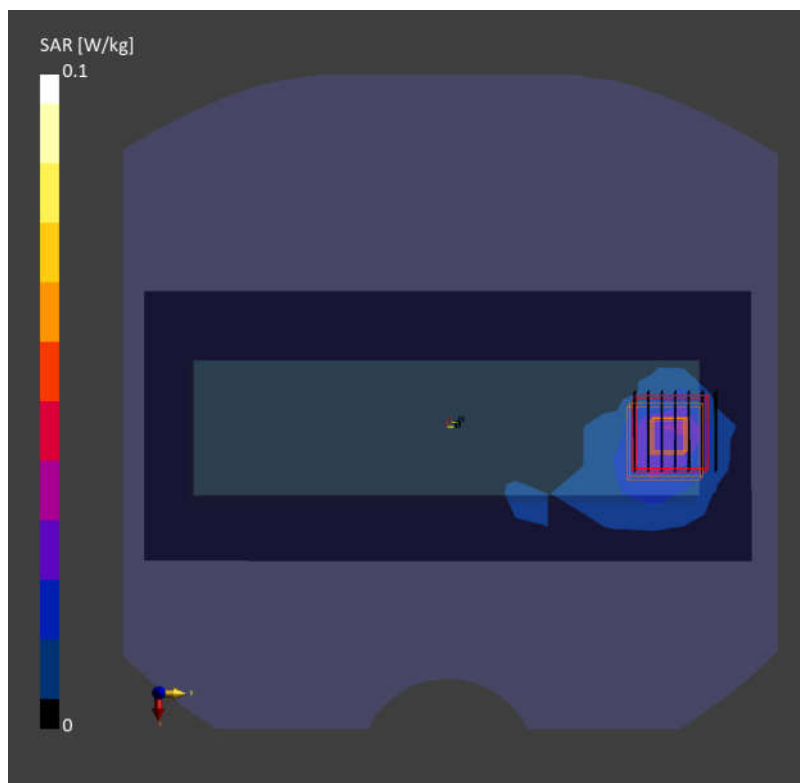

Date: 2026-02-19

19_WLAN5GHz_802.11ac-VHT160 MCS0_Left Lens Kept 5mm Distance from Phantom_5mm_Ch114

Communication System: IEEE 802.11ax ; Frequency: 5570.000MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.92$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.020 W/kg; SAR (10g) = 0.008 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.020 W/kg; SAR (10g) = 0.008 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.6 %

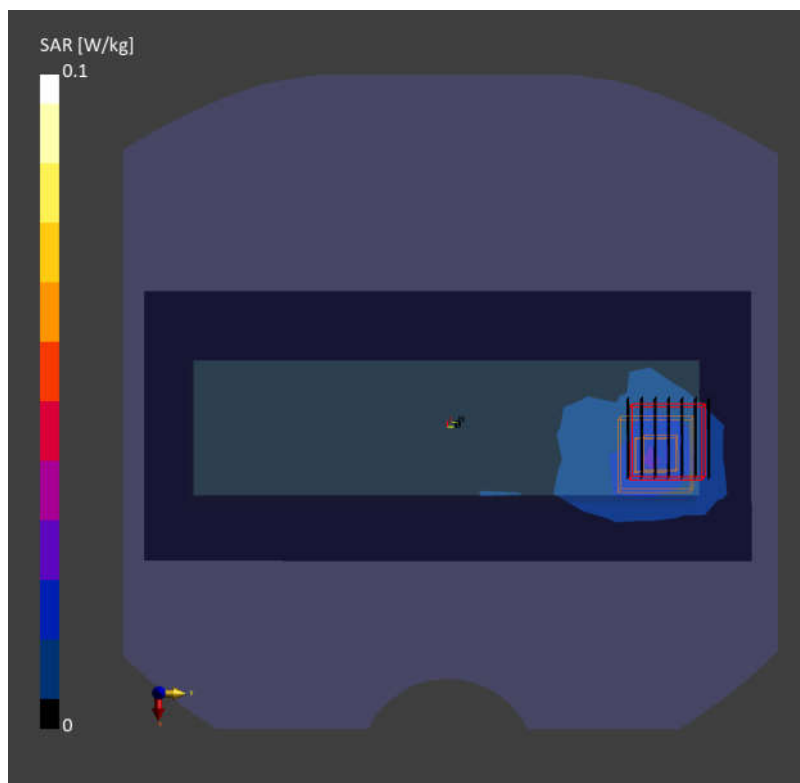

Date: 2026-02-24

20_WLAN5GHz_802.11ac-VHT80 MCS0_Left Lens Kept 5mm Distance from Phantom_5mm_Ch155

Communication System: IEEE 802.11ac; Frequency: 5775.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 34.7$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.22, 5.02, 5.01); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (80.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.021 W/kg; SAR (10g) = 0.007 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 0.019 W/kg; SAR (10g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.0 %

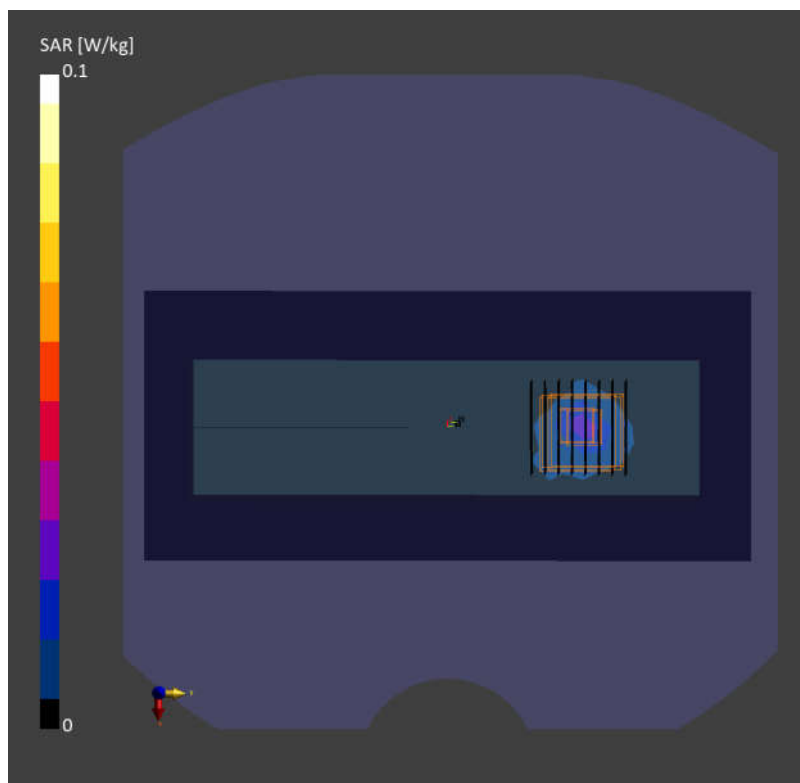

Date: 2026-02-17

21_Bluetooth_DH5 1Mbps_Right Side_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz; Duty Cycle: 1:1.086
 Medium: Head Simulating Liquid Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.023 W/kg; SAR (10g) = 0.011 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.026 W/kg; SAR (10g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

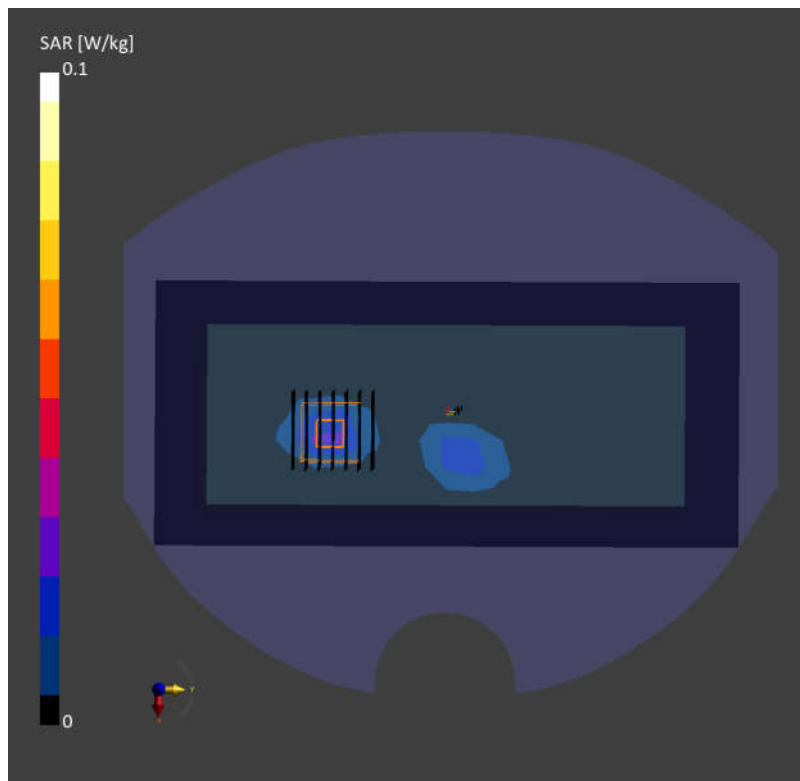

Date: 2026-02-17

22_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch13

Communication System: IEEE 802.11b WiFi 2.4 GHz ; Frequency: 2472.000MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2472.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.252 W/kg; SAR (10g) = 0.118 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.293 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

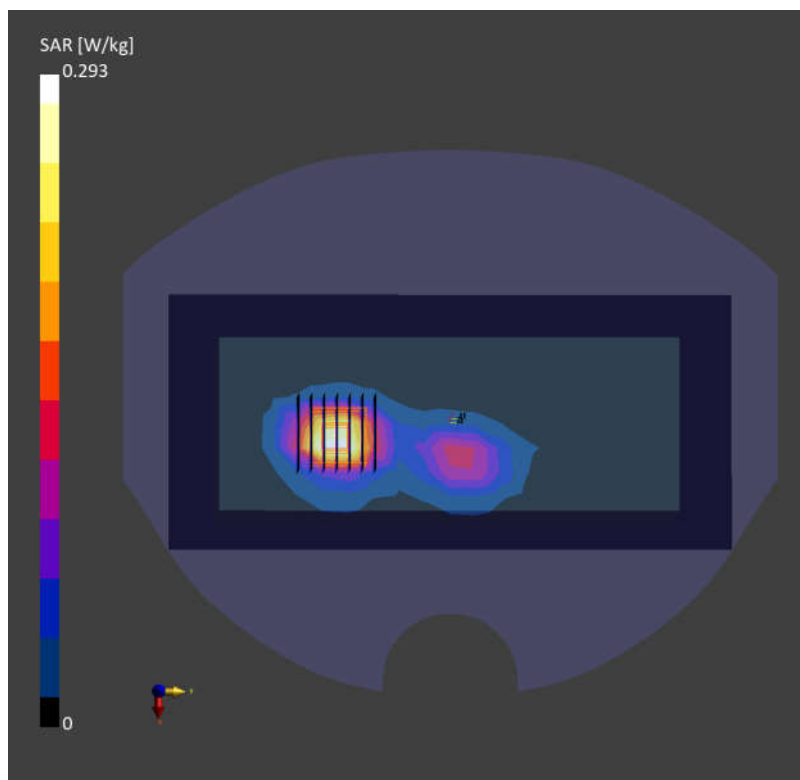

Date: 2026-02-20

23_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch58

Communication System: IEEE 802.11ac ; Frequency: 5290.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 37.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.00); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.154 W/kg; SAR (10g) = 0.061 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.167 W/kg; SAR (10g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

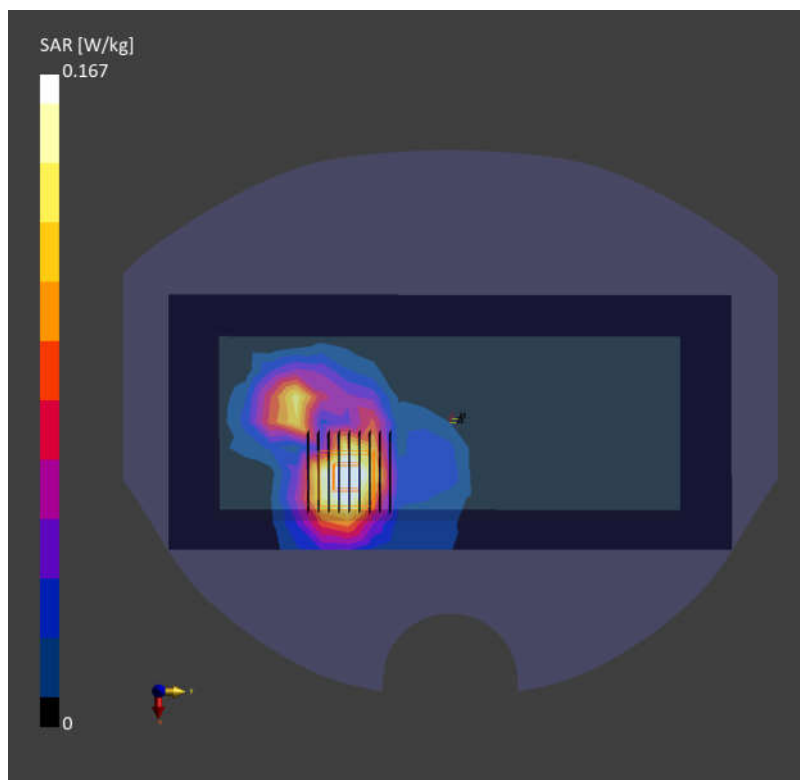

Date: 2026-02-18

24_WLAN5GHz_802.11ac-VHT160 MCS0_Right Side_5mm_Ch114

Communication System: IEEE 802.11ac ; Frequency:5570.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.94$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(5.27, 5.06, 5.05); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.185 W/kg; SAR (10g) = 0.075 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.00 dB

SAR (1g) = 0.183 W/kg; SAR (10g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.6 %

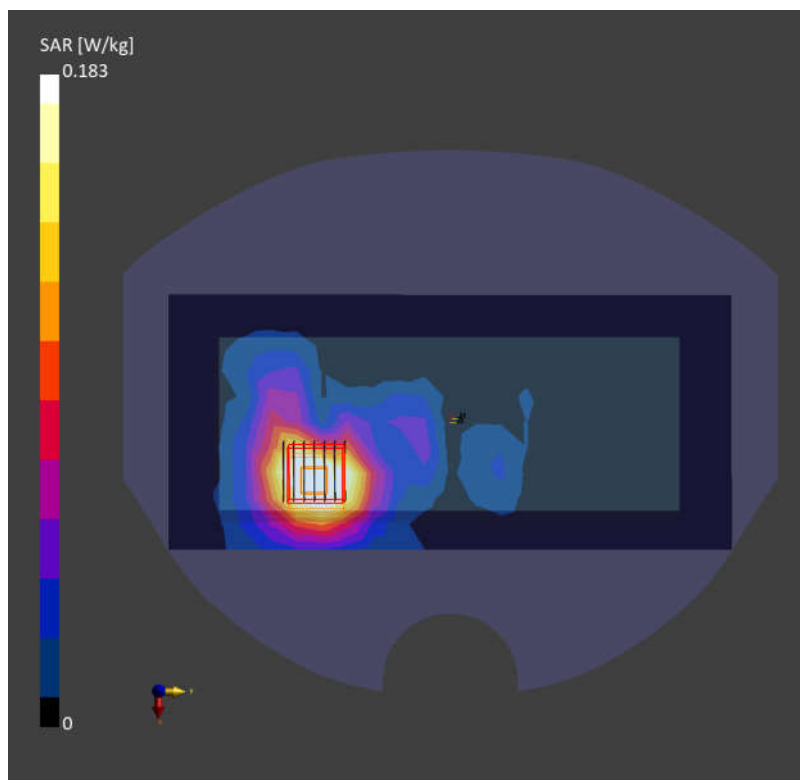

Date: 2026-02-21

25_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch155


Communication System: IEEE 802.11ac; Frequency: 5775.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.148 W/kg; SAR (10g) = 0.061 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 0.191 W/kg; SAR (10g) = 0.063 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 57.8 %

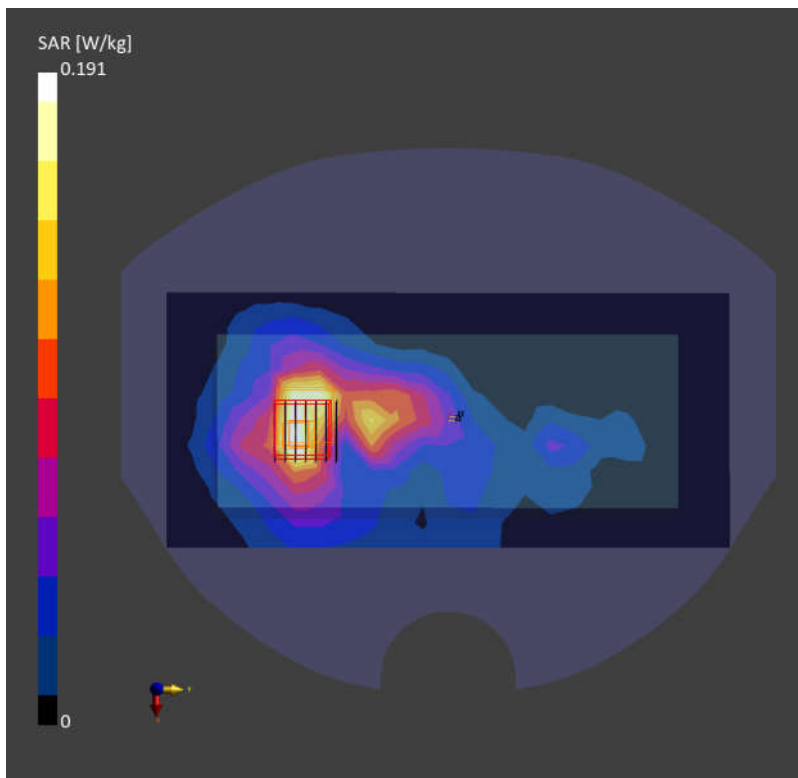

Date: 2026-02-17

26_Bluetooth_DH5 1Mbps_Right Side_0mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2402.000 MHz; Duty Cycle: 1:1.086

Medium: Head Simulating Liquid Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.079 W/kg; SAR (10g) = 0.031 W/kg;


Zoom Scan (30.4 mm x 30.4 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.103 W/kg; SAR (10g) = 0.037 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

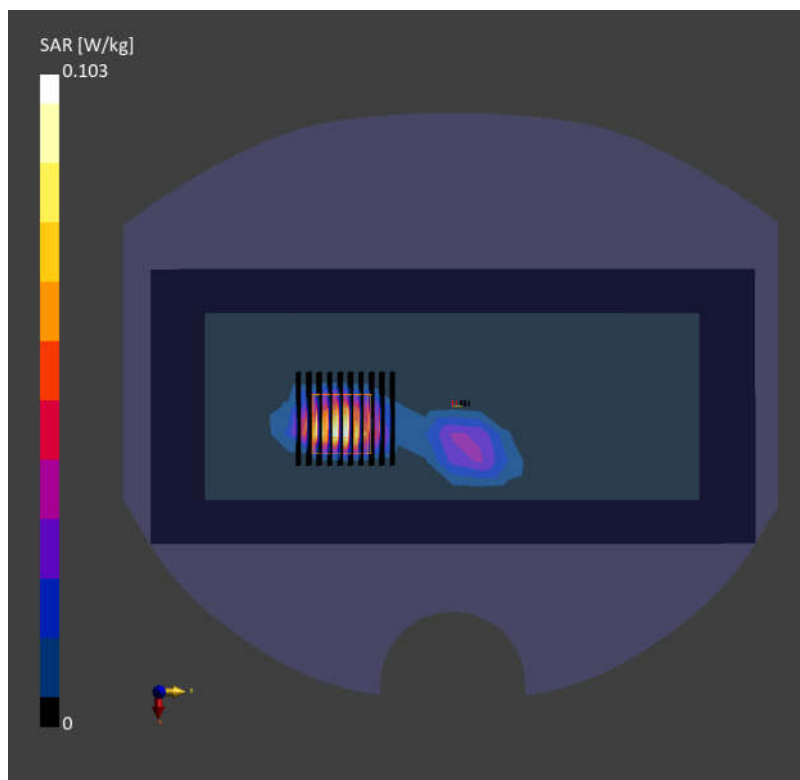

Date: 2026-02-17

27_WLAN2.4GHz_802.11b 1Mbps_Right Side_0mm_Ch13

Communication System: IEEE 802.11b WiFi 2.4 GHz ; Frequency: 2472.000MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 2472.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7930; ConvF(7.28, 6.99, 6.98); Calibrated: 2025-07-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn715; Calibrated: 2025-11-28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.692 W/kg; SAR (10g) = 0.284 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.986 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.1 %

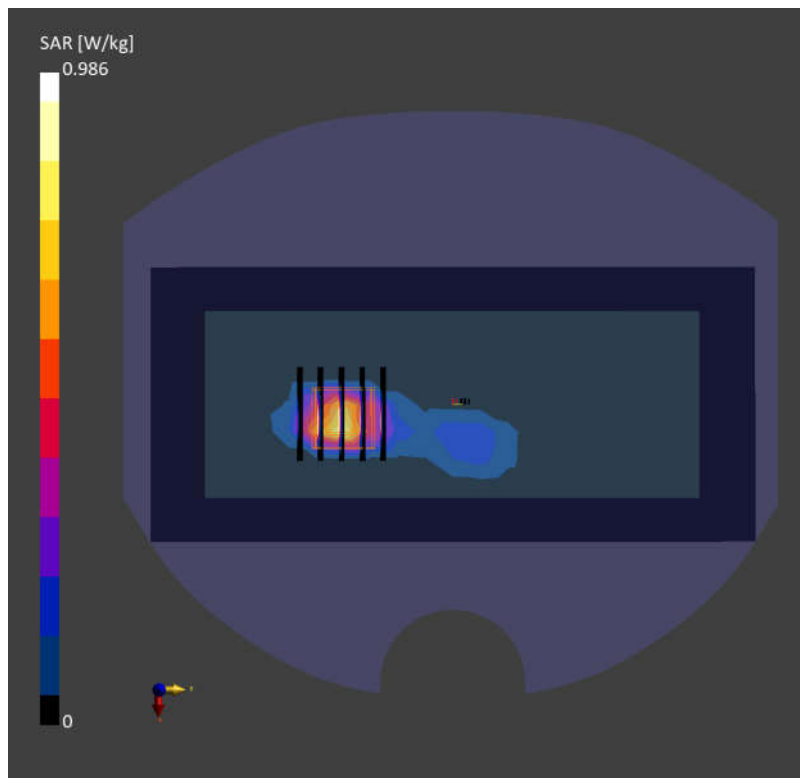

Date: 2026-02-18

28_WLAN5GHz_802.11ac-VHT80 MCS0_Back_0mm_Ch58

Communication System: IEEE 802.11ac ; Frequency: 5290.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.63$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.104 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.281 W/kg; SAR (10g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

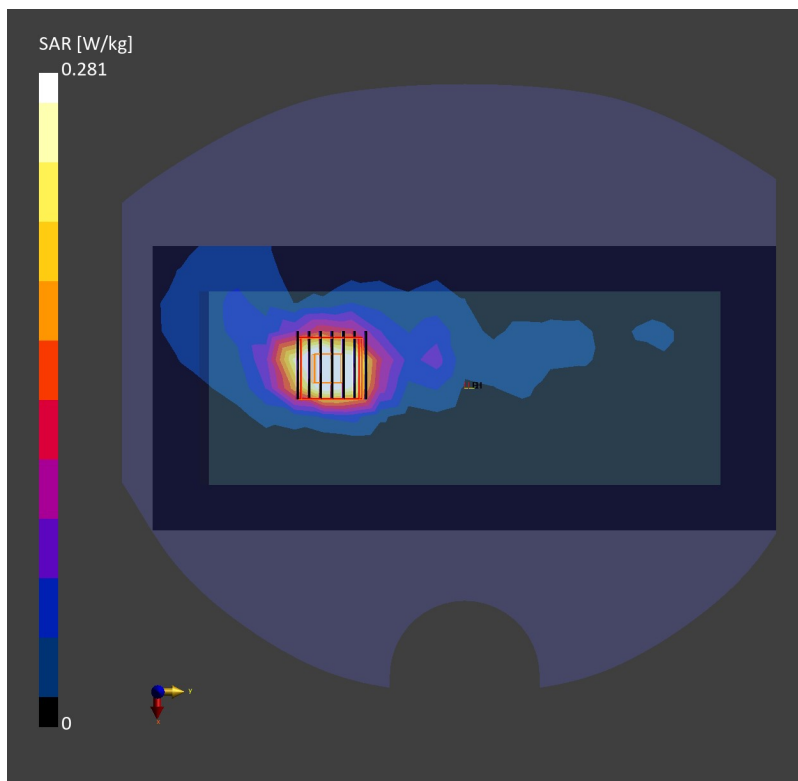

Date: 2026-02-19

29_WLAN5GHz_802.11ac-VHT160 MCS0_Back_0mm_Ch114


Communication System: IEEE 802.11ac; Frequency: 5570.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.92$ S/m; $\epsilon_r = 35.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.536 W/kg; SAR (10g) = 0.204 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.14 dB
SAR (1g) = 0.554 W/kg; SAR (10g) = 0.211 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 62.3 %

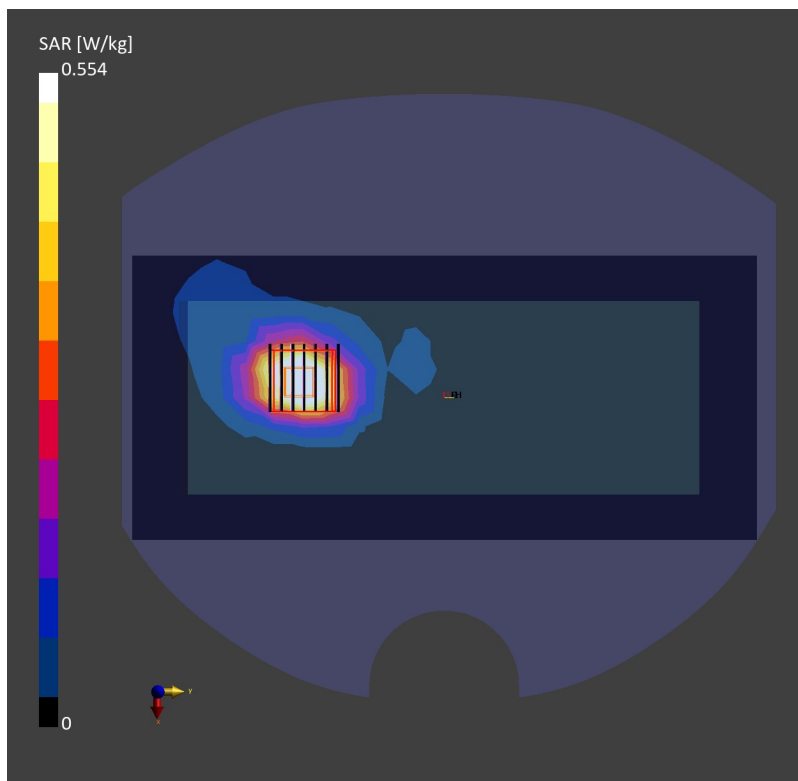

Date: 2026-02-21

30_WLAN5GHz_802.11ac-VHT80 MCS0_Back_0mm_Ch155

Communication System: IEEE 802.11ac; Frequency: 5775.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.537 W/kg; SAR (10g) = 0.206 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 0.544 W/kg; SAR (10g) = 0.206 W/kg
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 60.7 %

