

Product Number: HJ2400-XLJ261001WQ
Product Name: Antenna

Index:


- 1. Specification (规格)
- 2. Characteristics and Reliability Test (产品特性和可靠性测试标准)
- 3. Antenna - S Parameter Test Data (样品测试数据)
- 4. Antenna - Radiation Pattern Test Data (辐射模式测试数据)
- 5. Mechanical and Packing Drawing (图纸包装规范)

Revision History (变更履历)

Revision	Date	Change Notification	Description
1.0	2025.10.11	初版	
1.1	2026-4-13	V1.1	To distinguish, the interface method has been changed to a male inner hole, in compliance with FCC and CE requirements

Product Number: HJ2400-XLJ261001WQ**Product Name: Antenna**

1. Specification

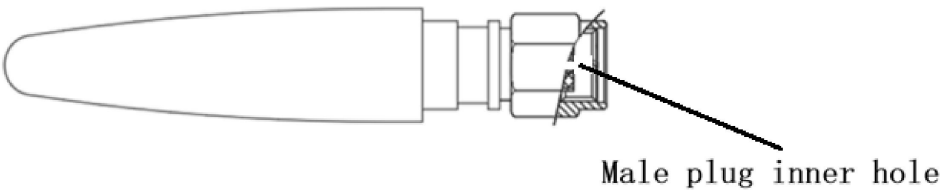Sample Photo	
 Male plug inner hole	
A. Electrical Characteristics	
Frequency 频率	2400-2500 MHz
S.W.R. 驻波比	≤ 2.0
Antenna Gain 增益	3.04dBi
Polarization 极化方式	Linear
Impedance 阻抗	50 Ohm
B. Material & Mechanical Characteristics	
Material of Plastic 塑胶材质	TPE
Connector Type 连接器规格	SMA Plug
C. Environmental	
Storage Temperature 存储温度	- 40 °C ~ +80 °C
Operation Temperature 工作温度	- 40 °C ~ +80 °C
Antenna Color Storage life 天线颜色存储寿命	< 2 year

Product Number: HJ2400-XLJ261001WQ

Product Name: Antenna

2. Characteristics and Reliability Test

Test Items 测试项目		Test Condition and Procedure 测试方法	Requirements 要求	Result 结果
1	V.S.W.R. 电压驻波比	Set DUT on Network Analyzer; make individual calibration to test 设置网络分析仪参数进行测试	Directive DUT specification 符合待测物规范	PASS
2	Antenna Gain 天线增益	Set DUT on Antenna Chamber; make individual calibration to test 设置天线暗室参数进行测试	Directive DUT specification 符合待测物规范	PASS
3	Pull Test 拉力	Holding with individual specification; force applied to axis of terminal .单独定义产品端子拉力	1. Directive DUT specification 2. Frequency Tol. $\leq 5\%$ 符合待测物规范; 频率偏移 $\leq 5\%$	PASS
4	Torque Test 扭力	Holding with individual specification; applied clockwise and counterclockwise to the axis of terminal 单独定义产品端子之顺时针及逆时针扭力	1. Directive DUT specification 2. Frequency Tol. $\leq 5\%$ 符合待测物规范; 频率偏移 $\leq 5\%$	PASS
5	Dimension 尺寸	Inspection of dimension, color, material, package, surface process. 检查尺寸, 颜色, 材料, 包装, 表面处理	Directive DUT specification 符合待测物规范	PASS
6	Salt Spray 盐雾	GB / T 2423.17-2008 Temp: 35°C; RH: $\geq 95\%$; NaCl solution: $\geq 5\%$; Time: 24H 温度 35°C; 湿度 $\geq 95\%$; 盐水浓度 $\geq 5\%$; 测试 24H	1. No Visual Damage 2. Frequency Tol. $\leq 5\%$ 无明显外观不良; 频率偏移 $\leq 5\%$	PASS
7	Temperature and Humidity Chamber 恒温恒湿	GB / T 2423.3-2006 Temp: 80°C / 12 H; -40°C / 12H RH: $\geq 90\%$; Time: 24H 温度 80°C 测试 12H 转 -40°C 测试 12H; 湿度 $\geq 90\%$; 时间 24H	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol. $\leq 5\%$ 恢复 2H 后, 无明显外观不良; 频率偏移 $\leq 5\%$	PASS
8	Aging test 老化	GB / T 2423.2 - 2008 Temp: 80°C; Time: 24 hours 温度 80°C, 测试 24H	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol. $\leq 5\%$ 无明显外观不良; 频率偏移 $\leq 5\%$	PASS
9	RoHS	With Reference to IEC 62321:2008 with flow chart 参考 IEC 62321 测试流程	Directive RoHS 2011/65/EU 符合 RoHS 2015/863/EU 标准	PASS

Product Number: HJ2400-XLJ261001WQ


Product Name: Antenna

3. Antenna - S Parameter Test Data




4. Antenna - Radiation Pattern Test Data


Frequency (MHz)	2400.0	2450.0	2500.0
Efficiency (%)	60.5	68.6	72.40
Gain (dBi)	2.17	2.49	3.04

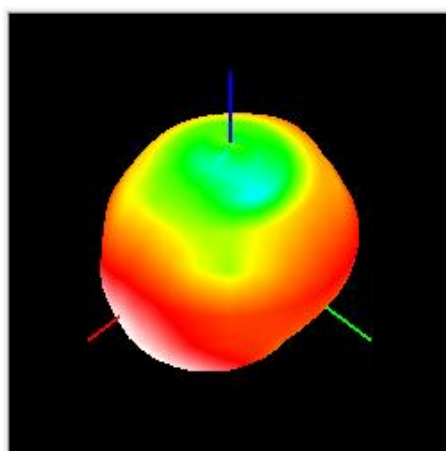

XY_Plane

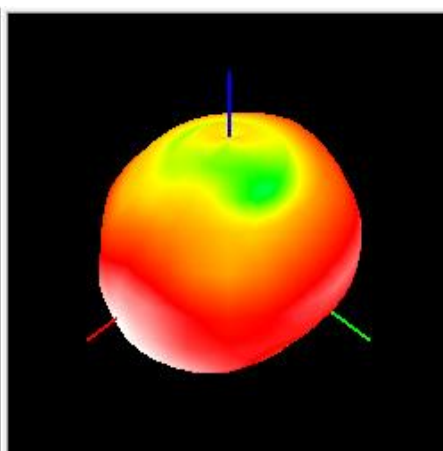

XZ_Plane



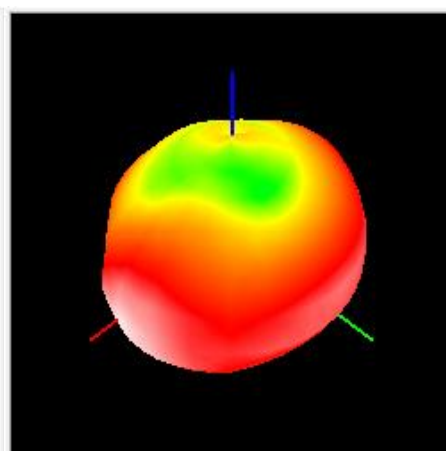


YZ_Plane




Product Number: HJ2400-XLJ261001WQ

Product Name: Antenna




2400MHz

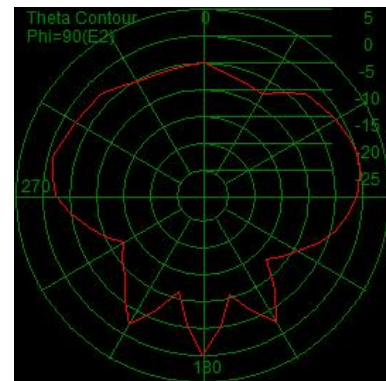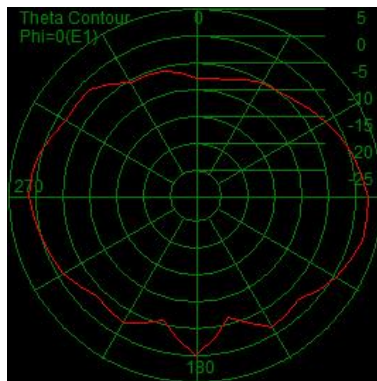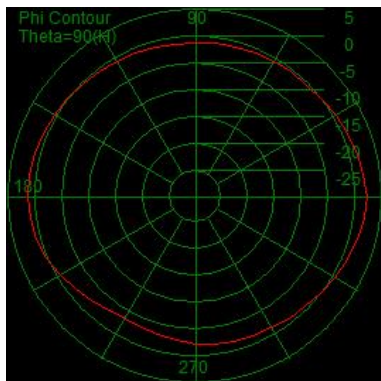

2450MHz

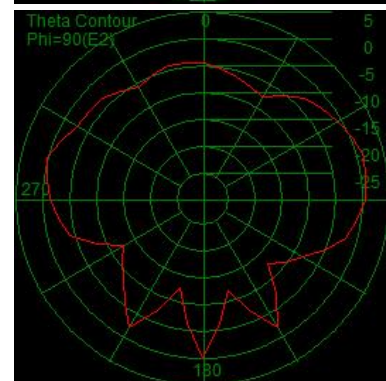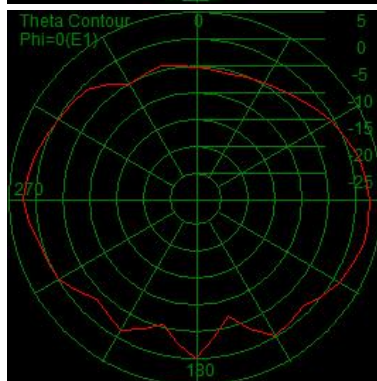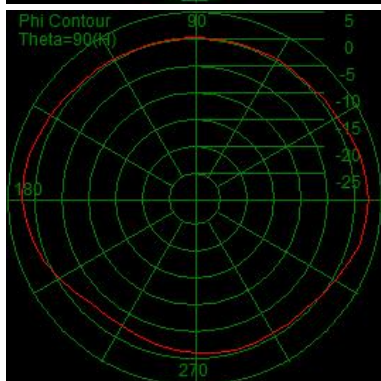

2500MHz

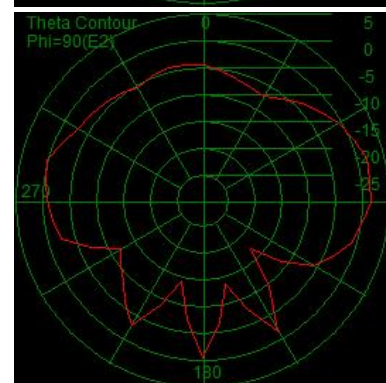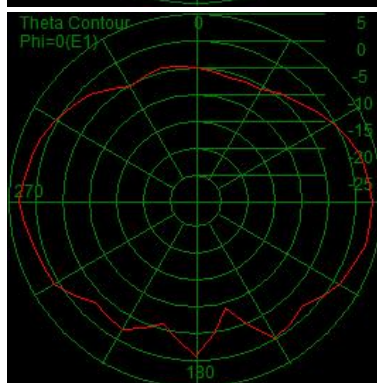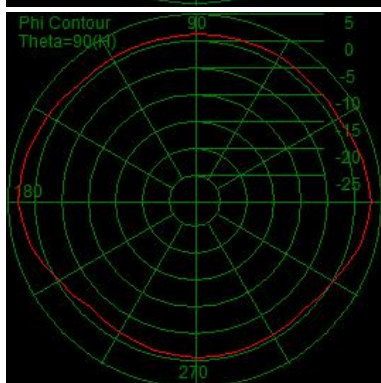

5. Mechanical Drawing See attached files