

TEST REPORT

Applicant: Shenzhen Huafului Technology Co., Ltd.

Address: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Shenzhen, China

Product Name: Smartphone

FCC ID: 2AHZ5ES5

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2020
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

Report Number: 2602R49436E-RF-00D

Report Date: 2026/6/4

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Alice Tan

Rocky Xiao

Reviewed By: Alice Tan

Approved By: Rocky Xiao

Title: RF Engineer

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL ▲	6
1.4 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 OPERATION FREQUENCY DETAIL	8
3.2 EUT OPERATION CONDITION	9
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	10
3.4 SUPPORT CABLE LIST AND DETAILS	10
3.5 BLOCK DIAGRAM OF TEST SETUP	11
3.6 TEST FACILITY	12
3.7 MEASUREMENT UNCERTAINTY	12
4. REQUIREMENTS AND TEST PROCEDURES	13
4.1 AC LINE CONDUCTED EMISSIONS	13
4.1.1 Applicable Standard	13
4.1.2 EUT Setup	14
4.1.3 EMI Test Receiver Setup	14
4.1.4 Test Procedure	15
4.1.5 Corrected Amplitude & Margin Calculation	15
4.1.6 Test Result	15
4.2 RADIATION SPURIOUS EMISSIONS	16
4.2.1 Applicable Standard	16
4.2.2 EUT Setup	17
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	19
4.2.4 Test Procedure	19
4.2.5 Corrected Result & Margin Calculation	20
4.2.6 Test Result	20
4.3 EMISSION BANDWIDTH	21
4.3.1 Applicable Standard	21
4.3.2 EUT Setup	21
4.3.3 Test Procedure	21
4.3.4 Test Result	22
4.4 MAXIMUM CONDUCTED OUTPUT POWER	23
4.4.1 Applicable Standard	23
4.4.2 EUT Setup	23
4.4.3 Test Procedure	23
4.4.4 Test Result	24
4.5 MAXIMUM POWER SPECTRAL DENSITY	25
4.5.1 Applicable Standard	25
4.5.2 EUT Setup	25

4.5.3 Test Procedure	26
4.5.4 Test Result	26
4.6 DUTY CYCLE	27
4.6.1 EUT Setup	27
4.6.2 Test Procedure	27
4.6.3 Judgment	27
4.7 ANTENNA REQUIREMENT	28
4.7.1 Applicable Standard	28
4.7.2 Judgment	28
5. Test DATA AND RESULTS	29
5.1 AC LINE CONDUCTED EMISSIONS	29
5.2 RADIATION SPURIOUS EMISSIONS	32
5.3 EMISSION BANDWIDTH	96
5.4 99% OCCUPIED BANDWIDTH	104
5.5 MAXIMUM CONDUCTED OUTPUT POWER	112
5.6 POWER SPECTRAL DENSITY	114
5.7 DUTY CYCLE	122
EXHIBIT A - EUT PHOTOGRAPHS	124
EXHIBIT B - TEST SETUP PHOTOGRAPHS	125

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2602R49436E-RF-00D	Original Report	2026/6/4

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smartphone
EUT Model:	KINGKONG ES 5
Multiple Model(s):	KINGKONG ES 7, KINGKONG ACE 7, KINGKONG 12, KINGKONG 13, X200
Operation Frequency:	5150-5250MHz: 5180-5240 MHz(802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5250-5350MHz: 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5470-5725MHz: 5500-5700 MHz (802.11a/n ht20/ac vht20) 5510-5670 MHz(802.11n ht40/ac vht40) 5725-5850MHz: 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40)
Maximum Average Conducted Output Power:	14.52dBm(5150-5250MHz)
	14.61dBm(5250-5350MHz)
	12.22dBm(5470-5725MHz)
	8.04dBm(5725-5850MHz)
Modulation Type:	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
Rated Input Voltage:	3.91Vdc from battery; 5V 3A or 9V 3A or 12V 2.5A or 15V 2A or 20V 1.5A or PPS: 3.3-16V 2A, 3.3-11V 3A
Serial Number:	CE: 3IUC-9 For RF Radiated Test: 3IUC-9 For RF Conducted Test: 3IUC-1
EUT Received Date:	2026/3/24
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model. The difference is only the model name. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	SHENZHEN TIANYIN ELECTRONICS CO., LTD.	TD-203G200170UF01	Input: AC 100~240V,50/60Hz, 0.6A Output: 5V 3A or 9V 3A or 12V 2.5A or 15V 2A or 20V 1.5A 33W MAX PPS: 3.3-16V 2A, 3.3-11V 3A

1.3 Antenna Information Detail ▲

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	5.15~5.25 GHz	-2.7dBi
		5.25~5.35 GHz	-2.7dBi
		5.47~5.725 GHz	0.3dBi
		5.725~5.85 GHz	0.6dBi
The design of compliance with §15.203: ☒ Unit uses a permanently attached antenna. ☐ Unit uses a unique coupling to the intentional radiator. ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modification was made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
Note 1: For AC line conducted emissions, the maximum output power channel was tested.		
Note 2: For Radiated Spurious Emissions 9kHz~1GHz and 18~40GHz, the maximum output power channel was tested.		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/

For 802.11n ht40/ac vht40:

5150-5250MHz		5250-5350 MHz		5470-5725 MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/

3.2 EUT Operation Condition

The EUT was configured for testing in Engineering Mode, which was provided by the manufacturer.
The EUT configuration is below:

EUT Exercise Software:		Engineering mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	18
	Middle	5200	6Mbps	18
	Highest	5240	6Mbps	18
802.11ac vht20	Lowest	5180	MCS0	17
	Middle	5200	MCS0	17
	Highest	5240	MCS0	17
802.11ac vht40	Lowest	5190	MCS0	16
	Highest	5230	MCS0	16
5250-5350 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5260	6Mbps	16
	Middle	5280	6Mbps	16
	Highest	5320	6Mbps	16
802.11ac vht20	Lowest	5260	MCS0	15
	Middle	5280	MCS0	15
	Highest	5320	MCS0	15
802.11ac vht40	Lowest	5270	MCS0	14
	Highest	5310	MCS0	14
5470-5725 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5500	6Mbps	13
	Middle	5600	6Mbps	13
	Highest	5700	6Mbps	13
802.11ac vht20	Lowest	5500	MCS0	12
	Middle	5600	MCS0	12
	Highest	5700	MCS0	12
802.11ac vht40	Lowest	5510	MCS0	11
	Middle	5590	MCS0	11
	Highest	5670	MCS0	11

5725-5850 MHz Band:

Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	14
	Middle	5785	6Mbps	14
	Highest	5825	6Mbps	14
802.11ac vht20	Lowest	5745	MCS0	14
	Middle	5785	MCS0	14
	Highest	5825	MCS0	14
802.11ac vht40	Lowest	5755	MCS0	13
	Highest	5795	MCS0	13

Note:

- 1.The system support 802.11a/n ht20/n ht40/ac vht20/ ac vht40, the 802.11n ht20/n ht40 were reduced since the identical parameters with 802.11ac vht20 and ac vht40.
- 2.The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SanDisk	Micro TF Card	UHS-I-16G	9292DVDSV0XZ
Unknown	SIM Card	Unknown	Unknown

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1	Adapter	EUT


3.5 Block Diagram of Test Setup

AC line conducted emissions:

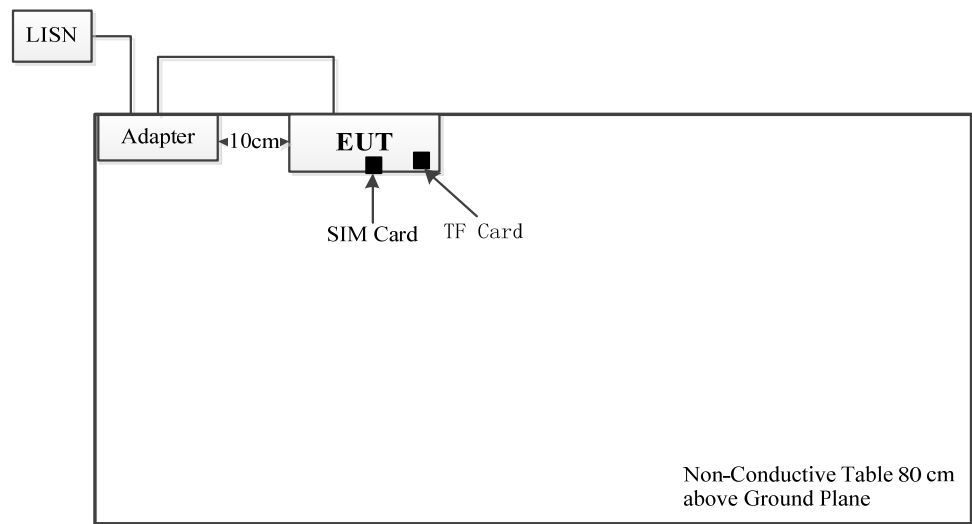


Spurious Emissions:

Below 1GHz:

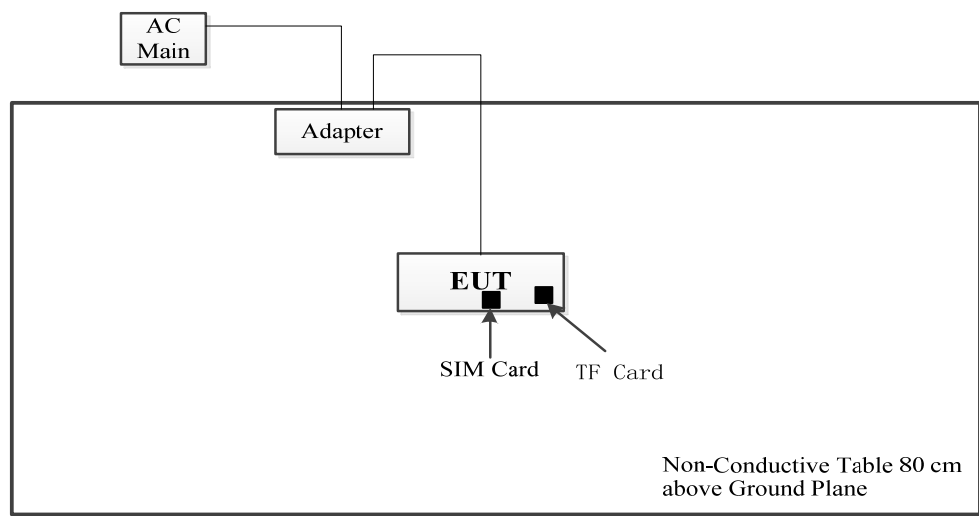

Above 1GHz:

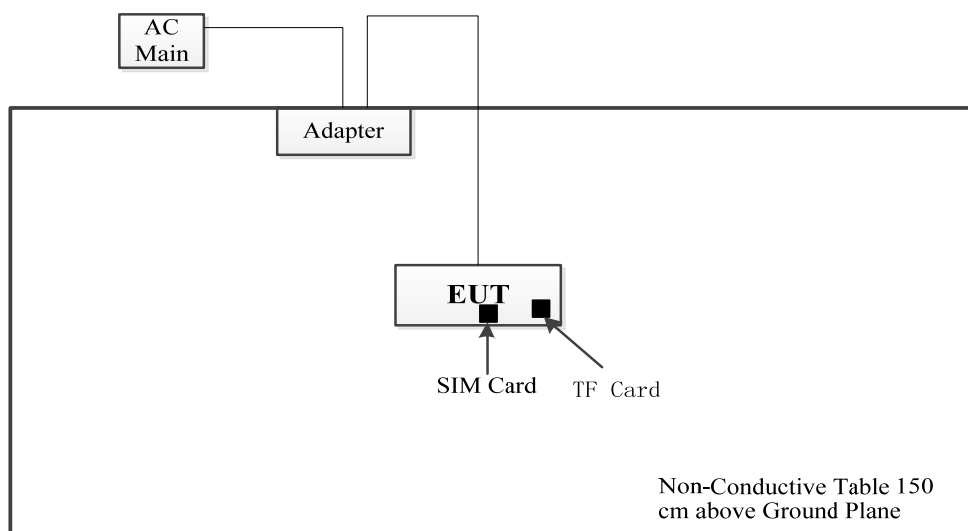

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.55 dB
Power Spectral Density, conducted	±0.55 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.06dB, 30MHz~1GHz: 6.13 dB, 1GHz~6GHz: 4.79 dB, 6GHz~18GHz: 4.63 dB, 18GHz~26.5GHz: 4.79 dB, 26.5GHz~40GHz: 4.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.83 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

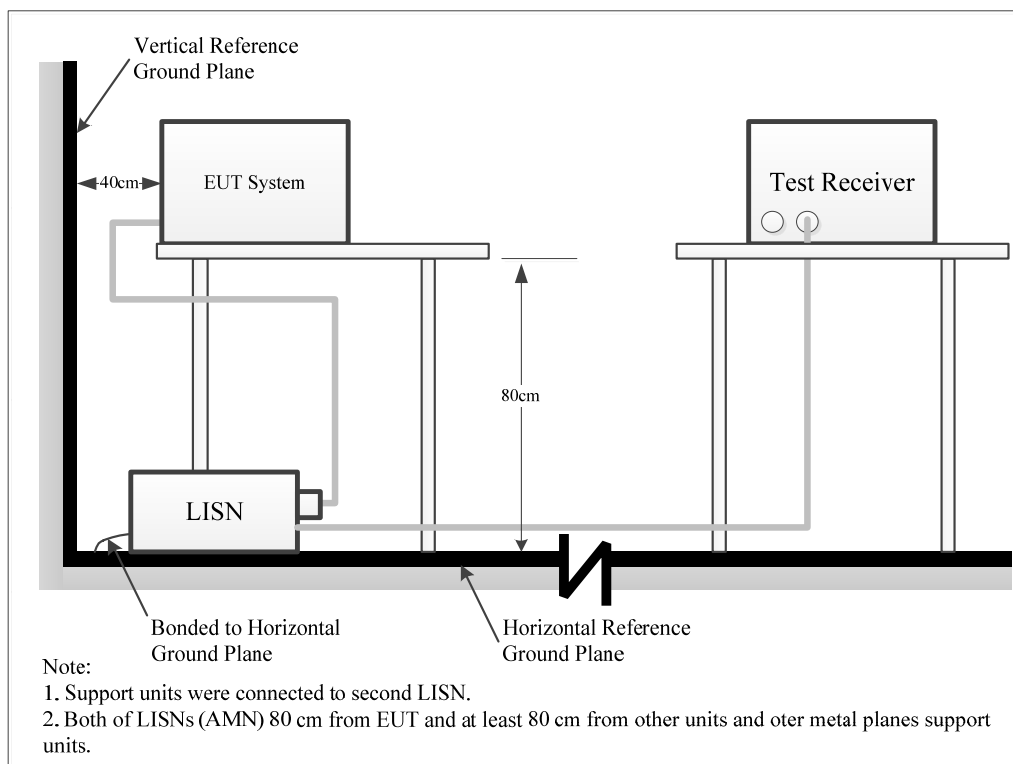

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.


(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.



4.2.2 EUT Setup

9kHz~30MHz:

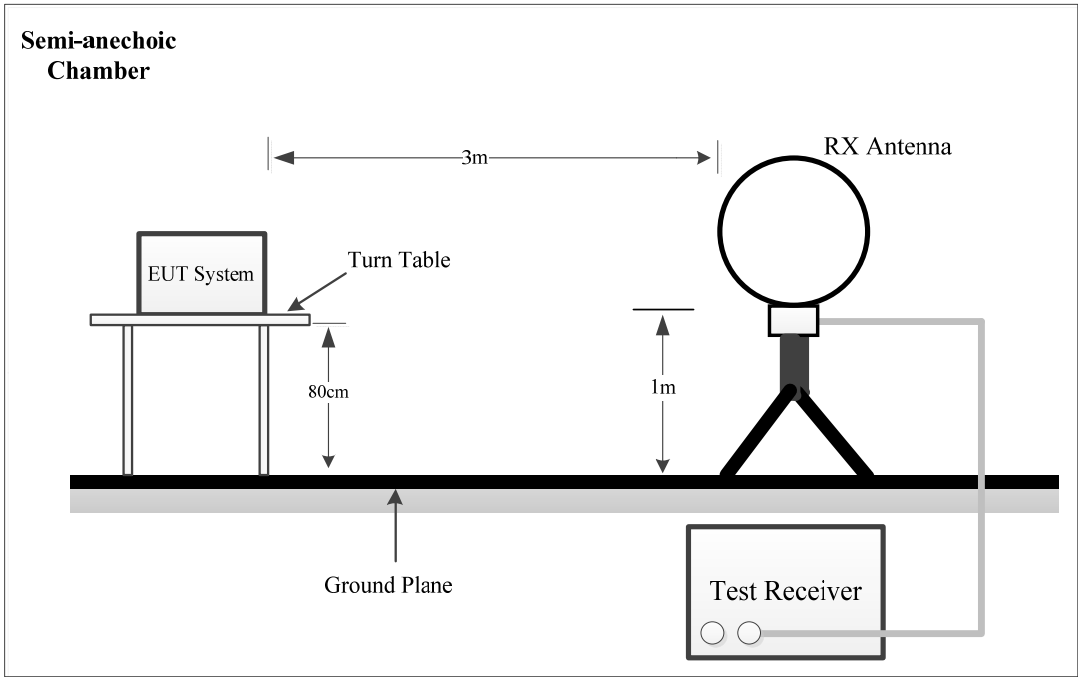

30MHz~1GHz:

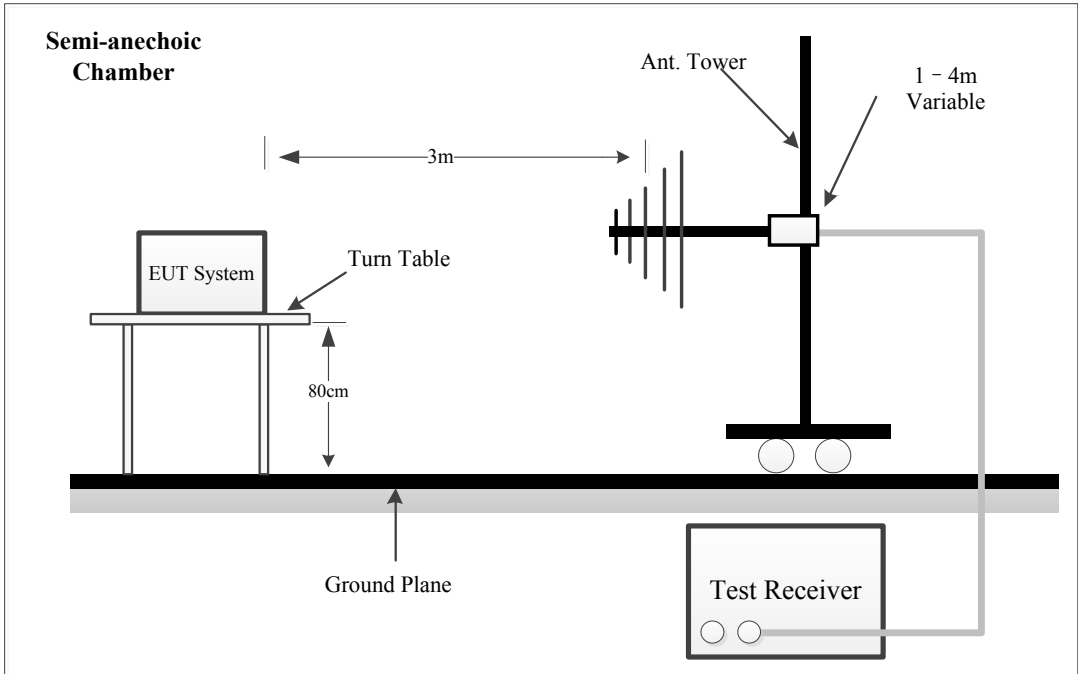

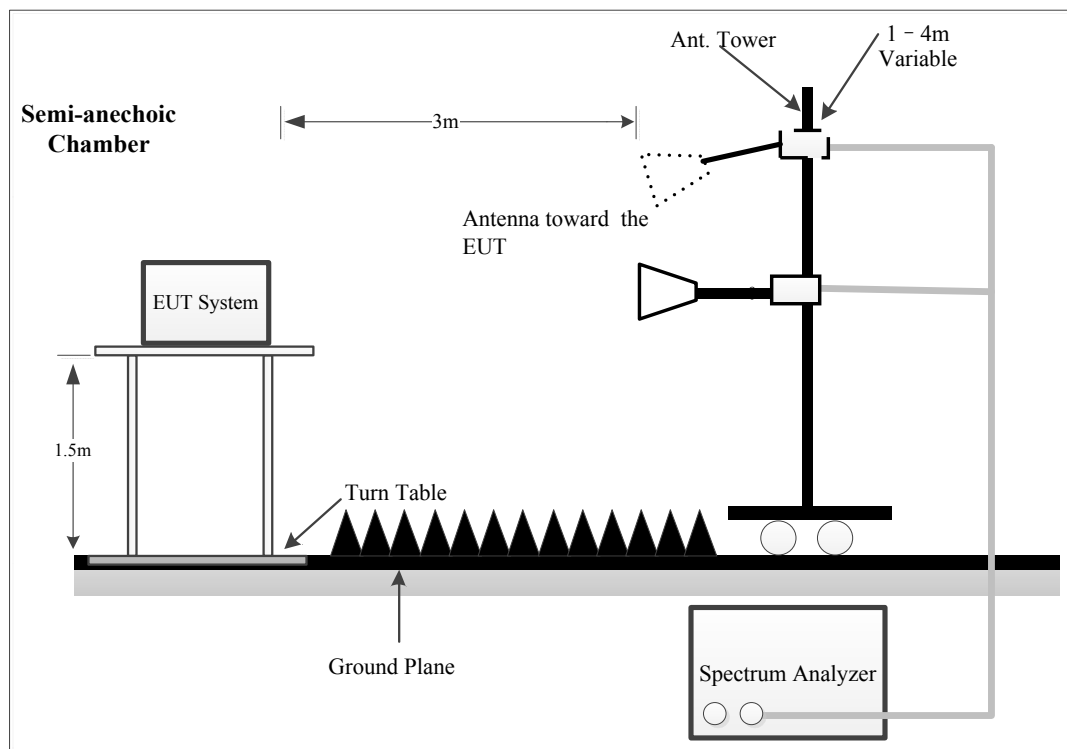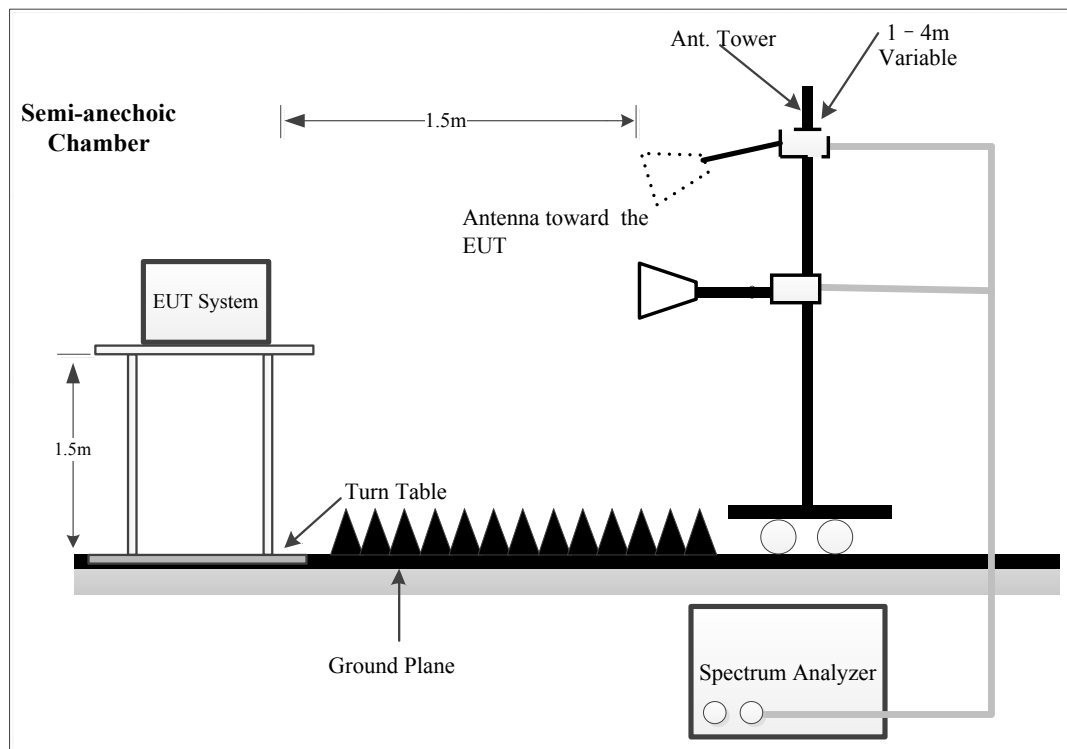1-26.5GHz:**26.5-40GHz:**

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2020. The specification used was FCC 15.209, FCC 15.407 limits.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	120 kHz	500 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	$\geq 1/T$	PK

Note: T is minimum transmission duration

4.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

For Radiated 18-40GHz test, which was performed at 1 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1m])$ dB= 9.54 dB

4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

E_{Linear} is the field strength of the emission, in $\mu\text{V/m}$

E_{Log} is the field strength of the emission, in $\text{dB } \mu\text{V/m}$

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10} (d_{\text{standard}}/d_{\text{measure}})$$

The basic equation except 18-25GHz test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 18-40GHz test:

Factor = Antenna Factor + Cable Loss- Distance extrapolation Factor

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

For the spurious emission below 30MHz, the limit was convert from $\text{dB}\mu\text{A/m}$ to $\text{dB}\mu\text{V/m}$ by adding 51.5 dB.

4.2.6 Test Result

Please refer to section 5.2.

4.3 Emission Bandwidth

4.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

4.3.2 EUT Setup

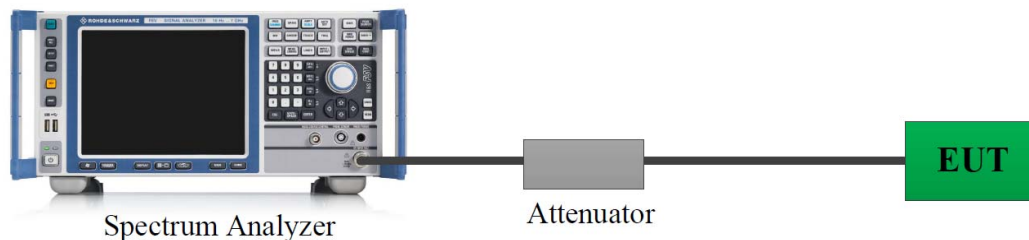

4.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2020 Section 12.5.2

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) ≥ 3 RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2020 Section 12.5.3&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.3.4 Test Result

Please refer to section 5.3 and section 5.4.

4.4 Maximum Conducted Output Power

4.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.4.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.4.3 Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control

level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.4.4 Test Result

Please refer to section 5.5.

4.5 Maximum Power Spectral Density

4.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.5.2 EUT Setup

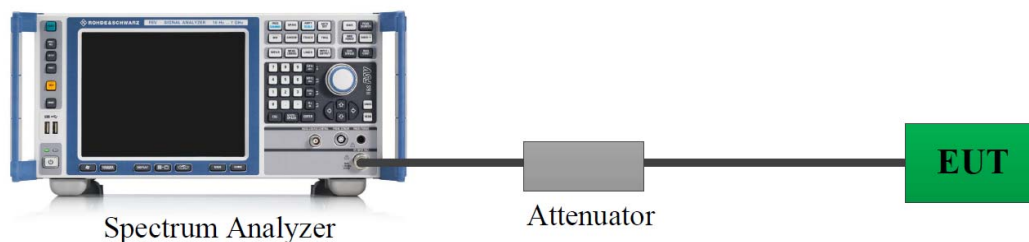

A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

4.5.4 Test Result

Please refer to section 5.6.

4.6 Duty Cycle

4.6.1 EUT Setup

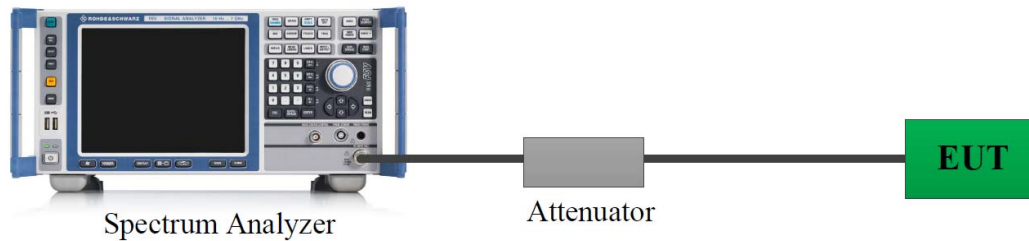

4.6.2 Test Procedure

According to ANSI C63.10-2020 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.6.3 Judgment

Report Only. Please refer to section 5.7.

4.7 Antenna Requirement

4.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.7.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	3IUC-9	Test Date:	2026/04/07
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yolo Fan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.8	Relative Humidity: (%)	69	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2025/6/25	2026/6/24
Unknown	Coaxial Cable	RG 142	C-0200-05	2025/5/6	2026/5/5
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	EMI Test Receiver	ESCI	100224	2025/6/25	2026/6/24

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Note: 802.11a 5320MHz was tested.

Project No.: 2602R49436E-RF
 Port: Line
 Test Mode: Transmitting
 IF B/W 9kHz PK/AV

Serial No.: 3IUC-9
 Tester: Yolo Fan
 Note: Part 15.407_5G WIFI


Date: 2026-04-07

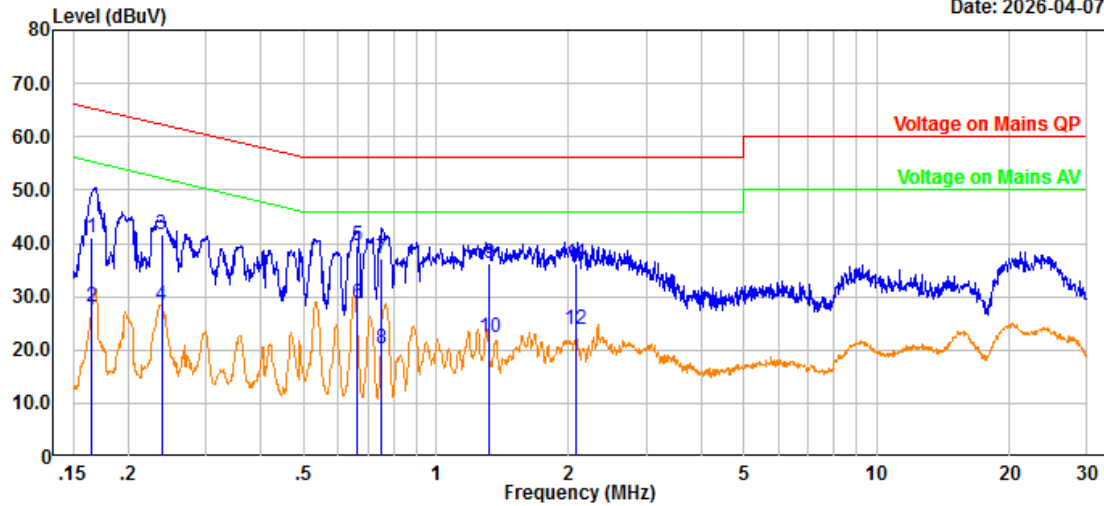

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.165	30.13	11.08	41.21	65.21	24.00	QP
2	0.165	16.93	11.08	28.01	55.21	27.20	Average
3	0.238	30.74	10.77	41.51	62.16	20.65	QP
4	0.238	17.46	10.77	28.23	52.16	23.93	Average
5	0.661	29.15	10.45	39.60	56.00	16.40	QP
6	0.661	18.17	10.45	28.62	46.00	17.38	Average
7	0.750	26.56	10.48	37.04	56.00	18.96	QP
8	0.750	9.64	10.48	20.12	46.00	25.88	Average
9	1.319	25.18	10.97	36.15	56.00	19.85	QP
10	1.319	11.28	10.97	22.25	46.00	23.75	Average
11	2.070	24.96	11.29	36.25	56.00	19.75	QP
12	2.070	12.65	11.29	23.94	46.00	22.06	Average

Project No.: 2602R49436E-RF
 Port: neutral
 Test Mode: Transmitting
 IF B/W 9kHz PK/AV

Serial No.: 3IUC-9
 Tester: Yolo Fan
 Note: Part 15.407_5G WIFI

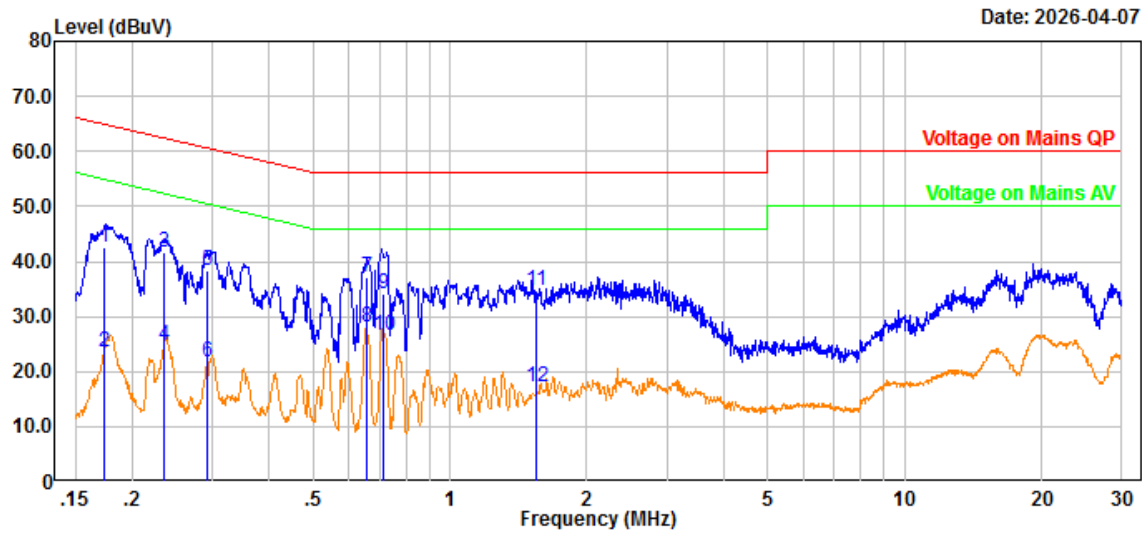

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.174	31.92	10.80	42.72	64.77	22.05	QP
2	0.174	12.84	10.80	23.64	54.77	31.13	Average
3	0.234	30.73	10.85	41.58	62.29	20.71	QP
4	0.234	13.92	10.85	24.77	52.29	27.52	Average
5	0.293	27.57	10.78	38.35	60.43	22.08	QP
6	0.293	11.04	10.78	21.82	50.43	28.61	Average
7	0.657	26.74	10.43	37.17	56.00	18.83	QP
8	0.657	17.59	10.43	28.02	46.00	17.98	Average
9	0.712	23.80	10.43	34.23	56.00	21.77	QP
10	0.712	16.24	10.43	26.67	46.00	19.33	Average
11	1.544	23.51	11.07	34.58	56.00	21.42	QP
12	1.544	6.07	11.07	17.14	46.00	28.86	Average

5.2 Radiation Spurious Emissions

1) 9kHz - 1GHz

Serial Number:	3IUC-9	Test Date:	2026/4/4
Test Site:	Chamber 10m	Test Mode:	Transmitting
Tester:	Jayce Wang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.2	Relative Humidity: (%)	50	ATM Pressure: (kPa)	100.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2025/6/23	2028/6/22
Narda	Coaxial Attenuator	779-6dB	04269	2025/6/23	2028/6/22
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2025/7/1	2026/6/30
Sonoma	Amplifier	310N	185914	2025/8/25	2026/8/24
R&S	EMI Test Receiver	ESR3	102453	2025/6/25	2026/6/24
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.
After pre-scan in the X, Y and Z axes of orientation, the worst case is Y axes, as following tables and plots.


Note: 802.11a 5240/802.11a 5320/802.11ac20 5500/ 802.11a 5745 was tested.

9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5150-5250
: RBW:200Hz,VBW:1kHz


Serial No.: 3IUC-9
Tester: Jayce Wang

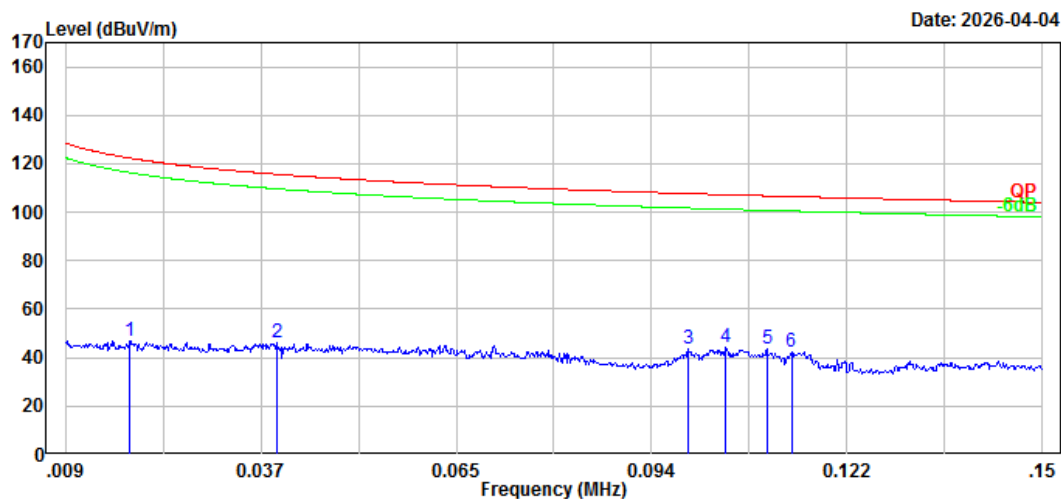

No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	0.018	-3.64	50.51	46.87	122.35	75.48	Peak
2	0.039	0.15	45.86	46.01	115.68	69.67	Peak
3	0.099	7.89	35.58	43.47	107.70	64.23	Peak
4	0.104	9.14	35.16	44.30	107.24	62.94	Peak
5	0.110	8.62	34.83	43.45	106.76	63.31	Peak
6	0.114	7.96	34.65	42.61	106.48	63.87	Peak

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5150-5250
: RBW:9kHz,VBW:30kHz


Serial No.: 3IUC-9
Tester: Jayce Wang

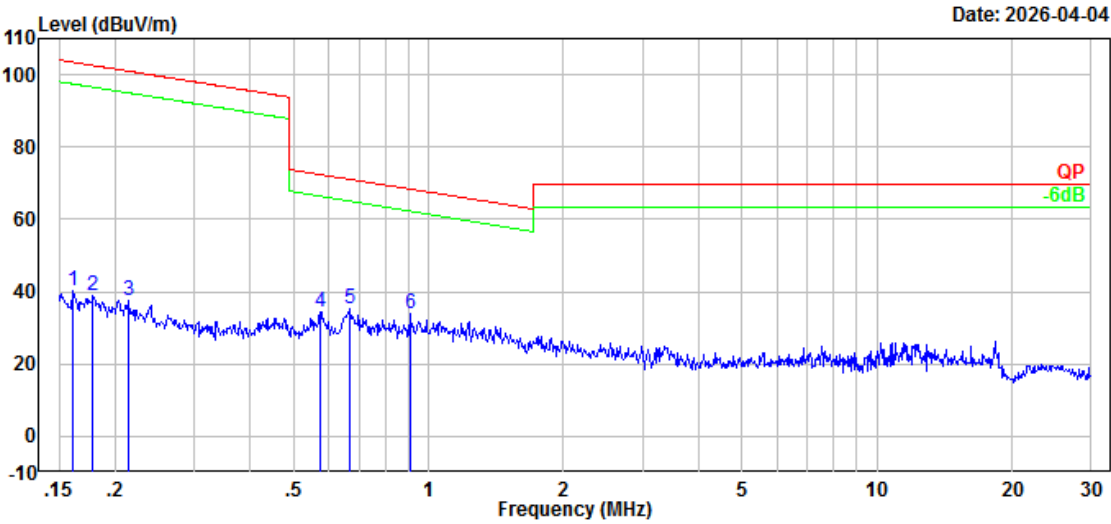

No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	0.162	8.11	32.00	40.11	103.44	63.33	Peak
2	0.179	7.66	31.06	38.72	102.56	63.84	Peak
3	0.214	8.47	29.09	37.56	101.00	63.44	Peak
4	0.573	11.71	22.75	34.46	72.41	37.95	Peak
5	0.665	13.31	21.82	35.13	71.09	35.96	Peak
6	0.909	15.47	18.39	33.86	68.32	34.46	Peak

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5250-5350
: RBW:200Hz,VBW:1kHz


Serial No.: 3IUC-9
Tester: Jayce Wang

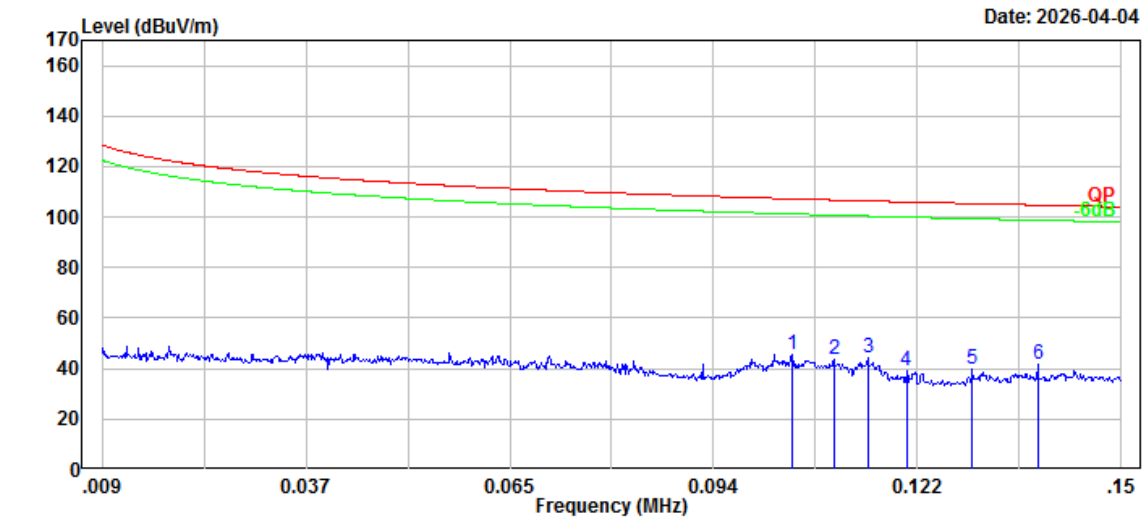

No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	0.104	10.62	35.16	45.78	107.23	61.45	Peak
2	0.110	8.62	34.83	43.45	106.76	63.31	Peak
3	0.115	9.91	34.58	44.49	106.40	61.91	Peak
4	0.120	4.54	34.29	38.83	106.00	67.17	Peak
5	0.129	5.88	33.77	39.65	105.36	65.71	Peak
6	0.138	8.59	33.28	41.87	104.78	62.91	Peak

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5250-5350
: RBW:9kHz,VBW:30kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

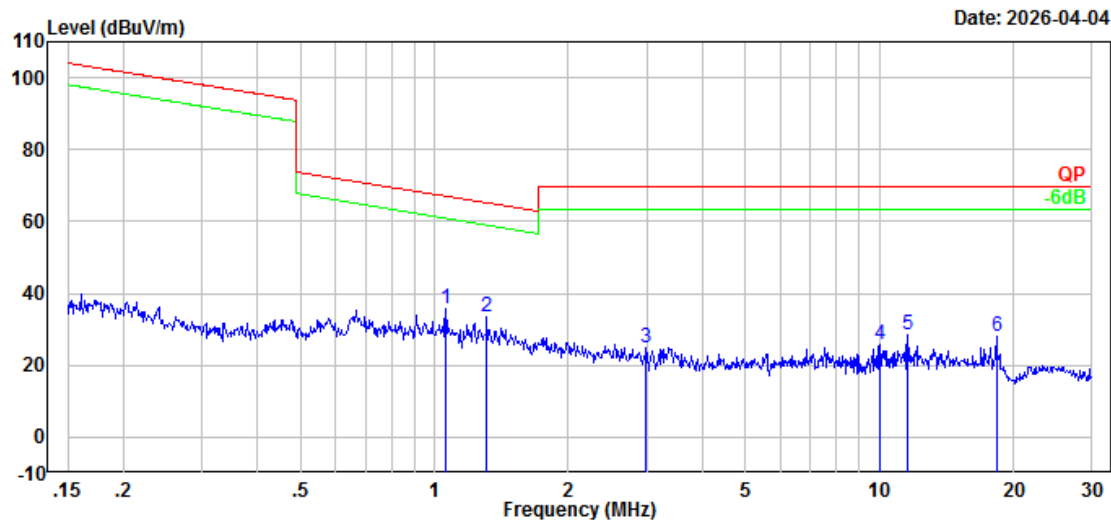


No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	

1	1.060	19.57	16.29	35.86	66.96	31.10	Peak
2	1.310	18.17	15.19	33.36	65.08	31.72	Peak
3	2.993	15.19	9.86	25.05	69.54	44.49	Peak
4	10.019	20.89	4.80	25.69	69.54	43.85	Peak
5	11.559	23.54	4.76	28.30	69.54	41.24	Peak
6	18.328	23.90	4.28	28.18	69.54	41.36	Peak

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
: RBW:200Hz,VBW:1kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

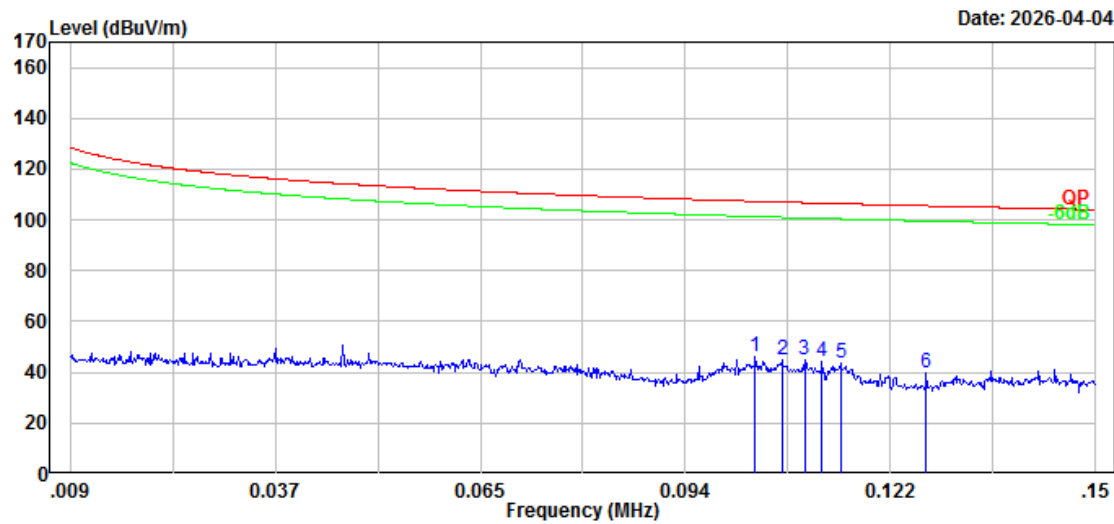


No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	

1	0.103	10.70	35.22	45.92	107.33	61.41	Peak
2	0.107	10.12	35.02	45.14	107.03	61.89	Peak
3	0.110	9.96	34.84	44.80	106.78	61.98	Peak
4	0.112	9.62	34.72	44.34	106.59	62.25	Peak
5	0.115	8.91	34.58	43.49	106.40	62.91	Peak
6	0.127	5.92	33.93	39.85	105.55	65.70	Peak

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
: RBW:9kHz,VBW:30kHz


Serial No.: 3IUC-9
Tester: Jayce Wang

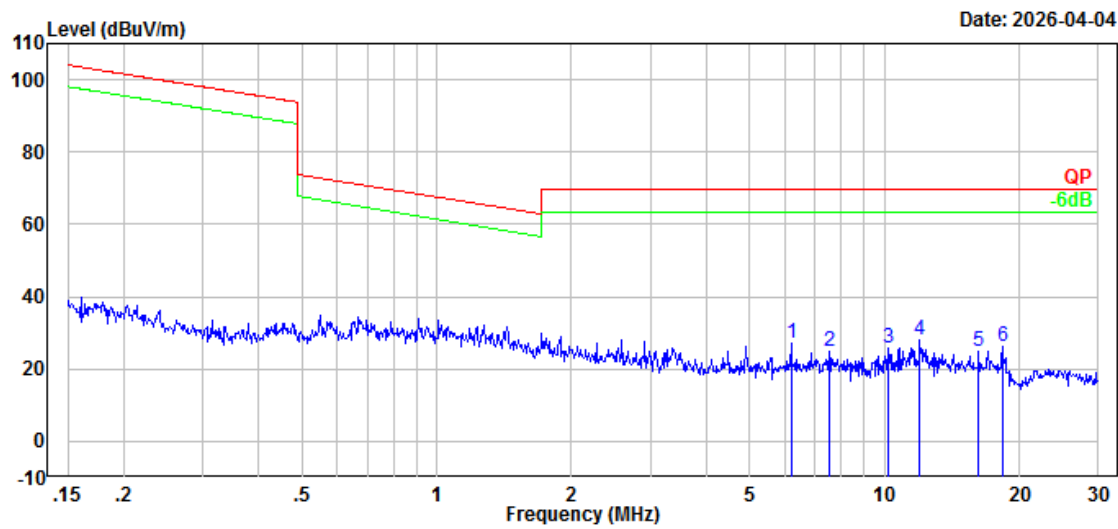

No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	6.186	21.12	5.81	26.93	69.54	42.61	Peak
2	7.526	19.58	5.27	24.85	69.54	44.69	Peak
3	10.179	21.16	4.80	25.96	69.54	43.58	Peak
4	11.996	23.17	4.73	27.90	69.54	41.64	Peak
5	16.226	20.32	4.45	24.77	69.54	44.77	Peak
6	18.328	21.90	4.28	26.18	69.54	43.36	Peak

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5725-5850
: RBW:200Hz,VBW:1kHz


Serial No.: 3IUC-9
Tester: Jayce Wang

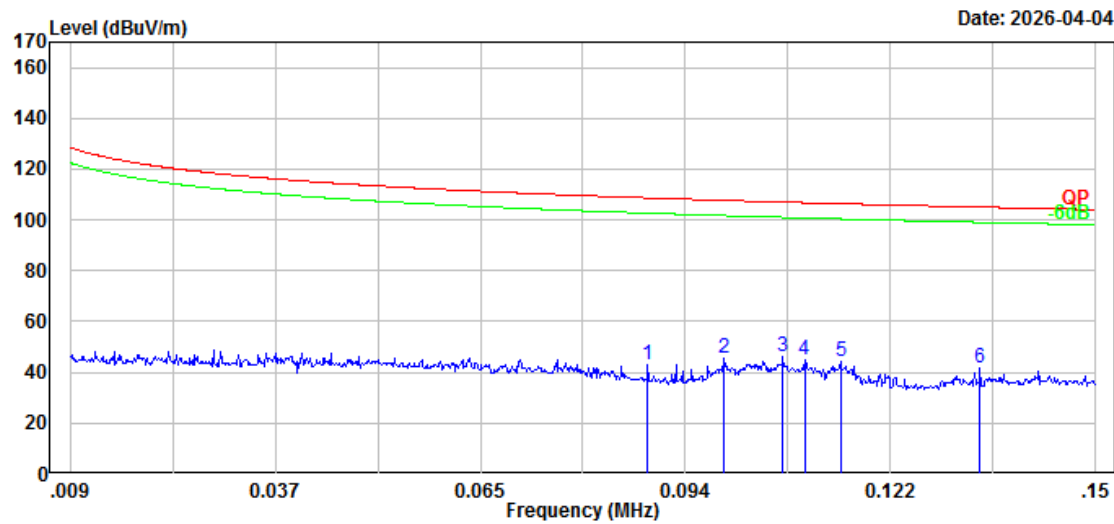

No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	0.088	5.34	37.42	42.76	108.68	65.92	Peak
2	0.099	9.89	35.58	45.47	107.70	62.23	Peak
3	0.107	11.17	35.01	46.18	107.02	60.84	Peak
4	0.110	9.96	34.84	44.80	106.78	61.98	Peak
5	0.115	9.91	34.58	44.49	106.40	61.91	Peak
6	0.134	8.14	33.52	41.66	105.06	63.40	Peak

Project No.: 2602R49436E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5725-5850
: RBW:9kHz,VBW:30kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

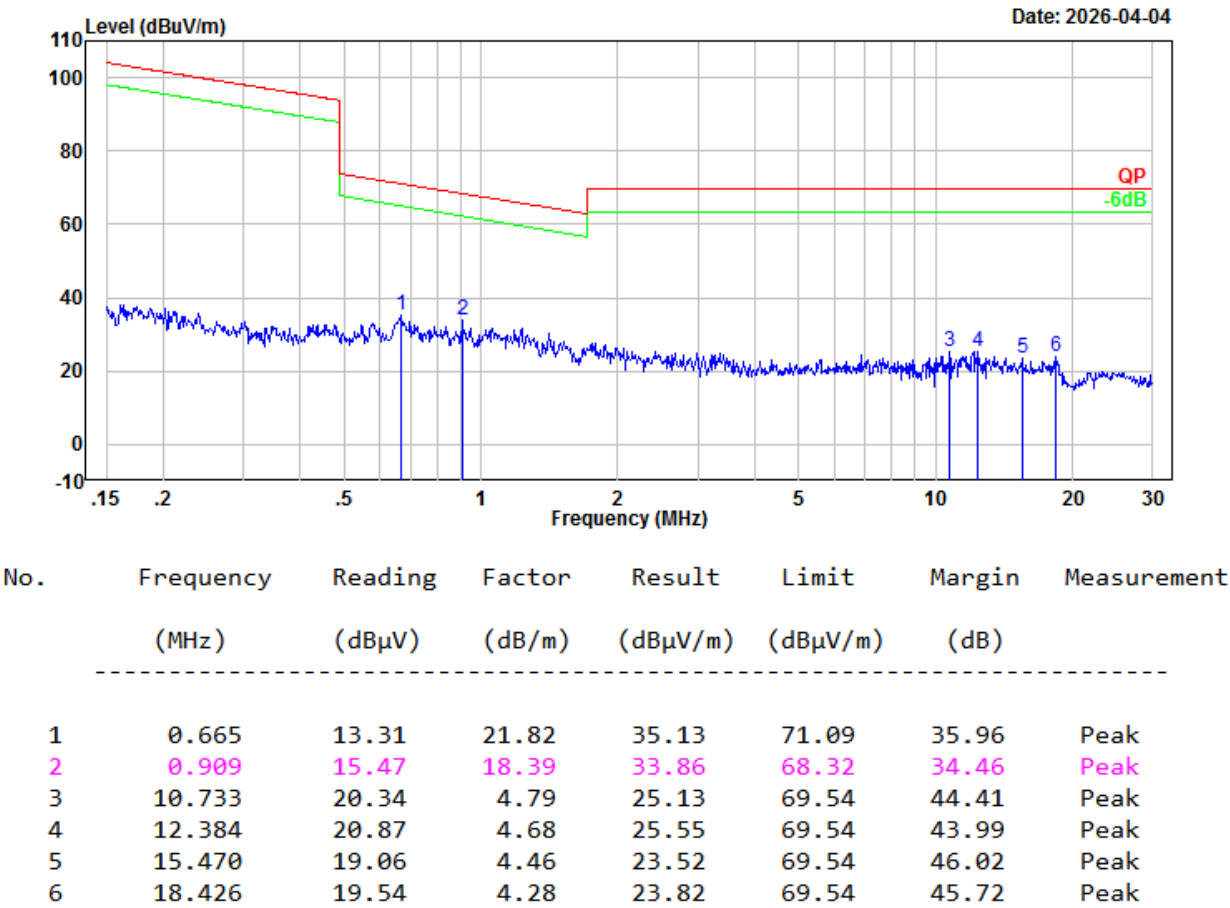

30MHz-1GHz

Project No.: 2602R49436E-RF

Serial No.: 3IUC-9


Polarization: Horizontal

Tester: Jayce Wang

Test Mode: Transmitting


Note: 5G WIFI 5150-5250

: RBW:120kHz,VBW:500kHz

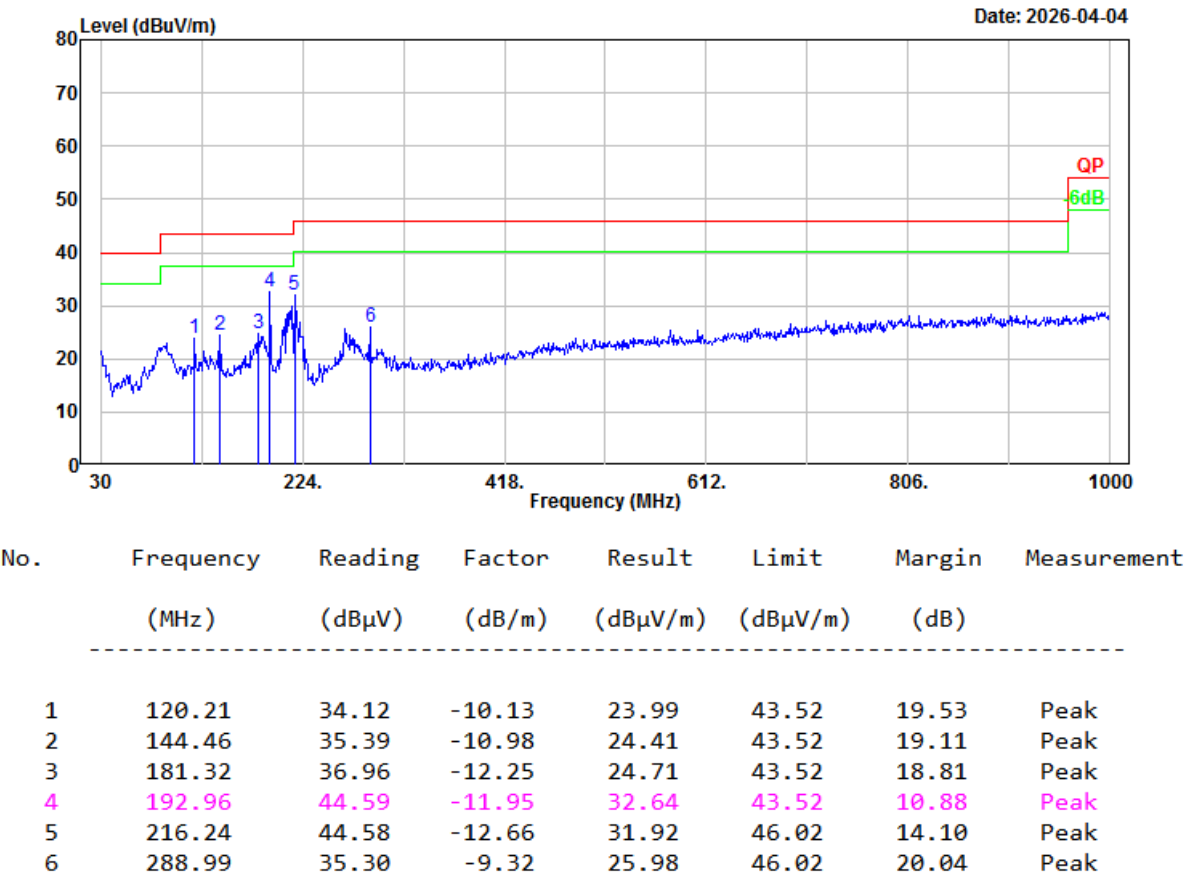

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5150-5250
: RBW:120kHz,VBW:500kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

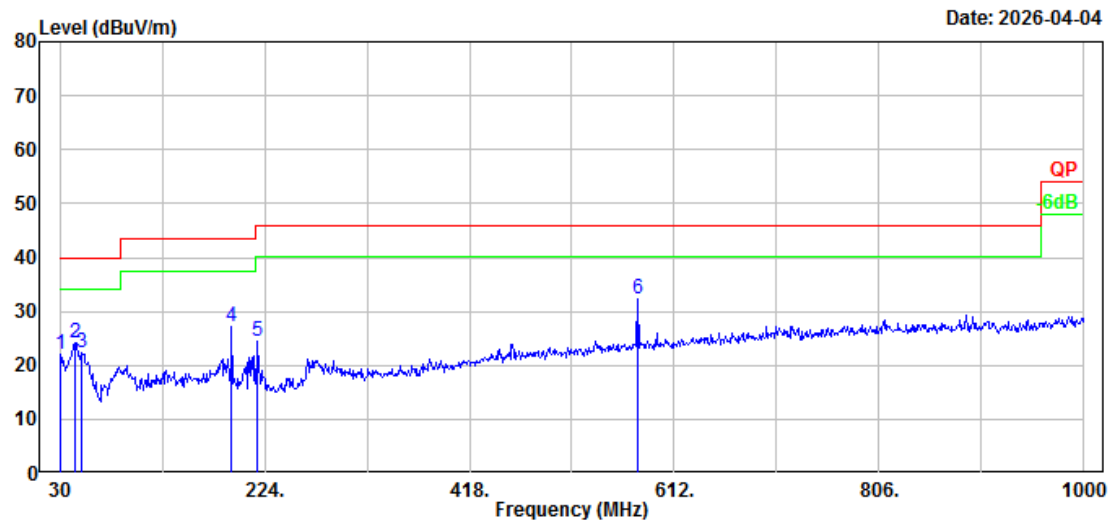


No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	

1	30.00	26.22	-4.10	22.12	40.00	17.88	Peak
2	44.55	37.57	-13.41	24.16	40.00	15.84	Peak
3	51.34	38.81	-16.45	22.36	40.00	17.64	Peak
4	192.96	39.02	-11.95	27.07	43.52	16.45	Peak
5	217.21	37.07	-12.65	24.42	46.02	21.60	Peak
6	577.08	35.85	-3.40	32.45	46.02	13.57	Peak

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 5G WIFI 5250-5350
: RBW:120kHz,VBW:500kHz


Serial No.: 3IUC-9
Tester: Jayce Wang

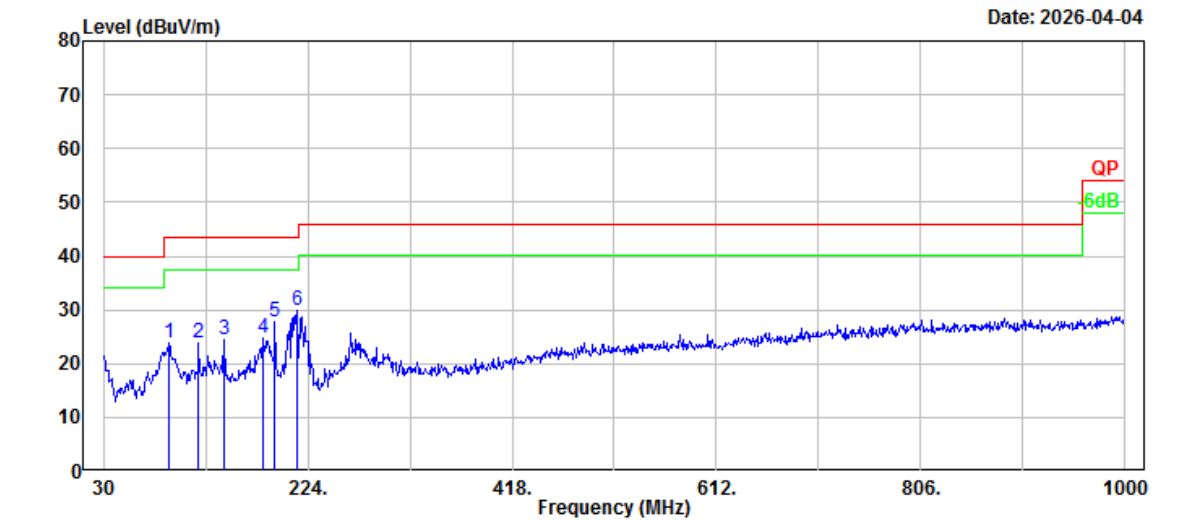

No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	92.08	39.82	-15.85	23.97	43.52	19.55	Peak
2	120.21	34.12	-10.13	23.99	43.52	19.53	Peak
3	144.46	35.39	-10.98	24.41	43.52	19.11	Peak
4	181.32	36.96	-12.25	24.71	43.52	18.81	Peak
5	192.96	39.59	-11.95	27.64	43.52	15.88	Peak
6	214.30	42.63	-12.70	29.93	43.52	13.59	Peak

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5250-5350
: RBW:120kHz,VBW:500kHz


Serial No.: 3IUC-9
Tester: Jayce Wang

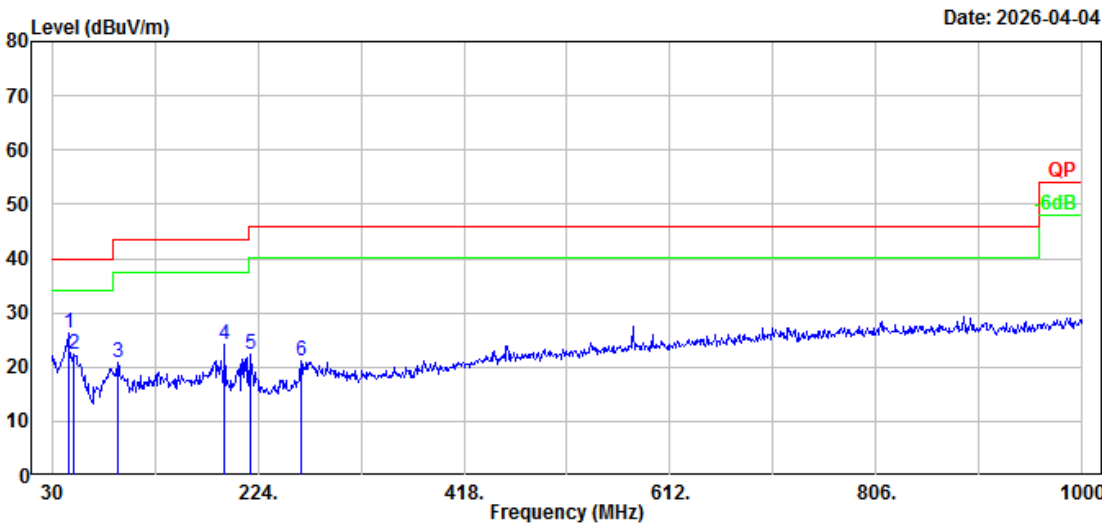

No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	45.52	40.07	-13.94	26.13	40.00	13.87	Peak
2	51.34	38.81	-16.45	22.36	40.00	17.64	Peak
3	92.08	36.80	-15.85	20.95	43.52	22.57	Peak
4	192.96	36.02	-11.95	24.07	43.52	19.45	Peak
5	217.21	35.07	-12.65	22.42	46.02	23.60	Peak
6	264.74	31.74	-10.69	21.05	46.02	24.97	Peak


Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
: RBW:120kHz,VBW:500kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

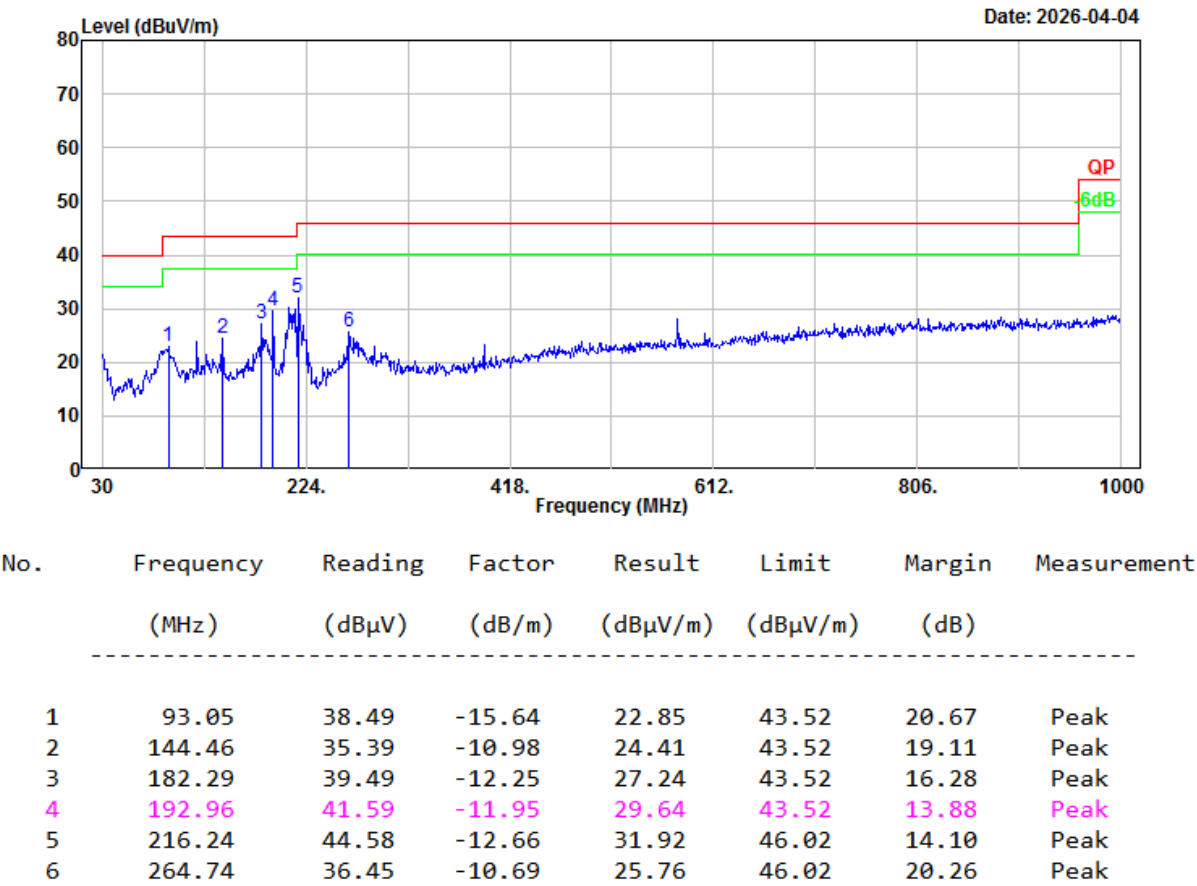

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
: RBW:120kHz,VBW:500kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

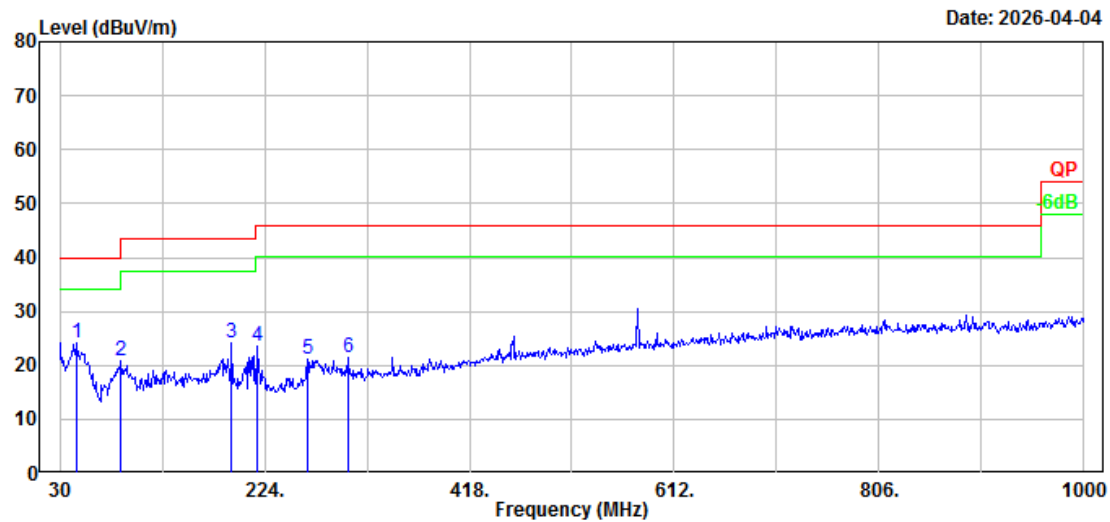


No.	Frequency	Reading	Factor	Result	Limit	Margin	Measurement
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	

1	45.52	38.07	-13.94	24.13	40.00	15.87	Peak
2	88.20	37.19	-16.35	20.84	43.52	22.68	Peak
3	192.96	36.02	-11.95	24.07	43.52	19.45	Peak
4	217.21	36.07	-12.65	23.42	46.02	22.60	Peak
5	264.74	31.74	-10.69	21.05	46.02	24.97	Peak
6	302.57	30.58	-9.27	21.31	46.02	24.71	Peak


Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 5G WIFI 5725-5850
: RBW:120kHz,VBW:500kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

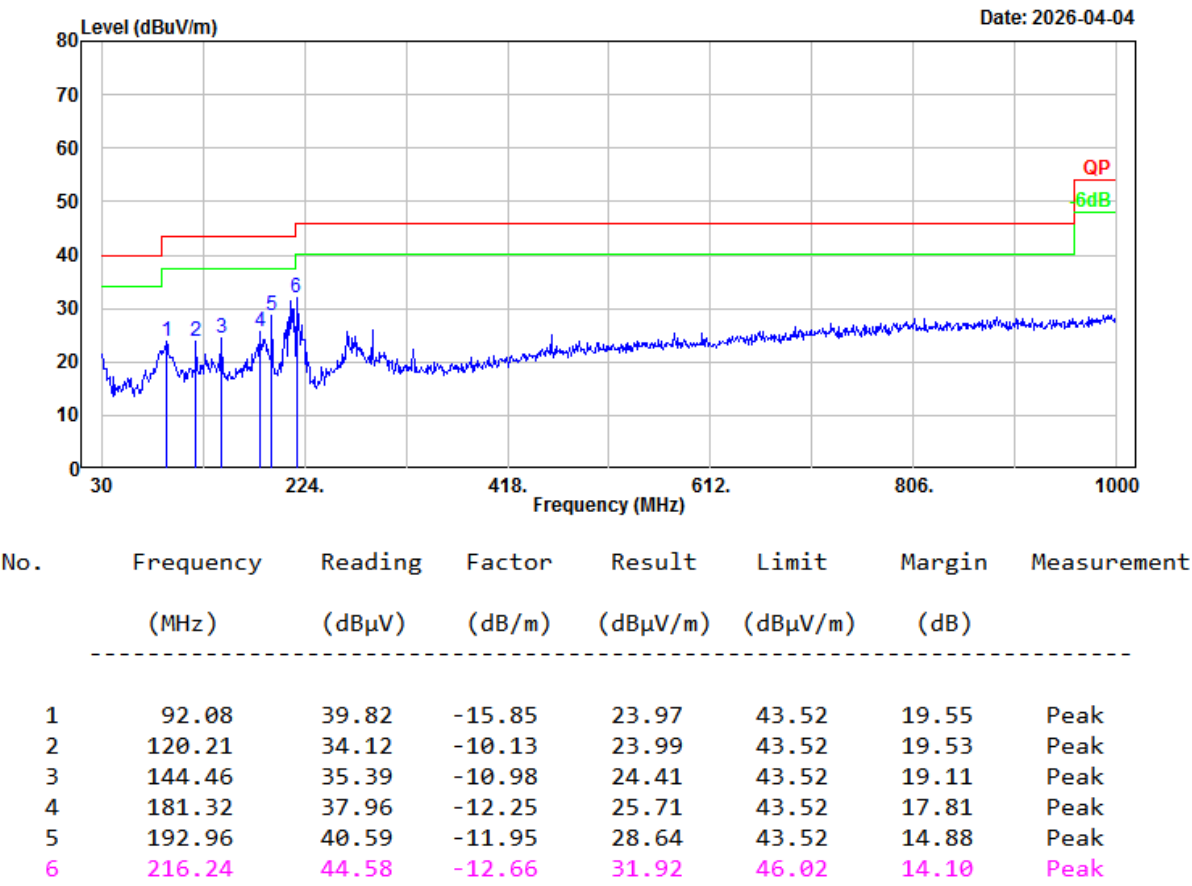

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5725-5850
: RBW:120kHz,VBW:500kHz

Serial No.: 3IUC-9
Tester: Jayce Wang

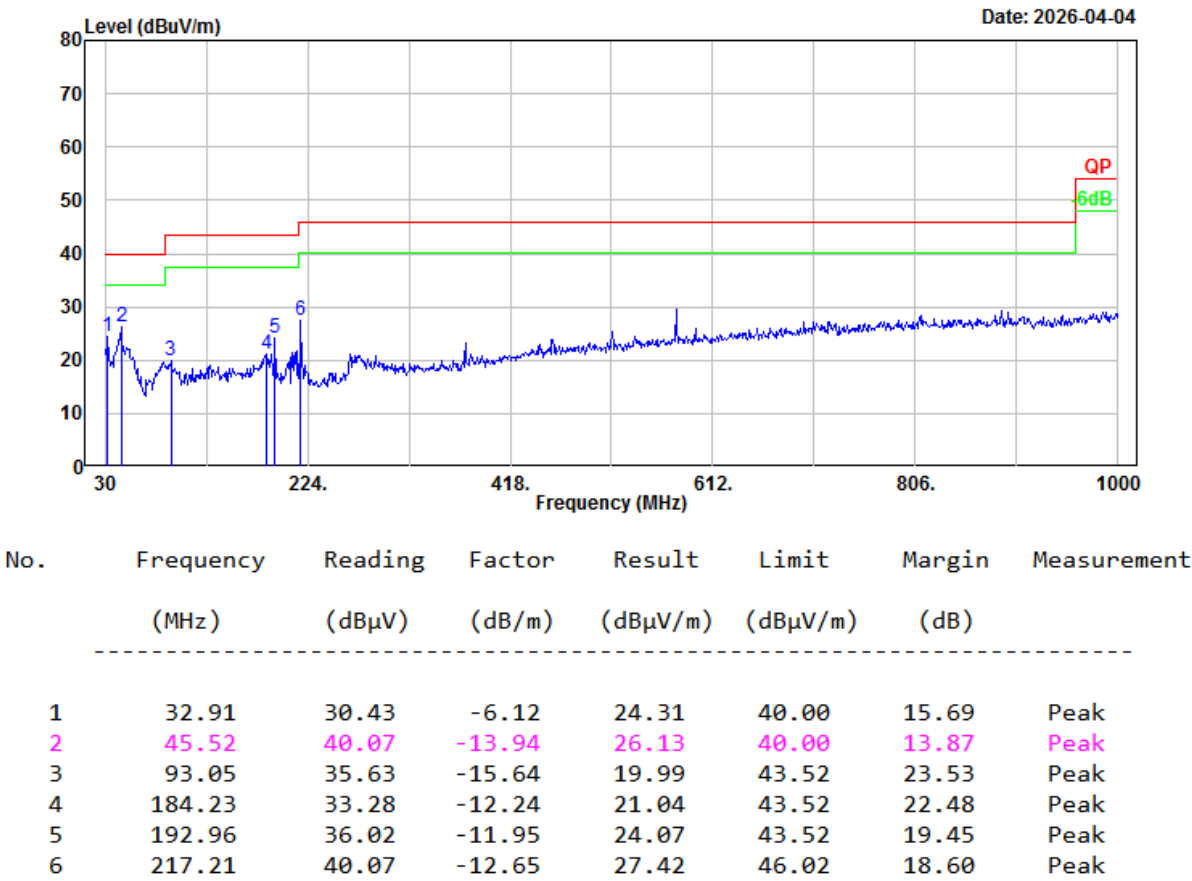

2) 1-40GHz:

Serial Number:	3IUC-9	Test Date:	2026/4/9
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Leo Xiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.1	Relative Humidity: (%)	42	ATM Pressure: (kPa)	100.5
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2026/2/21	2029/2/20
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2026/2/6	2029/2/5
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2025/11/17	2026/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2025/11/14	2026/11/13
AH	Preamplifier	PAM-0118P	469	2025/4/11	2026/4/10
AH	Preamplifier	PAM-1840VH	191	2025/9/4	2026/9/3
R&S	Spectrum Analyzer	FSV40	101944	2025/8/8	2026/8/7
Audix	Test Software	E3	191218 V9	N/A	N/A
E-Microwave	Band Rejection Filter	BSF5150-5850MN	0899003	2026/2/19	2027/2/18
Mini-Circuits	High Pass Filter	VHF-6010+	31119	2025/6/4	2026/6/3
Unknown	Attenuator	Unknown	F-08-EM574-3	2026/3/30	2027/3/30

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.




After pre-scan in the X, Y and Z axes of orientation, the worst case is Y axes, as following tables and plots.

1-18GHz:
5150-5250MHz:


802.11a, Low Channel, 5180MHz, Horizontal

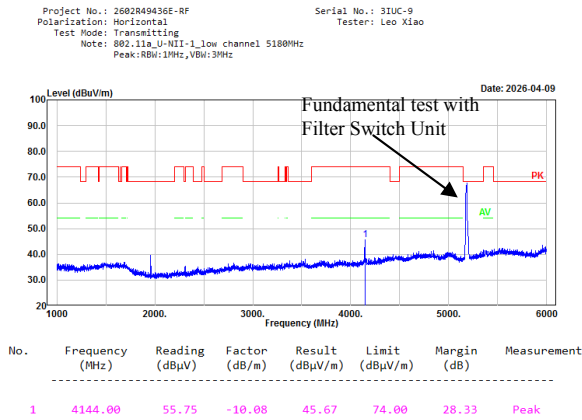




802.11a, Low Channel, 5180MHz, Vertical

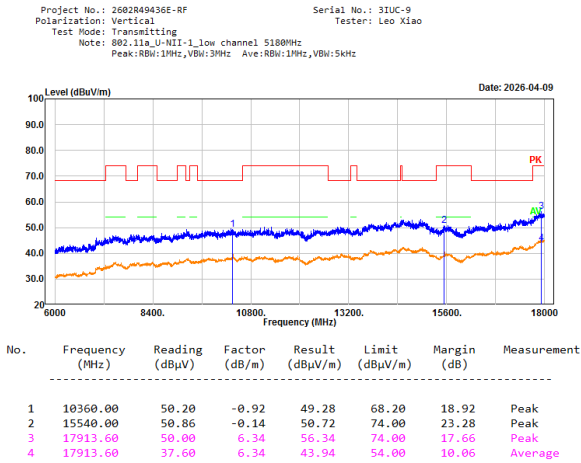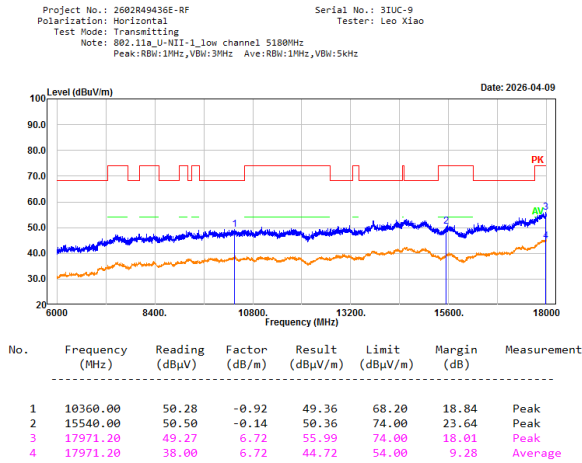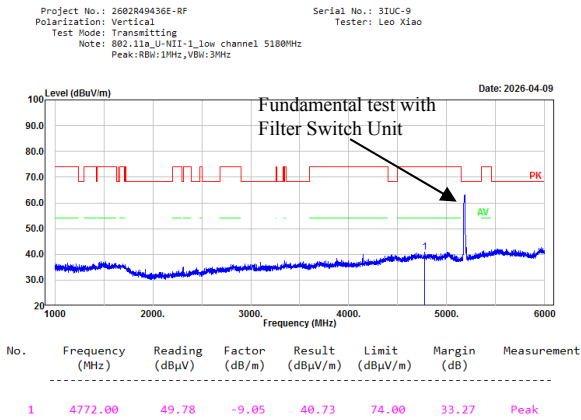

802.11a, Middle Channel, 5200MHz, Horizontal

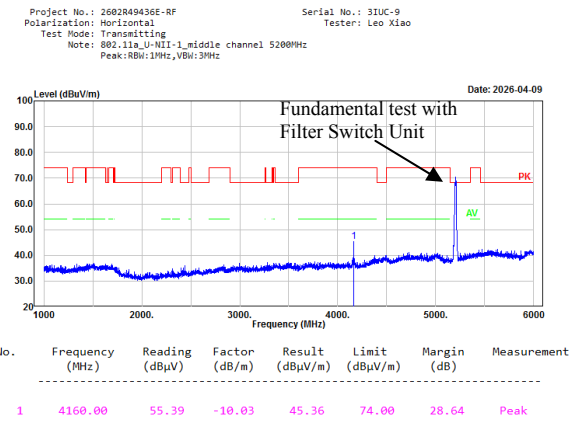


802.11a, Middle Channel, 5200MHz, Vertical

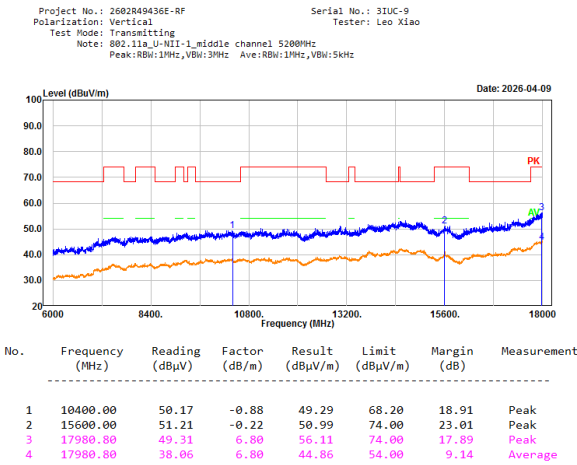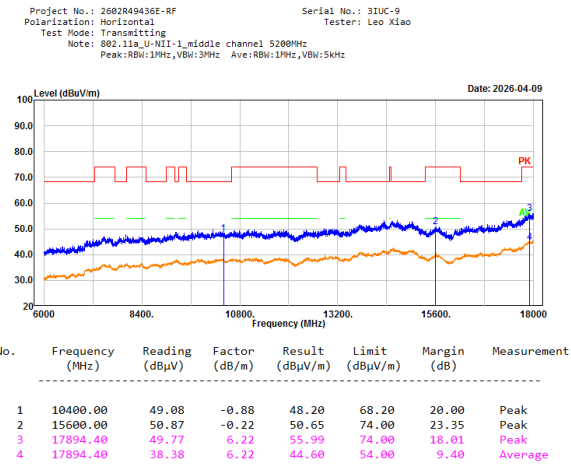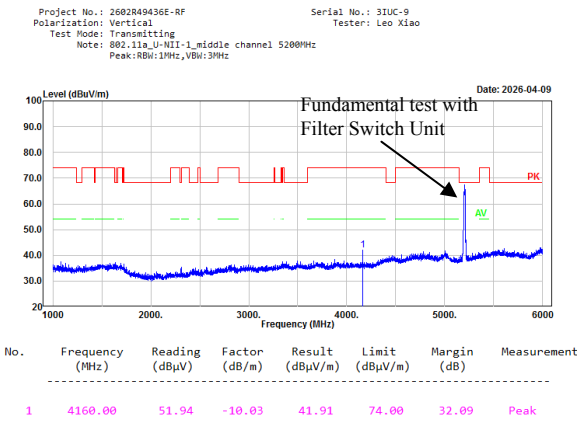

802.11a, High Channel, 5240MHz, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

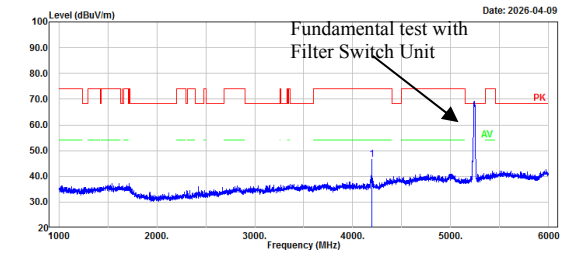


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4192.00	56.39	-9.94	46.45	74.00	27.55	Peak

802.11a, High Channel, 5240MHz, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IUC-9
Tester: Leo Xiao

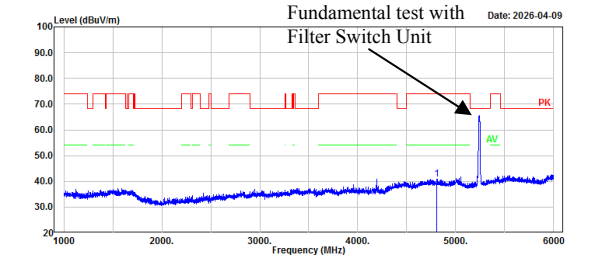

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4803.00	49.95	-9.00	40.95	74.00	33.05	Peak

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3IUC-9
Tester: Leo Xiao

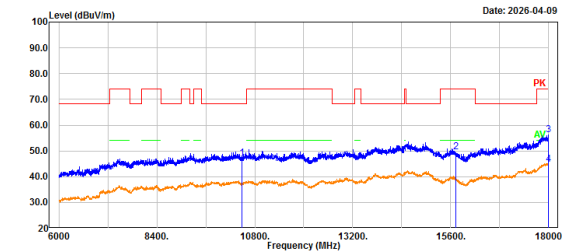

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	47.97	-0.82	47.15	68.20	21.05	Peak
2	15720.00	49.84	-0.35	49.49	74.00	24.51	Peak
3	17985.60	49.38	6.83	56.21	74.00	17.79	Peak
4	17985.60	37.86	6.83	44.69	54.00	9.31	Average


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-1_high channel 5240MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao



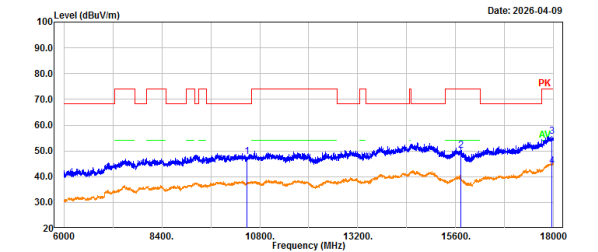


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	48.54	-0.82	47.72	68.20	20.48	Peak
2	15720.00	50.48	-0.35	50.13	74.00	23.87	Peak
3	17985.60	48.99	6.63	55.62	74.00	18.38	Peak
4	17985.60	37.61	6.63	44.24	54.00	9.76	Average


802.11ac20, Low Channel, 5180MHz, Horizontal

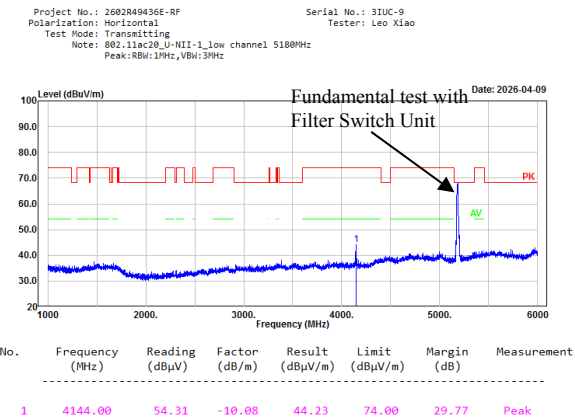




802.11ac20, Low Channel, 5180MHz, Vertical

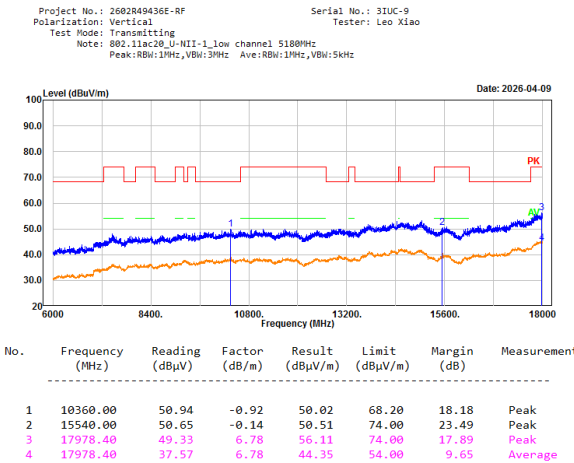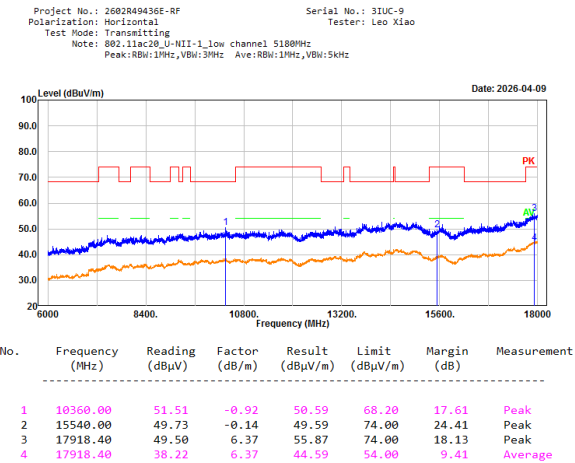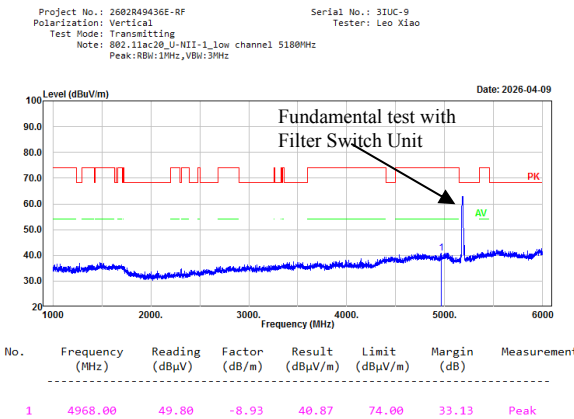


802.11ac20, Middle Channel, 5200MHz,Horizontal

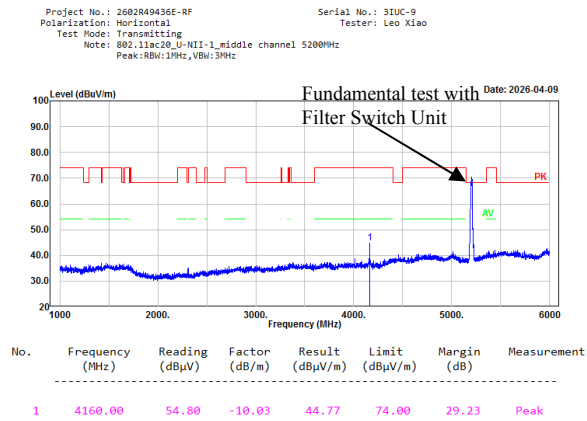




802.11ac20, Middle Channel, 5200MHz, Vertical

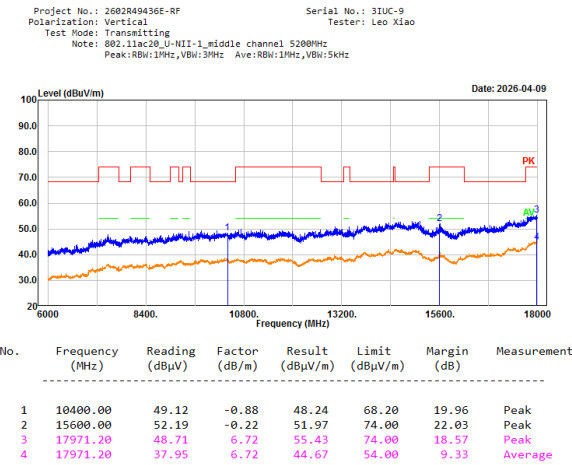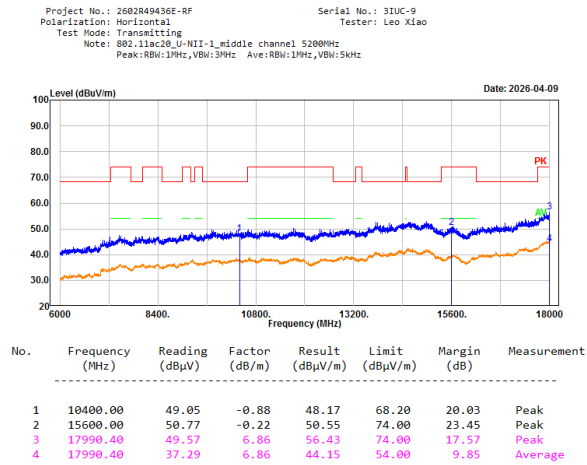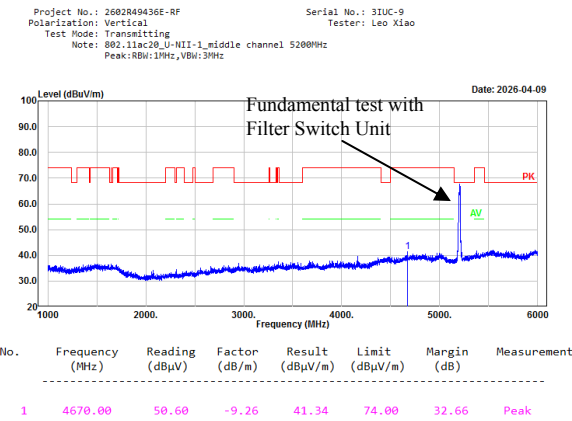


802.11ac20, High Channel, 5240MHz, Horizontal

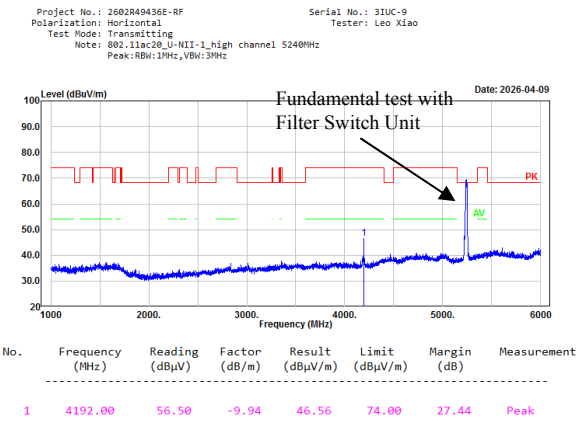




802.11ac20, High Channel, 5240MHz, Vertical

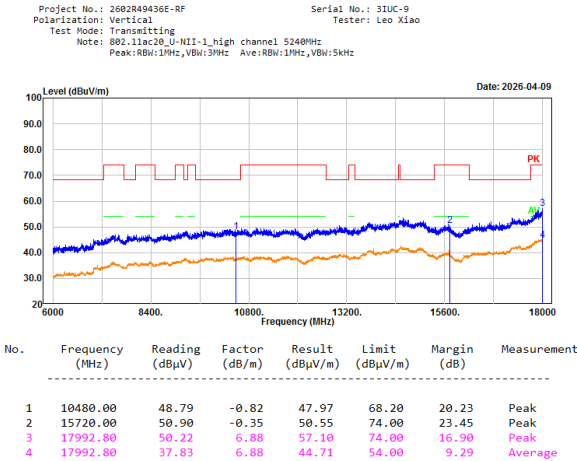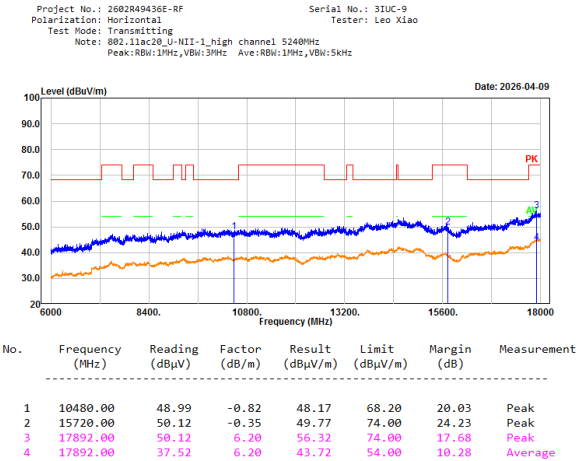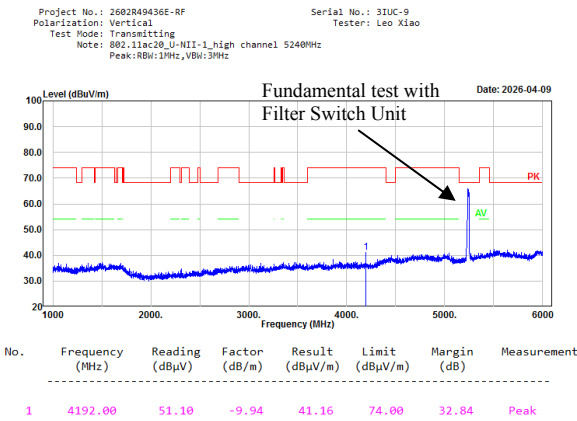

802.11ac40, Low Channel, 5190MHz, Horizontal

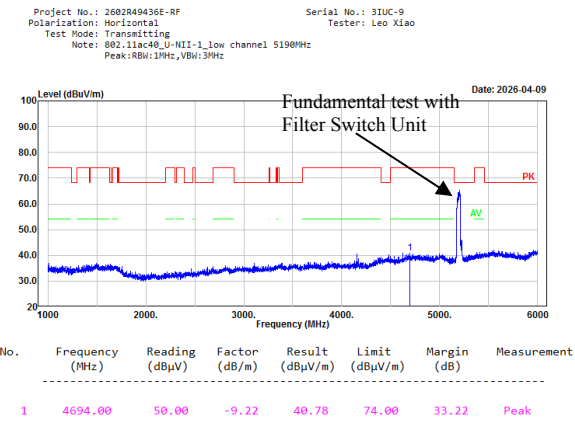

802.11ac40, Low Channel, 5190MHz,Vertical

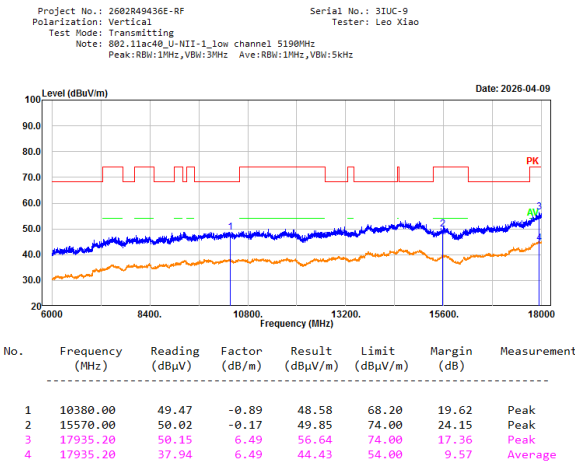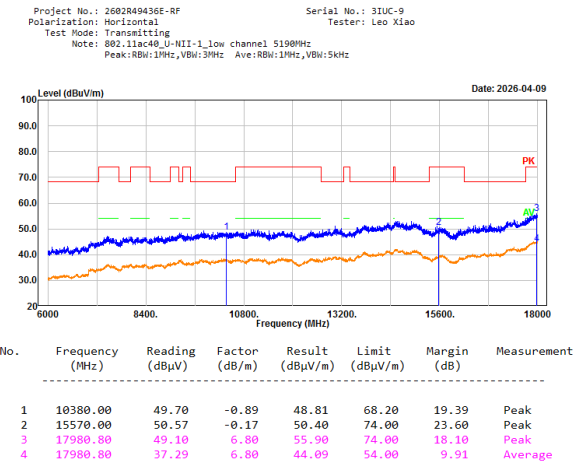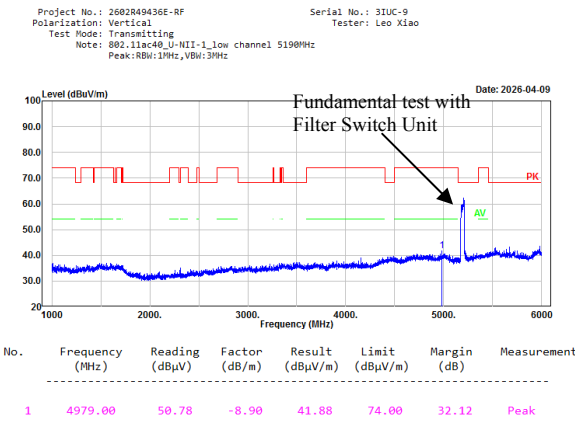


802.11ac40, High Channel, 5230MHz, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1_high channel 5230MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

Date: 2026-04-09

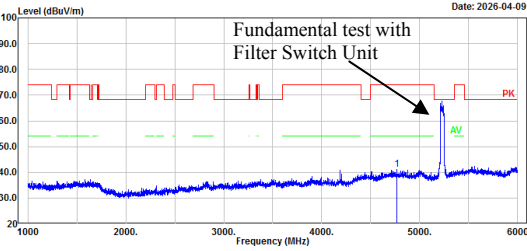


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4766.00	50.06	-9.07	40.99	74.00	33.01	Peak

802.11ac40, High Channel, 5230MHz, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1_high channel 5230MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

Date: 2026-04-09

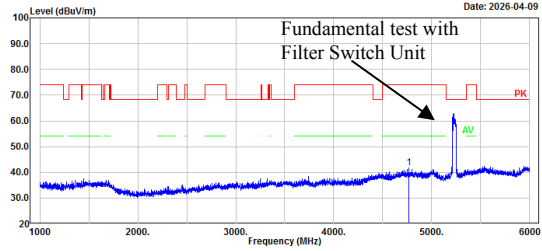


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4764.00	50.66	-9.07	41.59	74.00	32.41	Peak

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1_high channel 5230MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao

Date: 2026-04-09

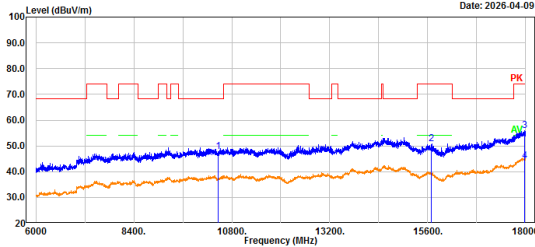


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10460.00	48.57	-0.83	47.74	68.20	20.46	Peak
2	15690.00	51.10	-0.31	50.79	74.00	23.21	Peak
3	17966.40	49.14	6.69	55.83	74.00	18.17	Peak
4	17966.40	37.48	6.69	44.17	54.00	9.83	Average

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-1_high channel 5230MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao


Date: 2026-04-09

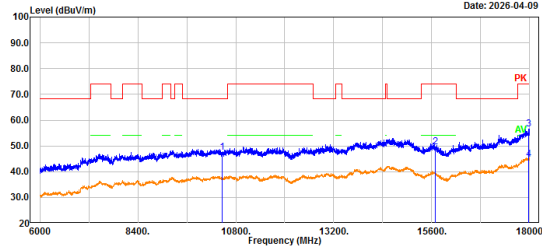




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10460.00	48.30	-0.83	47.47	68.20	20.73	Peak
2	15690.00	49.97	-0.31	49.66	74.00	24.34	Peak
3	17978.40	49.63	6.78	56.41	74.00	17.59	Peak
4	17978.40	37.96	6.78	44.74	54.00	9.26	Average

5250-5350MHz:


802.11a, Low Channel, 5260MHz, Horizontal

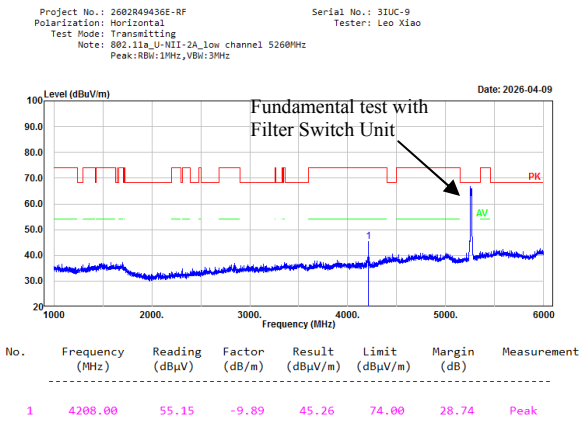




802.11a, Low Channel, 5260MHz, Vertical

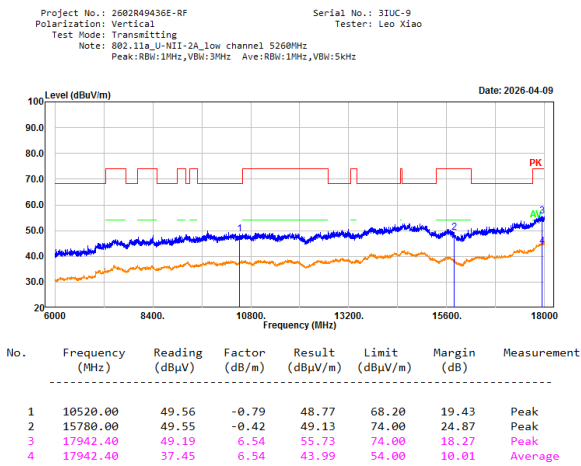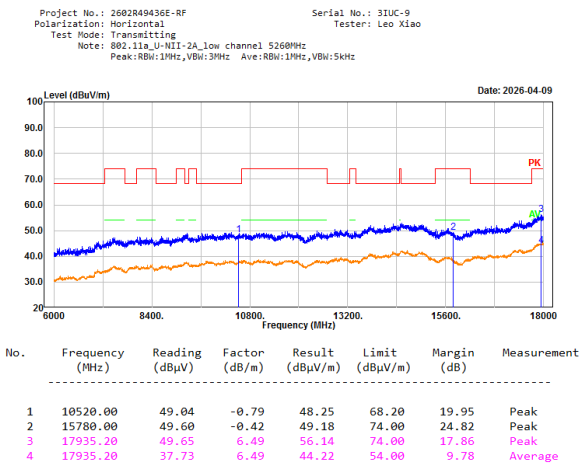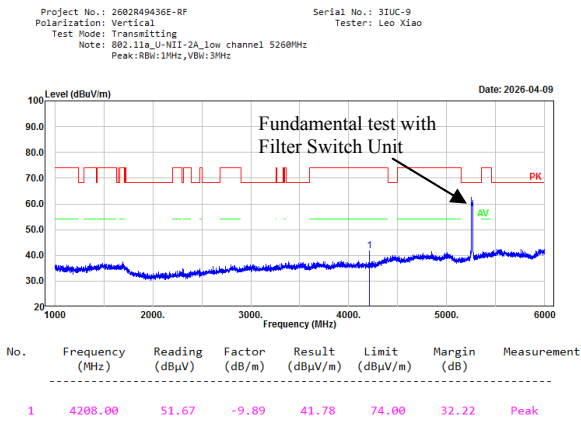


802.11a, Middle Channel, 5280MHz, Horizontal

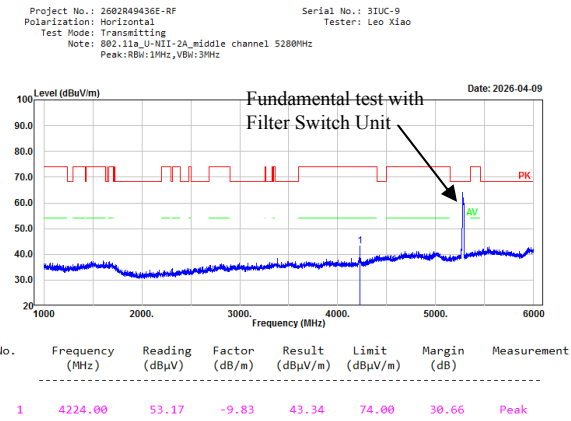




802.11a, Middle Channel, 5280MHz, Vertical

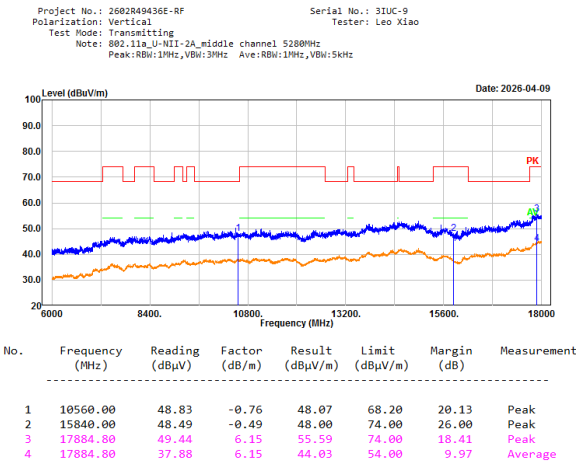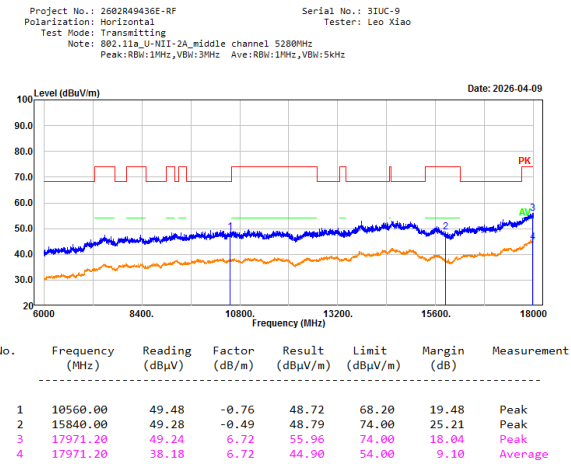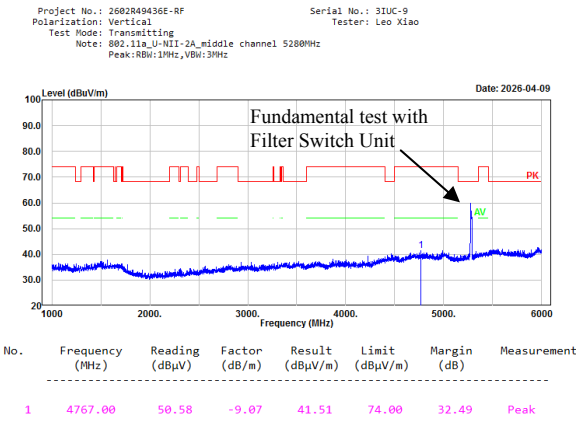


802.11a, High Channel, 5320MHz, Horizontal

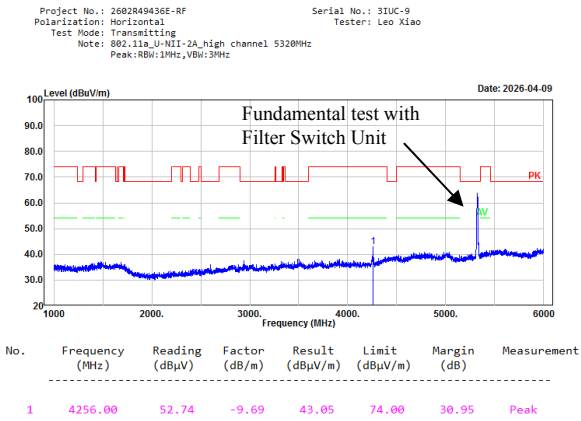




802.11a, High Channel, 5320MHz, Vertical

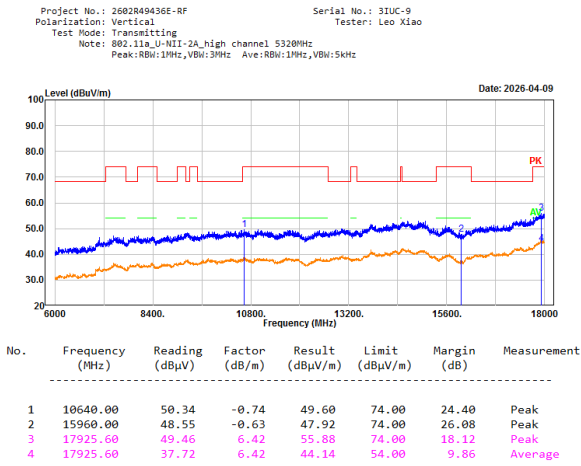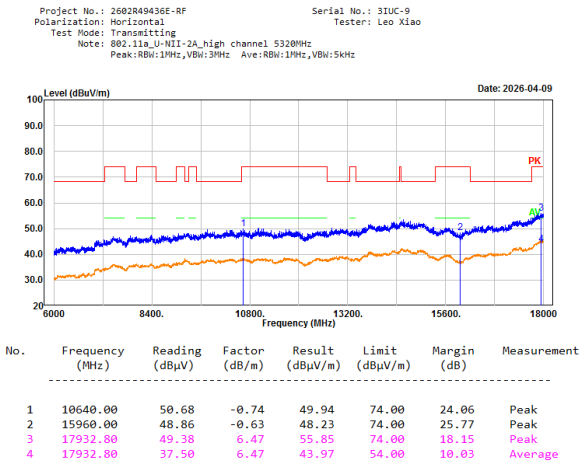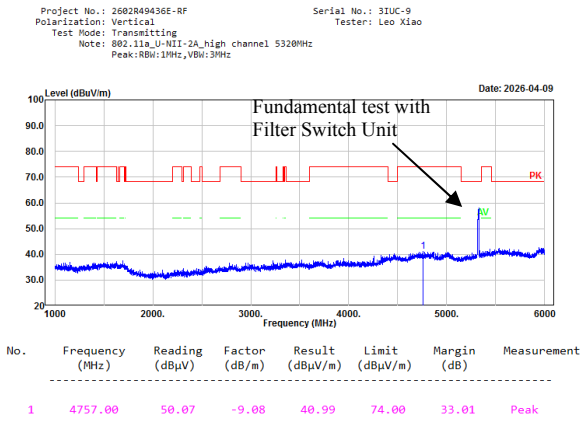


802.11ac20, Low Channel, 5260MHz, Horizontal

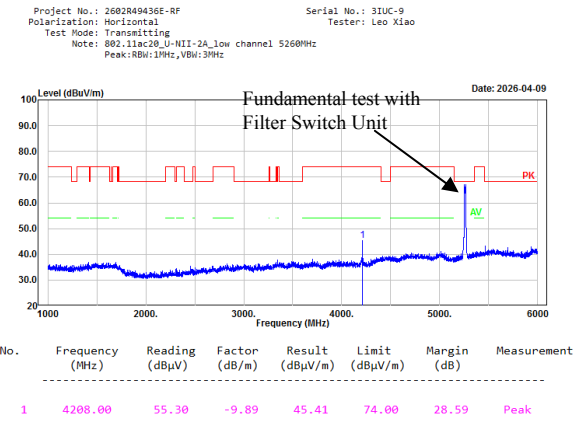




802.11ac20, Low Channel, 5260MHz, Vertical

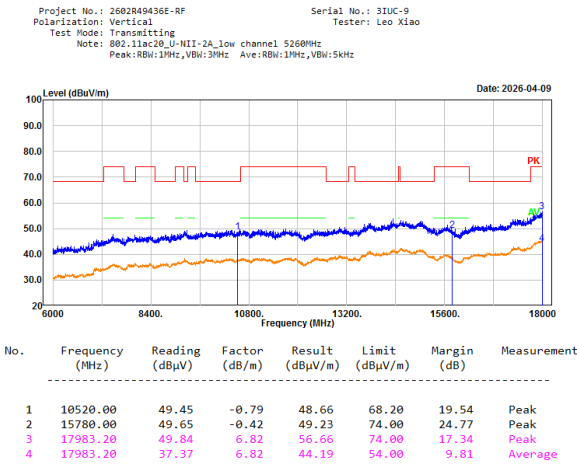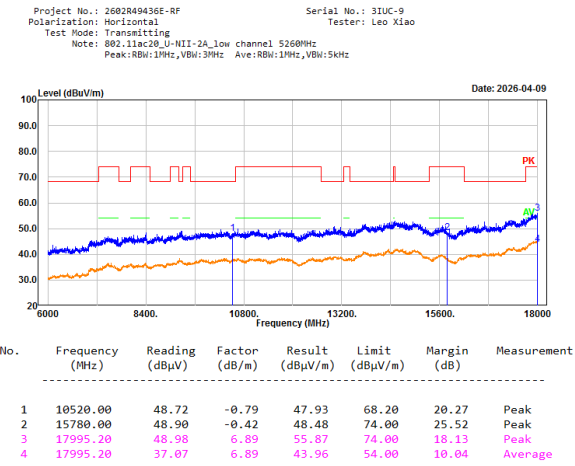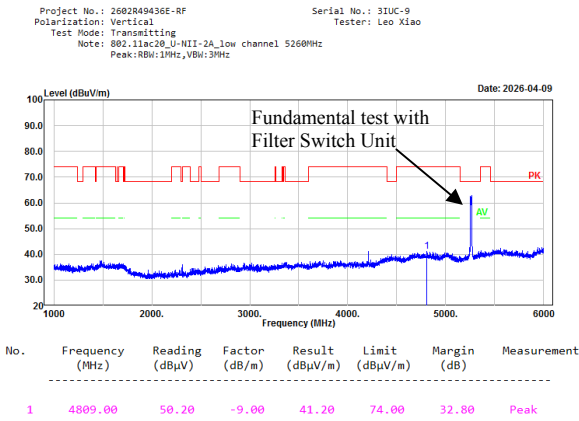


802.11ac20, Middle Channel, 5280MHz,Horizontal

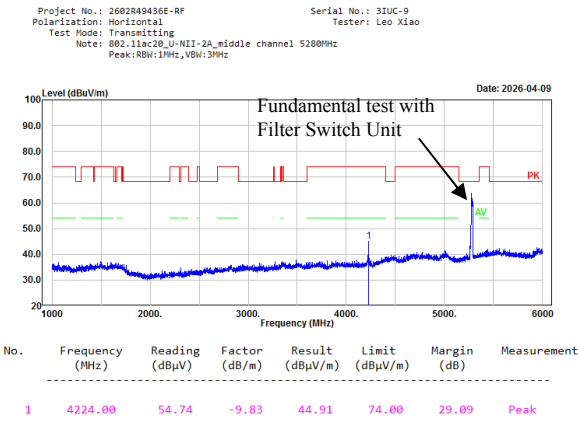




802.11ac20, Middle Channel, 5280MHz, Vertical

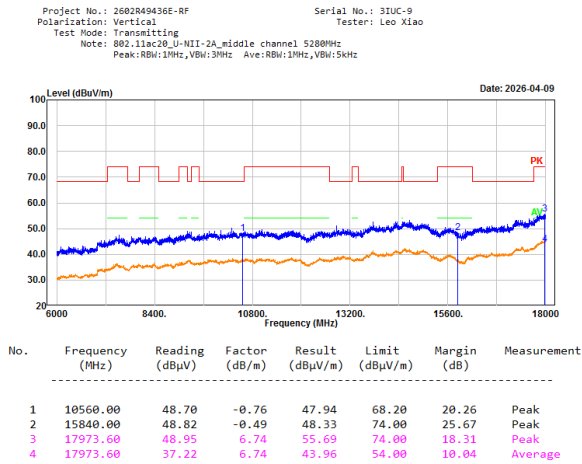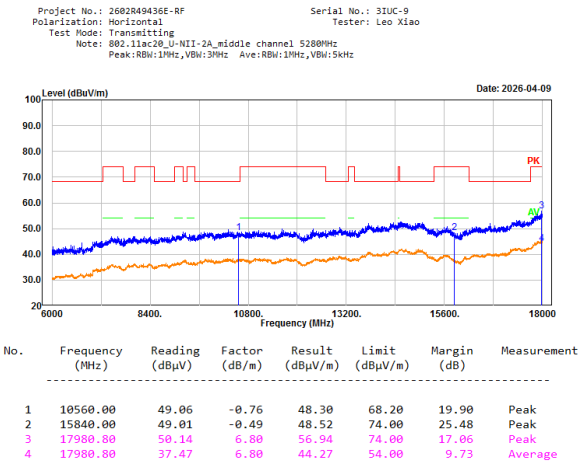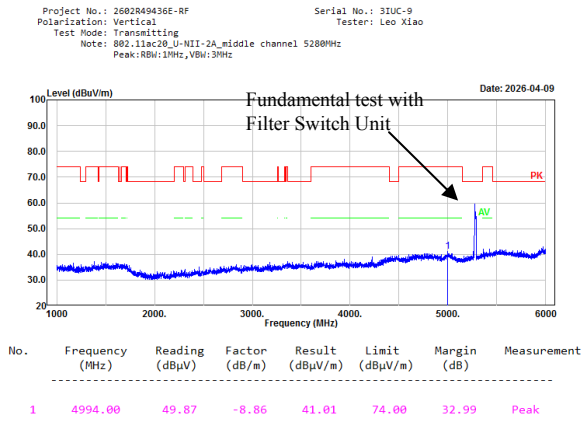


802.11ac20, High Channel, 5320MHz, Horizontal

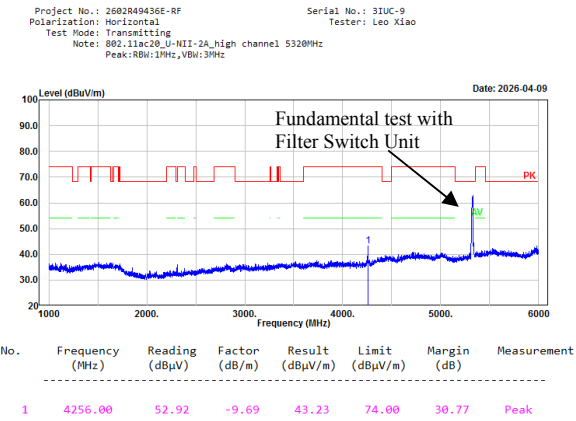




802.11ac20, High Channel, 5320MHz, Vertical

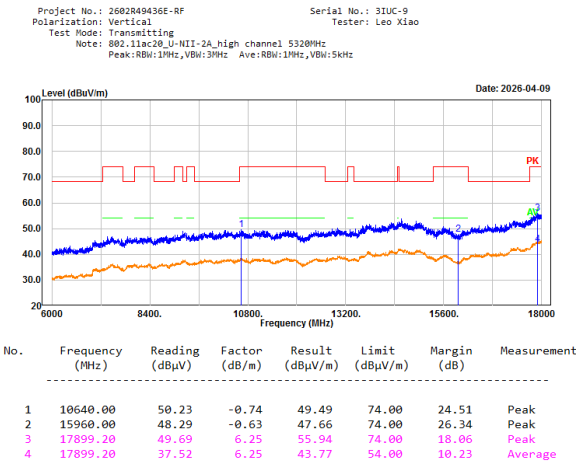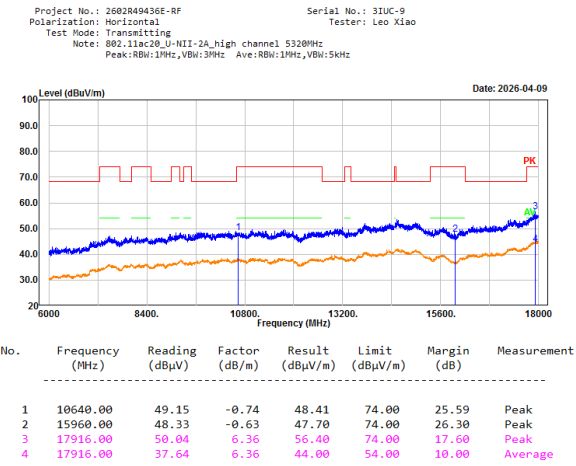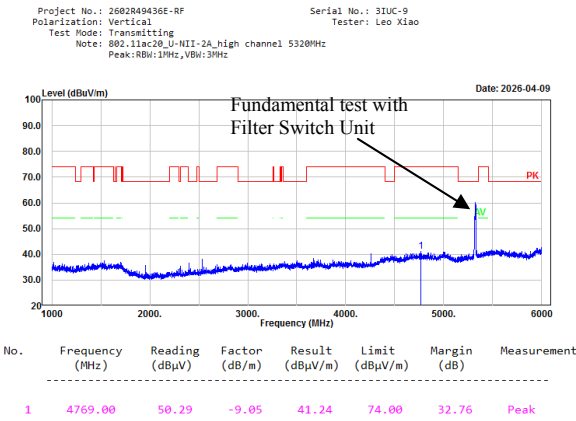


802.11ac40, Low Channel, 5270MHz, Horizontal

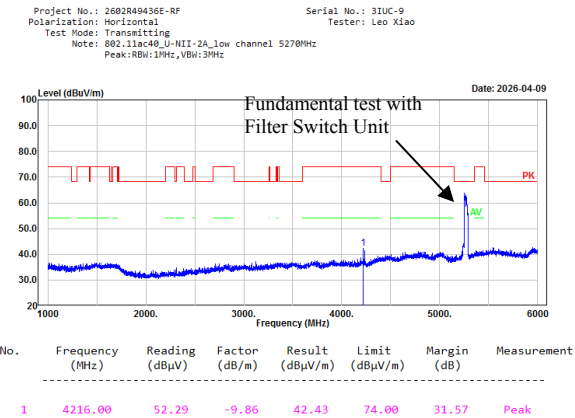




802.11ac40, Low Channel, 5270MHz, Vertical

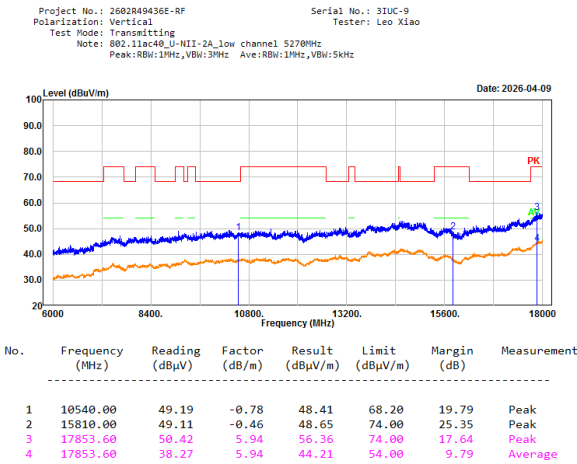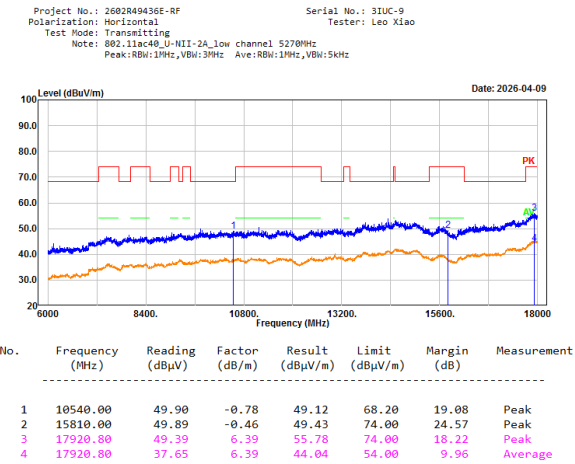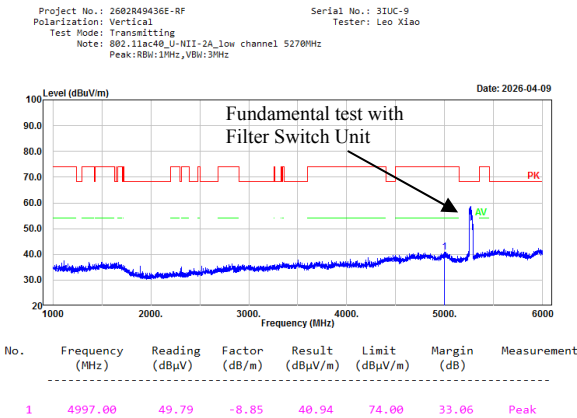

802.11ac40, High Channel, 5310MHz, Horizontal

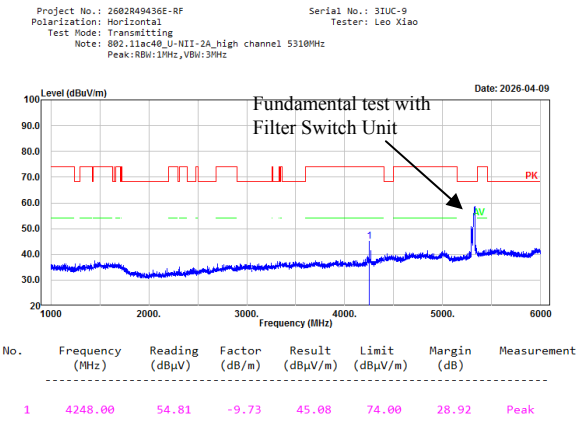


802.11ac40, High Channel, 5310MHz, Vertical

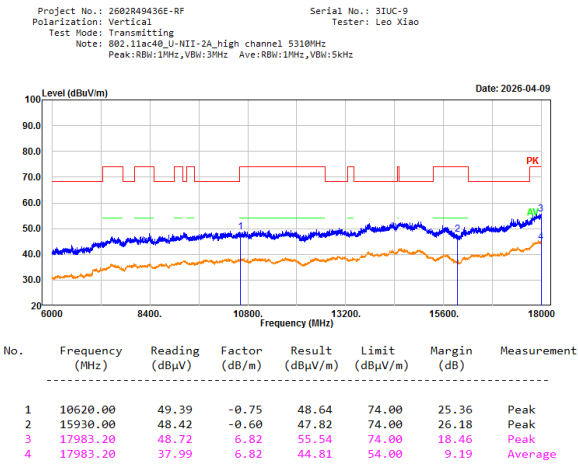
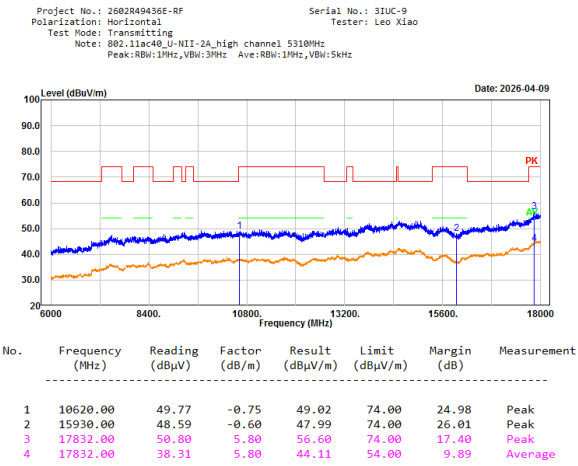
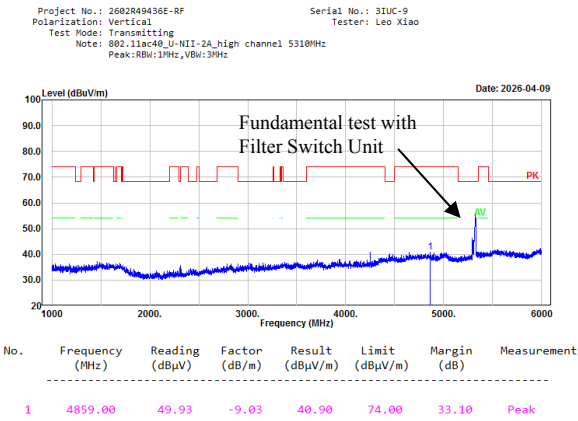


5470-5725MHz:


802.11a, Low Channel, 5500MHz, Horizontal

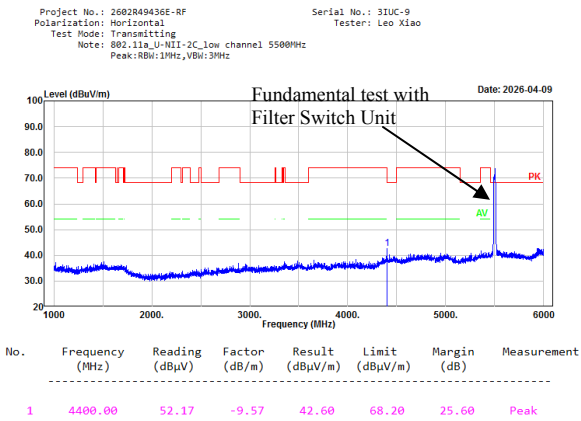




802.11a, Low Channel, 5500MHz, Vertical

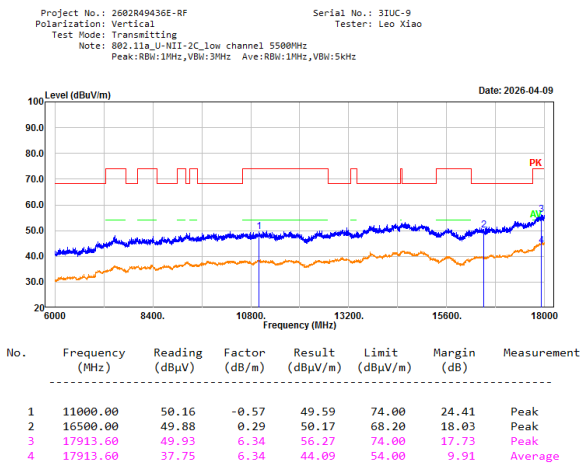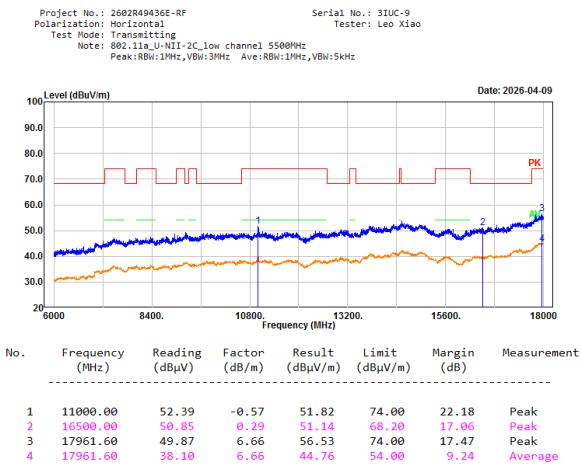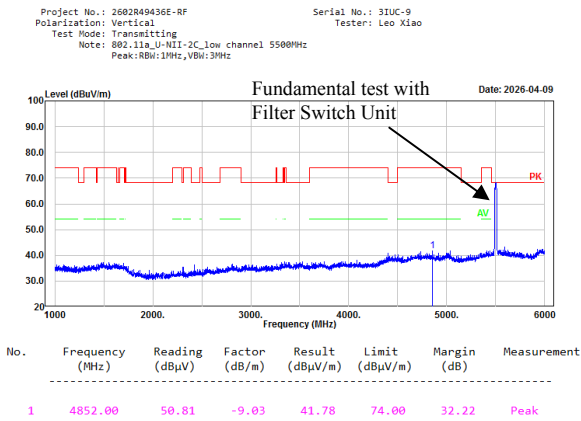


802.11a, Middle Channel, 5600MHz, Horizontal

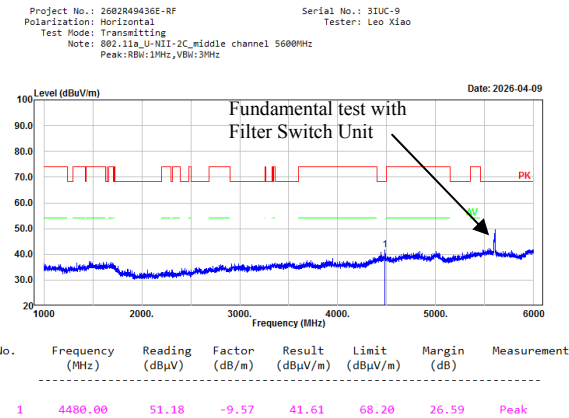




802.11a, Middle Channel, 5600MHz, Vertical

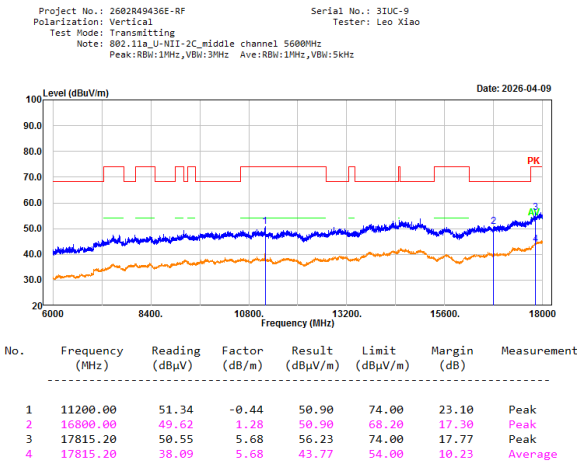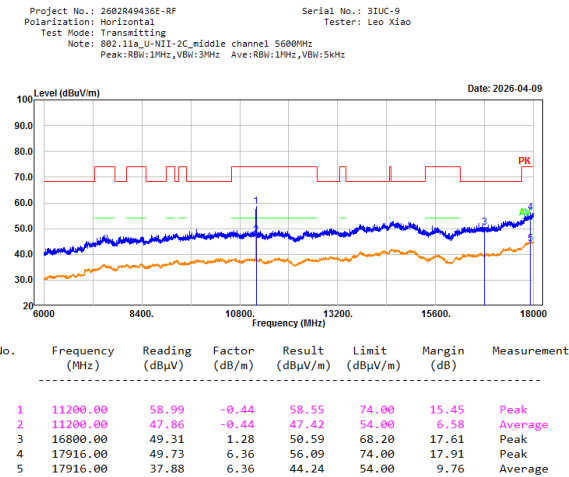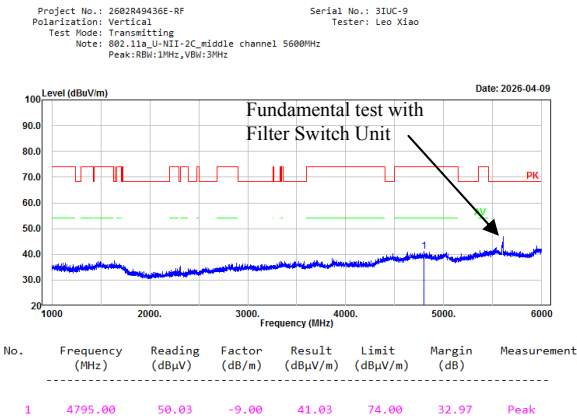

802.11a, High Channel, 5700MHz, Horizontal

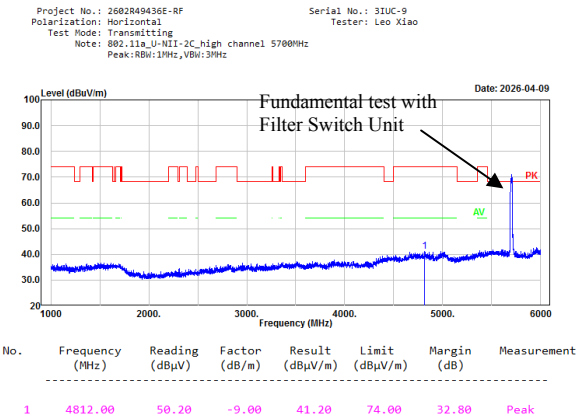


802.11a, High Channel, 5700MHz, Vertical

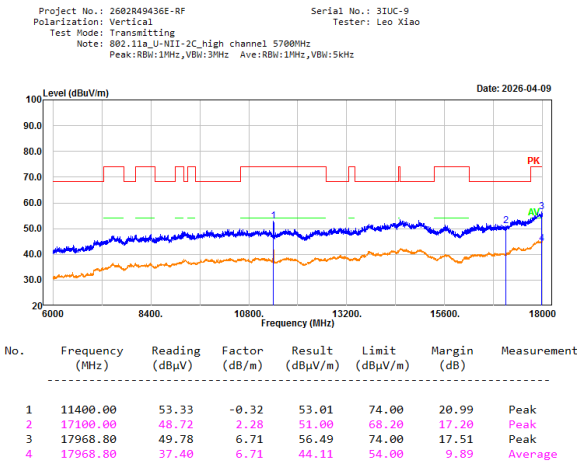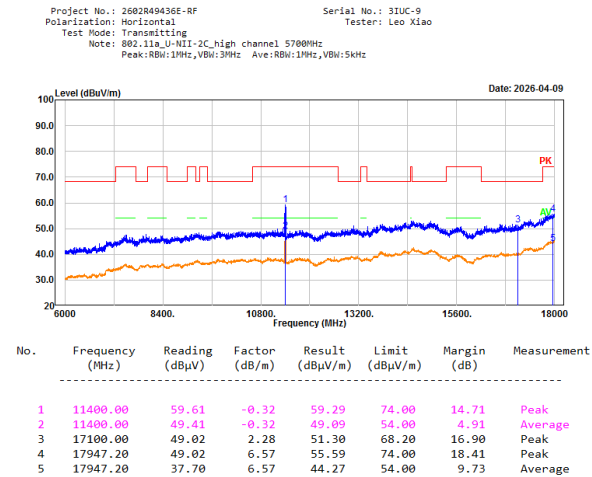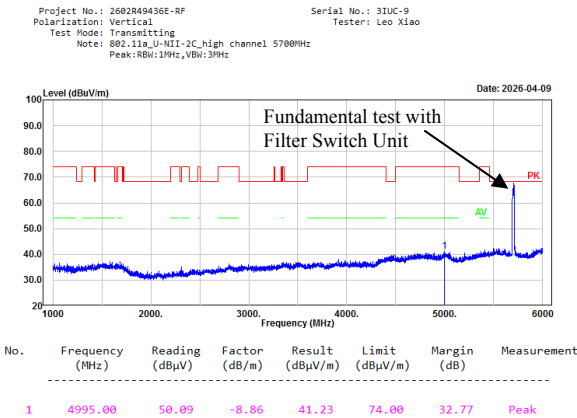

802.11ac20, Low Channel, 5500MHz, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C_low channel 5500MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IUC-9
Tester: Leo Xiao

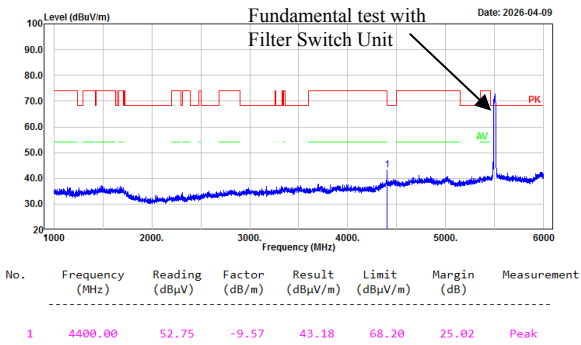

802.11ac20, Low Channel, 5500MHz, Vertical


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C_low channel 5500MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

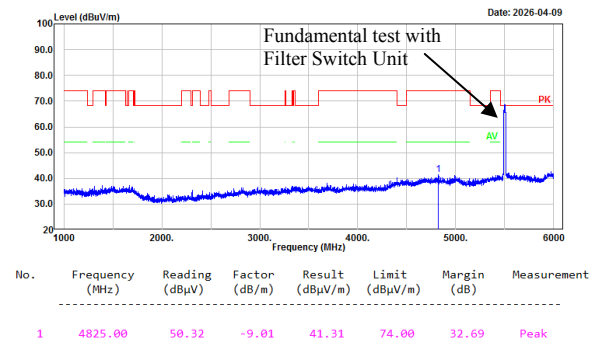


Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C_low channel 5500MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao

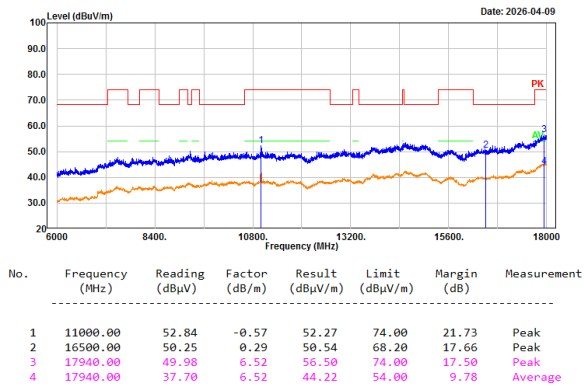


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C_low channel 5500MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz




Serial No.: 3IUC-9
Tester: Leo Xiao

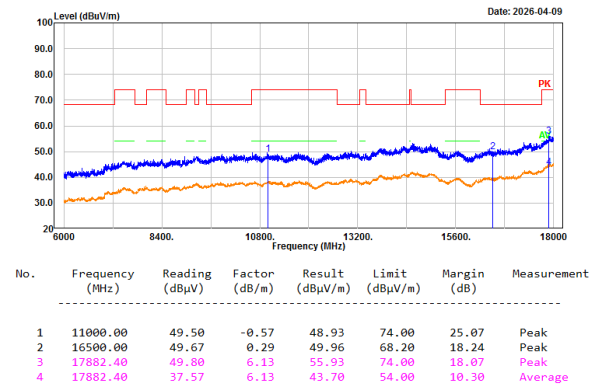


802.11ac20, Middle Channel, 5600MHz, Horizontal

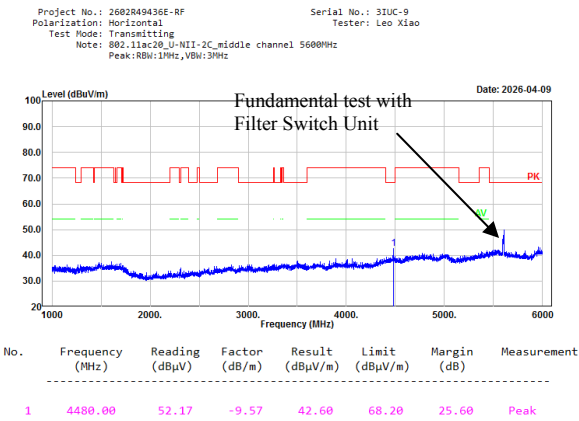




802.11ac20, Middle Channel, 5600MHz, Vertical

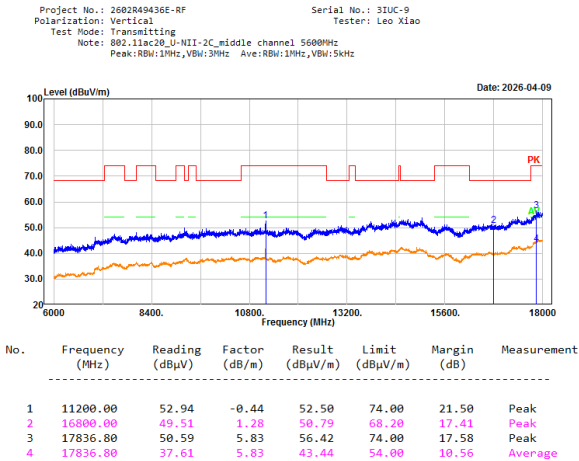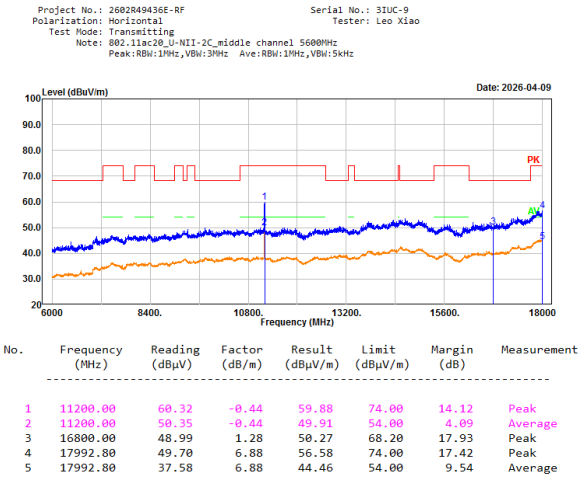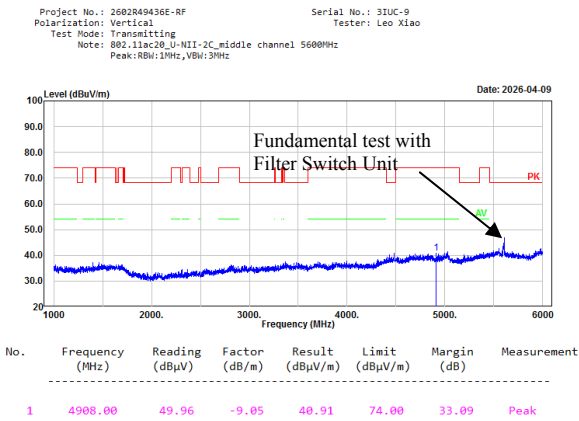


802.11ac20, High Channel, 5700MHz, Horizontal

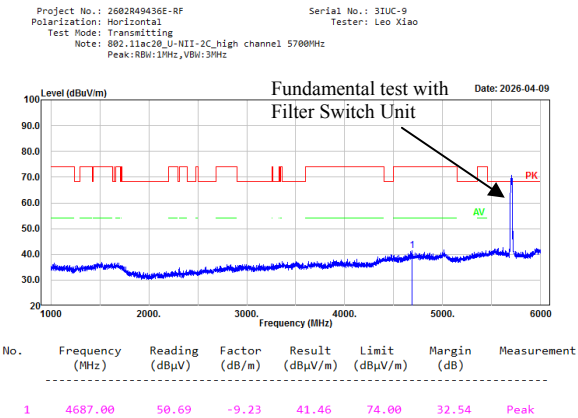




802.11ac20, High Channel, 5700MHz, Vertical

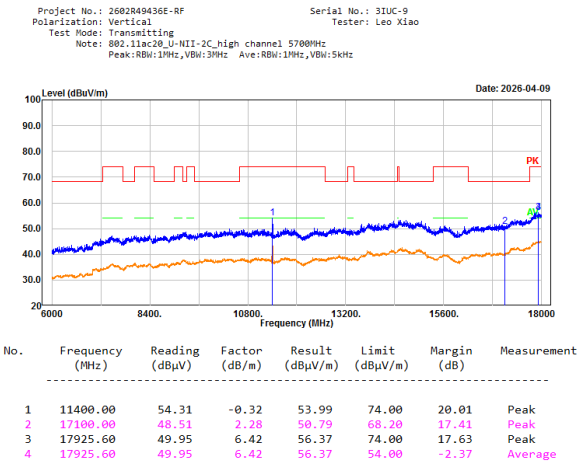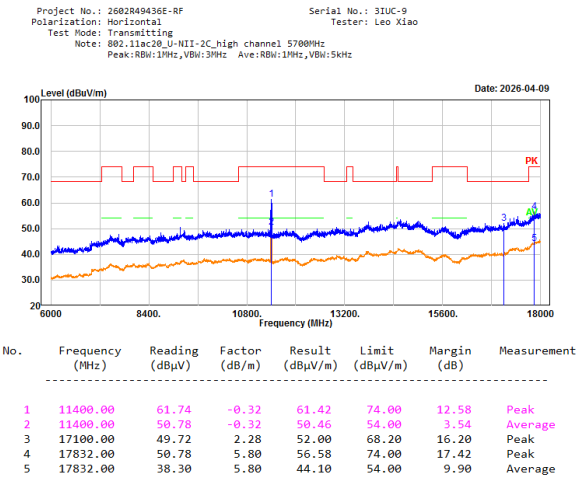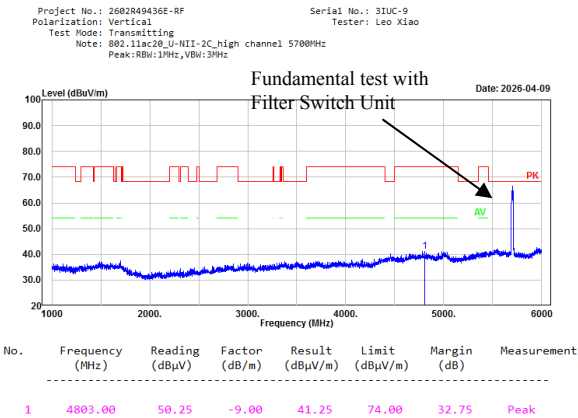


802.11ac40, Low Channel, 5510MHz, Horizontal

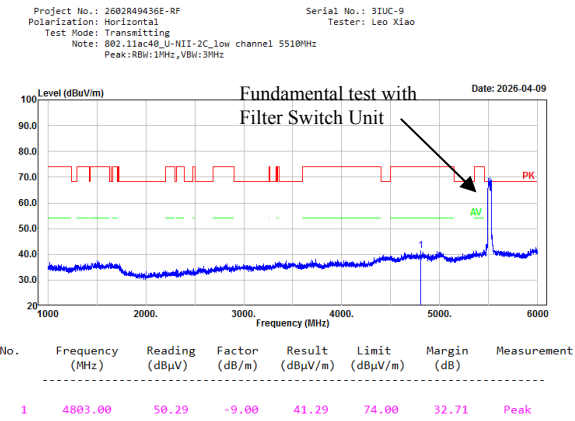




802.11ac40, Low Channel, 5510MHz, Vertical

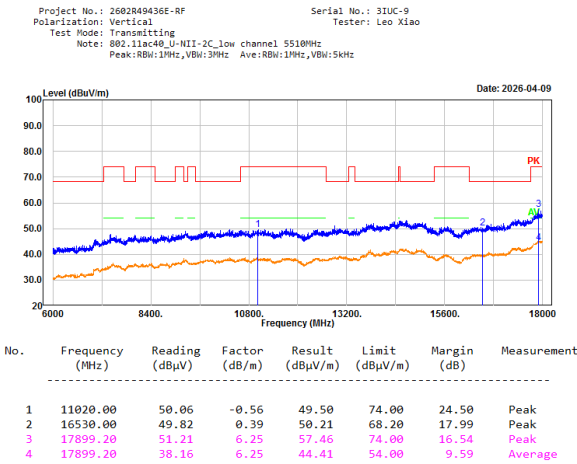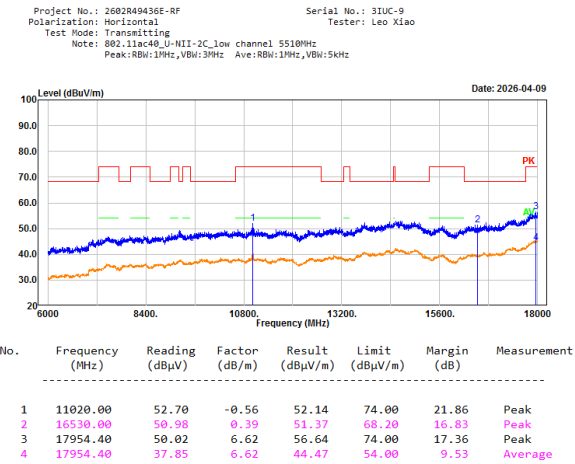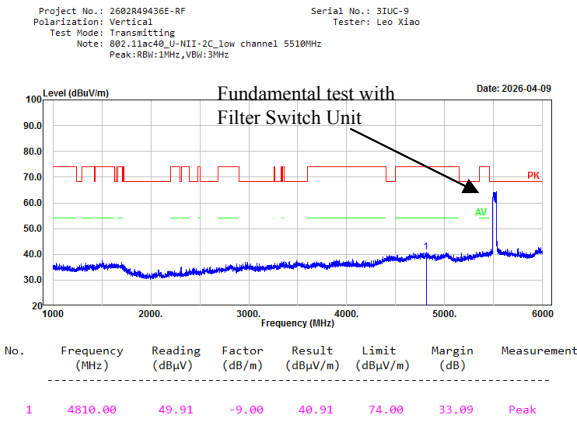


802.11ac40, Middle Channel, 5590MHz, Horizontal

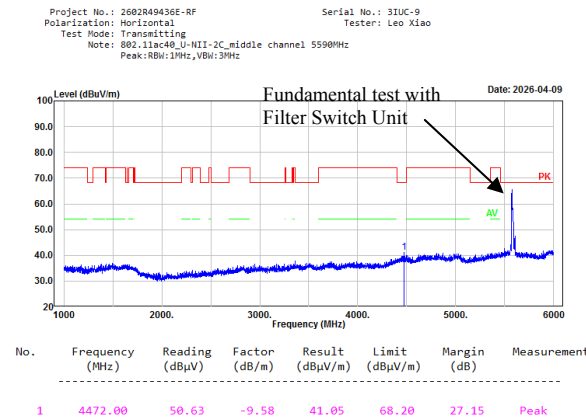




802.11ac40, Middle Channel, 5590MHz, Vertical

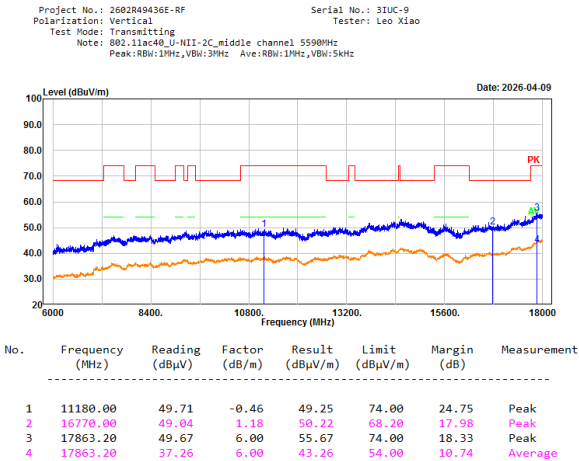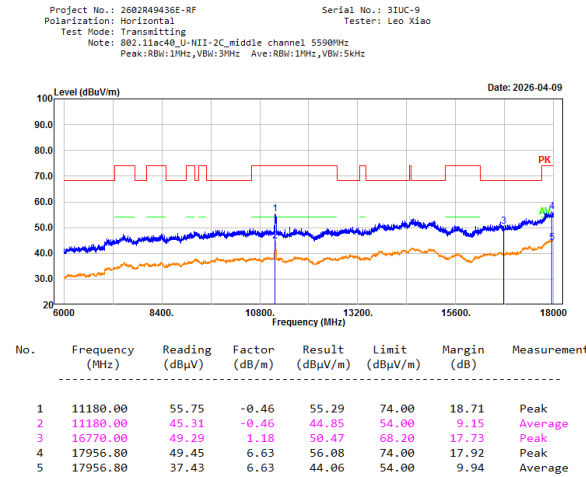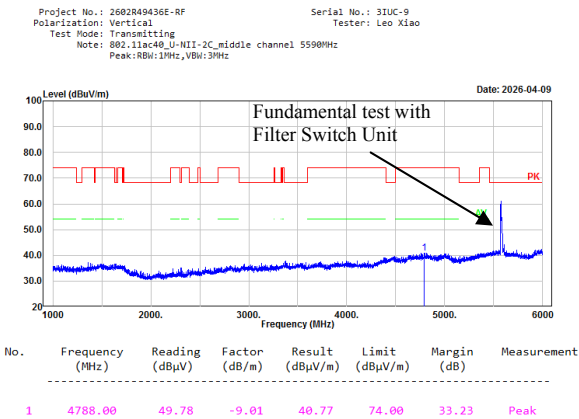

802.11ac40, High Channel, 5670MHz, Horizontal

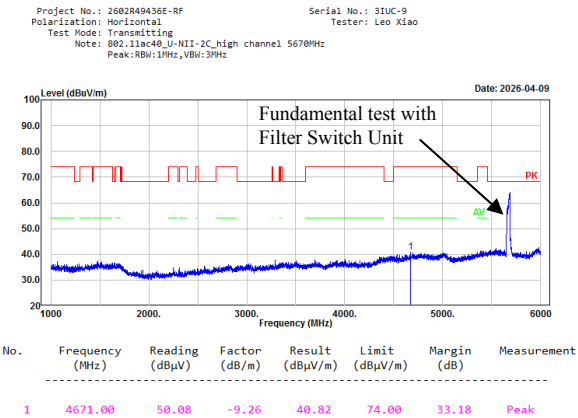


802.11ac40, High Channel, 5670MHz, Vertical

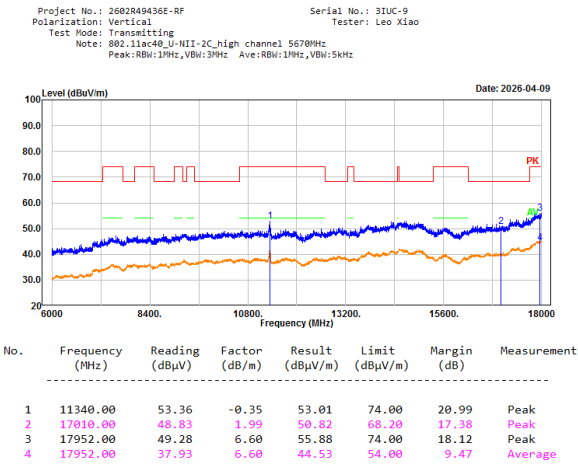
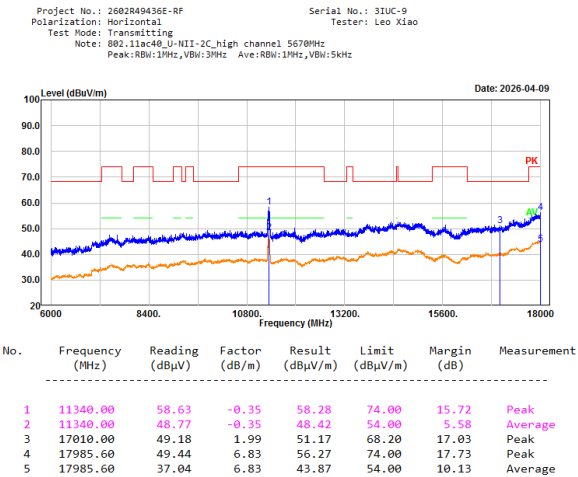
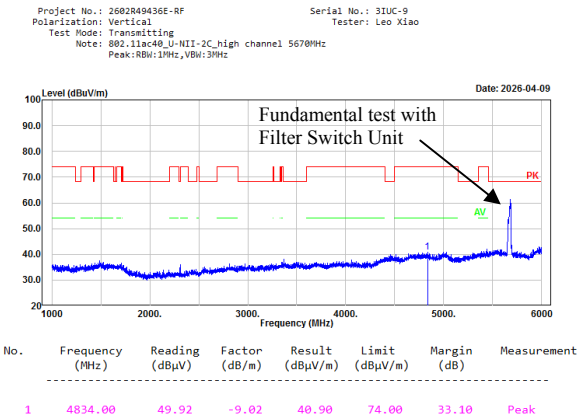


5725-5850MHz:

802.11a, Low Channel, 5745MHz, Horizontal

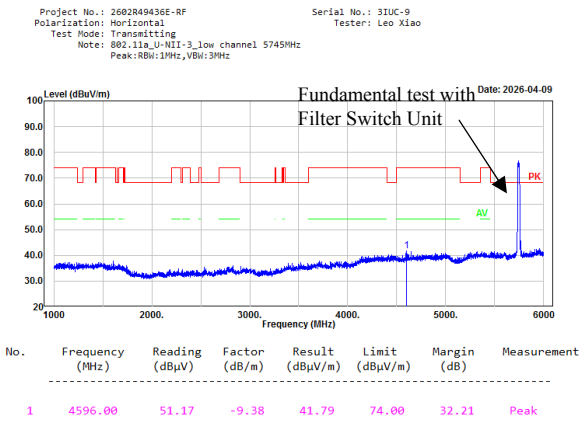


802.11a, Low Channel, 5745MHz, Vertical

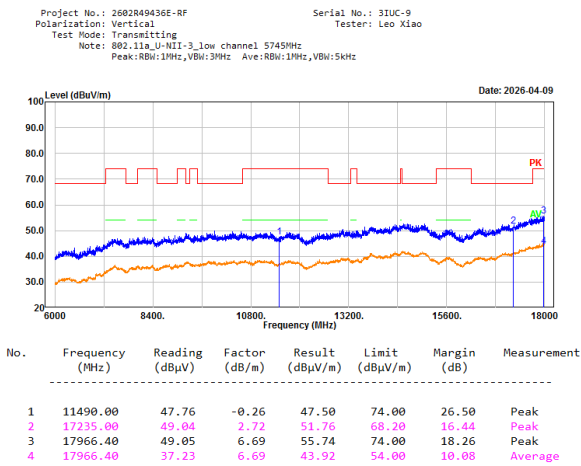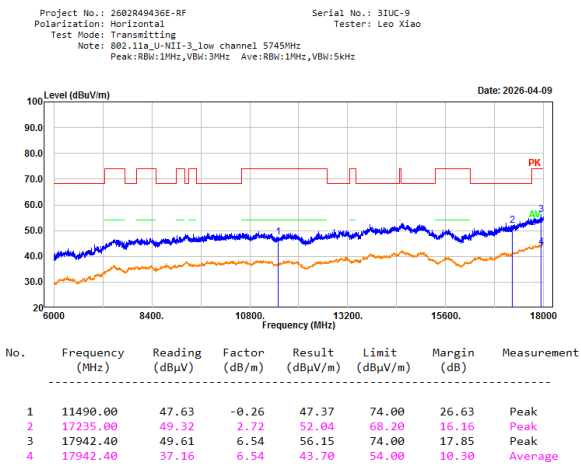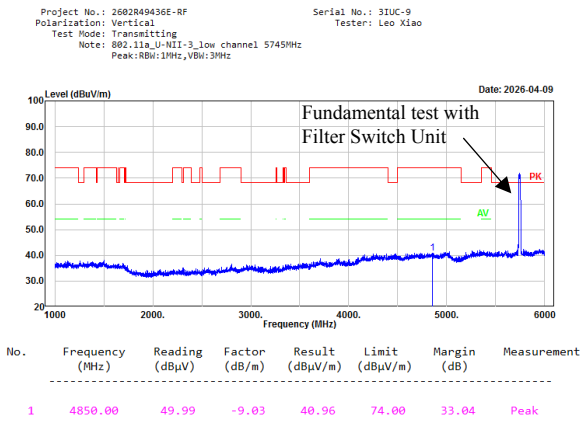

802.11a, Middle Channel, 5785MHz, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IUC-9
Tester: Leo Xiao

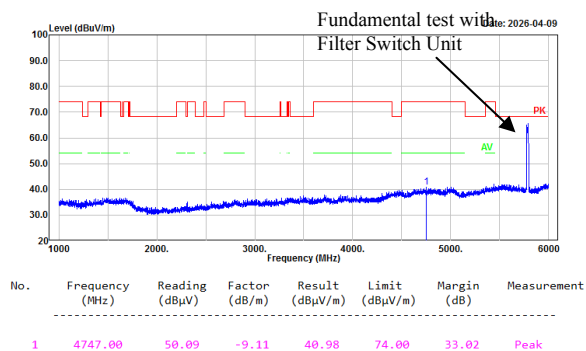

802.11a, Middle Channel, 5785MHz, Vertical


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

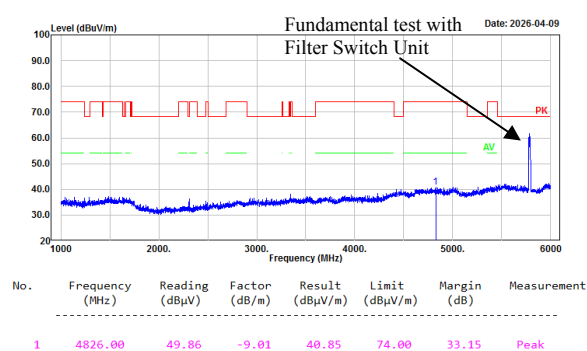


Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao

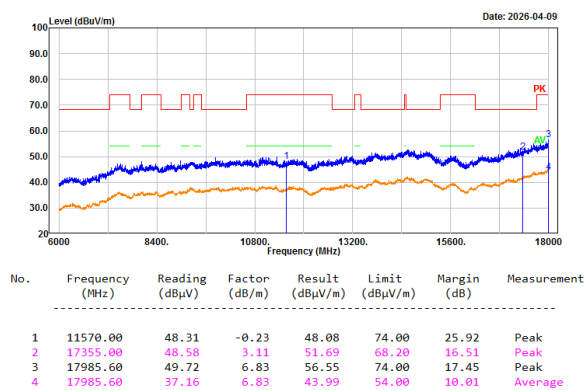

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3_middle channel 5785MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3IUC-9
Tester: Leo Xiao

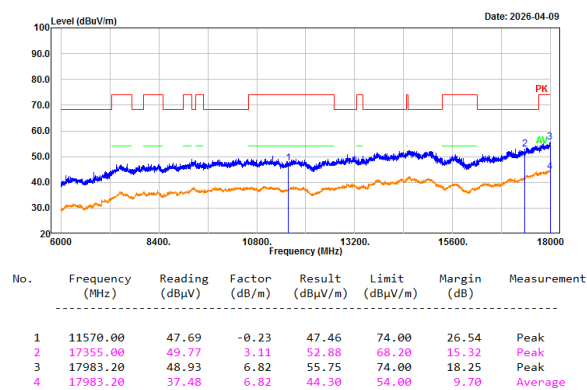

802.11a, High Channel, 5825MHz, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

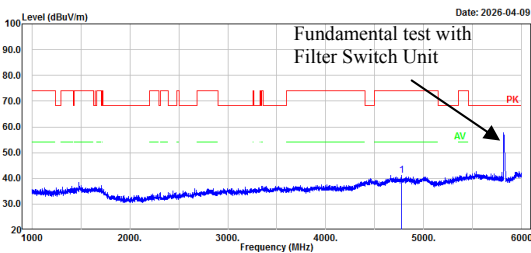


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4777.00	50.32	-9.05	41.27	74.00	32.73	Peak

802.11a, High Channel, 5825MHz, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IUC-9
Tester: Leo Xiao

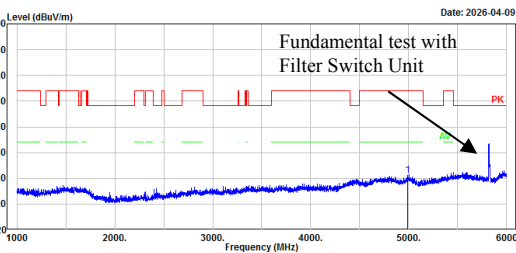

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4990.00	50.04	-8.87	41.17	74.00	32.83	Peak

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3IUC-9
Tester: Leo Xiao

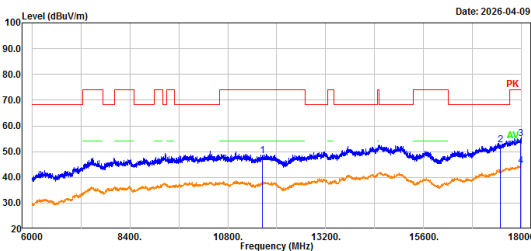

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11650.00	48.52	-0.21	48.31	74.00	25.69	Peak
2	17475.00	48.98	3.50	52.48	68.20	15.72	Peak
3	17976.00	48.35	6.75	55.10	74.00	18.90	Peak
4	17976.00	37.73	6.75	44.48	54.00	9.52	Average


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao



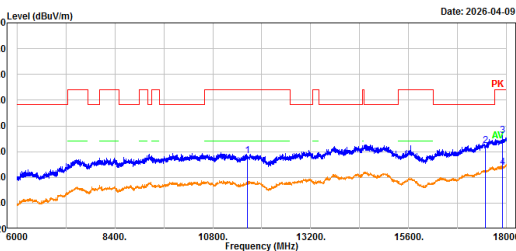


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11650.00	48.70	-0.21	48.49	74.00	25.51	Peak
2	17475.00	48.95	3.50	52.45	68.20	15.75	Peak
3	17901.60	49.85	6.26	56.11	74.00	17.89	Peak
4	17901.60	37.50	6.26	43.76	54.00	10.24	Average


802.11ac20, Low Channel, 5745MHz, Horizontal

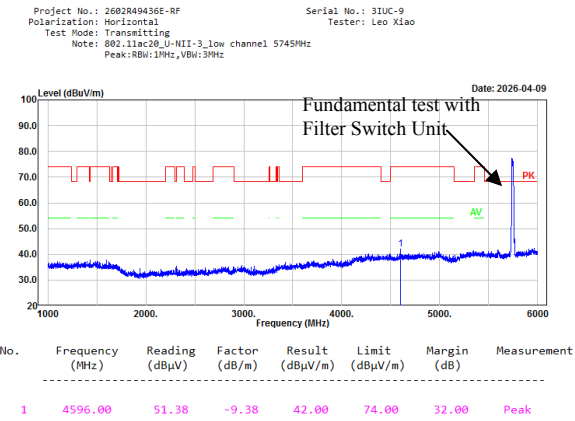




802.11ac20, Low Channel, 5745MHz, Vertical

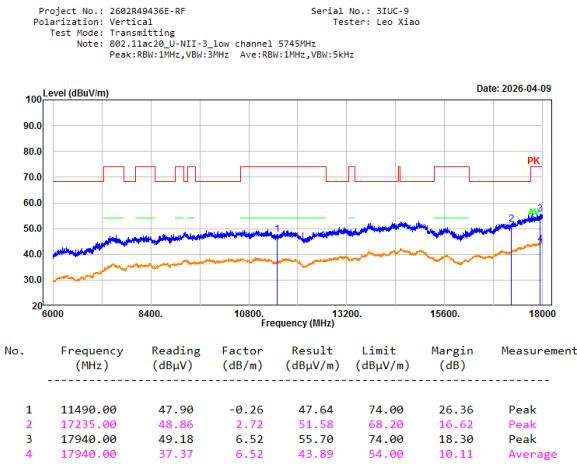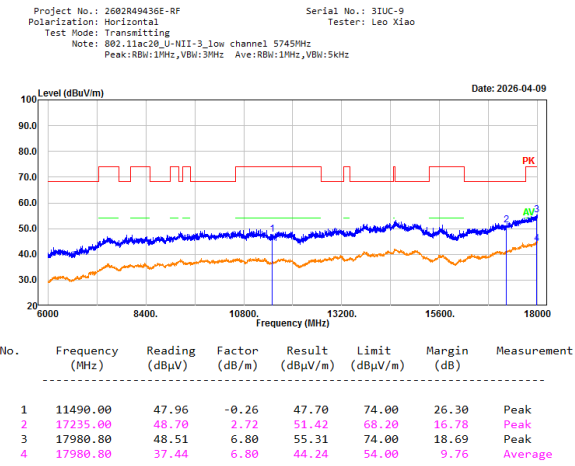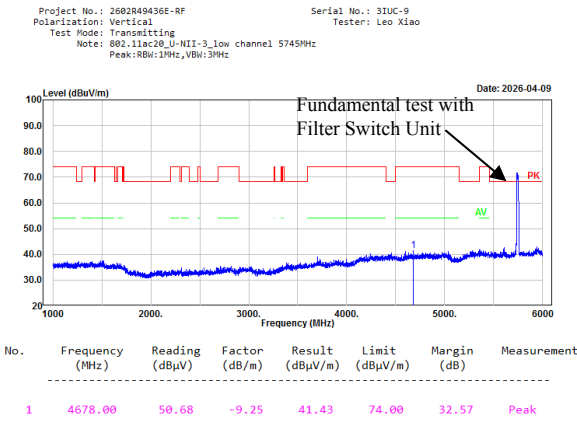

802.11ac20, Middle Channel, 5785MHz, Horizontal

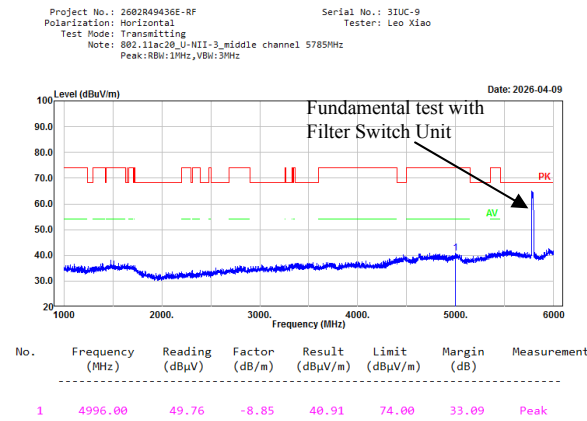


802.11ac20, Middle Channel, 5785MHz, Vertical

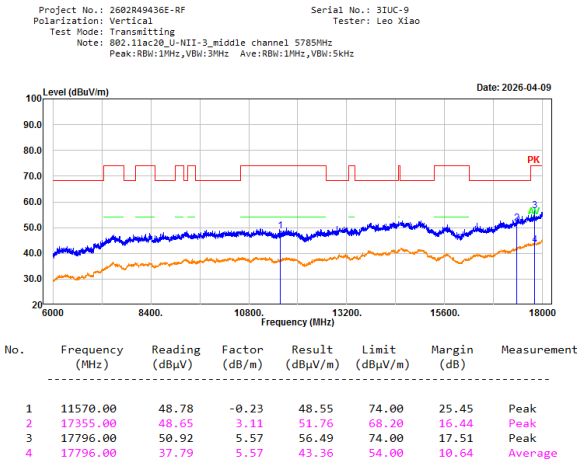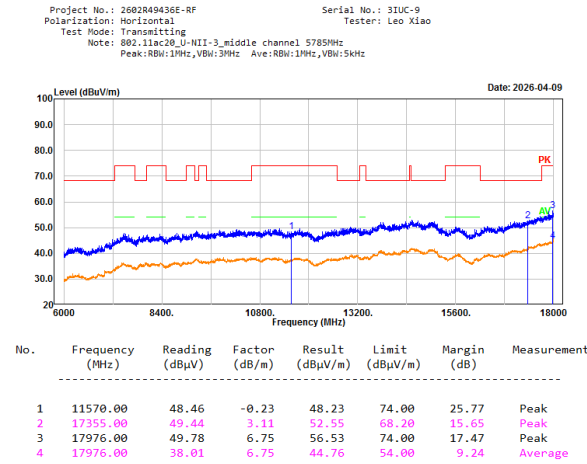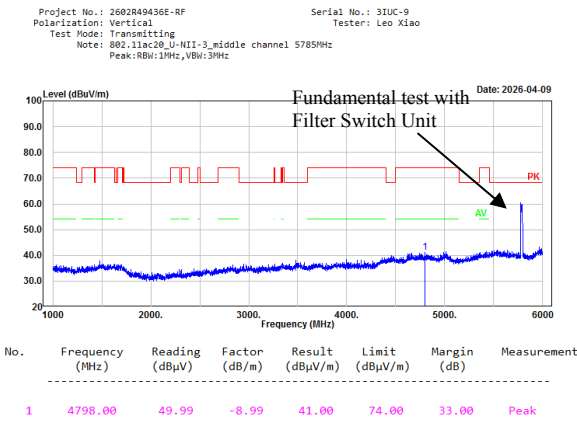

802.11ac20, High Channel, 5825MHz, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

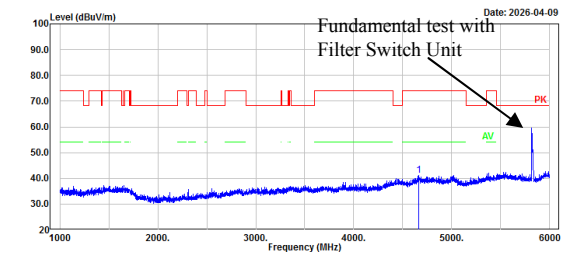


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4660.00	50.28	-9.28	41.00	74.00	33.00	Peak

802.11ac20, High Channel, 5825MHz, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IUC-9
Tester: Leo Xiao

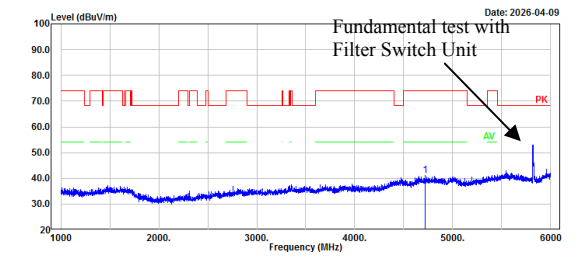

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	4720.00	50.33	-9.16	41.17	74.00	32.83	Peak

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Serial No.: 3IUC-9
Tester: Leo Xiao

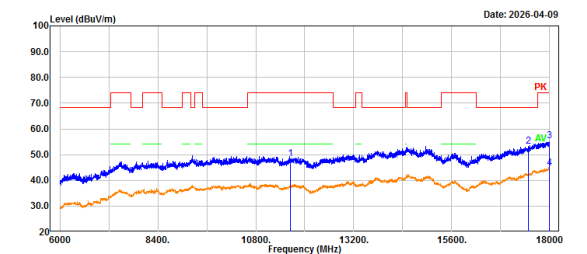

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11650.00	48.72	-0.21	48.51	74.00	25.49	Peak
2	17475.00	49.84	3.50	53.34	68.20	14.86	Peak
3	17995.20	48.46	6.89	55.35	74.00	18.65	Peak
4	17995.20	37.78	6.89	44.67	54.00	9.33	Average


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao



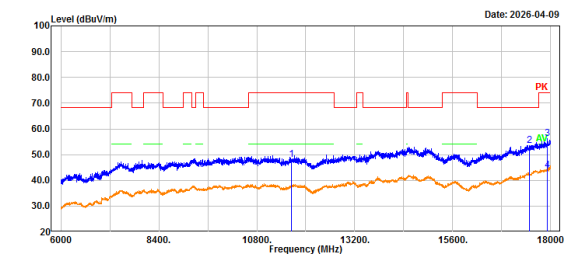


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11650.00	48.17	-0.21	47.96	74.00	26.04	Peak
2	17475.00	49.86	3.50	53.36	68.20	14.84	Peak
3	17911.20	49.78	6.33	56.11	74.00	17.89	Peak
4	17911.20	37.46	6.33	43.79	54.00	10.21	Average


802.11ac40, Low Channel, 5755MHz, Horizontal

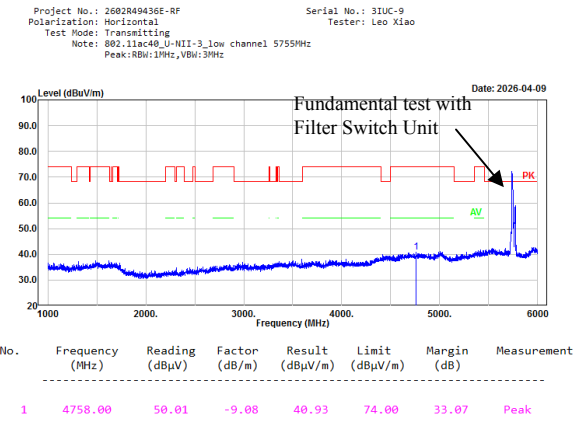




802.11ac40, Low Channel, 5755MHz, Vertical

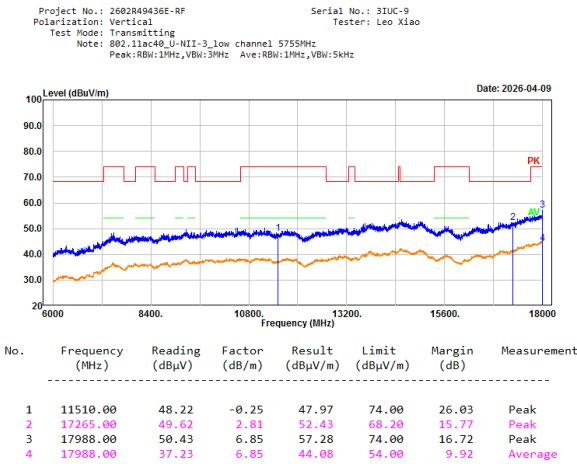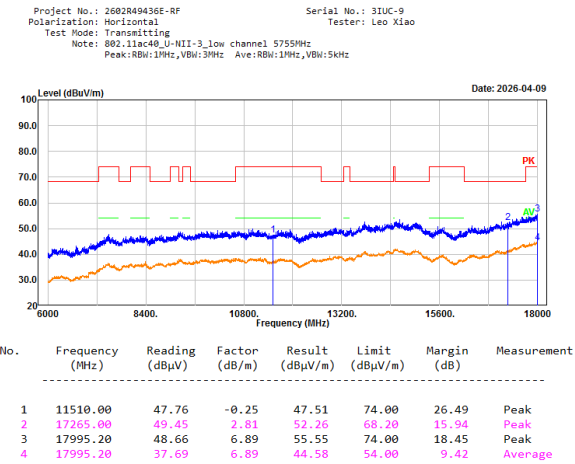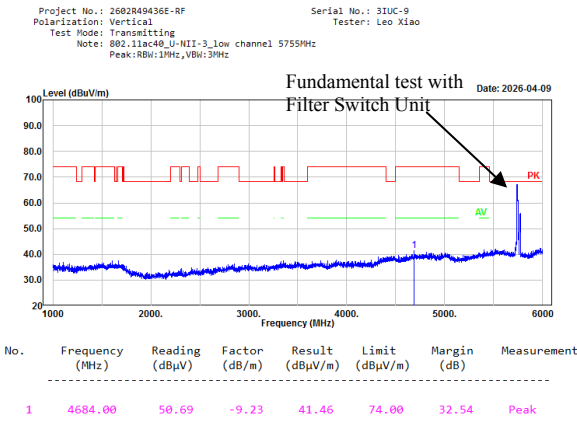

802.11ac40, High Channel, 5795MHz, Horizontal

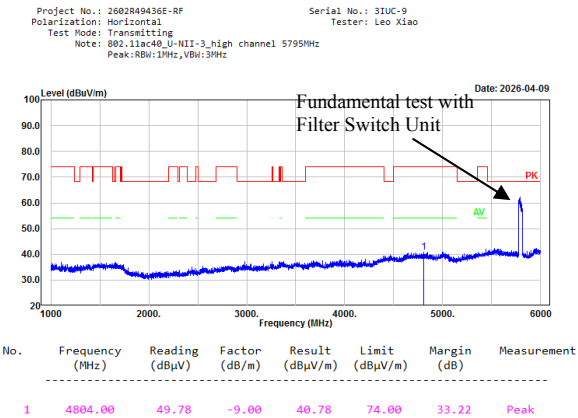


802.11ac40, High Channel, 5795MHz, Vertical

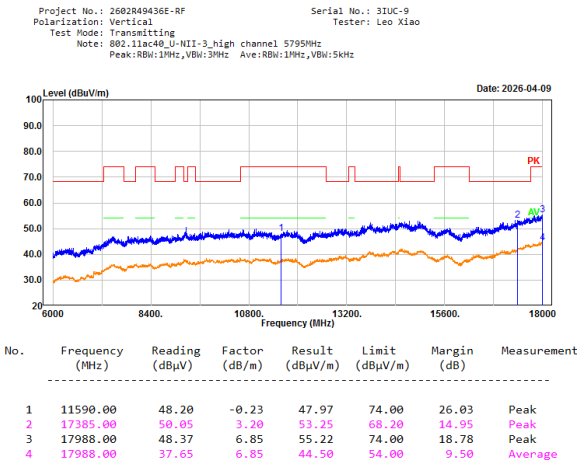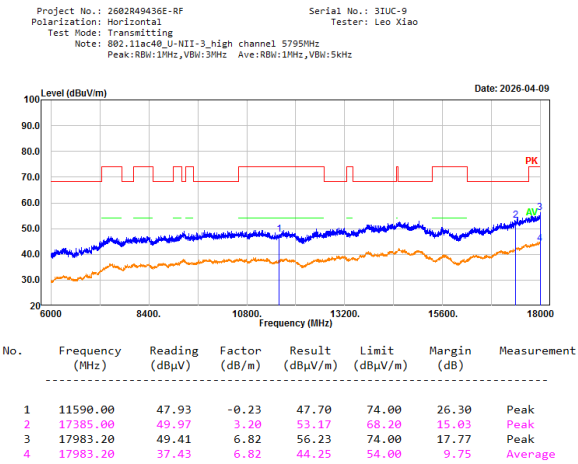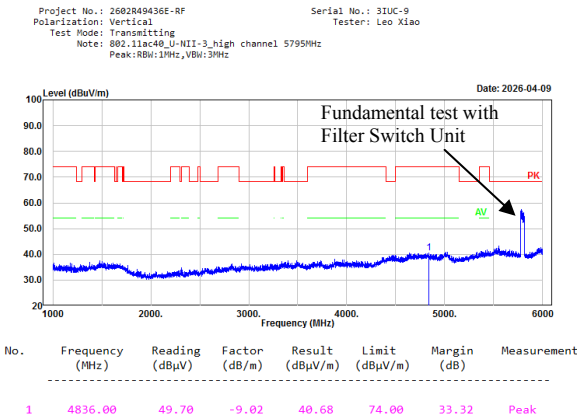




18-40GHz:

No Emission was detected in the range 18-40GHz, test was performed on the mode and channel which with the maximum power.

802.11a 5320MHz, Horizontal

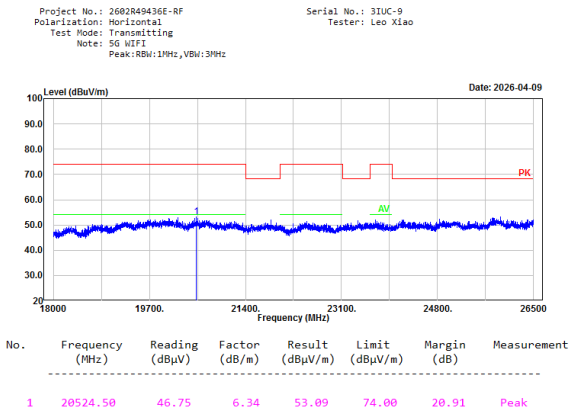


802.11a 5320MHz, Vertical

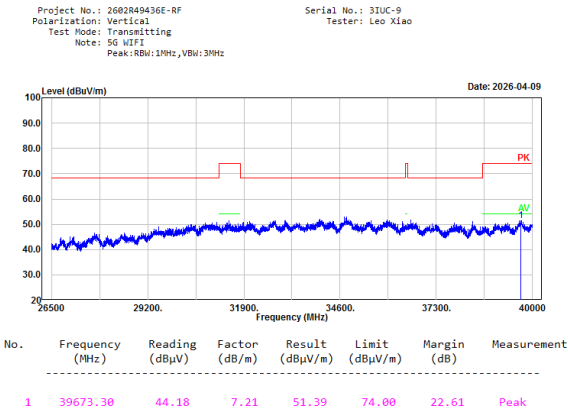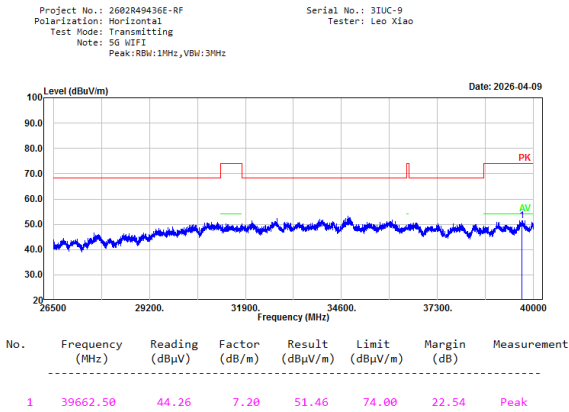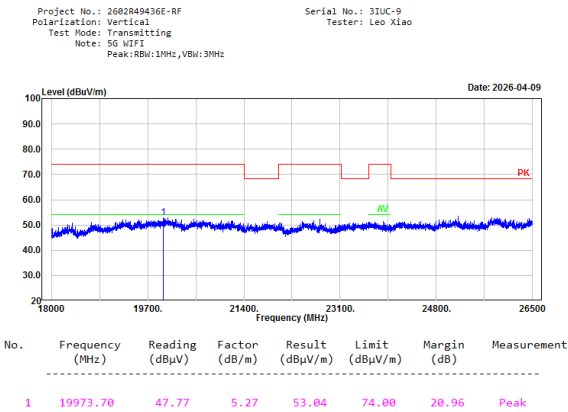


Bandedge:
5150-5250MHz:


802.11a, 5180MHz, Bandedge, Horizontal

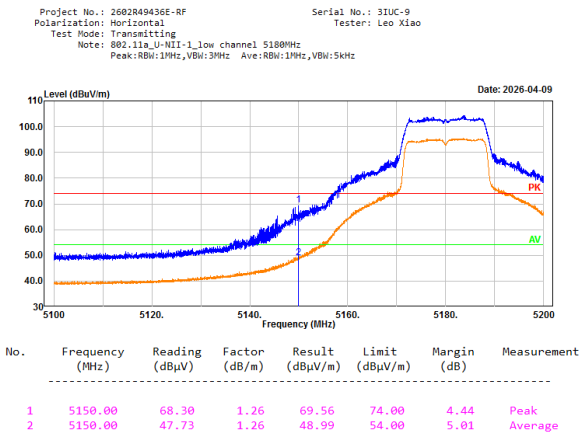


802.11a, 5180MHz, Bandedge, Vertical

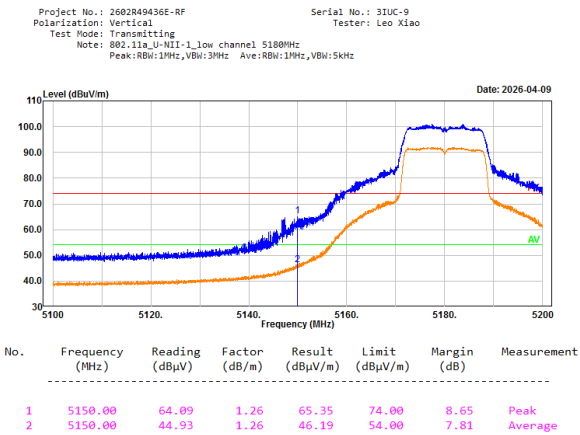

802.11a, 5240MHz, Bandedge, Horizontal

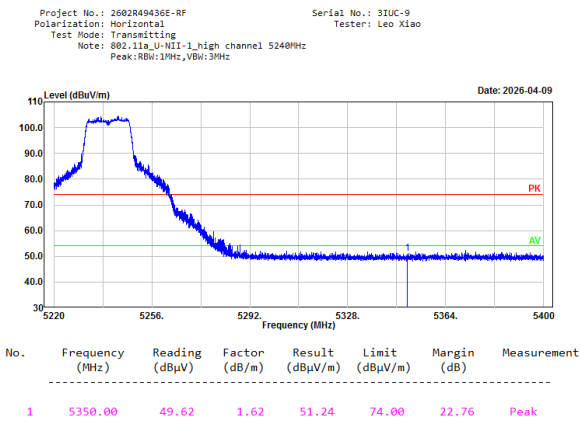


802.11a, 5240MHz, Bandedge, Vertical

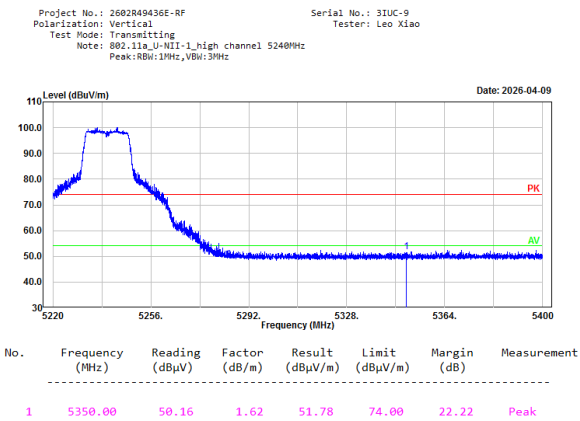

802.11ac20, 5180MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1_low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao

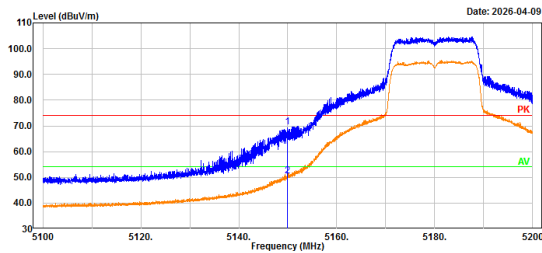


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	68.33	1.26	69.59	74.00	4.41	Peak
2	5150.00	49.32	1.26	50.58	54.00	3.42	Average

802.11ac20, 5180MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1_low channel 5180MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao

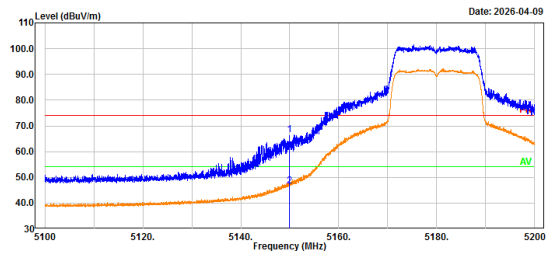


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	65.21	1.26	66.47	74.00	7.53	Peak
2	5150.00	45.47	1.26	46.73	54.00	7.27	Average

802.11ac20, 5240MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1_high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

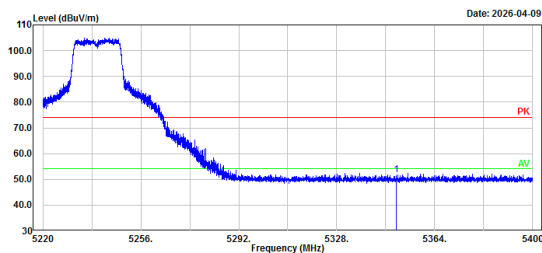


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	50.17	1.62	51.79	74.00	22.21	Peak

802.11ac20, 5240MHz, Bandedge, Vertical


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1_high channel 5240MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

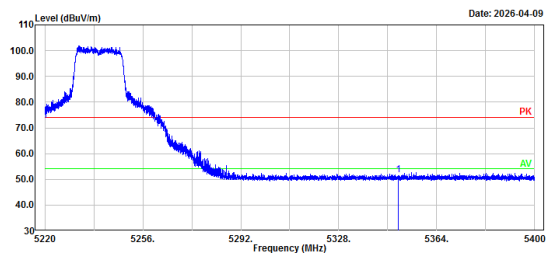


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	50.02	1.62	51.64	74.00	22.36	Peak


802.11ac40, 5190MHz, Bandedge, Horizontal

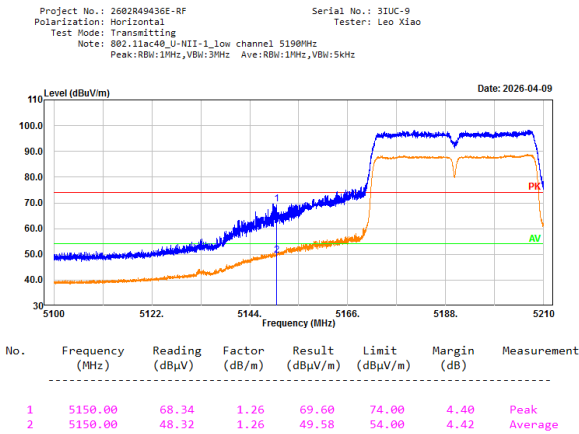


802.11ac40, 5190MHz, Bandedge, Vertical

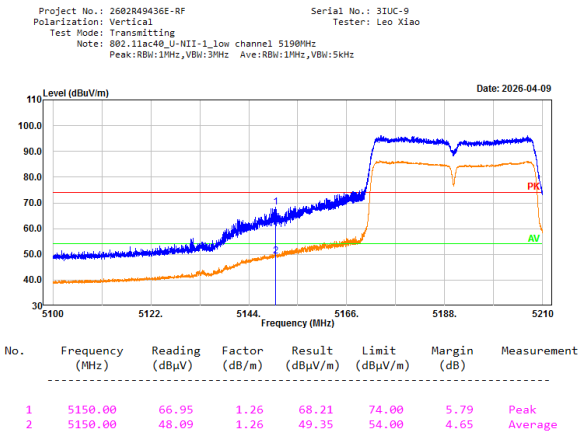

802.11ac40, 5230MHz, Bandedge, Horizontal

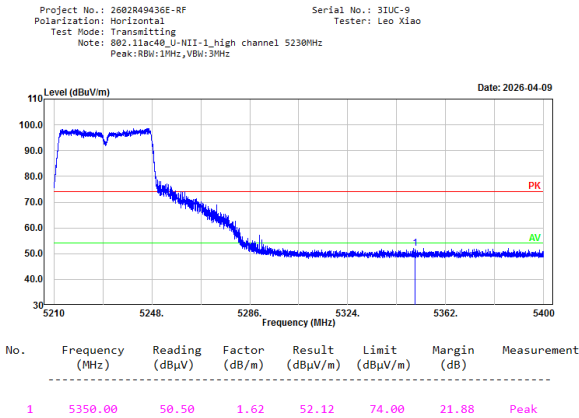


802.11ac40, 5230MHz, Bandedge, Vertical

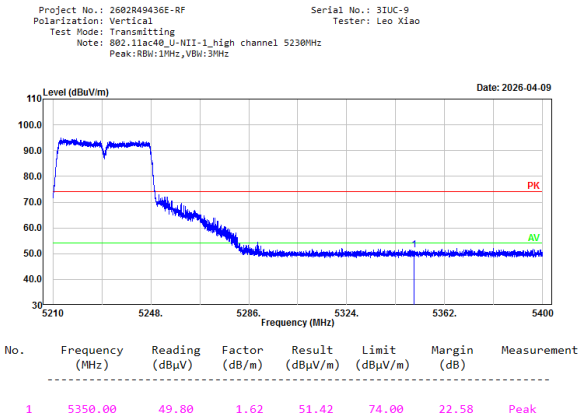


5250-5350MHz:


802.11a, 5260MHz, Bandedge, Horizontal

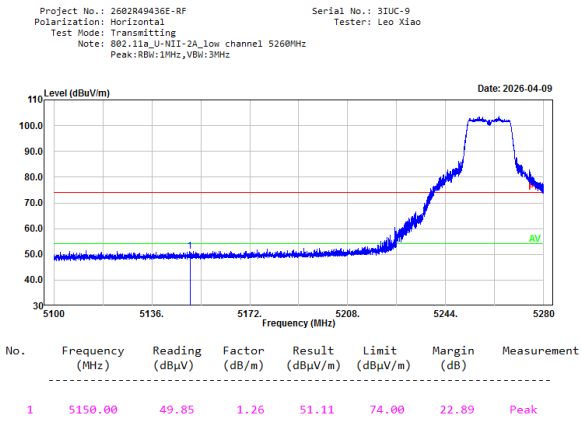


802.11a, 5260MHz, Bandedge, Vertical

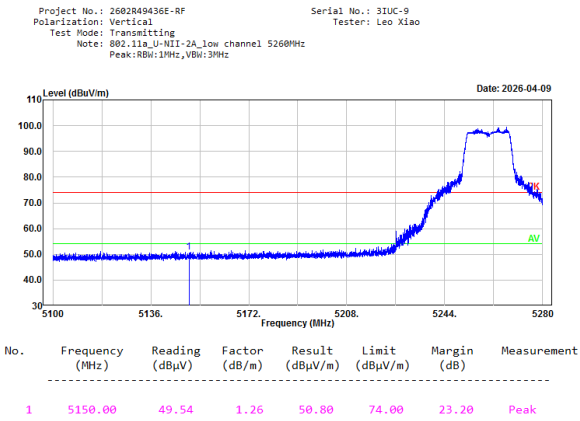

802.11a, 5320MHz, Bandedge, Horizontal

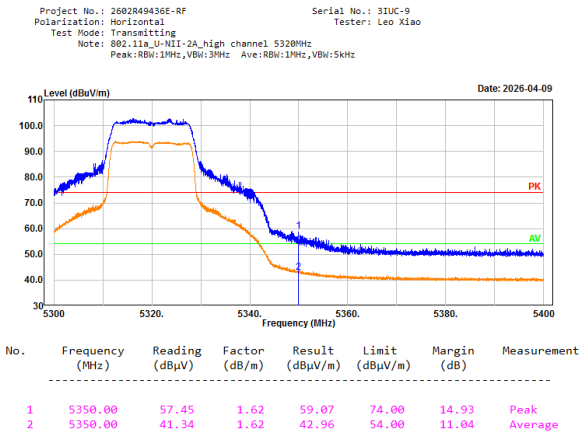


802.11a, 5320MHz, Bandedge, Vertical

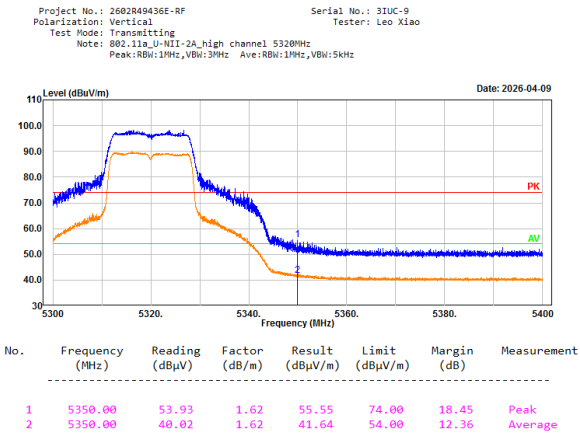

802.11ac20, 5260MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A_low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

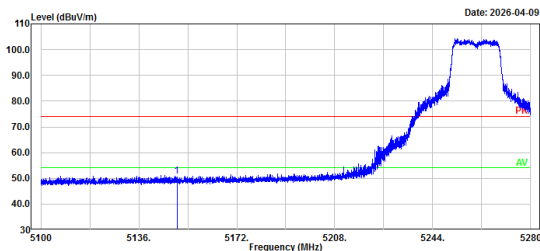


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	49.49	1.26	50.75	74.00	23.25	Peak

802.11ac20, 5260MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A_low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

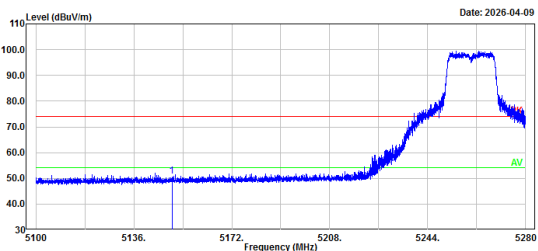


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	49.62	1.26	50.88	74.00	23.12	Peak

802.11ac20, 5320MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A_high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao

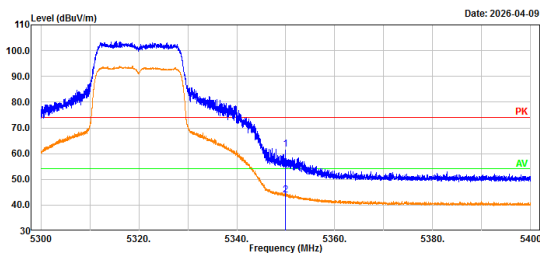


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	60.00	1.62	61.62	74.00	12.38	Peak
2	5350.00	42.27	1.62	43.89	54.00	10.11	Average

802.11ac20, 5320MHz, Bandedge, Vertical


Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A_high channel 5320MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 3IUC-9
Tester: Leo Xiao

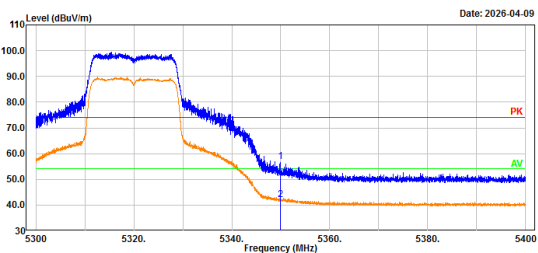


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	55.14	1.62	56.76	74.00	17.24	Peak
2	5350.00	40.41	1.62	42.03	54.00	11.97	Average


802.11ac40, 5270MHz, Bandedge, Horizontal

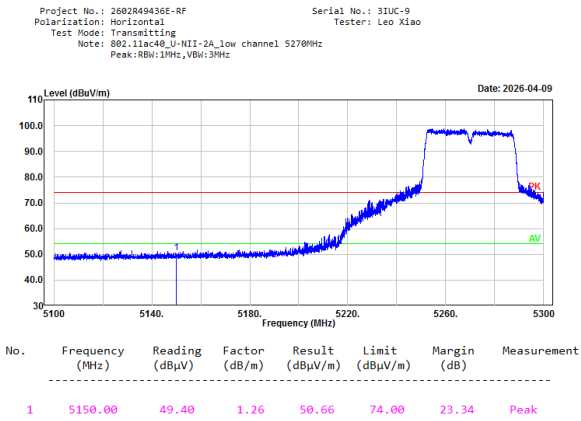


802.11ac40, 5270MHz, Bandedge, Vertical

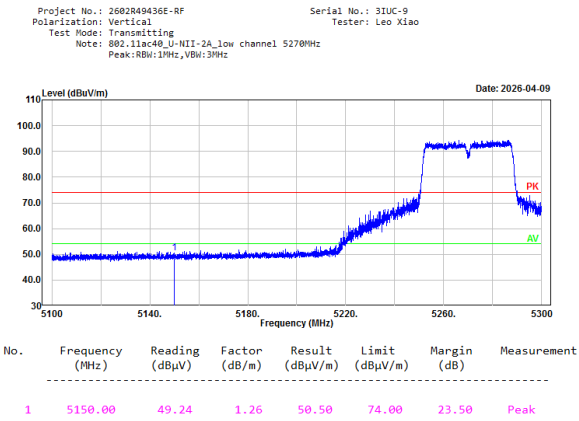

802.11ac40, 5310MHz, Bandedge, Horizontal

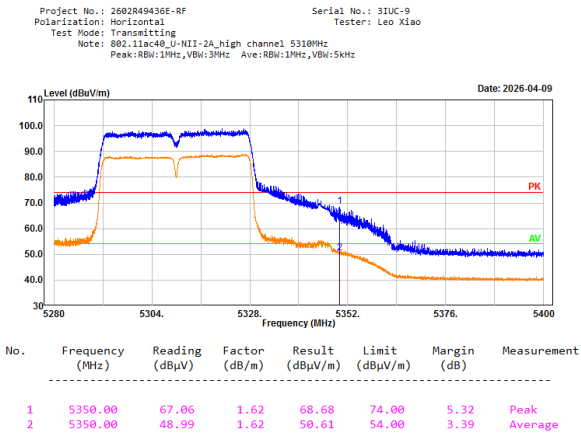


802.11ac40, 5310MHz, Bandedge, Vertical

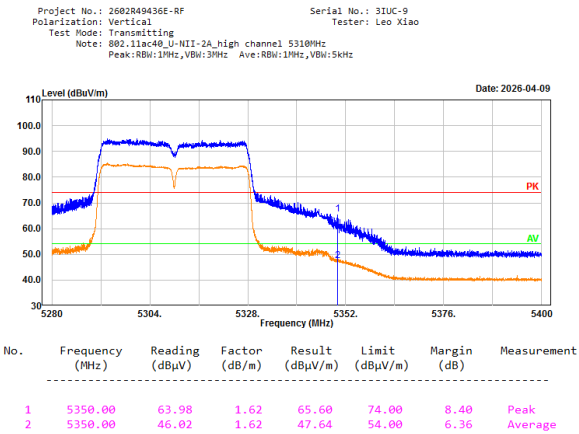


5470-5725MHz:


802.11a, 5500MHz, Bandedge, Horizontal

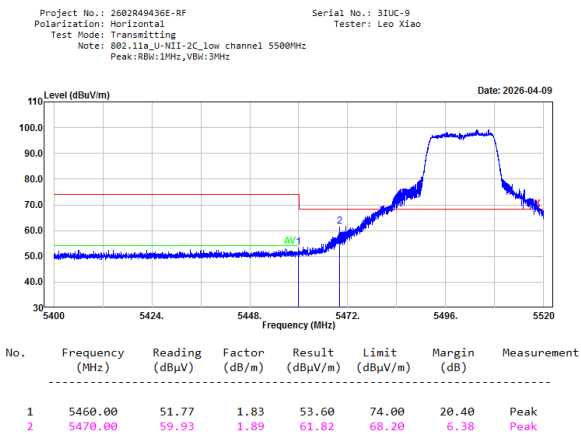


802.11a, 5500MHz, Bandedge, Vertical

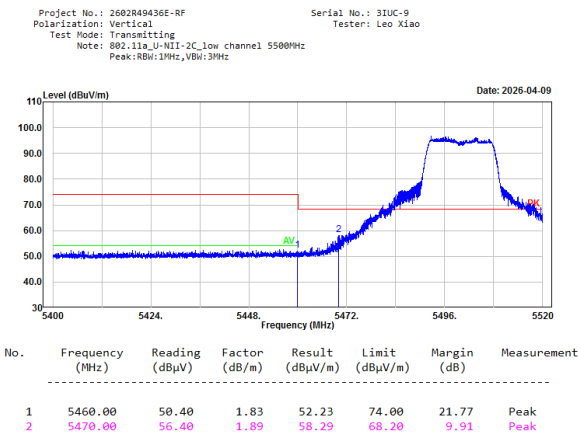


802.11a, 5700MHz, Bandedge, Horizontal

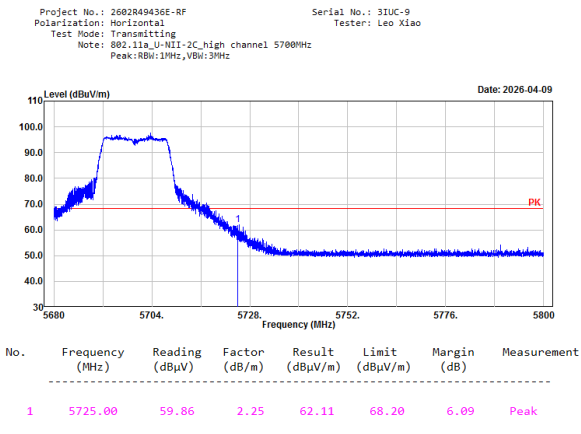


802.11a, 5700MHz, Bandedge, Vertical

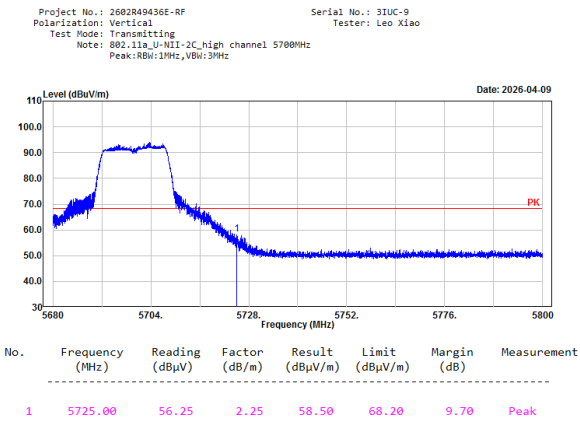


802.11ac20, 5500MHz, Bandedge, Horizontal

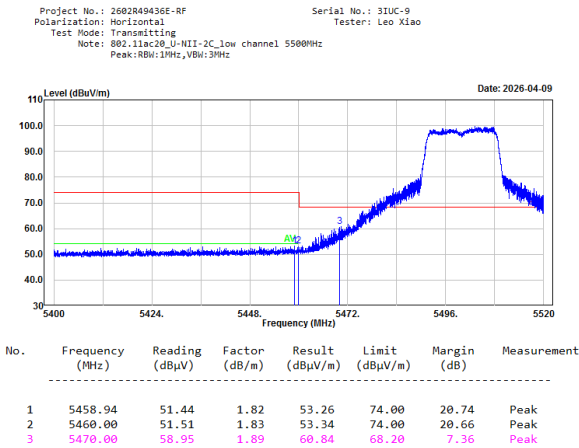


802.11ac20, 5500MHz, Bandedge, Vertical

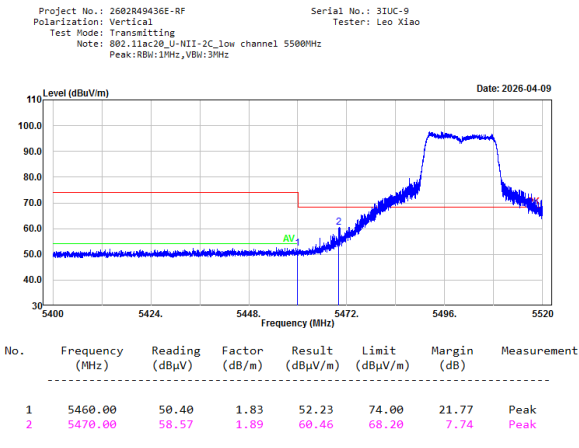


802.11ac20, 5700MHz, Bandedge, Horizontal

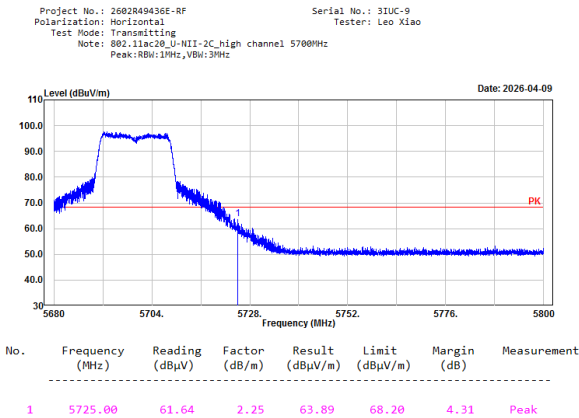


802.11ac20, 5700MHz, Bandedge, Vertical

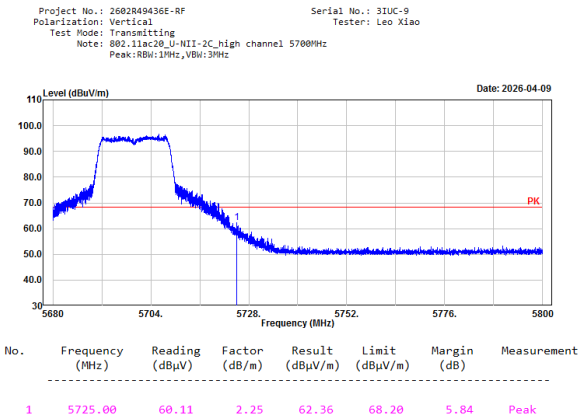


802.11ac40, 5510MHz, Bandedge, Horizontal

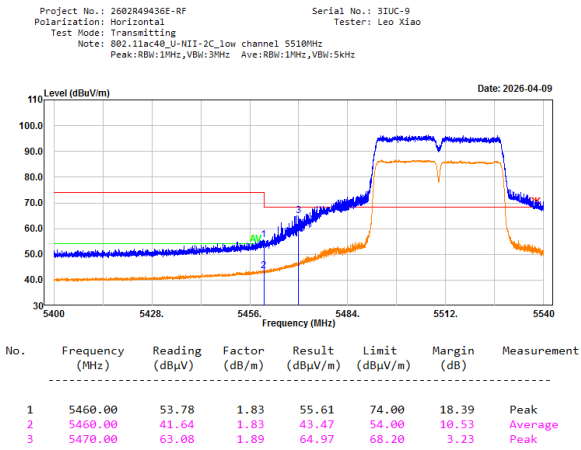


802.11ac40, 5510MHz, Bandedge, Vertical

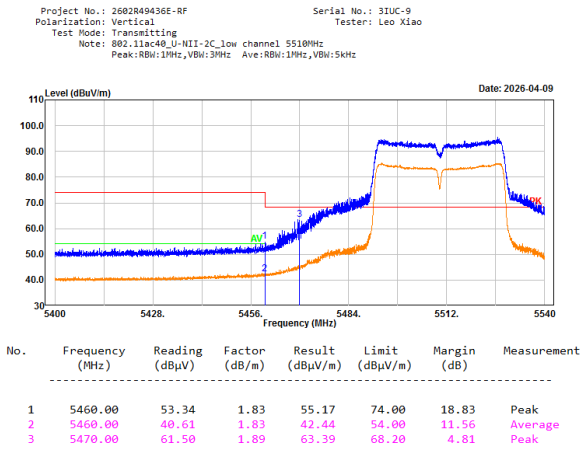

802.11ac40, 5670MHz, Bandedge, Horizontal

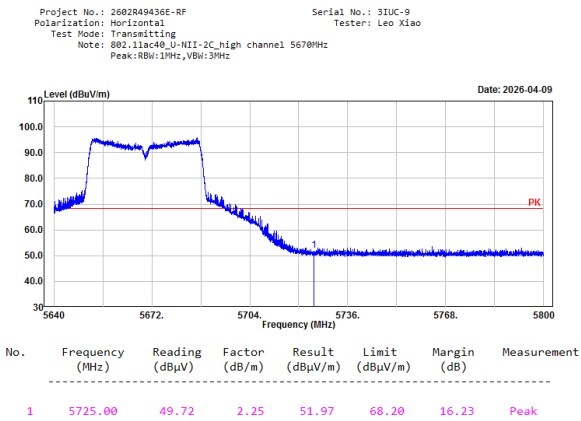

802.11ac40, 5670MHz, Bandedge, Vertical

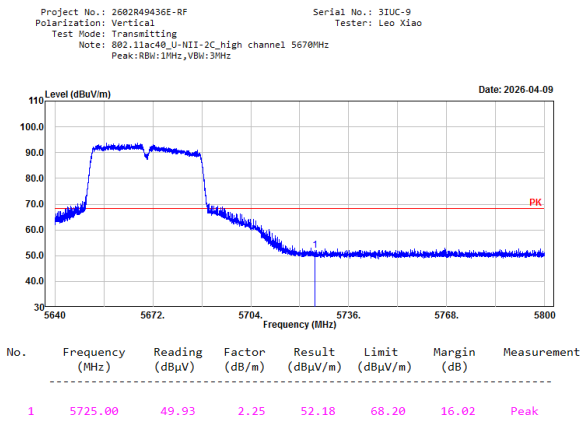


5725-5850MHz:

802.11a, 5745MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a U-NII-3_low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

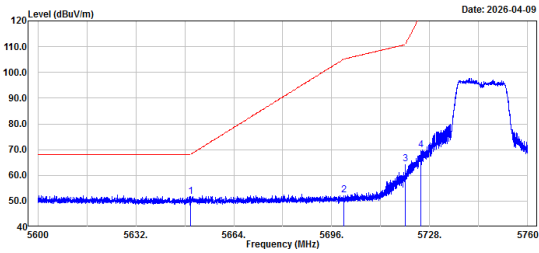


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	49.61	2.16	51.77	68.20	16.43	Peak
2	5700.00	50.13	2.22	52.35	105.20	52.85	Peak
3	5720.00	62.28	2.24	64.52	110.80	46.28	Peak
4	5725.00	67.54	2.25	69.79	122.20	52.41	Peak

802.11a, 5745MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a U-NII-3_low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

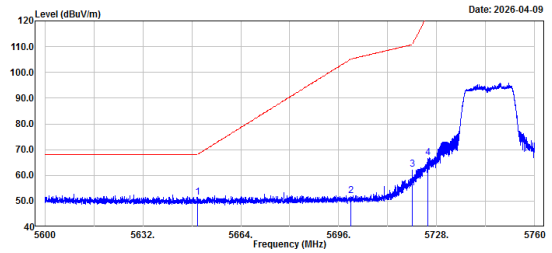


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	49.33	2.16	51.49	68.20	16.71	Peak
2	5700.00	49.97	2.22	52.19	105.20	53.01	Peak
3	5720.00	60.16	2.24	62.40	110.80	48.40	Peak
4	5725.00	64.50	2.25	66.75	122.20	55.45	Peak

802.11a, 5825MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

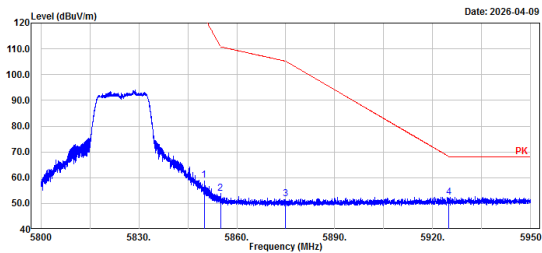


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	56.55	2.40	58.95	122.20	63.25	Peak
2	5855.00	51.55	2.42	53.97	110.80	56.83	Peak
3	5875.00	49.37	2.44	51.81	105.20	53.39	Peak
4	5925.00	49.98	2.48	52.46	68.20	15.74	Peak

802.11a, 5825MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a U-NII-3_high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

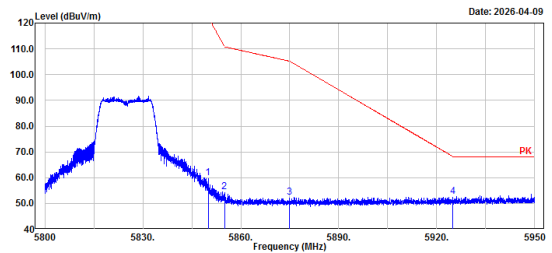


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	57.50	2.40	59.90	122.20	62.30	Peak
2	5855.00	52.21	2.42	54.63	110.80	56.17	Peak
3	5875.00	49.90	2.44	52.34	105.20	52.86	Peak
4	5925.00	50.09	2.48	52.57	68.20	15.63	Peak

802.11ac20, 5745MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_low channel 5745MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

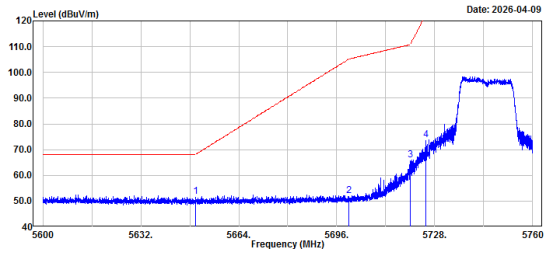


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	49.61	2.16	51.77	68.20	16.43	Peak
2	5700.00	49.90	2.22	52.12	105.20	53.08	Peak
3	5720.00	63.70	2.24	65.94	110.80	44.86	Peak
4	5725.00	71.43	2.25	73.68	122.20	48.52	Peak

802.11ac20, 5745MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_low channel 5745MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

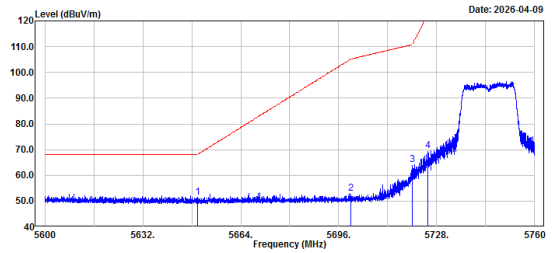


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	49.39	2.16	51.55	68.20	16.65	Peak
2	5700.00	50.65	2.22	52.87	105.20	52.33	Peak
3	5720.00	61.86	2.24	64.10	110.80	46.70	Peak
4	5725.00	67.19	2.25	69.44	122.20	52.76	Peak

802.11ac20, 5825MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_high channel 5825MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

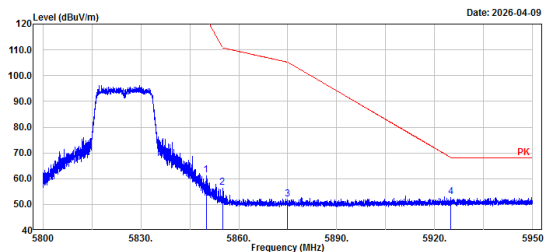


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	59.07	2.40	61.47	122.20	60.73	Peak
2	5855.00	54.11	2.42	56.53	110.80	54.27	Peak
3	5875.00	49.62	2.44	52.06	105.20	53.14	Peak
4	5925.00	50.36	2.48	52.84	68.20	15.36	Peak

802.11ac20, 5825MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3_high channel 5825MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

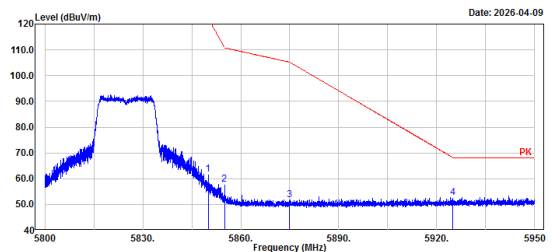


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	59.32	2.40	61.72	122.20	60.48	Peak
2	5855.00	55.25	2.42	57.67	110.80	53.13	Peak
3	5875.00	49.36	2.44	51.80	105.20	53.40	Peak
4	5925.00	50.10	2.48	52.58	68.20	15.62	Peak

802.11ac40, 5755MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3_low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

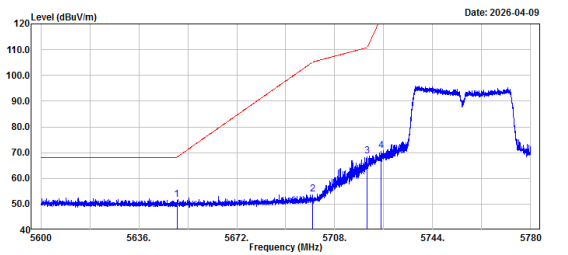


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	49.67	2.16	51.83	68.20	16.37	Peak
2	5700.00	51.58	2.22	53.80	105.20	51.40	Peak
3	5720.00	66.34	2.24	68.58	110.80	42.22	Peak
4	5725.00	68.46	2.25	70.71	122.20	51.49	Peak

802.11ac40, 5755MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3_low channel 5755MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

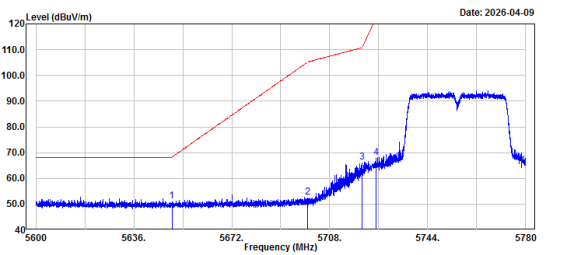


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	48.93	2.16	51.09	68.20	17.11	Peak
2	5700.00	50.42	2.22	52.64	105.20	52.56	Peak
3	5720.00	64.09	2.24	66.33	110.80	44.47	Peak
4	5725.00	65.69	2.25	67.94	122.20	54.26	Peak

802.11ac40, 5795MHz, Bandedge, Horizontal

Project No.: 2602R49436E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3_high channel 5795MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

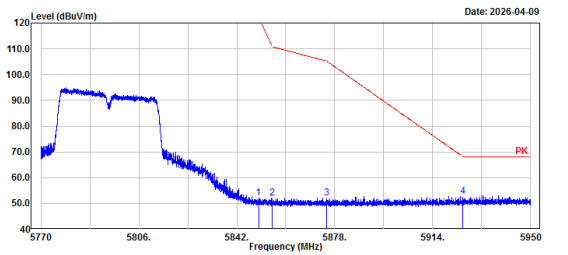


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	49.58	2.40	51.98	122.20	70.22	Peak
2	5855.00	49.74	2.42	52.16	110.80	58.64	Peak
3	5875.00	49.58	2.44	52.02	105.20	53.18	Peak
4	5925.00	50.18	2.48	52.66	68.20	15.54	Peak

802.11ac40, 5795MHz, Bandedge, Vertical

Project No.: 2602R49436E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac40_U-NII-3_high channel 5795MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IUC-9
Tester: Leo Xiao

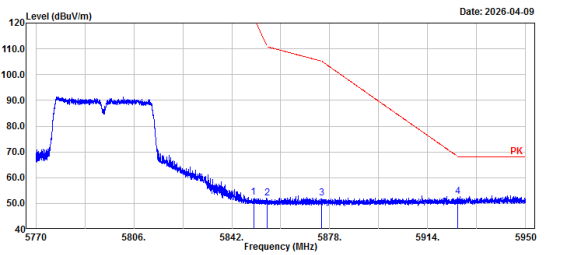

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	50.10	2.40	52.50	122.20	69.70	Peak
2	5855.00	49.67	2.42	52.09	110.80	58.71	Peak
3	5875.00	49.72	2.44	52.16	105.20	53.04	Peak
4	5925.00	50.07	2.48	52.55	68.20	15.65	Peak

5.3 Emission Bandwidth

Serial No.:	3IUC-1	Test Date:	2026/04/10~2026/05/07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.4~25.8	Relative Humidity: (%)	50~59	ATM Pressure: (kPa)	100.3~100.6
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM504	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02
JD	Test Software	JD Auto Test System	V1.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

26dB Emission Bandwidth
5150-5250MHz

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5180	38.043
	5200	38.530
	5240	38.383
802.11ac20	5180	36.307
	5200	39.770
	5240	39.369
802.11ac40	5190	70.087
	5230	70.489

5250-5350MHz

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5260	37.816
	5280	37.358
	5320	38.295
802.11ac20	5260	36.103
	5280	35.584
	5320	37.857
802.11ac40	5270	69.914
	5310	70.565

5470-5725MHz


Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5500	32.523
	5600	30.888
	5700	29.091
802.11ac20	5500	35.030
	5600	29.583
	5700	33.699
802.11ac40	5510	70.842
	5590	70.390
	5670	70.552

6dB Emission Bandwidth**5725-5850MHz**

Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11a	5745	16.467	0.5	Pass
	5785	16.467	0.5	Pass
	5825	16.467	0.5	Pass
802.11ac20	5745	17.518	0.5	Pass
	5785	17.518	0.5	Pass
	5825	17.367	0.5	Pass
802.11ac40	5755	36.236	0.5	Pass
	5795	36.436	0.5	Pass


5150-5250MHz

802.11a_5180MHz

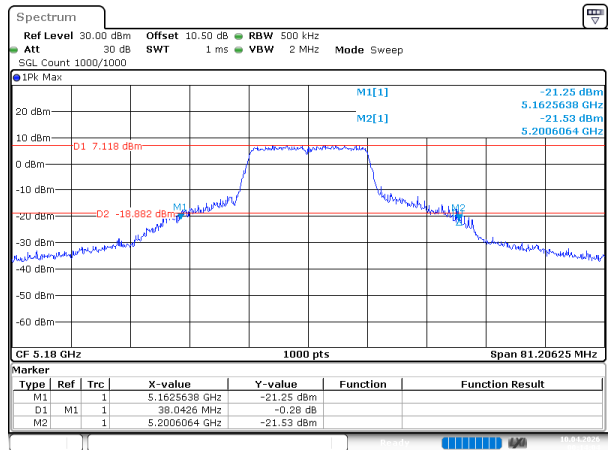


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:14:05

802.11a_5200MHz

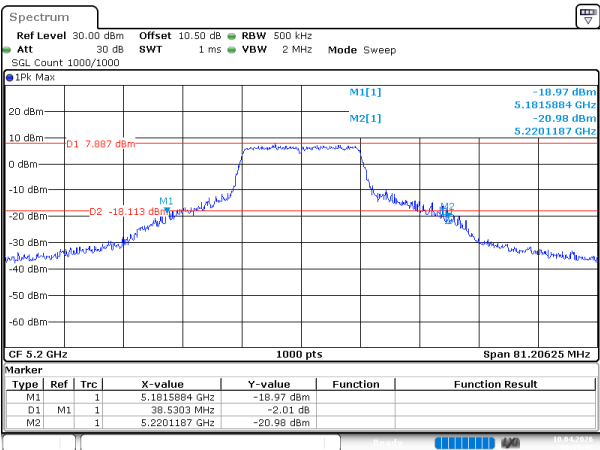


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:15:34

802.11a_5240MHz

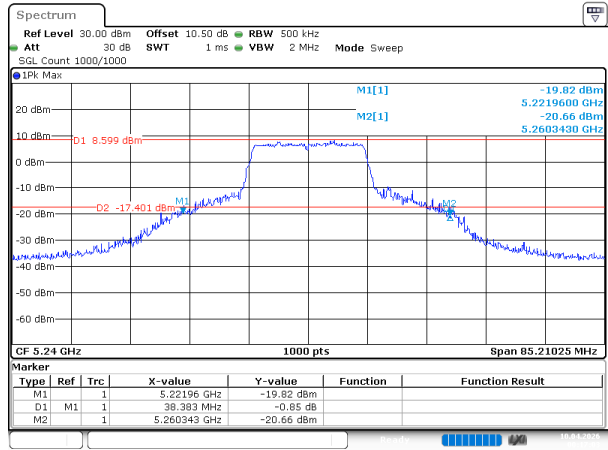


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:17:03

802.11ac20_5180MHz

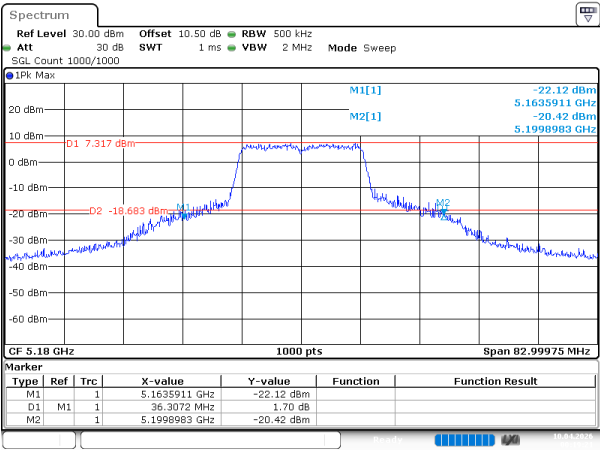


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:19:21

802.11ac20_5200MHz

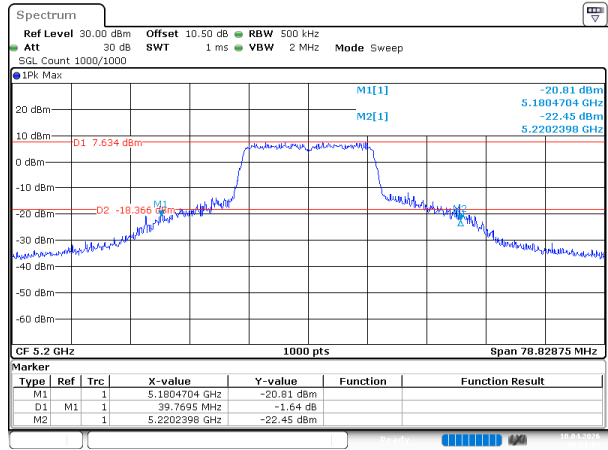


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:21:03

802.11ac20_5240MHz

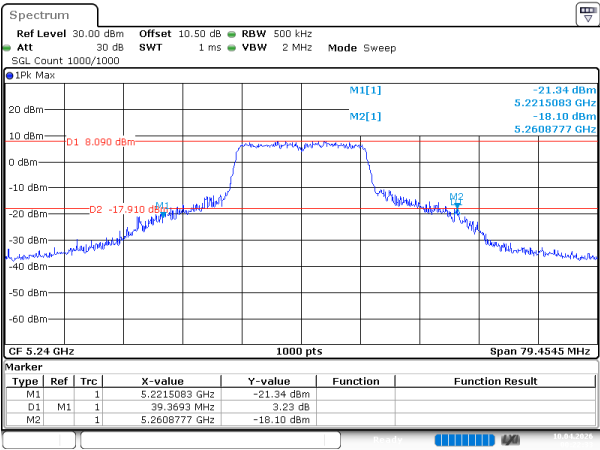


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:22:33

802.11ac40_5190MHz

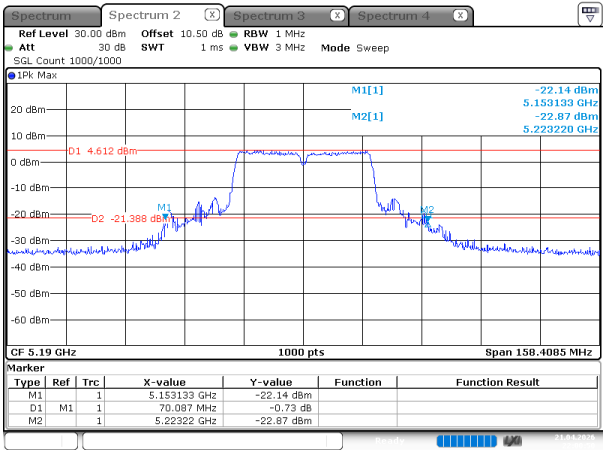

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:00:51


802.11ac40_5230MHz

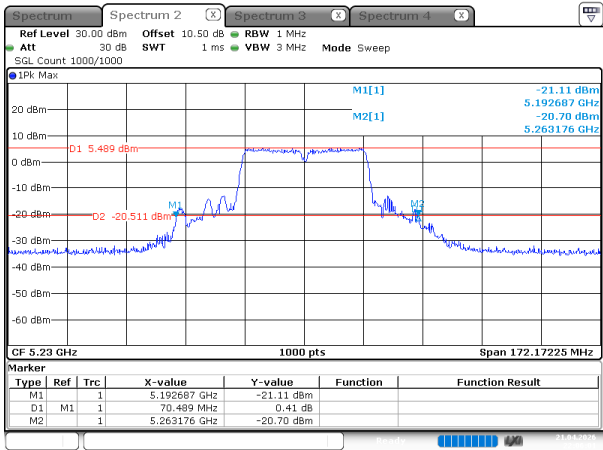

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:06:01


5250-5350MHz

802.11a_5260MHz

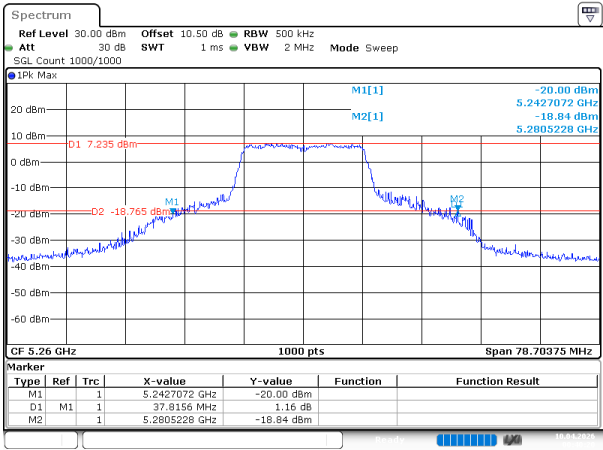


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:40:21

802.11a_5280MHz

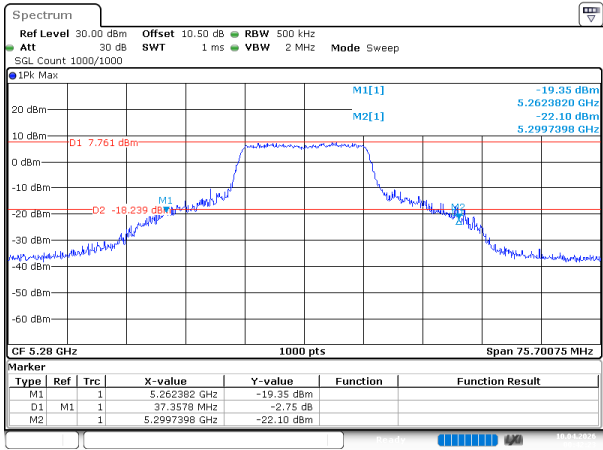


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:42:24

802.11a_5320MHz

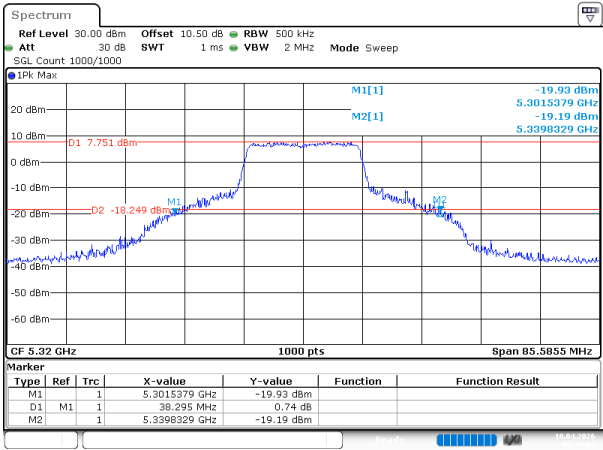


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:44:05

802.11ac20_5260MHz

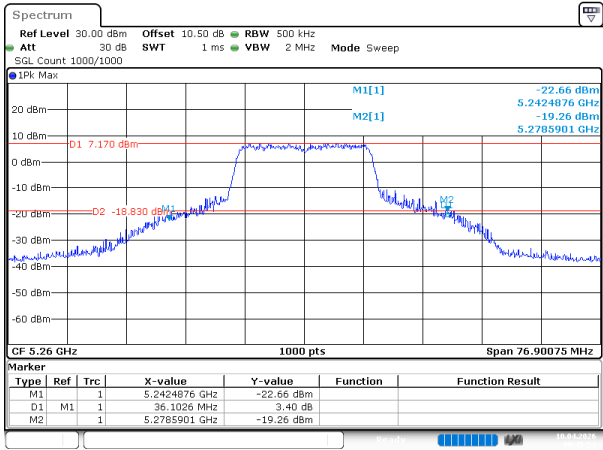


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:45:54

802.11ac20_5280MHz

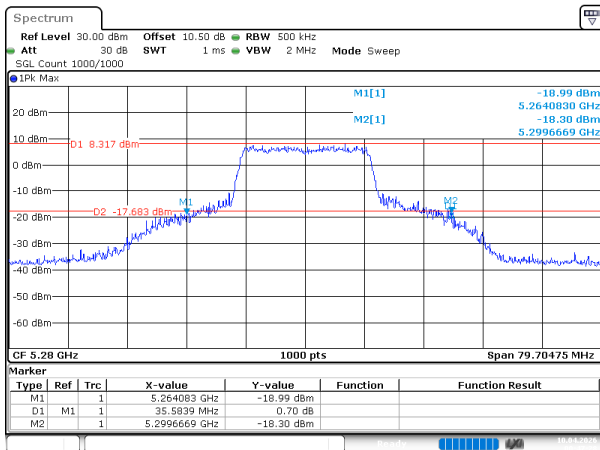


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:47:29

802.11ac20_5320MHz

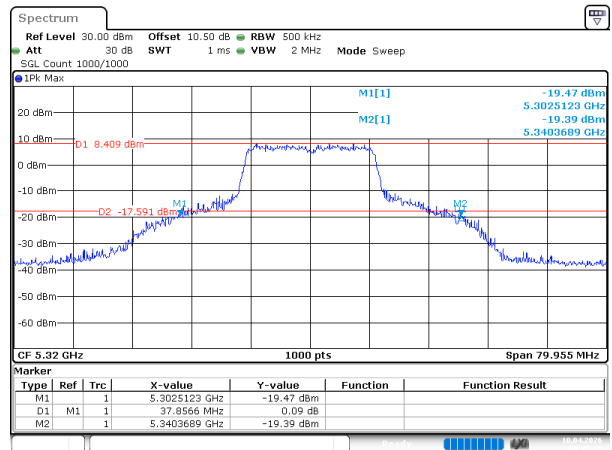


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:49:10

802.11ac40_5270MHz

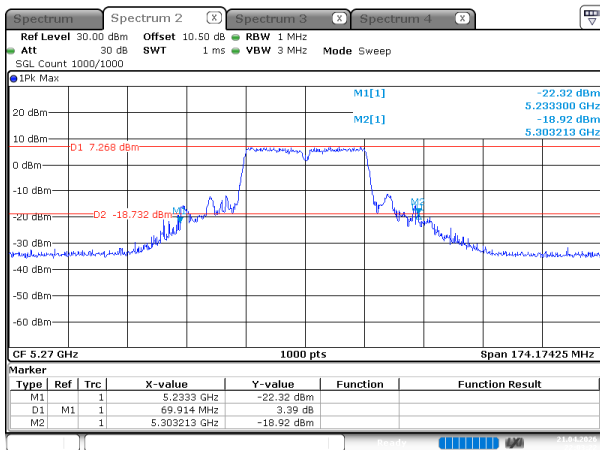

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:03:22


802.11ac40_5310MHz

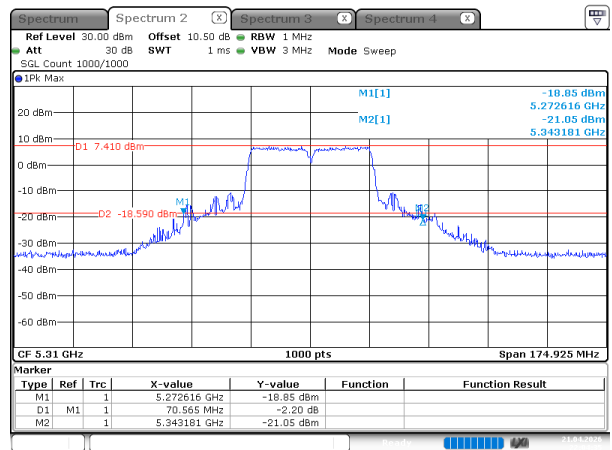

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:04:36


5470-5725MHz

802.11a_5500MHz

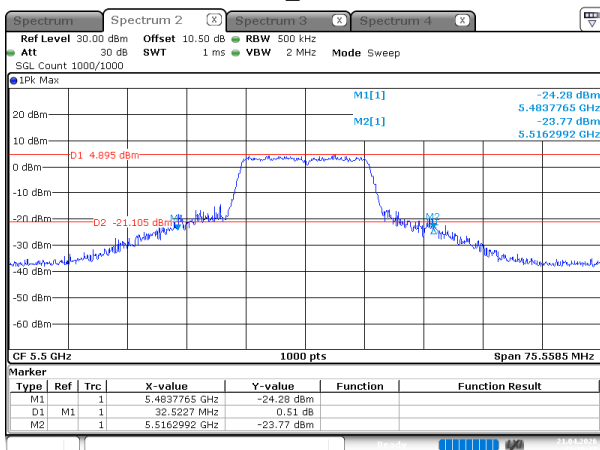


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:10:17

802.11a_5600MHz

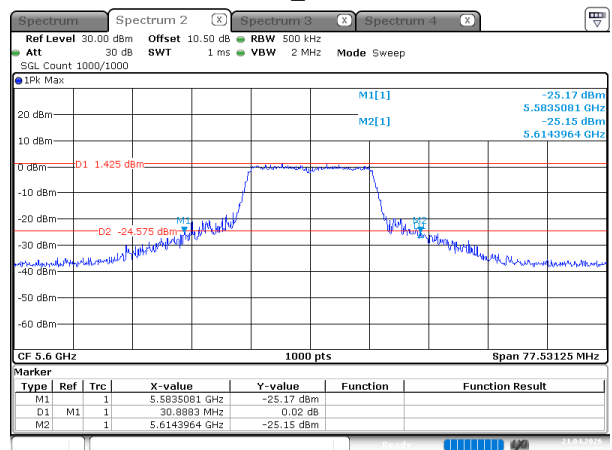


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:11:52

802.11a_5700MHz

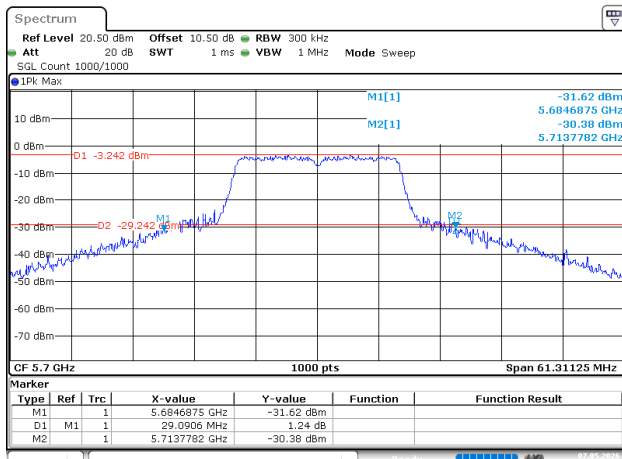


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 7.MAY.2026 18:28:10

802.11ac20_5500MHz

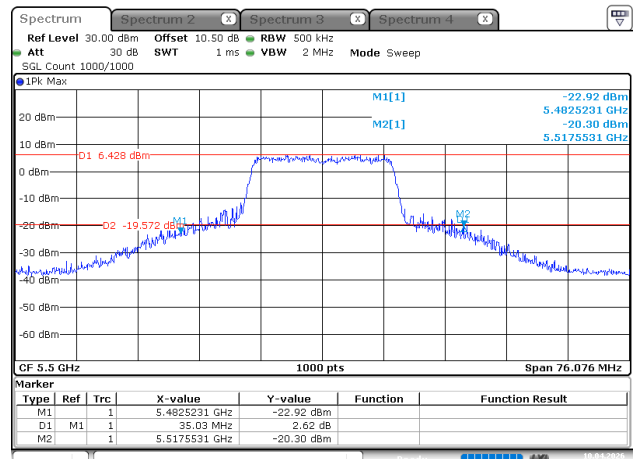


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:23:15

802.11ac20_5600MHz

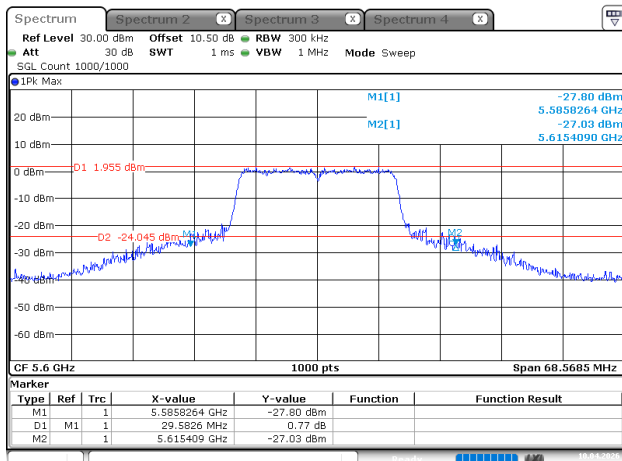


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:24:47

802.11ac20_5700MHz

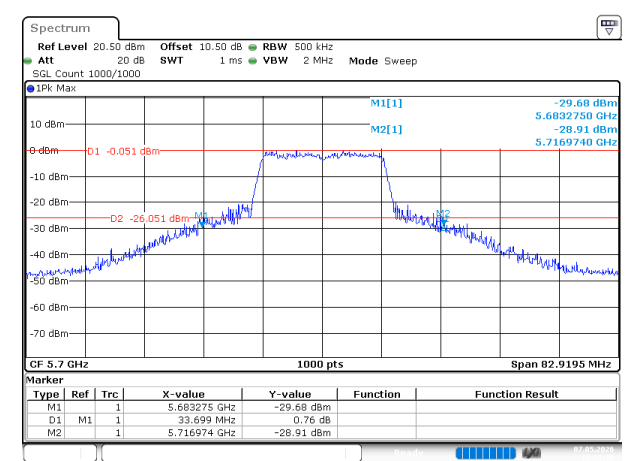


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 7.MAY.2026 19:21:31

802.11ac40_5510MHz

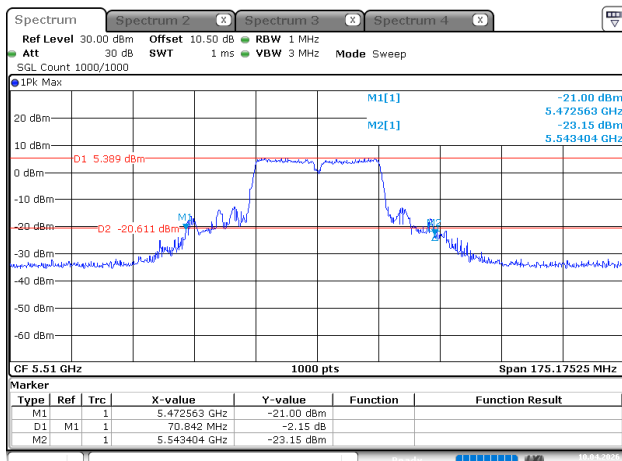

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:29:20


802.11ac40_5590MHz

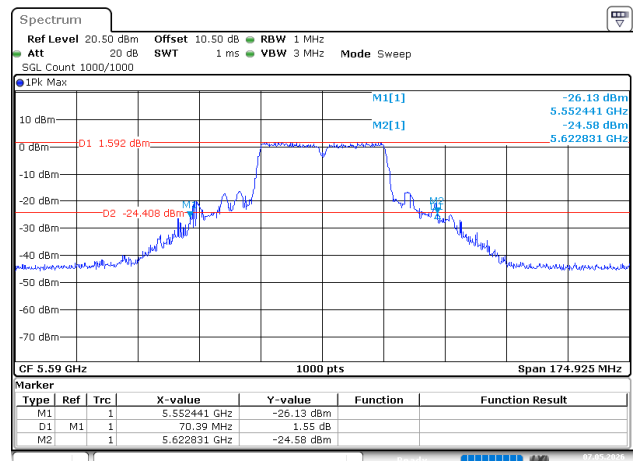

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 7.MAY.2026 19:10:40


5725-5850MHz

802.11ac40_5670MHz

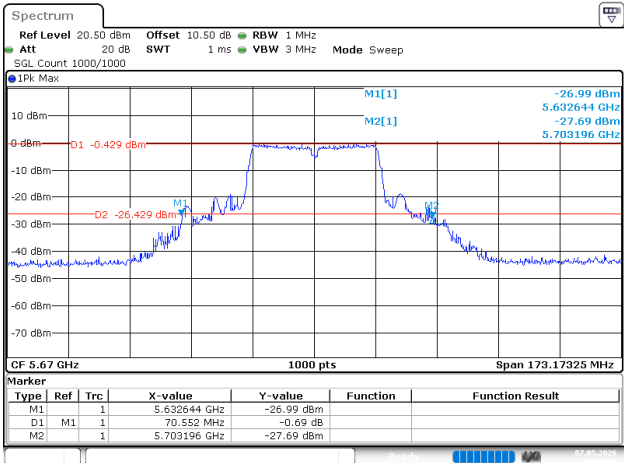


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 7.MAY.2026 19:23:20

802.11a_5745MHz

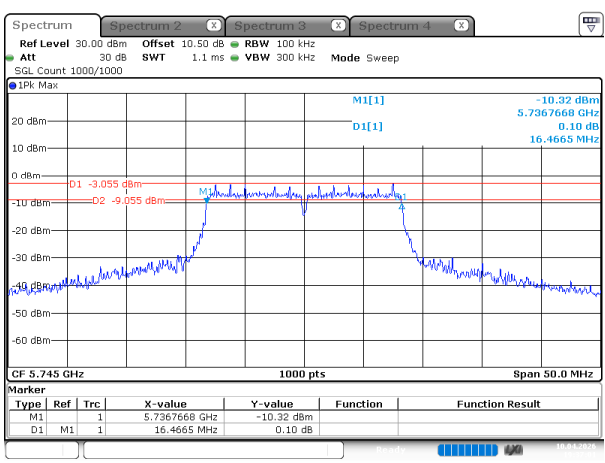


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:37:02

802.11a_5785MHz

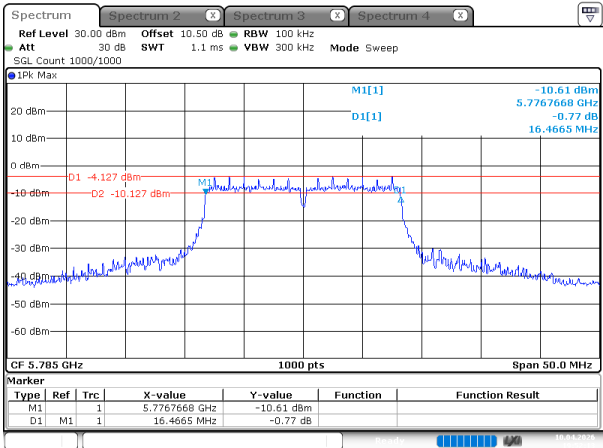


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:52:13

802.11a_5825MHz

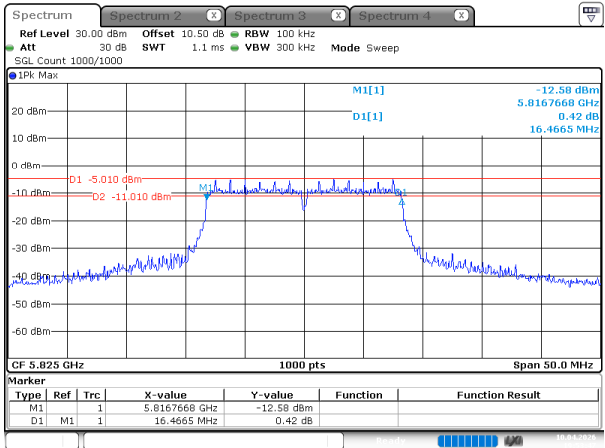


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:53:47

802.11ac20_5745MHz

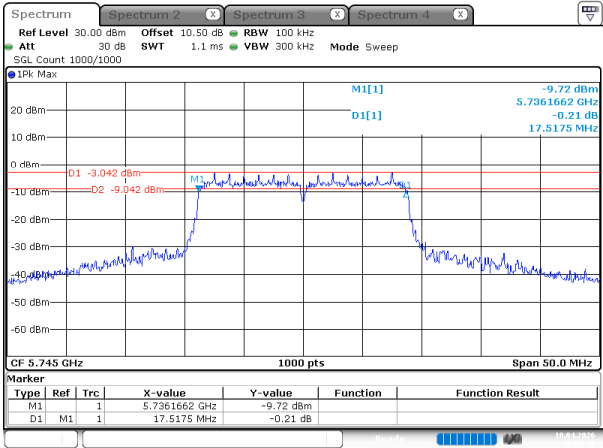


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:07:48

802.11ac20_5785MHz

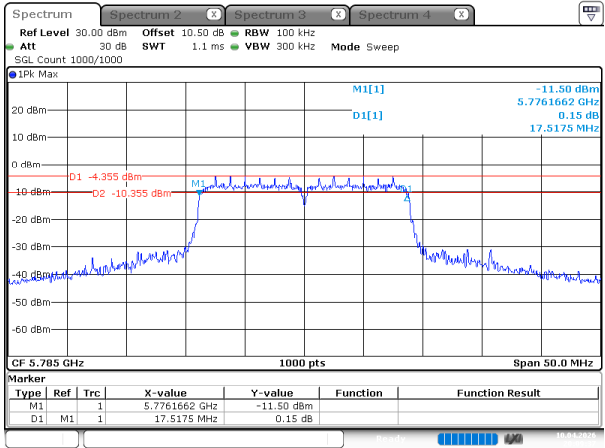


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:09:38

802.11ac20_5825MHz

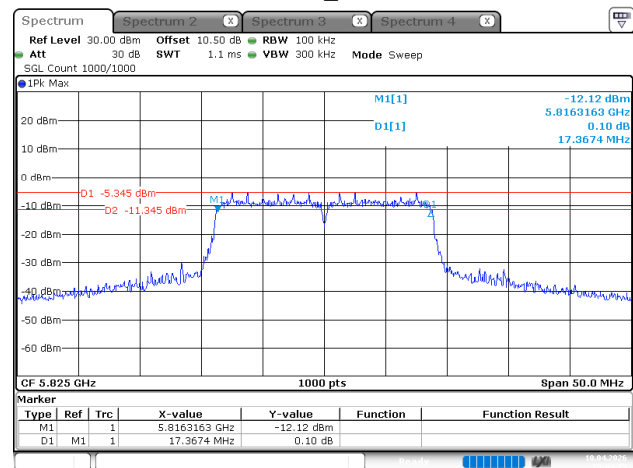


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:03:15

802.11ac40_5755MHz

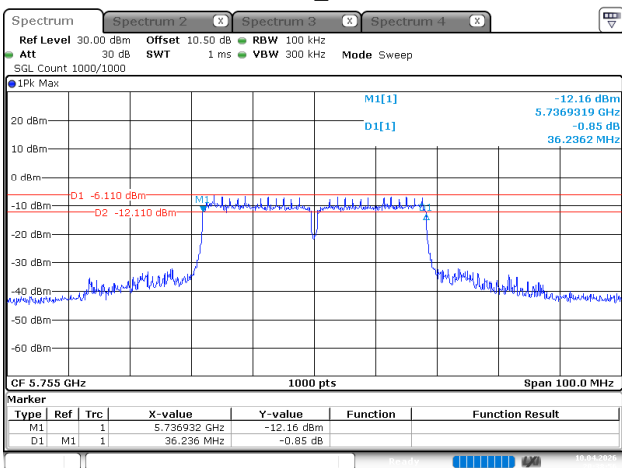

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:38:56

802.11ac40_5795MHz

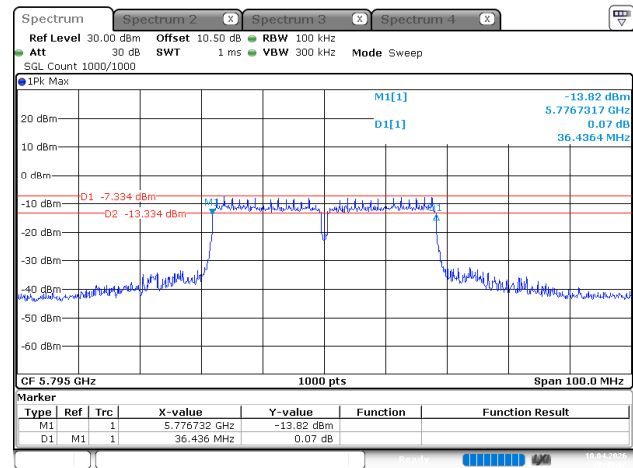

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:40:07

5.4 99% Occupied Bandwidth

Serial No.:	3IUC-1	Test Date:	2026/04/10~2026/04/21
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.4~25.8	Relative Humidity: (%)	50~59	ATM Pressure: (kPa)	100.3~100.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM504	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02
JD	Test Software	JD Auto Test System	V1.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5180	17.150
	5200	17.150
	5240	17.350
802.11ac20	5180	17.850
	5200	17.850
	5240	17.900
802.11ac40	5190	36.700
	5230	36.600

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5250-5350MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5260	17
	5280	17.050
	5320	17.350
802.11ac20	5260	17.850
	5280	17.850
	5320	17.950
802.11ac40	5270	36.700
	5310	36.700

5470-5725MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5500	16.700
	5600	16.700
	5700	16.750
802.11ac20	5500	17.750
	5600	17.750
	5700	17.750
802.11ac40	5510	36.700
	5590	36.700
	5670	36.700

5725-5850MHz


Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5745	16.750
	5785	16.750
	5825	16.750
802.11ac20	5745	17.750
	5785	17.750
	5825	17.750
802.11ac40	5755	36.800
	5795	36.600

Note:

The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


5150-5250MHz

802.11a_5180MHz

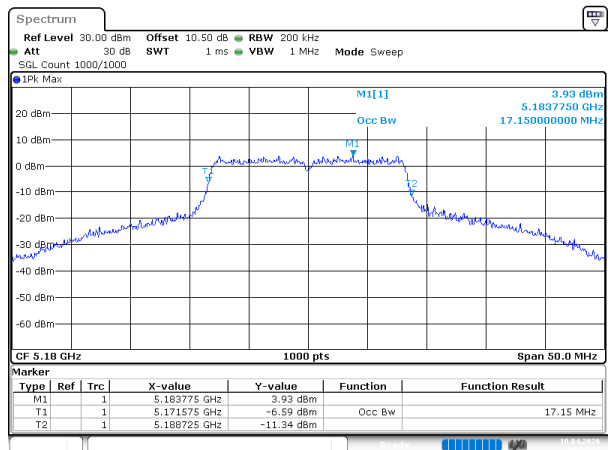


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:14:30

802.11a_5200MHz

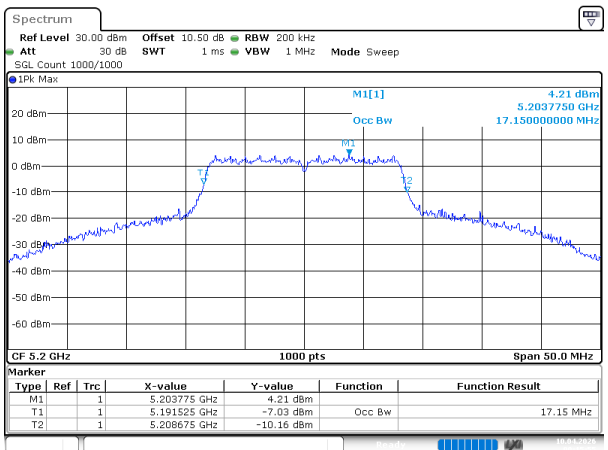


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:15:56

802.11a_5240MHz

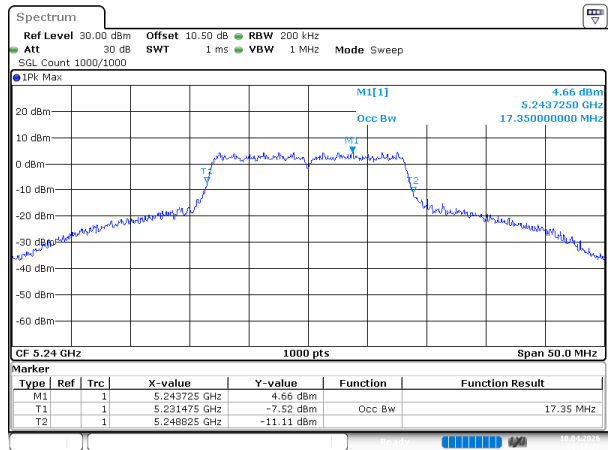


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:17:29

802.11ac20_5180MHz

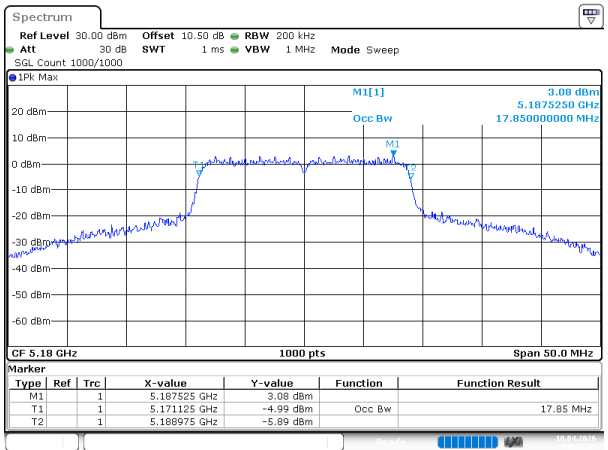


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:19:47

802.11ac20_5200MHz

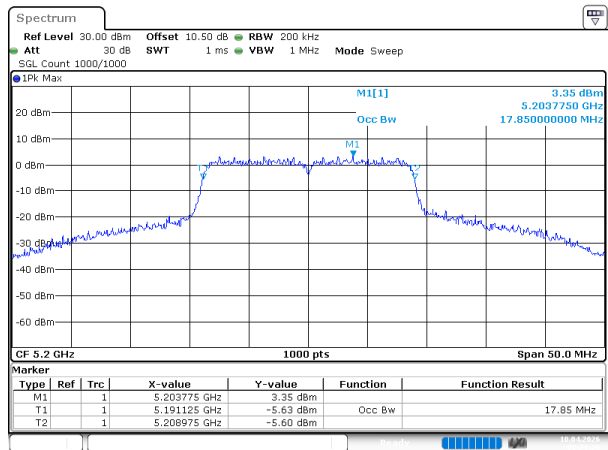


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:21:26

802.11ac20_5240MHz

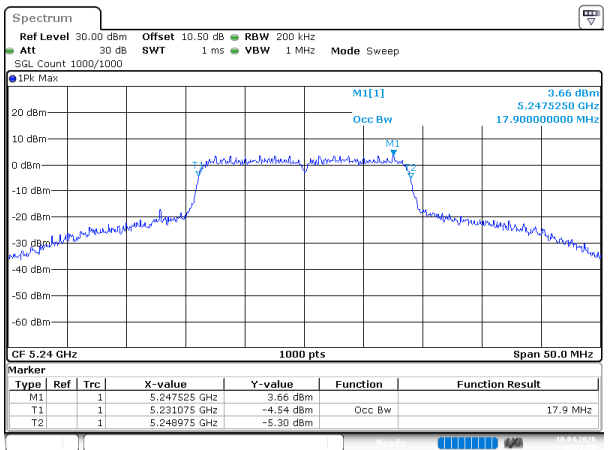


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:22:57

802.11ac40_5190MHz

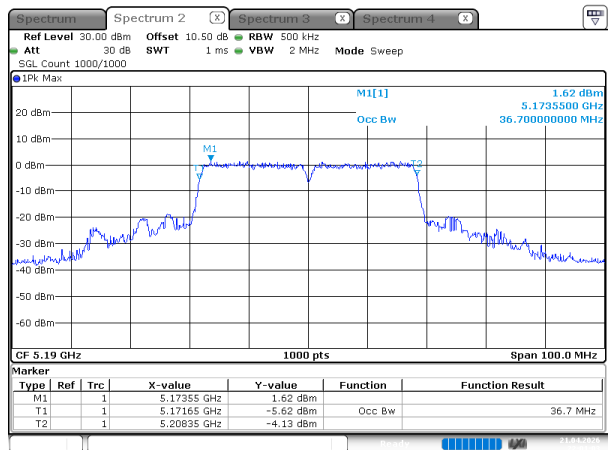

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:01:04


802.11ac40_5230MHz

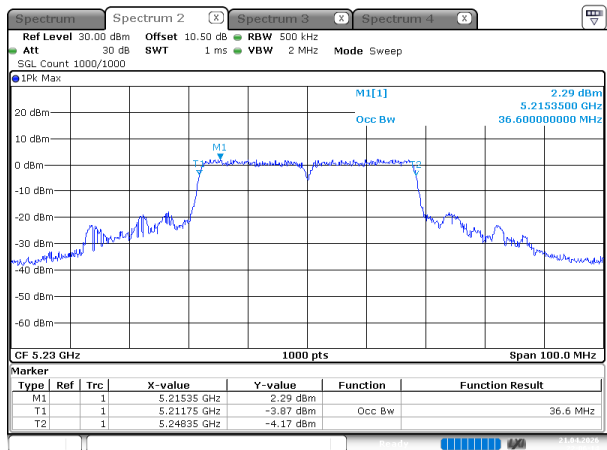

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:06:14


5250-5350MHz

802.11a_5260MHz

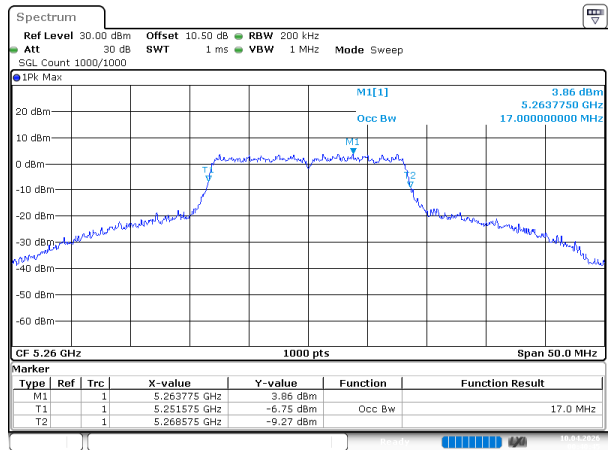


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:40:46

802.11a_5280MHz

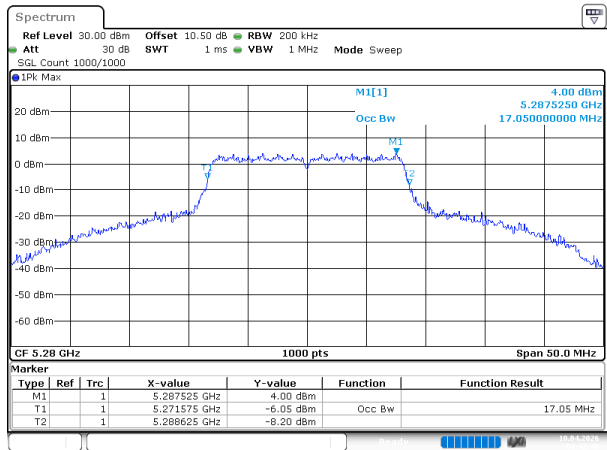


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:42:50

802.11a_5320MHz

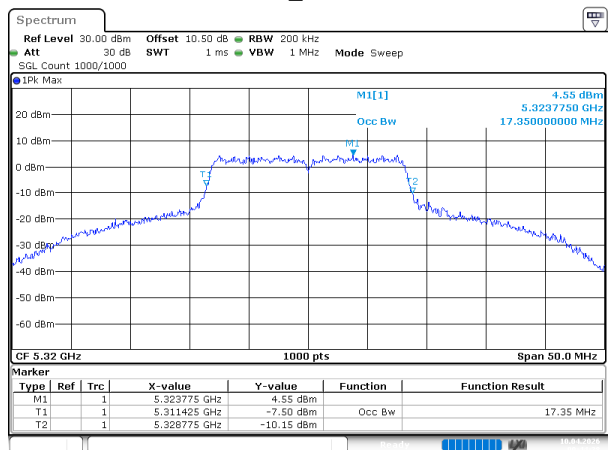


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:44:29

802.11ac20_5260MHz

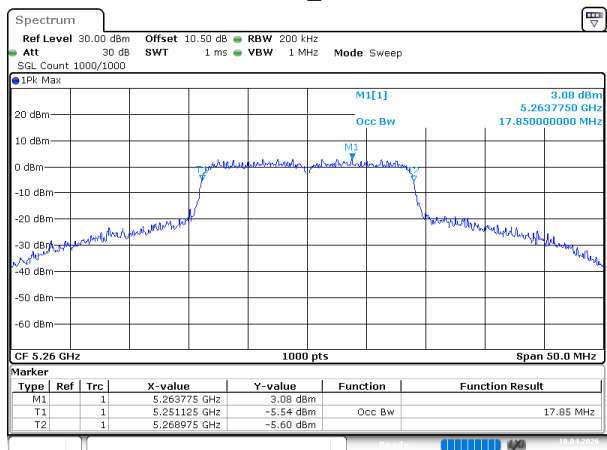


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:46:18

802.11ac20_5280MHz

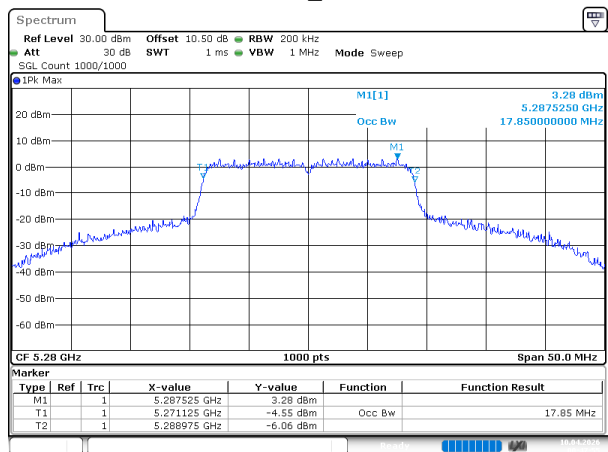


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:47:56

802.11ac20_5320MHz

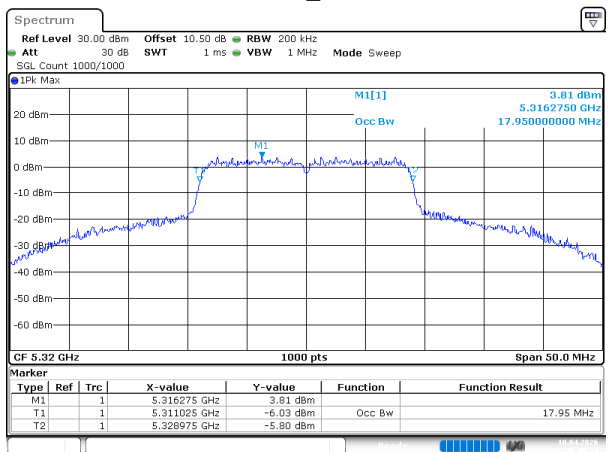


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:49:35

802.11ac40_5270MHz

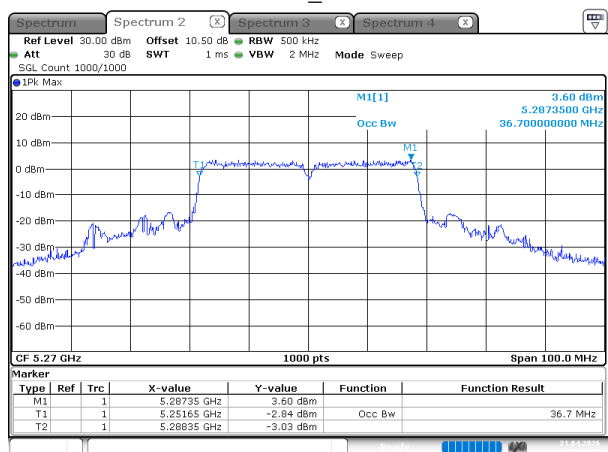

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:03:37


802.11ac40_5310MHz

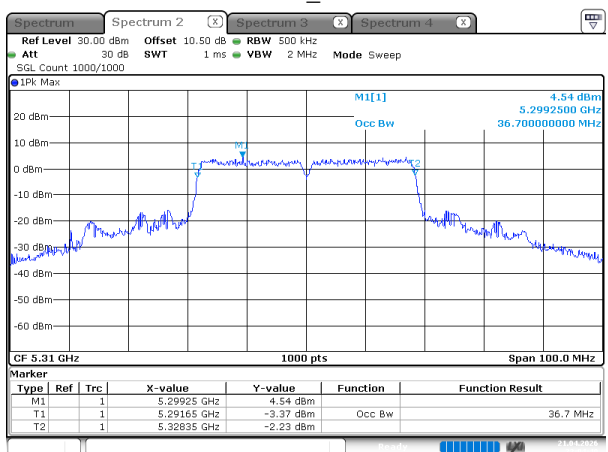

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:04:50


5470-5725MHz

802.11a_5500MHz

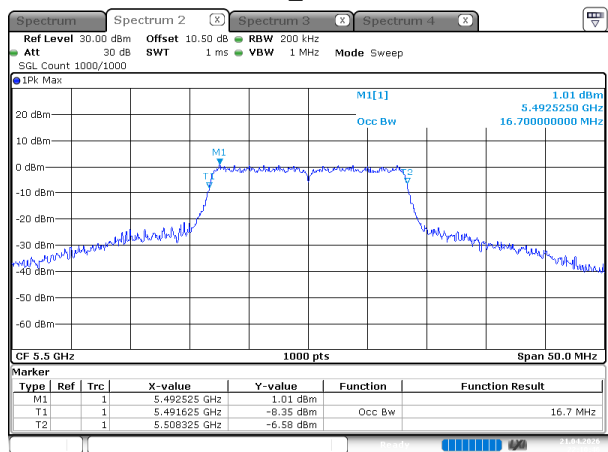


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:10:47

802.11a_5600MHz

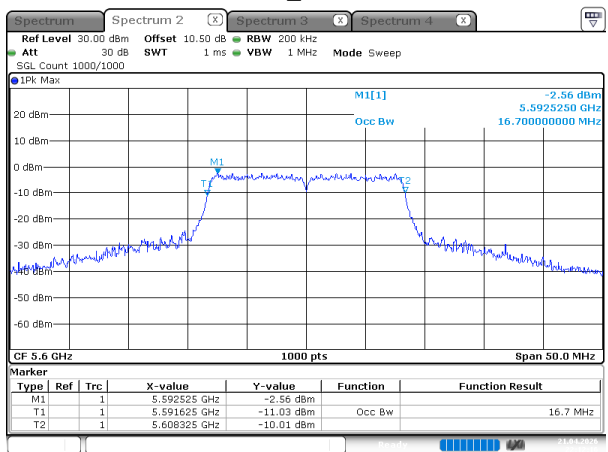


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:12:16

802.11a_5700MHz

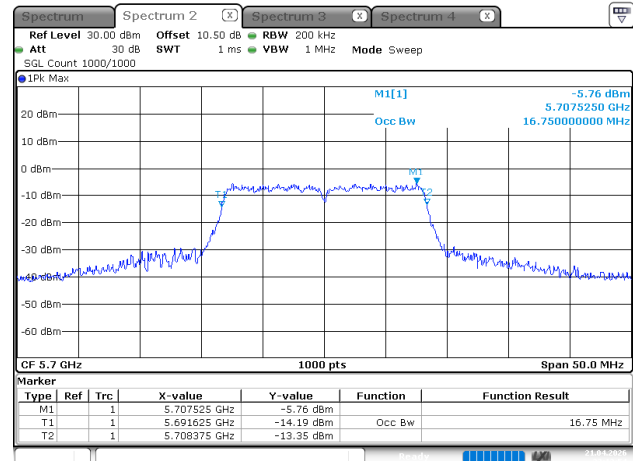


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 21.APR.2026 22:13:54

802.11ac20_5500MHz

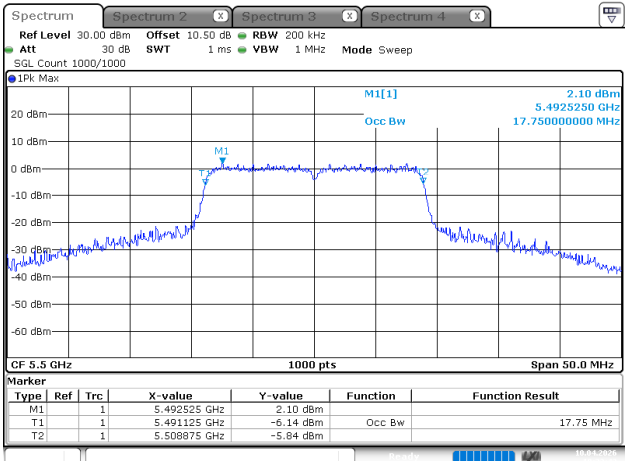


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:23:42

802.11ac20_5600MHz

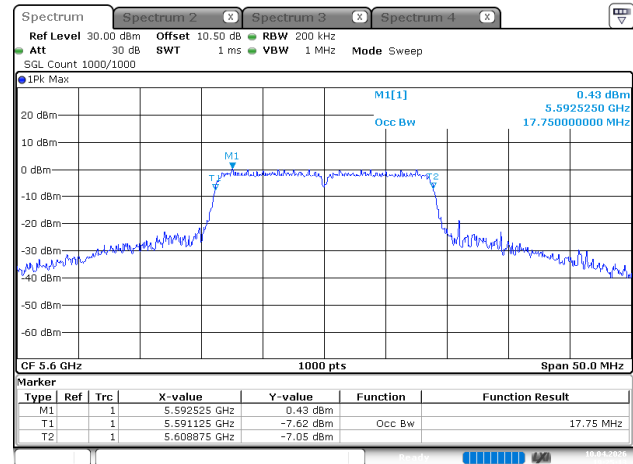


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:25:13

802.11ac20_5700MHz

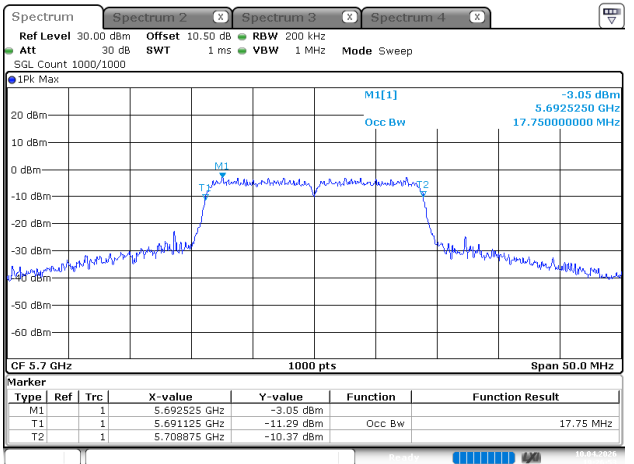


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:26:53

802.11ac40_5510MHz

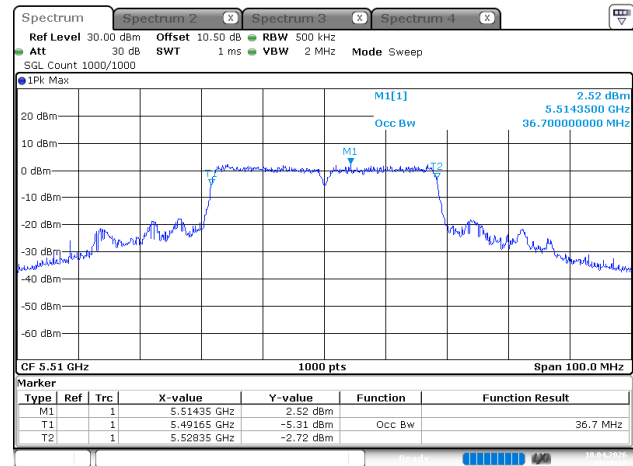


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:29:37

802.11ac40_5590MHz

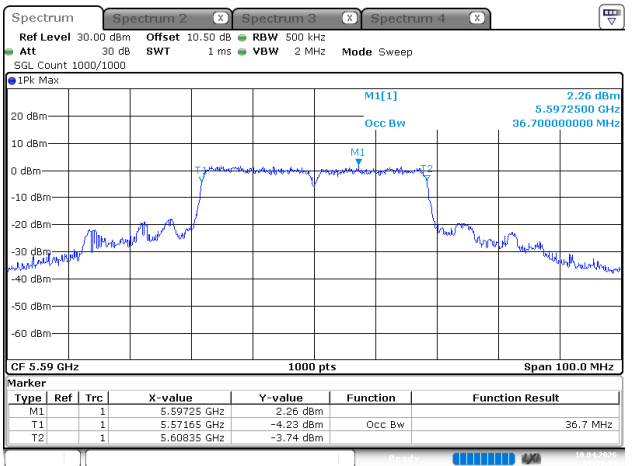


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:31:04


5725-5850MHz

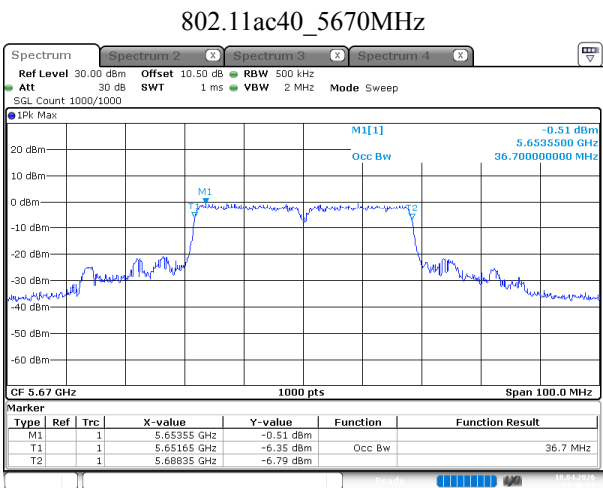


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 21:46:22

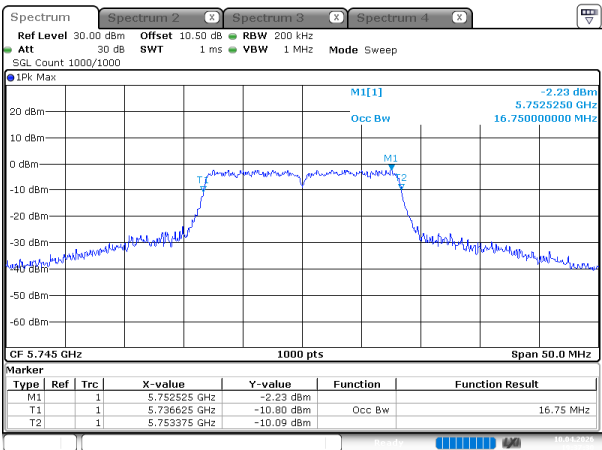


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:37:30

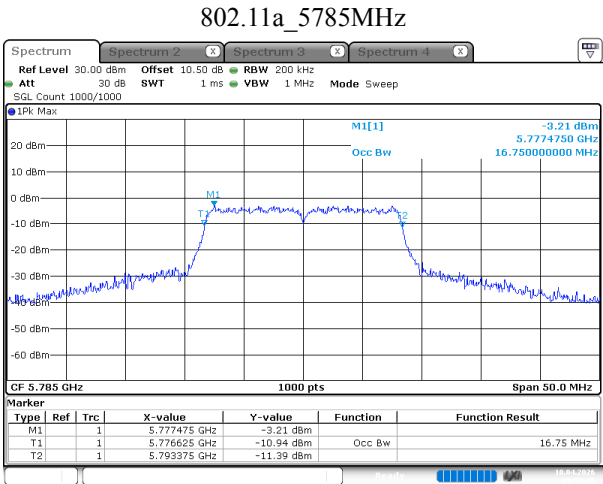


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:52:45

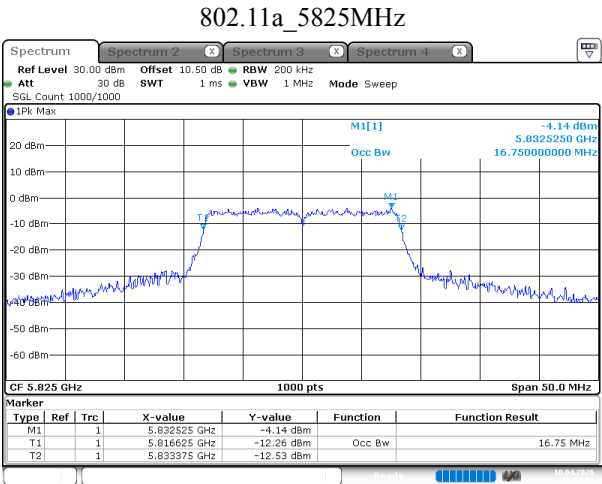

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 19:54:10

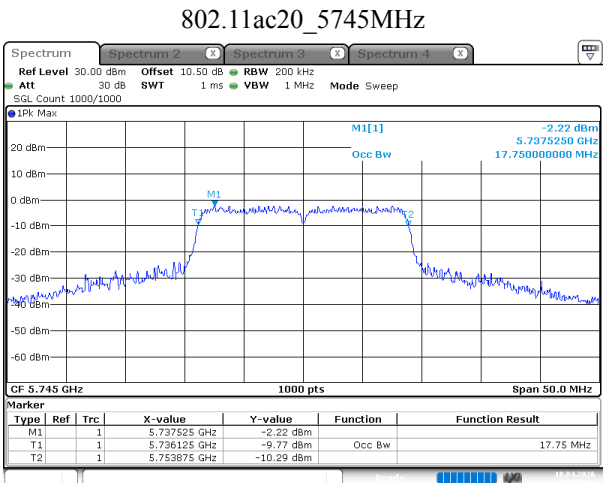


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:08:16

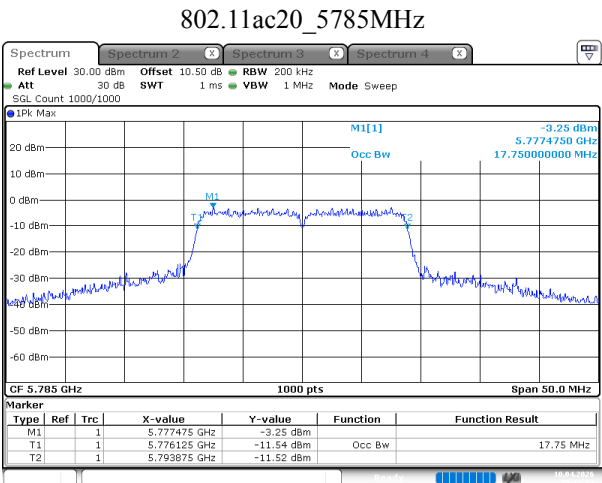


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:10:09

802.11ac20_5825MHz

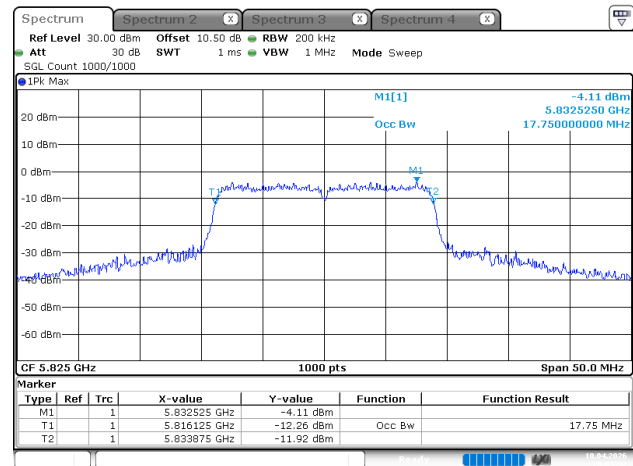


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:03:38

802.11ac40_5755MHz

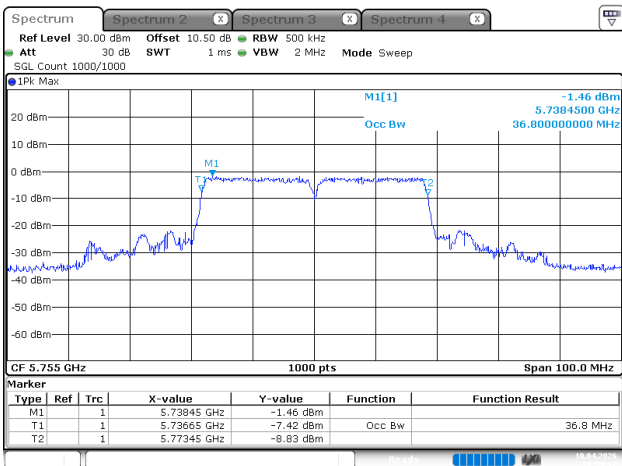

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:39:13

802.11ac40_5795MHz

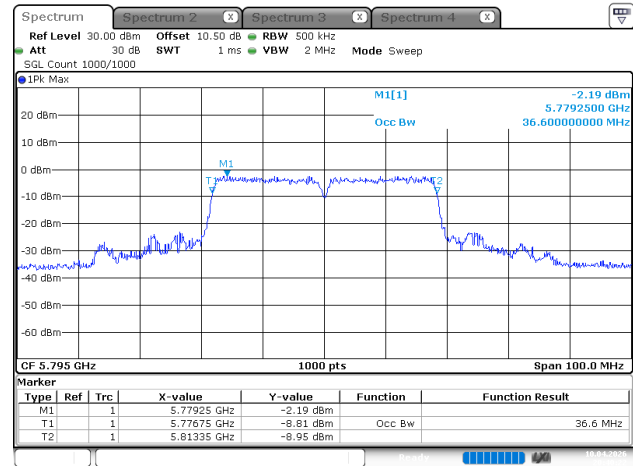

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 20:40:22

5.5 Maximum Conducted Output Power

Serial No.:	3IUC-1	Test Date:	2026/04/10~2026/04/20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.4~25.8	Relative Humidity: (%)	50~59	ATM Pressure: (kPa)	100.3~100.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM504	2025/06/06	2026/06/05
Anritsu	Microwave Peak Power Sensor	MA24418A	12618	2025/06/11	2026/06/10
JD	Test Software	JD Auto Test System	V1.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5180	13.81	24	Pass
	5200	13.97	24	Pass
	5240	14.52	24	Pass
802.11ac20	5180	12.99	24	Pass
	5200	13.26	24	Pass
	5240	13.82	24	Pass
802.11ac40	5190	10.34	24	Pass
	5230	10.69	24	Pass

5250-5350MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5260	13.82	24	Pass
	5280	14.01	24	Pass
	5320	14.61	24	Pass
802.11ac20	5260	13.24	24	Pass
	5280	13.38	24	Pass
	5320	13.87	24	Pass
802.11ac40	5270	11.88	24	Pass
	5310	12.9	24	Pass

5470-5725MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5500	11.79	24	Pass
	5600	10.21	24	Pass
	5700	9.85	24	Pass
802.11ac20	5500	12.22	24	Pass
	5600	10.46	24	Pass
	5700	9.9	24	Pass
802.11ac40	5510	11.23	24	Pass
	5590	10.33	24	Pass
	5670	11.08	24	Pass

5725-5850MHz

Mode	Test Frequency (MHz)	Average Output Power(dBm)	Limit (dBm)	Verdict
802.11a	5745	8.04	30	Pass
	5785	7.11	30	Pass
	5825	6.43	30	Pass
802.11ac20	5745	8.03	30	Pass
	5785	6.93	30	Pass
	5825	6.63	30	Pass
802.11ac40	5755	7.55	30	Pass
	5795	6.38	30	Pass

5.6 Power Spectral Density

Serial No.:	3IUC-1	Test Date:	2026/04/10~2026/05/07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jeff Wei	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.4~25.8	Relative Humidity: (%)	50~59	ATM Pressure: (kPa)	100.3~100.6
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM504	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101461	2025/08/03	2026/08/02
JD	Test Software	JD Auto Test System	V1.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250MHz

Mode	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor(dB)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	5180	2.22	0.53	2.75	11	Pass
	5200	2.45	0.53	2.98	11	Pass
	5240	3.11	0.53	3.64	11	Pass
802.11ac20	5180	1.17	0.62	1.79	11	Pass
	5200	1.59	0.62	2.21	11	Pass
	5240	1.86	0.62	2.48	11	Pass
802.11ac40	5190	-5.22	1.16	-4.06	11	Pass
	5230	-4.46	1.16	-3.30	11	Pass

5250-5350MHz

Mode	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor(dB)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	5260	2.45	0.53	2.98	11	Pass
	5280	2.56	0.53	3.09	11	Pass
	5320	3.09	0.53	3.62	11	Pass
802.11ac20	5260	1.34	0.62	1.96	11	Pass
	5280	1.71	0.62	2.33	11	Pass
	5320	2.09	0.62	2.71	11	Pass
802.11ac40	5270	-2.49	1.16	-1.33	11	Pass
	5310	-2.13	1.16	-0.97	11	Pass

5470-5725MHz

Mode	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor(dB)	Result (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	5500	-0.76	0.53	-0.23	11	Pass
	5600	-3.96	0.53	-3.43	11	Pass
	5700	-1.50	0.53	-0.97	11	Pass
802.11ac20	5500	0.73	0.62	1.35	11	Pass
	5600	-1.22	0.62	-0.60	11	Pass
	5700	-1.83	0.62	-1.21	11	Pass
802.11ac40	5510	-3.56	1.16	-2.40	11	Pass
	5590	-4.81	1.16	-3.65	11	Pass
	5670	-4.34	1.16	-3.18	11	Pass


5725-5850MHz

Mode	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor(dB)	Result (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
802.11a	5745	-6.38	0.53	-5.85	30	Pass
	5785	-7.53	0.53	-7.00	30	Pass
	5825	-7.90	0.53	-7.37	30	Pass
802.11ac20	5745	-6.53	0.62	-5.91	30	Pass
	5785	-7.66	0.62	-7.04	30	Pass
	5825	-7.79	0.62	-7.17	30	Pass
802.11ac40	5755	-10.67	1.16	-9.51	30	Pass
	5795	-11.70	1.16	-10.54	30	Pass

Result = Reading + Duty Cycle Factor


5150-5250MHz

802.11a_5180MHz

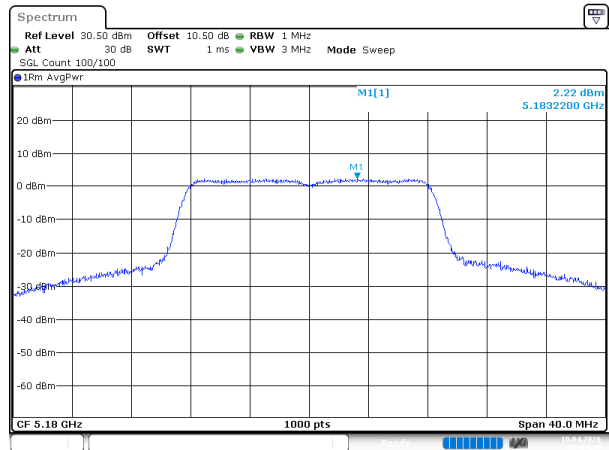


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:14:50

802.11a_5200MHz

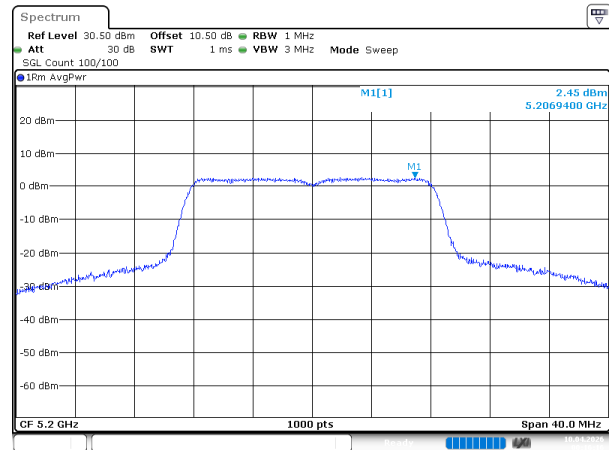


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:16:17

802.11a_5240MHz

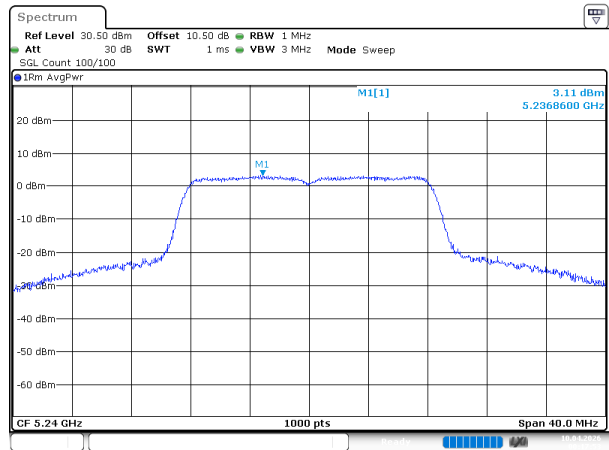


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:17:53

802.11ac20_5180MHz

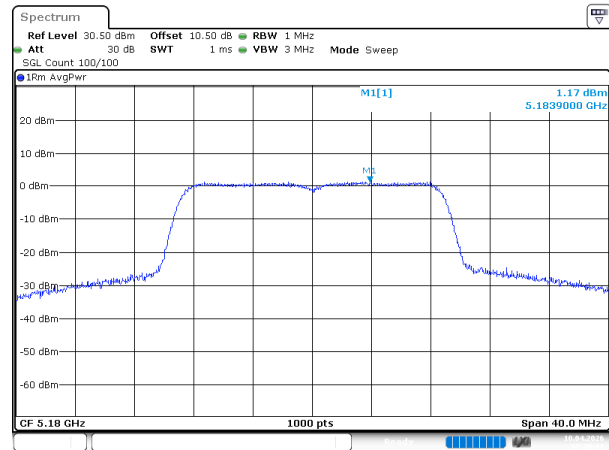


ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:20:12

802.11ac20_5200MHz

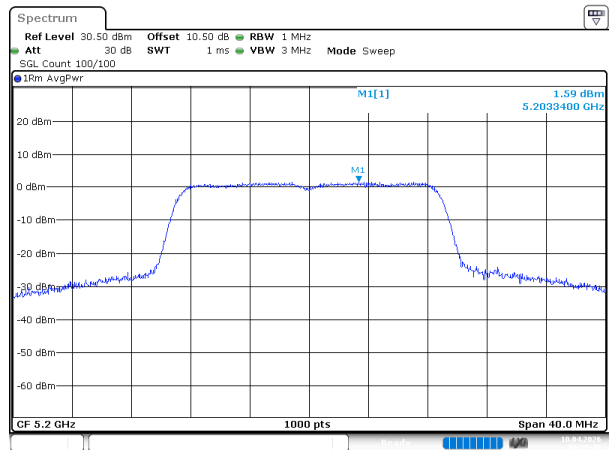

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:21:50

802.11ac20_5240MHz

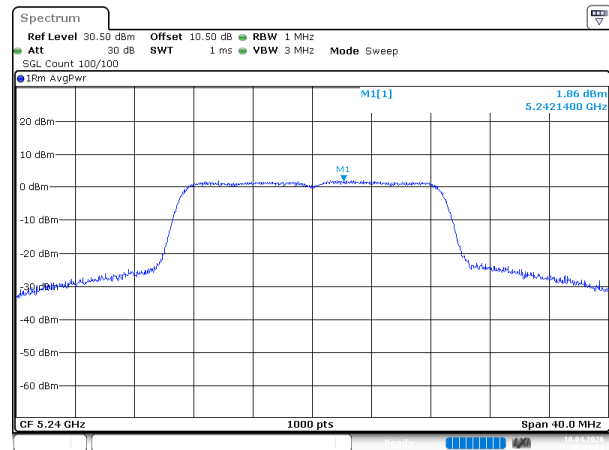

ProjectNo.:2602R49436E-RF Tester:Jeff Wei
Date: 10.APR.2026 00:23:21