



RF MEASUREMENT REPORT

FCC ID: 2AI9TOAW-AP1542
Applicant: ALE USA Inc.
Product: OmniAccess Stellar
Model No.: OAW-AP1542
Brand Name: Alcatel-Lucent Enterprise
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2025-11-25
Test Date: 2025-12-11 ~ 2026-01-29

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1061112-U207	V01	Initial Report	2026-05-21	Valid

Note: This device uses the same PCB board as the device in the original MRT report (Report No.: R25S1060119-U202), and for the BLE/Zigbee part, the antennas of the two devices are identical; therefore, the data in this report are copied from the original report.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode	8
2.2. Test System Connection Diagram	8
2.3. Test Software	8
2.4. Applied Standards	8
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	13
5.1. Decision Rules	13
5.2. Measurement Uncertainty	13
6. Test Result	14
6.1. Summary	14
6.2. 6 dB Bandwidth Measurement	15
6.2.1. Test Limit	15
6.2.2. Test Procedure	15
6.2.3. Test Setting	15
6.2.4. Test Setup	15
6.2.5. Test Result	15
6.3. Output Power Measurement	16
6.3.1. Test Limit	16
6.3.2. Test Procedure	16
6.3.3. Test Setting	16
6.3.4. Test Setup	16
6.3.5. Test Result	16
6.4. Power Spectral Density Measurement	17
6.4.1. Test Limit	17
6.4.2. Test Procedure	17

6.4.3.	Test Setting	17
6.4.4.	Test Setup	17
6.4.5.	Test Result	17
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	18
6.5.1.	Test Limit	18
6.5.2.	Test Procedure	18
6.5.3.	Test Setting	18
6.5.4.	Test Setup	18
6.5.5.	Test Result	19
6.6.	Radiated Spurious Emission Measurement.....	20
6.6.1.	Test Limit	20
6.6.2.	Test Procedure	20
6.6.3.	Test Setting	20
6.6.4.	Test Setup	22
6.6.5.	Test Result	23
6.7.	Radiated Restricted Band Edge Measurement	24
6.7.1.	Test Limit	24
6.7.2.	Test Procedure	25
6.7.3.	Test Setting	25
6.7.4.	Test Setup	26
6.7.5.	Test Result	26
6.8.	AC Conducted Emissions Measurement	27
6.8.1.	Test Limit	27
6.8.2.	Test Setup	27
6.8.3.	Test Result	27
Appendix A - Test Result.....		28
A.1	Duty Cycle Test Result	28
A.2	6 dB Bandwidth Test Result	29
A.3	Output Power Test Result	30
A.4	Power Spectral Density Test Result	31
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	32
A.6	Radiated Spurious Emission Test Result	34
A.7	Radiated Restricted Band Edge Test Result.....	45
A.8	AC Conducted Emissions Test Result	53
Appendix B - Test Setup Photograph		57
Appendix C - EUT Photograph		58

1. General Information

1.1. Applicant

ALE USA Inc.
2000 Corporate Center Drive
Thousand Oaks, CA 91320

1.2. Manufacturer

ALE USA Inc.
2000 Corporate Center Drive
Thousand Oaks, CA 91320

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166
	CNAS: L10551 ISED: CN0001
☐	Test Site - MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284
	CNAS: L10551 ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261
	CNAS: L10551 ISED: TW3261

1.4. Product Information

Product Name	OmniAccess Stellar
Model No.	OAW-AP1542
Bluetooth Specification	Bluetooth_LE
ZigBee Specification	802.15.4
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Operating Temperature	0 °C ~ 50 °C
Antenna Information	Refer to section 1.5
Power Type	AC/DC Adapter or PoE Injector
Accessory(ies)	
AC/DC Adapter	Model No.: AA65U-540A Input Power: 100-240 V ~ 50/60 Hz, 1.6 A Output Power: 54 V = 1.2 A, 64.8 W
PoE Injector	Model: POE60U-1BT-X Input: 100-240 V ~ 1.5 A, 50-60 Hz, 98-104 VA Output: 56 V=0.535 A, 30 W PIN 3, 6+ PIN 1, 2 Return Output: 56 V=0.535 A, 30 W PIN 4, 5+ PIN 7, 8 Return
Notes: 1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer. 2. AC/DC Adapter and PoE Injector are not marketed in conjunction with the device.	

1.5. Radio Specification under Test

Frequency Range	2400 ~ 2483.5 MHz
ZigBee Specification	802.15.4
Channel Number	16
Modulation Type	O-QPSK
Antenna Type	PIFA
Antenna Gain	4.59 dBi

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz
26	2480 MHz	--	--	--	--

2. Test Configuration


2.1. Test Mode

Mode 1: Transmit by 802.15.4

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram - Radiated Emission testing & AC Conducted Emissions

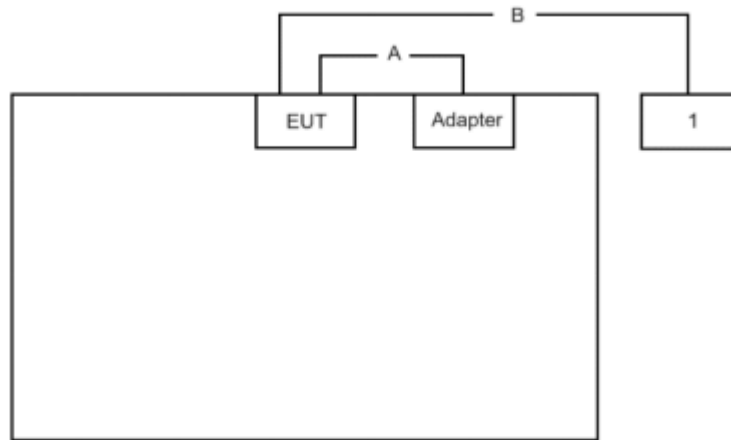

No.	Cable Type	Cable Description	Length
A	Power Cable	Non shielded	1.5 m
B	USB Cable	Shielded	> 10 m
No.	Product	Manufacturer	Model No.
1	Notebook	Lenovo	E430 C

2.3. Test Software

The test utility software used during testing was “PuTTY”, and the version was 0.67.0.0.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01 v05r02
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19	WJ-AC1
					2027-04-14	
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2026-11-18	WJ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11333	1 year	2026-06-16	WJ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11402	1 year	2026-11-30	WJ-AC1
Anechoic Chamber	TDK	WJ-AC1	MRTSUE07115	1 year	2026-05-16	WJ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE07285	1 year	2026-02-18	WJ-AC2
					2027-02-11	
TRILOG Broad Band Antenna	Schwarzbeck	VULB 9163	MRTSUE07097	1 year	2026-04-20	WJ-AC2
					2027-04-19	
Horn Antenna	RFSPIN	DRH18-E	MRTSUE07105	1 year	2026-05-12	WJ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2026-08-18	WJ-AC2
Preamplifier	EMCI	EMC118A45SE	MRTSUE07102	1 year	2026-04-09	WJ-AC2
					2027-04-08	
Preamplifier	EMCI	EMC184045SE	MRTSUE07103	1 year	2026-04-09	WJ-AC2
					2027-04-08	
Thermohygrometer	testo	608-H1	MRTSUE11315	1 year	2026-06-16	WJ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11332	1 year	2026-06-05	WJ-AC2
Anechoic Chamber	TDK	WJ-AC2	MRTSUE07117	1 year	2026-05-12	WJ-AC2
USB Power Sensor	Keysight	U2021XA	MRTSUE07141	1 year	2026-03-15	WJ-SR3
					2027-03-12	
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2026-08-31	WJ-SR3
Fixed Attenuator	MVE	MVE2213	MRTSUE07316	Note	Note	WJ-SR3
RF Cable	UCwave	UCE500	MRTSUE07340	Note	Note	WJ-SR3
Thermohygrometer	testo	608-H1	MRTSUE11331	1 year	2026-06-05	WJ-SR3
Shielding Room	TDK	WJ-SR3	MRTSUE07125	Note	Note	WJ-SR3
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19	WJ-SR5
					2027-04-14	
Two-Line V-Network	R&S	ENV216	MRTSUE07202	1 year	2026-05-26	WJ-SR5
Thermohygrometer	testo	608-H1	MRTSUE11317	1 year	2026-06-05	WJ-SR5
Shielding Room	TDK	WJ-SR5	MRTSUE07127	N/A	N/A	WJ-SR5

Note: The loss of the Attenuator & Cable will be measured before testing.



Software	Version	Function
e3	230711	RE & CE
CONTROLLER CO3000	V 1.03.02	RE Antenna & Turntable
Agilent Power Panel	V 3.9	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9 kHz ~ 150 kHz:	3.59 dB
150 kHz ~ 30 MHz:	3.20 dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9 kHz ~ 30 MHz: 2.56 dB
Coplanar:	9 kHz ~ 30 MHz: 2.55 dB
Horizontal:	30 MHz ~ 200 MHz: 3.48 dB
	200 MHz ~ 1 GHz: 4.17 dB
	1 GHz ~ 40 GHz: 5.01 dB
Vertical:	30 MHz ~ 200 MHz: 4.09 dB
	200 MHz ~ 1 GHz: 5.30 dB
	1 GHz ~ 40 GHz: 4.85 dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.9 dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 1.4 dB	
Power Spectrum Density	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.9 dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.6%	

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6 dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150 kHz - 30 MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6 dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10-2020 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6 dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1% to 5% of the OBW, but not less than 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

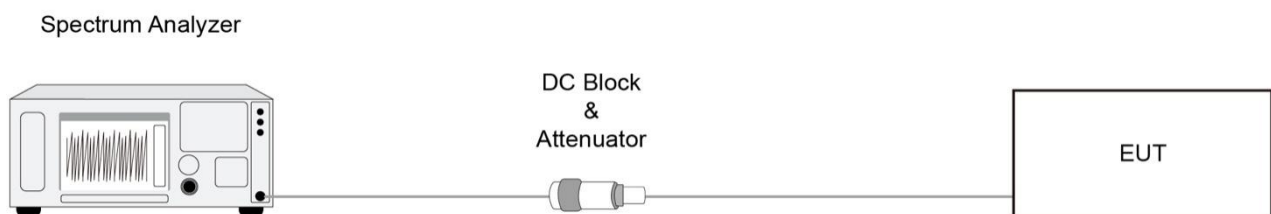

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30 dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10-2020 - Section 11.9.1.2

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50 MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50 MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50 MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

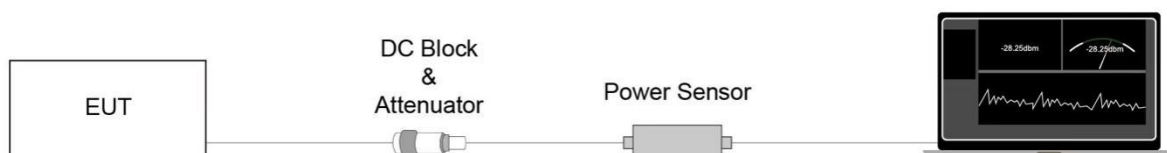

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10-2020 - Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span > 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

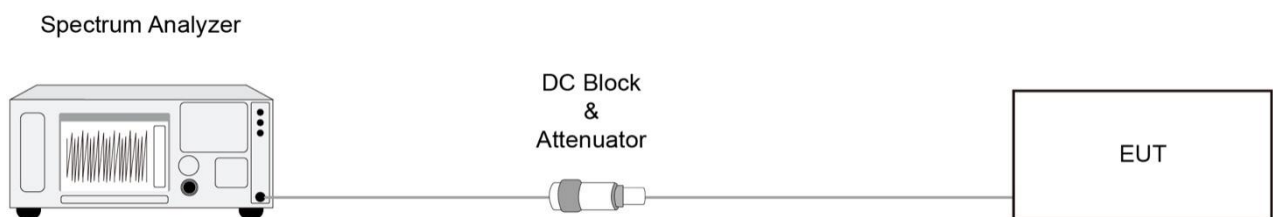

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20 dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2020 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Span ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

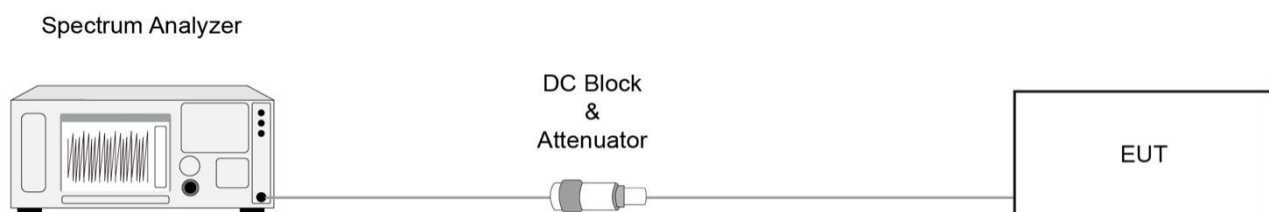

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10-2020 - Section 11.11 & 11.12

ANSI C63.10-2020 - Section 6.3 (General Requirements)

ANSI C63.10-2020 - Section 6.4 (Standard test method below 30 MHz)

ANSI C63.10-2020 - Section 6.5 (Standard test method above 30 MHz to 1 GHz)

ANSI C63.10-2020 - Section 6.6 (Standard test method above 1 GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1 GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30 MHz Test Setup:

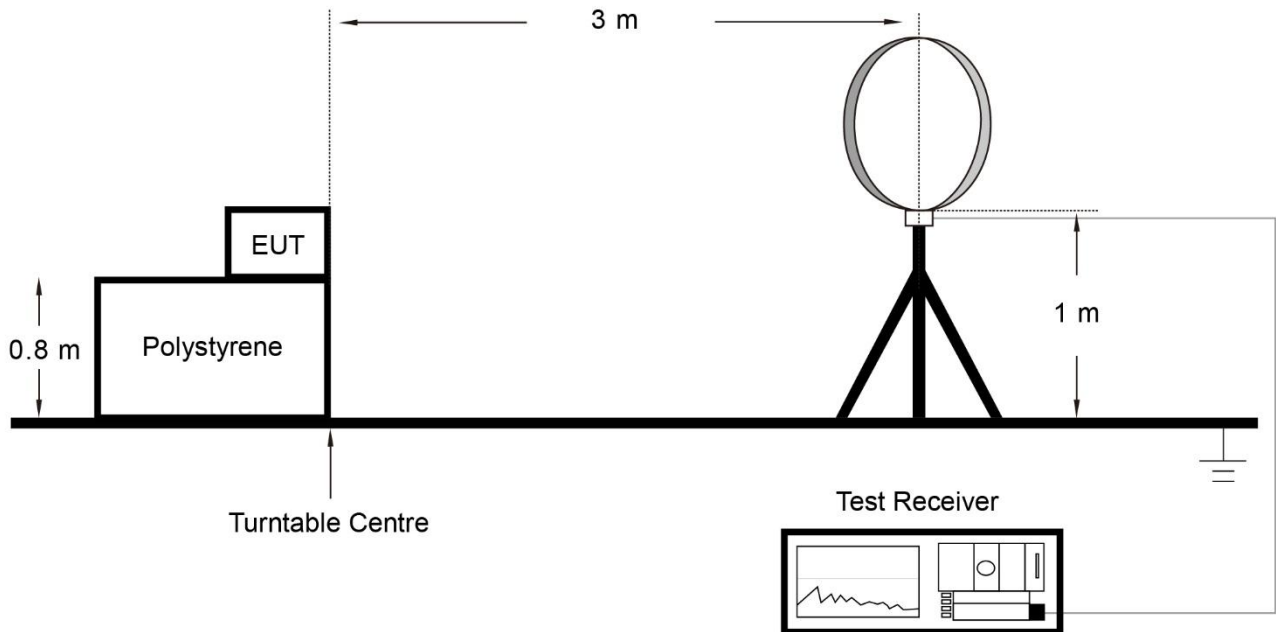

Below 1 GHz Test Setup:

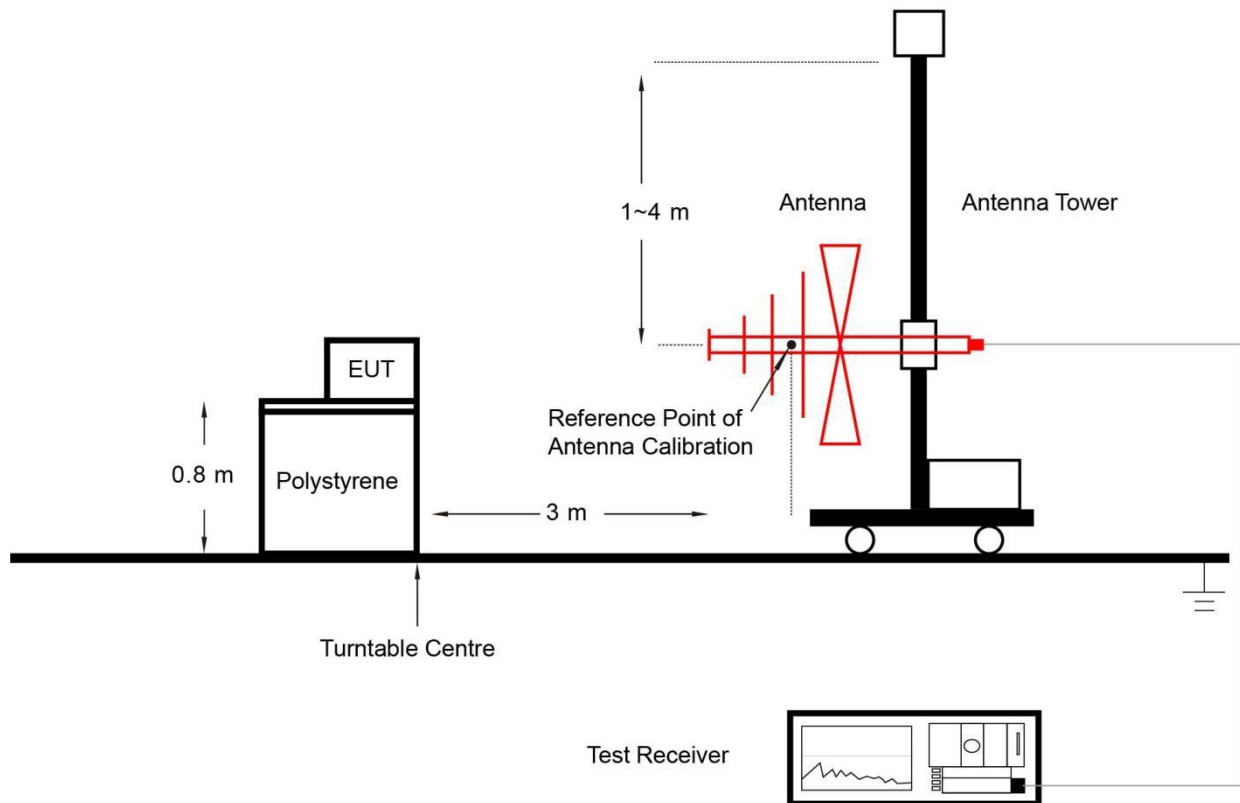

Above 1 GHz Test Setup:

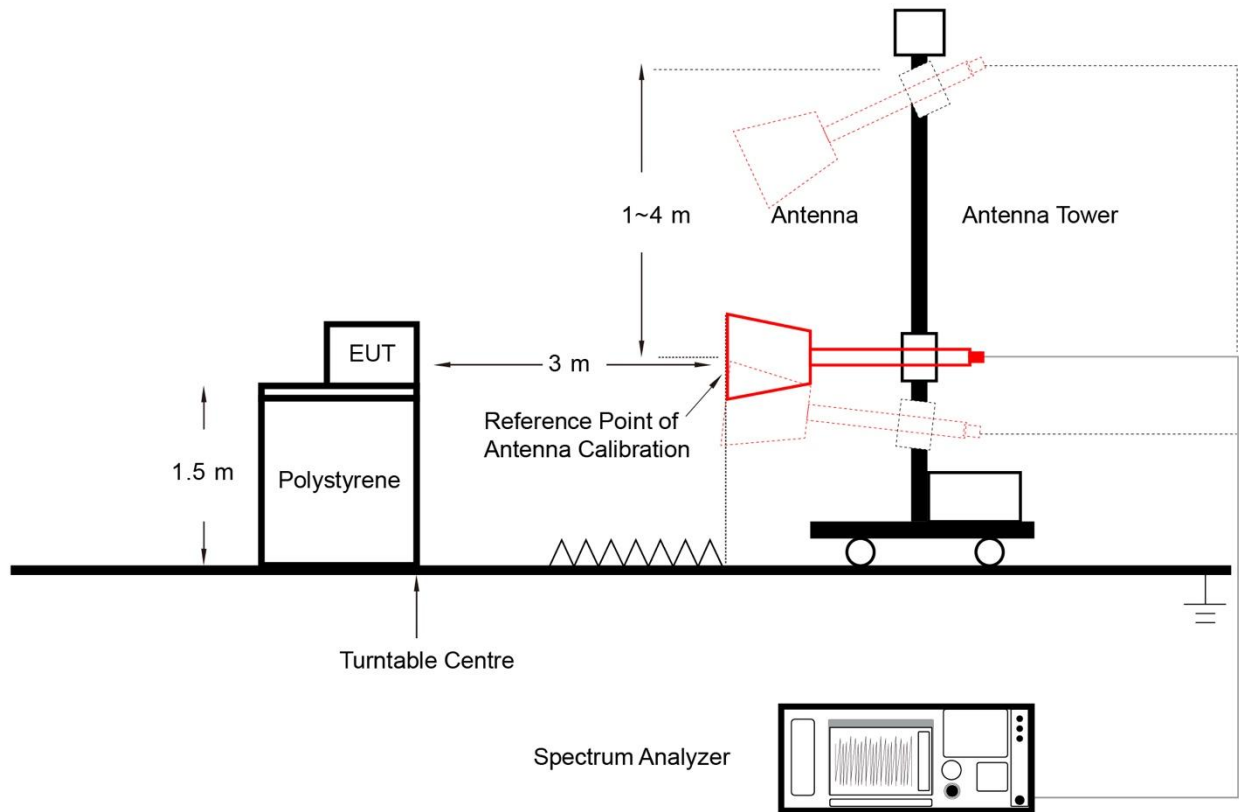

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2020 Section 6.3 & 6.6 & 11.12

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

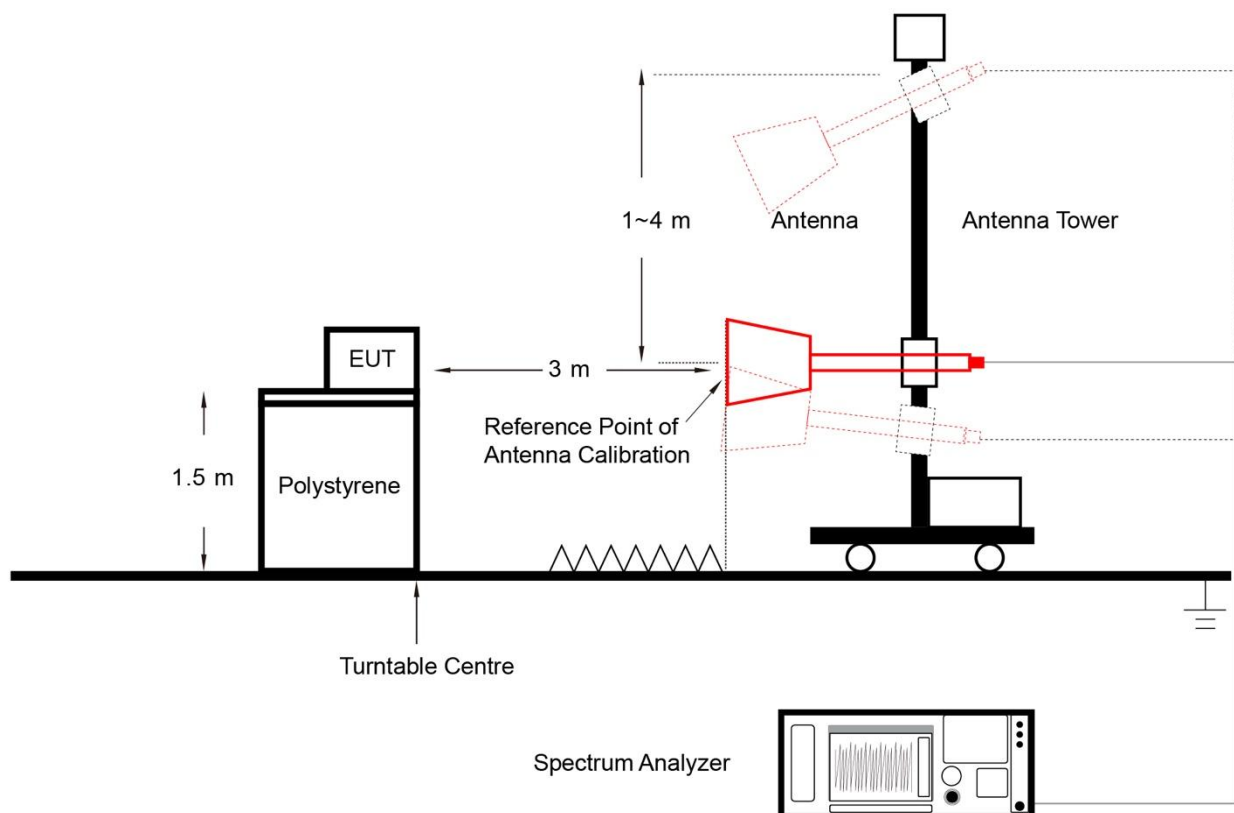

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.8.2. Test Setup

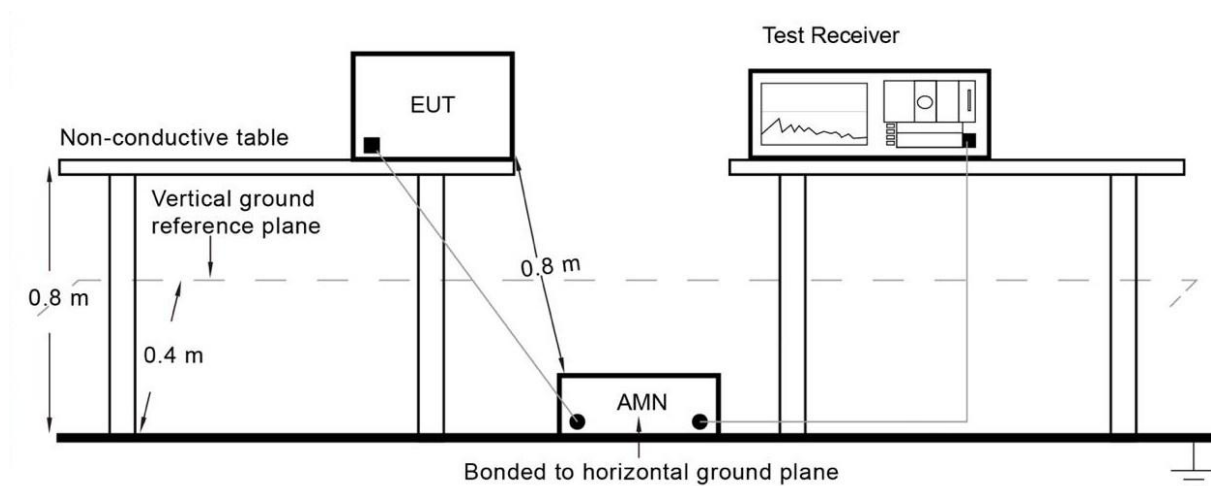

6.8.3. Test Result


Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-11		


Test Mode	Duty Cycle
802.15.4	100%

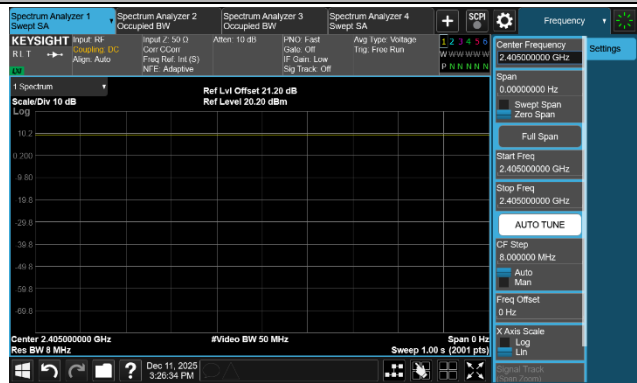Duty Cycle (T = Transmission Duration)	
802.15.4	
	

A.2 6 dB Bandwidth Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-11		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.640	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.640	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.642	≥ 0.5	Pass

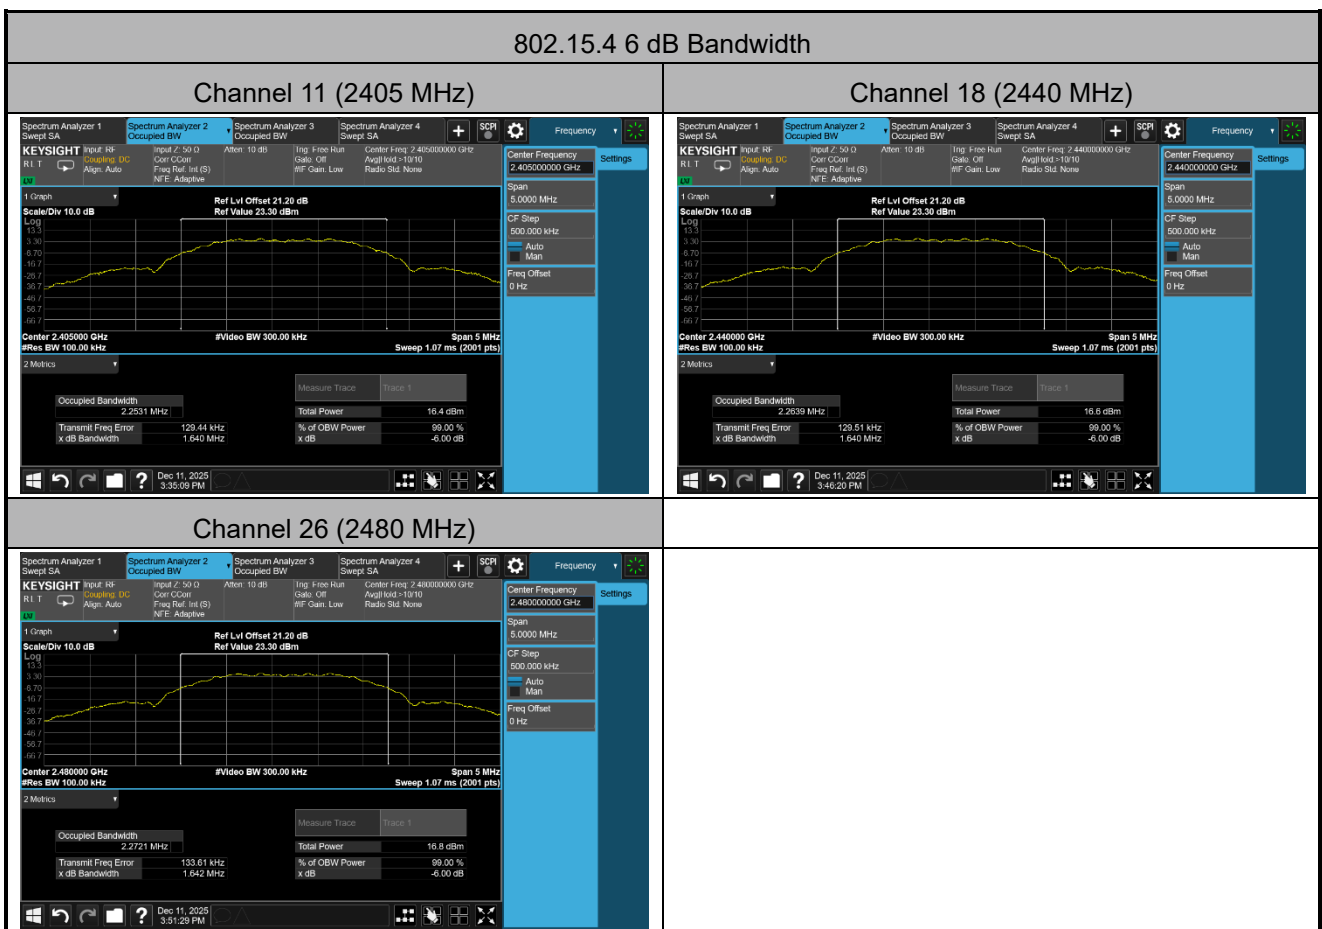

A.3 Output Power Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-11		

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.59	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	9.65	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	7.01	≤ 30.00	Pass


Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.31	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	9.38	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	6.56	≤ 30.00	Pass

A.4 Power Spectral Density Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-11 ~ 2026-01-17		


Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3 kHz)	Limit (dBm / 3 kHz)	Result
802.15.4	O-QPSK	11	2405	-5.60	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	-5.64	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	-8.37	≤ 8.00	Pass

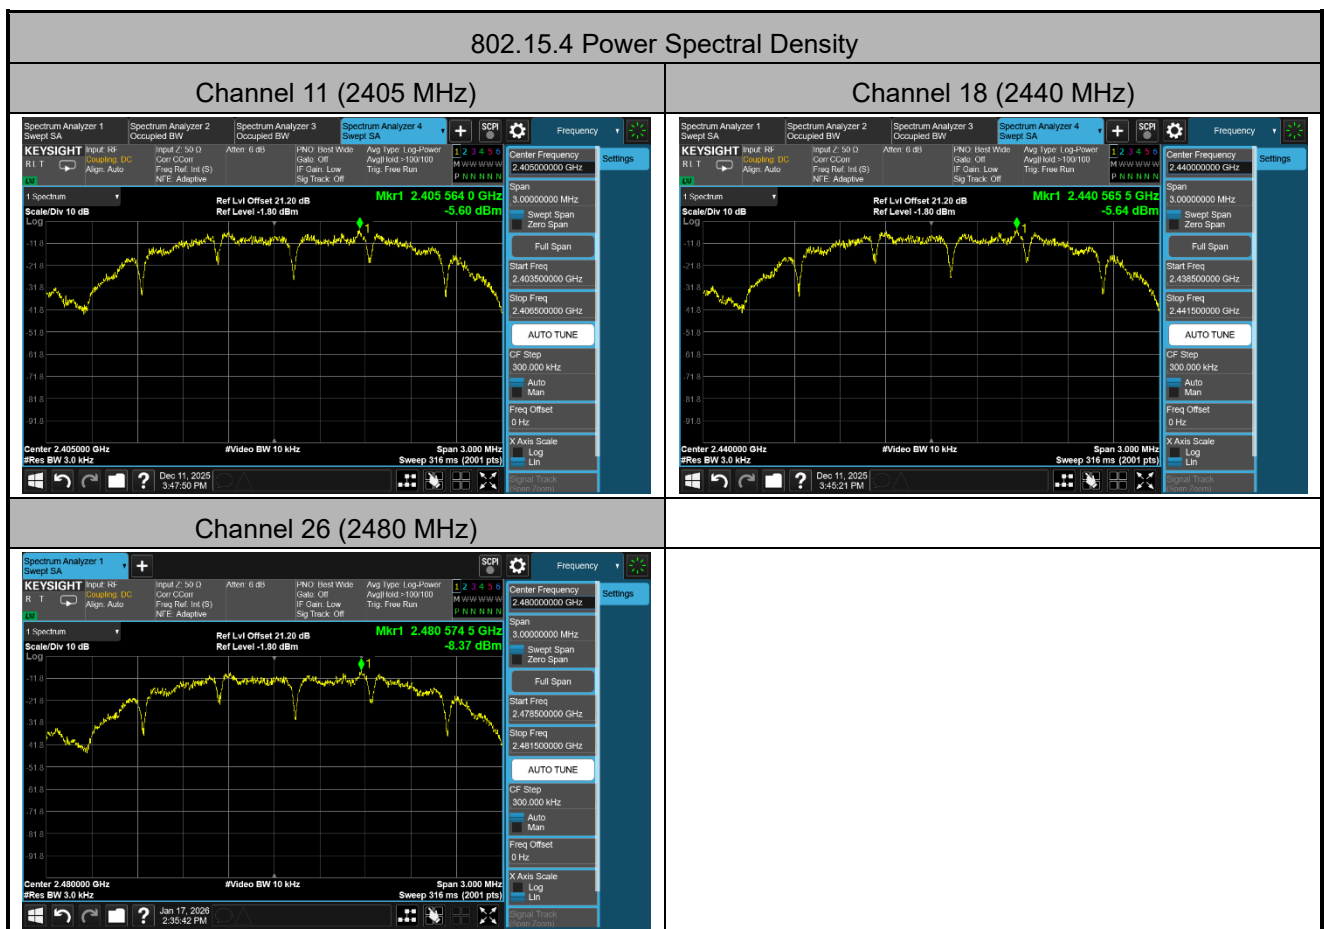

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-11 ~ 2026-01-17		

Test Mode	Data Rate /MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass
802.15.4	O-QPSK	18	2440	20	Pass
802.15.4	O-QPSK	26	2480	20	Pass

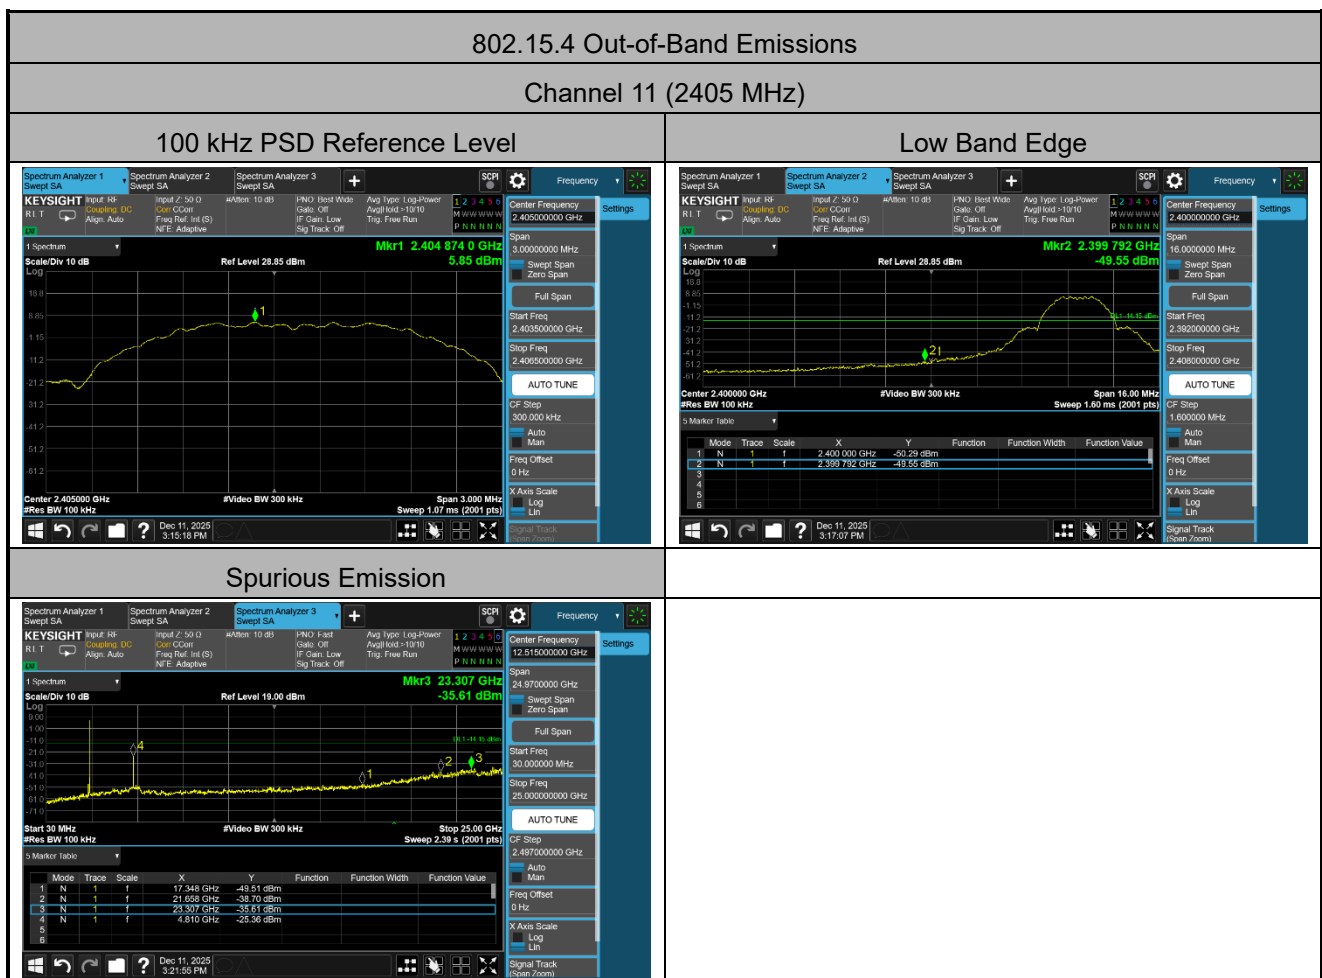


Channel 18 (2440 MHz)

100 kHz PSD Reference Level

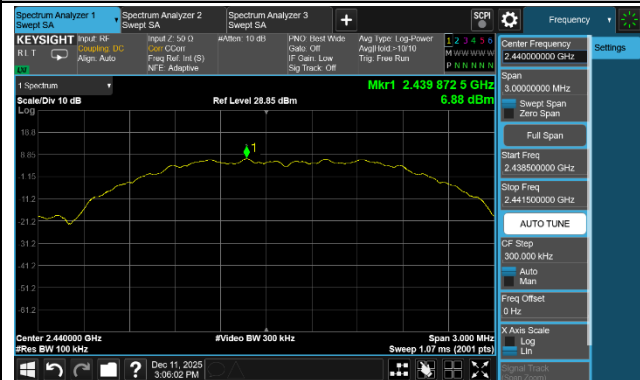


Spurious Emission

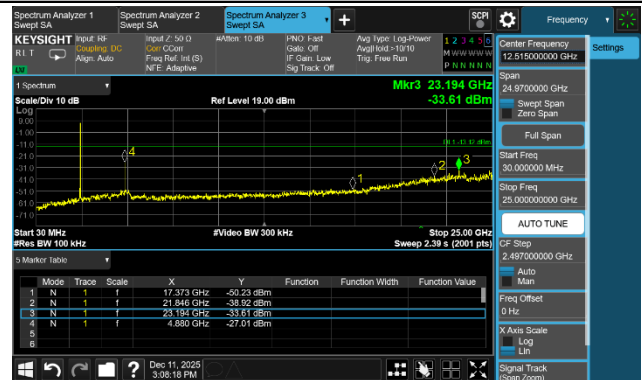


Channel 26 (2480 MHz)



100 kHz PSD Reference Level

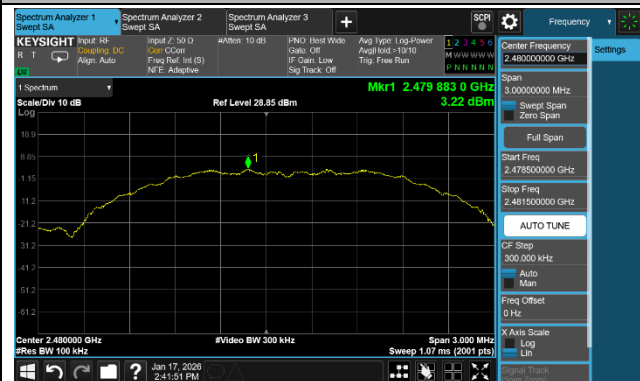

High Band Edge

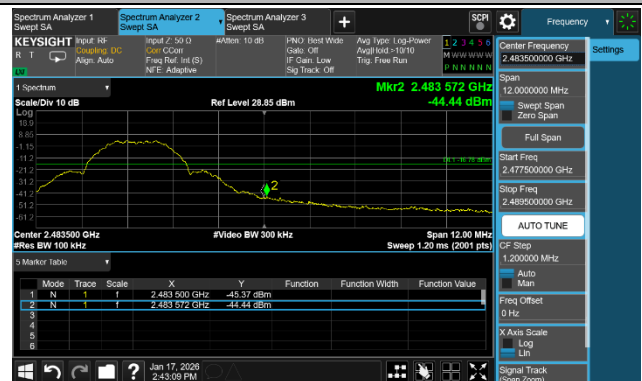

Spurious Emission

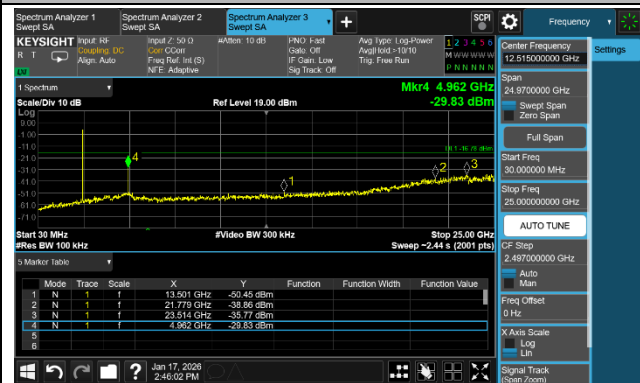

A.6 Radiated Spurious Emission Test Result

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-12-29 ~ 2026-01-21		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	3833.90	43.99	-1.38	42.61	74.00	-31.39	Peak	Horizontal
	4811.40	49.98	0.01	49.99	74.00	-24.01	Peak	Horizontal
	7528.00	43.69	5.04	48.73	74.00	-25.27	Peak	Horizontal
	3823.70	42.31	-1.41	40.90	74.00	-33.10	Peak	Vertical
	4811.40	50.11	0.01	50.12	54.00	-3.88	Average	Vertical
	4811.40	56.09	0.01	56.10	74.00	-17.90	Peak	Vertical
	7332.50	41.86	5.29	47.15	74.00	-26.85	Peak	Vertical
18	3771.00	43.11	-1.51	41.60	74.00	-32.40	Peak	Horizontal
	4879.40	48.72	0.04	48.76	74.00	-25.24	Peak	Horizontal
	7322.30	42.55	5.28	47.83	74.00	-26.17	Peak	Horizontal
	3784.60	42.93	-1.43	41.50	74.00	-32.50	Peak	Vertical
	4879.40	45.59	0.04	45.63	54.00	-8.37	Average	Vertical
	4879.40	51.66	0.04	51.70	74.00	-22.30	Peak	Vertical
	7322.30	43.53	5.28	48.81	74.00	-25.19	Peak	Vertical
26	4961.00	44.41	0.15	44.56	74.00	-29.44	Peak	Horizontal
	8051.60	40.69	5.72	46.41	74.00	-27.59	Peak	Horizontal
	11596.10	43.24	5.28	48.52	74.00	-25.48	Peak	Horizontal
	4959.30	47.09	0.14	47.23	74.00	-26.77	Peak	Vertical
	7720.10	40.06	5.23	45.29	74.00	-28.71	Peak	Vertical
	11711.70	43.20	5.35	48.55	74.00	-25.45	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst-case Result of Radiated Emission 9 kHz ~ 30 MHz:

Site	WJ-AC1	Test Date	2026-01-26
Temperature	18.4°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by ZigBee at 2440 MHz		

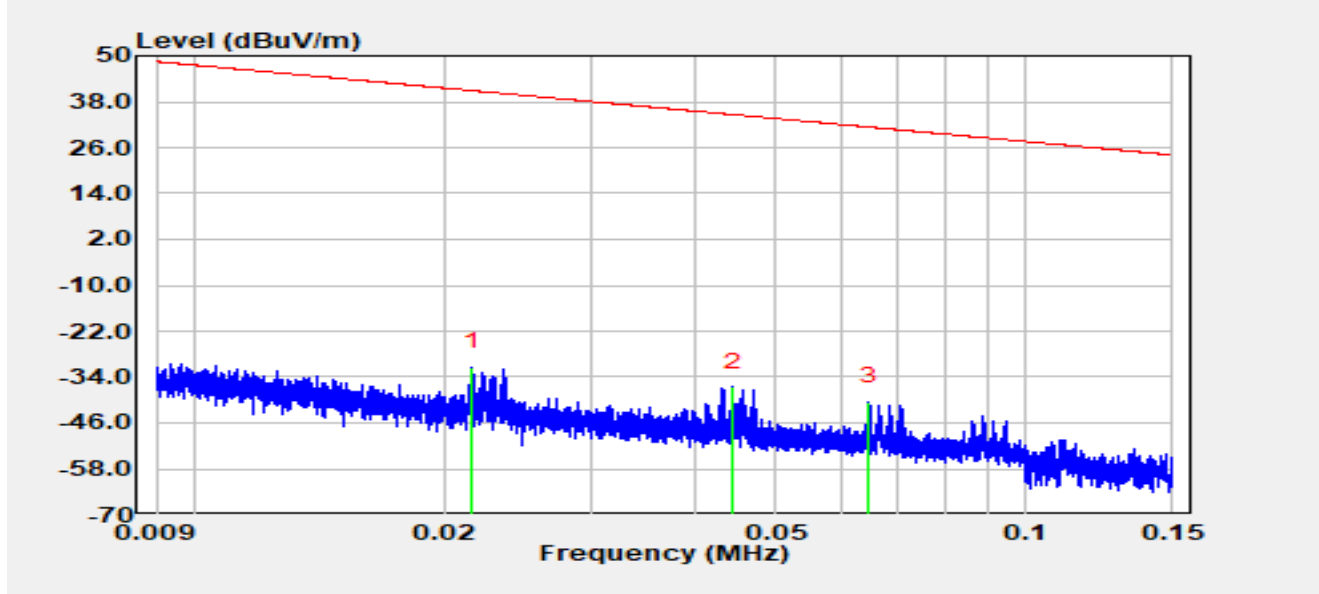


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.02	28.55	-59.95	-31.40	-72.31	40.91	Peak
2	*	0.04	23.56	-60.16	-36.60	-71.23	34.63	Peak
3		0.06	19.74	-60.18	-40.45	-71.81	31.36	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-26
Temperature	18.4°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by ZigBee at 2440 MHz		

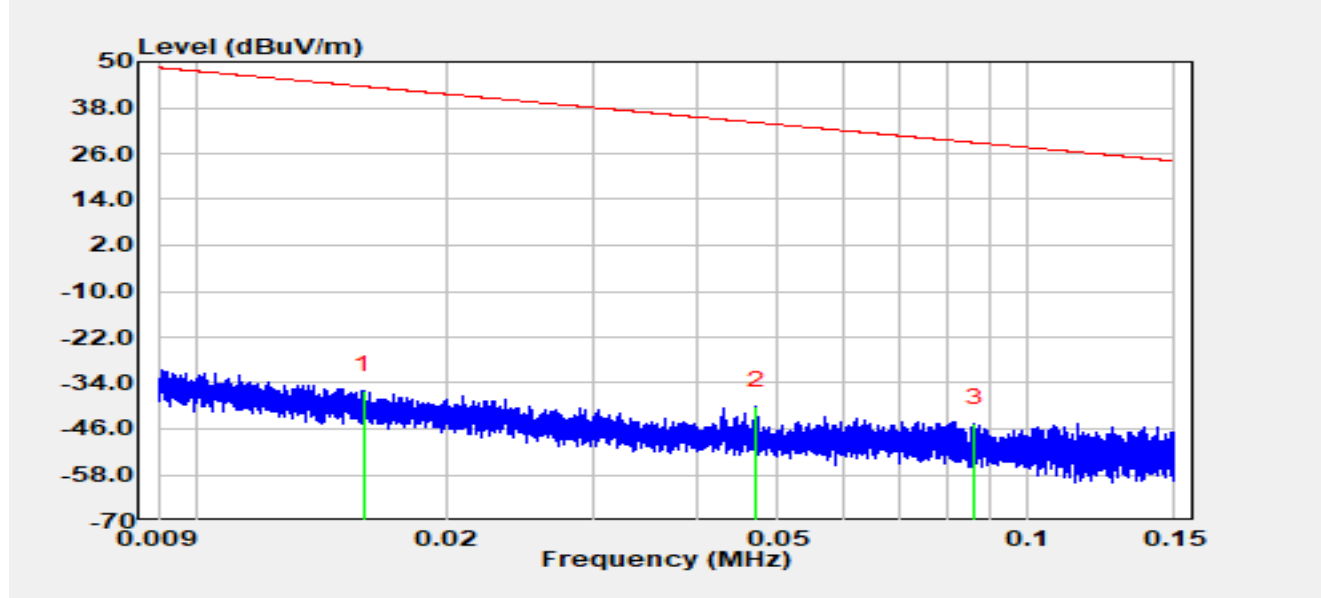


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.02	23.69	-59.66	-35.97	-79.52	43.55	Peak
2		0.05	20.21	-60.16	-39.95	-74.08	34.13	Peak
3	*	0.09	15.70	-60.20	-44.51	-73.40	28.89	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-26
Temperature	18.4°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by ZigBee at 2440 MHz		

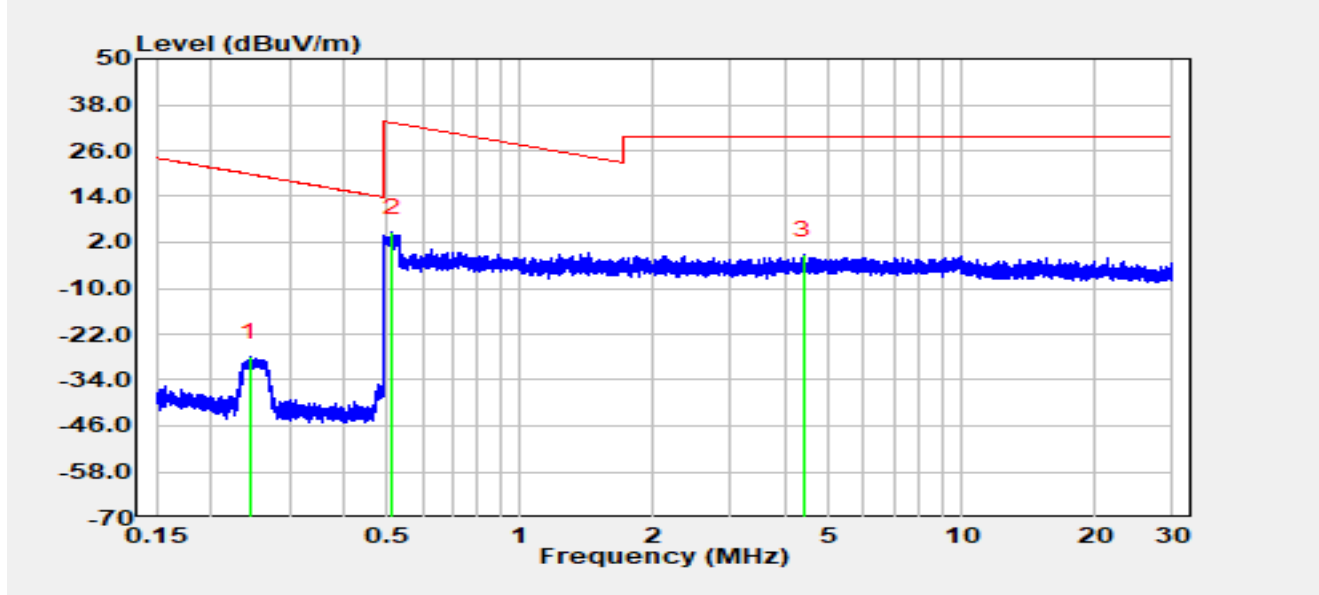


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.24	32.28	-60.29	-28.01	-47.88	19.87	Peak
2	*	0.51	24.90	-20.33	4.58	-28.80	33.38	Peak
3		4.37	19.25	-20.45	-1.20	-30.70	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-26
Temperature	18.4°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by ZigBee at 2440 MHz		

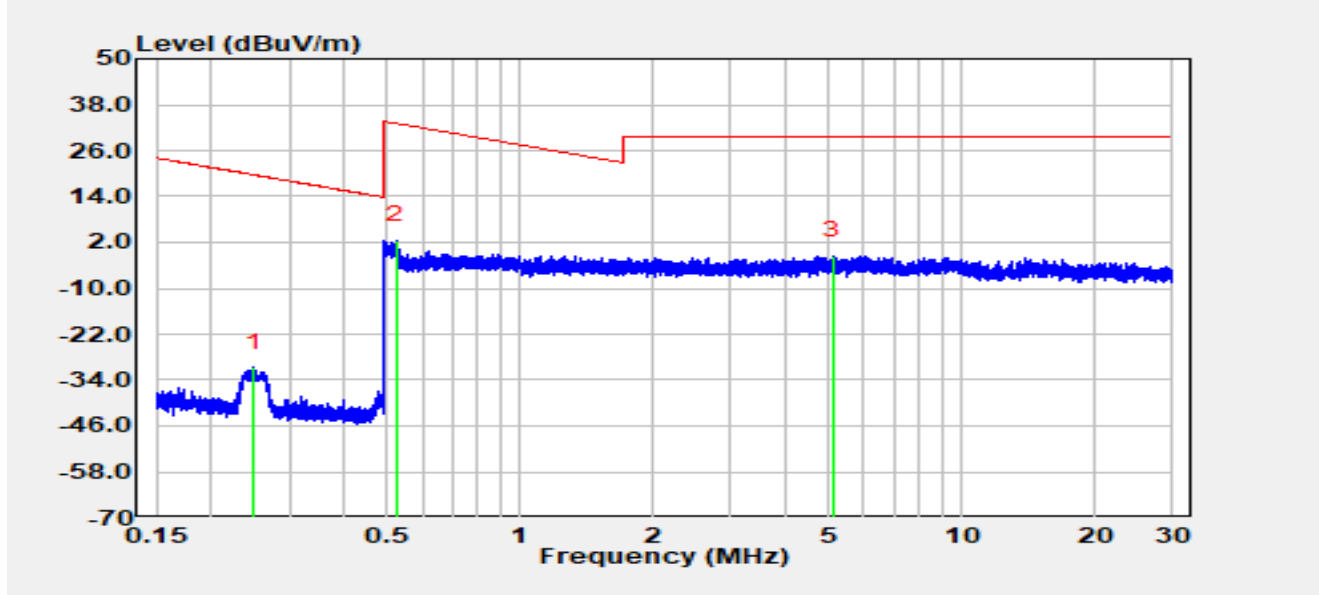


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.25	29.51	-60.29	-30.78	-50.42	19.64	Peak
2	*	0.52	22.83	-20.33	2.51	-30.74	33.24	Peak
3		5.12	19.01	-20.45	-1.44	-30.94	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission 30 MHz ~ 1 GHz:

Site	WJ-AC2	Test Date	2026-01-29
Temperature	20.6 °C	Humidity	22.3%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by ZigBee at 2440 MHz		

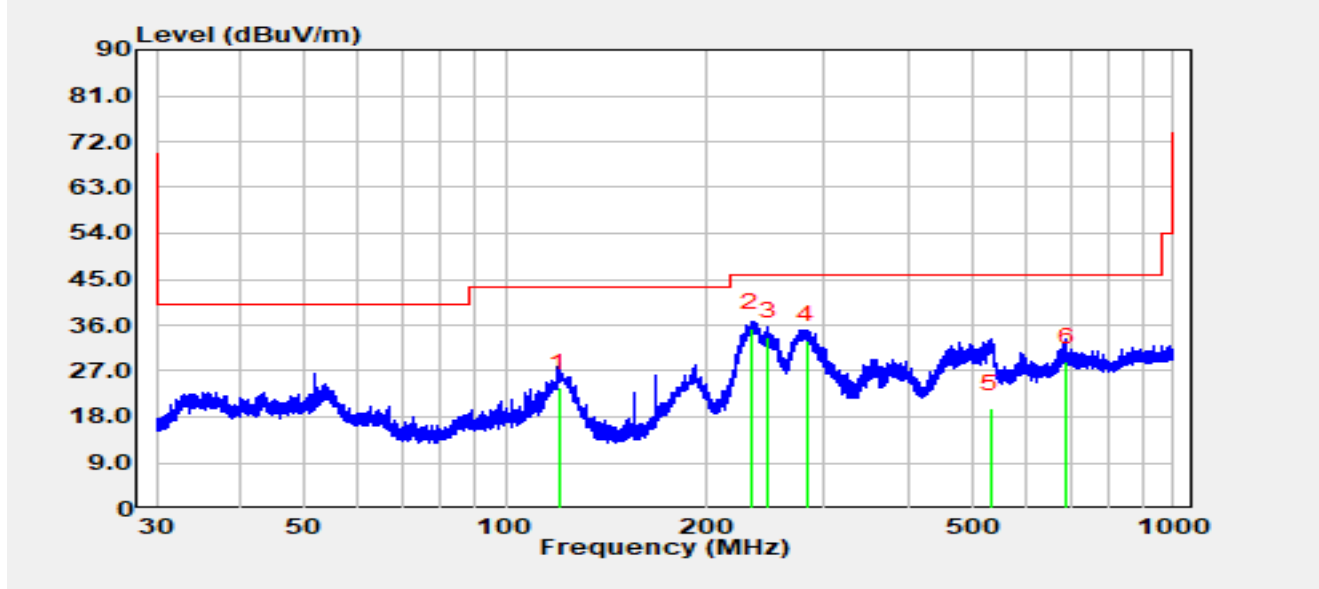


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		119.98	7.50	16.22	23.72	-19.78	43.50	QP
2	*	233.19	16.80	18.59	35.39	-10.61	46.00	QP
3		247.42	14.60	19.19	33.79	-12.21	46.00	QP
4		282.49	13.30	19.68	32.98	-13.02	46.00	QP
5		533.46	-5.00	24.70	19.70	-26.30	46.00	QP
6		691.02	1.80	26.93	28.73	-17.27	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-29
Temperature	20.6 °C	Humidity	22.3%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by ZigBee at 2440 MHz		

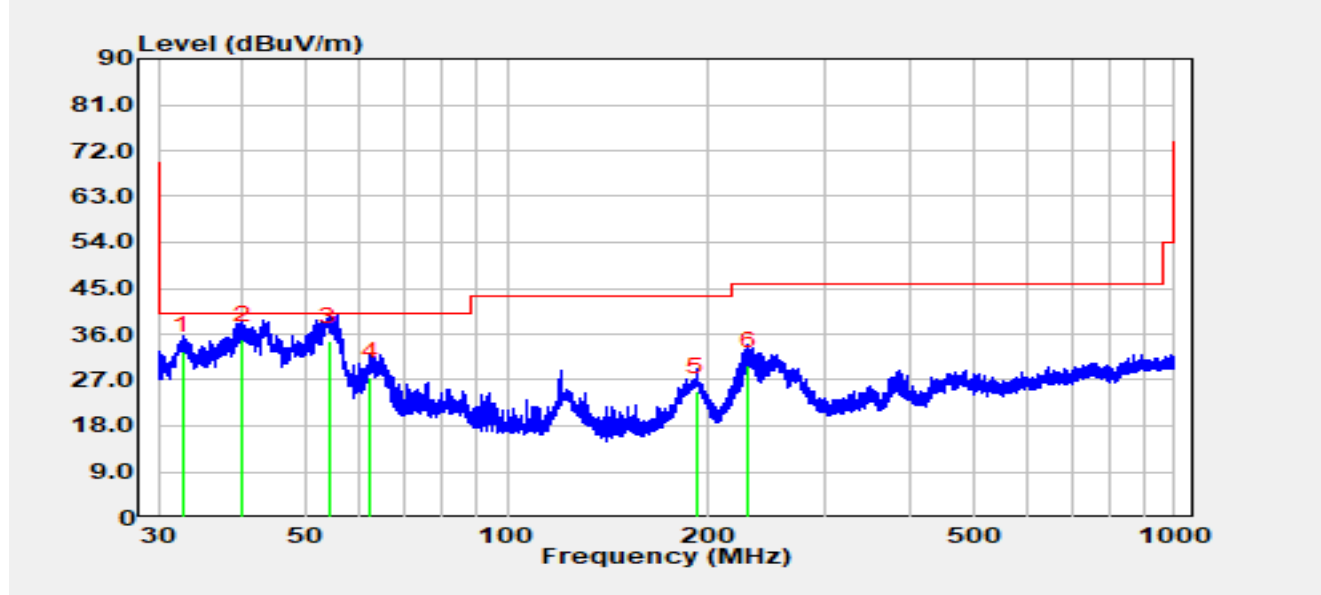


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		32.63	16.60	16.12	32.72	-7.28	40.00	QP
2	*	40.09	16.10	18.73	34.83	-5.17	40.00	QP
3		53.98	14.90	19.65	34.55	-5.45	40.00	QP
4		62.21	9.50	18.01	27.51	-12.49	40.00	QP
5		192.01	7.20	17.57	24.77	-18.73	43.50	QP
6		229.86	11.30	18.51	29.81	-16.19	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission for 1 GHz ~ 18 GHz:

Site	WJ-AC2	Test Date	2025-12-29
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by Zigbee at 2405 MHz		

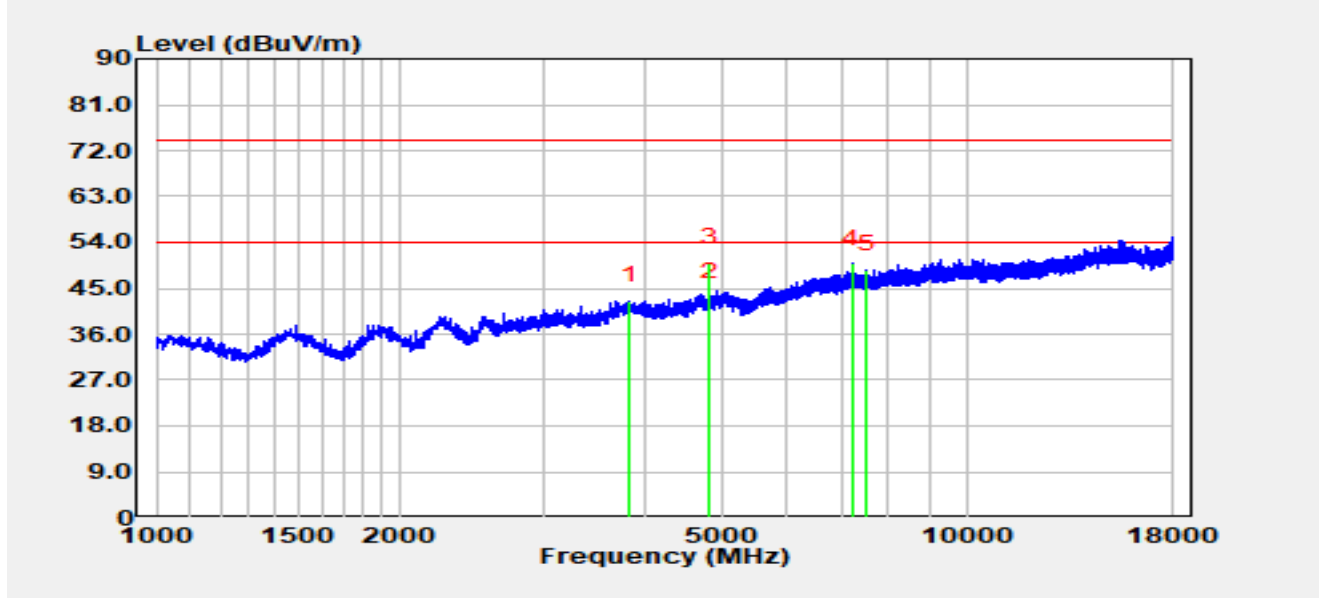


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		3833.90	43.99	-1.38	42.61	-31.39	74.00	Peak
2	*	4811.40	43.40	0.01	43.41	-10.59	54.00	Average
3		4811.40	49.98	0.01	49.99	-24.01	74.00	Peak
4		7213.50	45.00	4.77	49.77	Note 4	Note 4	Peak
5		7528.00	43.69	5.04	48.73	-25.27	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Point 4 is not in the restricted bands specified in FCC Part 15.205. For testing of non-restricted bands, refer to the test item "Conducted Band Edge and Out-of-Band Emissions".

Site	WJ-AC2	Test Date	2025-12-29
Temperature	25.7 °C	Humidity	25.3%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by Zigbee at 2405 MHz		

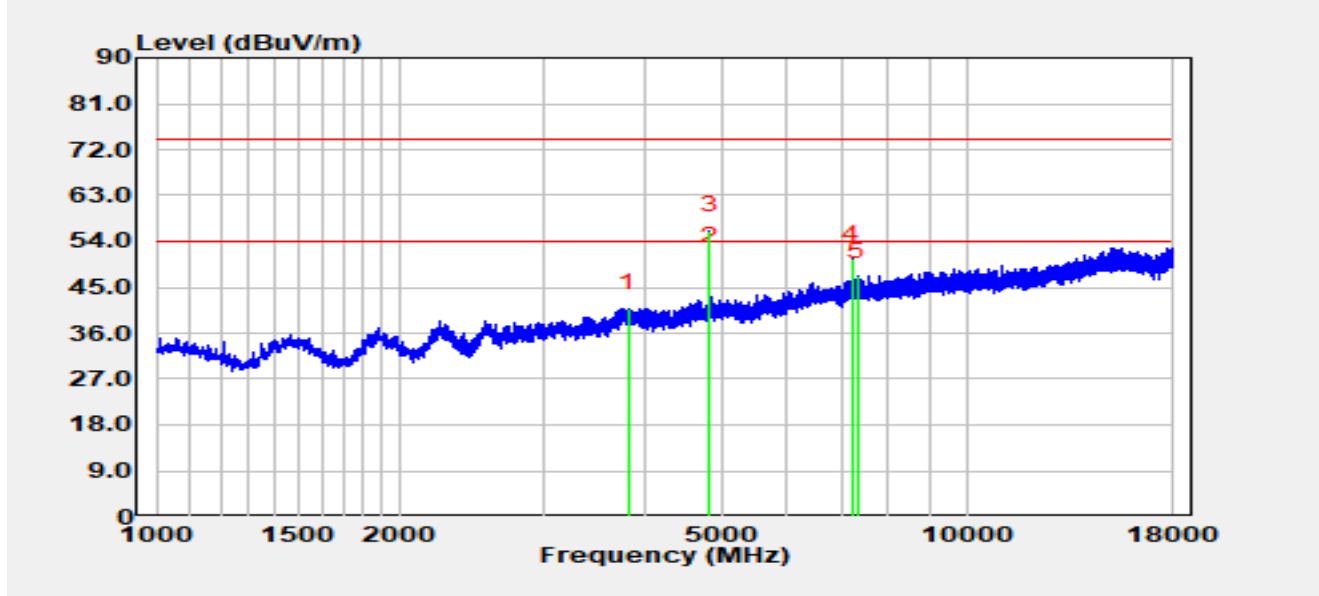


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		3823.70	42.31	-1.41	40.90	-33.10	74.00	Peak
2	*	4811.40	50.11	0.01	50.12	-3.88	54.00	Average
3		4811.40	56.09	0.01	56.10	-17.90	74.00	Peak
4		7213.50	45.74	4.77	50.51	Note 4	Note 4	Peak
5		7332.50	41.86	5.29	47.15	-26.85	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. Point 4 is not in the restricted bands specified in FCC Part 15.205. For testing of non-restricted bands, refer to the test item "Conducted Band Edge and Out-of-Band Emissions".

The Worst-case Result of Radiated Emission above 18 GHz:

Site	WJ-AC2	Test Date	2026-01-24
Temperature	20.6 °C	Humidity	22.3%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by ZigBee at 2440 MHz		

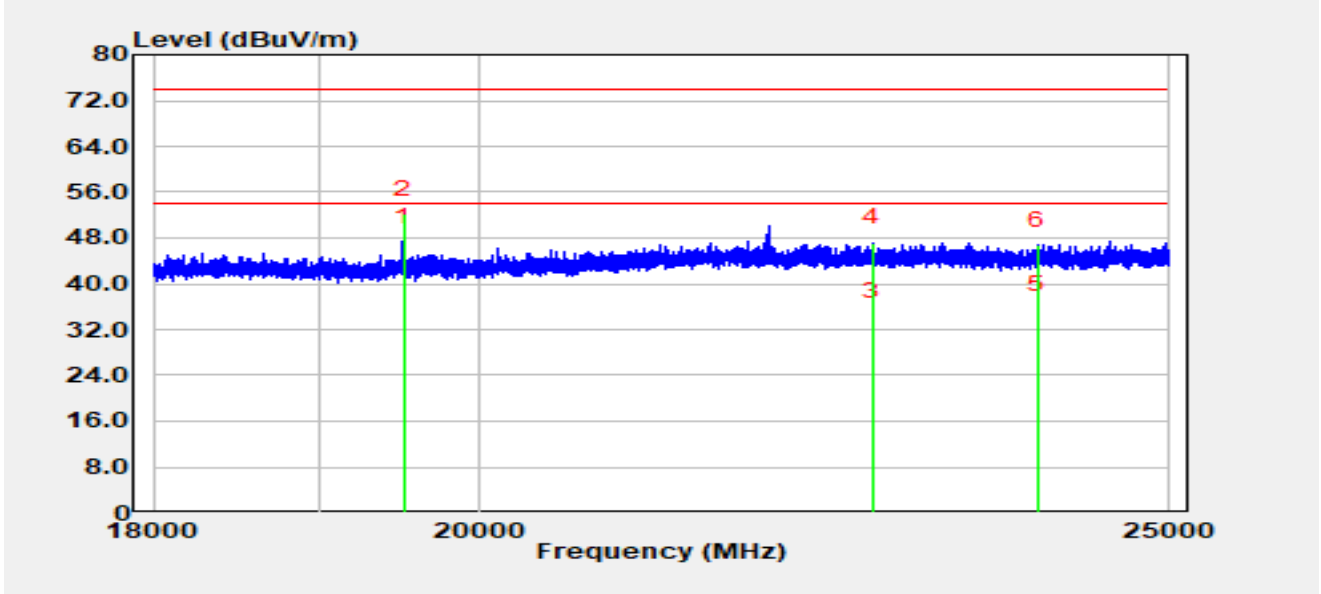


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	19516.20	55.69	-8.49	47.20	-6.80	54.00	Average
2		19516.20	60.70	-8.49	52.21	-21.79	74.00	Peak
3		22713.10	38.80	-4.46	34.34	-19.66	54.00	Average
4		22713.10	51.66	-4.46	47.20	-26.80	74.00	Peak
5		23959.80	39.25	-3.92	35.33	-18.67	54.00	Average
6		23959.80	50.67	-3.92	46.75	-27.25	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-24
Temperature	20.6 °C	Humidity	22.3%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by ZigBee at 2440 MHz		

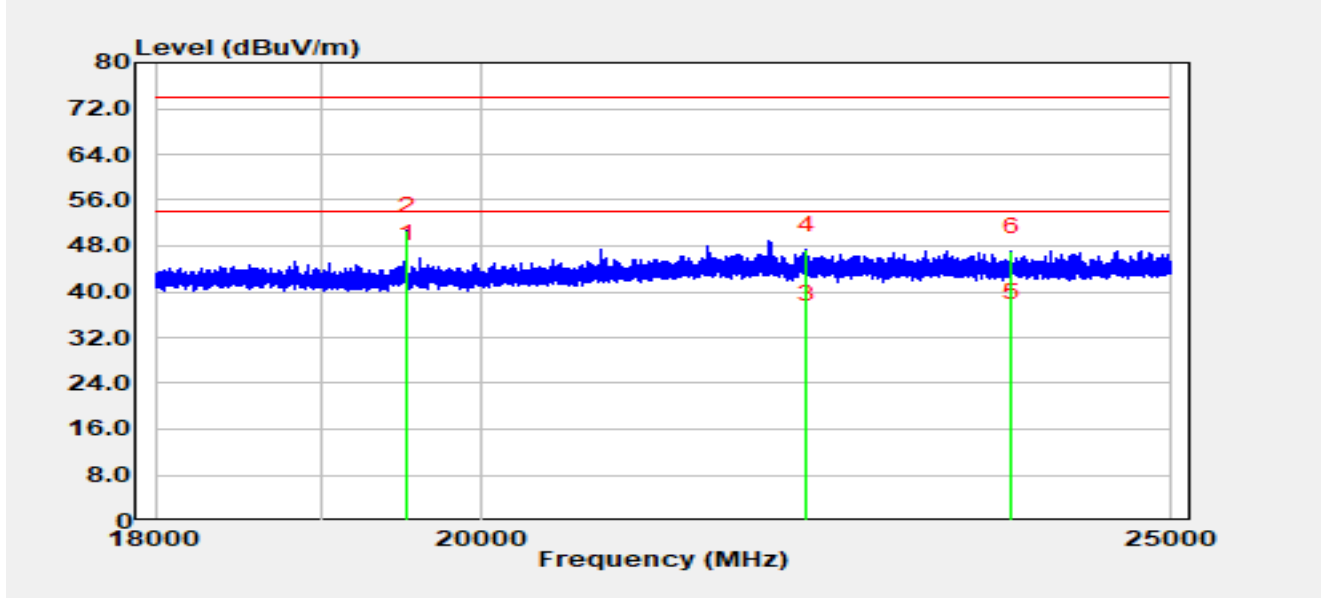


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	19524.60	54.28	-8.53	45.75	-8.25	54.00	Average
2		19524.60	59.23	-8.53	50.71	-23.29	74.00	Peak
3		22216.10	39.55	-4.51	35.04	-18.96	54.00	Average
4		22216.10	51.88	-4.51	47.36	-26.64	74.00	Peak
5		23742.80	39.78	-4.33	35.45	-18.55	54.00	Average
6		23742.80	51.29	-4.33	46.96	-27.04	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.7 Radiated Restricted Band Edge Test Result

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by ZigBee at 2405 MHz		

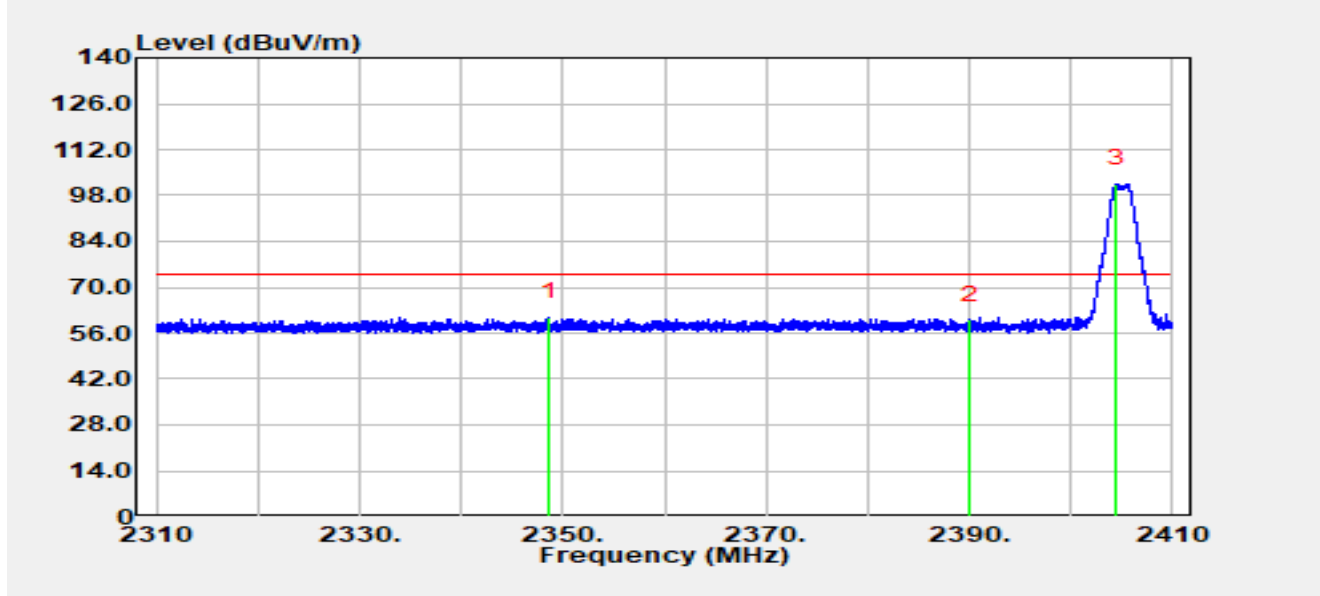


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2348.64	31.33	29.55	60.87	-13.13	74.00	Peak
2		2390.00	30.49	29.53	60.02	-13.98	74.00	Peak
3		2404.47	71.90	29.54	101.45	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by ZigBee at 2405 MHz		

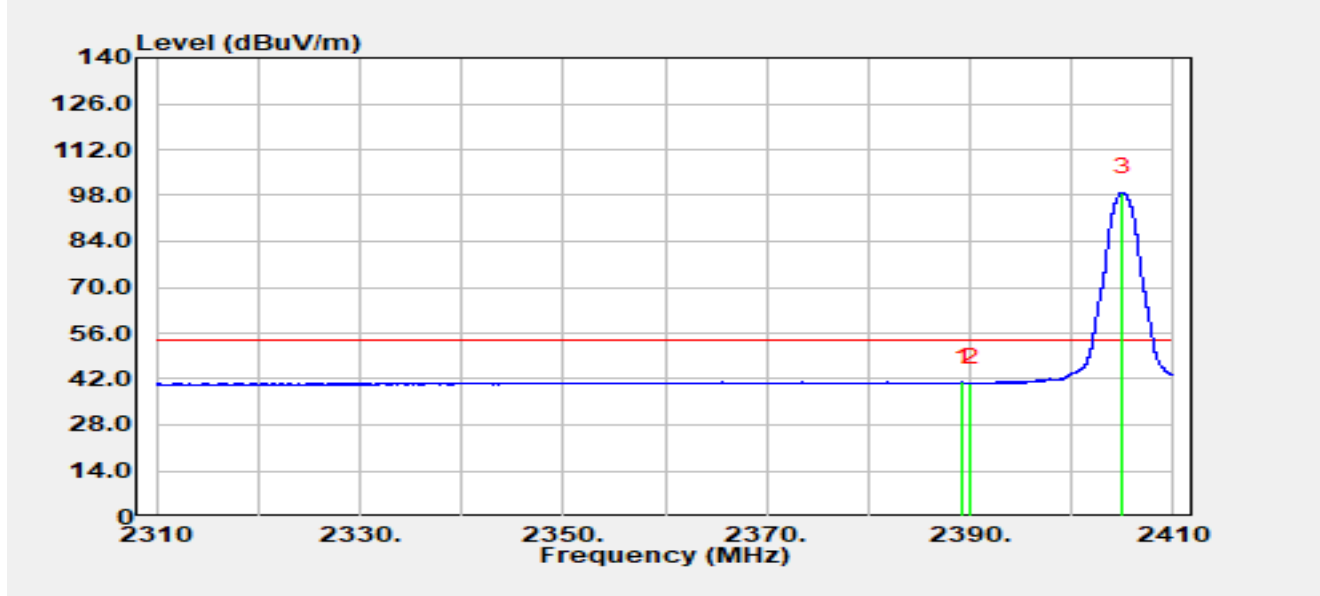


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.30	11.63	29.53	41.16	-12.84	54.00	Average
2		2390.00	11.21	29.53	40.74	-13.26	54.00	Average
3		2405.00	69.33	29.54	98.88	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by ZigBee at 2405 MHz		

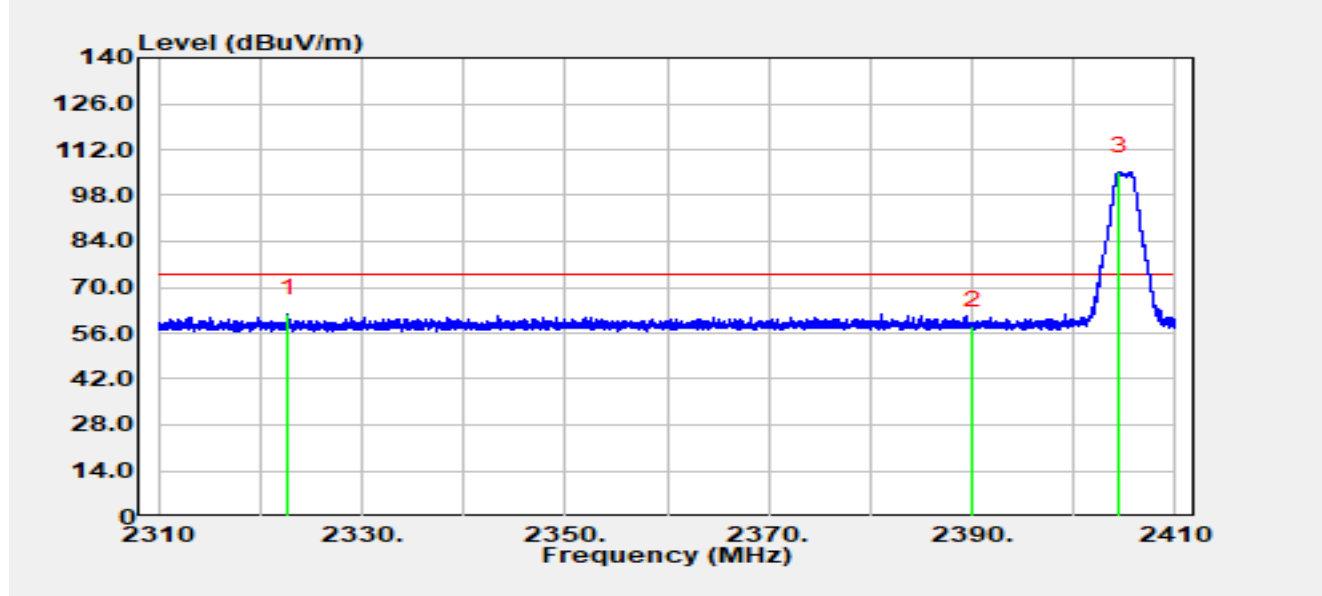


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2322.74	32.51	29.52	62.04	-11.96	74.00	Peak
2		2390.00	28.82	29.53	58.35	-15.65	74.00	Peak
3		2404.48	75.81	29.54	105.35	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by ZigBee at 2405 MHz		

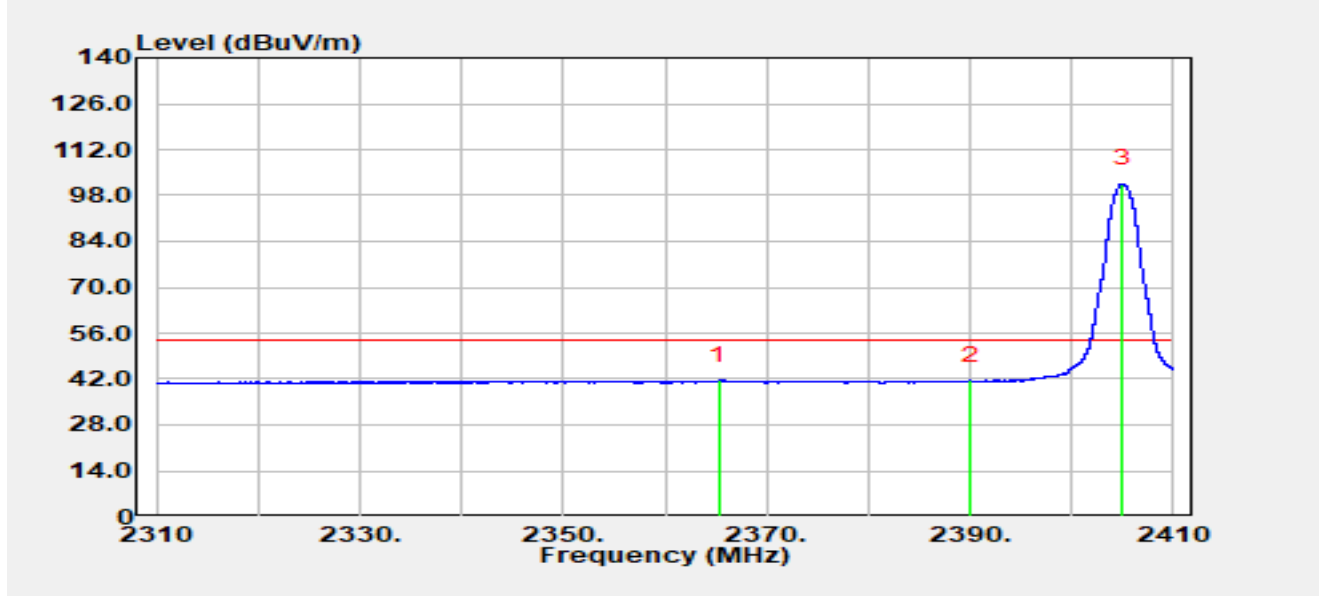


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2365.36	12.08	29.55	41.63	-12.37	54.00	Average
2		2390.00	11.95	29.53	41.48	-12.52	54.00	Average
3		2404.99	72.04	29.54	101.58	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by ZigBee at 2480 MHz		

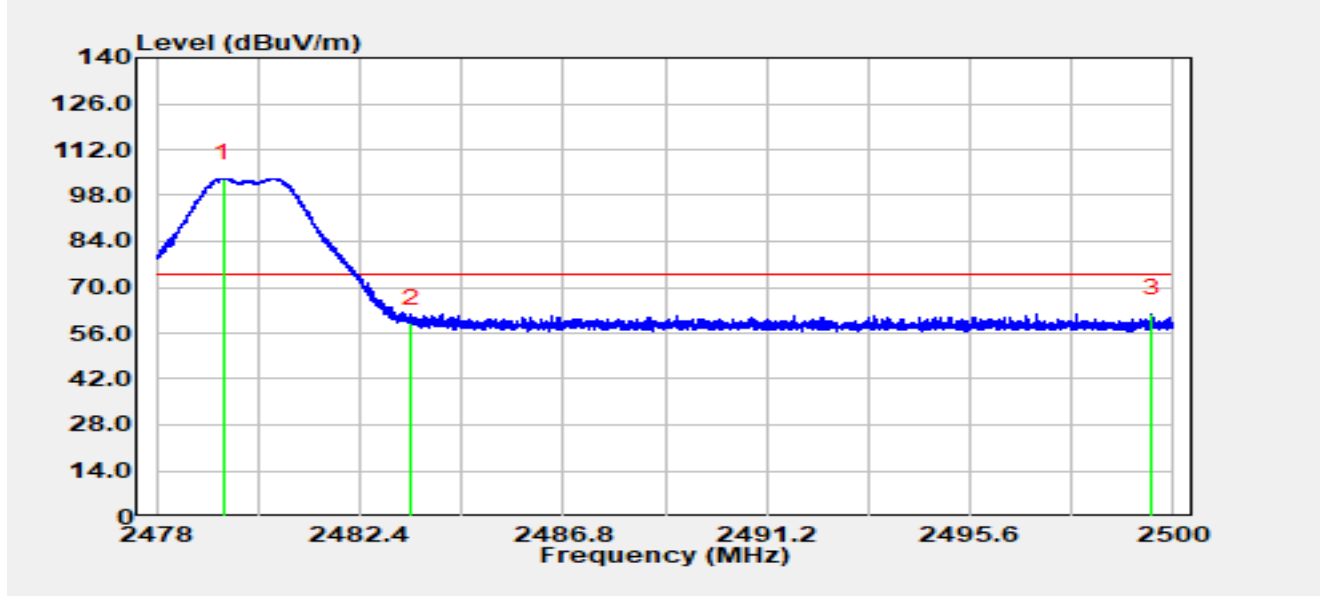


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.45	73.69	29.58	103.27	N/A	N/A	Peak
2		2483.50	29.47	29.59	59.06	-14.94	74.00	Peak
3	*	2499.53	32.23	29.62	61.86	-12.14	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by ZigBee at 2480 MHz		

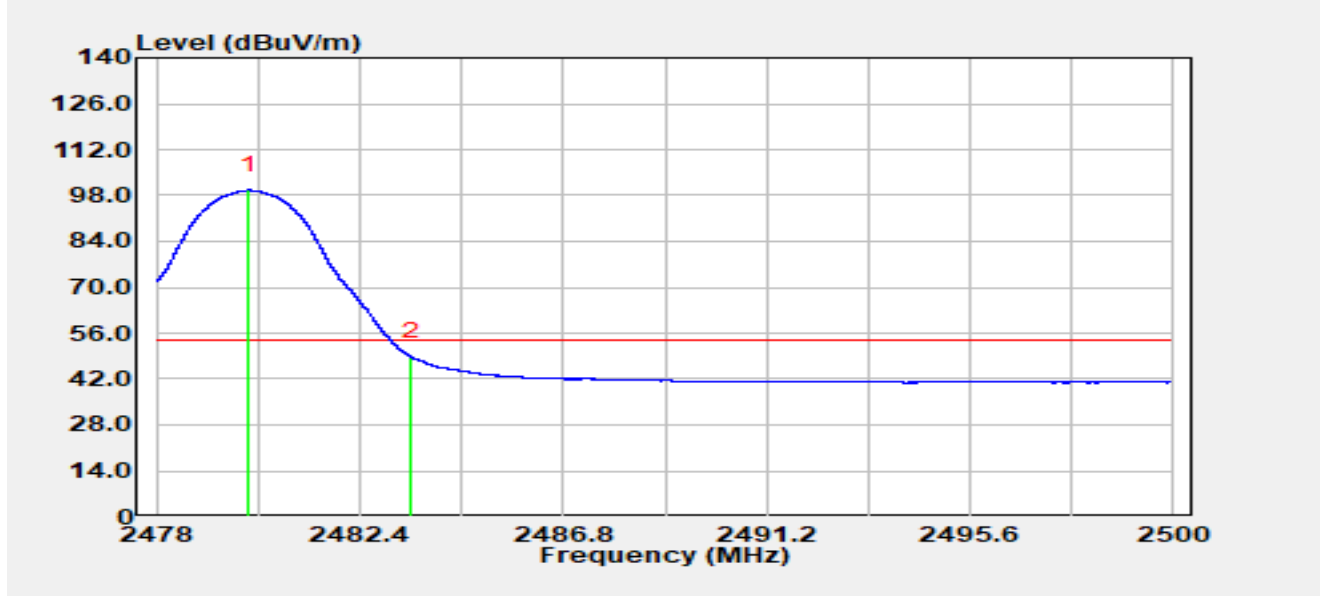


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.99	70.02	29.58	99.60	N/A	N/A	Average
2	*	2483.50	19.23	29.59	48.82	-5.18	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by ZigBee at 2480 MHz		

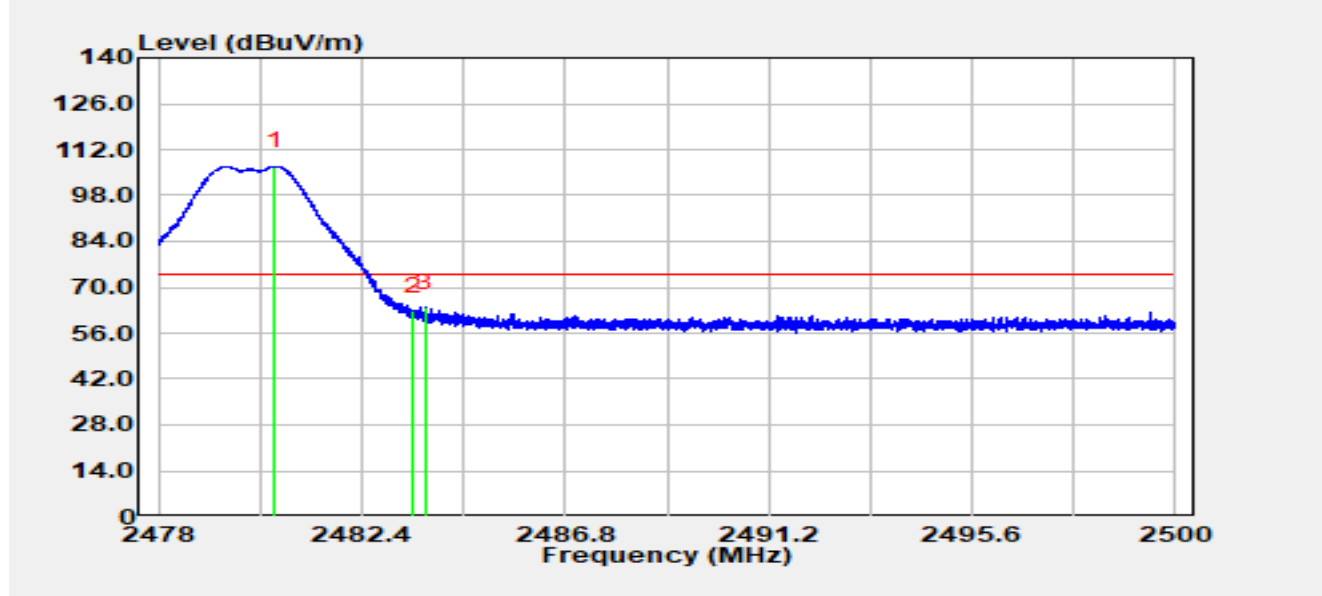


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.51	77.22	29.58	106.80	N/A	N/A	Peak
2		2483.50	33.17	29.59	62.77	-11.23	74.00	Peak
3	*	2483.77	34.26	29.59	63.85	-10.15	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-16
Temperature	19.7 °C	Humidity	32.3%
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by ZigBee at 2480 MHz		

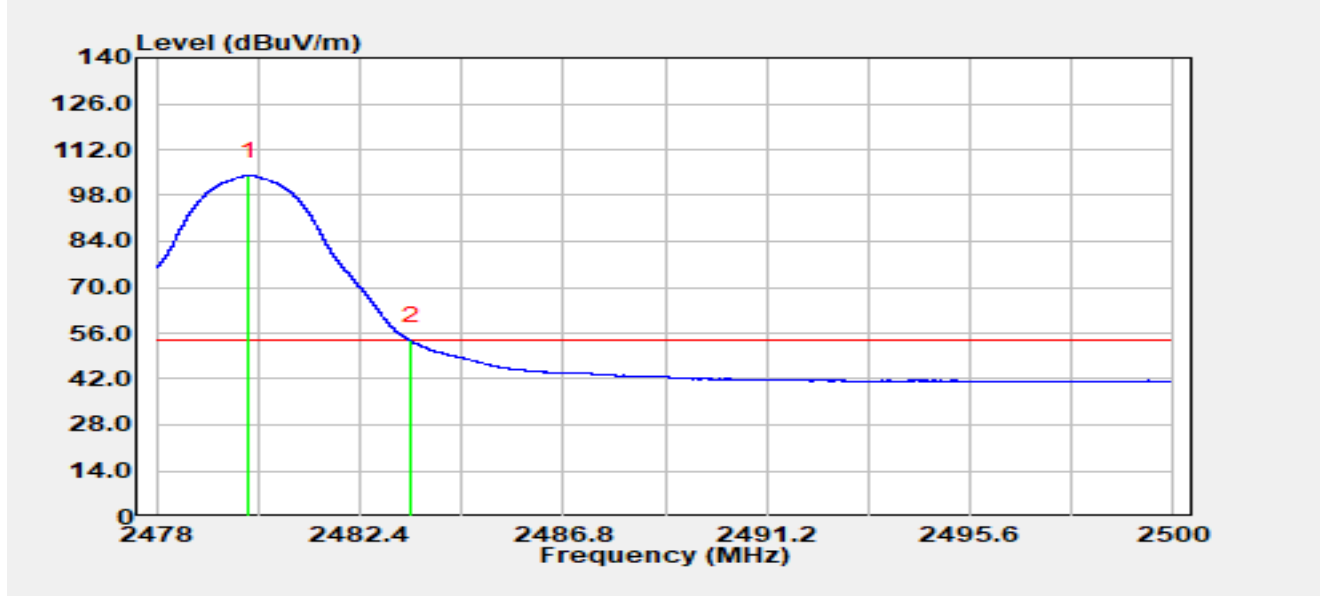

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.00	74.33	29.58	103.91	N/A	N/A	Average
2	*	2483.50	24.11	29.59	53.70	-0.30	54.00	Average


Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Note	Transmit by ZigBee at 2440 MHz
Test Voltage	AC 120 V/60 Hz
Test Engineer	Carl Jiang
Test Date	2026-01-23
Temp	15.7 °C
Humi	30.3%
Polarity	L
Test Site	WJ-SR5

Spectrum Overview

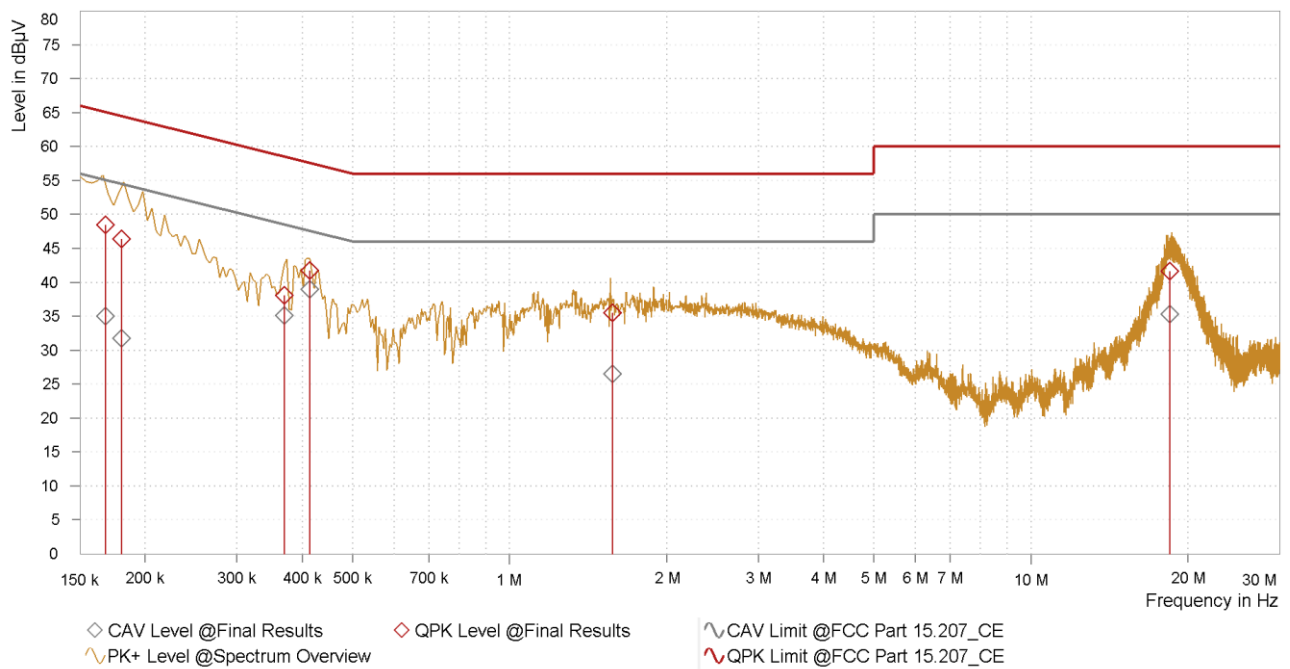

Final Results

Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	QPK Raw Lvl [dBµV]	CAV Level [dBµV]	CAV Limit [dBµV]	CAV Margin [dB]	CAV Raw Lvl [dBµV]	Correction [dB]	Line
0.168	48.46	65.06	16.60	38.75	35.04	55.06	20.01	25.34	9.70	L1
0.180	46.37	64.49	18.12	36.66	31.79	54.49	22.70	22.08	9.71	L1
0.370	38.12	58.50	20.38	28.44	35.13	48.50	13.37	25.45	9.68	L1
0.414	41.69	57.57	15.88	32.01	38.92	47.57	8.65	29.25	9.68	L1
1.574	35.52	56.00	20.48	25.75	26.54	46.00	19.46	16.77	9.77	L1
18.472	41.63	60.00	18.37	31.54	35.31	50.00	14.69	25.22	10.09	L1

Notes:

1. QPK Level [dB μ V] = QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V] = CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB] = LISN Factor [dB] + Cable Loss [dB]

Note Transmit by ZigBee at 2440 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-23


Temp 15.7°C

Humi 30.3%

Polarity N

Test Site WJ-SR5

Spectrum Overview

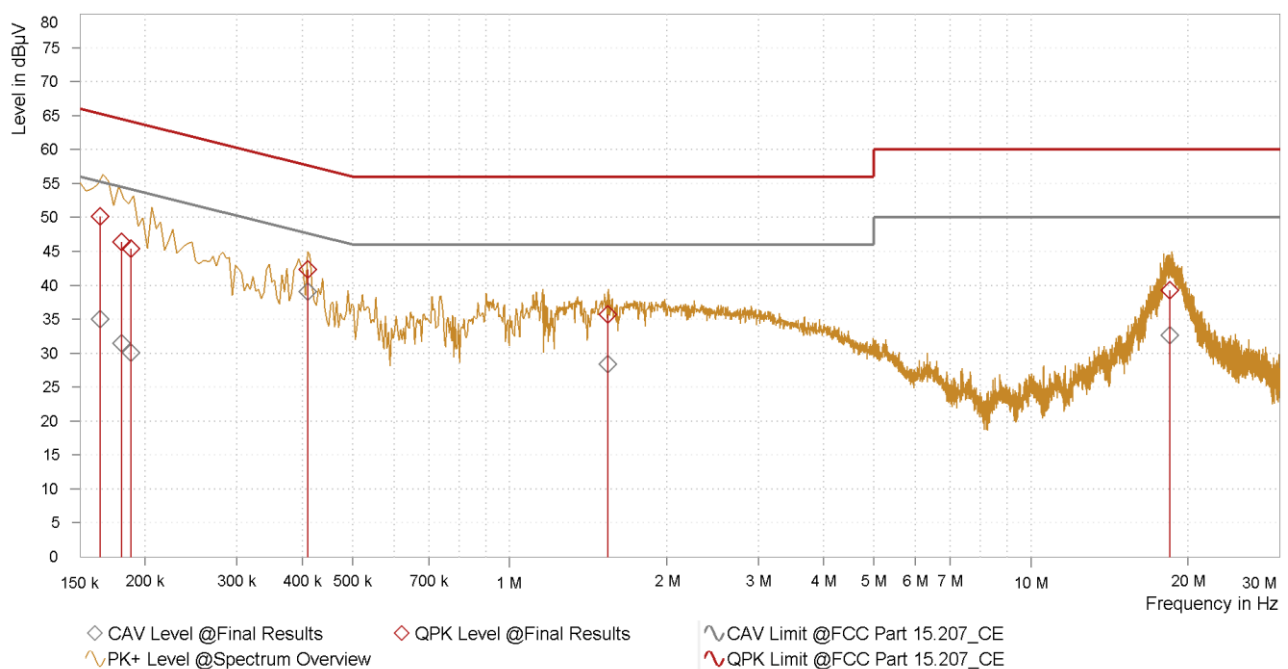

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.164	50.14	65.26	15.12	40.49	34.96	55.26	20.30	25.31	9.65	N
0.180	46.39	64.49	18.10	36.73	31.41	54.49	23.07	21.75	9.66	N
0.188	45.38	64.12	18.74	35.71	30.03	54.12	24.10	20.36	9.67	N
0.410	42.33	57.65	15.31	32.66	39.06	47.65	8.59	29.38	9.68	N
1.543	35.67	56.00	20.33	25.92	28.42	46.00	17.58	18.67	9.75	N
18.467	39.29	60.00	20.71	29.12	32.65	50.00	17.35	22.48	10.17	N

Notes:

1. QPK Level [dB μ V] = QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V] = CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB] = LISN Factor [dB] + Cable Loss [dB]

Appendix B - Test Setup Photograph

Refer to "R25S1060119-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1060119-UE" file.

_____ The End _____