

|                                                                 |
|-----------------------------------------------------------------|
| <b>Annex A: System Check</b>                                    |
| <b>Tested Model : X6878</b>                                     |
| <b>Report Number:</b><br><b>WSCT-ANAB-R&amp;E251000081A-SAR</b> |

Measurement Report for Device, , , UID 0 -, Channel 0 (750.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 750.000, 0                      | 9.16              | 0.885                  | 43.9             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025-12-06    | 2025-12-06    |
| psSAR1g [W/kg]      | 0.853         | 0.858         |
| psSAR10g [W/kg]     | 0.573         | 0.570         |
| Power Drift [dB]    | 0.00          | 0.01          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 86.4          |
| Dist 3dB Peak [mm]  |               | 22.1          |

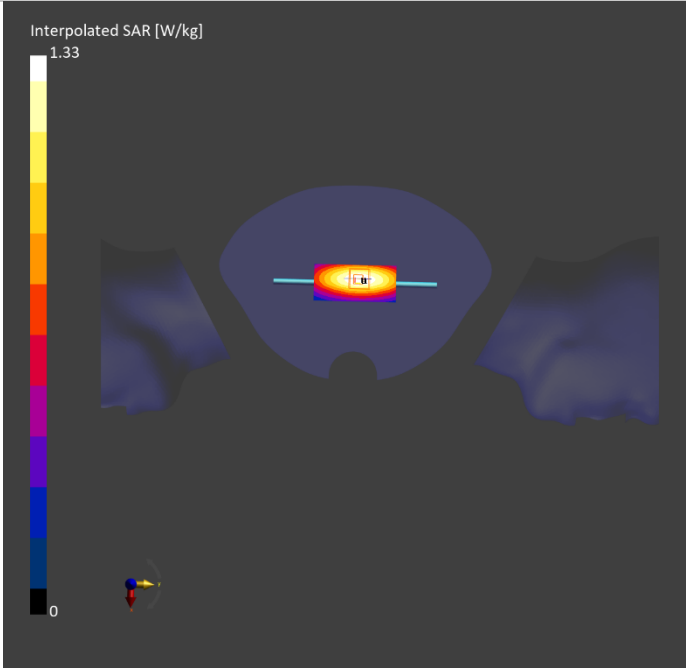

Measurement Report for Device, , , UID 0 -, Channel 0 (835.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 835.000, 0                      | 8.89              | 0.914                  | 416              |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025-12-09    | 2025-12-09    |
| psSAR1g [W/kg]      | 0.993         | 0.994         |
| psSAR10g [W/kg]     | 0.653         | 0.655         |
| Power Drift [dB]    | 0.01          | 0.02          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 86.2          |
| Dist 3dB Peak [mm]  |               | 16.4          |

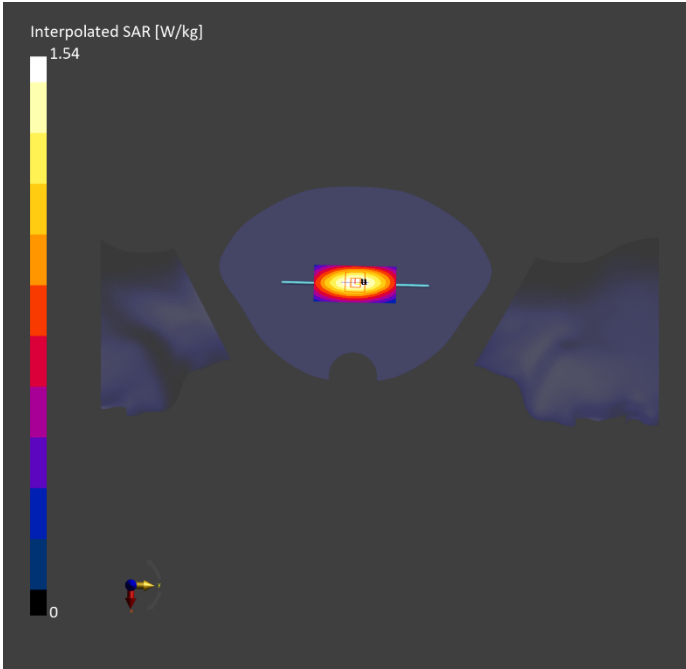

Measurement Report for Device, , , UID 0 -, Channel 0 (1750.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 1750.000, 0                     | 7.6               | 1.34                   | 41.9             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025-12-11    | 2025-12-11    |
| psSAR1g [W/kg]      | 3.62          | 3.62          |
| psSAR10g [W/kg]     | 1.92          | 1.95          |
| Power Drift [dB]    | 0.01          | 0.00          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 83.2          |
| Dist 3dB Peak [mm]  |               | 10.8          |

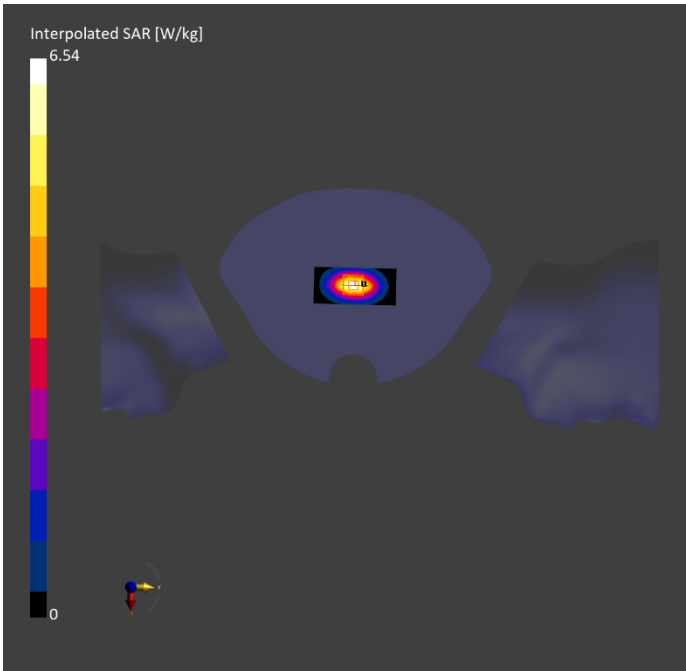

Measurement Report for Device, , , UID 0 -, Channel 0 (1900.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 1900.000, 0                     | 7.33              | 1.44                   | 41.7             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025-12-13    | 2025-12-13    |
| psSAR1g [W/kg]      | 4.01          | 4.04          |
| psSAR10g [W/kg]     | 2.10          | 2.11          |
| Power Drift [dB]    | -0.01         | 0.02          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 83.0          |
| Dist 3dB Peak [mm]  |               | 9.6           |

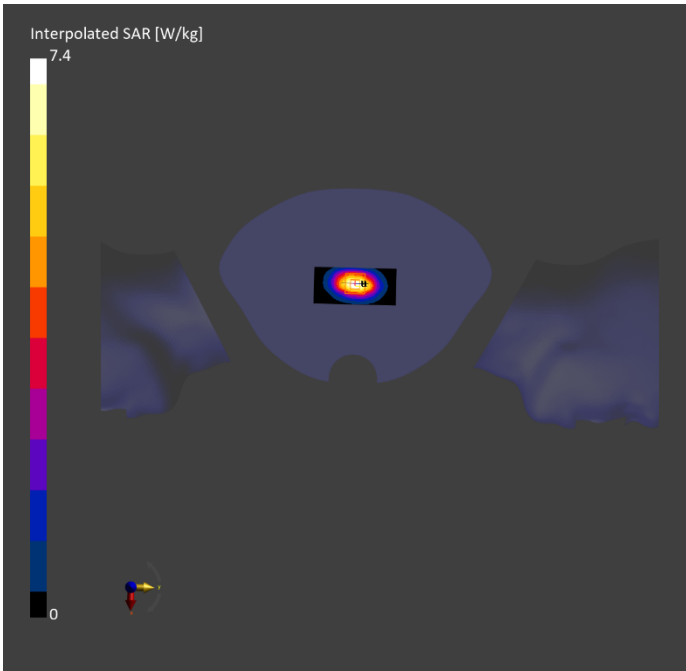

Measurement Report for Device, , , UID 0 -, Channel 0 (2550.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 2550.000, 0                     | 6.94              | 1.90                   | 40.8             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025-12-18    | 2025-12-18    |
| psSAR1g [W/kg]      | 5.48          | 5.58          |
| psSAR10g [W/kg]     | 2.53          | 2.56          |
| Power Drift [dB]    | 0.00          | 0.01          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 80.5          |
| Dist 3dB Peak [mm]  |               | 9.0           |

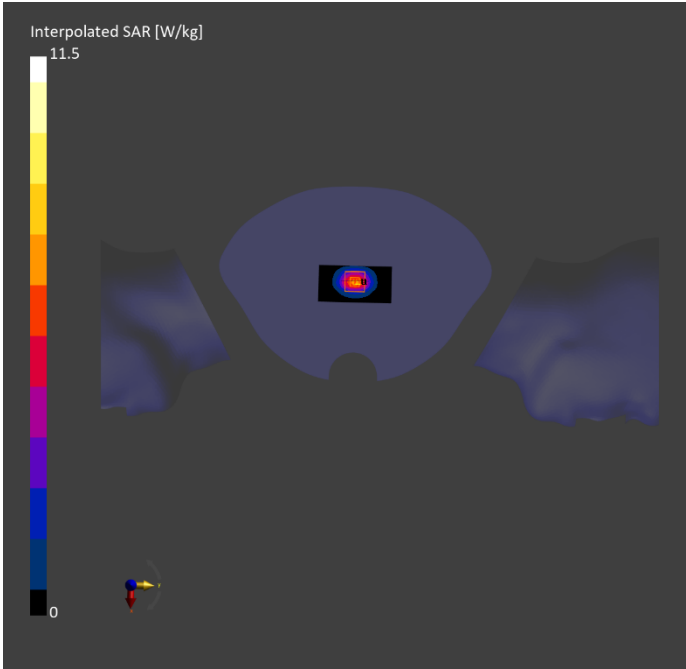

Measurement Report for Device, , , UID 0 -, Channel 0 (3400.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 3400.000, 0                     | 6.14              | 2.63                   | 39.3             |

Hardware Setup

| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7895, 2024-10-28 | DAE4ip Sn1872, 2024-10-18 |

Scan Setup


|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 28.0 x 28.0 x 28.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025- 12-23   | 2025- 12-23   |
| psSAR1g [W/kg]      | 7.11          | 7.25          |
| psSAR10g [W/kg]     | 2.77          | 2.81          |
| Power Drift [dB]    | -0.07         | 0.25          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 76.2          |
| Dist 3dB Peak [mm]  |               | 8.1           |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan                              |
|------------|-----------|----------------------------------------|
| Warning(s) |           | Power drift exceeds warning threshold. |
| Error(s)   |           |                                        |

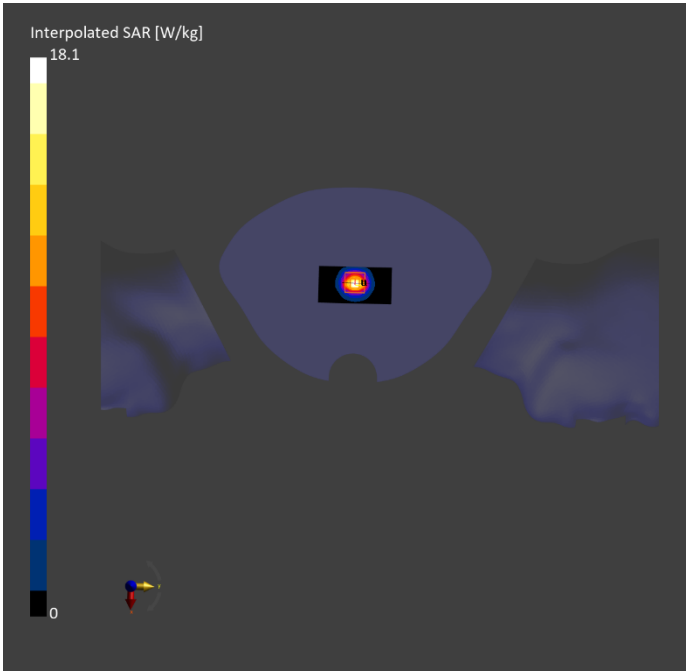

Measurement Report for Device, , , UID 0 -, Channel 0 (3500.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 3500.000, 0                     | 6.22              | 2.72                   | 39.2             |

Hardware Setup

| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7895, 2024-10-28 | DAE4ip Sn1872, 2024-10-18 |

Scan Setup


|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 28.0 x 28.0 x 28.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025- 12-26   | 2025- 12-26   |
| psSAR1g [W/kg]      | 6.11          | 6.28          |
| psSAR10g [W/kg]     | 2.36          | 2.40          |
| Power Drift [dB]    | 0.01          | 0.03          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 75.3          |
| Dist 3dB Peak [mm]  |               | 8.1           |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

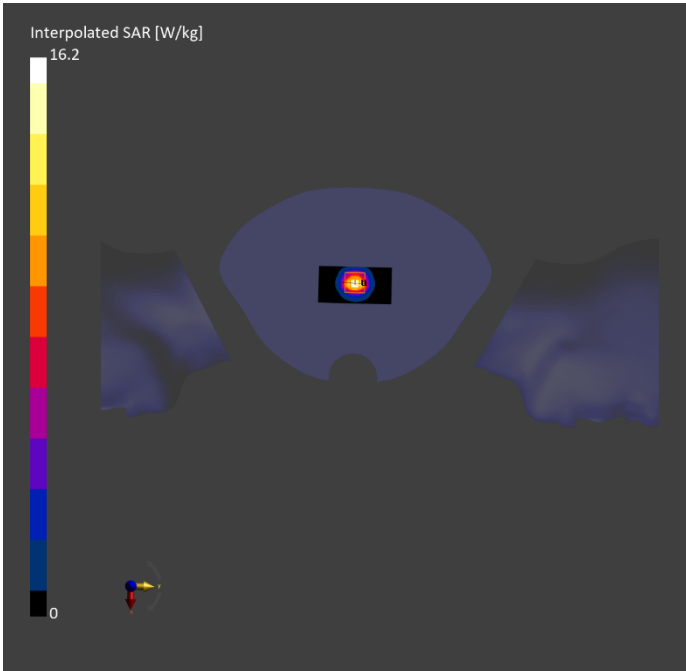

Measurement Report for Device, , , UID 0 -, Channel 0 (3700.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 3700.000, 0                     | 6.24              | 2.90                   | 38.9             |

Hardware Setup

| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7895, 2024-10-28 | DAE4ip Sn1872, 2024-10-18 |

Scan Setup


|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 28.0 x 28.0 x 28.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025- 12-29   | 2025- 12-29   |
| psSAR1g [W/kg]      | 6.09          | 6.37          |
| psSAR10g [W/kg]     | 2.31          | 2.37          |
| Power Drift [dB]    | 0.01          | 0.01          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 74.1          |
| Dist 3dB Peak [mm]  |               | 8.0           |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

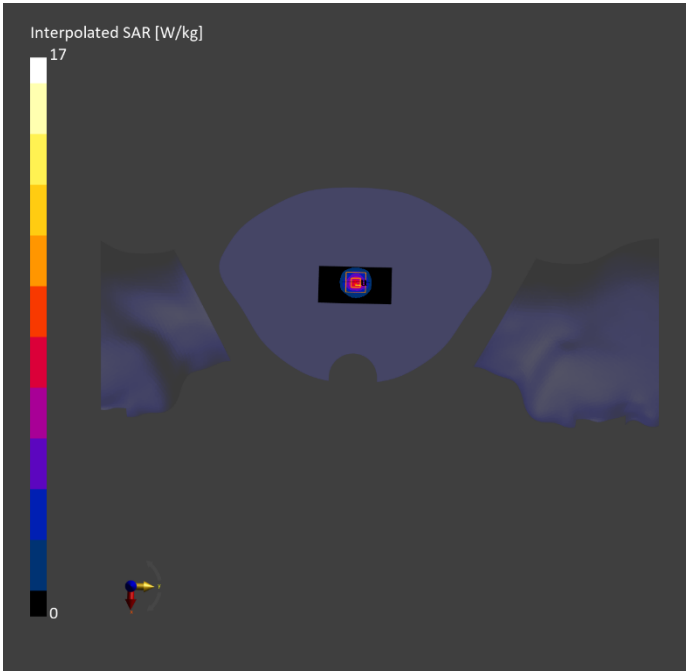

Measurement Report for Device, , , UID 0 -, Channel 0 (3900.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 3900.000, 0                     | 6.11              | 3.10                   | 38.6             |

Hardware Setup

| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7895, 2024-10-28 | DAE4ip Sn1872, 2024-10-18 |

Scan Setup


|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 28.0 x 28.0 x 28.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.5                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2025- 12-31   | 2025- 12-31   |
| psSAR1g [W/kg]      | 6.61          | 6.74          |
| psSAR10g [W/kg]     | 2.34          | 2.38          |
| Power Drift [dB]    | -0.05         | -0.06         |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 72.9          |
| Dist 3dB Peak [mm]  |               | 8.0           |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

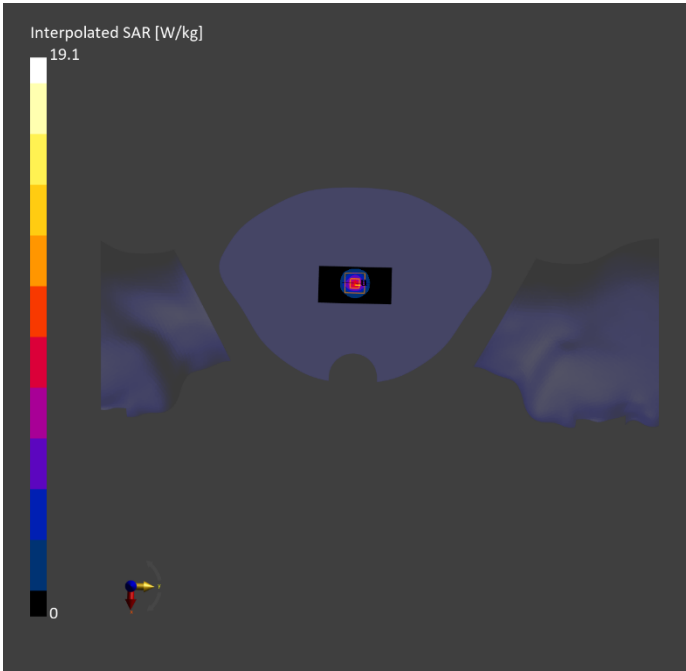

Measurement Report for Device, , , UID 0 -, Channel 0 (5200.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 5200.000, 0                     | 5.34              | 4.54                   | 36.3             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.4                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-01-04    | 2026-01-04    |
| psSAR1g [W/kg]      | 6.41          | 7.17          |
| psSAR10g [W/kg]     | 1.91          | 2.07          |
| Power Drift [dB]    | 0.02          | 0.01          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 62.3          |
| Dist 3dB Peak [mm]  |               | 7.2           |

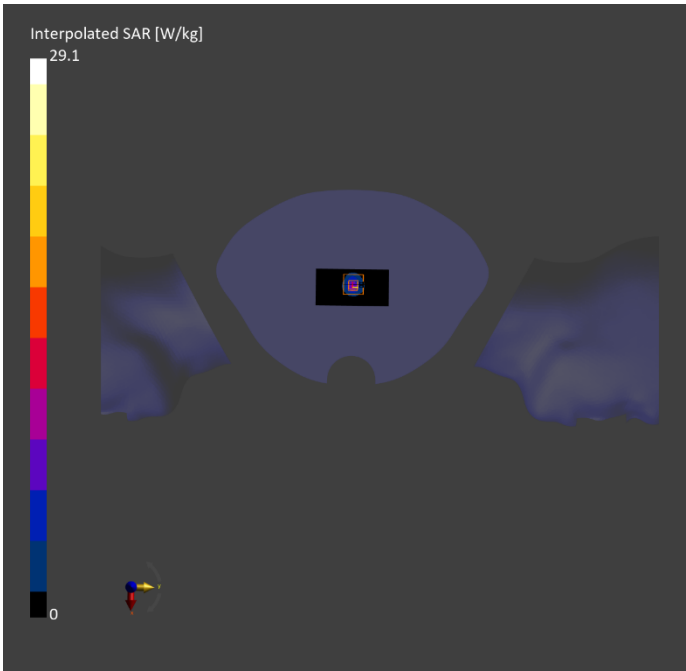

Measurement Report for Device, , , UID 0 -, Channel 0 (5300.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 5300.000, 0                     | 5.28              | 4.65                   | 36.2             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.4                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-01-04    | 2026-01-04    |
| psSAR1g [W/kg]      | 7.15          | 8.08          |
| psSAR10g [W/kg]     | 2.09          | 2.31          |
| Power Drift [dB]    | 0.01          | 0.08          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 61.4          |
| Dist 3dB Peak [mm]  |               | 7.2           |

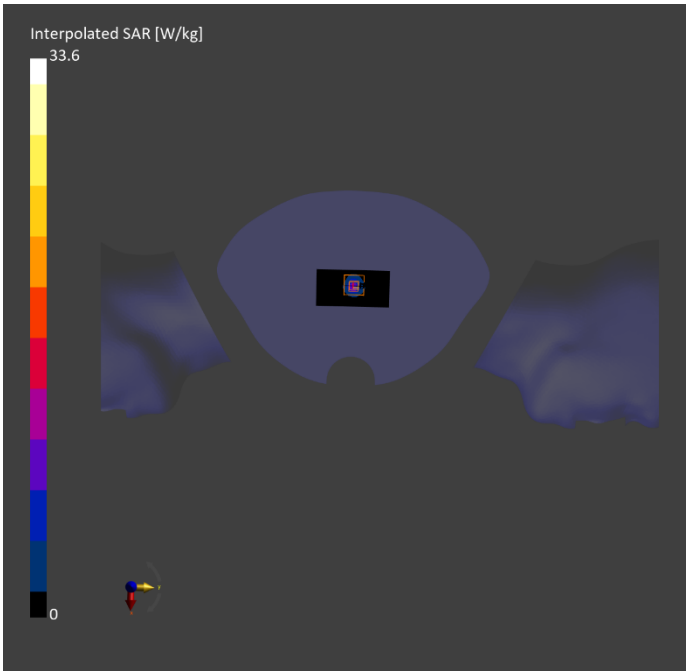

Measurement Report for Device, , , UID 0 -, Channel 0 (5500.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 5500.000, 0                     | 4.87              | 4.88                   | 35.8             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.4                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-01-04    | 2026-01-04    |
| psSAR1g [W/kg]      | 6.98          | 7.90          |
| psSAR10g [W/kg]     | 2.03          | 2.25          |
| Power Drift [dB]    | 0.03          | 0.02          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 59.5          |
| Dist 3dB Peak [mm]  |               | 7.2           |

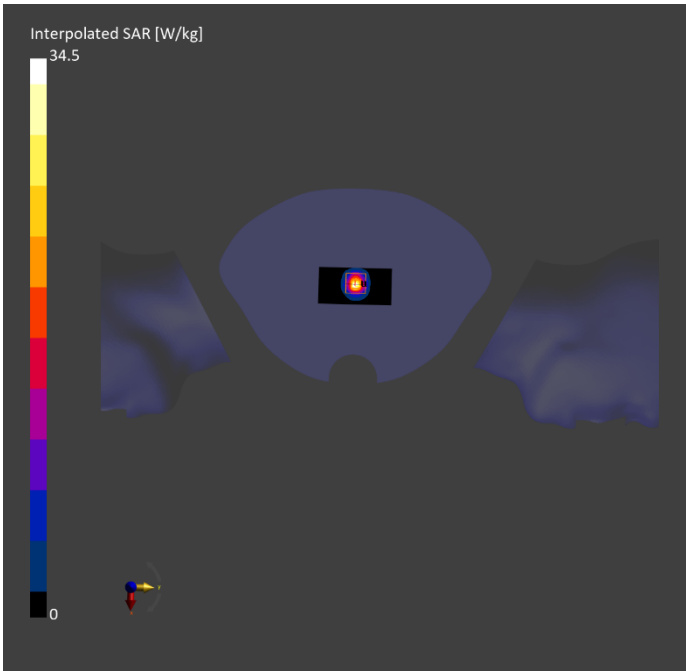

Measurement Report for Device, , , UID 0 -, Channel 0 (5600.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 5600.000, 0                     | 4.87              | 5.00                   | 35.6             |

Hardware Setup


| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.4                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-01-04    | 2026-01-04    |
| psSAR1g [W/kg]      | 7.00          | 7.87          |
| psSAR10g [W/kg]     | 2.04          | 2.24          |
| Power Drift [dB]    | 0.02          | 0.01          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 58.4          |
| Dist 3dB Peak [mm]  |               | 7.2           |

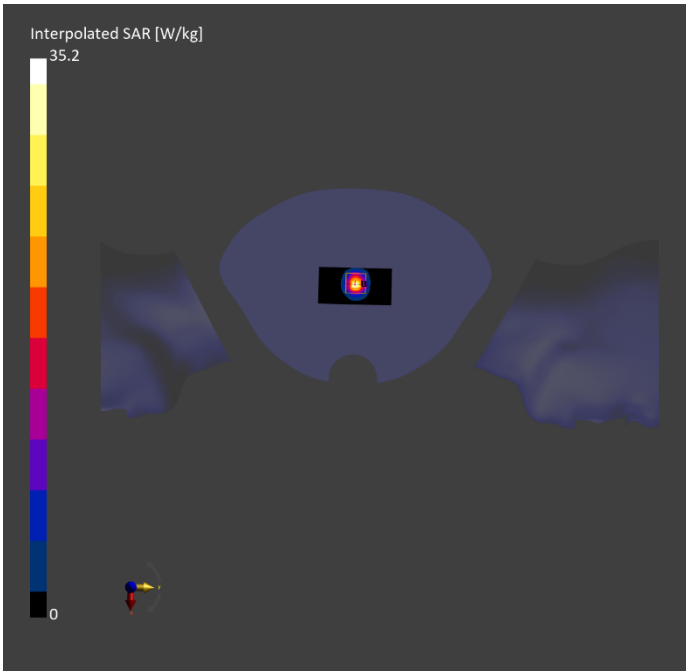

Measurement Report for Device, , , UID 0 -, Channel 0 (5800.000MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]   | IMEI | DUT Type |
|---------------------|-------------------|------|----------|
| Device,             | 50.0 x 10.0 x 8.0 |      | Dipole   |

Exposure Conditions

| Phantom Section, TSL         | Position, Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|------------------------------|------------------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, Head Simulating Liquid | ,                            |      | CW, 0--    | 5800.000, 0                     | 4.84              | 5.23                   | 35.3             |

Hardware Setup

| Phantom                                 | TSL, Measured Date             | Probe, Calibration Date     | DAE, Calibration Date     |
|-----------------------------------------|--------------------------------|-----------------------------|---------------------------|
| Twin-SAM V5.0 (30deg probe tilt) - 2243 | HBBL-600-10000 Charge:xxxx, -- | EX3DV4 - SN7951, 2025-09-10 | DAE4ip Sn1921, 2025-09-04 |

Scan Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | N/A         | Yes                |
| Grading Ratio       | N/A         | 1.4                |
| MAIA                | N/A         | N/A                |
| Surface Detection   | VMS + 6p    | VMS + 6p           |
| Scan Method         | Measured    | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-01-04    | 2026-01-04    |
| psSAR1g [W/kg]      | 6.76          | 7.76          |
| psSAR10g [W/kg]     | 2.00          | 2.20          |
| Power Drift [dB]    | 0.01          | 0.01          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 56.9          |
| Dist 3dB Peak [mm]  |               | 7.6           |

