



FCC TEST REPORT

FCC ID: 2AKPW-GLM

On Behalf of

Waltersons Industry Limited

1:64 R/C Car

Model No.: GLM

Prepared for : Waltersons Industry Limited
Address : Unit S-T, 5/F, Valiant Industrial Center, 2-12 Au Pui Wan Street, Fo
Tan, New Territories, Hong Kong

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2607316-C20-R01
Date of Receipt : July 31, 2026
Date of Test : August 1, 2026 – August 31, 2026
Date of Report : September 1, 2026
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results.....	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of Test.....	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	10
2.7. Test Facility.....	10
2.8. Measurement Uncertainty.....	10
2.9. Test Equipment List	11
3. Maximum Peak Output power.....	14
3.1. Limit.....	14
3.2. Test Procedure	14
3.3. Test Setup	14
3.4. Test Result.....	14
4. Bandwidth	15
4.1. Limit.....	15
4.2. Test Procedure	15
4.3. Test Result.....	15
5. Carrier Frequency Separation	16
5.1. Limit.....	16
5.2. Test Procedure	16
5.3. Test Result.....	16
6. Number Of Hopping Channel.....	17
6.1. Limit.....	17
6.2. Test Procedure	17
6.3. Test Result.....	17
7. Dwell Time.....	18
7.1. Test Limit.....	18
7.2. Test Procedure	18
7.3. Test Result.....	18
8. Radiated emissions	19
8.1. Limit.....	19
8.2. Block Diagram of Test Setup	20
8.3. Test Procedure	21
8.4. Test Result.....	21
9. RF Conducted Spurious Emissions.....	30
9.1. Block Diagram of Test Setup	30

9.2. Limits.....	30
9.3. Test Procedure	30
9.4. Test Result	30
10. Band Edge Compliance.....	31
10.1. Block Diagram of Test Setup.....	31
10.2. Limit.....	31
10.3. Test Procedure	31
10.4. Test Result	31
11. Band Edge (Conducted)	34
11.1. Block Diagram of Test Setup	34
11.2. Test Limits.....	34
11.3. Test Procedure	34
11.4. Test Results.....	35
12. Power Line Conducted Emissions.....	36
12.1. Block Diagram of Test Setup.....	36
12.2. Limit.....	36
12.3. Test Procedure	36
12.4. Test Result	36
13. Antenna Requirements.....	37
13.1. Limit.....	37
13.2. Result.....	37
14. Test setup photo	38
15. EUT Photo	38

TEST REPORT DECLARATION

Applicant : Waltersons Industry Limited
Address : Unit S-T, 5/F, Valiant Industrial Center, 2-12 Au Pui Wan Street, Fo Tan, New Territories, Hong Kong
Manufacturer : Waltersons Industry Limited
Address : Unit S-T, 5/F, Valiant Industrial Center, 2-12 Au Pui Wan Street, Fo Tan, New Territories, Hong Kong
EUT Description : 1:64 R/C Car
(A) Model No. : GLM
(B) Trademark : **GREENLIGHT™**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10-2020

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Tom Chen
Project Engineer



Approved by (name + signature).....: Alan Fan
Project Manager



Date of issue.....: September 1, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	September 1, 2026	Initial released Issue	Tom Chen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii)	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii)	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	N/A
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : 1:64 R/C Car
Model Number : GLM
Diff : N/A
Power supply : DC 3V from battery

Radio Technology : 2.4G SRD

Operation frequency : 2405-2475MHz

Channel No. : 24 Channels

Modulation type : GFSK

Antenna Type : Internal antenna, Maximum Gain is -2.82dBi
(Antenna information is provided by applicant.)
(Testing lab is not responsible for the accuracy of the information.)

Software version : V1.0

Hardware version : V1.0

Intend use environment : Residential, commercial and light industrial environment

2.2. Accessories of Device (EUT)


Accessories : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details


No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	N/A	N/A	N/A	N/A	N/A

2.4. Block Diagram of Test

Radiated Emission



RF conduction method



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK Hopping-off mode	Low :CH1	2405
	Middle: CH13	2445
	High: CH24	2475
GFSK Hopping-on mode	Hopping	2405-2475

Channel List(MHz)

ch.no	freq.	ch.no	freq.	ch.no	freq.
1	2405	11	2428	21	2472
2	2407	12	2435	22	2473
3	2408	13	2445	23	2474
4	2410	14	2451	24	2475
5	2411	15	2452	25	
6	2414	16	2453	26	
7	2418	17	2462	27	
8	2422	18	2469	28	
9	2425	19	2470	29	
10	2427	20	2471	30	

Use the engineering interface to control EUT work in Continuous TX mode, and select test channel, wireless mode, the power level of the test is set to default.

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	25.5℃
Humidity range:	25-75%	55.7%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10 ⁻⁸ GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%
Uncertainty for Power Spectral Density	0.39dB
Uncertainty for Occupied-Bandwidth	968Hz

2.9. Test Equipment List

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal. Due day
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025/03/09	2029/03/08
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025/03/09	2029/03/08
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2026/7/28	2027/7/27
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2026/7/27	2027/7/26
Spectrum analyzer	Keysight	N9020A	A.19.05	MY54500254	2026/7/27	2027/7/26
Spectrum analyzer	ROHDE&SCHWARZ	FSU	4.71.SP5	200002	2026/7/28	2027/7/27
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.22	1201.0002K50 -117239-sM	2026/7/27	2027/7/26
UXM 5G Base Wireless Test Platform	Keysight	E5175E	1.8.1.2908 2(NR)(LTE)	MY62226130	2026/03/03	2027/03/02
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03 -102082-Wa	2026/7/27	2027/7/26
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2026/7/28	2027/7/27
Bilog Antenna	SCHWARZBECK	VULB 9168	/	VULB 9168#627	2025/08/11	2027/08/10
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2025/08/11	2027/08/10
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2025/08/11	2027/08/10
RF Cable	Resenberger	Cable 1	/	RE1	2026/7/27	2027/7/26
RF Cable	Resenberger	Cable 2	/	RE2	2026/7/27	2027/7/26
RF Cable	Resenberger	Cable 3	/	CE1	2026/7/27	2027/7/26
Amplifier	HP	HP8347A	/	2834A00455	2026/7/28	2027/7/27
Amplifier	Agilent	8449B	/	3008A02664	2026/7/27	2027/7/26
Amplifier	SKET	LNPA_0118G-45	/	SK202001080 1	2026/7/27	2027/7/26
Filter/Amplifier bank unit	SKET	RSESU-HPH-LNPP18G	/	SK20190712	2026/7/27	2027/7/26
L.I.S.N.#1	SCHWARZBECK	NSLK8126	/	8126-466	2026/7/28	2027/7/27
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2026/7/28	2027/7/27
Pulse Limiter	SCHWARZBECK	9516F	/	9618	2026/7/27	2027/7/26
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2025/8/11	2027/8/10
Preamplifier	SKET	LNPA_1840-50	/	SK201810180 1	2026/7/27	2027/7/26
Vector Signal Generator	Agilent	N5182A	/	MY49060042	2026/7/28	2027/7/27
Vector Signal Generator	Agilent	N5172B	2.02	MY51350397	2026/7/27	2027/7/26
Analog Signal	HP	83712B	10.02	US34490219	2026/7/27	2027/7/26

Generator						
Power Meter	Agilent	E4419B	/	GB40202122	2026/7/27	2027/7/26
Power Sensor	Agilent	E9300A	/	MY41496628	2026/7/27	2027/7/26
Power Sensor	Agilent	E9304A	/	MY41496815	2026/7/27	2027/7/26
Power Sensor	DARE	RPR3006W	/	15100041SNO 91	2026/7/28	2027/7/27
Power Sensor	DARE	RPR3006W	/	15100041SNO 92	2026/7/28	2027/7/27
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205- 01	2026/07/07	2027/07/06
Electronic Thermo-Hygromet er	S.H.Qixiang	HTC-1	/	N/A	2026/7/31	2027/7/30
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2026/7/27	2027/7/26
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A
6dB Fixed Attenuator	SKET	AP_DC01G-2 W-N-6dB	/	N/A	2026/7/28	2027/7/27

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER


3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

Please refer ANSI C63.10-2020 section of 7.8.5

3.3. Test Setup



3.4. Test Result

Please refer to Appendix of 2.4G data.

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result

Please refer to Appendix of 2.4G data.

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result

Please refer to Appendix of 2.4G data.

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result

Please refer to Appendix of 2.4G data.

7. DWELL TIME

7.1. Test Limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5

MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result

Please refer to Appendix of 2.4G data.

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
960-1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test Setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

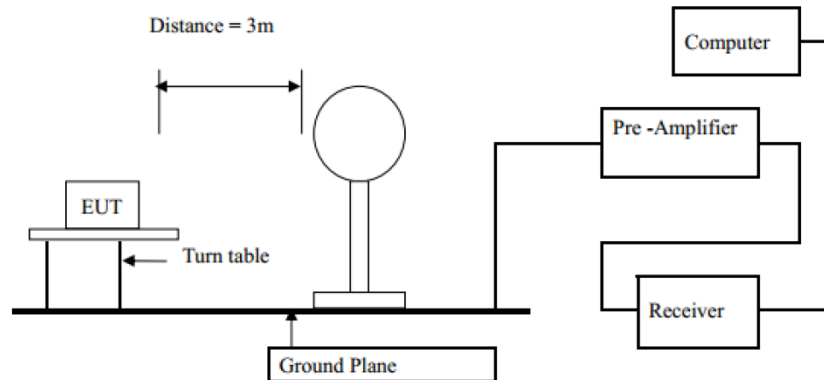

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

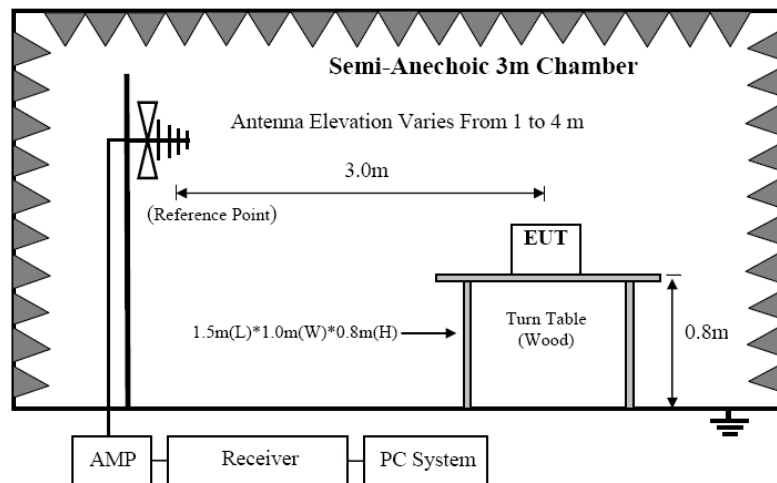

8.2.3 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

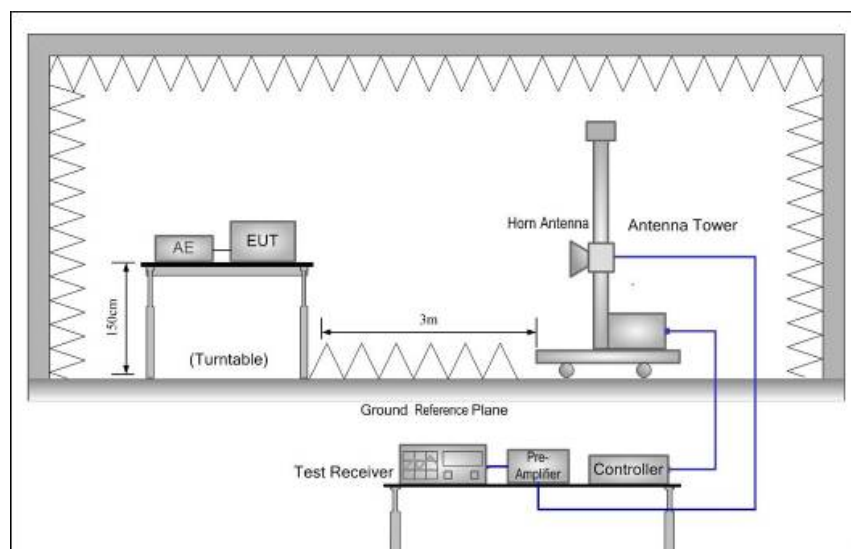

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

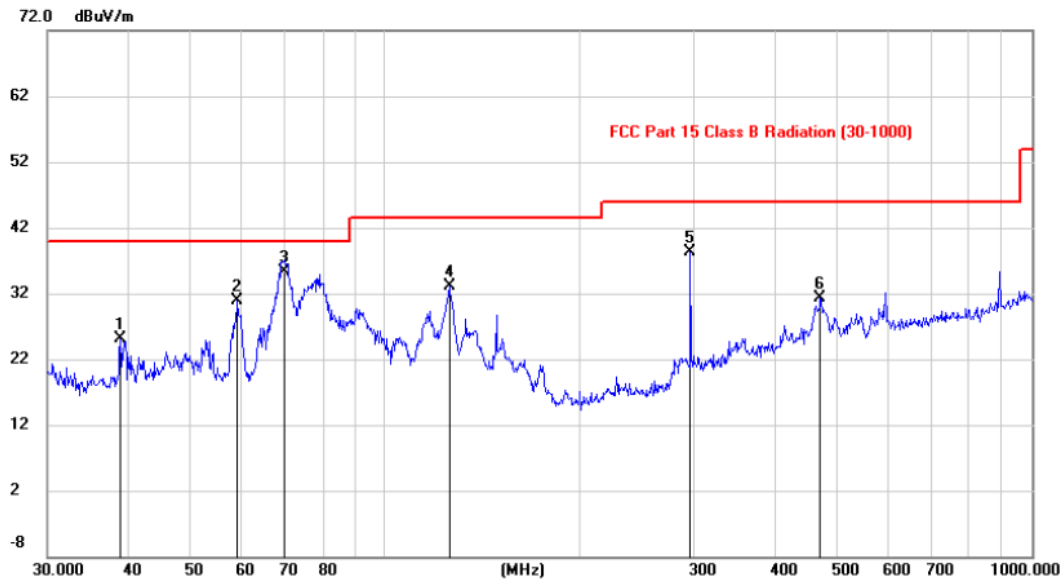

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		38.9378	11.16	13.88	25.04	40.00	-14.96	peak		
2		59.1563	18.04	12.87	30.91	40.00	-9.09	peak		
3	*	70.0821	24.24	10.98	35.22	40.00	-4.78	QP		
4		125.4603	20.30	12.90	33.20	43.50	-10.30	peak		
5		297.0156	24.16	14.14	38.30	46.00	-7.70	peak		
6		471.1836	12.96	18.31	31.27	46.00	-14.73	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

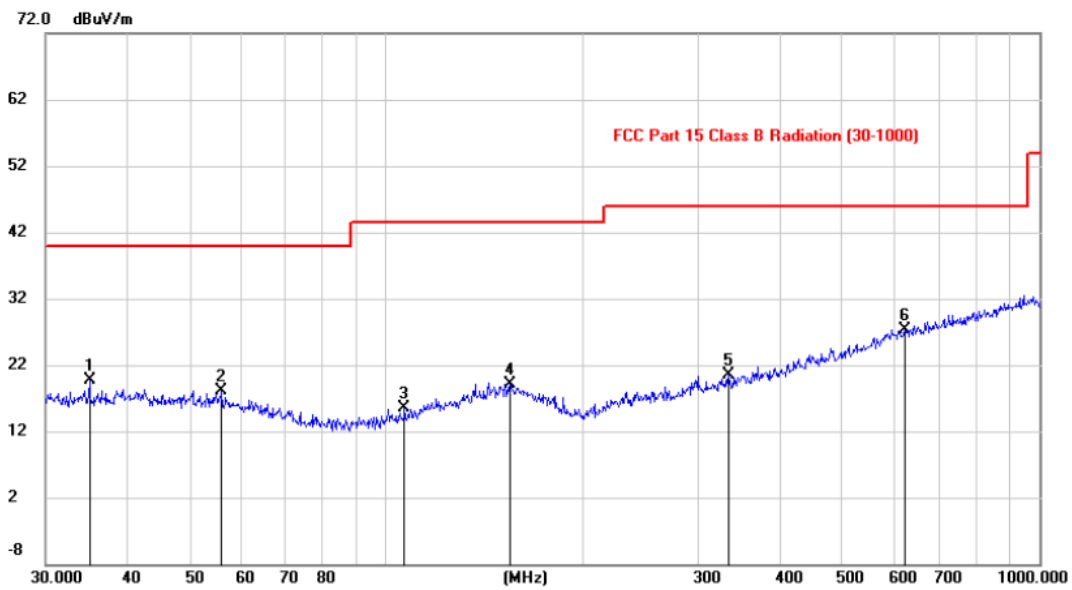Horizontal:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35.0827	0.47	19.26	19.73	40.00	-20.27	peak		
2		55.8373	-1.02	19.04	18.02	40.00	-21.98	peak		
3		106.5219	-1.33	16.88	15.55	43.50	-27.95	peak		
4		154.5674	-1.52	20.66	19.14	43.50	-24.36	peak		
5		333.6867	-0.51	21.03	20.52	46.00	-25.48	peak		
6	*	622.5989	0.07	27.32	27.39	46.00	-18.61	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK (2405MHz) was listed in this report.

From 1G-25GHz

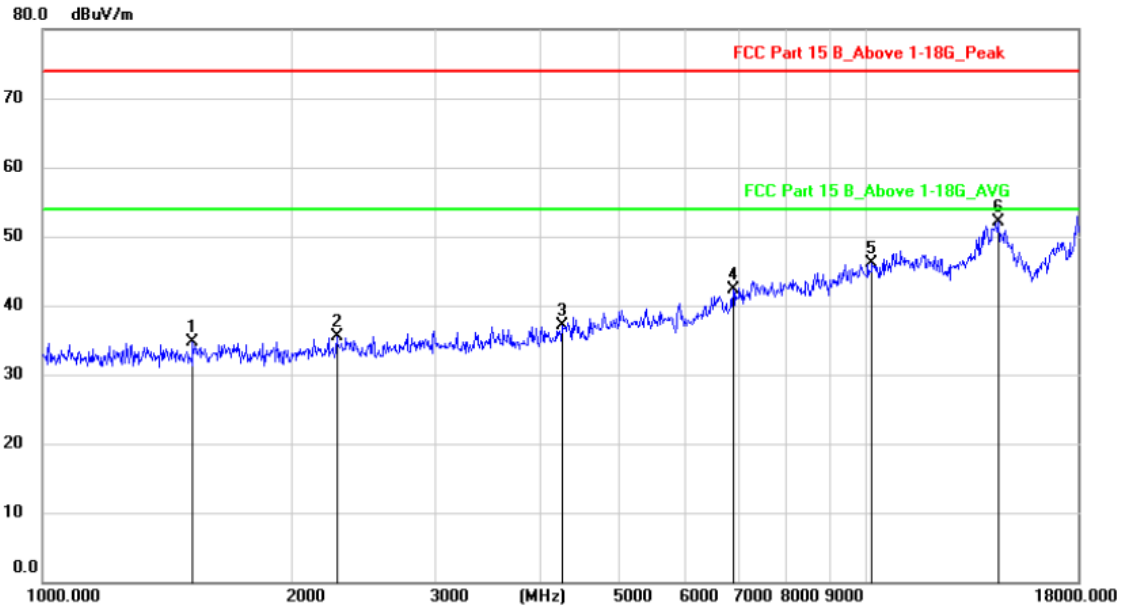
GFSK mode / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		1522.797	55.10	-20.30	34.80	74.00	-39.20	peak	
2		2275.972	53.96	-18.52	35.44	74.00	-38.56	peak	
3		4271.762	52.52	-15.35	37.17	74.00	-36.83	peak	
4		6883.522	51.74	-9.50	42.24	74.00	-31.76	peak	
5		10129.75	52.55	-6.52	46.03	74.00	-27.97	peak	
6	*	14427.87	54.11	-2.09	52.02	74.00	-21.98	peak	

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

GFSK / Polarization: Vertical / CH: L

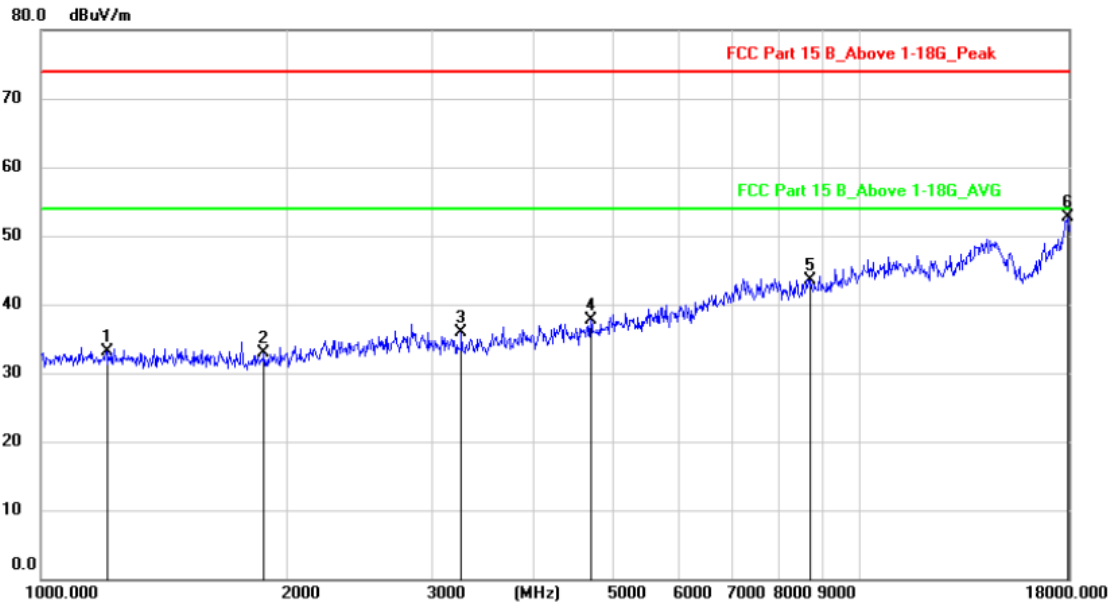


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		1203.315	52.83	-19.64	33.19	74.00	-40.81	peak	
2		1875.992	53.54	-20.63	32.91	74.00	-41.09	peak	
3		3264.247	53.48	-17.60	35.88	74.00	-38.12	peak	
4		4702.447	51.88	-14.22	37.66	74.00	-36.34	peak	
5		8719.508	51.58	-7.98	43.60	74.00	-30.40	peak	
6	*	17980.93	49.76	3.00	52.76	74.00	-21.24	peak	

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

GFSK / Polarization: Horizontal / CH: M

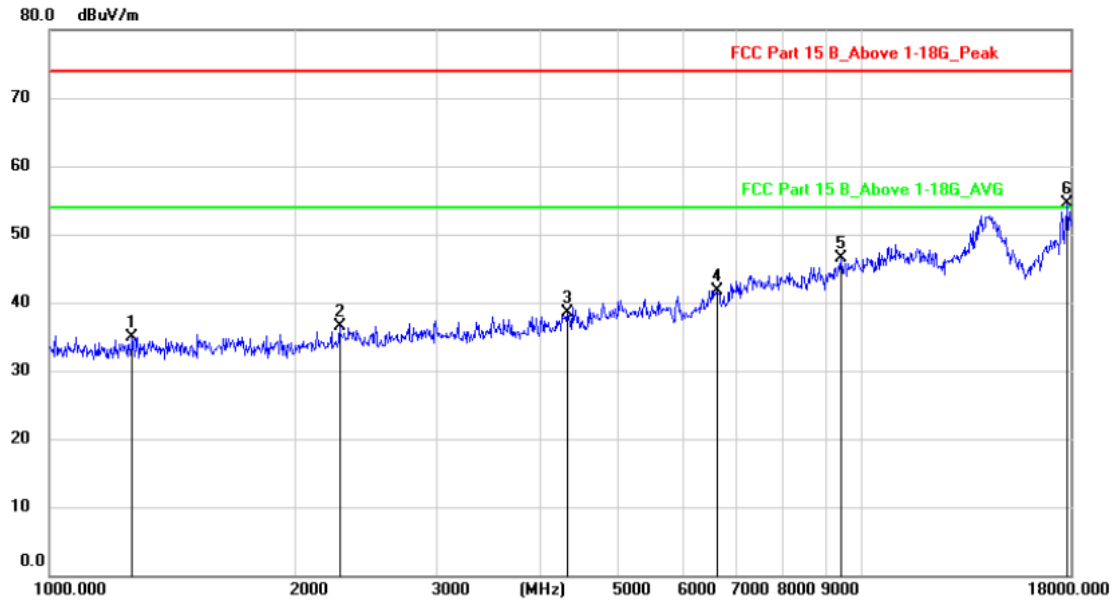


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1265.380	54.45	-19.53	34.92	74.00	-39.08	peak		
2		2275.972	54.96	-18.52	36.44	74.00	-37.56	peak		
3		4332.275	53.66	-15.21	38.45	74.00	-35.55	peak		
4		6636.064	51.80	-10.01	41.79	74.00	-32.21	peak		
5		9419.972	53.60	-7.11	46.49	74.00	-27.51	peak		
6	*	17879.01	52.22	2.31	54.53	74.00	-19.47	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

GFSK / Polarization: Vertical / CH: M

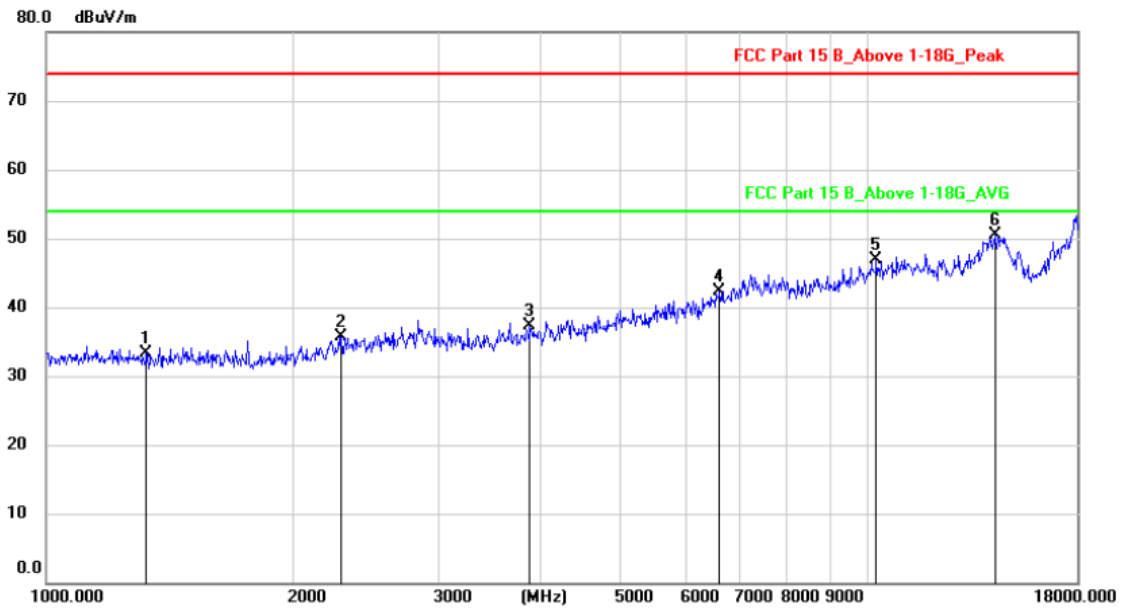


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1326.678	52.88	-19.51	33.37	74.00	-40.63			peak
2		2291.153	54.24	-18.51	35.73	74.00	-38.27			peak
3		3883.140	53.40	-16.08	37.32	74.00	-36.68			peak
4		6611.813	52.41	-10.02	42.39	74.00	-31.61			peak
5		10254.46	53.18	-6.23	46.95	74.00	-27.05			peak
6	*	14359.92	52.64	-2.11	50.53	74.00	-23.47			peak

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

GFSK / Polarization: Horizontal / CH: H

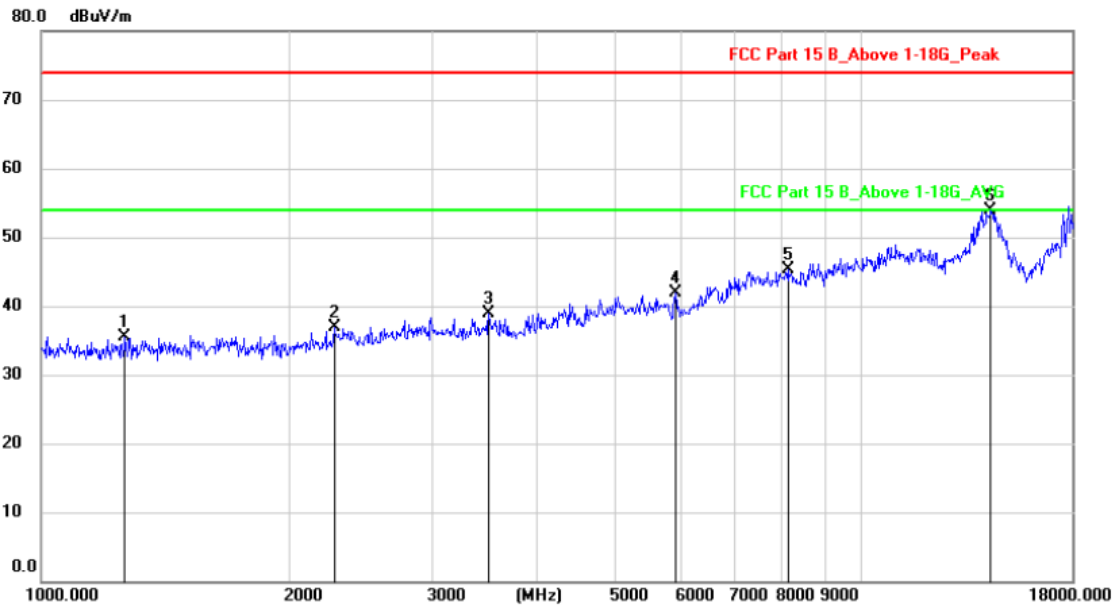


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1265.380	54.95	-19.53	35.42	74.00	-38.58	peak		
2		2275.972	55.46	-18.52	36.94	74.00	-37.06	peak		
3		3514.264	55.85	-17.04	38.81	74.00	-35.19	peak		
4		5920.077	53.83	-12.02	41.81	74.00	-32.19	peak		
5		8106.199	53.21	-7.98	45.23	74.00	-28.77	peak		
6	*	14328.13	55.96	-2.14	53.82	74.00	-20.18	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

GFSK / Polarization: Vertical / CH: H

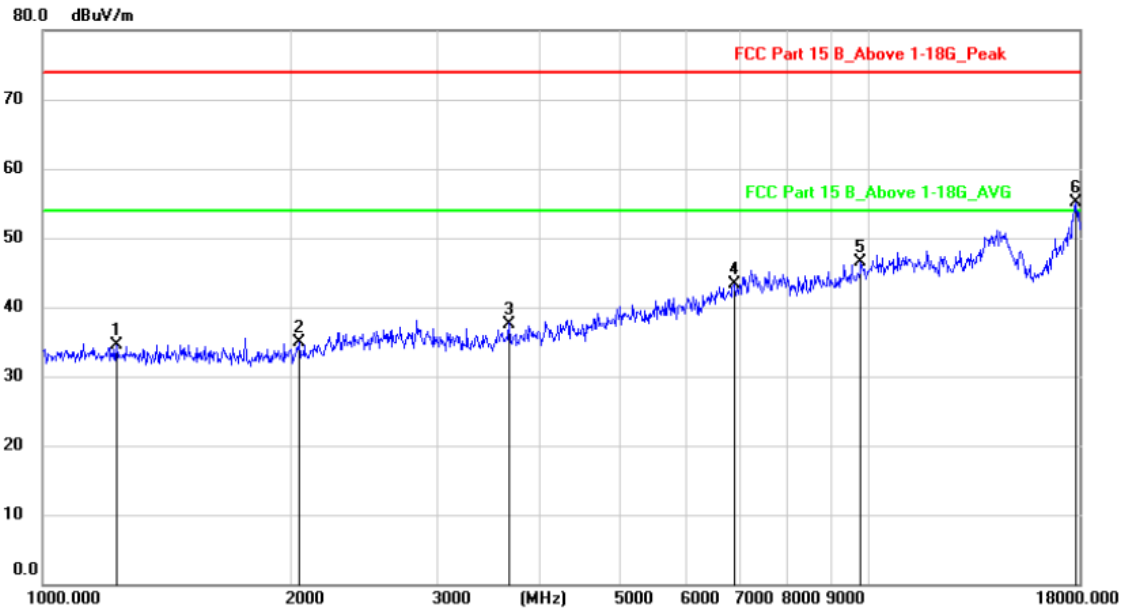

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		1230.633	54.04	-19.59	34.45	74.00	-39.55	peak	
2		2047.500	54.75	-19.90	34.85	74.00	-39.15	peak	
3		3672.807	54.28	-16.68	37.60	74.00	-36.40	peak	
4		6882.859	52.77	-9.50	43.27	74.00	-30.73	peak	
5		9783.487	53.17	-6.72	46.45	74.00	-27.55	peak	
6	*	17860.07	53.07	2.09	55.16	74.00	-18.84	peak	

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Remark:

1.Since the peak value is less than the limit of the AVG value, there is no AVG data.

2.From 18GHz to 25GHz,the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. RF CONDUCTED SPURIOUS EMISSIONS

9.1. Block Diagram of Test Setup

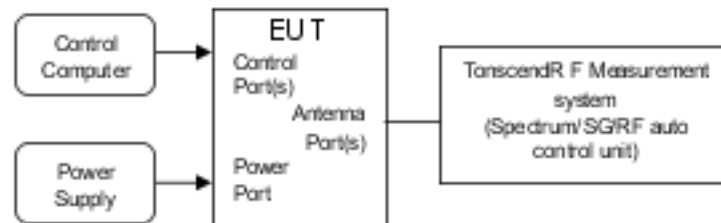

9.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

9.3. Test Procedure


The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, sweep time set auto

9.4. Test Result

Please refer to Appendix of 2.4G data.

10. BAND EDGE COMPLIANCE

10.1. Block Diagram of Test Setup

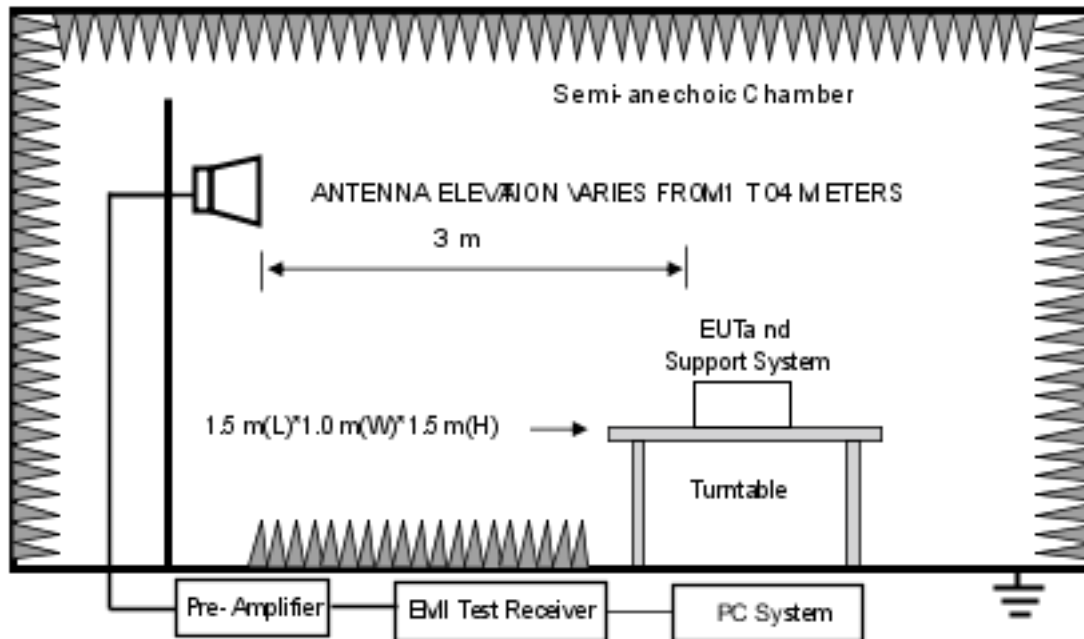

10.2. Limit

Please refer section 15.247.

10.3. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

10.3.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

10.3.2 Check the spurious emissions out of band.

10.3.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.


All restriction band and non- restriction band have been tested, only worse case is reported.

10.4. Test Result

PASS. (See below detailed test data)

Test Mode: GFSK-Low Hopping-off


Horizontal

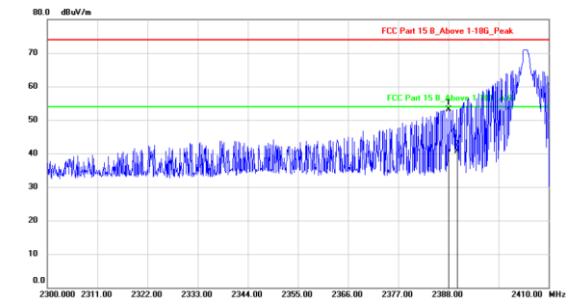

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dBm	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2388.007	71.75	-18.66	53.09	74.00	-20.91			peak
2		2390.000	59.45	-18.66	40.79	74.00	-33.21			peak

Note: 1. *: Maximum data; x: Over limit; f: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Vertical

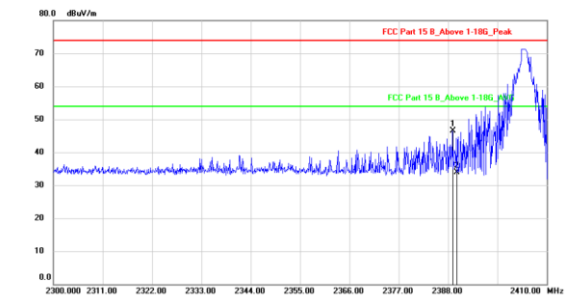


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dBm	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2389.078	65.13	-18.66	46.47	74.00	-27.53			peak
2		2390.000	52.57	-18.66	33.91	74.00	-40.09			peak

Note: 1. *: Maximum data; x: Over limit; f: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Test Mode: GFSK-High Hopping-off


Horizontal

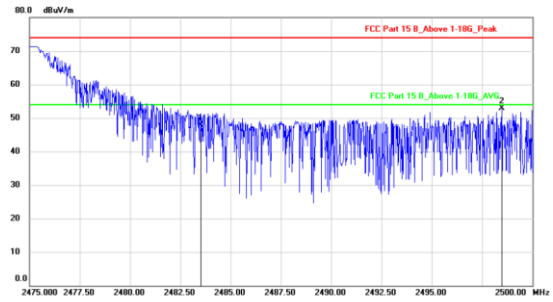

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dBm	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	66.65	-18.76	47.89	74.00	-26.11			peak
2	*	2498.480	71.63	-18.75	52.88	74.00	-21.12			peak

Note: 1. *: Maximum data; x: Over limit; f: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Vertical

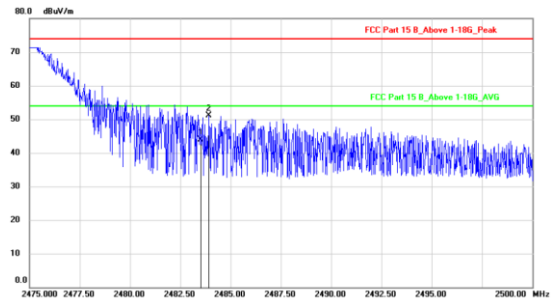


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dBm	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	62.65	-18.76	43.89	74.00	-30.11			peak
2	*	2483.900	69.81	-18.76	51.05	74.00	-22.95			peak

Note: 1. *: Maximum data; x: Over limit; f: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Test Mode: GFSK-Low Hopping-on

Horizontal

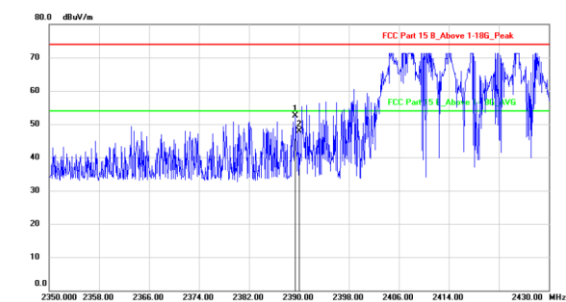


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dBm	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2389.461	71.07	-18.66	52.41	74.00	-21.59			peak
2		2390.000	66.54	-18.66	47.88	74.00	-26.12			peak

Note: 1. *: Maximum data; x: Over limit; f: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Vertical

Test Mode: GFSK-High Hopping-on


Horizontal

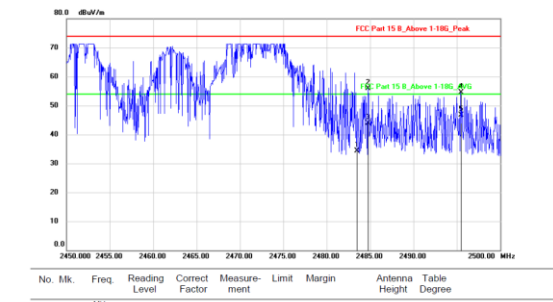

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dBm	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	53.09	-18.76	34.33	74.00	-39.67			peak
2		2484.770	74.73	-18.76	55.97	74.00	-18.03			peak
3	*	2484.770	62.73	-18.76	43.97	54.00	-10.03			AVG
4		2495.468	73.21	-18.75	54.46	74.00	-19.54			peak
5		2495.468	65.44	-18.75	46.69	74.00	-27.31			AVG

Note: 1. *: Maximum data; x: Over limit; f: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Vertical

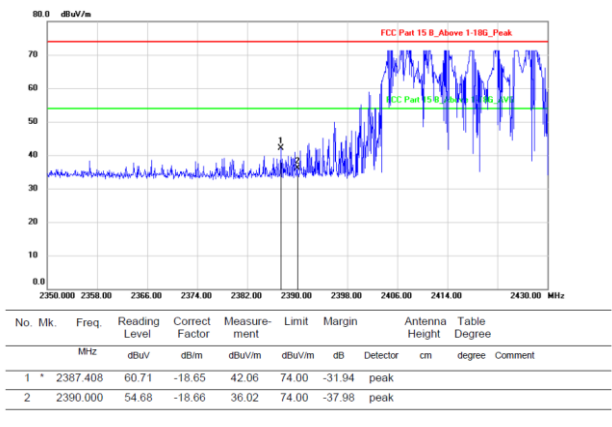

Note: 1. *Maximum data; x: Over limit; l: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Note:


- 1.Pre-scan all mode, and found the GFSK mode which it is worse case, so only show the test data for worse case.
- 2.Since the peak value is less than the limit of the AVG value, there is no AVG data.

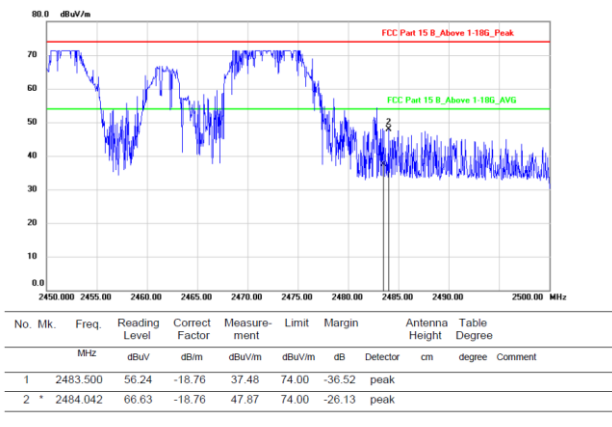

Note: 1. *Maximum data; x: Over limit; l: over margin.
2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

11. BAND EDGE (CONDUCTED)

11.1. Block Diagram of Test Setup

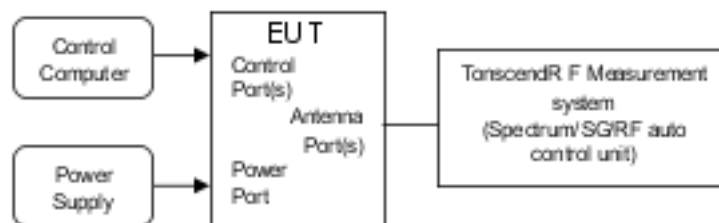

11.2. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

11.3. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

Place the EUT on the table and set it in transmitting mode.

11.3.1. Place the EUT on the table and set it in transmitting mode.

11.3.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

11.3.3. Set the spectrum analyzer as RBW=100KHz, VBW=300KHz, Sweep = auto.


11.3.4. Repeat above procedures until all frequency measured were complete..

11.4. Test Results

Please refer to Appendix of 2.4G data.

12. POWER LINE CONDUCTED EMISSIONS

12.1. Block Diagram of Test Setup

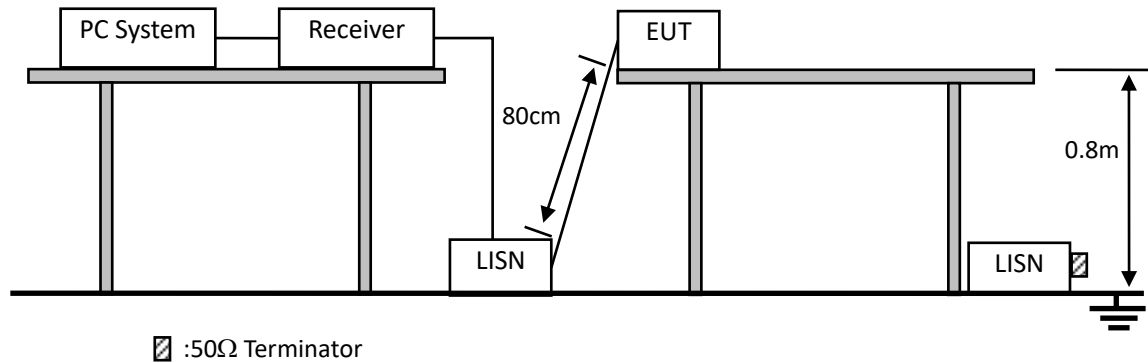

12.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

12.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

12.4. Test Result

Not applicable for equipment operated with battery.

13. ANTENNA REQUIREMENTS

13.1.Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2.Result

The EUT antenna is Internal Antenna. It complies with the standard requirement.

14. TEST SETUP PHOTO

Please refer to the Appendix of Test photos.

15. EUT PHOTO

Please refer to the Appendix of EUT photos.

-----END OF REPORT-----