


# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N20_5700     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 15:05:52

## Test Graph

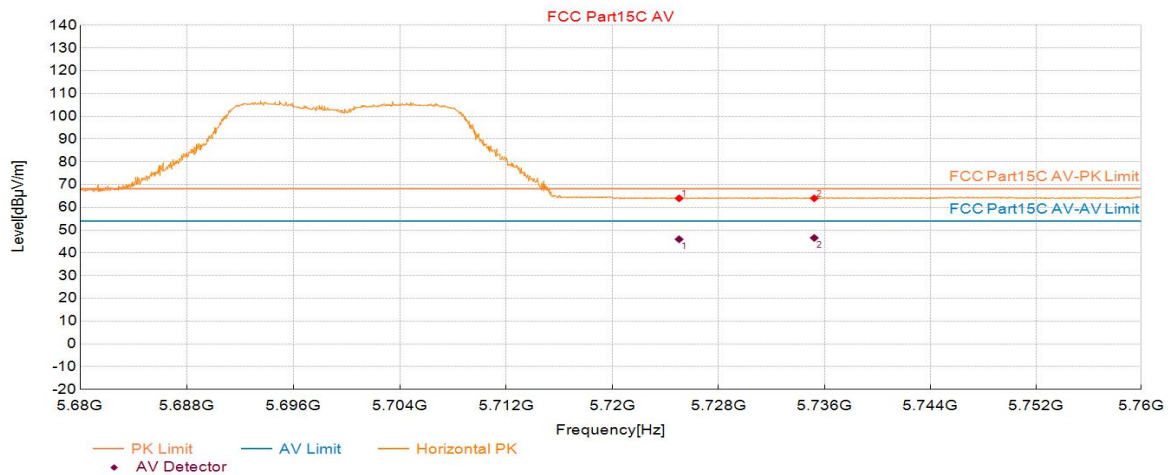

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5725.02         | 44.11            | 63.97          | 19.86       | 68.20          | 4.23        | 150         | 299       | Horizontal |
| 2   | 5735.23         | 44.06            | 63.97          | 19.91       | 68.20          | 4.23        | 150         | 98        | Horizontal |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5725.02     | 19.86       | 45.97             | 54.00             | 8.03           | 150         | 299       | Horizontal |
| 2   | 5735.23     | 19.91       | 46.58             | 54.00             | 7.42           | 150         | 98        | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N20_5700     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 14:58:34

## Test Graph

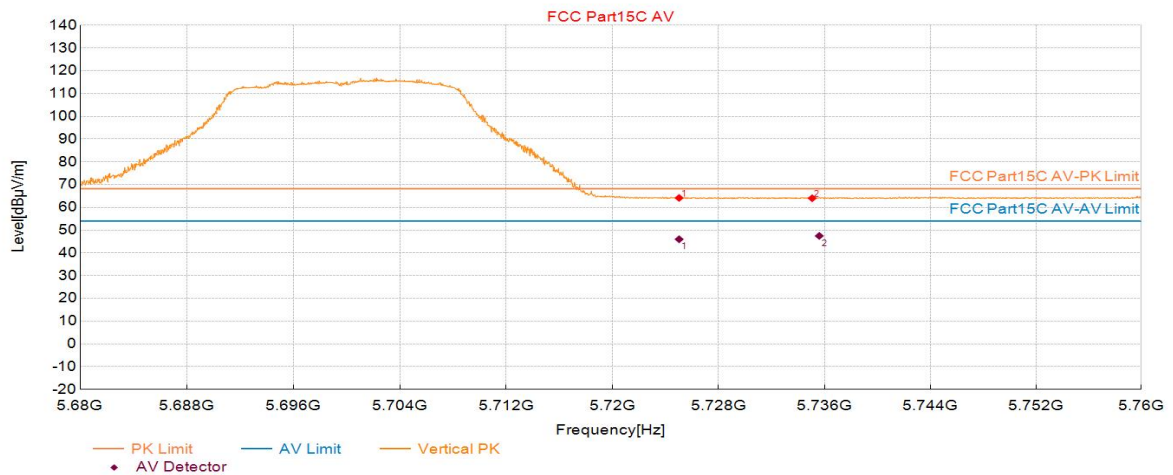

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5725.02         | 44.28            | 64.14          | 19.86       | 68.20          | 4.06        | 150         | 44        | Vertical |
| 2   | 5735.07         | 44.09            | 64.00          | 19.91       | 68.20          | 4.20        | 150         | 111       | Vertical |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5725.02     | 19.86       | 45.98             | 54.00             | 8.02           | 150         | 44        | Vertical |
| 2   | 5735.61     | 19.91       | 47.45             | 54.00             | 6.55           | 150         | 94.6      | Vertical |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5190     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 15:19:59

## Test Graph

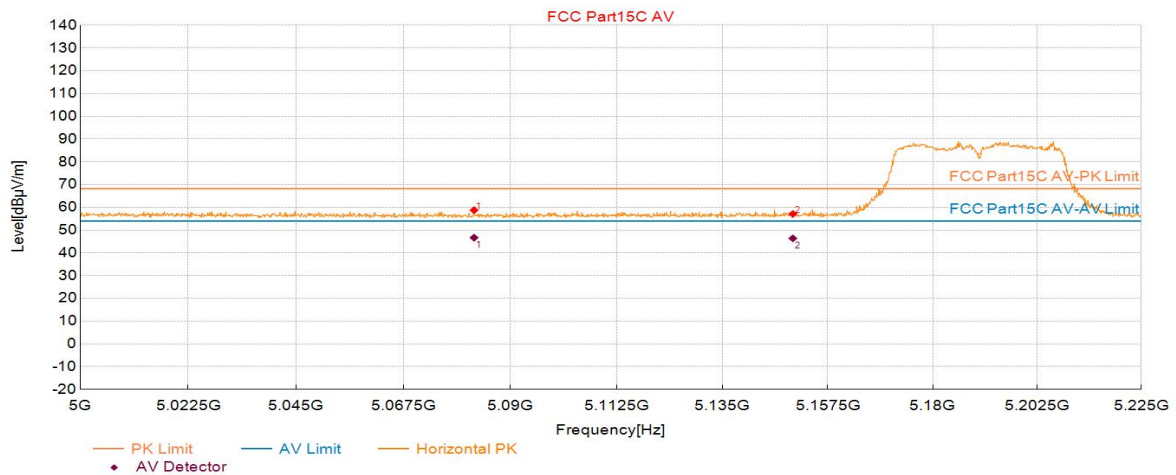

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5082.39         | 40.98            | 58.76          | 17.78       | 68.20          | 9.44        | 150         | 357       | Horizontal |
| 2   | 5150.04         | 39.27            | 57.09          | 17.82       | 68.20          | 11.11       | 150         | 0         | Horizontal |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5082.39     | 17.78       | 46.68             | 54.00             | 7.32           | 150         | 357       | Horizontal |
| 2   | 5150.04     | 17.82       | 46.36             | 54.00             | 7.64           | 150         | 0         | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5190     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 15:15:27

## Test Graph

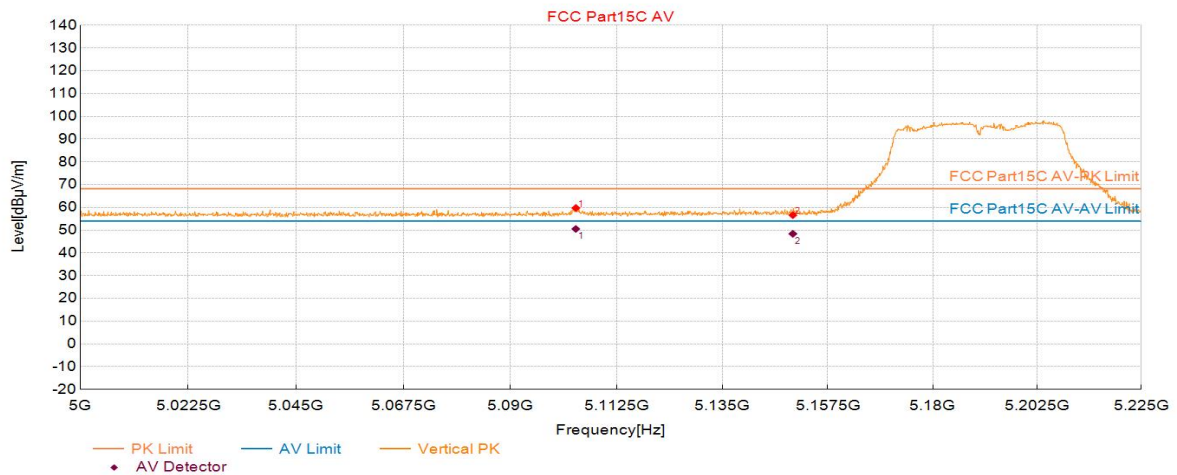

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5103.89         | 41.94            | 59.72          | 17.78       | 68.20          | 8.48        | 150         | 261       | Vertical |
| 2   | 5150.04         | 38.74            | 56.56          | 17.82       | 68.20          | 11.64       | 150         | 226       | Vertical |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5103.88     | 17.78       | 50.50             | 54.00             | 3.50           | 150         | 267.5     | Vertical |
| 2   | 5150.04     | 17.82       | 48.37             | 54.00             | 5.63           | 150         | 226       | Vertical |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5310     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 15:44:41

## Test Graph

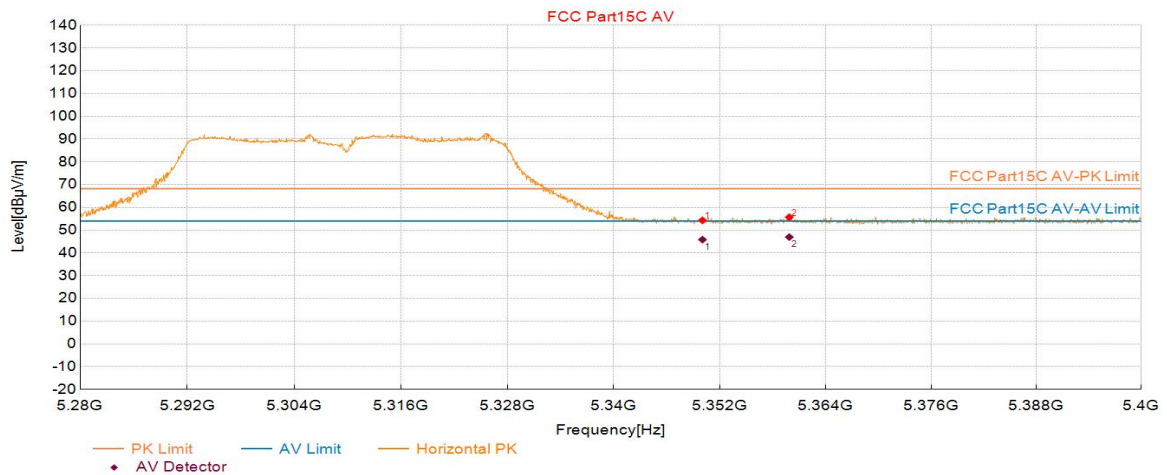

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5350.06         | 36.01            | 54.29          | 18.28       | 68.20          | 13.91       | 150         | 214       | Horizontal |
| 2   | 5359.90         | 37.35            | 55.68          | 18.33       | 68.20          | 12.52       | 150         | 152       | Horizontal |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5350.06     | 18.28       | 45.82             | 54.00             | 8.18           | 150         | 214       | Horizontal |
| 2   | 5359.90     | 18.33       | 46.94             | 54.00             | 7.06           | 150         | 152       | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5310     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 15:39:54

## Test Graph

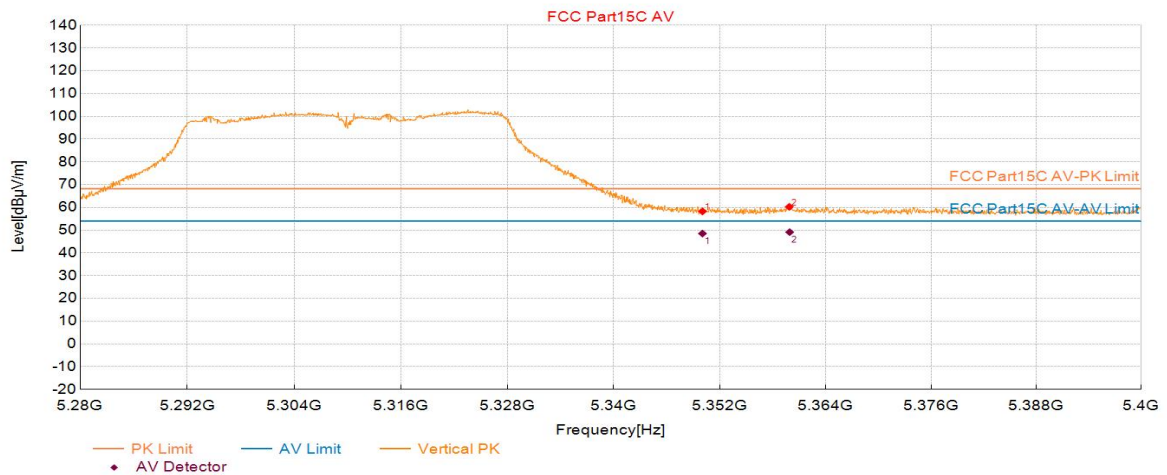

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5350.06         | 39.93            | 58.21          | 18.28       | 68.20          | 9.99        | 150         | 110       | Vertical |
| 2   | 5359.90         | 41.89            | 60.22          | 18.33       | 68.20          | 7.98        | 150         | 170       | Vertical |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5350.06     | 18.28       | 48.49             | 54.00             | 5.51           | 150         | 110       | Vertical |
| 2   | 5359.94     | 18.33       | 49.11             | 54.00             | 4.89           | 150         | 169.5     | Vertical |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5510     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 16:44:48

## Test Graph

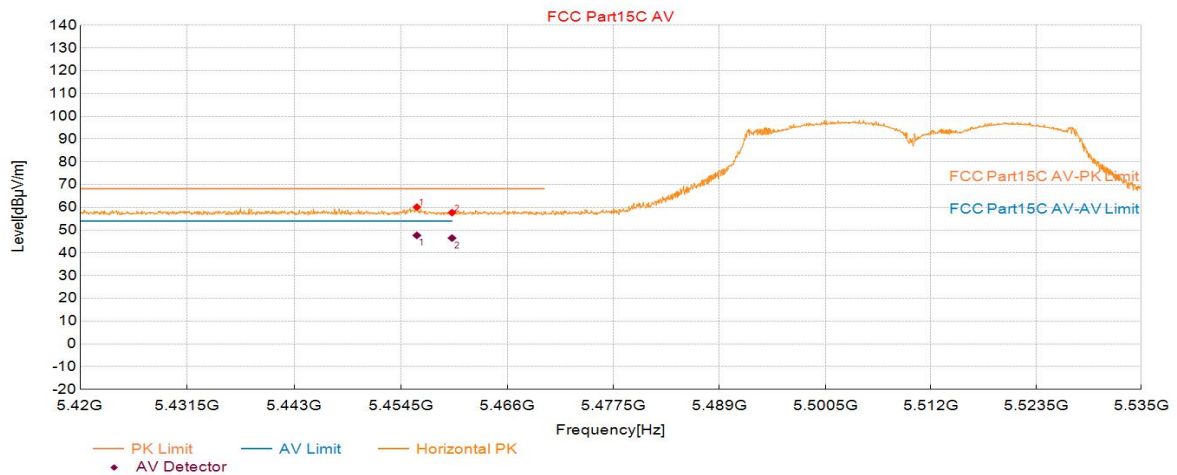

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5456.24         | 41.70            | 60.09          | 18.39       | 68.20          | 8.11        | 150         | 358       | Horizontal |
| 2   | 5460.04         | 39.29            | 57.68          | 18.39       | 68.20          | 10.52       | 150         | 230       | Horizontal |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5456.24     | 18.39       | 47.69             | 54.00             | 6.31           | 150         | 358       | Horizontal |
| 2   | 5460.00     | 18.39       | 46.50             | 54.00             | 7.50           | 150         | 230       | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5510     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 15:47:44

## Test Graph

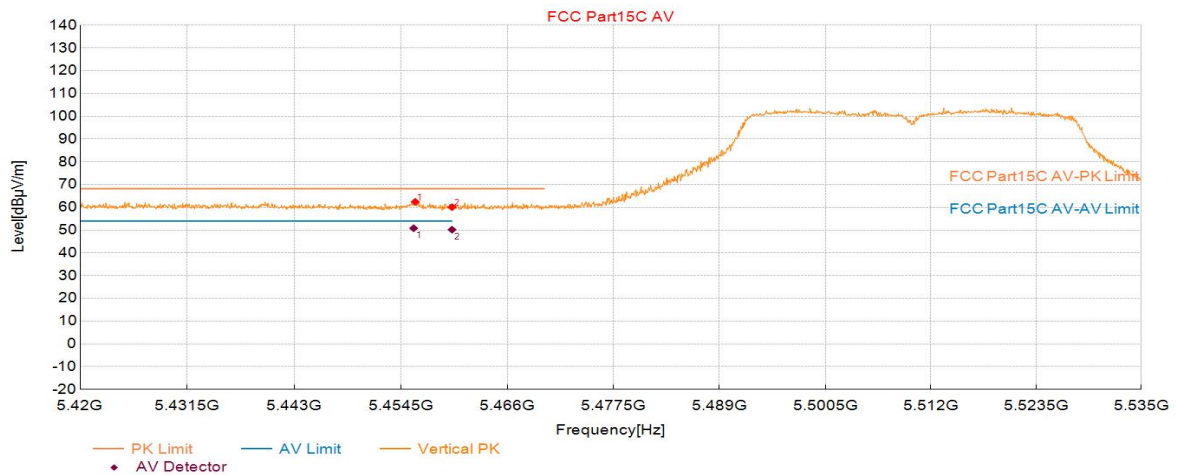

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5456.07         | 43.77            | 62.42          | 18.65       | 68.20          | 5.78        | 150         | 107       | Vertical |
| 2   | 5460.04         | 41.43            | 60.08          | 18.65       | 68.20          | 8.12        | 150         | 173       | Vertical |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5455.90     | 18.65       | 50.83             | 54.00             | 3.17           | 150         | 114.1     | Vertical |
| 2   | 5460.00     | 18.65       | 50.19             | 54.00             | 3.81           | 150         | 173       | Vertical |

Note1: Level=Reading+Factor, Margin=Limit - Level




# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5670     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 17:06:02

## Test Graph

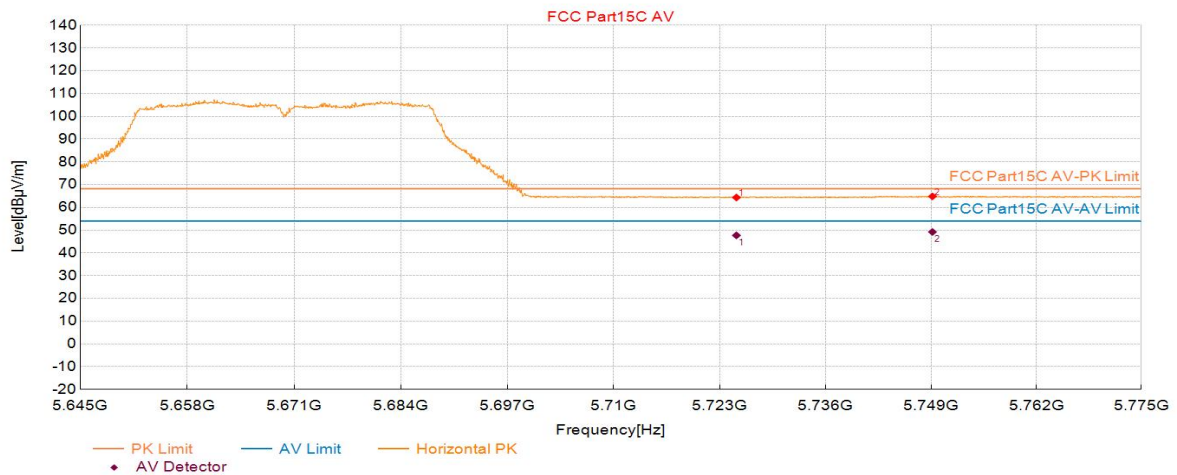

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5725.06         | 44.73            | 64.32          | 19.59       | 68.20          | 3.88        | 150         | 359       | Horizontal |
| 2   | 5749.18         | 45.09            | 64.81          | 19.72       | 68.20          | 3.39        | 150         | 306       | Horizontal |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 5725.06     | 19.59       | 47.69             | 54.00             | 6.31           | 150         | 359       | Horizontal |
| 2   | 5749.18     | 19.72       | 49.19             | 54.00             | 4.81           | 150         | 306       | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5670     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2025-10-17 16:47:58

## Test Graph

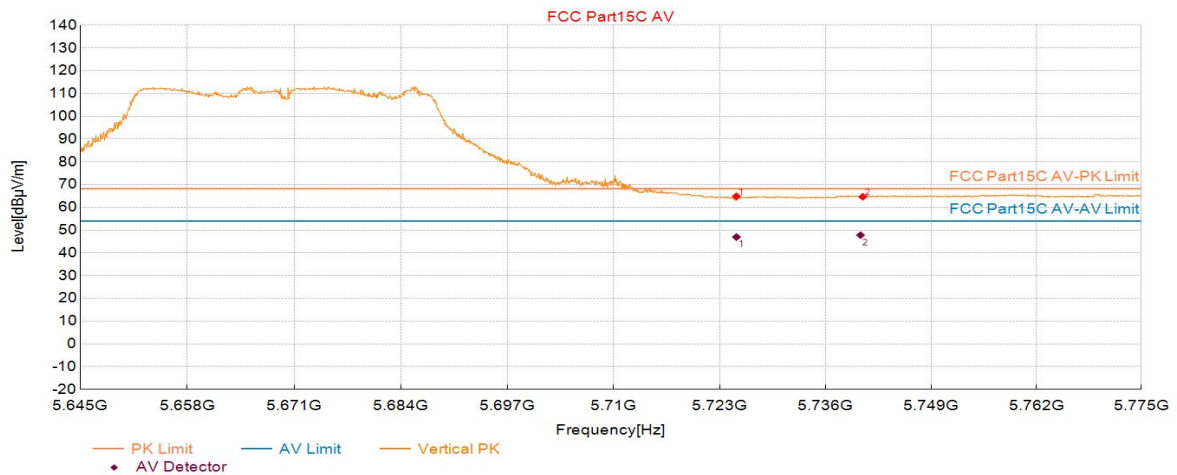

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5725.06         | 45.26            | 64.85          | 19.59       | 68.20          | 3.35        | 150         | 108       | Vertical |
| 2   | 5740.60         | 44.98            | 64.65          | 19.67       | 68.20          | 3.55        | 150         | 87        | Vertical |

## AV Final Data List

| NO. | Freq. (MHz) | Factor (dB) | AV Value (dBμV/m) | AV Limit (dBμV/m) | AV Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 5725.06     | 19.59       | 46.95             | 54.00             | 7.05           | 150         | 108       | Vertical |
| 2   | 5740.32     | 19.67       | 47.77             | 54.00             | 6.23           | 150         | 174.7     | Vertical |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11A_5745       | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:38:51

## Test Graph

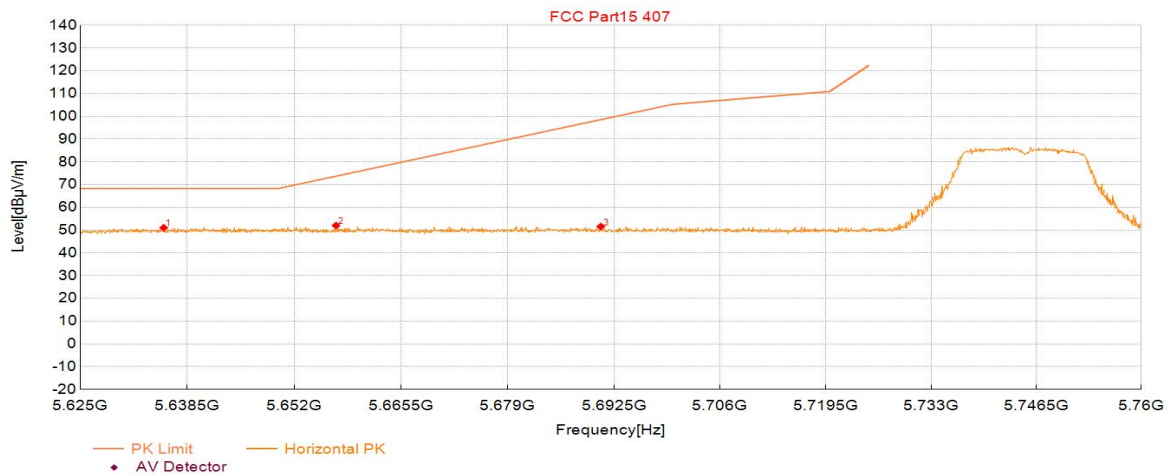

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5635.54         | 32.04            | 51.04          | 19.00       | 68.30          | 17.26       | 150         | 245       | Horizontal |
| 2   | 5657.28         | 32.84            | 52.00          | 19.16       | 73.71          | 21.71       | 150         | 338       | Horizontal |
| 3   | 5690.85         | 32.16            | 51.55          | 19.39       | 98.55          | 47.00       | 150         | 18        | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11A_5745       | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:39:28

## Test Graph

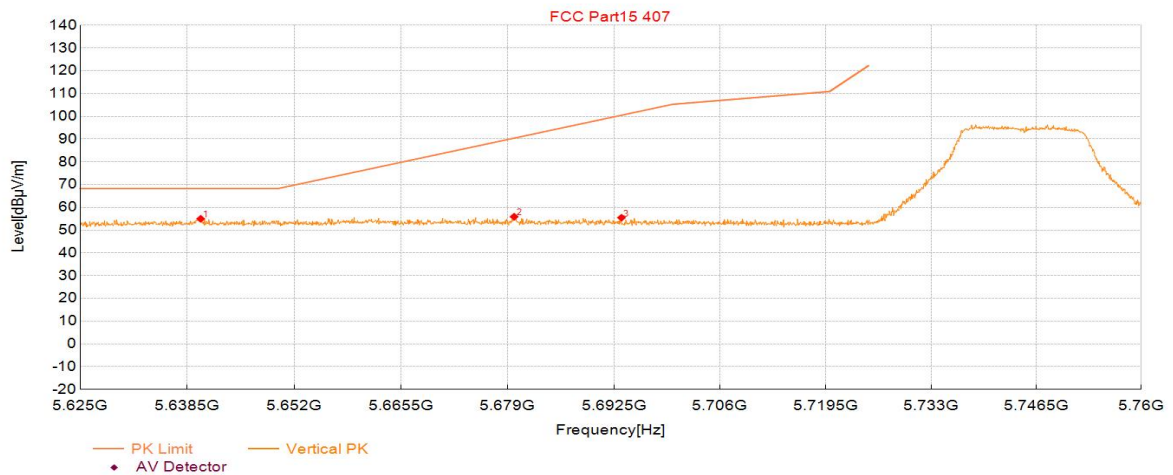

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5640.20         | 35.97            | 55.00          | 19.03       | 68.30          | 13.30       | 150         | 118       | Vertical |
| 2   | 5679.84         | 36.57            | 55.89          | 19.32       | 90.42          | 34.53       | 150         | 123       | Vertical |
| 3   | 5693.48         | 36.05            | 55.46          | 19.41       | 100.49         | 45.03       | 150         | 189       | Vertical |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11A_5825       | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:40:54

## Test Graph

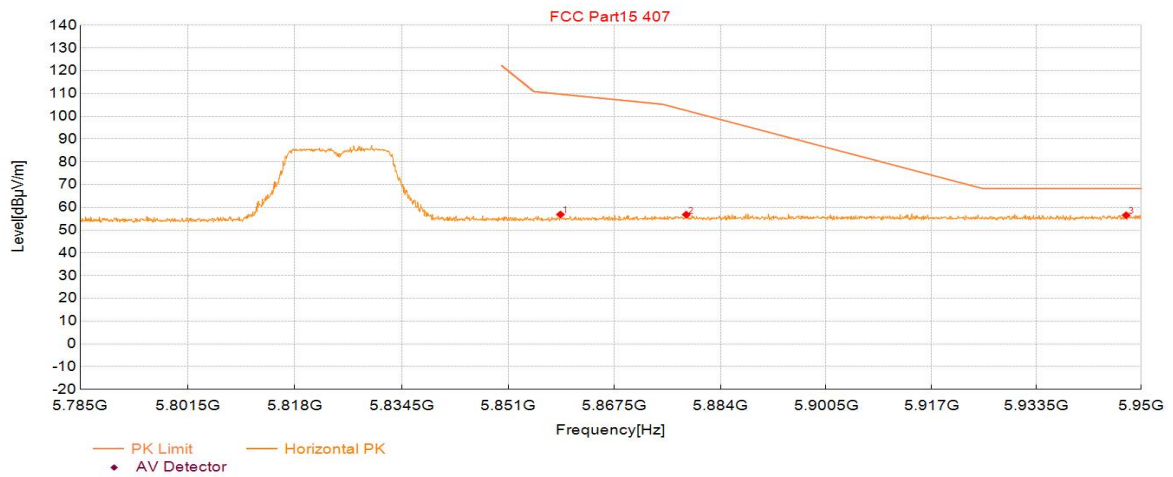

| Suspected Data List |                 |                  |                |             |                |             |             |           |            |
|---------------------|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| NO.                 | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
| 1                   | 5859.12         | 36.28            | 56.85          | 20.57       | 109.74         | 52.89       | 150         | 85        | Horizontal |
| 2                   | 5878.68         | 36.05            | 56.81          | 20.76       | 102.56         | 45.75       | 150         | 348       | Horizontal |
| 3                   | 5947.61         | 35.53            | 56.54          | 21.01       | 68.30          | 11.76       | 150         | 145       | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11A_5825       | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:41:31

## Test Graph

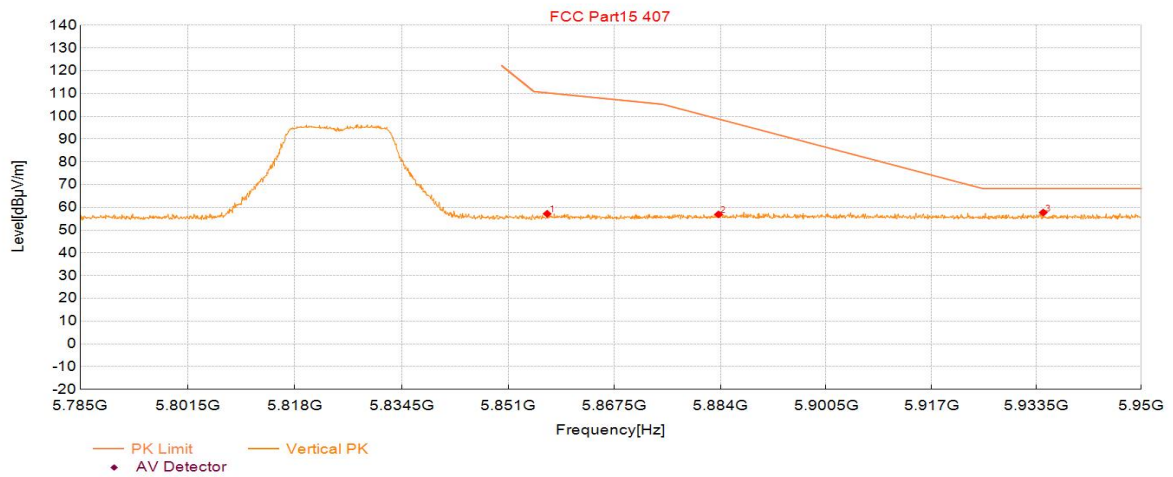

| Suspected Data List |                 |                  |                |             |                |             |             |           |          |
|---------------------|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| NO.                 | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
| 1                   | 5857.06         | 36.64            | 57.18          | 20.54       | 110.32         | 53.14       | 150         | 199       | Vertical |
| 2                   | 5883.72         | 36.09            | 56.90          | 20.81       | 98.83          | 41.93       | 150         | 113       | Vertical |
| 3                   | 5934.56         | 36.73            | 57.73          | 21.00       | 68.30          | 10.57       | 150         | 88        | Vertical |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N20_5745     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:43:53

## Test Graph

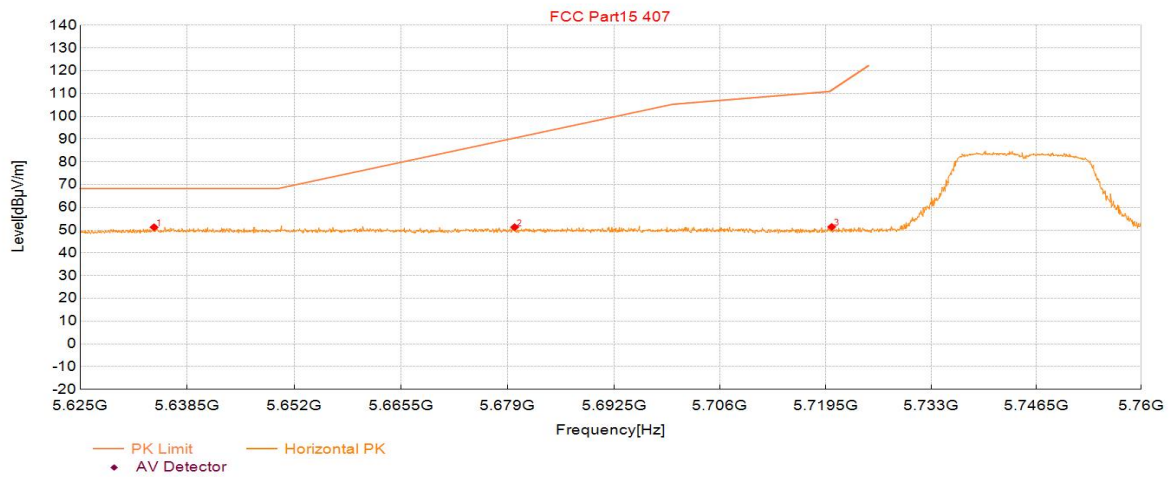

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5634.32         | 32.26            | 51.25          | 18.99       | 68.30          | 17.05       | 150         | 234       | Horizontal |
| 2   | 5679.90         | 31.96            | 51.28          | 19.32       | 90.47          | 39.19       | 150         | 39        | Horizontal |
| 3   | 5720.29         | 31.85            | 51.41          | 19.56       | 111.56         | 60.15       | 150         | 229       | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N20_5745     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:44:30

## Test Graph

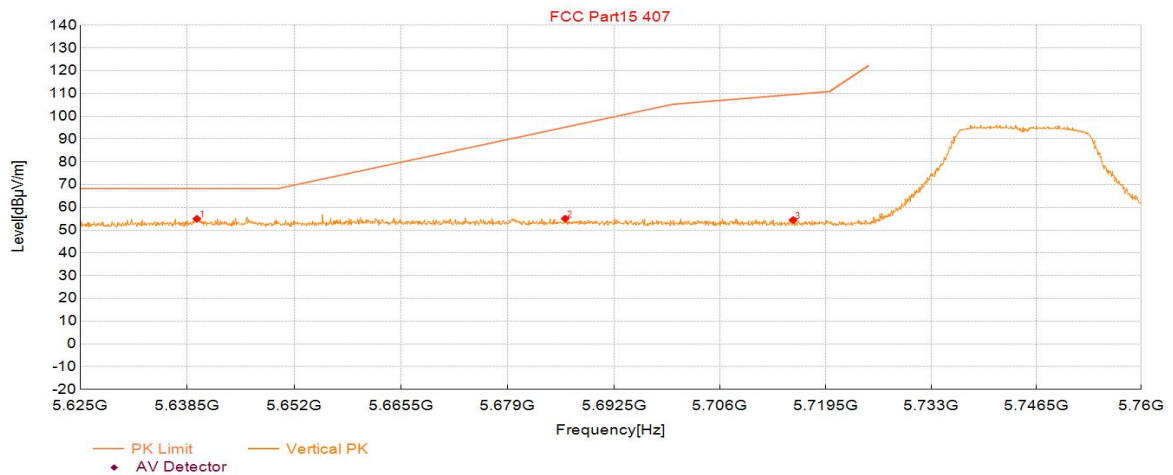

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5639.72         | 35.94            | 54.97          | 19.03       | 68.30          | 13.33       | 150         | 125       | Vertical |
| 2   | 5686.32         | 35.68            | 55.04          | 19.36       | 95.21          | 40.17       | 150         | 125       | Vertical |
| 3   | 5715.36         | 34.91            | 54.45          | 19.54       | 109.60         | 55.15       | 150         | 99        | Vertical |

Note1: Level=Reading+Factor, Margin=Limit - Level




# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N20_5825     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:45:52

## Test Graph

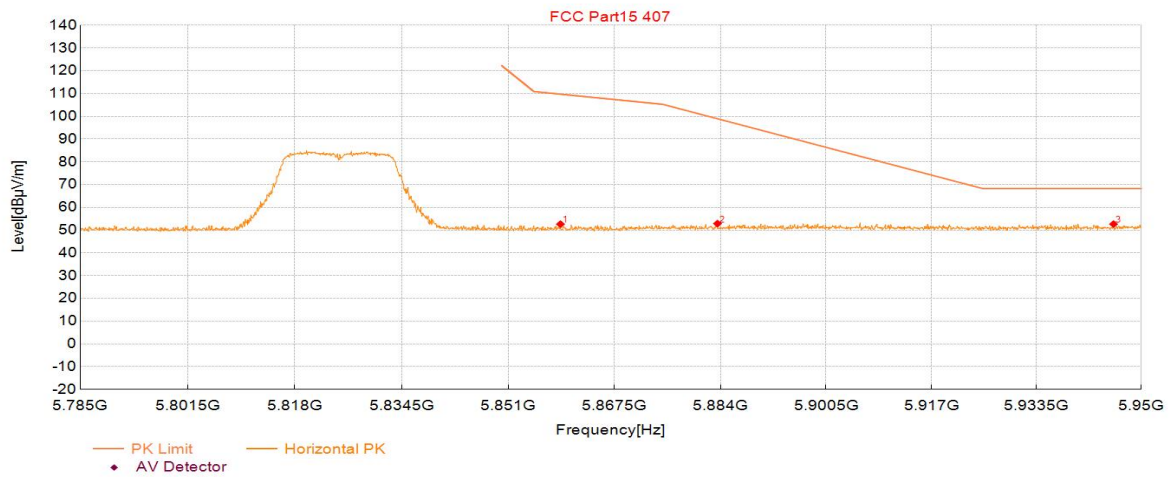

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5859.12         | 32.04            | 52.61          | 20.57       | 109.74         | 57.13       | 150         | 121       | Horizontal |
| 2   | 5883.55         | 32.04            | 52.85          | 20.81       | 98.95          | 46.10       | 150         | 247       | Horizontal |
| 3   | 5945.63         | 31.63            | 52.63          | 21.00       | 68.30          | 15.67       | 150         | 80        | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N20_5825     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:46:29

## Test Graph

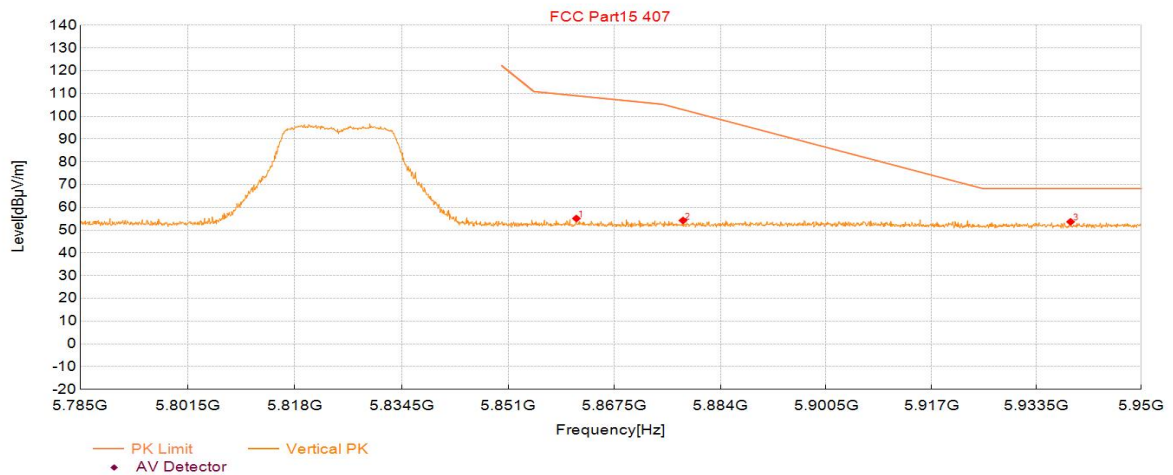

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5861.60         | 34.52            | 55.11          | 20.59       | 109.05         | 53.94       | 150         | 112       | Vertical |
| 2   | 5878.19         | 33.46            | 54.22          | 20.76       | 102.93         | 48.71       | 150         | 112       | Vertical |
| 3   | 5938.86         | 32.65            | 53.65          | 21.00       | 68.30          | 14.65       | 150         | 174       | Vertical |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5755     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:49:22

## Test Graph

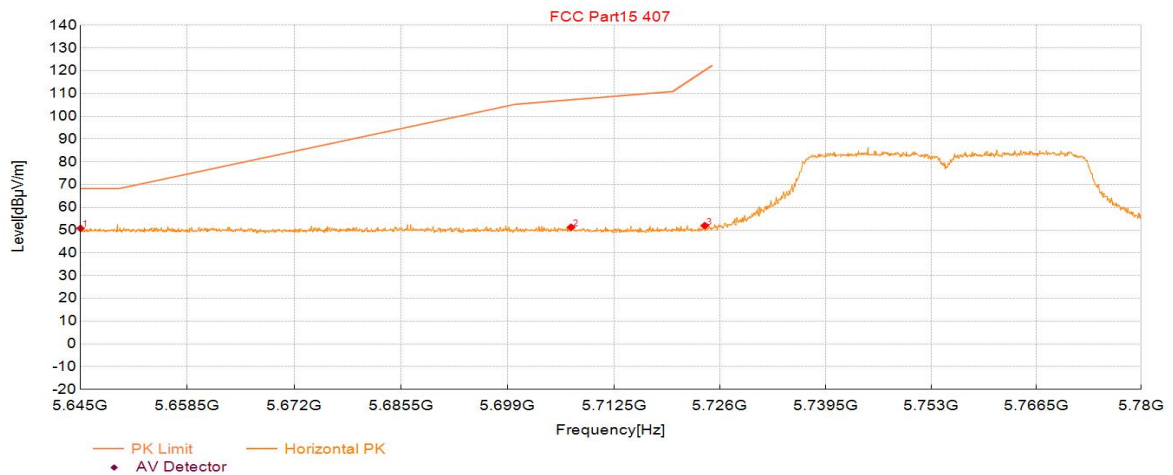

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity   |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 5645.07         | 31.68            | 50.75          | 19.07       | 68.30          | 17.55       | 150         | 248       | Horizontal |
| 2   | 5707.06         | 31.73            | 51.23          | 19.50       | 107.28         | 56.05       | 150         | 95        | Horizontal |
| 3   | 5724.08         | 32.35            | 51.93          | 19.58       | 120.21         | 68.28       | 150         | 100       | Horizontal |


Note1: Level=Reading+Factor, Margin=Limit - Level

# Test Report

| Project Information |                |           |          |
|---------------------|----------------|-----------|----------|
| Customer:           |                |           |          |
| EUT:                |                |           |          |
| Model:              | CTI-CMST01-PTZ | SN:       |          |
| Mode:               | 11N40_5755     | Voltage:  | DC 12V   |
| Environment:        | 24.2℃ 51%      | Engineer: | Soho Liu |
| Remark:             |                |           |          |

Start of Test:2026-01-05 10:49:59

## Test Graph

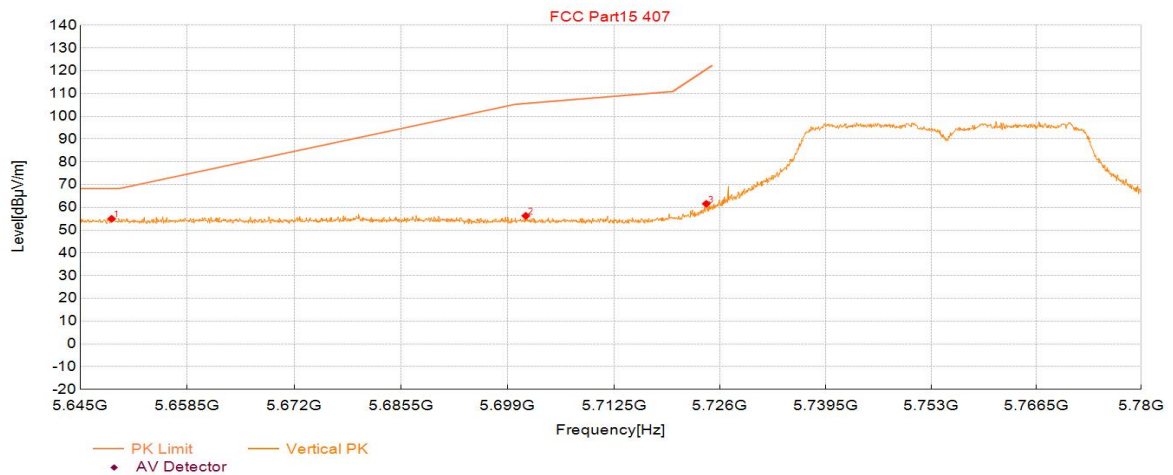

## Suspected Data List

| NO. | Frequency (MHz) | Reading (dBμV/m) | Level (dBμV/m) | Factor (dB) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Angle (°) | Polarity |
|-----|-----------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 5648.98         | 35.88            | 54.97          | 19.09       | 68.30          | 13.33       | 150         | 94        | Vertical |
| 2   | 5701.32         | 36.80            | 56.27          | 19.47       | 105.67         | 49.40       | 150         | 232       | Vertical |
| 3   | 5724.28         | 41.99            | 61.57          | 19.58       | 120.67         | 59.10       | 150         | 125       | Vertical |

Note1: Level=Reading+Factor, Margin=Limit - Level