



RADIO TEST REPORT

Applicant	:	Cosonic Intelligent Technologies Co., Ltd.
Address of Applicant	:	NO. 3 Keyuan Road, Songshan Lake District, Dongguan City, Guangdong Province 523808
Manufacturer	:	Cosonic Intelligent Technologies Co., Ltd.
Address of Manufacturer	:	NO. 3 Keyuan Road, Songshan Lake District, Dongguan City, Guangdong Province 523808
Equipment under Test	:	WIRELESS HEADPHONES
Model No.	:	HA-NP3T
FCC ID	:	2ALVK-HANP3T
IC	:	11136A-HANP3T
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020+Cor.1-2023, RSS-247 Issue 4 July 24, 2025, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021), ANSI C63.10-2020+Cor.1-2023+C63.10a- 2024+Errata to C63.10a-2024
Report No.	:	DDT-RE26070622-1E02
Issue Date	:	2026/08/17
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	6 dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	19
5.1.	Block diagram of test setup	19
5.2.	Limits	19
5.3.	Test procedure	19
5.4.	Test result.....	20
5.5.	Test graphs	21
6.	Maximum Peak Output Power.....	25
6.1.	Block diagram of test setup	25
6.2.	Limits	25
6.3.	Test procedure	25
6.4.	Test result.....	26
6.5.	Test graphs	27
7.	Power Spectral Density	31
7.1.	Block diagram of test setup	31
7.2.	Limits	31
7.3.	Test procedure	31
7.4.	Test result.....	32
7.5.	Test graphs	33
8.	Band Edge Compliance (Conducted Method).....	37

8.1.	Block diagram of test setup	37
8.2.	Limits	37
8.3.	Test procedure	37
8.4.	Test result.....	38
8.5.	Test graphs	39
9.	RF Conducted Spurious Emissions.....	42
9.1.	Block diagram of test setup	42
9.2.	Limits	42
9.3.	Test procedure	42
9.3.1.	Test result.....	43
9.4.	Test graphs	44
10.	Duty Cycle	56
10.1.	Block diagram of test setup	56
10.2.	Limit.....	56
10.3.	Test procedure	56
10.4.	Test result.....	57
10.5.	Test graphs	58
11.	Antenna Requirements.....	62
11.1.	Limit.....	62
11.2.	Result	62
12.	Radiated Emission	63
12.1.	Test equipment.....	63
12.2.	Block diagram of test setup	64
12.3.	Limits	65
12.4.	Assistant equipment used for test	67
12.5.	Test procedure	67
12.6.	Test result.....	68
12.7.	Test data	69
13.	Band Edge Compliance.....	125
13.1.	Test equipment.....	125
13.2.	Block diagram of test setup	125
13.3.	Limits	126
13.4.	Assistant equipment used for test	126
13.5.	Test procedure	126
13.6.	Test result.....	126
13.7.	Test data	127
14.	Power Line Conducted Emissions.....	143
14.1.	Test equipment.....	143

14.2. Block diagram of test setup143

14.3. Limits143

14.4. Assistant equipment used for test143

14.5. Test procedure144

14.6. Test result.....144

14.7. Test data145

15. Test Setup Photograph147

16. Photos of the EUT150

Test Report Declare

Applicant	:	Cosonic Intelligent Technologies Co., Ltd.
Address of Applicant	:	NO. 3 Keyuan Road, Songshan Lake District, Dongguan City, Guangdong Province 523808
Equipment under Test	:	WIRELESS HEADPHONES
Model No.	:	HA-NP3T
Manufacturer	:	Cosonic Intelligent Technologies Co., Ltd.
Address of Manufacturer	:	NO. 3 Keyuan Road, Songshan Lake District, Dongguan City, Guangdong Province 523808

Test Standard Used:
FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020+Cor.1-2023,
RSS-247 Issue 4 July 24, 2025,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021),
ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE26070622-1E02		
Date of Receipt:	2026/07/08	Date of Test:	2026/07/08 - 2026/08/04

Created: Bobo Chen	Reviewed: Tiger Mo	Approved: Ella Gong
		
2026/08/04	2026/08/17	2026/08/17

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/08/17	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	47 CFR Part 15 15.247(a)(2), RSS-247 clause 6.3.1, RSS-Gen clause 6.7	/	Pass
2	Peak Output Power	47 CFR Part 15 15.247(b)(3), RSS-247 clause 6.3.2	/	Pass
3	Power Spectral Density	47 CFR Part 15 15.247(e), RSS-247 clause 6.3.1	/	Pass
4	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d), RSS-247 clause 6.6	/	Pass
5	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
6	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d), RSS-247 clause 6.6, RSS-Gen clause 8.9, RSS-Gen clause 8.10	/	Pass
7	Antenna Requirement	47 CFR Part 15 15.203, RSS-Gen clause 6.8	/	Pass
8	Power Line Conducted Emissions	47 CFR Part 15 15.207(a), RSS-Gen clause 8.8	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

2. General Test Information

2.1. Description of EUT

EUT Name	: WIRELESS HEADPHONES
Model Number	: HA-NP3T
EUT Function Description	: Please reference user manual of this device
Power Supply	: CHARGING CASE: DC 5V from USB cable HEADSET: DC 5V from external charging case CHARGING CASE: DC 3.8V Lithium-ion built-in battery HEADSET: DC 3.85V Lithium-ion built-in battery
Antenna Type	: PIFA
Max Antenna Gain(dBi)	: Left side: -5.1dBi Right side: -3.8dBi

Radio Specification	: Bluetooth LE
Operation Frequency	: 2402 MHz to 2480 MHz
Modulation	: GFSK

Bluetooth LE 1Mbps Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Bluetooth LE 2Mbps Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466

5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	
13	2428	27	2456	/	
The channels denoted with the grey background are excluded, because they are primary advertising channel only for the Bluetooth LE 1Mbps according to the Bluetooth Core Specification.					


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: FCC_assist_1.0.2.2.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table:

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK 1M	Default	CH0	2402
	Default	CH19	2440
	Default	CH39	2480
GFSK 2M	Default	CH1	2404
	Default	CH19	2440
	Default	CH38	2478

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.9%
Peak Output Power (Conducted) (Spectrum analyzer)	0.98 dB
Peak Output Power (Conducted) (Power Sensor)	1.18 dB
Power Spectral Density (Base EIRP)	1.51 dB
Power Spectral Density (Spectrum analyzer)	0.98 dB
Frequencies Stability	1.9 kHz
Conducted spurious emissions	1.21 dB ($9\text{ kHz} \leq f < 7\text{ GHz}$);
	3.31 dB ($7\text{ GHz} \leq f < 40\text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	5.5×10^{-8}
Time	0.11%
Temperature	0.3 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.28 dB (Antenna Polarize: V)
	4.14 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.22 dB (1 - 6 GHz)
	4.52 dB (6 GHz - 18 GHz)
	4.58 dB (18 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2027/02/27
Wideband Radio Communication Tester	R&S	CMW500	117491	2027/02/27
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2027/02/27
MXG Vector Signal Generator	Agilent	N5182A	MY47420658	2027/02/27
RF Control Unit	Tonscend	JS0806-2	158060010	2027/02/27
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2027/02/27
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 6 dB Bandwidth

4.1. Block diagram of test setup

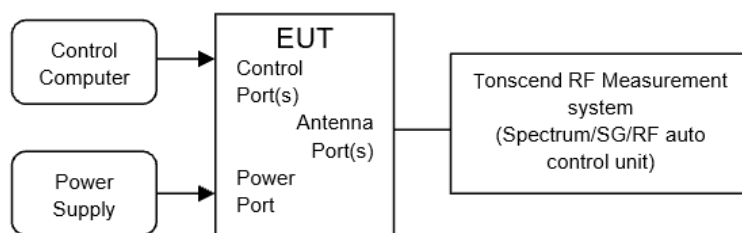

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:


RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report.


4.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.3-28.2℃,35-53.6%RH	Test Date:	2026.8.1
Test Power Supply:	Battery	Sample Number:	S26070622-009


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Left side	2402	0.66	2401.72	2402.38	0.5	PASS
	Right side	2402	0.66	2401.72	2402.38	0.5	PASS
	Left side	2440	0.66	2439.72	2440.38	0.5	PASS
	Right side	2440	0.66	2439.72	2440.38	0.5	PASS
	Left side	2480	0.66	2479.72	2480.38	0.5	PASS
	Right side	2480	0.66	2479.72	2480.38	0.5	PASS
BLE_2M	Left side	2404	1.37	2403.33	2404.71	0.5	PASS
	Right side	2404	1.39	2403.33	2404.71	0.5	PASS
	Left side	2440	1.39	2439.33	2440.72	0.5	PASS
	Right side	2440	1.37	2439.33	2440.71	0.5	PASS
	Left side	2478	1.39	2477.33	2478.72	0.5	PASS
	Right side	2478	1.36	2477.33	2478.69	0.5	PASS

4.5. Test graphs

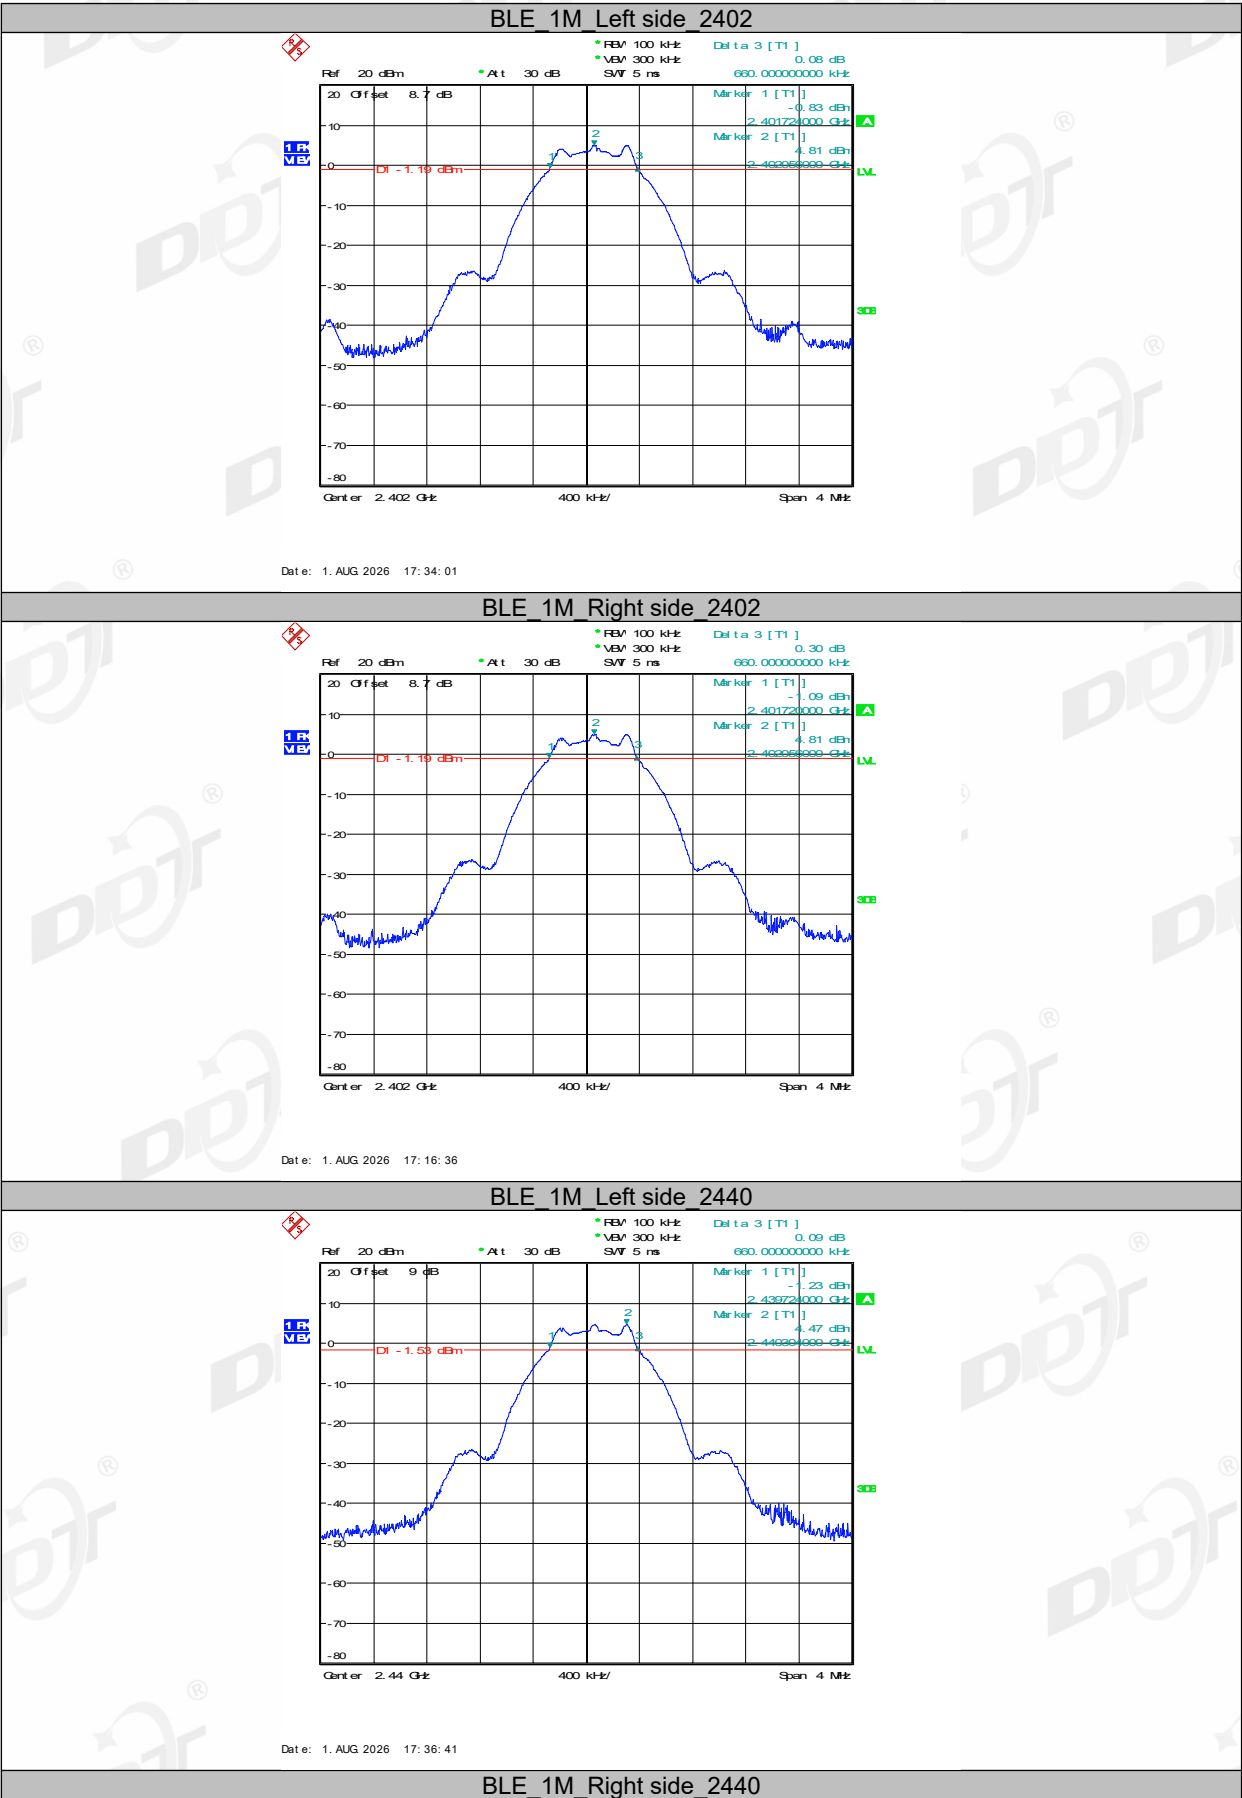


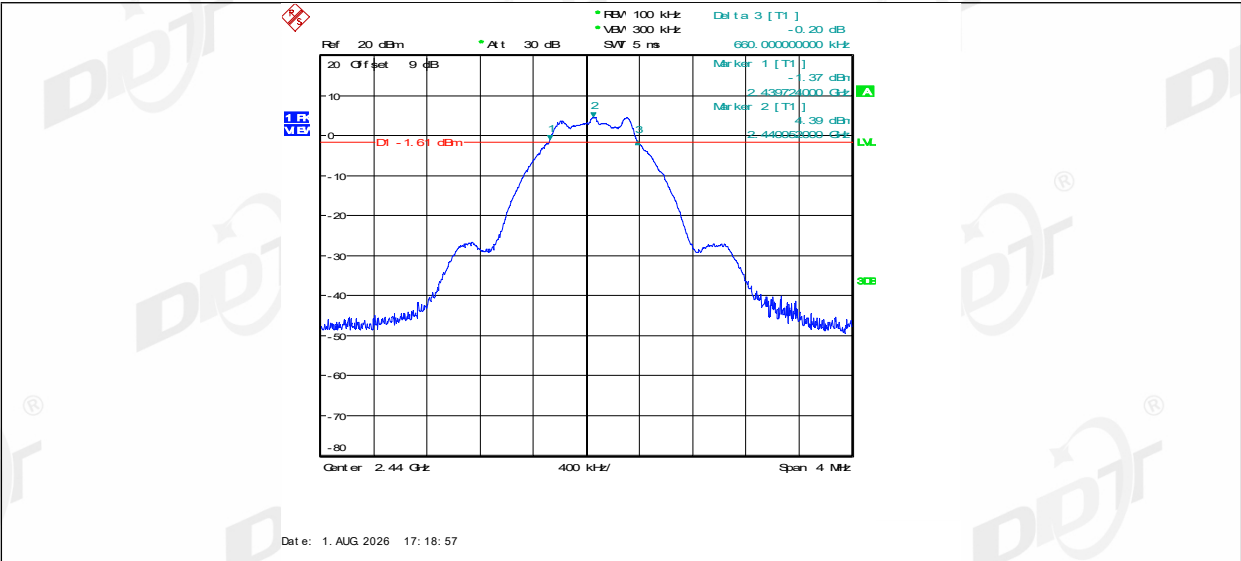


BLE_1M Left side 2480

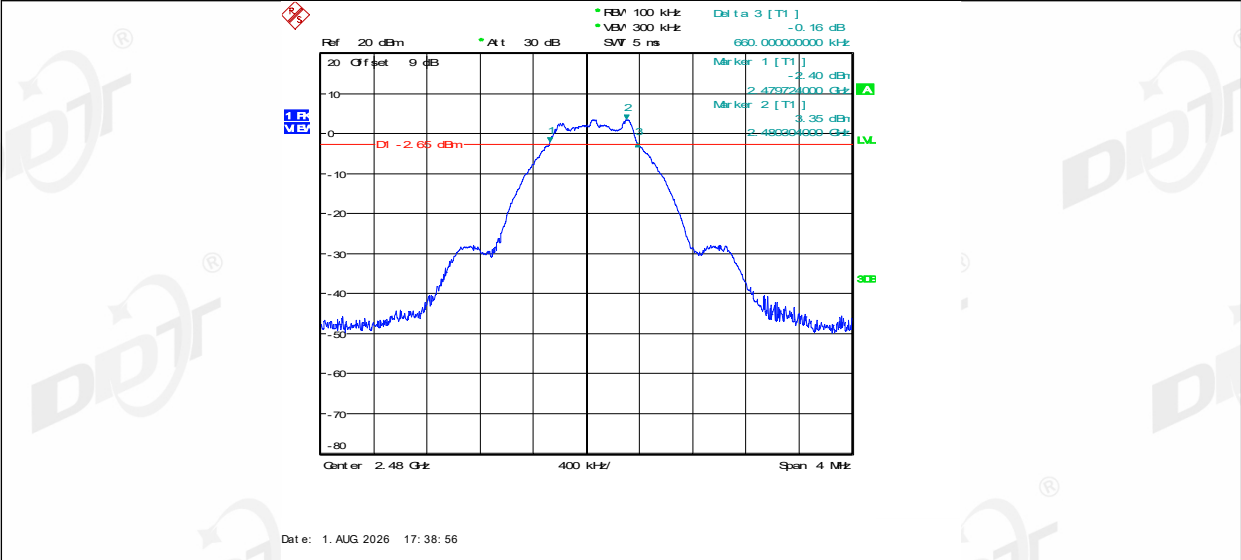

BLE_1M Right side 2480

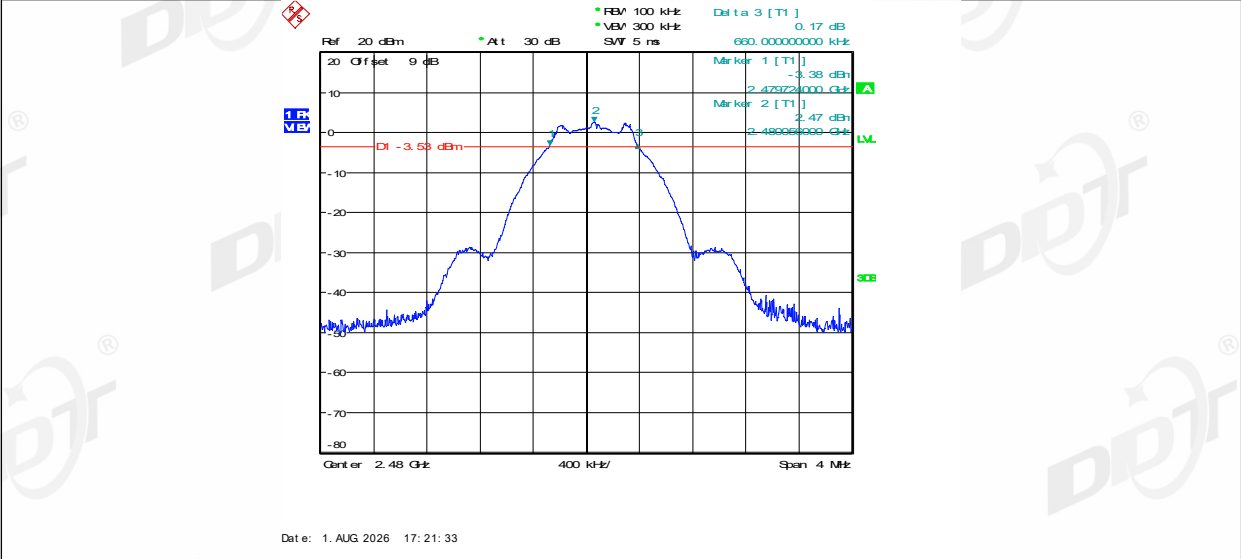

BLE_2M Left side 2404



RBW 100 kHz
 VBW 300 kHz
 SMT 5 ms

Delta 3 [T1]
 0.30 dB
 1.388000000 MHz

Ref 20 dBm
 Att 30 dB

20 Offset 8.7 dB

10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -80

DI -1.22 dBm

Marker 1 [T1]
 -1.17 dBm
 2.403320000 GHz

Marker 2 [T1]
 -4.78 dBm
 2.404060000 GHz

1
 2
 3


Center 2.404 GHz
 Span 6 MHz

Date: 1. AUG 2026 17:24:27


[illegible]

Date: 1. AUG 2026 17:43:39


BLE_2M_Right side_2440

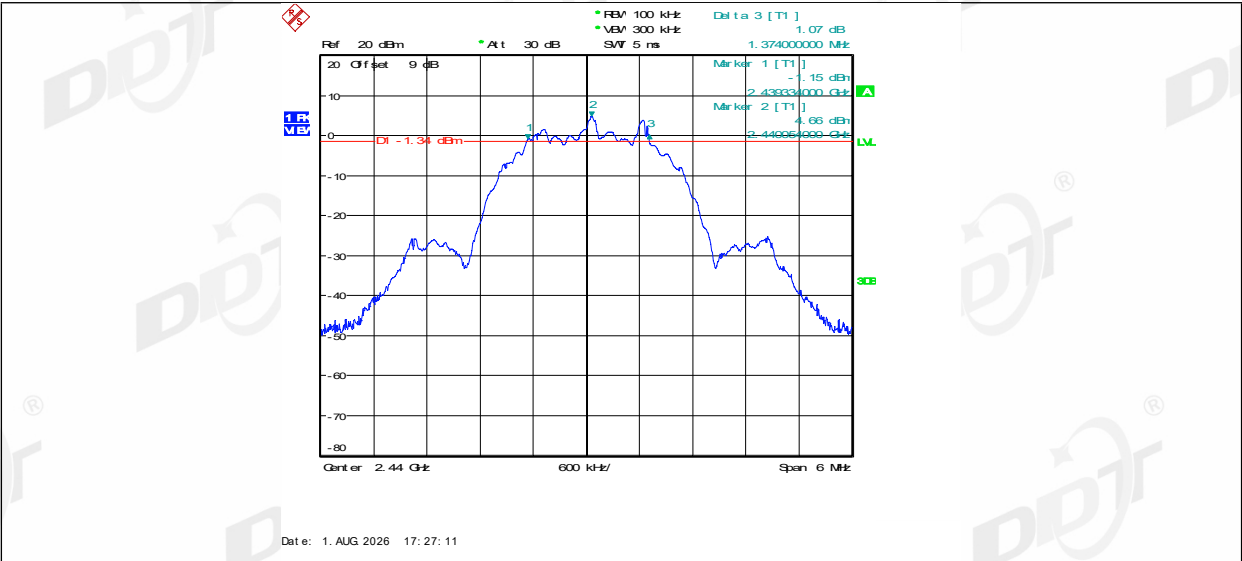

BLE 2M Left side 2478

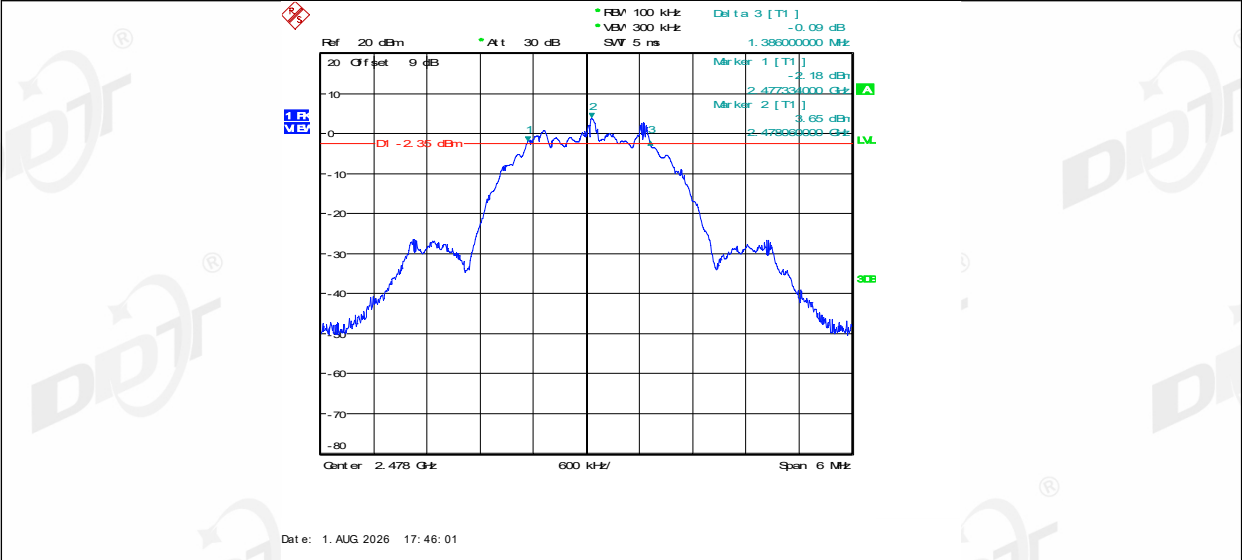


BLE 2M Right side 2478

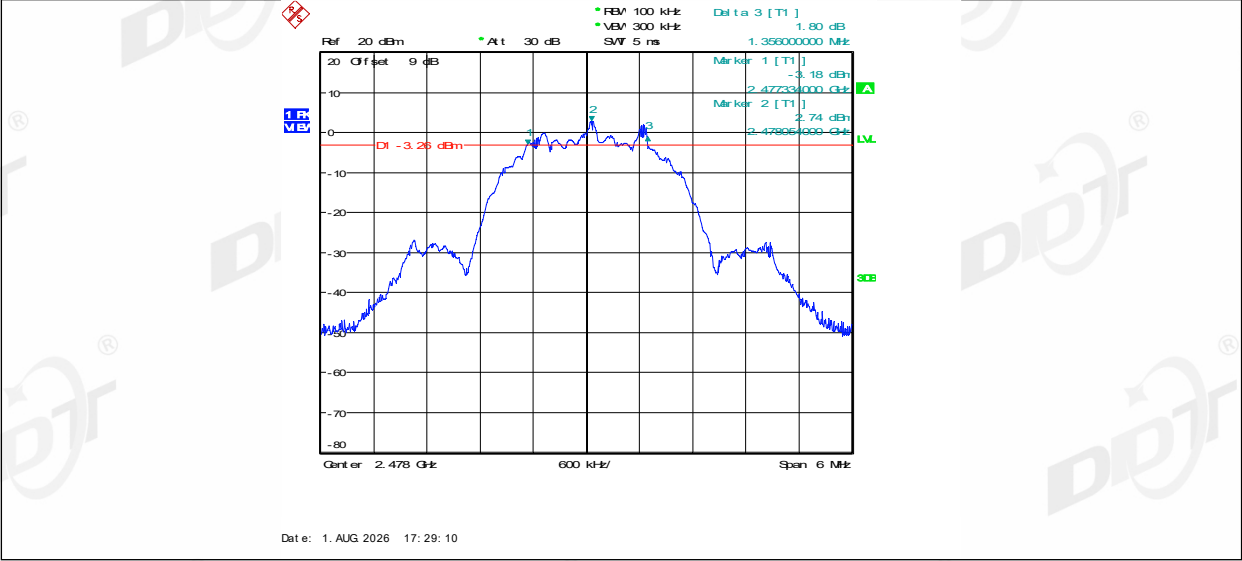

5. 99% Bandwidth

5.1. Block diagram of test setup

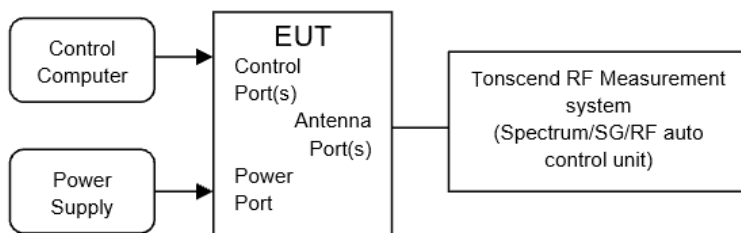

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:


RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.3-28.2℃,35-53.6%RH	Test Date:	2026.8.1
Test Power Supply:	Battery	Sample Number:	S26070622-009


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Left side	2402	1.0200	2401.5480	2402.5680	---	---
	Right side	2402	1.0160	2401.5480	2402.5640	---	---
	Left side	2440	1.0200	2439.5480	2440.5680	---	---
	Right side	2440	1.0160	2439.5480	2440.5640	---	---
	Left side	2480	1.0200	2479.5480	2480.5680	---	---
	Right side	2480	1.0160	2479.5480	2480.5640	---	---
BLE_2M	Left side	2404	2.0940	2403.0100	2405.1040	---	---
	Right side	2404	2.0940	2403.0040	2405.0980	---	---
	Left side	2440	2.0940	2439.0100	2441.1040	---	---
	Right side	2440	2.1000	2439.0040	2441.1040	---	---
	Left side	2478	2.0940	2477.0100	2479.1040	---	---
	Right side	2478	2.1060	2476.9980	2479.1040	---	---

5.5. Test graphs

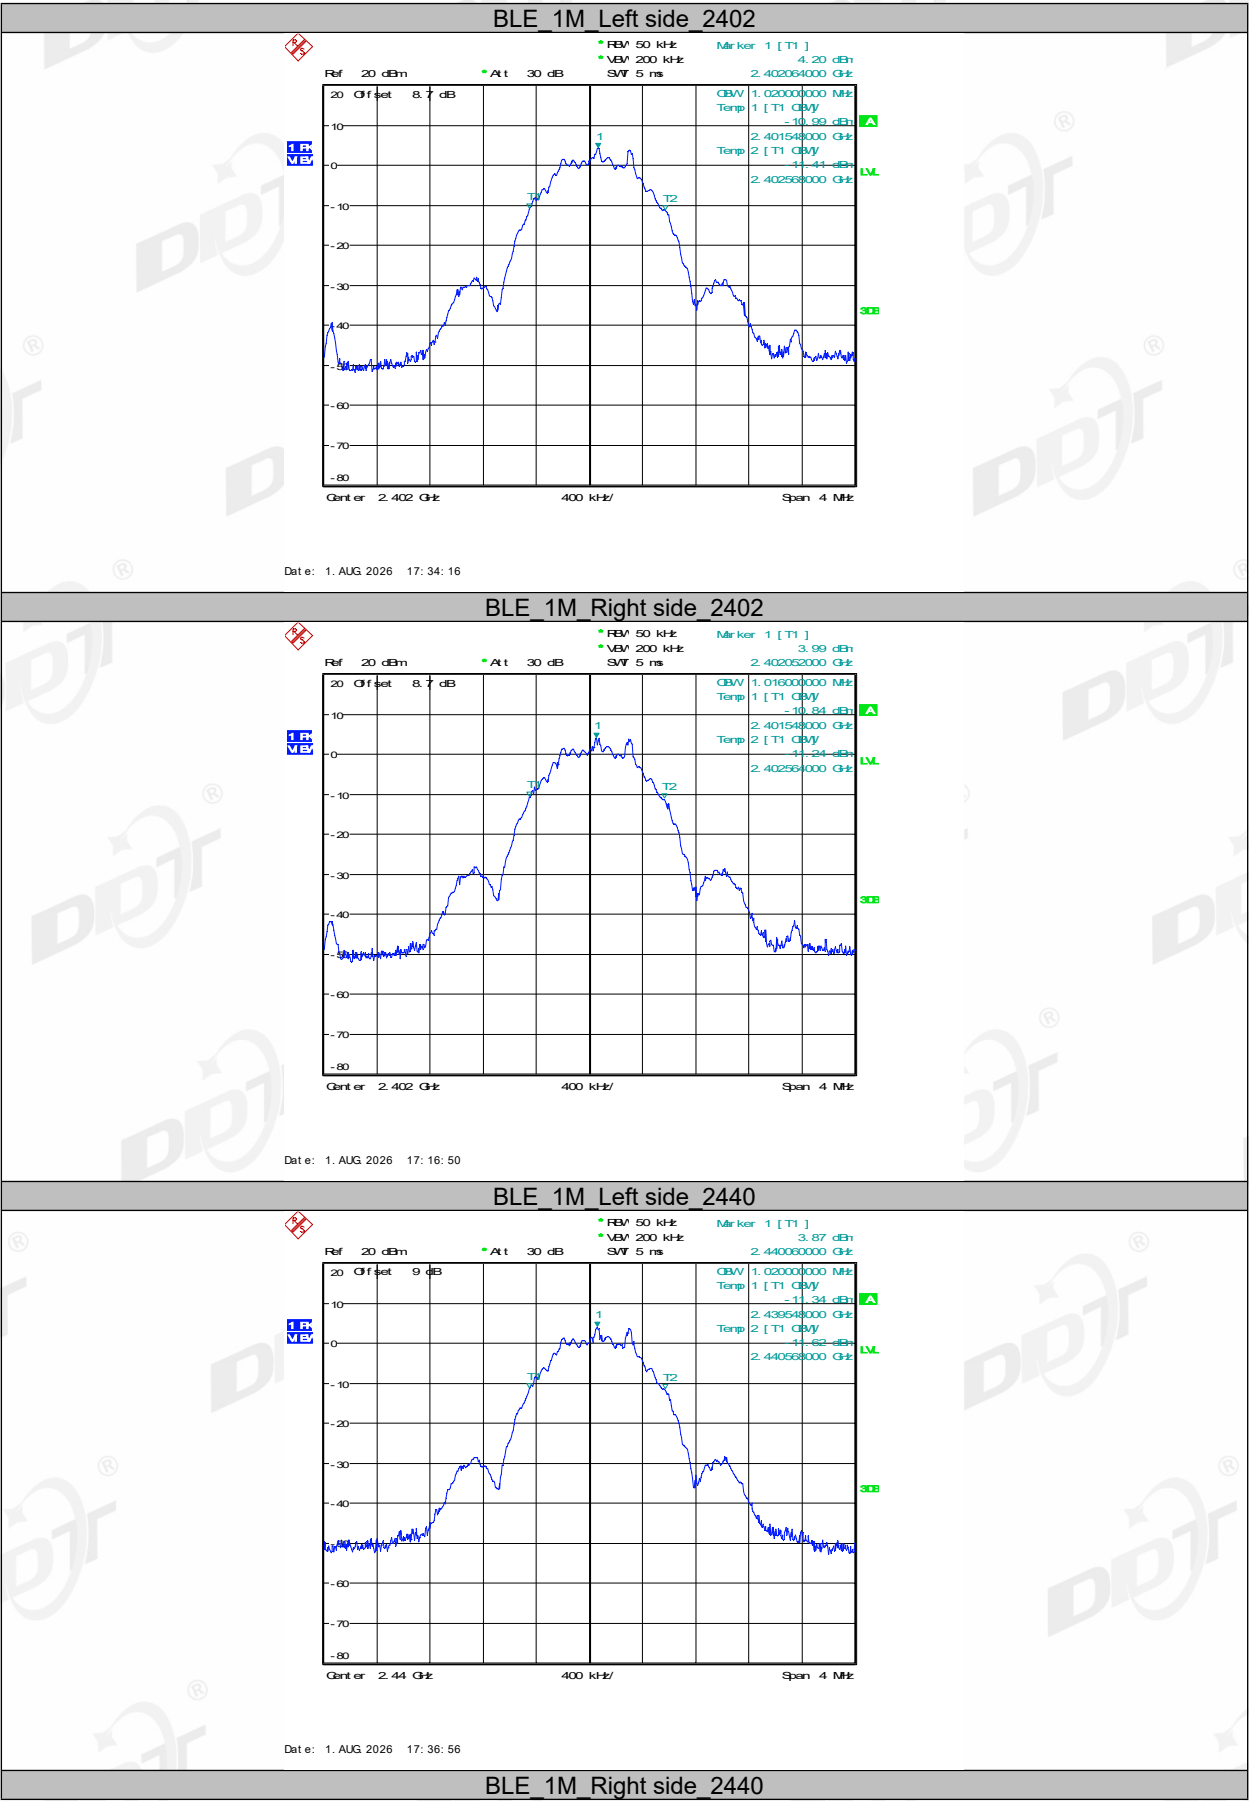


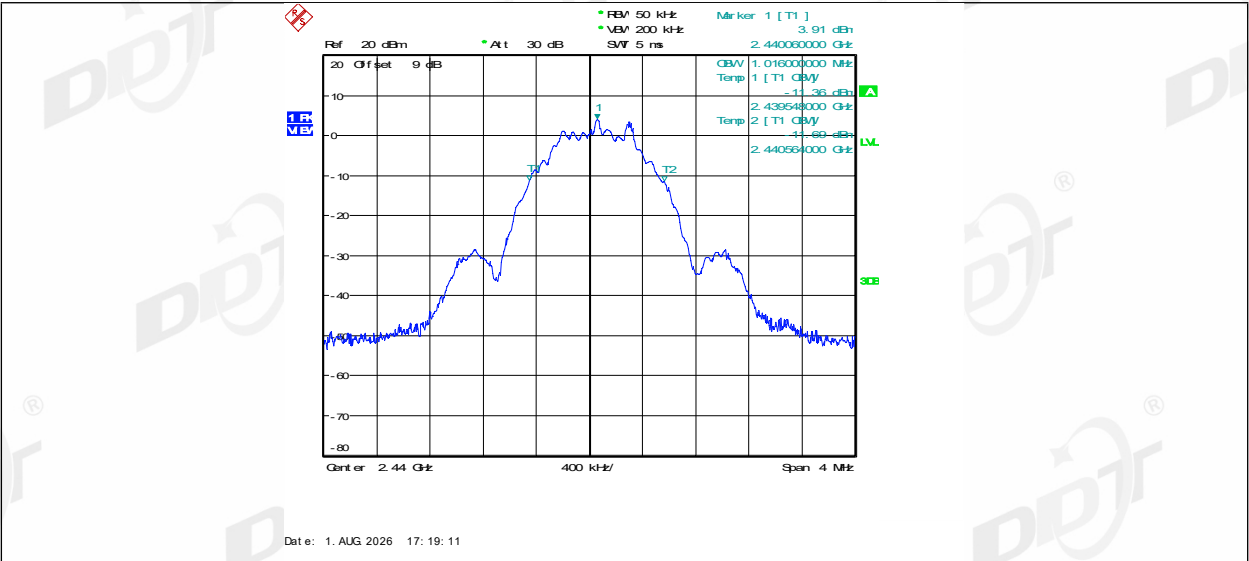




BLE_1M Left side 2480



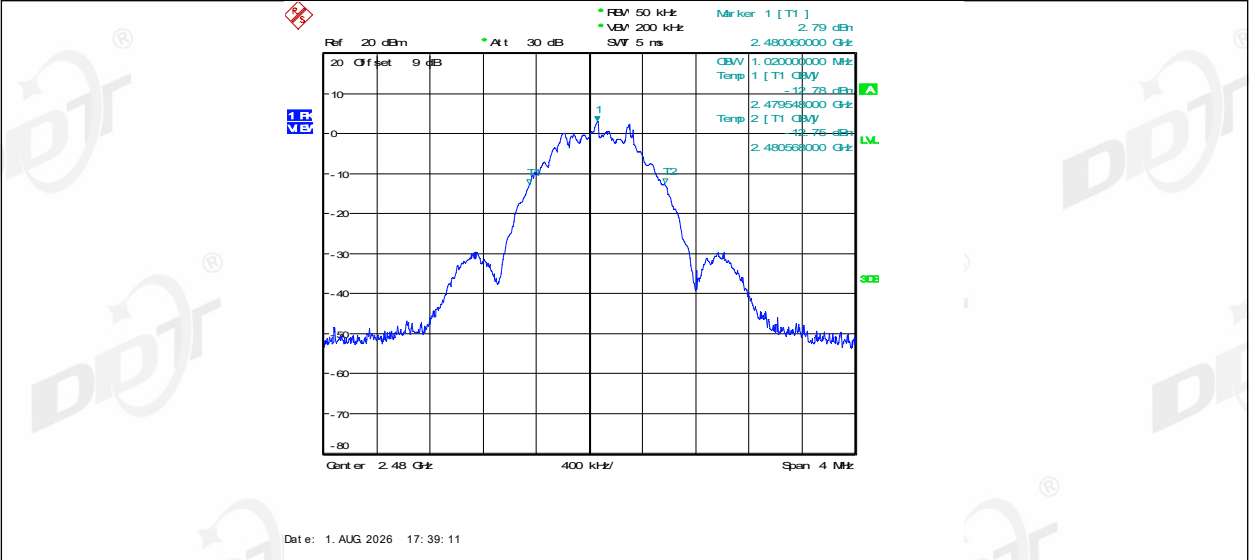


BLE_1M Right side 2480

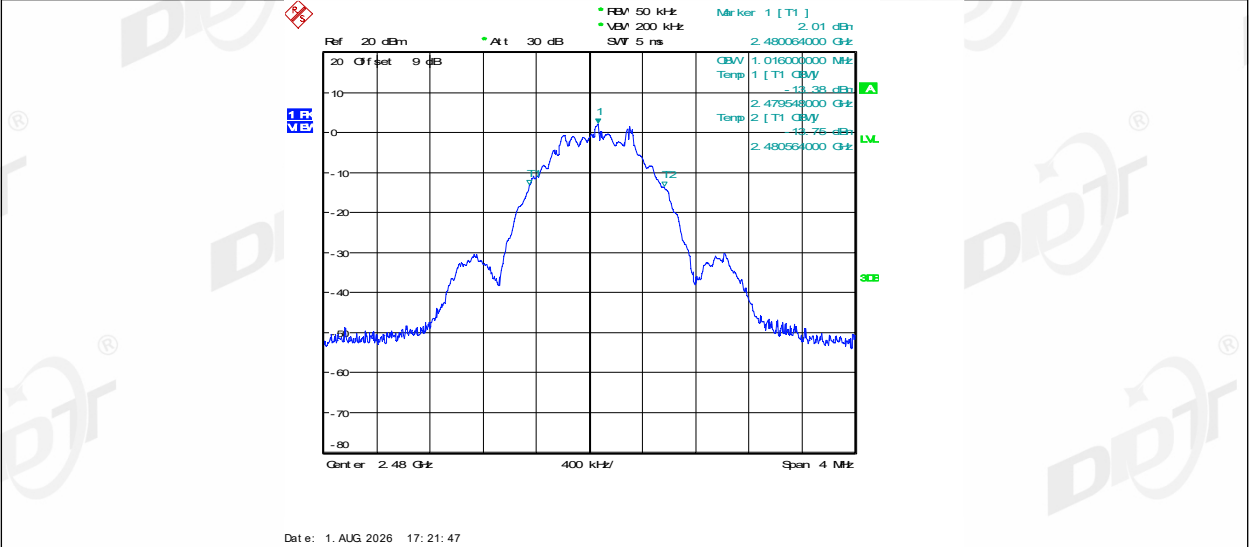


BLE_2M Left side 2404

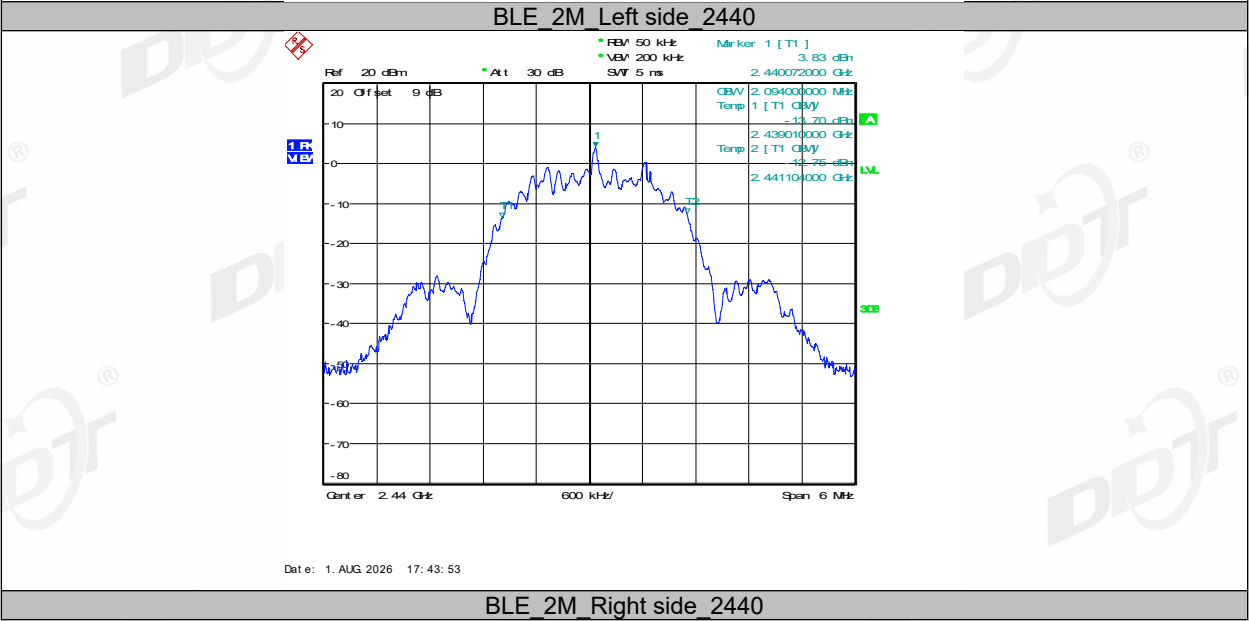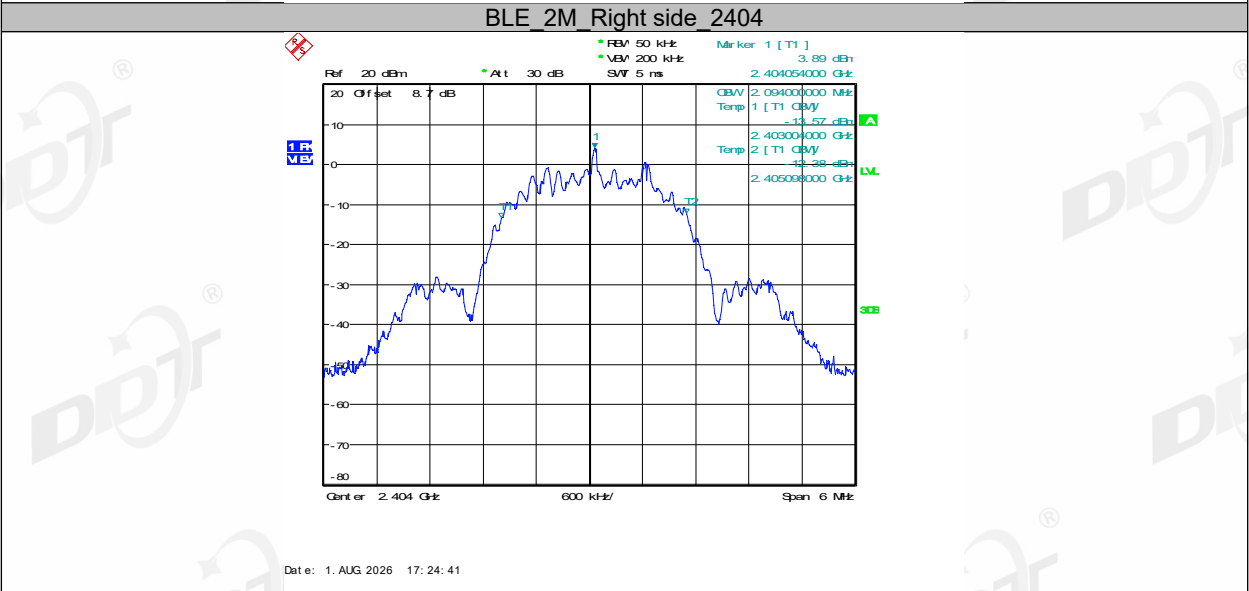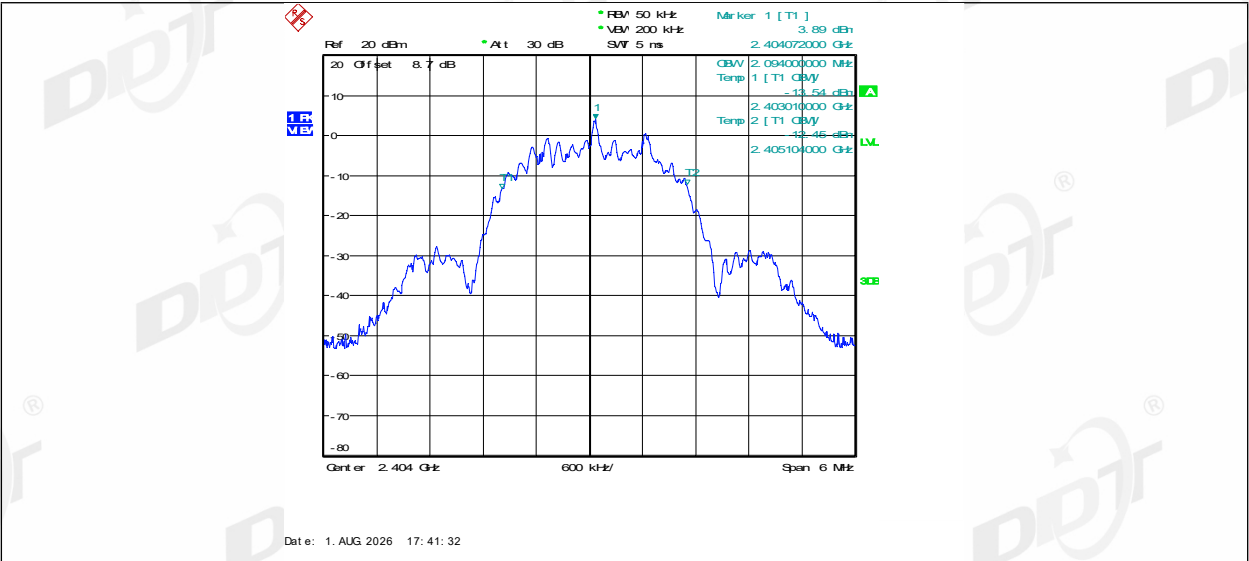

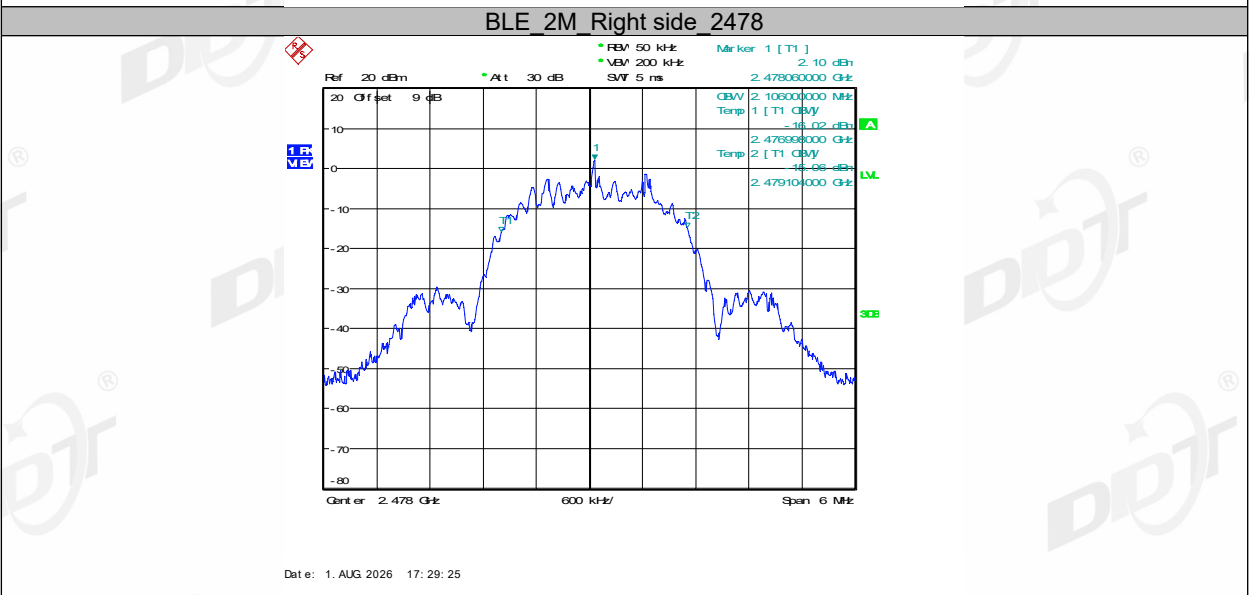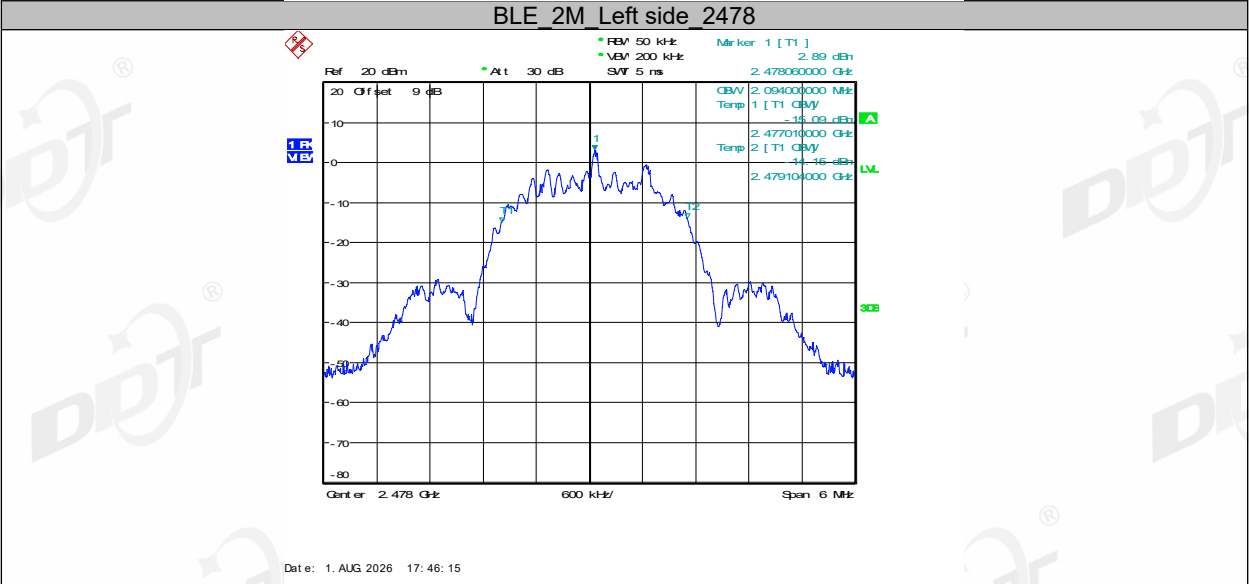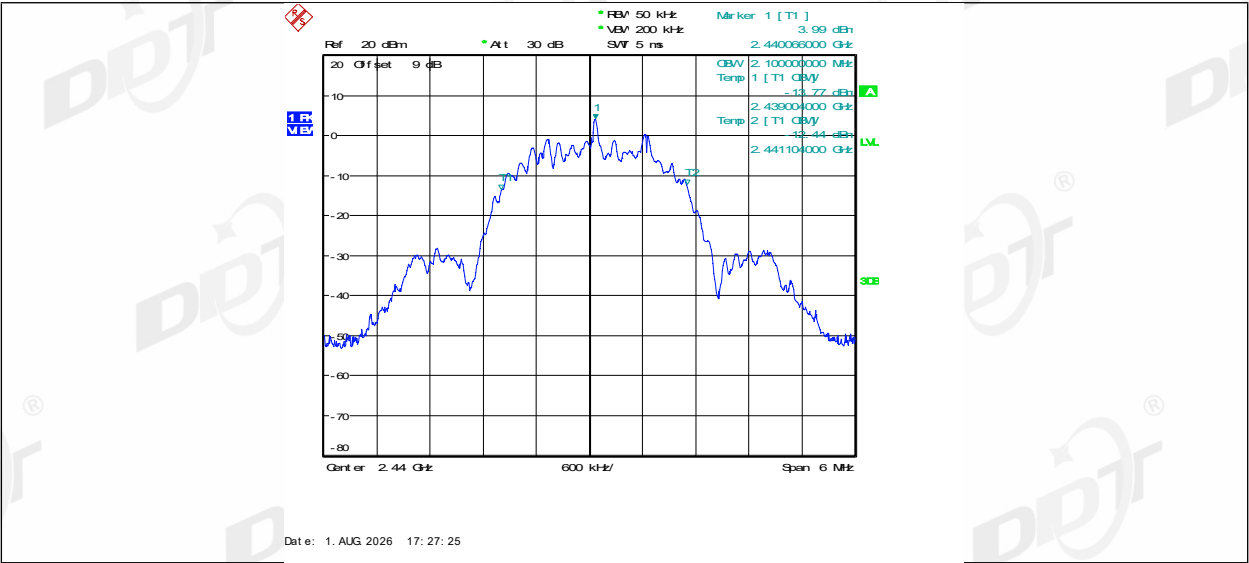

6. Maximum Peak Output Power

6.1. Block diagram of test setup

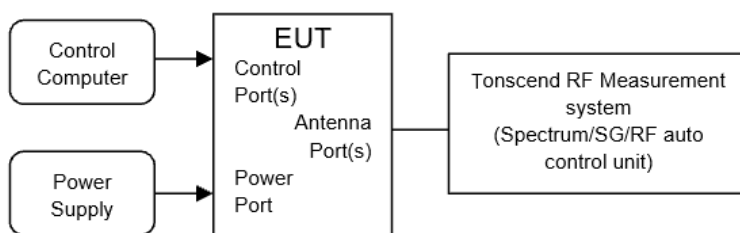

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.9.1.1.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	≥DTS bandwidth
VBW:	≥3 x RBW
Span	≥3 x RBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, use peak marker function to determine the peak amplitude level.


6.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.3-28.2℃,35-53.6%RH	Test Date:	2026.8.1
Test Power Supply:	Battery	Sample Number:	S26070622-009


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Left side	2402	5.68	≤30	5.68	≤36	PASS
	Right side	2402	5.69	≤30	5.69	≤36	PASS
	Left side	2440	5.43	≤30	5.43	≤36	PASS
	Right side	2440	5.32	≤30	5.32	≤36	PASS
	Left side	2480	4.20	≤30	4.20	≤36	PASS
	Right side	2480	3.35	≤30	3.35	≤36	PASS
BLE_2M	Left side	2404	5.72	≤30	5.72	≤36	PASS
	Right side	2404	5.80	≤30	5.80	≤36	PASS
	Left side	2440	5.57	≤30	5.57	≤36	PASS
	Right side	2440	5.53	≤30	5.53	≤36	PASS
	Left side	2478	4.60	≤30	4.60	≤36	PASS
	Right side	2478	3.76	≤30	3.76	≤36	PASS

6.5. Test graphs

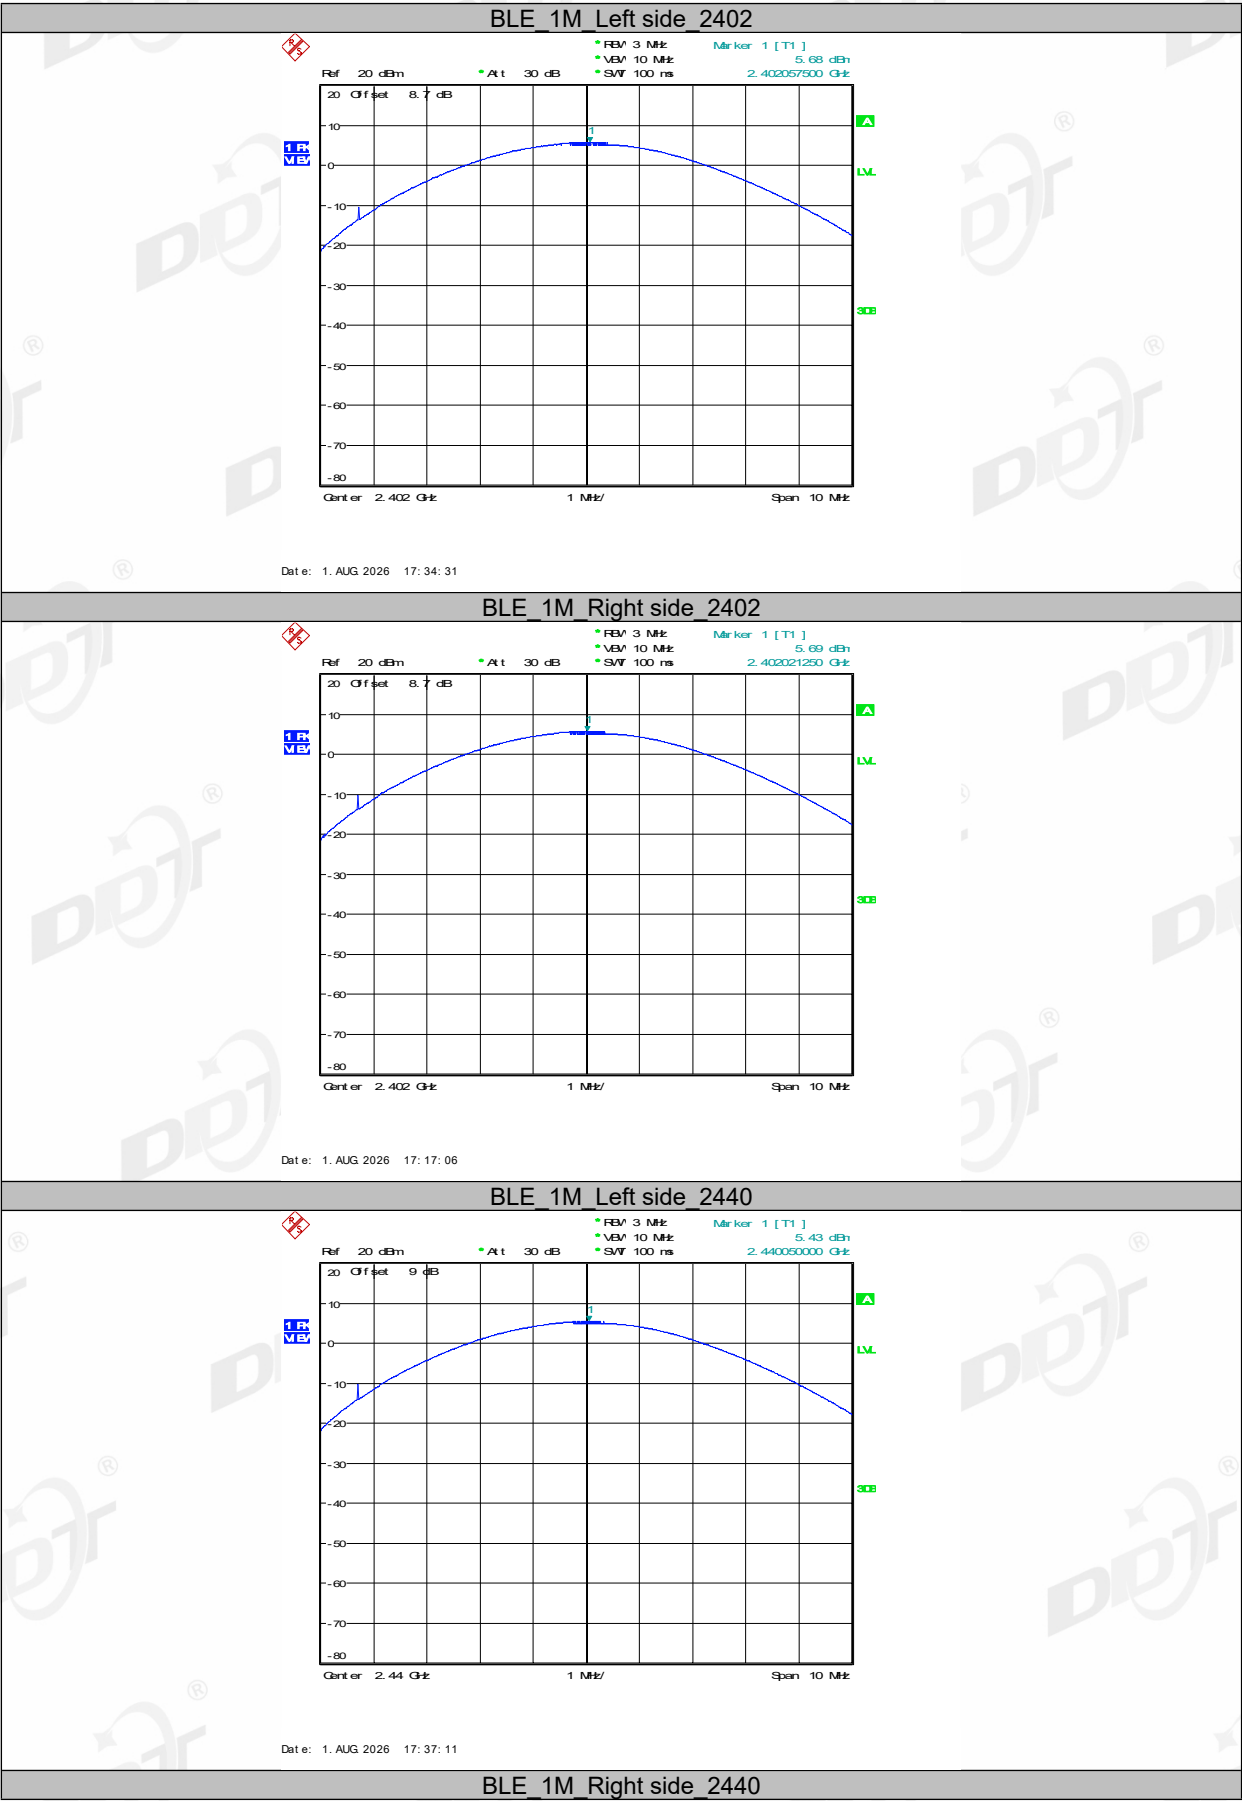


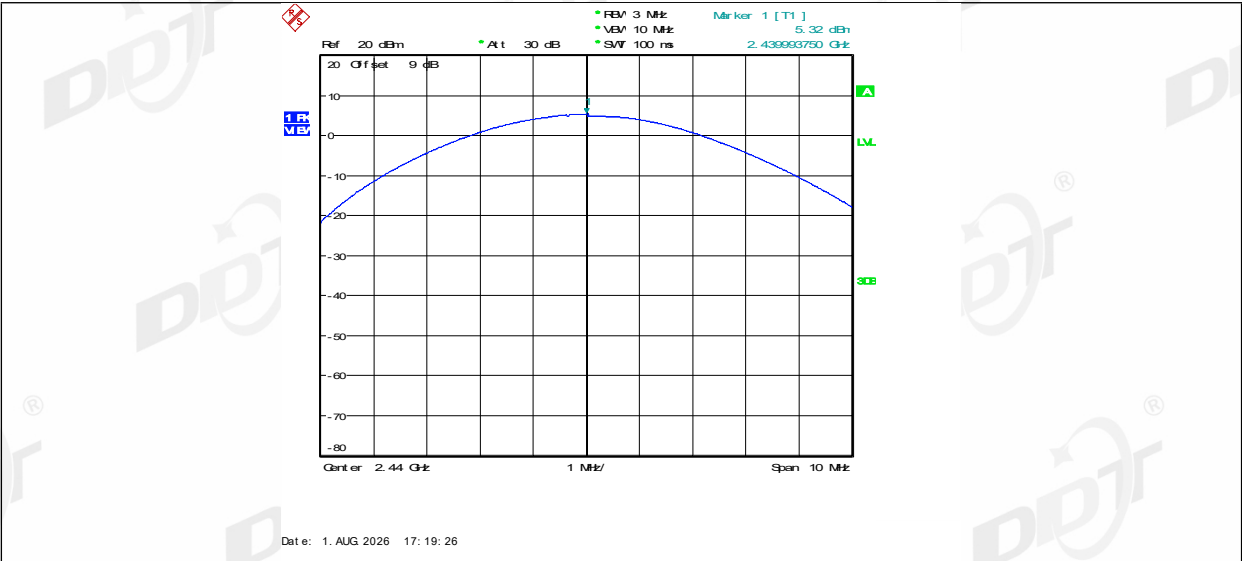


BLE_1M Left side_2480

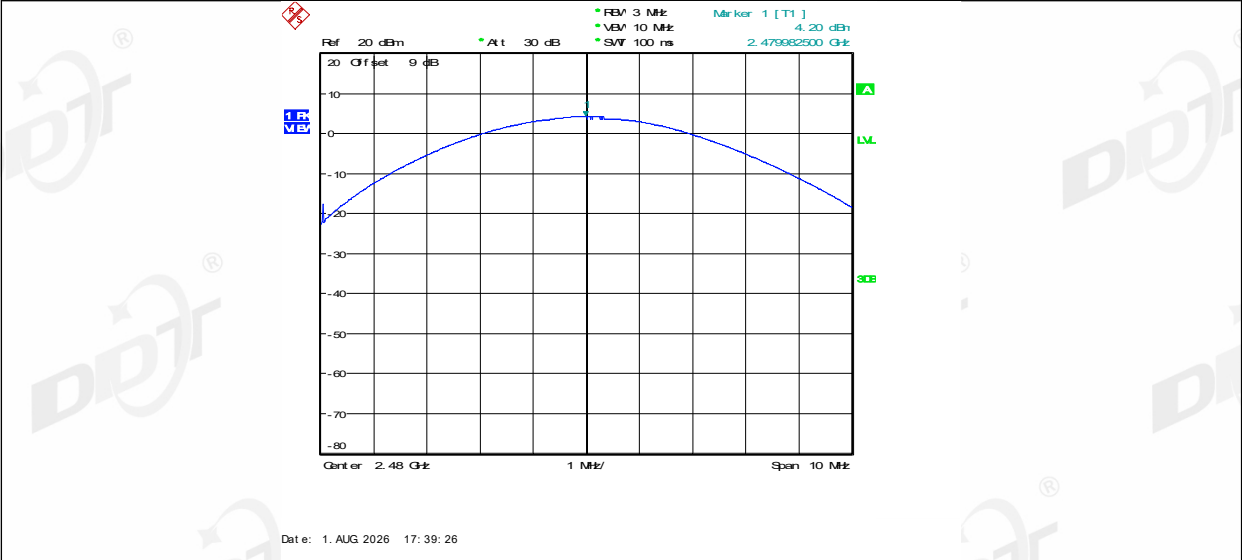


BLE_1M Right side_2480

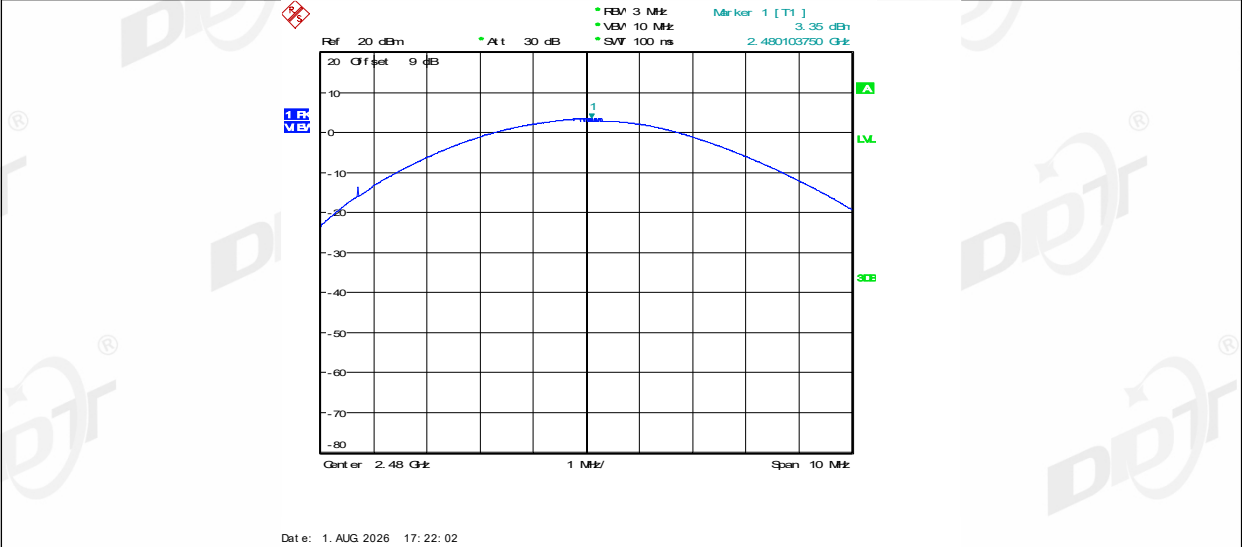


BLE_2M Left side_2404

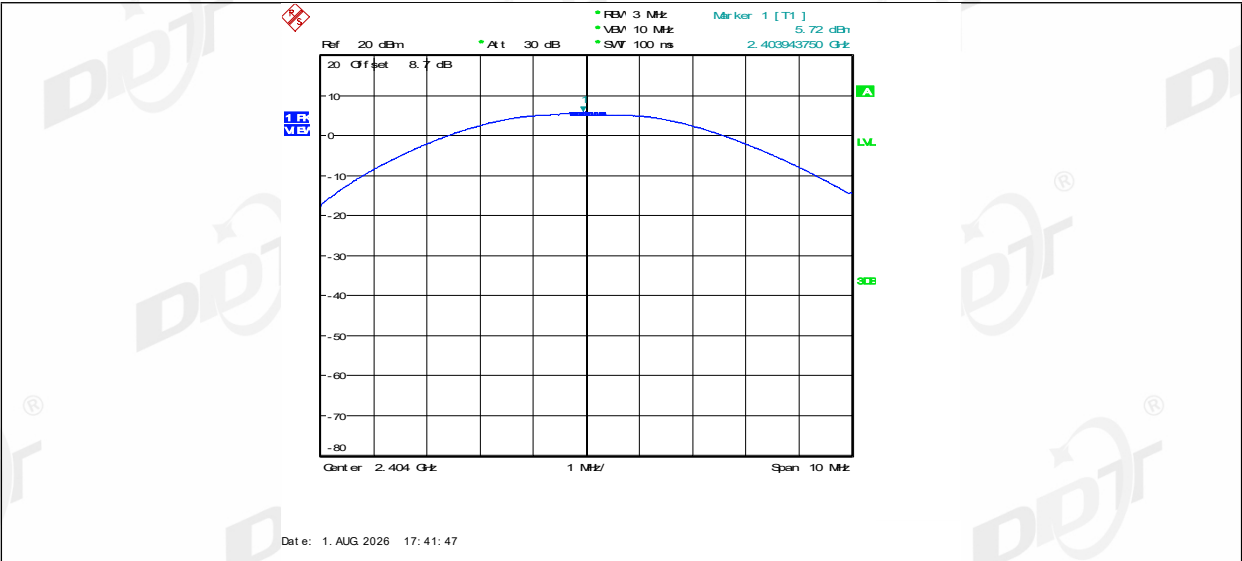




BLE_2M_Right side_2404

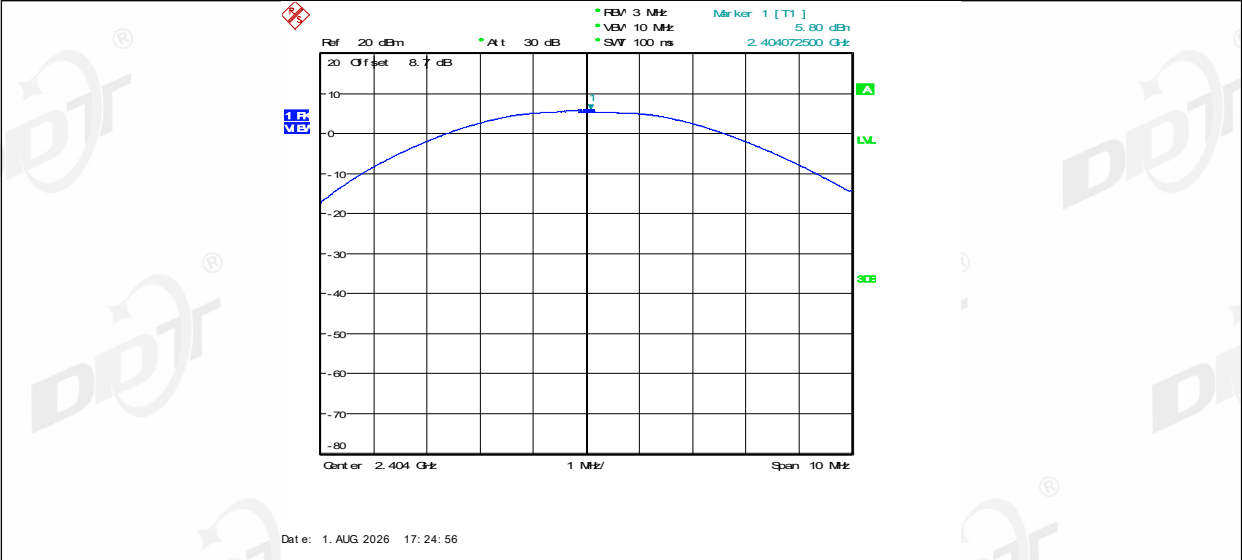

BLE_2M_Left side_2440

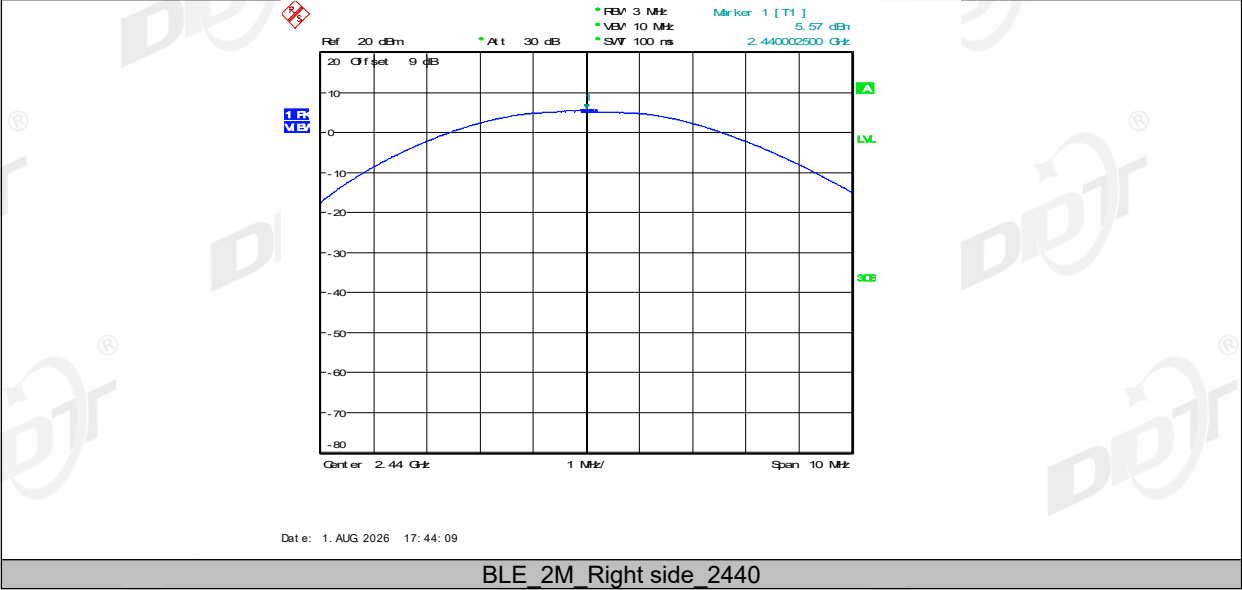


BLE_2M_Right side_2440

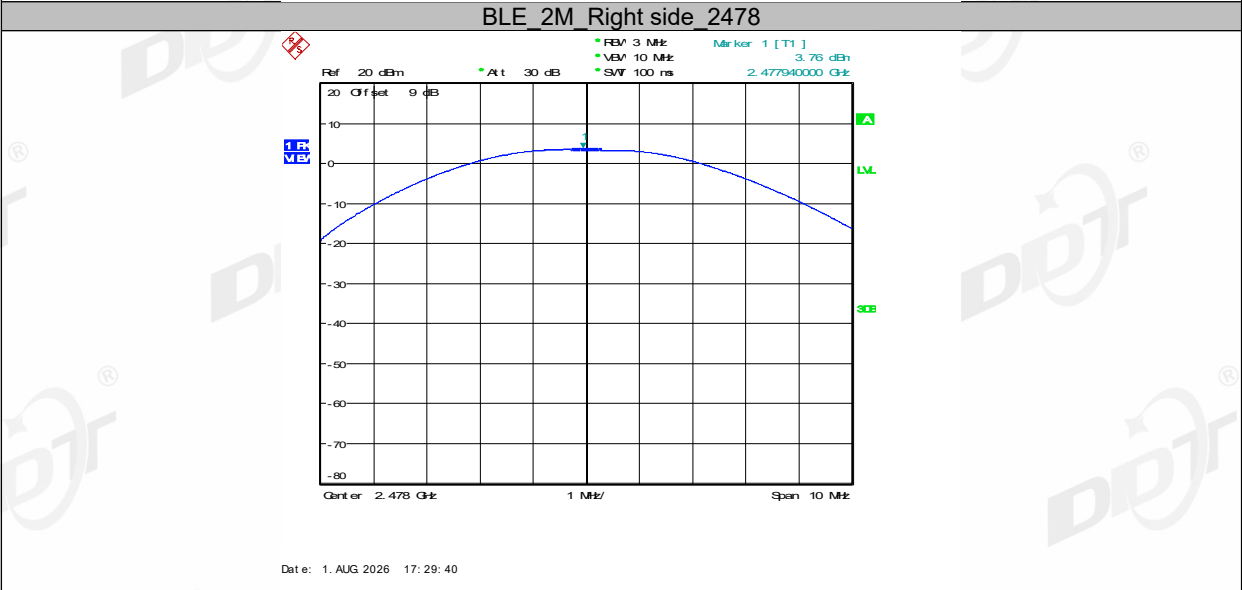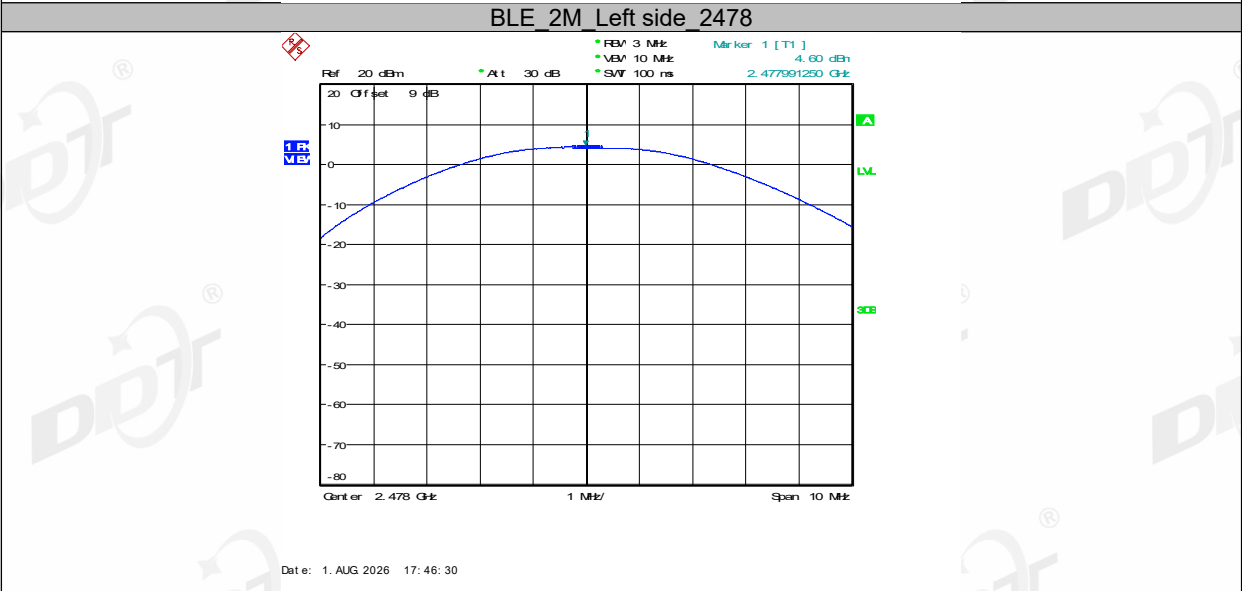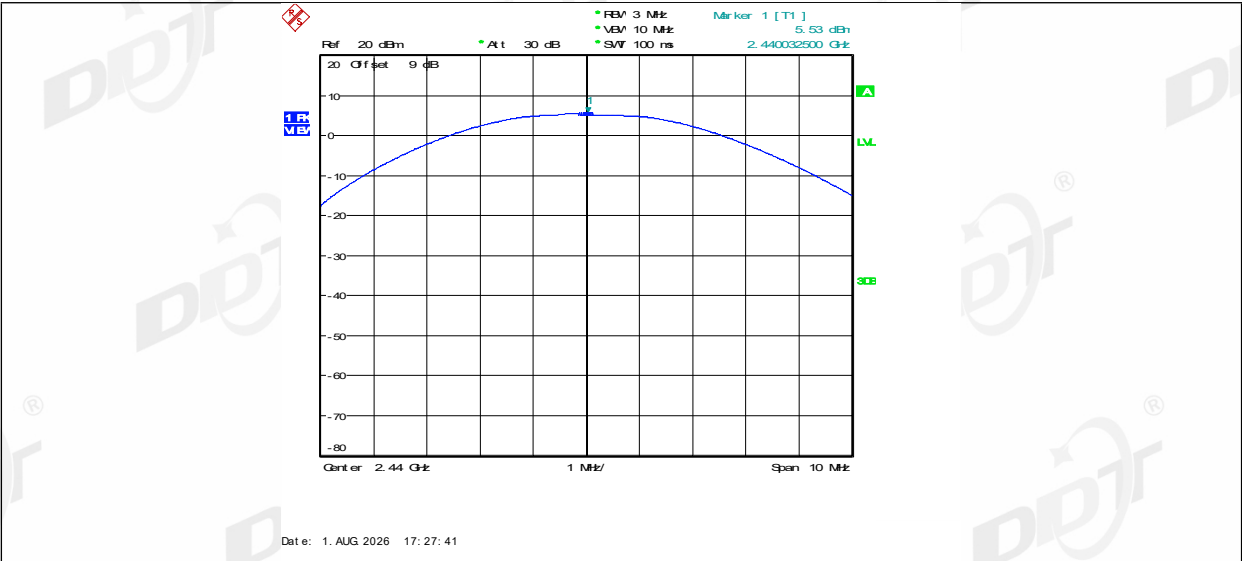

7. Power Spectral Density

7.1. Block diagram of test setup

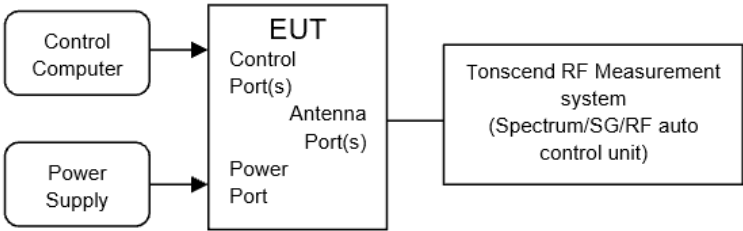

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10 clause 11.10.2.
 - (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
 - (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
 - (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:


Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
 - (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


7.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.3-28.2℃,35-53.6%RH	Test Date:	2026.8.1
Test Power Supply:	Battery	Sample Number:	S26070622-009


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Left side	2402	-11.45	≤8.00	PASS
	Right side	2402	-11.40	≤8.00	PASS
	Left side	2440	-11.94	≤8.00	PASS
	Right side	2440	-11.84	≤8.00	PASS
	Left side	2480	-12.82	≤8.00	PASS
	Right side	2480	-13.63	≤8.00	PASS
BLE_2M	Left side	2404	-12.32	≤8.00	PASS
	Right side	2404	-12.25	≤8.00	PASS
	Left side	2440	-12.39	≤8.00	PASS
	Right side	2440	-12.55	≤8.00	PASS
	Left side	2478	-13.40	≤8.00	PASS
	Right side	2478	-14.19	≤8.00	PASS

7.5. Test graphs

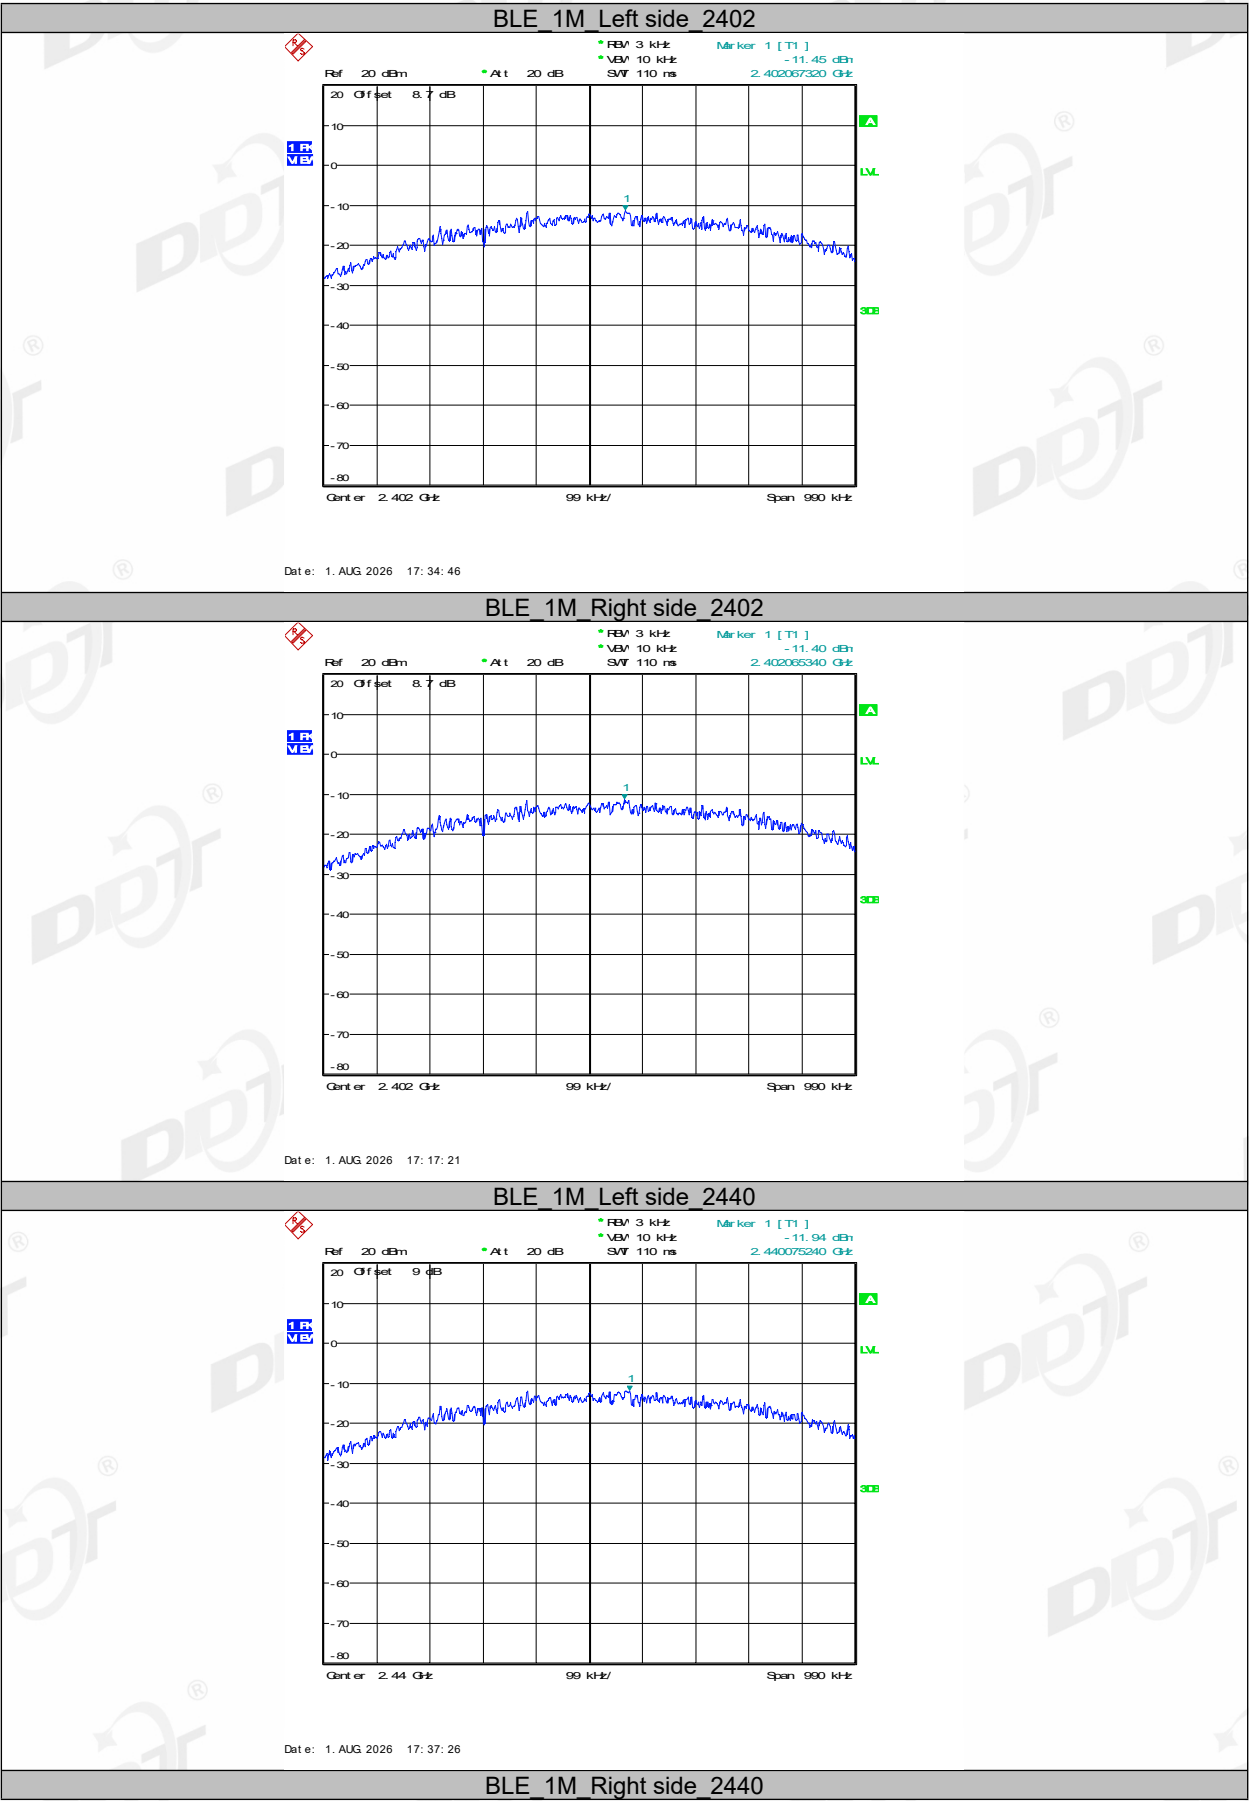


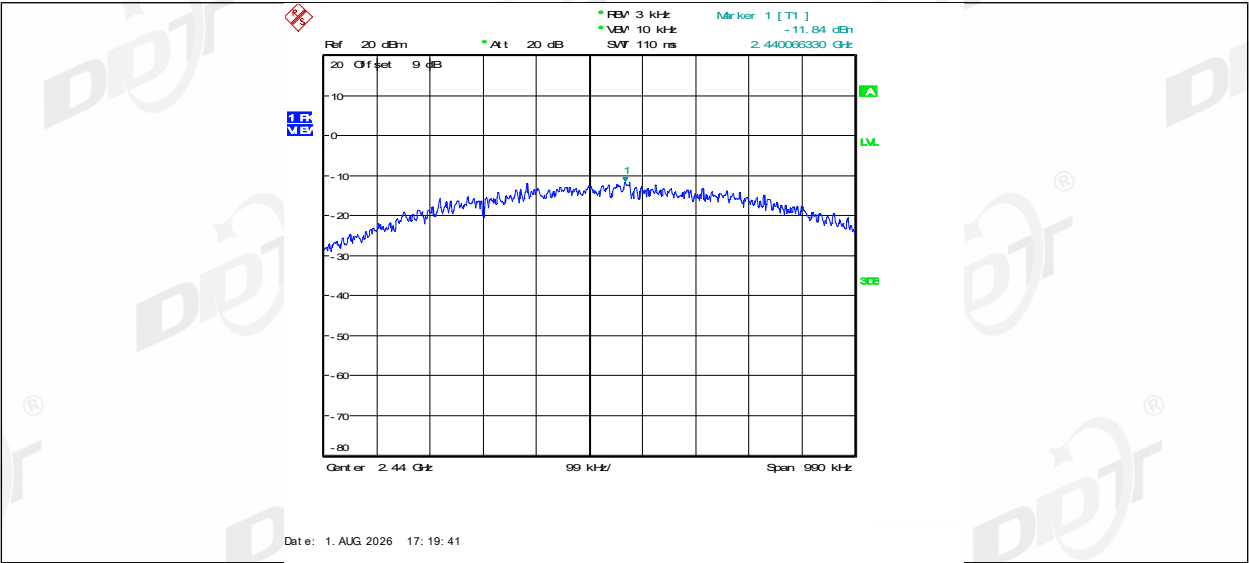

BLE_1M Left side 2480

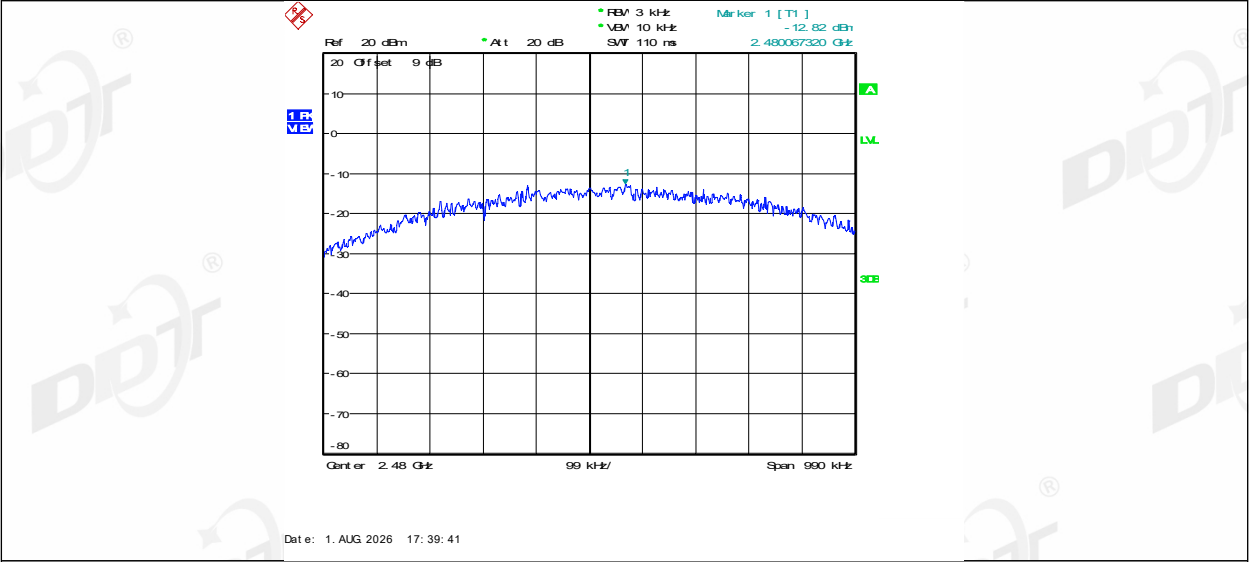


BLE_1M Right side 2480

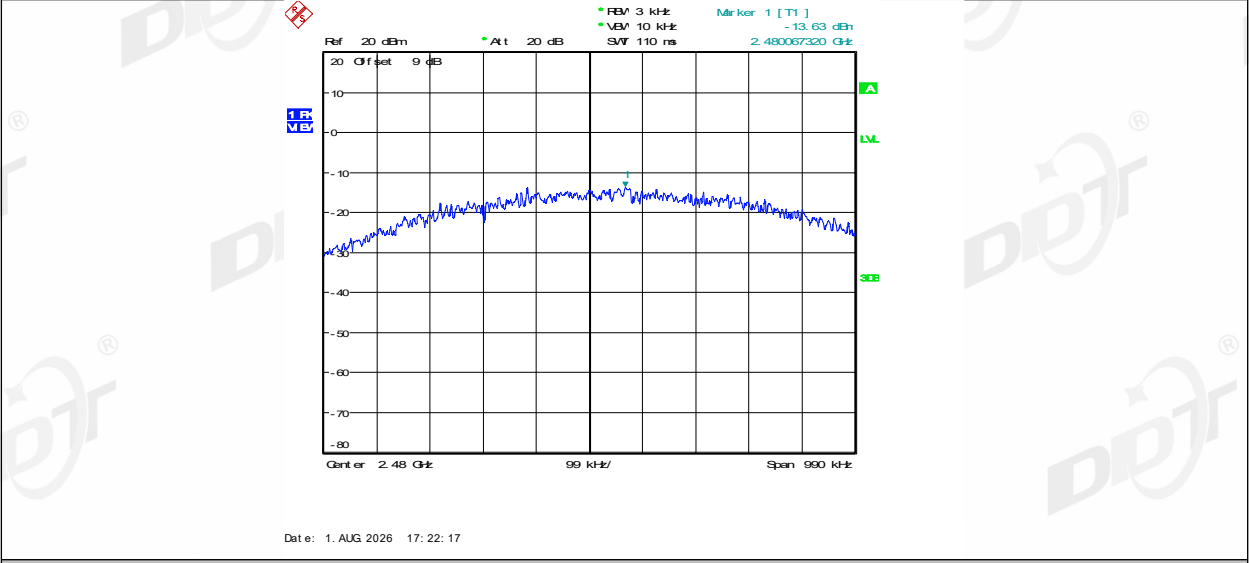


BLE_2M Left side 2404



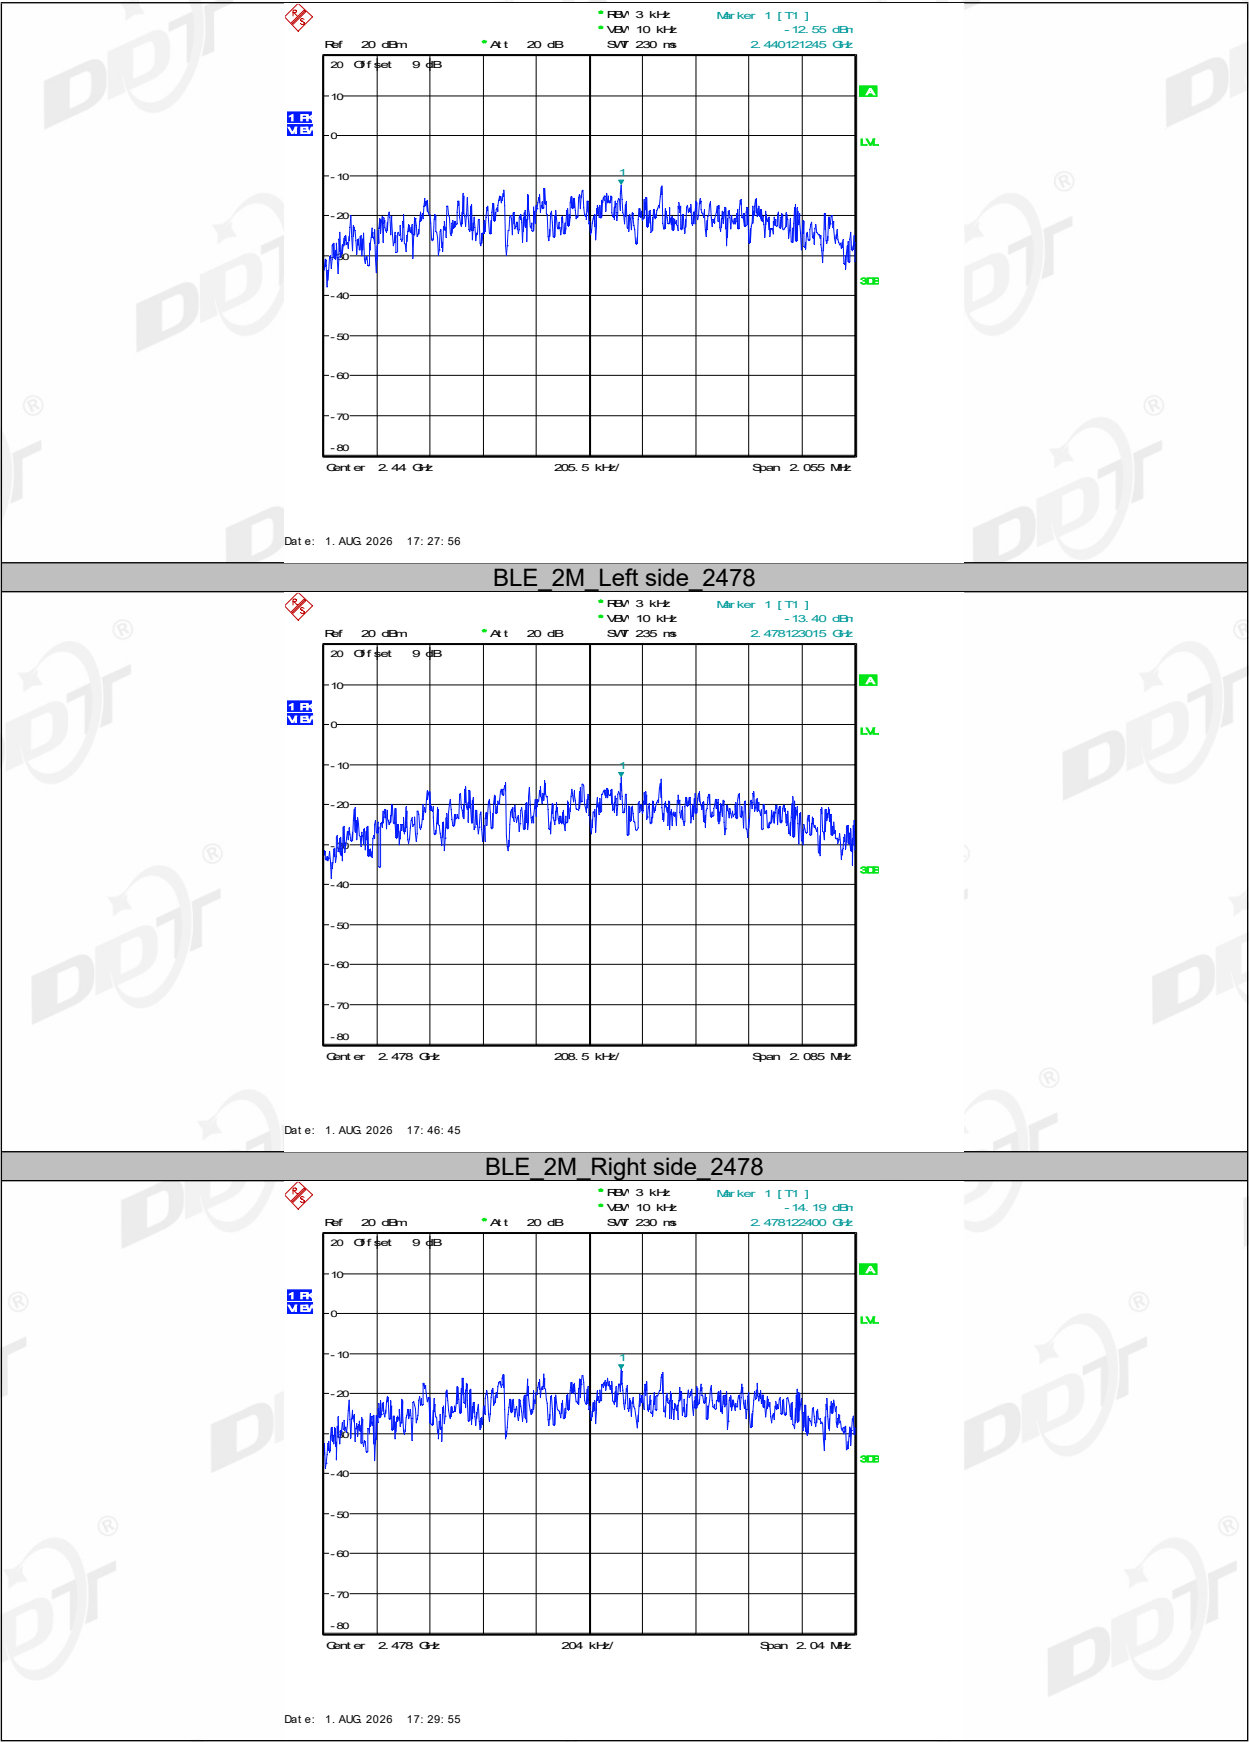

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

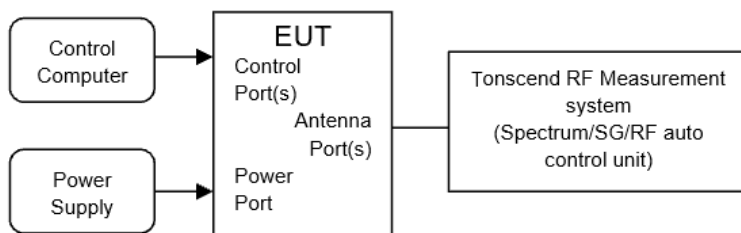

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


8.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.3-28.2℃,35-53.6%RH	Test Date:	2026.8.1
Test Power Supply:	Battery	Sample Number:	S26070622-009


Mode	Frequency [MHz]	Measured Range	Verdict
GFSK 1M	2402	2.310 GHz - 2.410 GHz	Pass
	2480	2.470 GHz - 2.500 GHz	Pass
GFSK 2M	2404	2.310 GHz - 2.410 GHz	Pass
	2478	2.470 GHz - 2.500 GHz	Pass

8.5. Test graphs




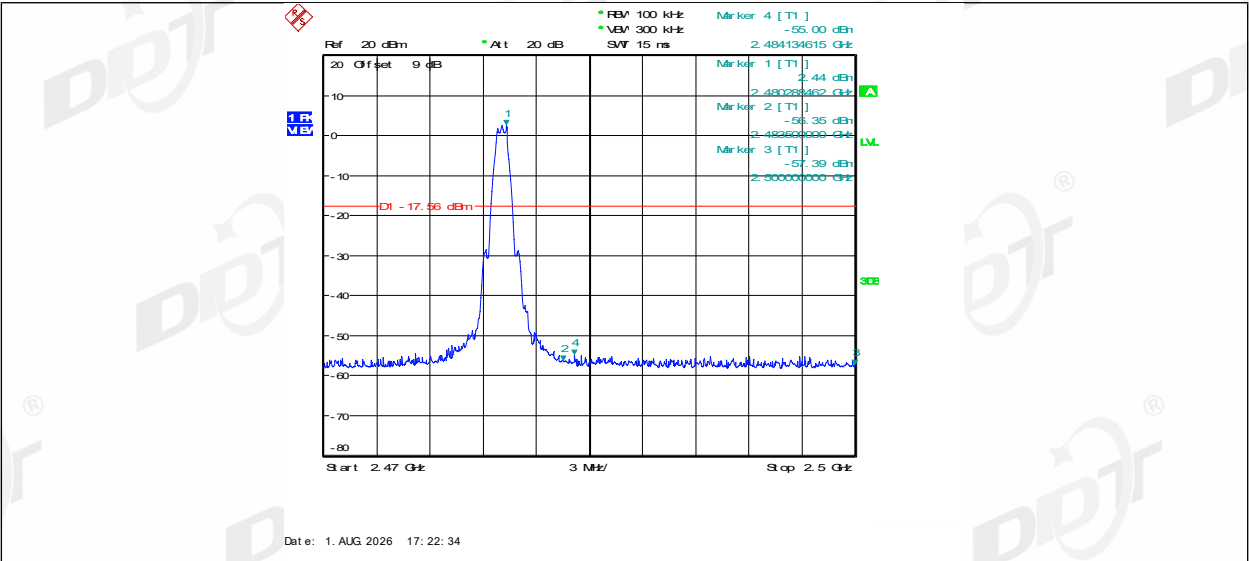



BLE_2M_Left side_Low_2404

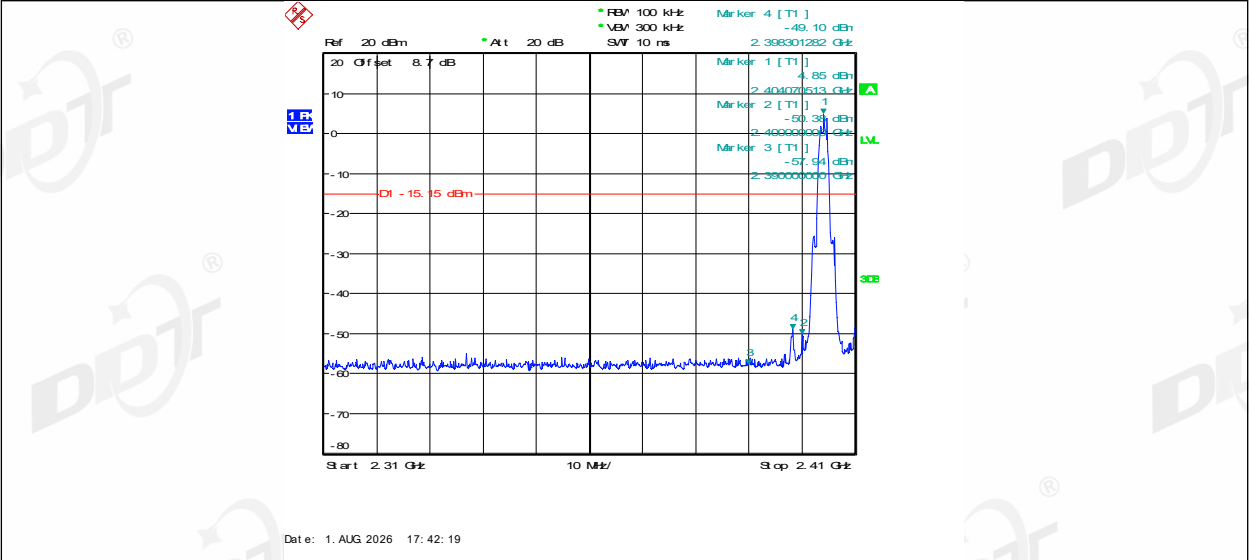

BLE_2M_Right side_Low_2404

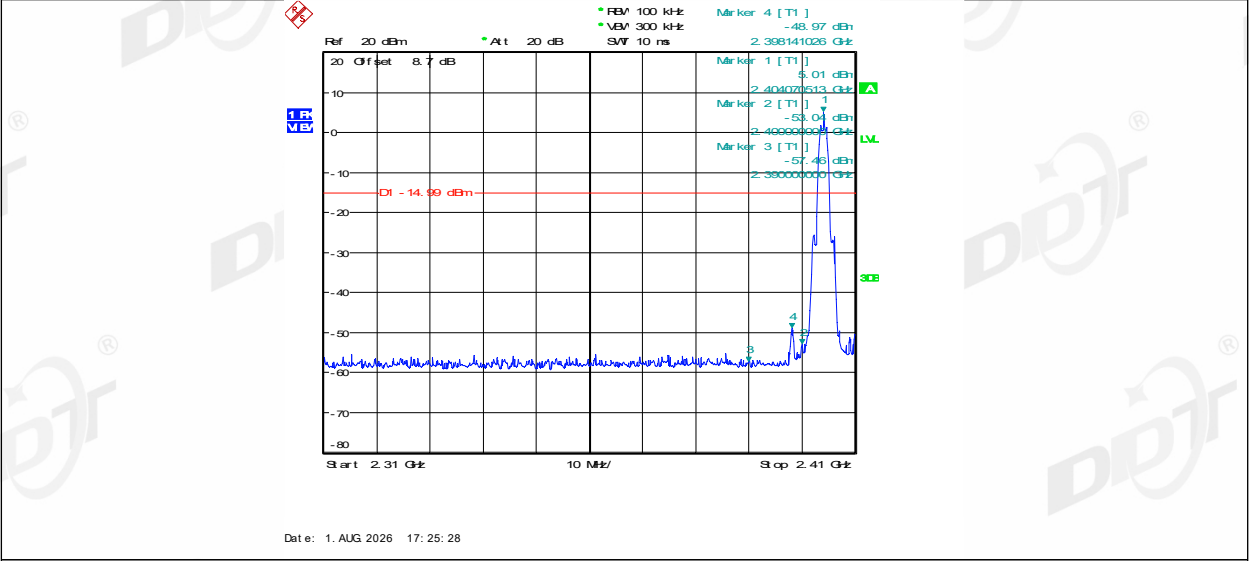


BLE_2M_Left side_High_2478

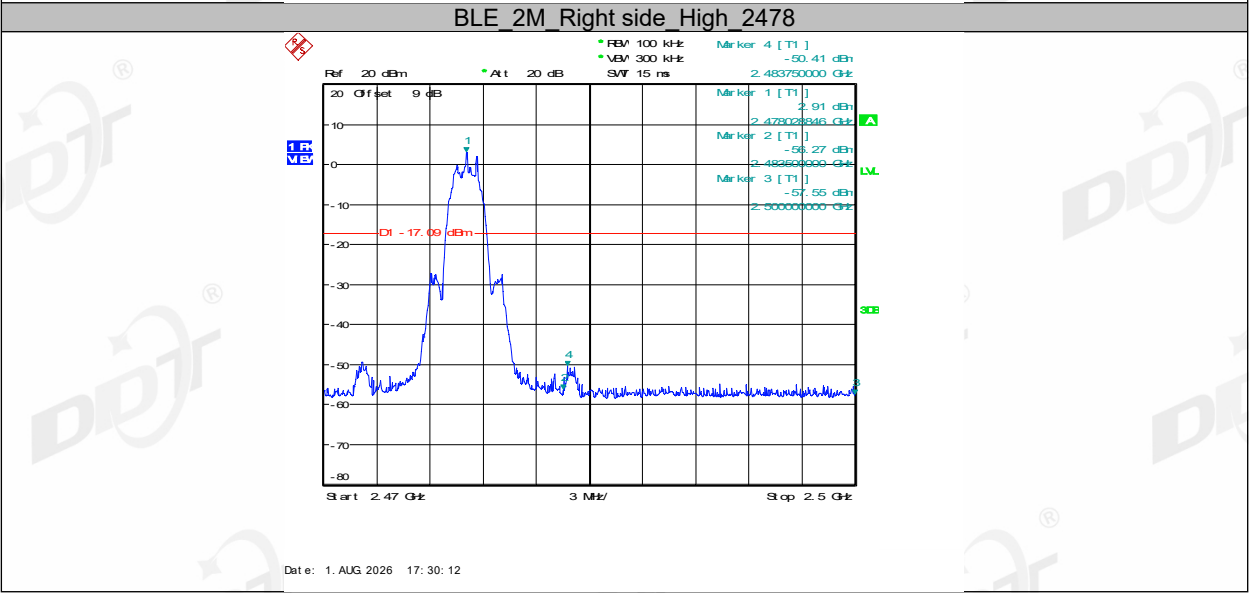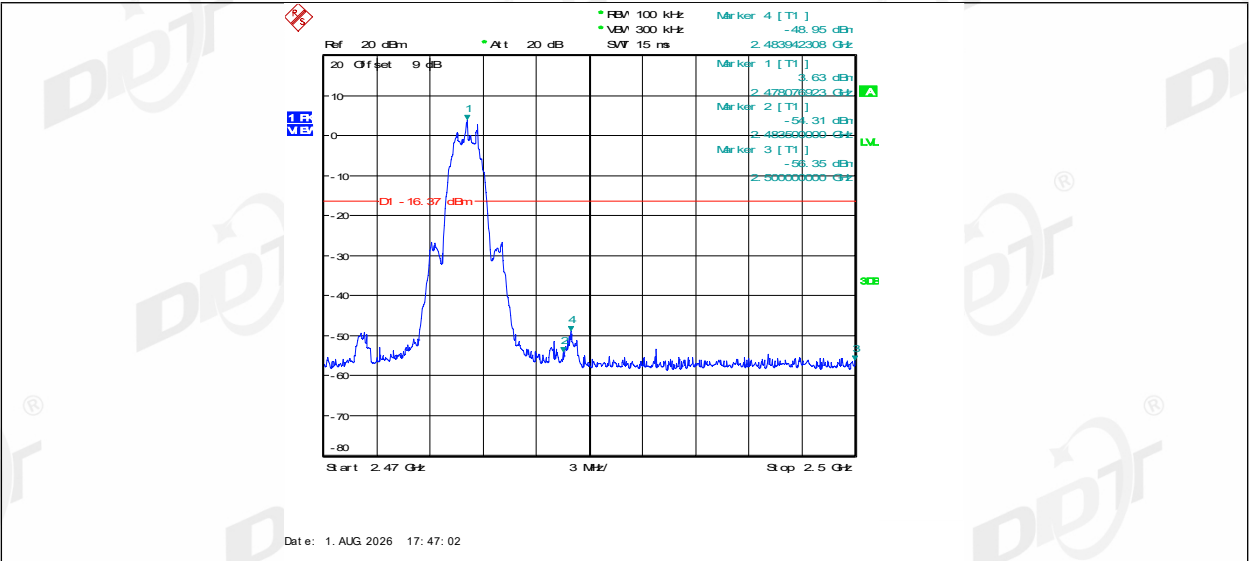

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

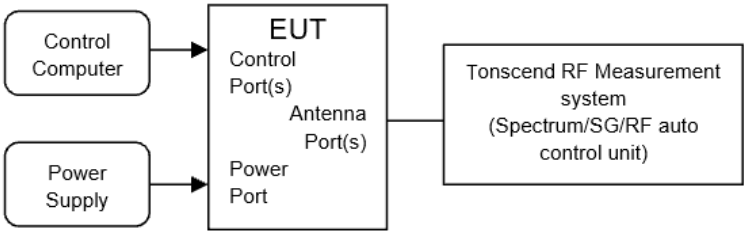

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.3.1. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.3-28.2℃,35-53.6%RH	Test Date:	2026.8.1
Test Power Supply:	Battery	Sample Number:	S26070622-009


Mode	Frequency [MHz]	Verdict
GFSK 1M	2402	Pass
	2440	Pass
	2480	Pass
GFSK 2M	2404	Pass
	2440	Pass
	2478	Pass

9.4. Test graphs

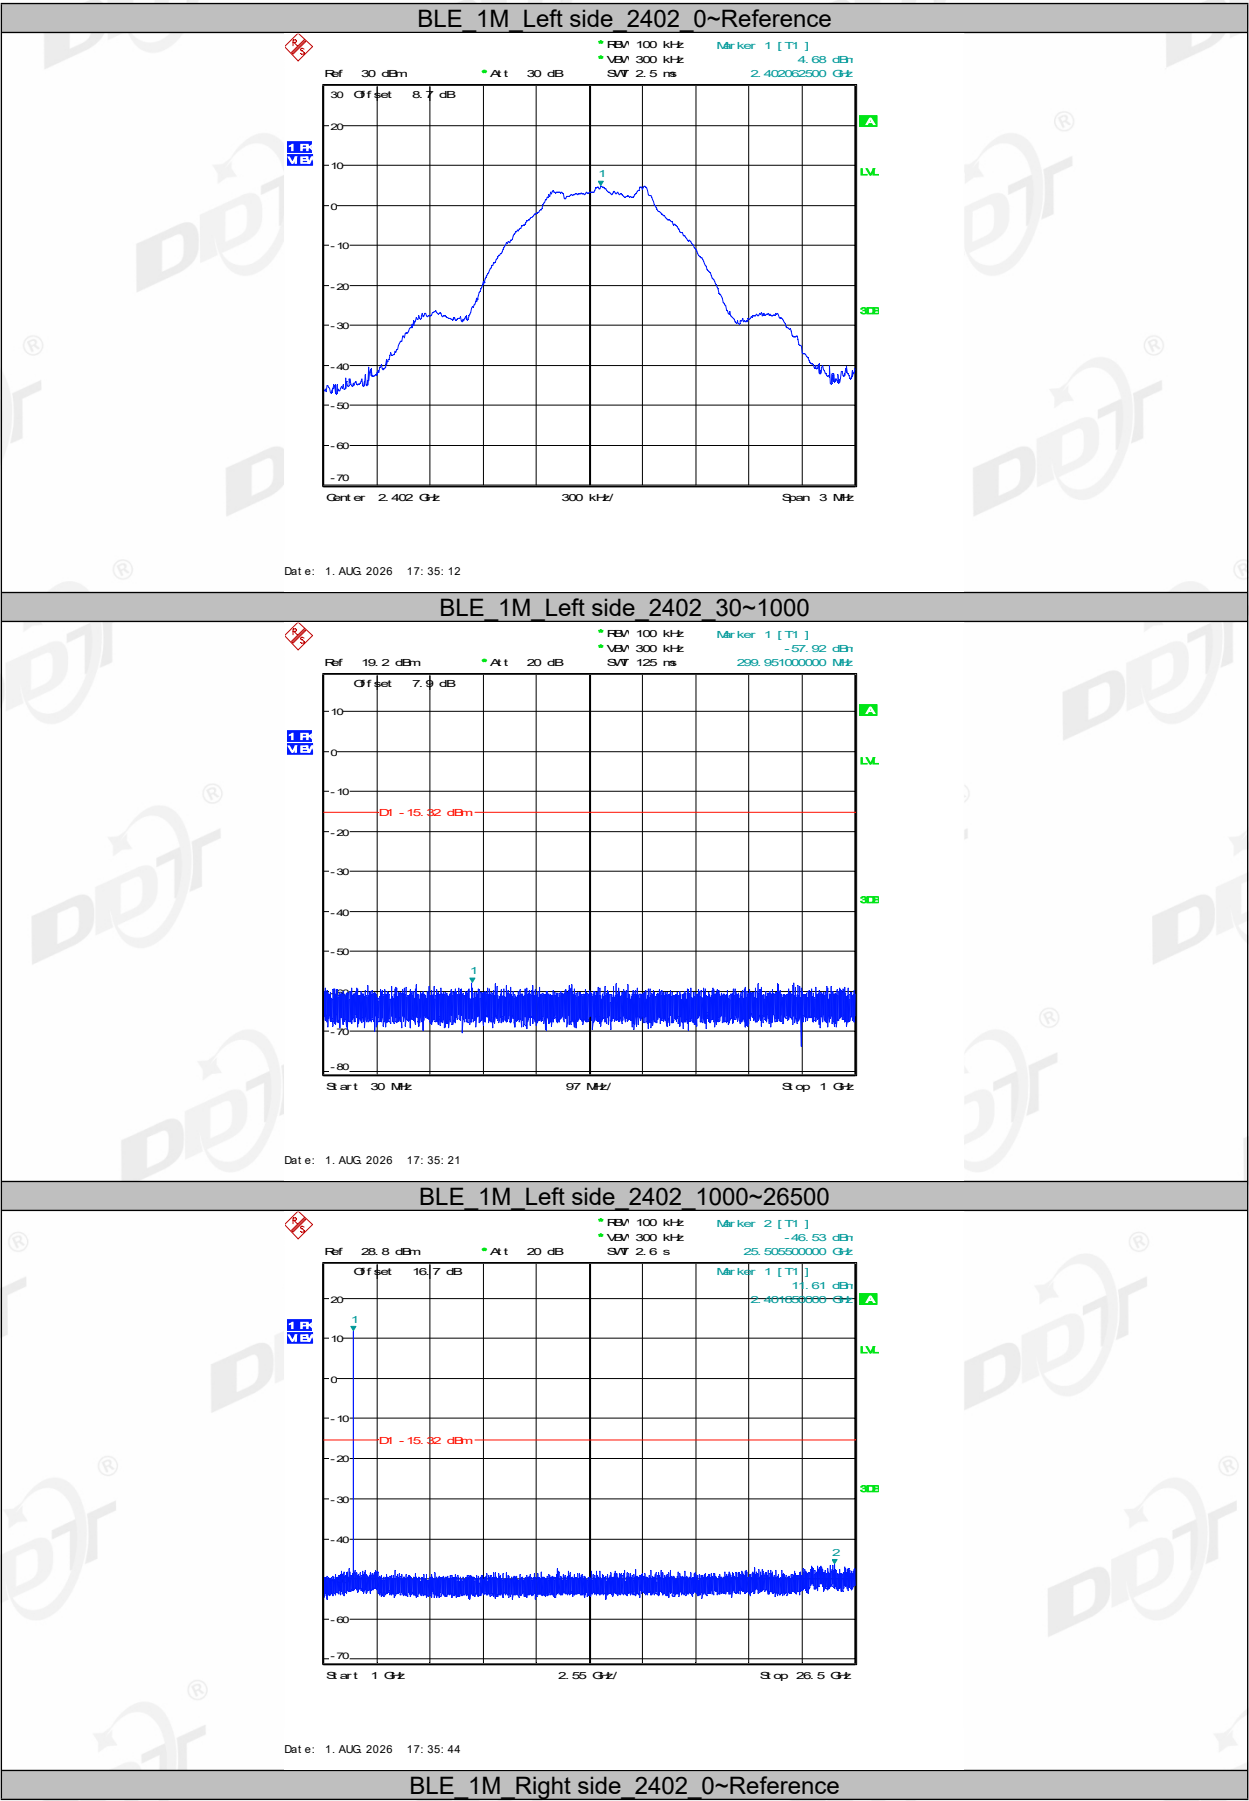


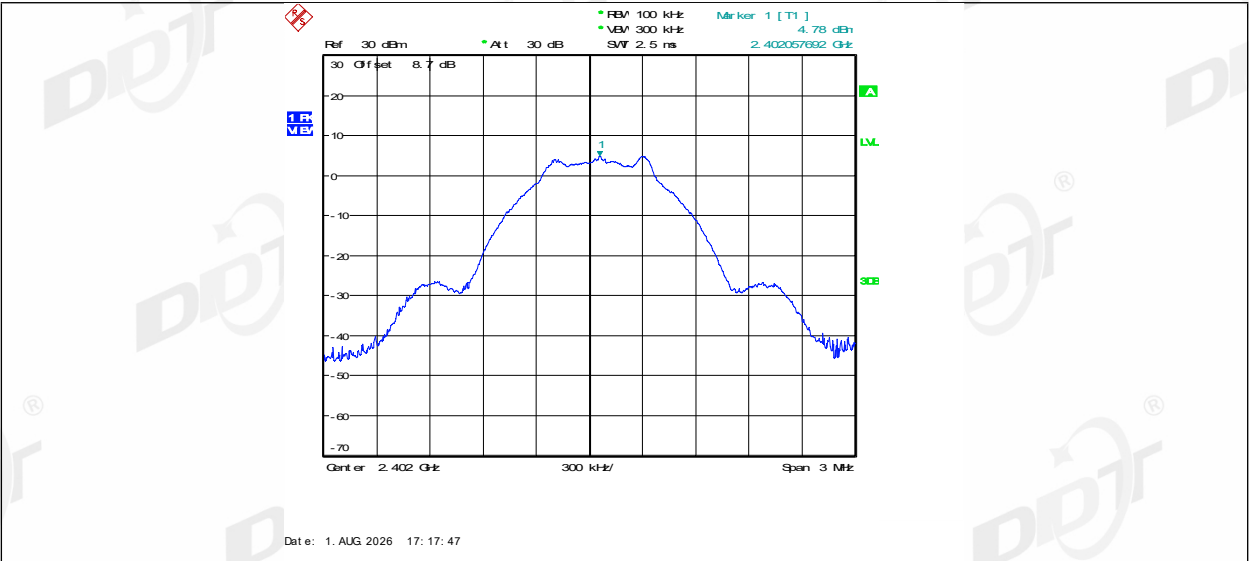




BLE_1M_Right side_2402_30~1000

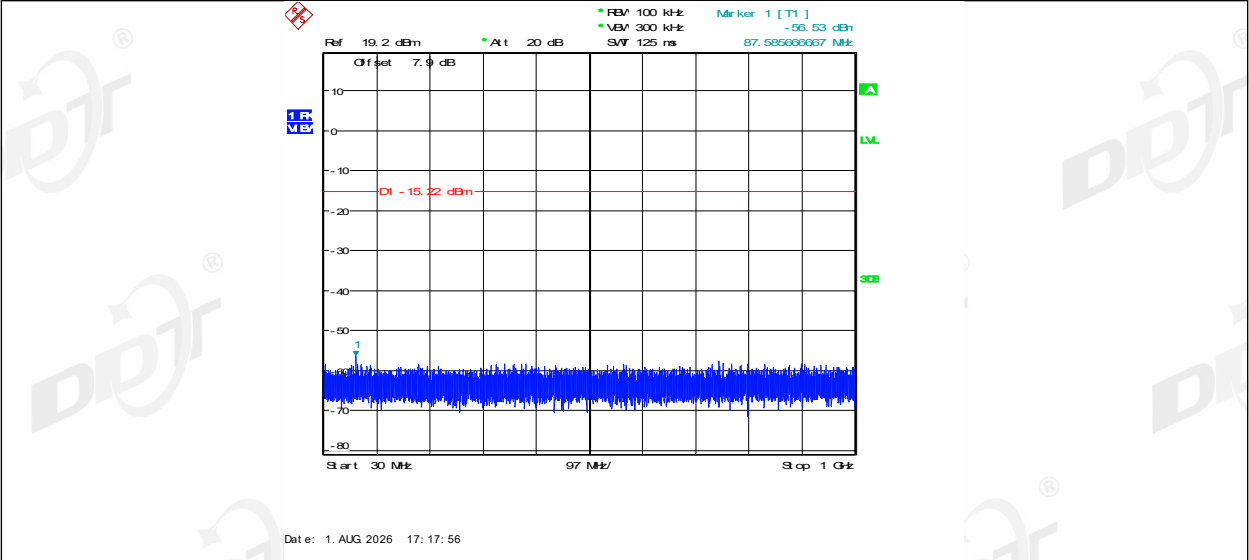


BLE_1M_Right side_2402_1000~26500

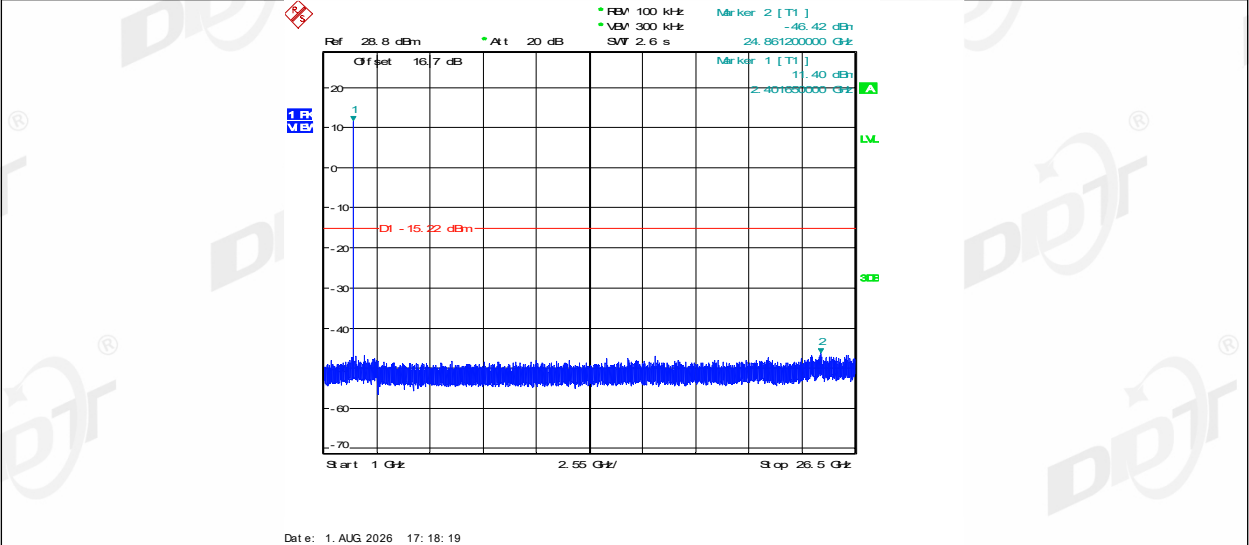


BLE_1M_Left side_2440_0~Reference

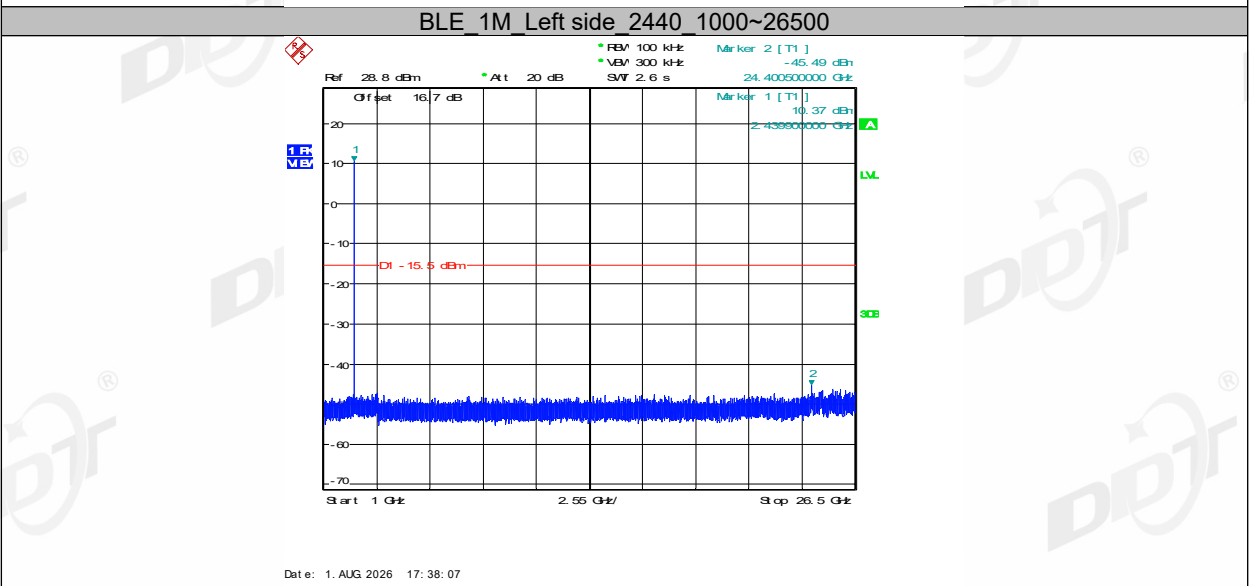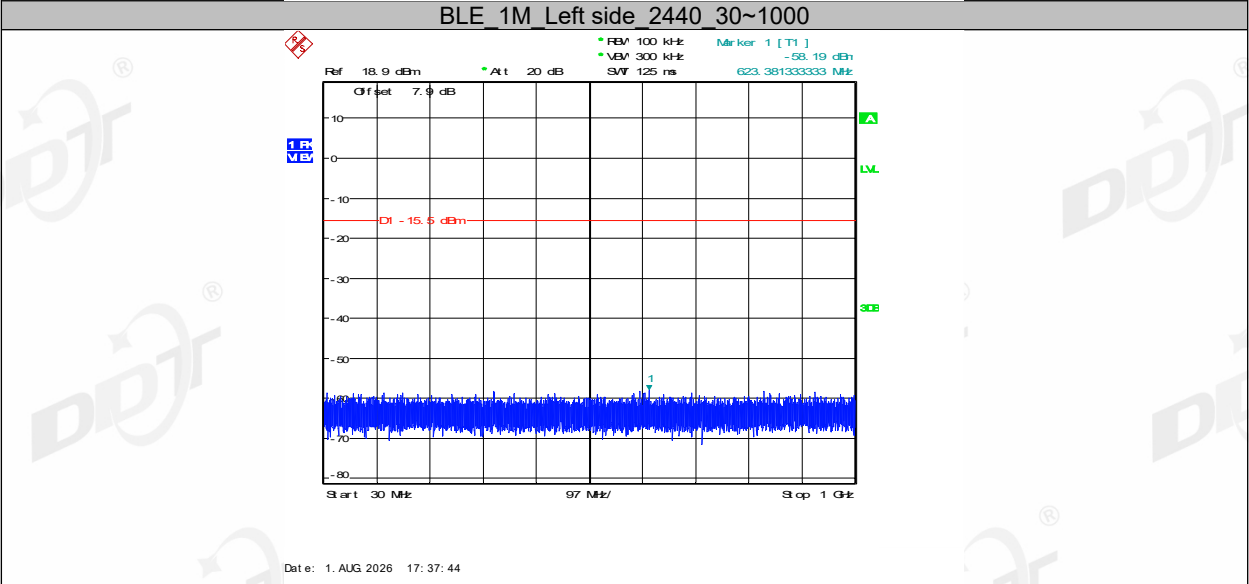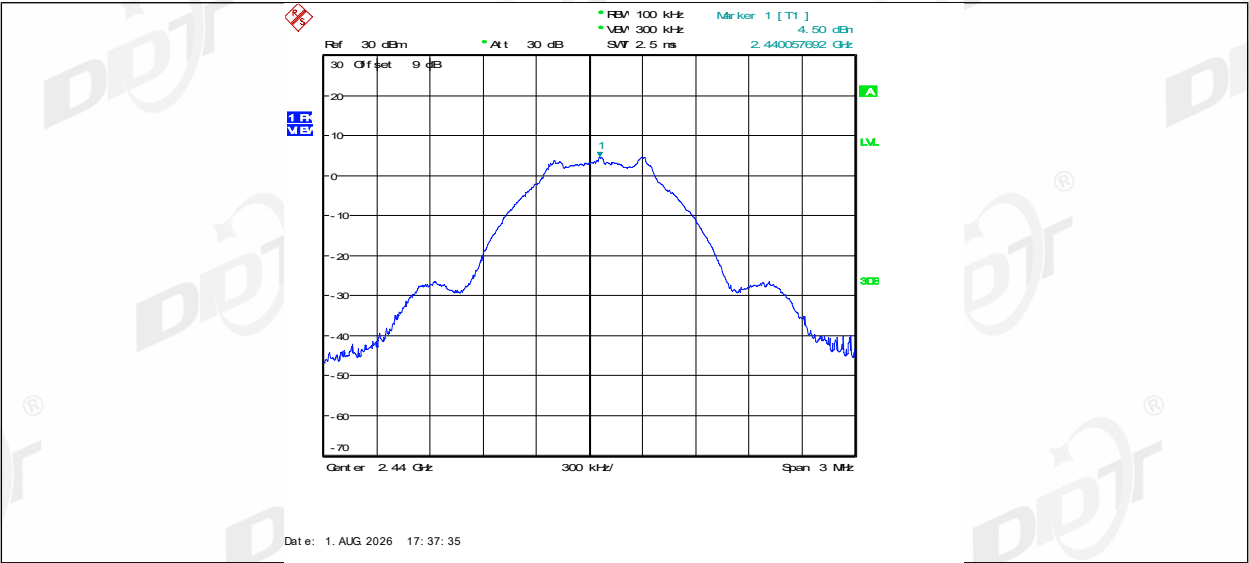


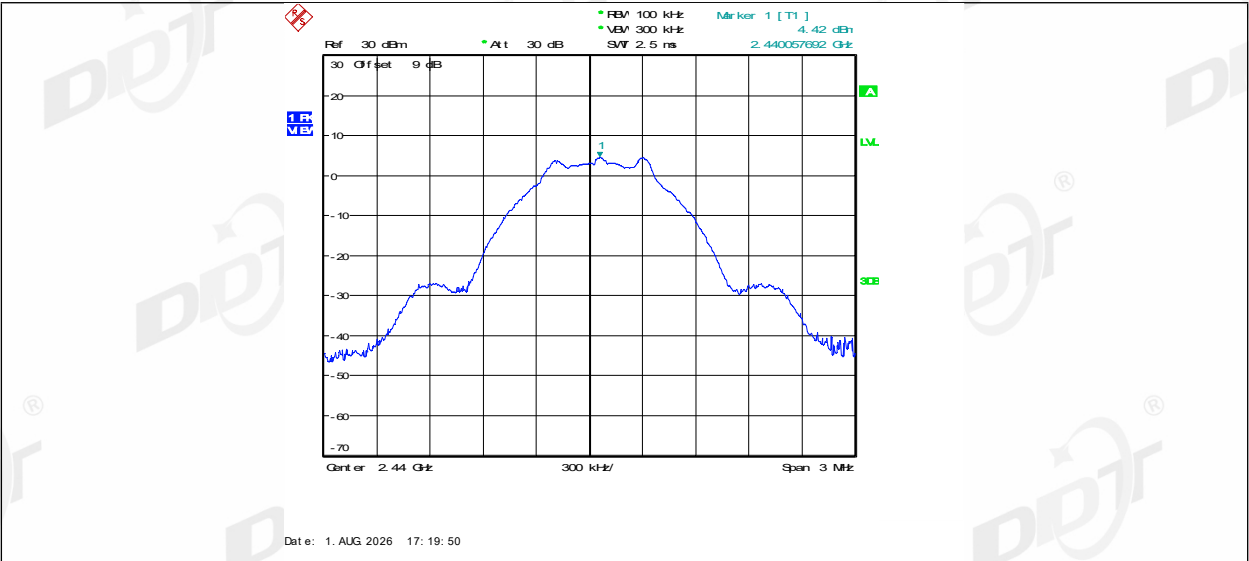


BLE_1M_Right side_2440_30~1000

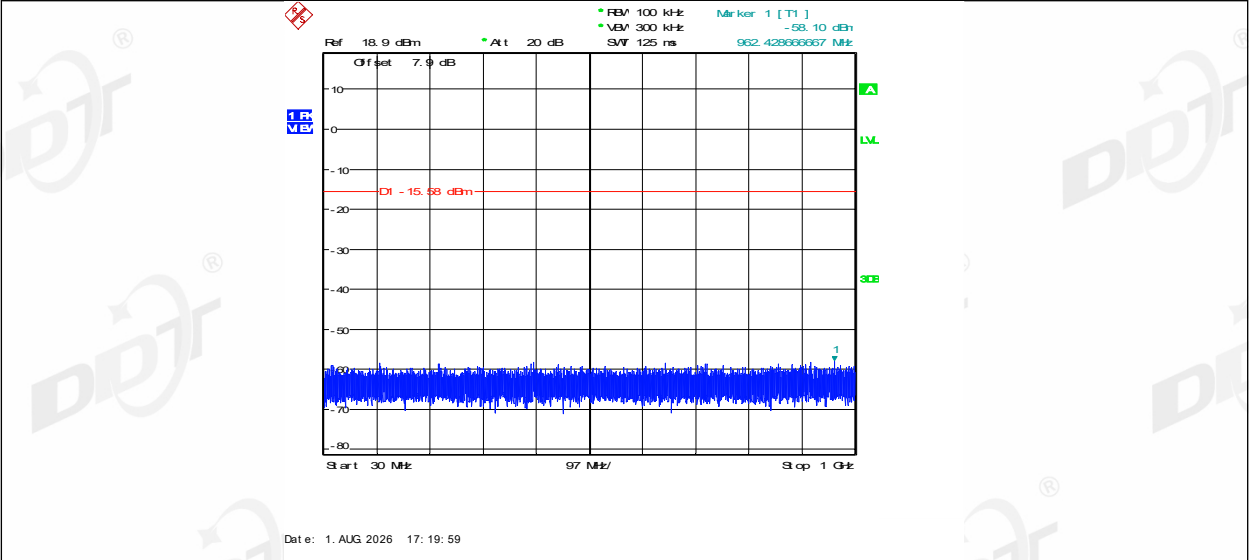


BLE_1M_Right side_2440_1000~26500

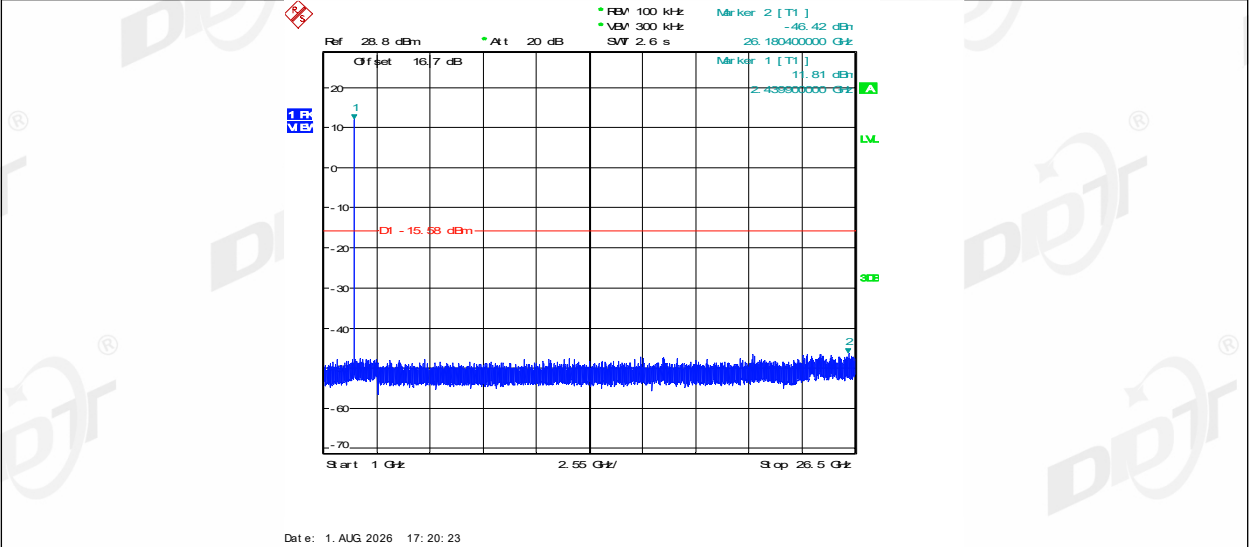


BLE_1M_Left side_2480_0~Reference

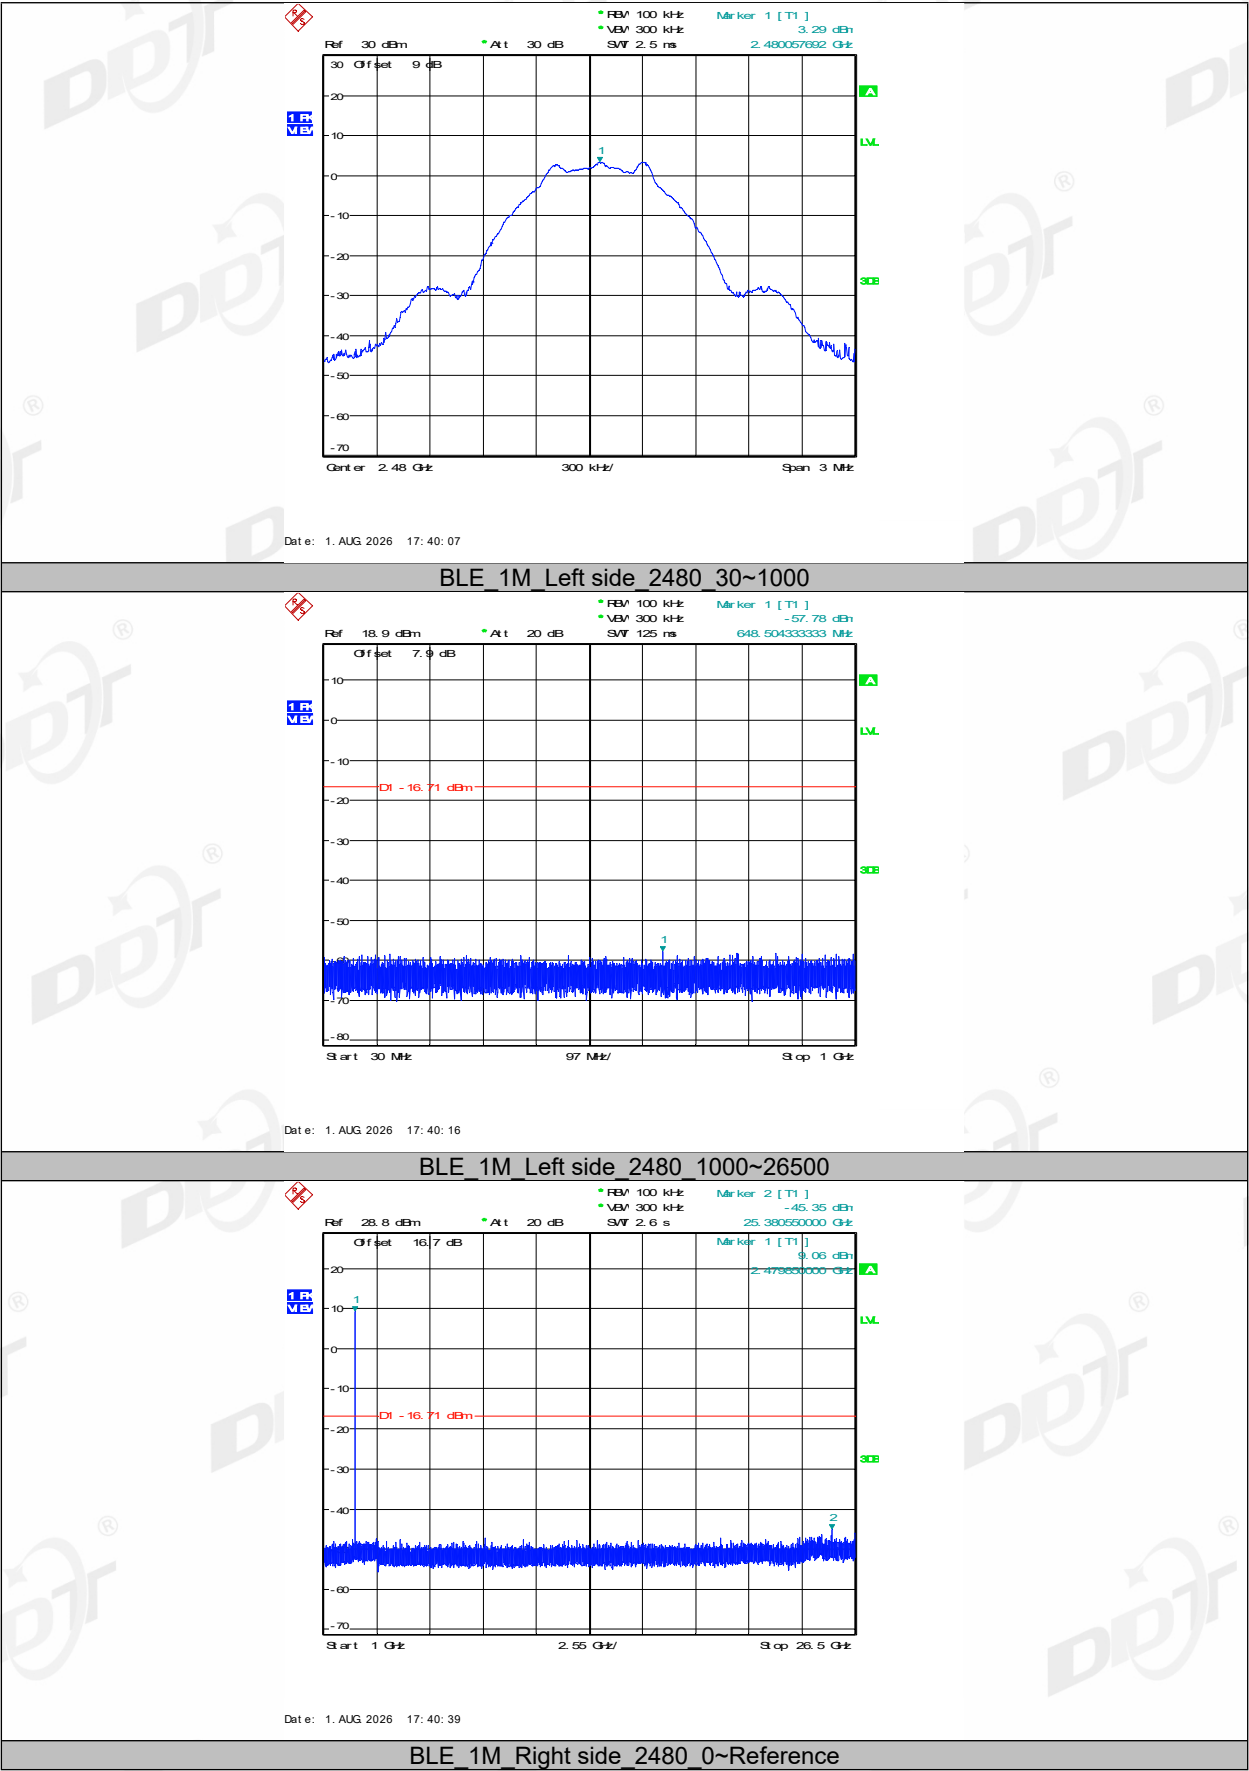


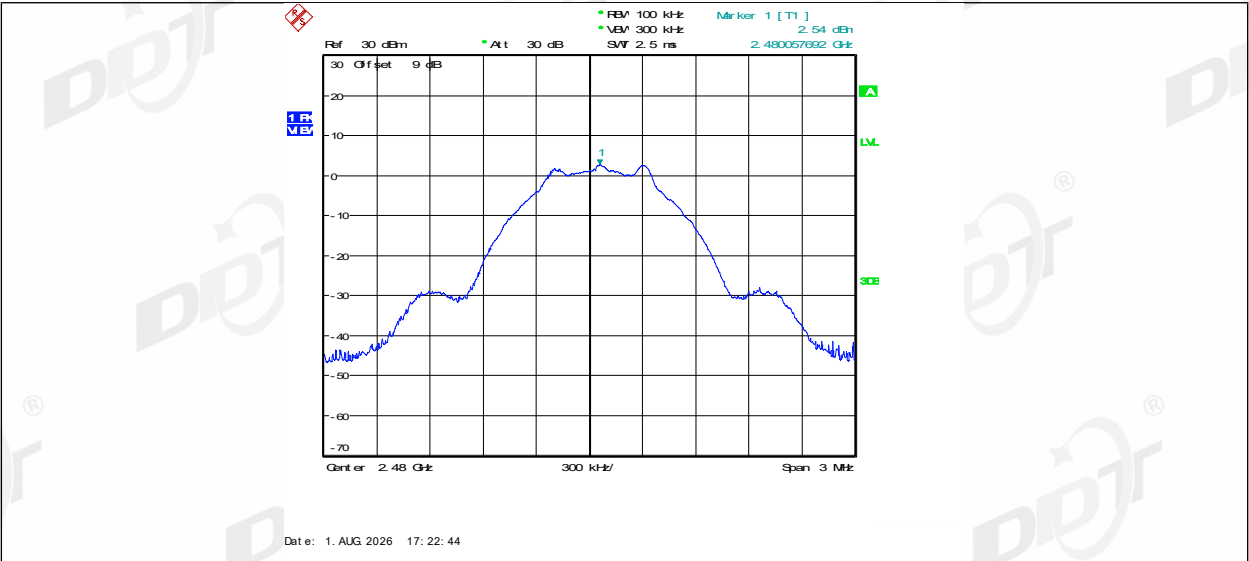




BLE_1M_Right side_2480_30~1000

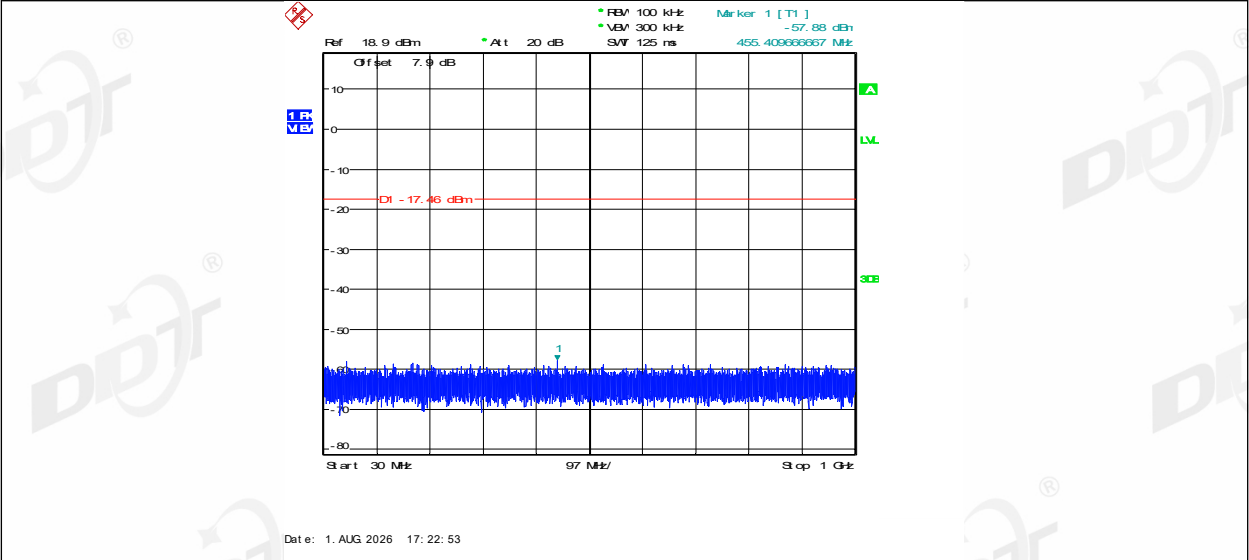


BLE_1M_Right side_2480_1000~26500

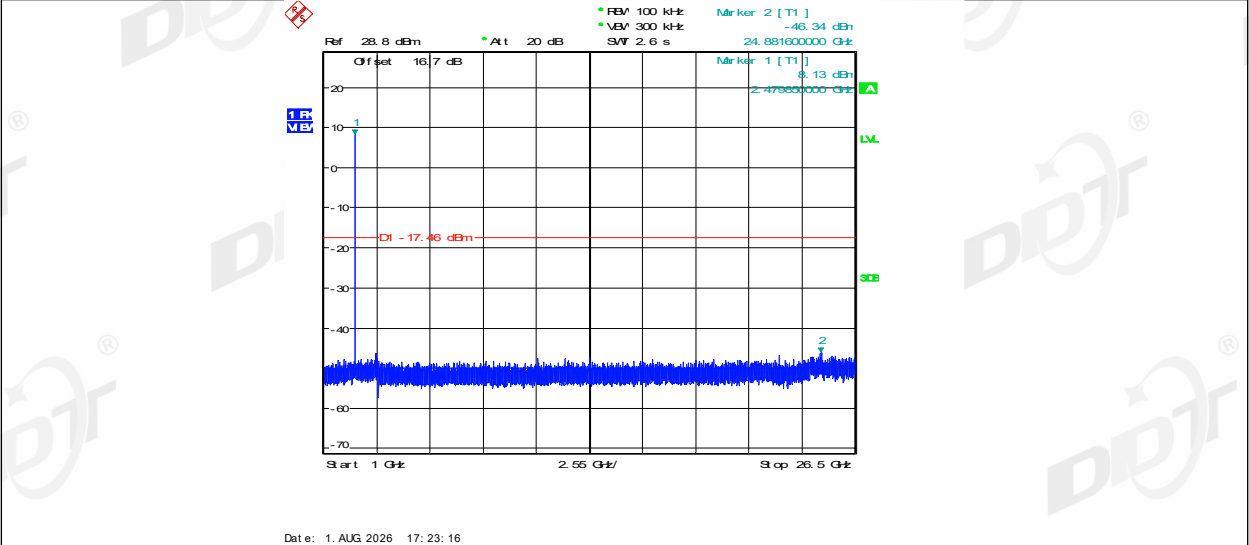

BLE_2M_Left side_2404_0~Reference

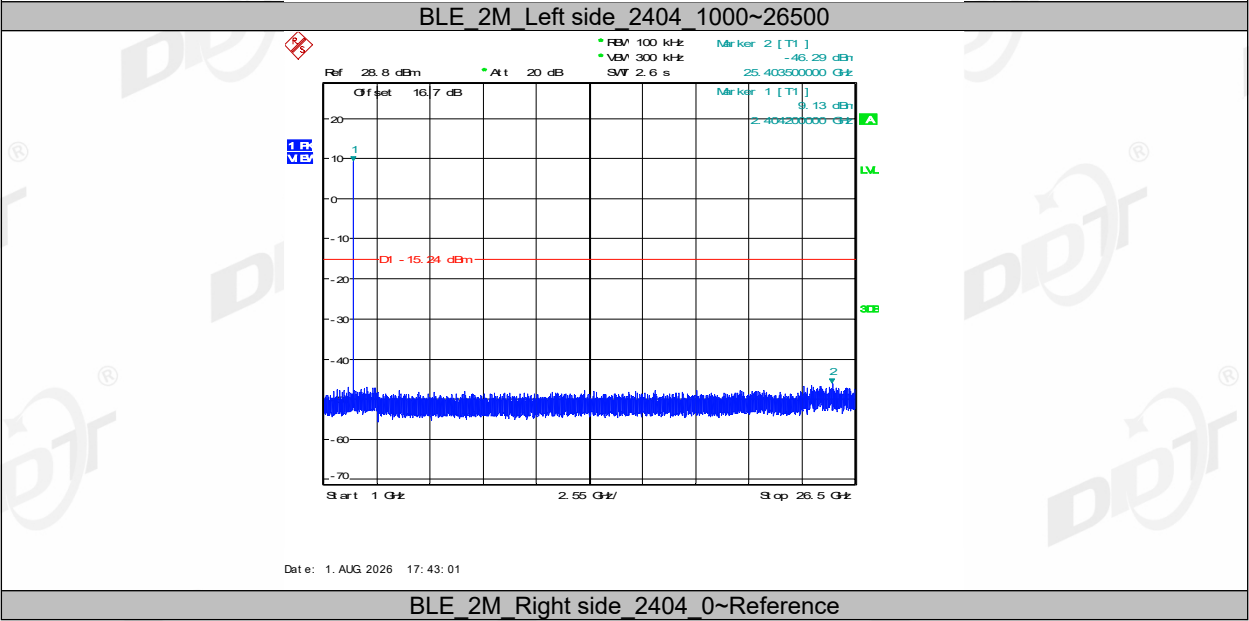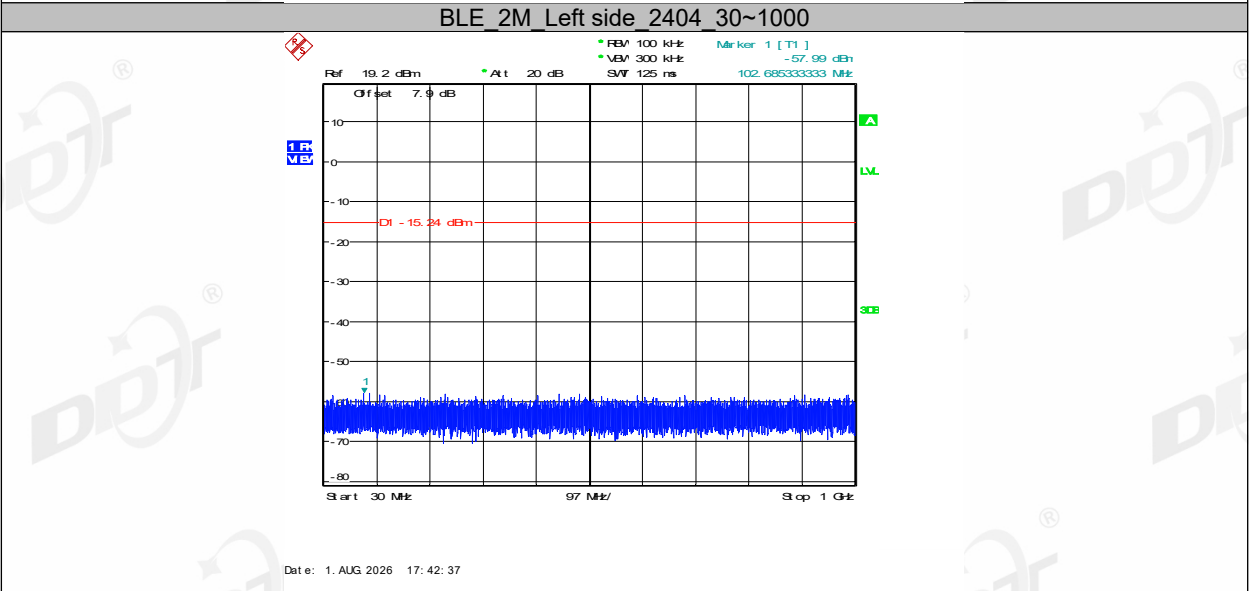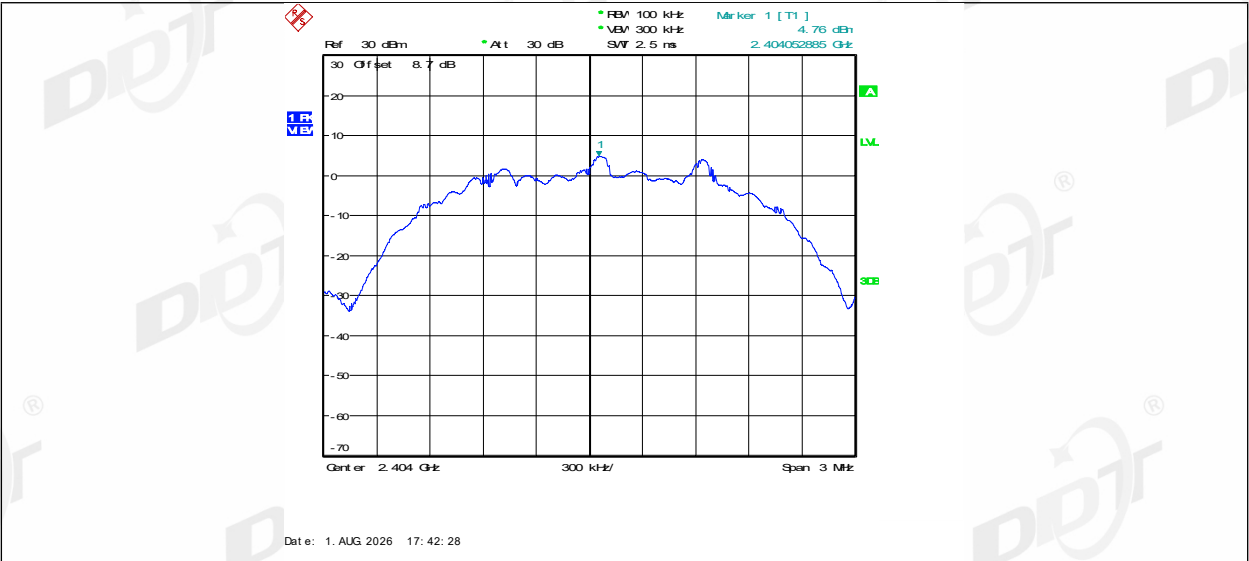






Date: 1 AUG 2026 17:44:42


Date: 1 AUG 2026 17:45:05

BLE_2M_Right side_2440_0~Reference




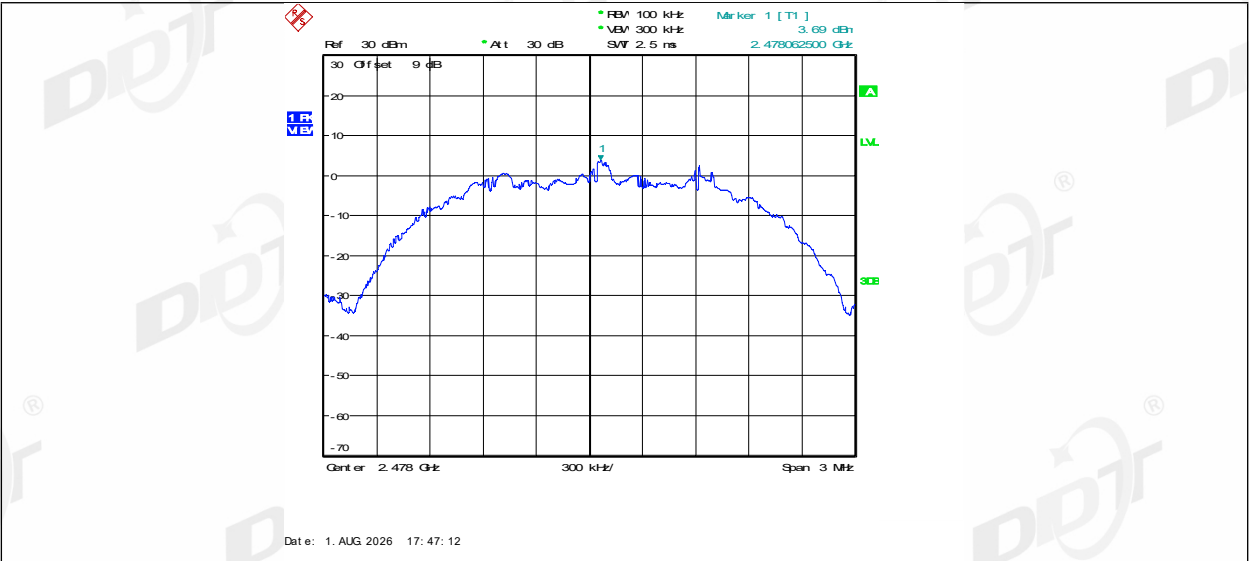


BLE_2M_Left side_2478_30~1000

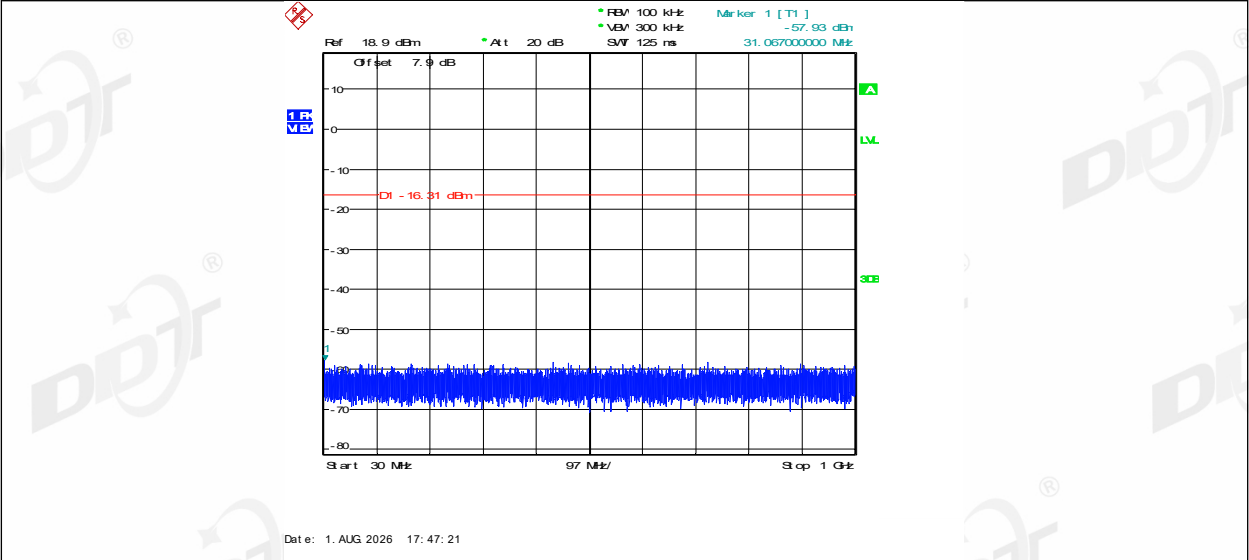

BLE_2M_Left side_2478_1000~26500

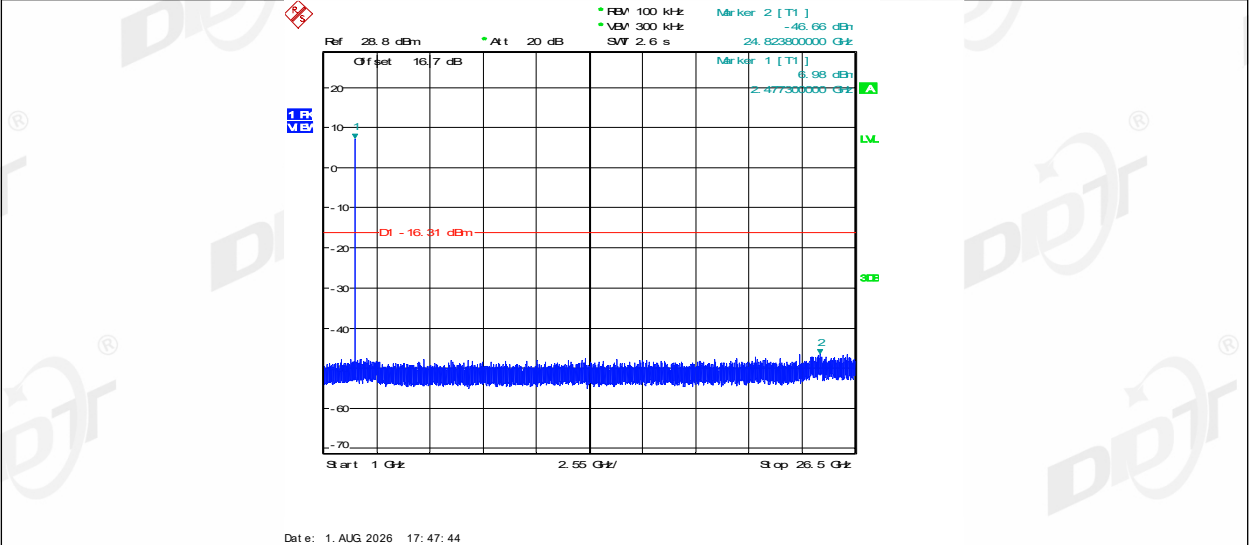


BLE_2M_Right side_2478_0~Reference

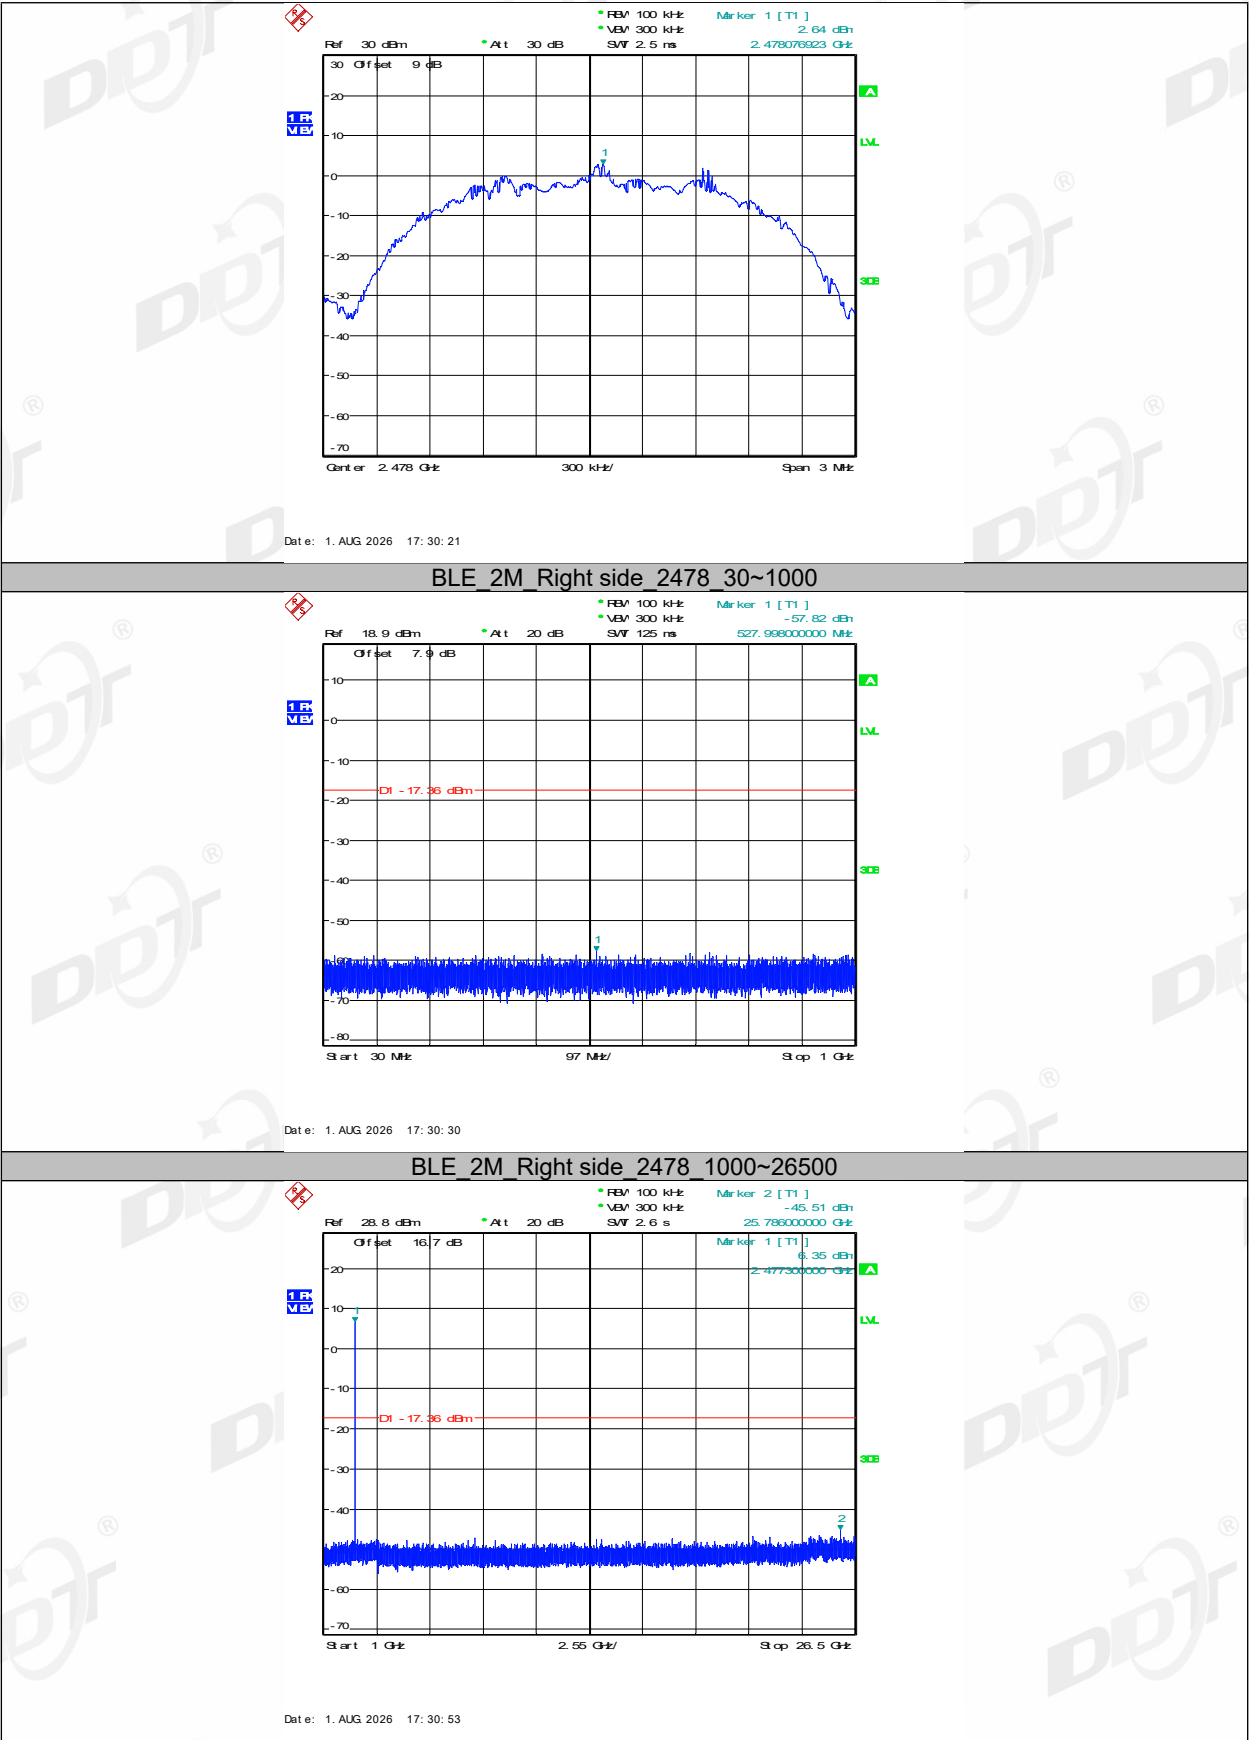

10. Duty Cycle

10.1. Block diagram of test setup

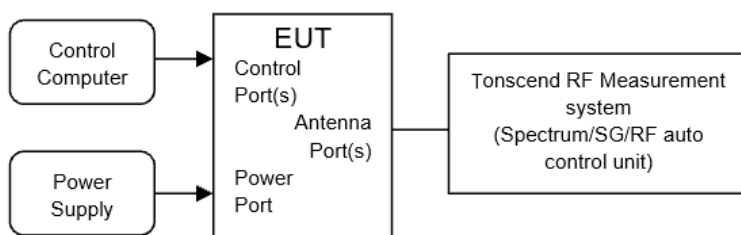

10.2. Limit

Just for Report.

10.3. Test procedure


- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the middle hopping channel.
 - Resolution BW: 10 MHz.
 - Video BW: 10 MHz.
 - Span: Zero span.
 - Detector: Peak.
 - Trace Mode: Clear Write.
 - Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


10.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	27.3-28.2℃,35-53.6%RH	Test Date:	2026.8.1
Test Power Supply:	Battery	Sample Number:	S26070622-009


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Left side	2402	2.15	2.52	85.32	0.69
	Right side	2402	2.16	2.52	85.71	0.67
	Left side	2440	2.15	2.52	85.32	0.69
	Right side	2440	2.16	2.52	85.71	0.67
	Left side	2480	2.15	2.52	85.32	0.69
	Right side	2480	2.16	2.52	85.71	0.67
BLE_2M	Left side	2404	1.09	2.52	43.25	3.64
	Right side	2404	1.09	2.52	43.25	3.64
	Left side	2440	1.09	2.52	43.25	3.64
	Right side	2440	1.09	2.52	43.25	3.64
	Left side	2478	1.09	2.52	43.25	3.64
	Right side	2478	1.09	2.52	43.25	3.64

10.5. Test graphs

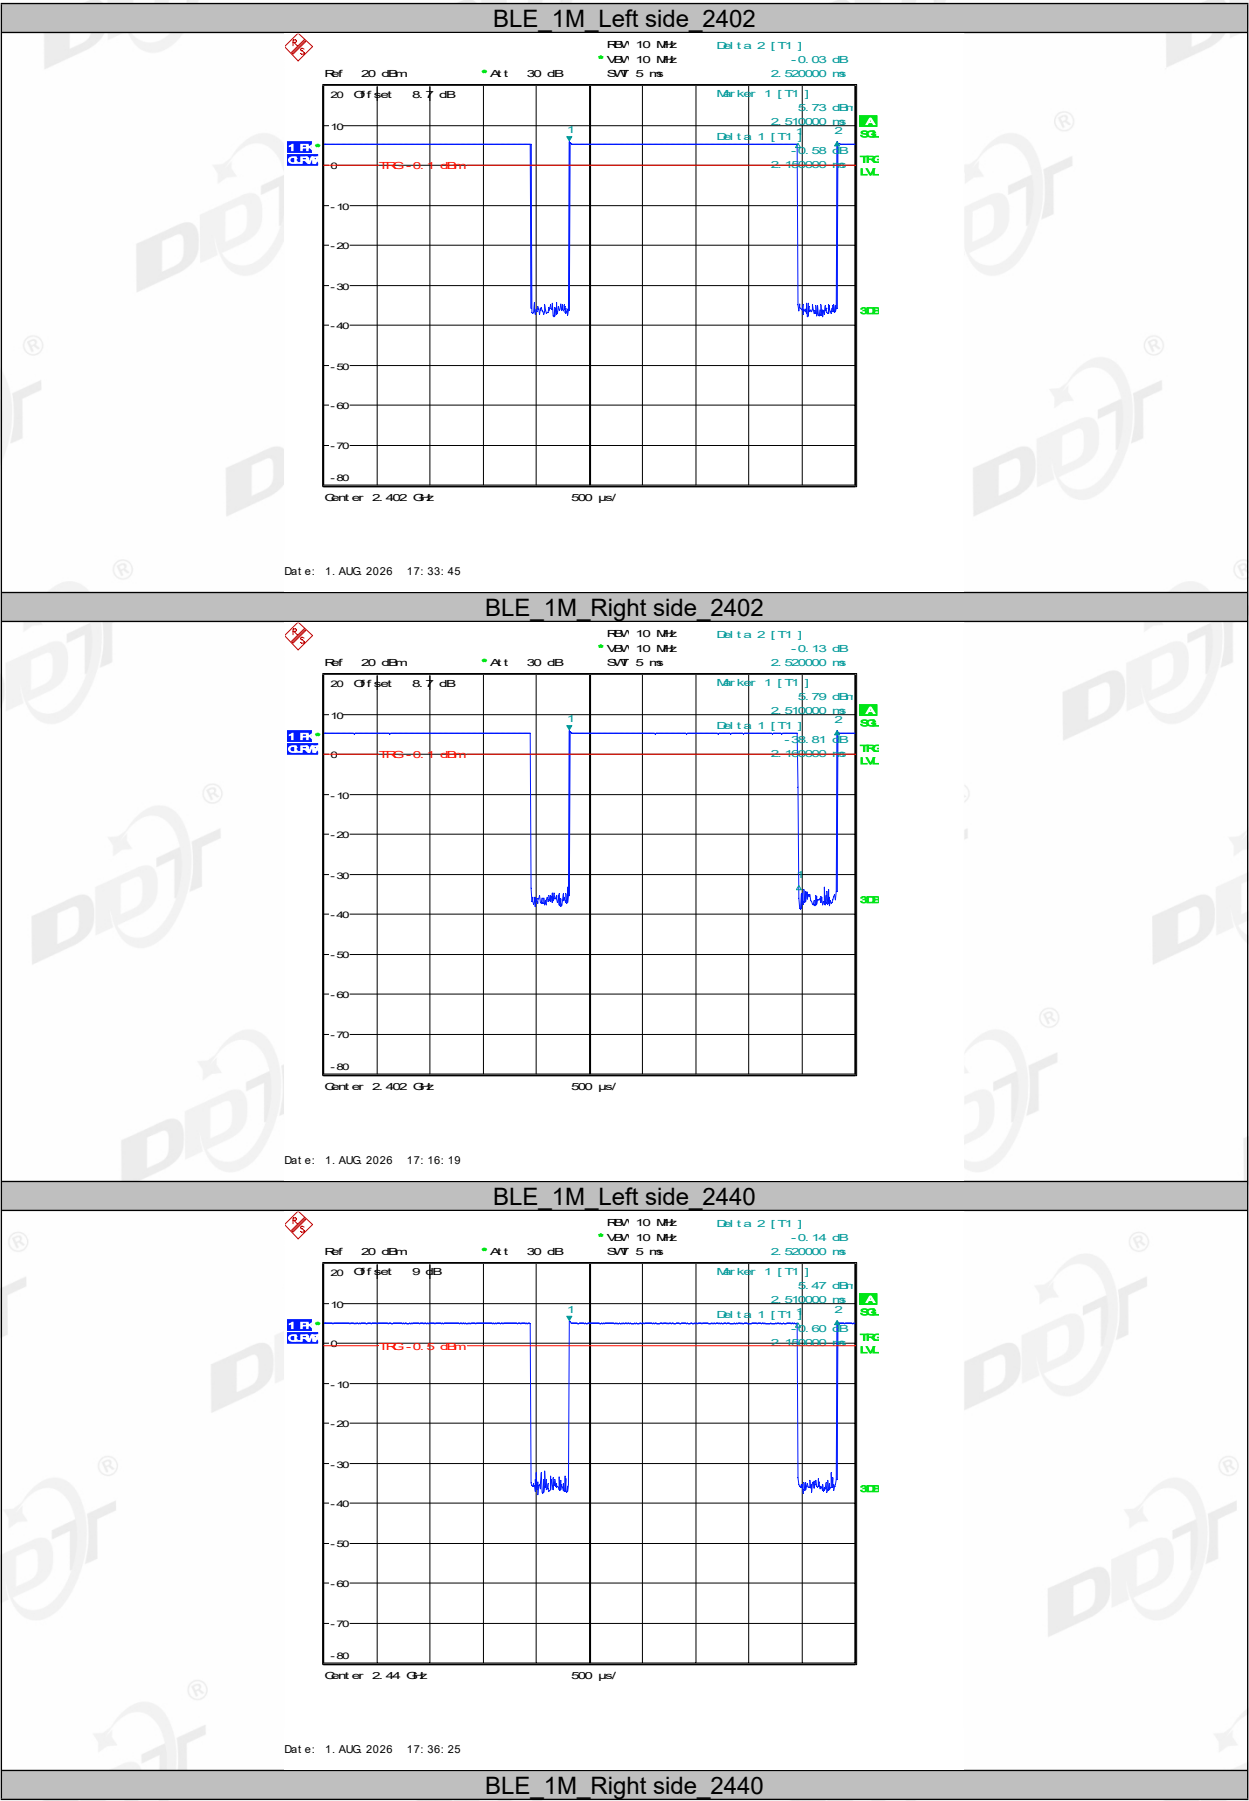





Date: 1. AUG 2026 17: 21: 17

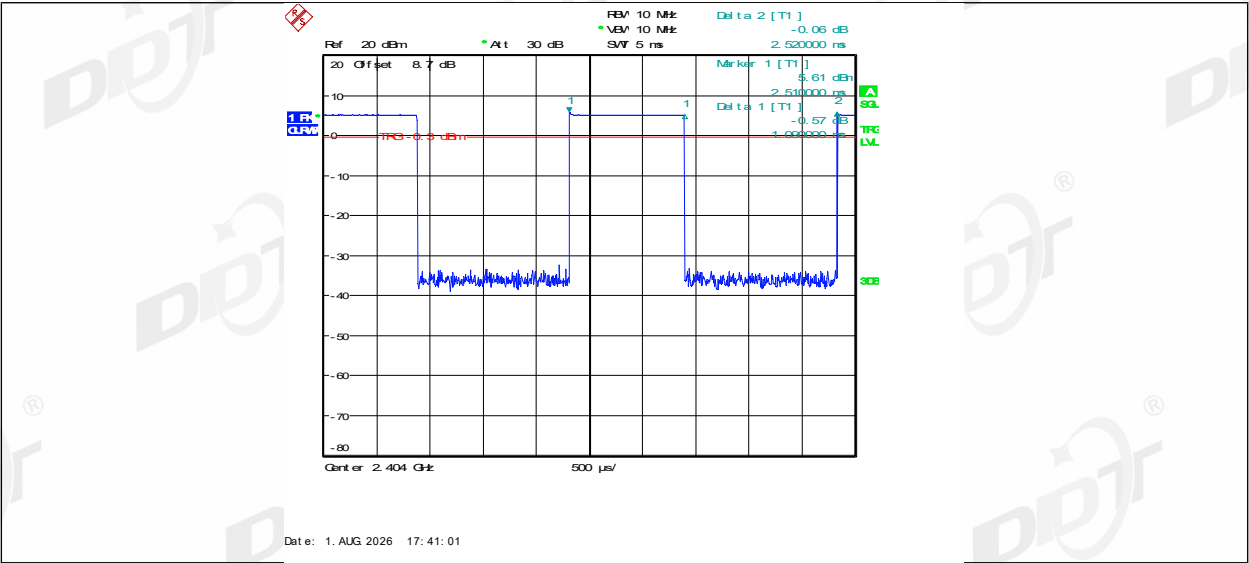




BLE_2M_Right side_2404

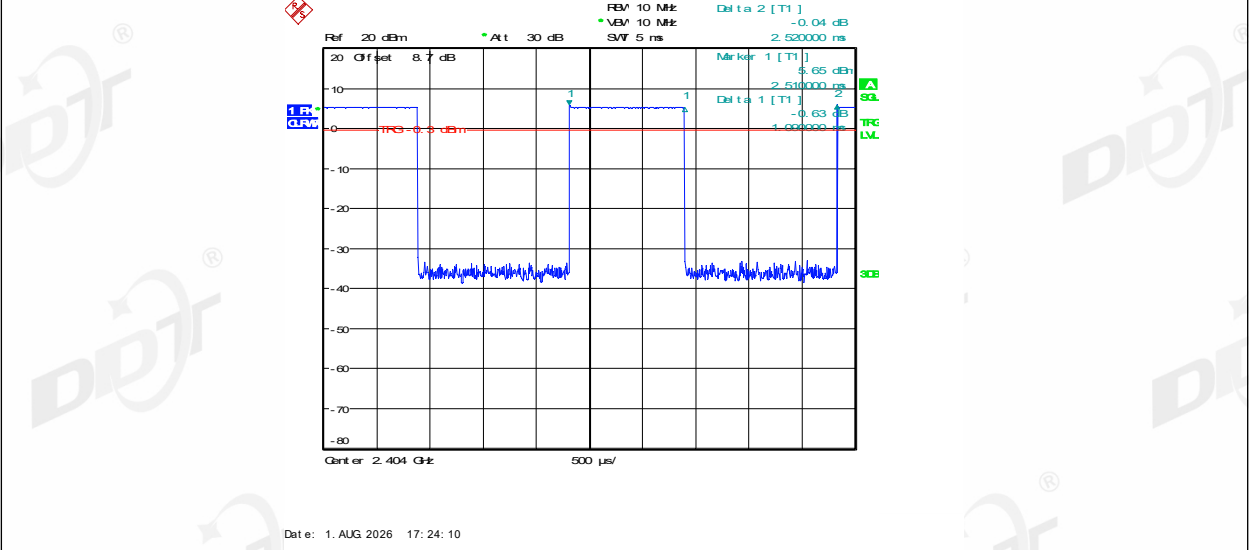

BLE_2M_Left side_2440

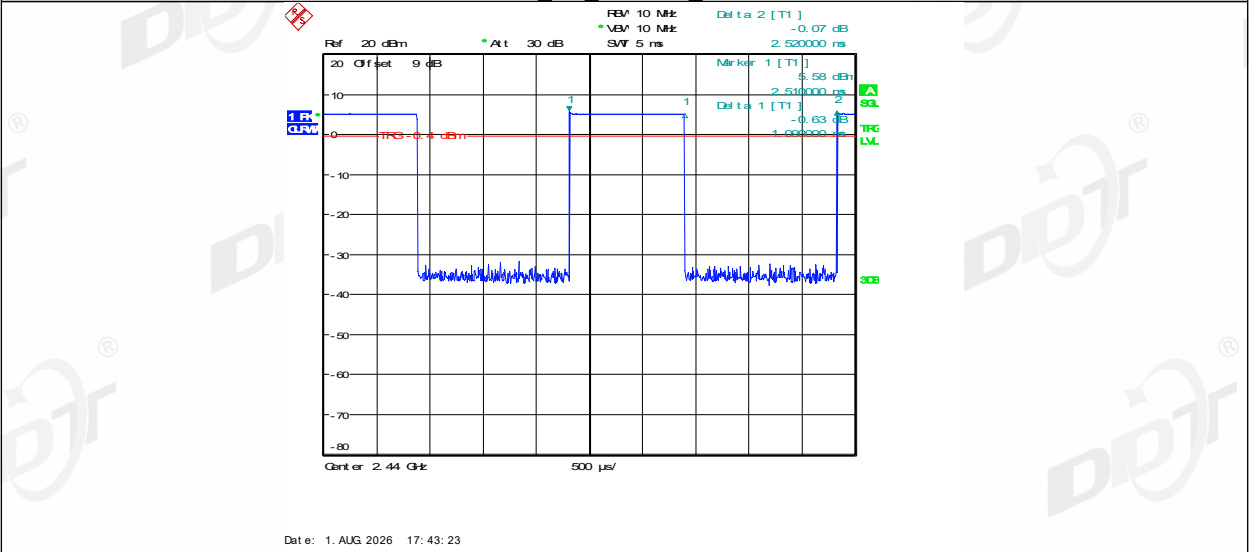

BLE_2M_Right side_2440

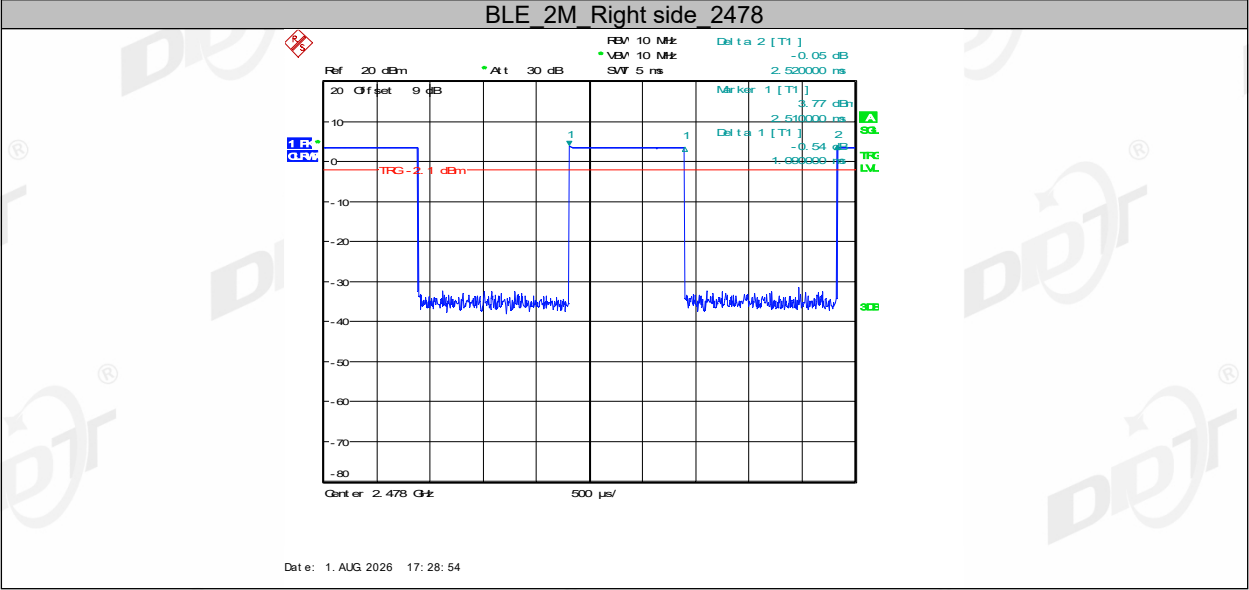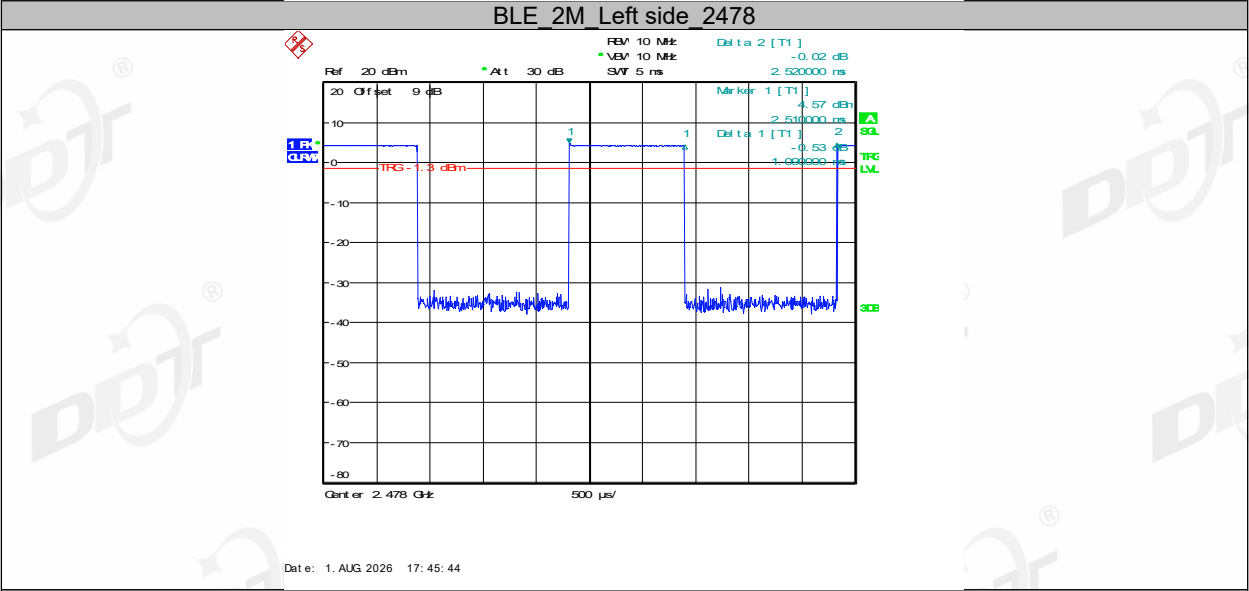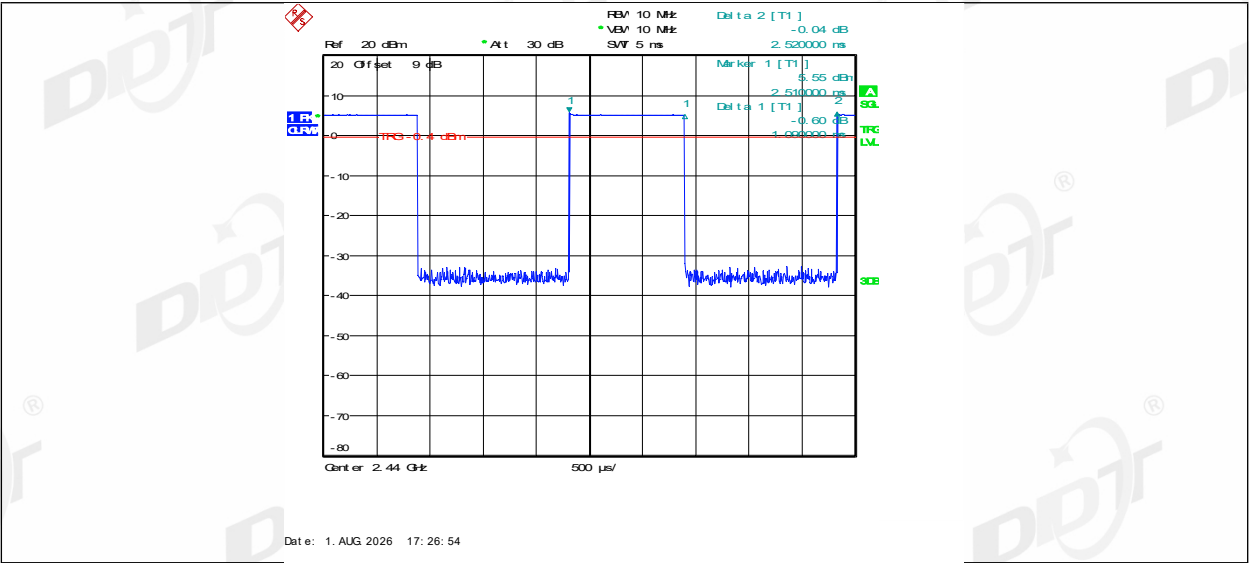

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12. Radiated Emission


12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS32-RE (V5.0.0)	DDT-ZC02739	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2027/06/25
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2027/07/08
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2027/07/10
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2027/07/10
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/07/10
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04

PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

12.2. Block diagram of test setup

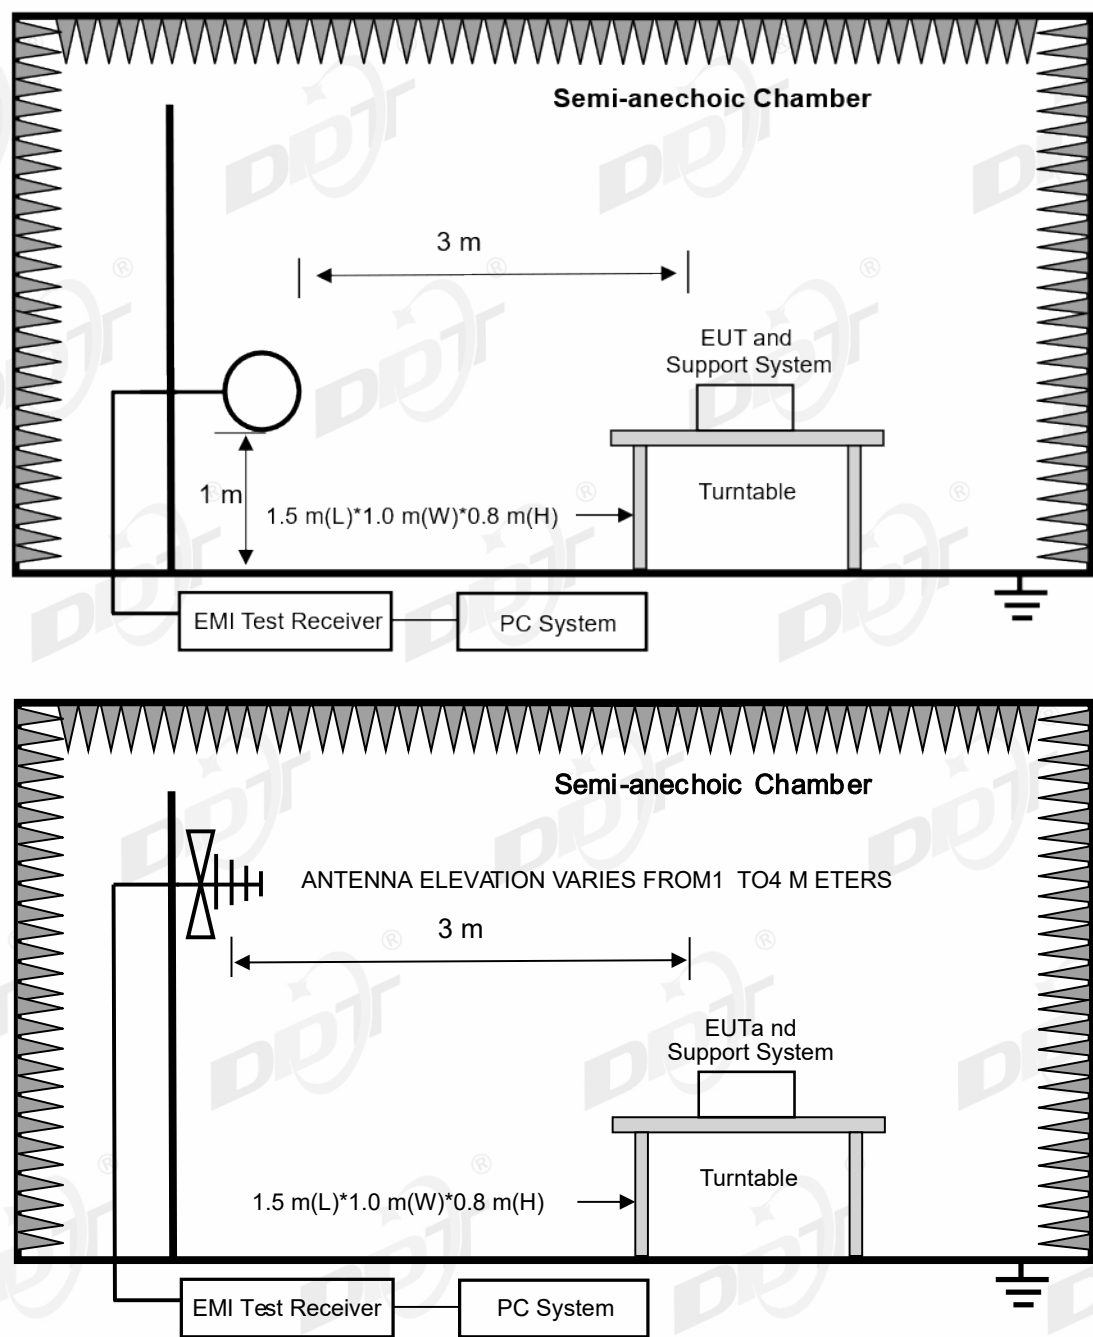

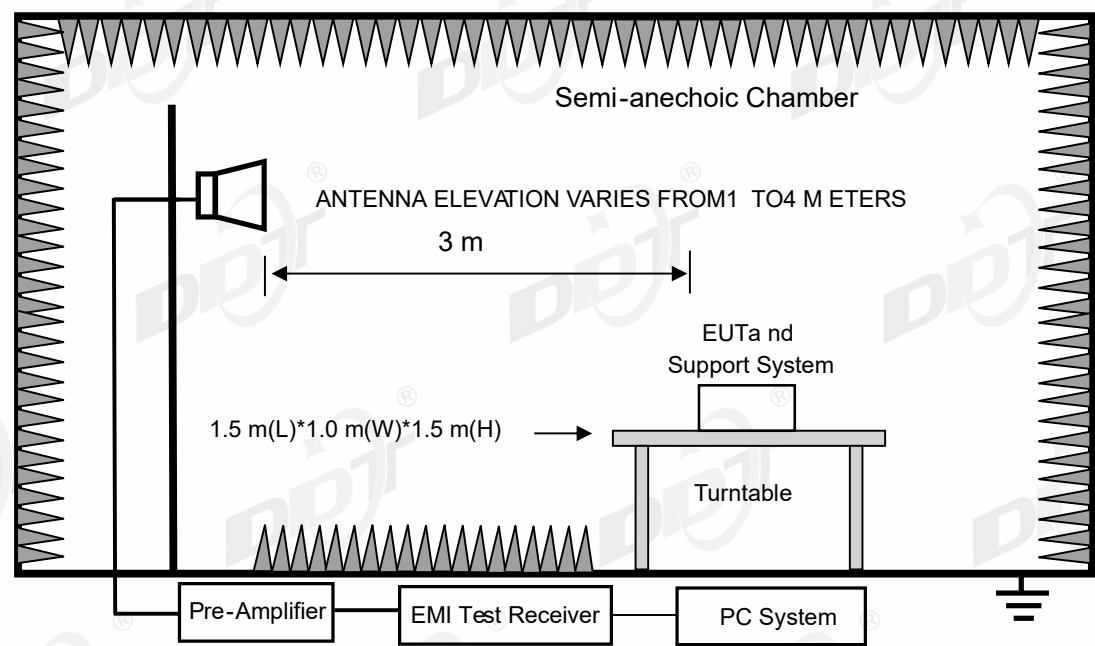

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMIT	
MHz	Meters	uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m(Peak)	
		54.0 dBuV/m(Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According to ANSI C63.10 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10 clause 4.1.5.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Zhang Yibo

Test Mode:

TX BLE 1M Mode

Power Supply:

Battery

Condition:

Temp:20.6°C;Humi:52.8%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26070622-4E\FCC BELOW 1G\9

Memo:

Sample Number:S26070622-001 Left side

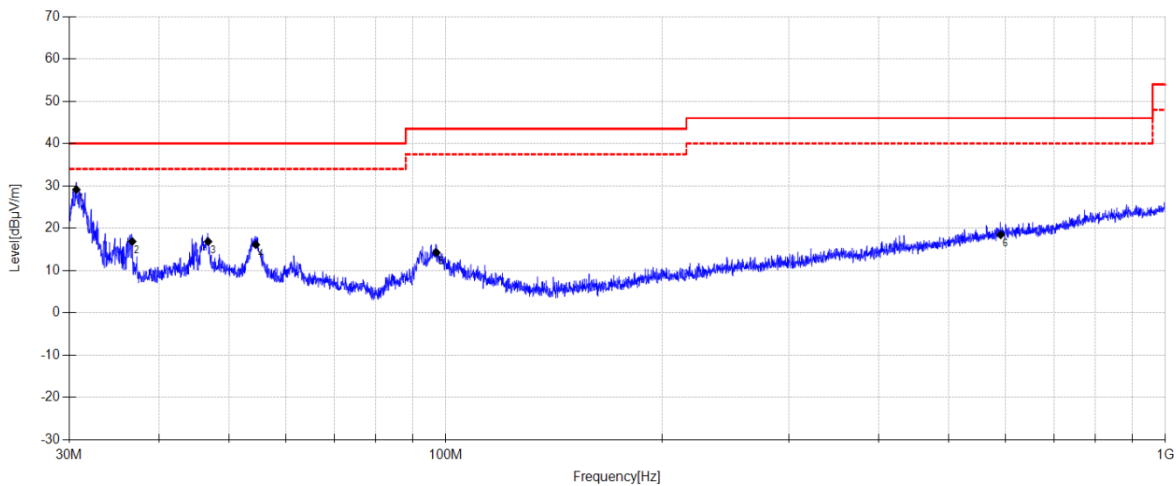

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.681	47	10.63	3.79	29.12	40.00	10.88	QP	Horizontal
2	36.687	33.34	11.94	3.87	16.85	40.00	23.15	QP	Horizontal
3	46.761	31.44	13.72	3.96	16.82	40.00	23.18	QP	Horizontal
4	54.483	31.01	13.36	4.02	16.09	40.00	23.91	QP	Horizontal
5	97.092	31.29	10.92	4.29	14.20	43.50	29.30	QP	Horizontal
6	590.622	26.21	18.71	6.37	18.46	46.00	27.54	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Zhang Yibo

Test Mode:

TX BLE 1M Mode

Power Supply:

Battery

Condition:

Temp:20.6°C;Humi:52.8%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26070622-4E\FCC BELOW 1G\10

Memo:

Sample Number:S26070622-001 Left side

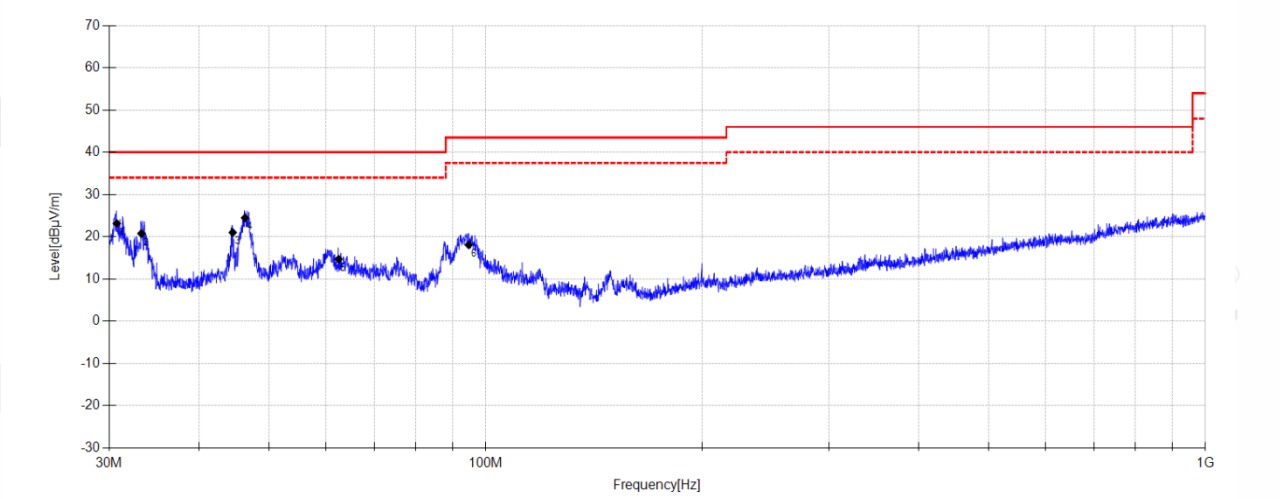

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.724	41.04	10.61	3.79	23.14	40.00	16.86	QP	Vertical
2	33.234	38.45	10.77	3.83	20.75	40.00	19.25	QP	Vertical
3	44.521	35.6	13.75	3.95	21.00	40.00	19.00	QP	Vertical
4	46.304	39.04	13.77	3.96	24.47	40.00	15.53	QP	Vertical
5	62.466	31.25	11.65	4.09	14.69	40.00	25.31	QP	Vertical
6	94.738	35.33	10.77	4.27	18.07	43.50	25.43	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Zhang Yibo

Test Mode:

TX BLE 2M Mode

Power Supply:

Battery

Condition:

Temp:20.6°C;Humi:52.8%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26070622-4E\FCC BELOW 1G\7

Memo:

Sample Number:S26070622-001 Left side

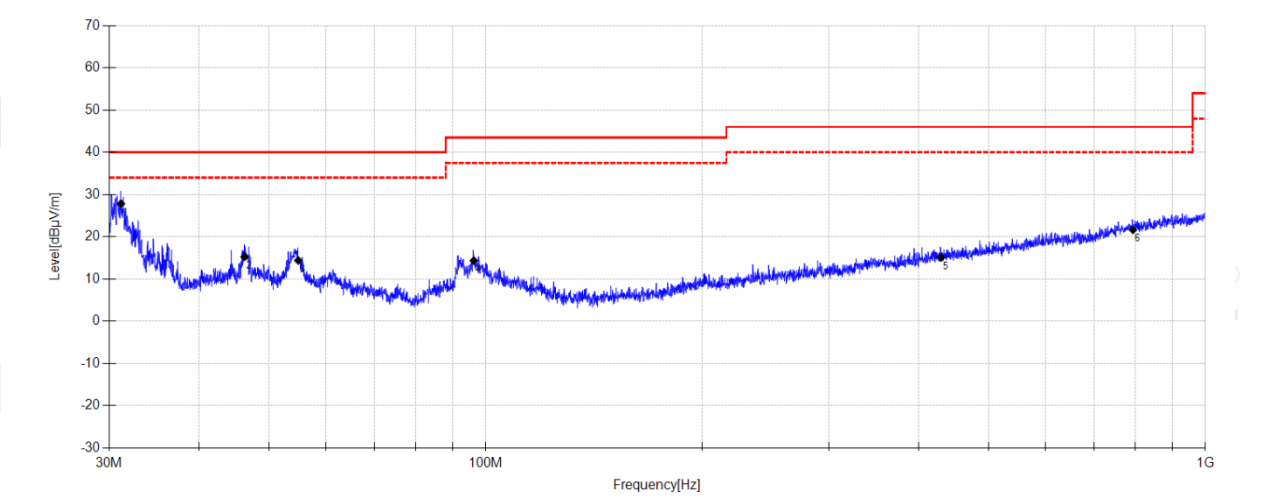

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.136	45.8	10.53	3.80	27.83	40.00	12.17	QP	Horizontal
2	46.239	29.8	13.78	3.96	15.24	40.00	24.76	QP	Horizontal
3	54.905	29.43	13.23	4.02	14.38	40.00	25.62	QP	Horizontal
4	96.279	31.4	10.97	4.28	14.35	43.50	29.15	QP	Horizontal
5	429.294	25.75	16.06	5.81	15.09	46.00	30.91	QP	Horizontal
6	793.433	26.66	20.59	6.92	21.63	46.00	24.37	QP	Horizontal


Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

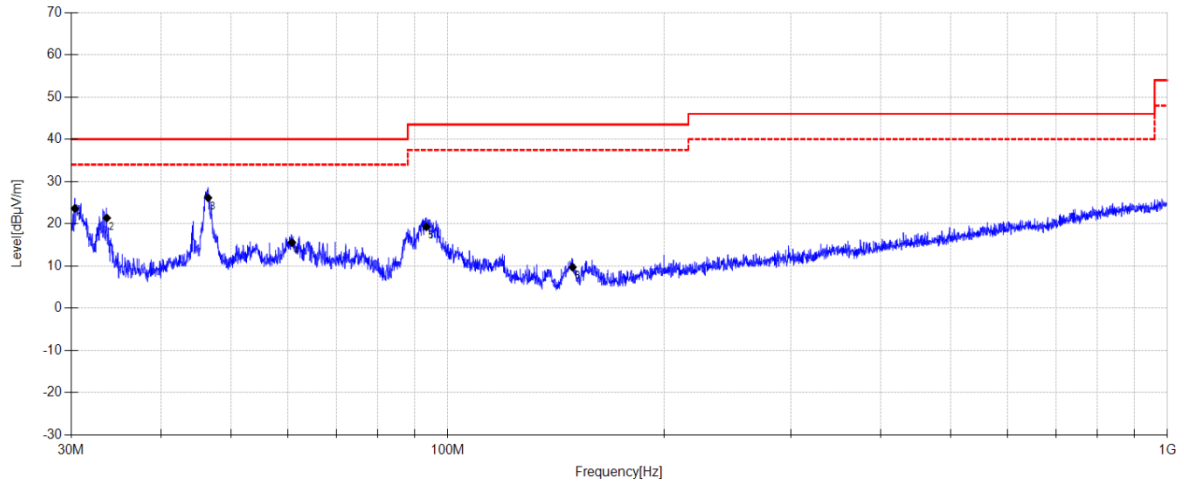
Test Date: 2026-08-04**Tested By:** Zhang Yibo**Test Mode:** TX BLE 2M Mode**Power Supply:** Battery**Condition:** Temp:20.6°C;Humi:52.8%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26070622-4E\FCC BELOW 1G\8**Memo:** Sample Number:S26070622-001 Left side**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.338	41.38	10.76	3.78	23.62	40.00	16.38	QP	Vertical
2	33.609	38.94	10.88	3.83	21.35	40.00	18.65	QP	Vertical
3	46.466	40.73	13.75	3.96	26.14	40.00	13.86	QP	Vertical
4	60.781	31.73	12.04	4.07	15.54	40.00	24.46	QP	Vertical
5	93.419	36.83	10.47	4.27	19.27	43.50	24.23	QP	Vertical
6	149.124	29.57	7.88	4.58	9.68	43.50	33.82	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

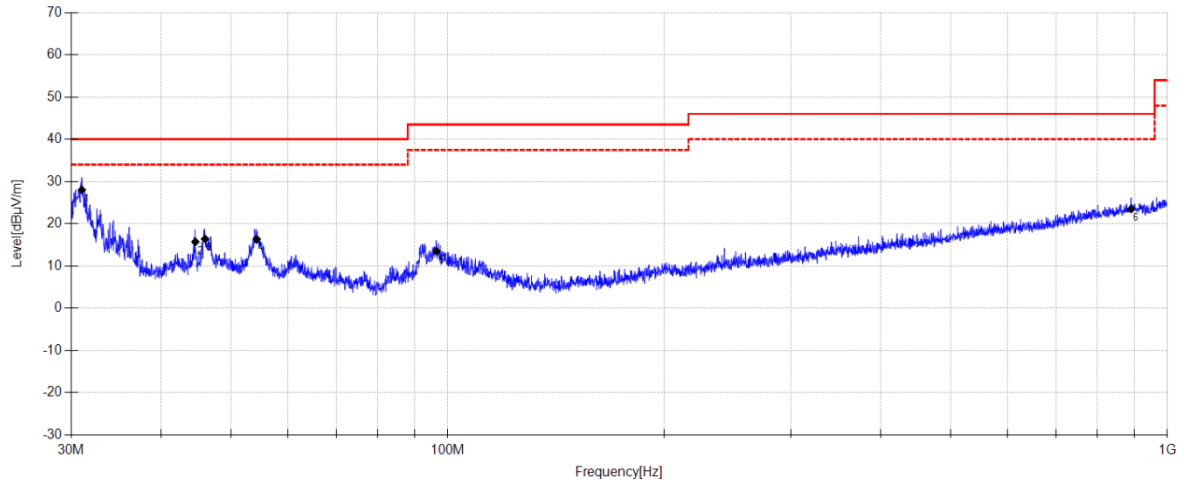
Test Date: 2026-08-04**Tested By:** Zhang Yibo**Test Mode:** TX BLE 1M Mode**Power Supply:** Battery**Condition:** Temp:20.6°C;Humi:52.8%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26070622-4E\FCC BELOW 1G\3**Memo:** Sample Number:S26070622-001 Right side**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.027	46.02	10.51	3.79	28.02	40.00	11.98	QP	Horizontal
2	44.615	30.32	13.74	3.95	15.71	40.00	24.29	QP	Horizontal
3	46.012	30.94	13.80	3.96	16.40	40.00	23.60	QP	Horizontal
4	54.293	31.23	13.41	4.01	16.35	40.00	23.65	QP	Horizontal
5	96.549	30.53	10.95	4.28	13.46	43.50	30.04	QP	Horizontal
6	890.748	26.55	21.81	7.09	23.49	46.00	22.51	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

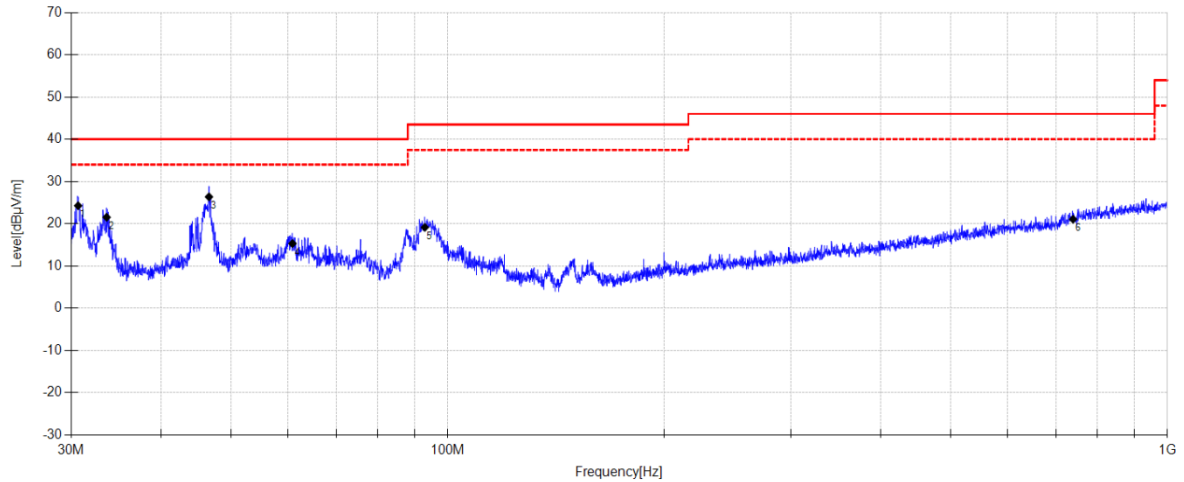Test Date: 2026-08-04**Tested By:** Zhang Yibo**Test Mode:** TX BLE 1M Mode**Power Supply:** Battery**Condition:** Temp:20.6°C;Humi:52.8%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26070622-4E\FCC BELOW 1G\4**Memo:** Sample Number:S26070622-001 Right side

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.659	42.13	10.64	3.79	24.26	40.00	15.74	QP	Vertical
2	33.585	39.13	10.88	3.83	21.54	40.00	18.46	QP	Vertical
3	46.597	40.97	13.74	3.96	26.37	40.00	13.63	QP	Vertical
4	60.866	31.5	12.03	4.07	15.30	40.00	24.70	QP	Vertical
5	92.962	36.88	10.30	4.26	19.14	43.50	24.36	QP	Vertical
6	739.705	26.89	20.29	6.75	21.07	46.00	24.93	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.