


Test Result

Project Number: P-EE26010251
Test Time: 2026-02-03_23.06.11

EUT Name:	Dash Cam	Temp.(°C):	23.6
Model Number:	A810LITE-RC21	Humidity (%RH):	52
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	N/A

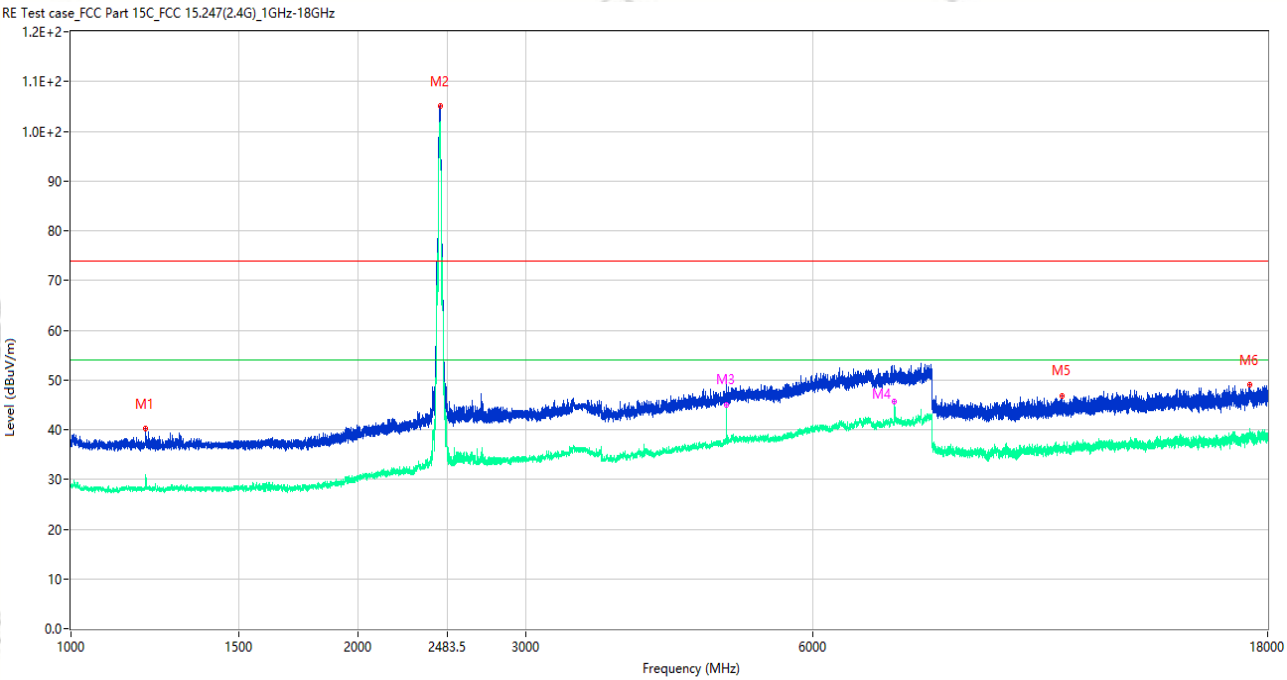


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.000	40.16	-15.73	74.0	33.84	Peak	124.00	150	Vertical	Pass
1**	1198.000	28.68	-15.73	54.0	25.32	AV	124.00	150	Vertical	Pass
2	2438.250	105.11	-12.38	74.0	-31.11	Peak	48.00	150	Vertical	N/A
2**	2438.250	101.96	-12.38	54.0	-47.96	AV	48.00	150	Vertical	N/A
3	4874.500	49.79	-2.25	74.0	24.21	Peak	202.00	150	Vertical	Pass
3**	4874.500	45.07	-2.25	54.0	8.93	AV	202.00	150	Vertical	Pass
4	7310.500	52.19	0.62	74.0	21.81	Peak	0.00	150	Vertical	Pass
4**	7310.500	45.73	0.62	54.0	8.27	AV	0.00	150	Vertical	Pass
5	10950.500	46.89	-3.20	74.0	27.11	Peak	1.00	150	Vertical	Pass
5**	10950.500	35.99	-3.20	54.0	18.01	AV	1.00	150	Vertical	Pass
6	17229.500	49.11	-0.39	74.0	24.89	Peak	234.00	150	Vertical	Pass
6**	17229.500	39.54	-0.39	54.0	14.46	AV	234.00	150	Vertical	Pass

Test Result

Project Number: P-EE26010251

Test Time: 2026-02-03_23.10.26

EUT Name:	Dash Cam	Temp.(°C):	23.6
Model Number:	A810LITE-RC21	Humidity (%RH):	52
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	N/A

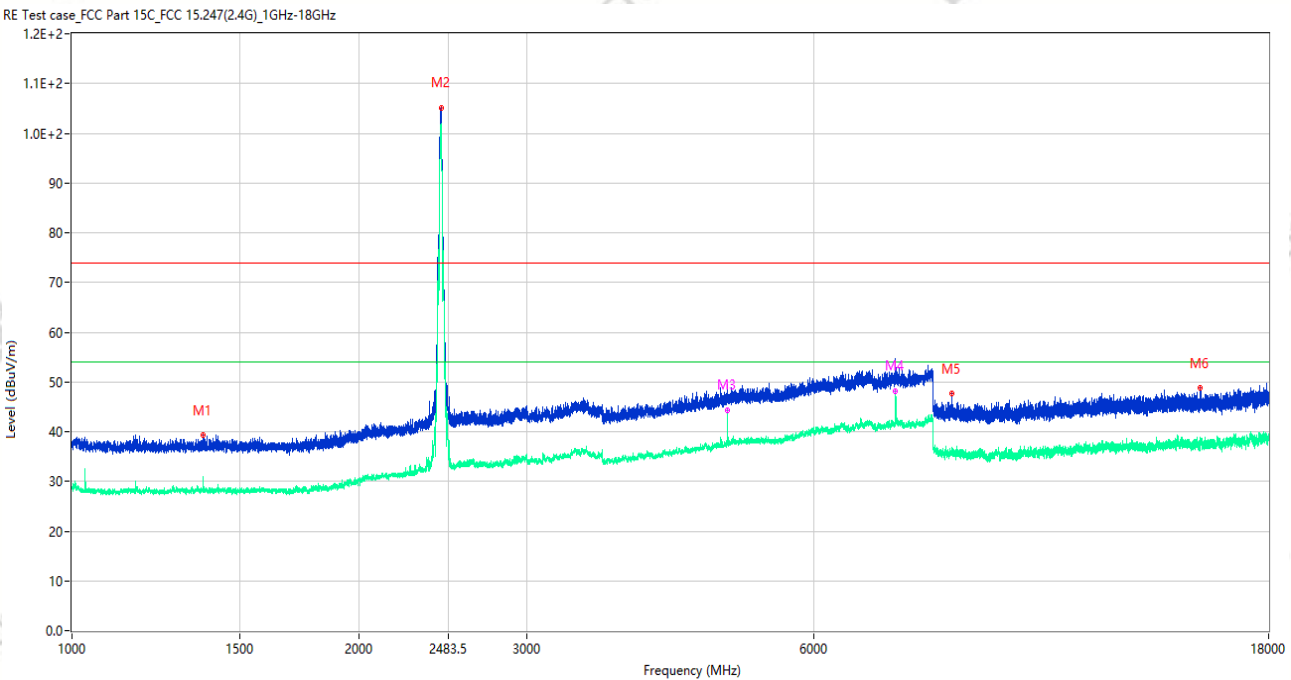

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.750	39.30	-15.96	74.0	34.70	Peak	14.00	150	Horizontal	Pass
1**	1371.750	27.87	-15.96	54.0	26.13	AV	14.00	150	Horizontal	Pass
2	2438.500	105.17	-12.37	74.0	-31.17	Peak	187.00	150	Horizontal	N/A
2**	2438.500	102.02	-12.37	54.0	-48.02	AV	187.00	150	Horizontal	N/A
3	4874.500	48.74	-2.25	74.0	25.26	Peak	1.00	150	Horizontal	Pass
3**	4874.500	44.38	-2.25	54.0	9.62	AV	1.00	150	Horizontal	Pass
4	7311.000	54.64	0.65	74.0	19.36	Peak	357.00	150	Horizontal	Pass
4**	7311.000	48.24	0.65	54.0	5.76	AV	357.00	150	Horizontal	Pass
5	8380.500	47.71	-4.67	74.0	26.29	Peak	213.00	150	Horizontal	Pass
5**	8380.500	35.89	-4.67	54.0	18.11	AV	213.00	150	Horizontal	Pass
6	15264.500	48.76	-1.02	74.0	25.24	Peak	11.00	150	Horizontal	Pass
6**	15264.500	38.09	-1.02	54.0	15.91	AV	11.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26010251

Test Time: 2026-02-03_23.25.26

EUT Name: Dash Cam

Temp.(°C): 23.6

Model Number: A810LITE-RC21

Humidity (%RH): 52

Sample Number: EE26010272-001-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=42


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: N/A

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

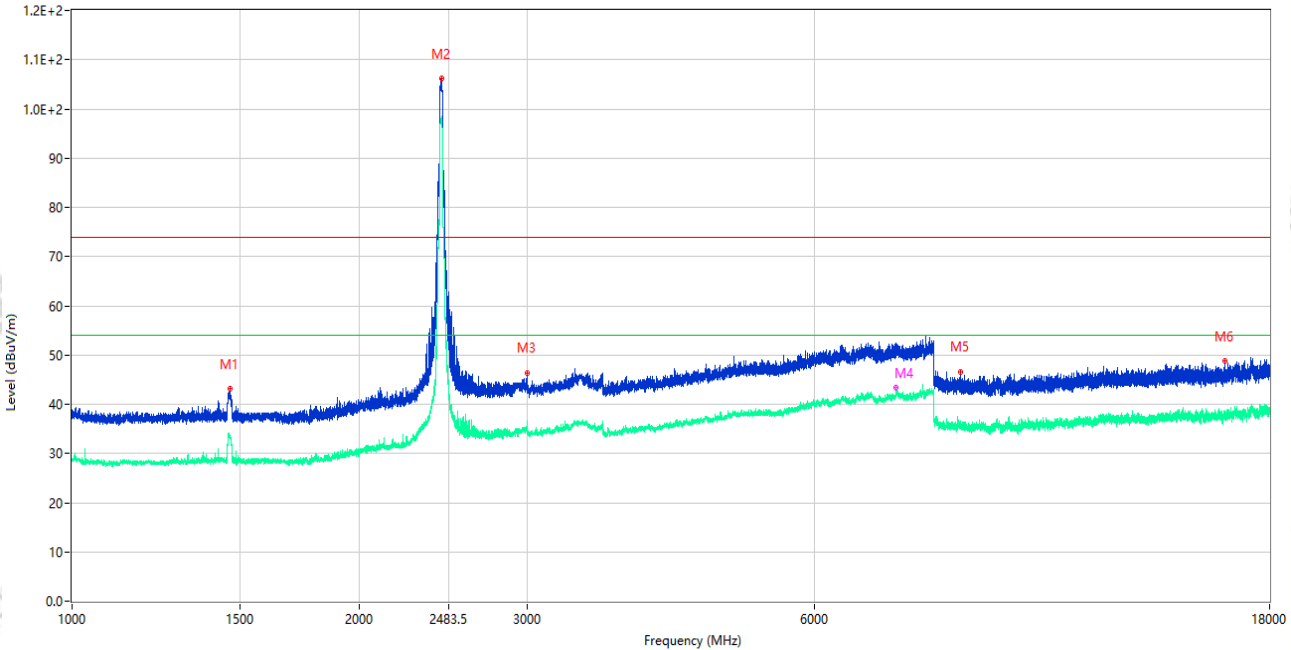


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1462.750	43.15	-16.23	74.0	30.85	Peak	358.00	150	Vertical	Pass
1**	1462.750	33.53	-16.23	54.0	20.47	AV	358.00	150	Vertical	Pass
2	2438.000	106.21	-12.38	74.0	-32.21	Peak	220.00	150	Vertical	N/A
2**	2438.000	98.14	-12.38	54.0	-44.14	AV	220.00	150	Vertical	N/A
3	2997.250	46.38	-8.79	74.0	27.62	Peak	110.00	150	Vertical	Pass
3**	2997.250	35.43	-8.79	54.0	18.57	AV	110.00	150	Vertical	Pass
4	7306.500	50.60	0.53	74.0	23.40	Peak	209.00	150	Vertical	Pass
4**	7306.500	43.50	0.53	54.0	10.50	AV	209.00	150	Vertical	Pass
5	8540.000	46.66	-5.18	74.0	27.34	Peak	184.00	150	Vertical	Pass
5**	8540.000	35.35	-5.18	54.0	18.65	AV	184.00	150	Vertical	Pass
6	16177.000	48.75	-1.08	74.0	25.25	Peak	0.00	150	Vertical	Pass
6**	16177.000	38.16	-1.08	54.0	15.84	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26010251

Test Time: 2026-02-03_23.17.41

EUT Name:	Dash Cam	Temp.(°C):	23.6
Model Number:	A810LITE-RC21	Humidity (%RH):	52
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	N/A

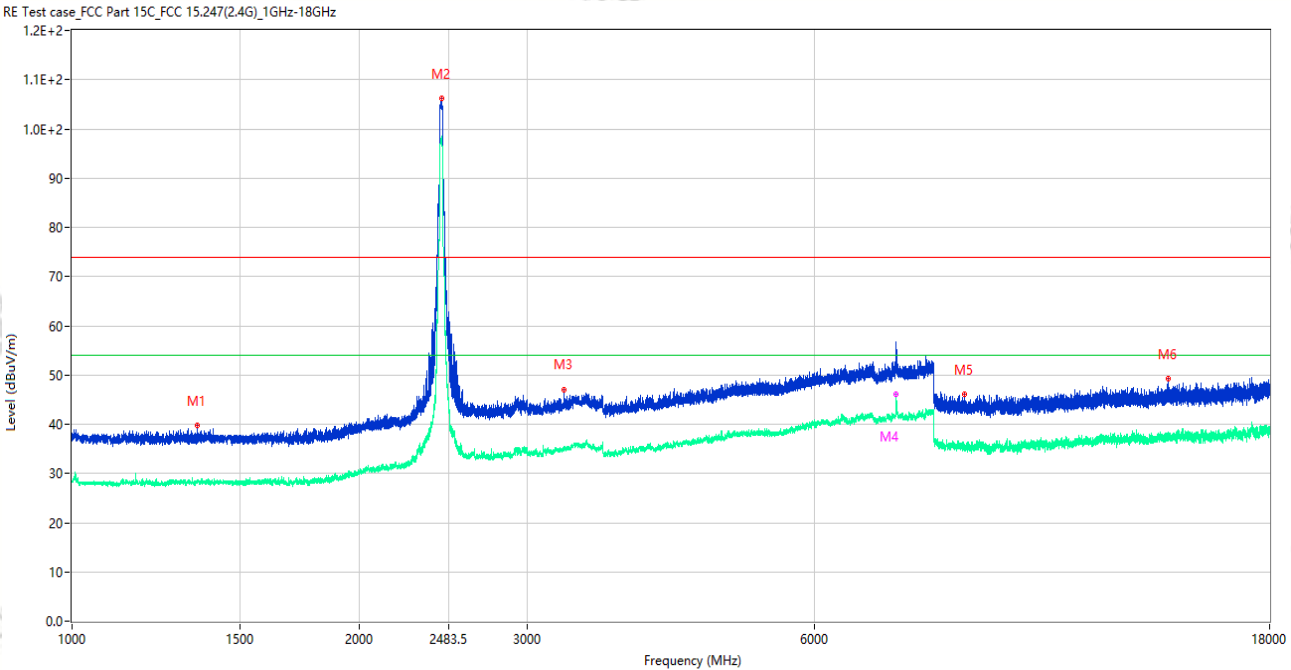

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1354.000	39.85	-15.89	74.0	34.15	Peak	263.00	150	Horizontal	Pass
1**	1354.000	28.11	-15.89	54.0	25.89	AV	263.00	150	Horizontal	Pass
2	2439.750	106.21	-12.37	74.0	-32.21	Peak	357.00	150	Horizontal	N/A
2**	2439.750	98.35	-12.37	54.0	-44.35	AV	357.00	150	Horizontal	N/A
3	3280.500	46.91	-6.94	74.0	27.09	Peak	248.00	150	Horizontal	Pass
3**	3280.500	34.94	-6.94	54.0	19.06	AV	248.00	150	Horizontal	Pass
4	7311.500	54.02	0.64	74.0	19.98	Peak	188.00	150	Horizontal	Pass
4**	7311.500	46.03	0.64	54.0	7.97	AV	188.00	150	Horizontal	Pass
5	8625.000	46.01	-5.30	74.0	27.99	Peak	0.00	150	Horizontal	Pass
5**	8625.000	35.63	-5.30	54.0	18.37	AV	0.00	150	Horizontal	Pass
6	14088.500	49.29	-1.69	74.0	24.71	Peak	1.00	150	Horizontal	Pass
6**	14088.500	36.93	-1.69	54.0	17.07	AV	1.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26010251

Test Time: 2026-02-03_23.47.25

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

RE Test case FCC Part 15C FCC 15.247(2.4G)_1GHz-18GHz

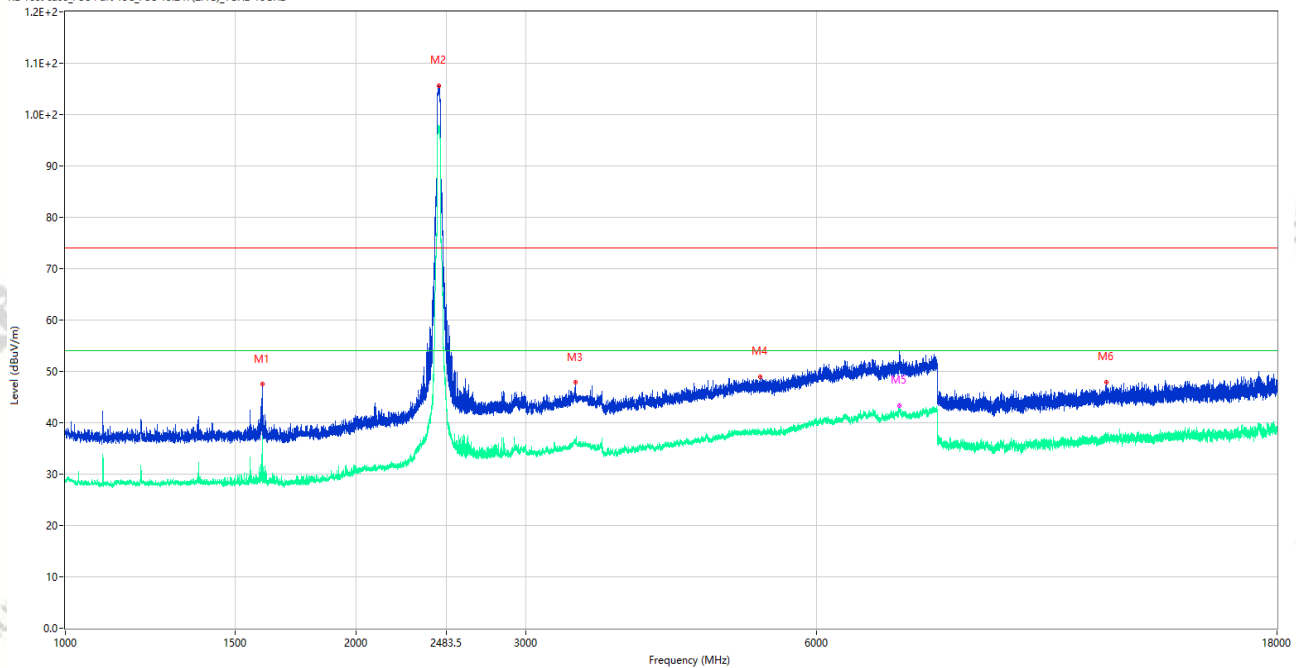

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.000	47.50	-16.23	74.0	26.50	Peak	89.00	100	Vertical	Pass
1**	1599.000	33.11	-16.23	54.0	20.89	AV	89.00	100	Vertical	Pass
2	2435.250	105.70	-12.29	74.0	-31.70	Peak	53.00	100	Vertical	N/A
2**	2435.250	97.36	-12.29	54.0	-43.36	AV	53.00	100	Vertical	N/A
3	3376.500	47.87	-4.89	74.0	26.13	Peak	191.00	100	Vertical	Pass
3**	3376.500	36.35	-4.89	54.0	17.65	AV	191.00	100	Vertical	Pass
4	5248.500	48.89	-2.10	74.0	25.11	Peak	210.00	100	Vertical	Pass
4**	5248.500	38.01	-2.10	54.0	15.99	AV	210.00	100	Vertical	Pass
5	7314.000	50.72	0.68	74.0	23.28	Peak	282.00	100	Vertical	Pass
5**	7314.000	43.36	0.68	54.0	10.64	AV	282.00	100	Vertical	Pass
6	11972.500	47.93	-3.17	74.0	26.07	Peak	89.00	100	Vertical	Pass
6**	11972.500	37.73	-3.17	54.0	16.27	AV	89.00	100	Vertical	Pass


Test Result

Project Number: P-EE26010251

Test Time: 2026-02-04_00.00.14

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

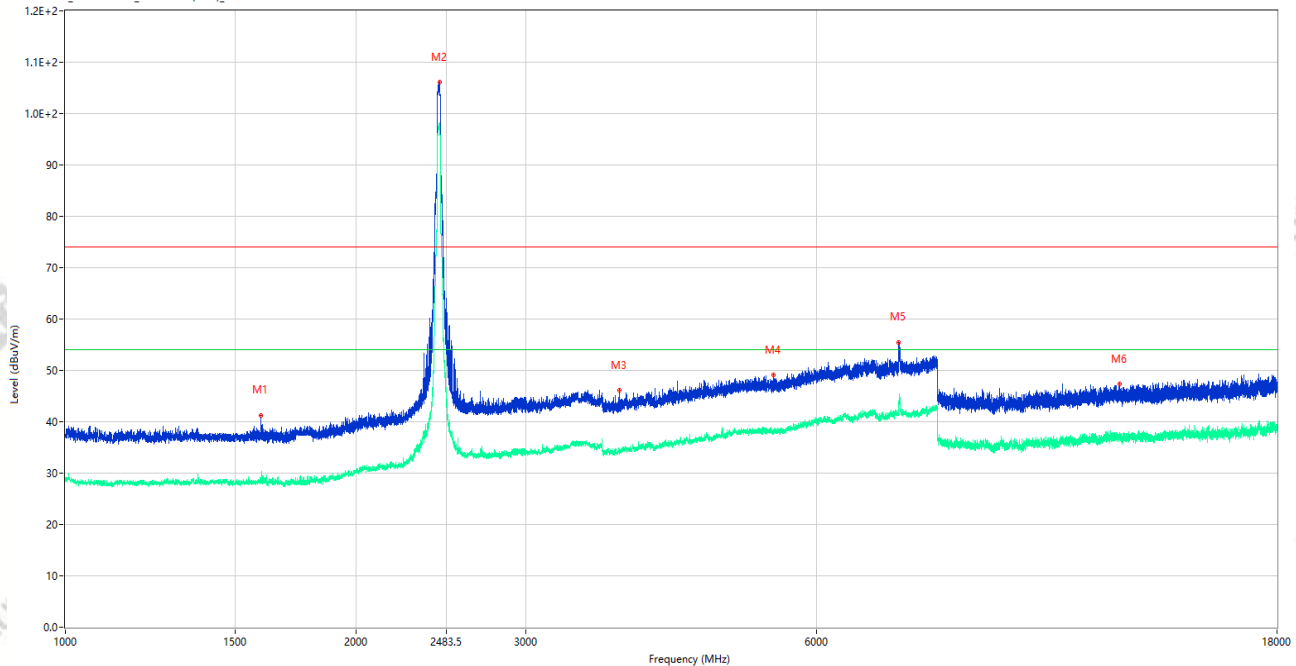

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1594.250	41.26	-16.22	74.0	32.74	Peak	53.00	100	Horizontal	Pass
1**	1594.250	29.04	-16.22	54.0	24.96	AV	53.00	100	Horizontal	Pass
2	2440.750	106.13	-12.38	74.0	-32.13	Peak	357.00	100	Horizontal	N/A
2**	2440.750	97.93	-12.38	54.0	-43.93	AV	357.00	100	Horizontal	N/A
3	3746.500	46.19	-4.68	74.0	27.81	Peak	329.00	100	Horizontal	Pass
3**	3746.500	34.16	-4.68	54.0	19.84	AV	329.00	100	Horizontal	Pass
4	5414.000	49.10	-2.47	74.0	24.90	Peak	251.00	100	Horizontal	Pass
4**	5414.000	37.98	-2.47	54.0	16.02	AV	251.00	100	Horizontal	Pass
5	7301.000	55.51	0.49	74.0	18.49	Peak	360.00	100	Horizontal	Pass
5**	7301.000	42.95	0.49	54.0	11.05	AV	360.00	100	Horizontal	Pass
6	12365.000	47.31	-2.34	74.0	26.69	Peak	156.00	100	Horizontal	Pass
6**	12365.000	36.76	-2.34	54.0	17.24	AV	156.00	100	Horizontal	Pass


Test Result

Project Number: P-EE26010251

Test Time: 2026-02-04_00.09.45

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

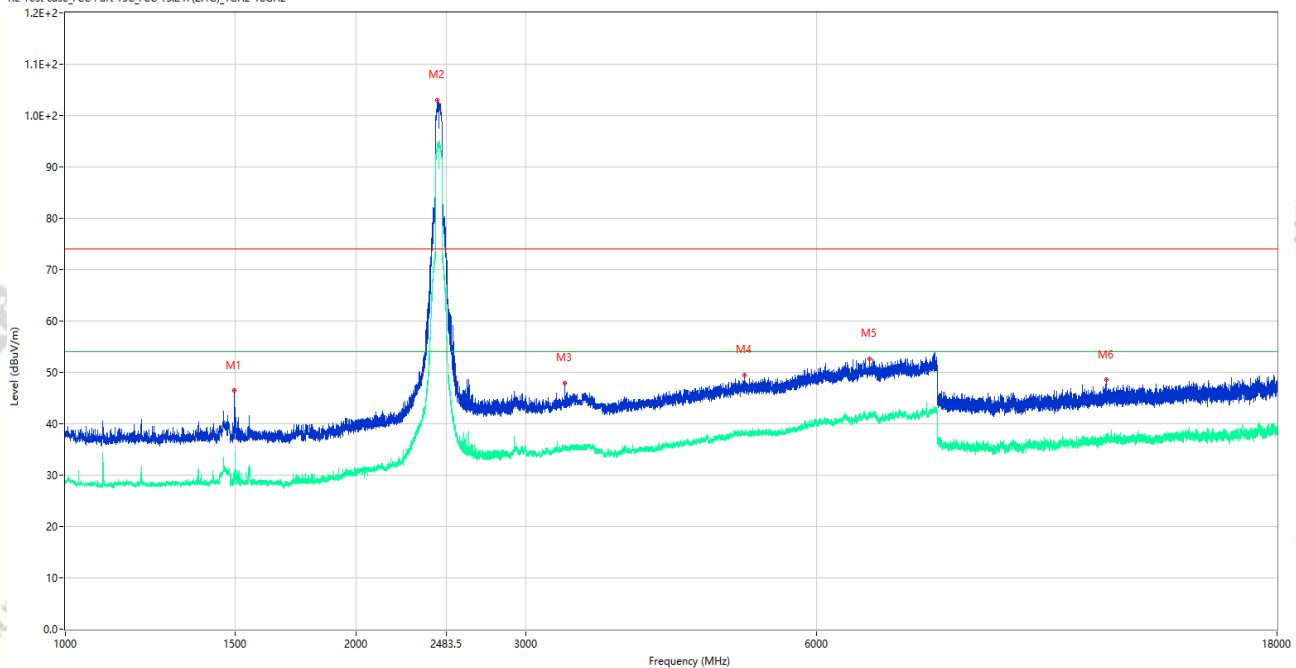


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.750	46.46	-16.16	74.0	27.54	Peak	81.00	100	Vertical	Pass
1**	1496.750	29.41	-16.16	54.0	24.59	AV	81.00	100	Vertical	Pass
2	2429.000	103.05	-12.25	74.0	-29.05	Peak	53.00	100	Vertical	N/A
2**	2429.000	94.49	-12.25	54.0	-40.49	AV	53.00	100	Vertical	N/A
3	3291.000	47.87	-6.77	74.0	26.13	Peak	109.00	100	Vertical	Pass
3**	3291.000	35.28	-6.77	54.0	18.72	AV	109.00	100	Vertical	Pass
4	5057.000	49.43	-2.34	74.0	24.57	Peak	57.00	100	Vertical	Pass
4**	5057.000	38.20	-2.34	54.0	15.80	AV	57.00	100	Vertical	Pass
5	6809.000	52.68	0.32	74.0	21.32	Peak	360.00	100	Vertical	Pass
5**	6809.000	41.39	0.32	54.0	12.61	AV	360.00	100	Vertical	Pass
6	11970.500	48.55	-3.08	74.0	25.45	Peak	213.00	100	Vertical	Pass
6**	11970.500	37.41	-3.08	54.0	16.59	AV	213.00	100	Vertical	Pass

Test Result

Project Number: P-EE26010251
Test Time: 2026-02-04_00.06.01

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

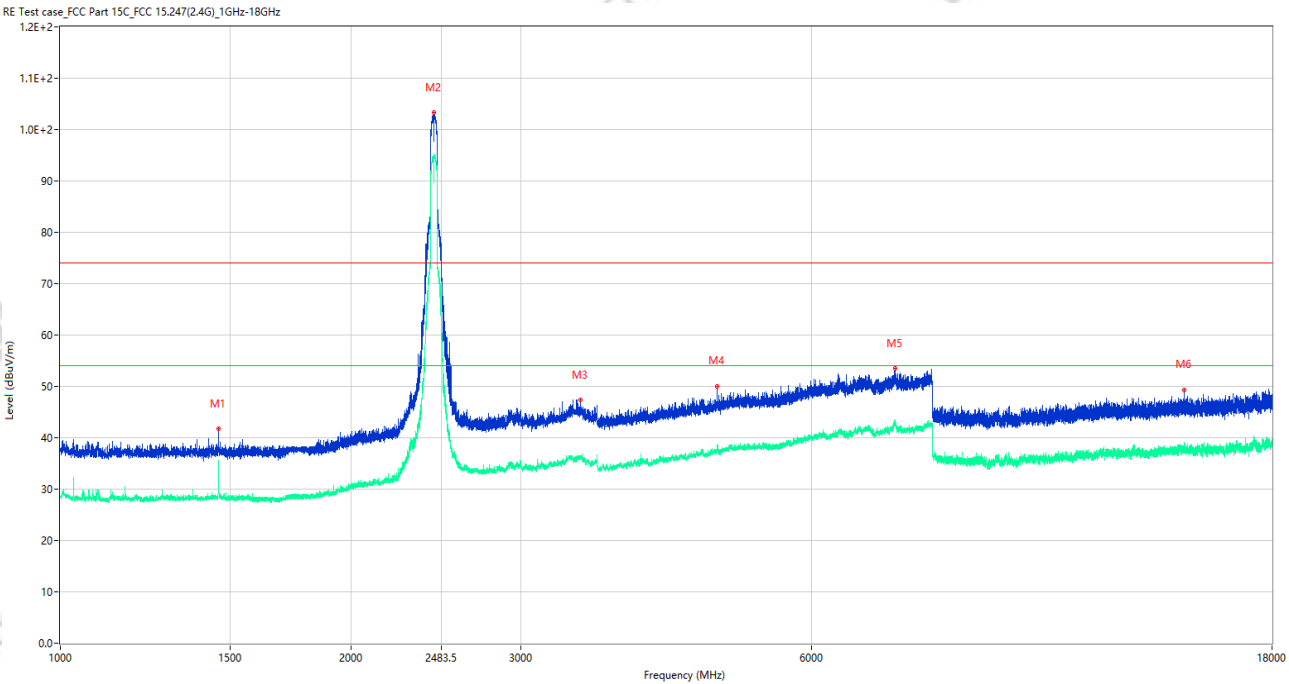


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1458.250	41.72	-16.17	74.0	32.28	Peak	262.00	100	Horizontal	Pass
1**	1458.250	35.66	-16.17	54.0	18.34	AV	262.00	100	Horizontal	Pass
2	2439.750	103.33	-12.37	74.0	-29.33	Peak	360.00	100	Horizontal	N/A
2**	2439.750	95.29	-12.37	54.0	-41.29	AV	360.00	100	Horizontal	N/A
3	3457.000	47.42	-4.91	74.0	26.58	Peak	351.00	100	Horizontal	Pass
3**	3457.000	36.32	-4.91	54.0	17.68	AV	351.00	100	Horizontal	Pass
4	4787.500	50.02	-3.03	74.0	23.98	Peak	21.00	100	Horizontal	Pass
4**	4787.500	37.77	-3.03	54.0	16.23	AV	21.00	100	Horizontal	Pass
5	7327.000	53.50	0.79	74.0	20.50	Peak	0.00	100	Horizontal	Pass
5**	7327.000	43.03	0.79	54.0	10.97	AV	0.00	100	Horizontal	Pass
6	14596.500	49.30	-2.16	74.0	24.70	Peak	321.00	100	Horizontal	Pass
6**	14596.500	38.29	-2.16	54.0	15.71	AV	321.00	100	Horizontal	Pass

Test Result

Project Number: P-EE26010251
Test Time: 2026-02-04_00.17.05

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

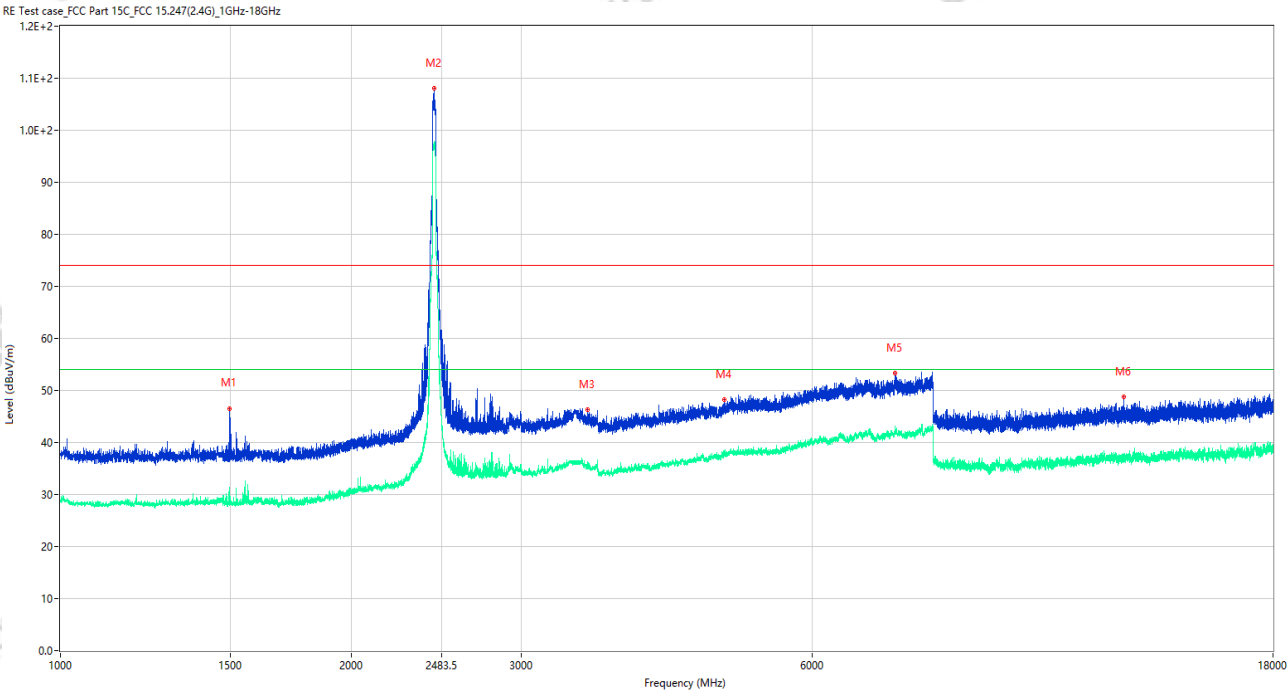


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.250	46.56	-16.15	74.0	27.44	Peak	86.00	100	Vertical	Pass
1**	1497.250	28.09	-16.15	54.0	25.91	AV	86.00	100	Vertical	Pass
2	2435.250	107.99	-12.29	74.0	-33.99	Peak	239.00	100	Vertical	N/A
2**	2435.250	97.53	-12.29	54.0	-43.53	AV	239.00	100	Vertical	N/A
3	3514.500	46.32	-5.83	74.0	27.68	Peak	209.00	100	Vertical	Pass
3**	3514.500	35.60	-5.83	54.0	18.40	AV	209.00	100	Vertical	Pass
4	4870.500	48.31	-2.16	74.0	25.69	Peak	218.00	100	Vertical	Pass
4**	4870.500	38.16	-2.16	54.0	15.84	AV	218.00	100	Vertical	Pass
5	7316.500	53.27	0.68	74.0	20.73	Peak	71.00	100	Vertical	Pass
5**	7316.500	42.41	0.68	54.0	11.59	AV	71.00	100	Vertical	Pass
6	12625.500	48.74	-3.02	74.0	25.26	Peak	289.00	100	Vertical	Pass
6**	12625.500	36.83	-3.02	54.0	17.17	AV	289.00	100	Vertical	Pass

Test Result

Project Number: P-EE26010251
Test Time: 2026-02-04_00.22.16

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax20 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

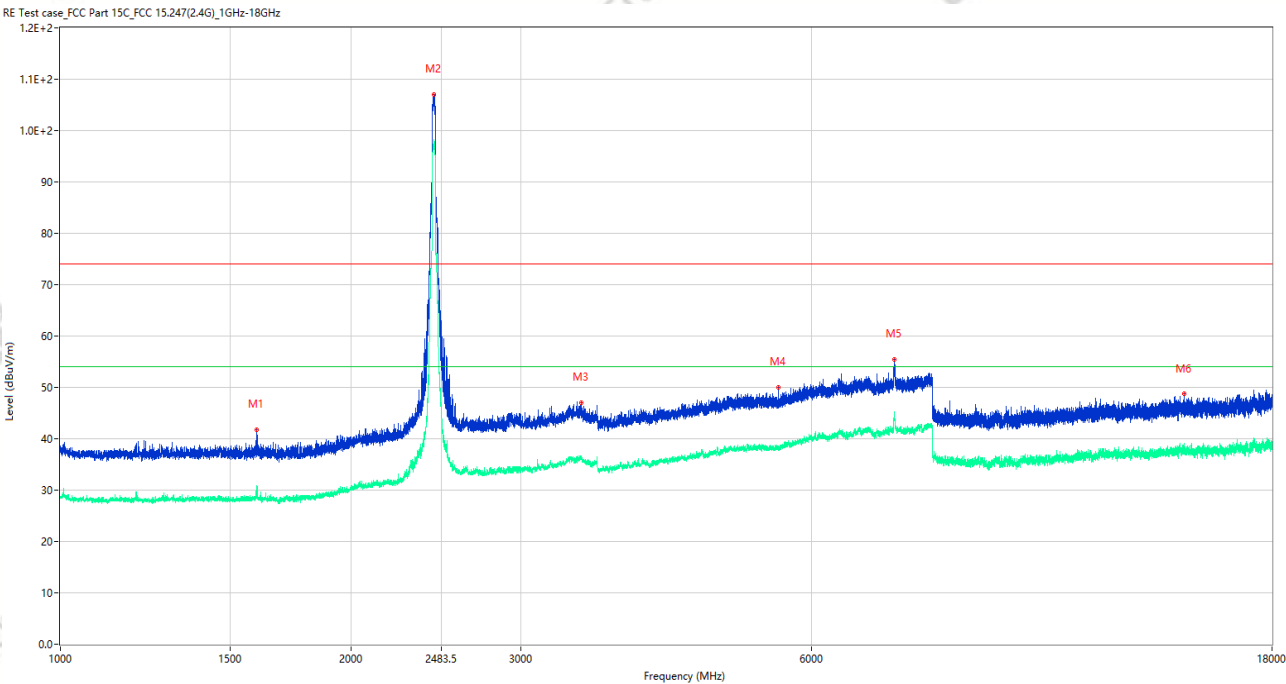

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1596.750	41.70	-16.22	74.0	32.30	Peak	326.00	100	Horizontal	Pass
1**	1596.750	28.91	-16.22	54.0	25.09	AV	326.00	100	Horizontal	Pass
2	2439.250	107.07	-12.37	74.0	-33.07	Peak	4.00	100	Horizontal	N/A
2**	2439.250	98.24	-12.37	54.0	-44.24	AV	4.00	100	Horizontal	N/A
3	3461.500	46.96	-5.00	74.0	27.04	Peak	241.00	100	Horizontal	Pass
3**	3461.500	36.01	-5.00	54.0	17.99	AV	241.00	100	Horizontal	Pass
4	5548.000	50.03	-2.68	74.0	23.97	Peak	170.00	100	Horizontal	Pass
4**	5548.000	38.30	-2.68	54.0	15.70	AV	170.00	100	Horizontal	Pass
5	7311.000	55.46	0.65	74.0	18.54	Peak	5.00	100	Horizontal	Pass
5**	7311.000	45.25	0.65	54.0	8.75	AV	5.00	100	Horizontal	Pass
6	14590.000	48.74	-2.23	74.0	25.26	Peak	39.00	100	Horizontal	Pass
6**	14590.000	38.67	-2.23	54.0	15.33	AV	39.00	100	Horizontal	Pass


Test Result

Project Number: P-EE26010251

Test Time: 2026-02-04_00.31.51

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

RE Test case FCC Part 15C FCC 15.247(2.4G)_1GHz-18GHz

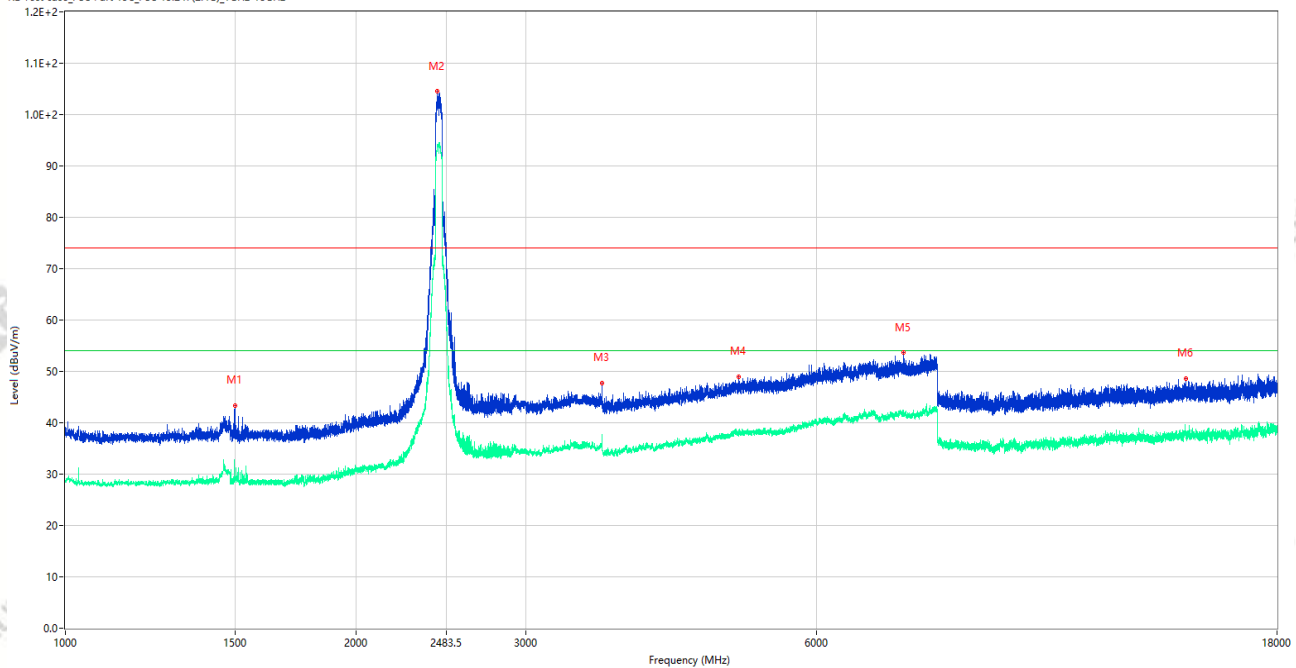


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1498.500	43.35	-16.13	74.0	30.65	Peak	101.00	100	Vertical	Pass
1**	1498.500	28.70	-16.13	54.0	25.30	AV	101.00	100	Vertical	Pass
2	2429.250	104.53	-12.25	74.0	-30.53	Peak	224.00	100	Vertical	N/A
2**	2429.250	94.02	-12.25	54.0	-40.02	AV	224.00	100	Vertical	N/A
3	3598.500	47.70	-5.07	74.0	26.30	Peak	62.00	100	Vertical	Pass
3**	3598.500	36.23	-5.07	54.0	17.77	AV	62.00	100	Vertical	Pass
4	4982.500	48.86	-2.52	74.0	25.14	Peak	131.00	100	Vertical	Pass
4**	4982.500	37.92	-2.52	54.0	16.08	AV	131.00	100	Vertical	Pass
5	7378.500	53.64	0.91	74.0	20.36	Peak	360.00	100	Vertical	Pass
5**	7378.500	41.65	0.91	54.0	12.35	AV	360.00	100	Vertical	Pass
6	14475.500	48.61	-2.85	74.0	25.39	Peak	69.00	100	Vertical	Pass
6**	14475.500	38.12	-2.85	54.0	15.88	AV	69.00	100	Vertical	Pass

Test Result

Project Number: P-EE26010251
Test Time: 2026-02-04_00.27.56

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11ax40 CH6 P=42
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

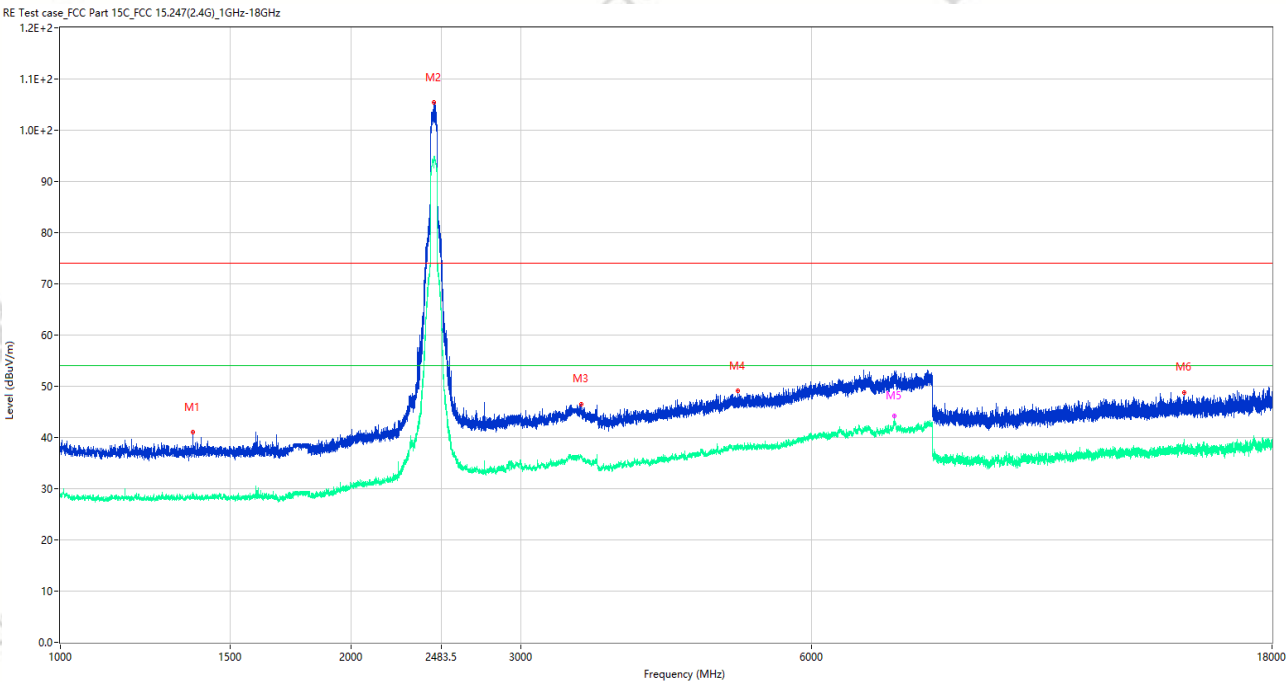

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.500	41.00	-15.95	74.0	33.00	Peak	9.00	100	Horizontal	Pass
1**	1371.500	28.97	-15.95	54.0	25.03	AV	9.00	100	Horizontal	Pass
2	2435.750	105.35	-12.32	74.0	-31.35	Peak	360.00	100	Horizontal	N/A
2**	2435.750	94.27	-12.32	54.0	-40.27	AV	360.00	100	Horizontal	N/A
3	3463.500	46.47	-5.04	74.0	27.53	Peak	0.00	100	Horizontal	Pass
3**	3463.500	36.02	-5.04	54.0	17.98	AV	0.00	100	Horizontal	Pass
4	5029.500	49.04	-2.13	74.0	24.96	Peak	0.00	100	Horizontal	Pass
4**	5029.500	38.22	-2.13	54.0	15.78	AV	0.00	100	Horizontal	Pass
5	7312.000	52.22	0.63	74.0	21.78	Peak	0.00	100	Horizontal	Pass
5**	7312.000	44.20	0.63	54.0	9.80	AV	0.00	100	Horizontal	Pass
6	14585.000	48.85	-2.46	74.0	25.15	Peak	231.00	100	Horizontal	Pass
6**	14585.000	38.34	-2.46	54.0	15.66	AV	231.00	100	Horizontal	Pass


Test Result

Project Number: P-EE26010251

Test Time: 2026-02-04_03.59.08

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

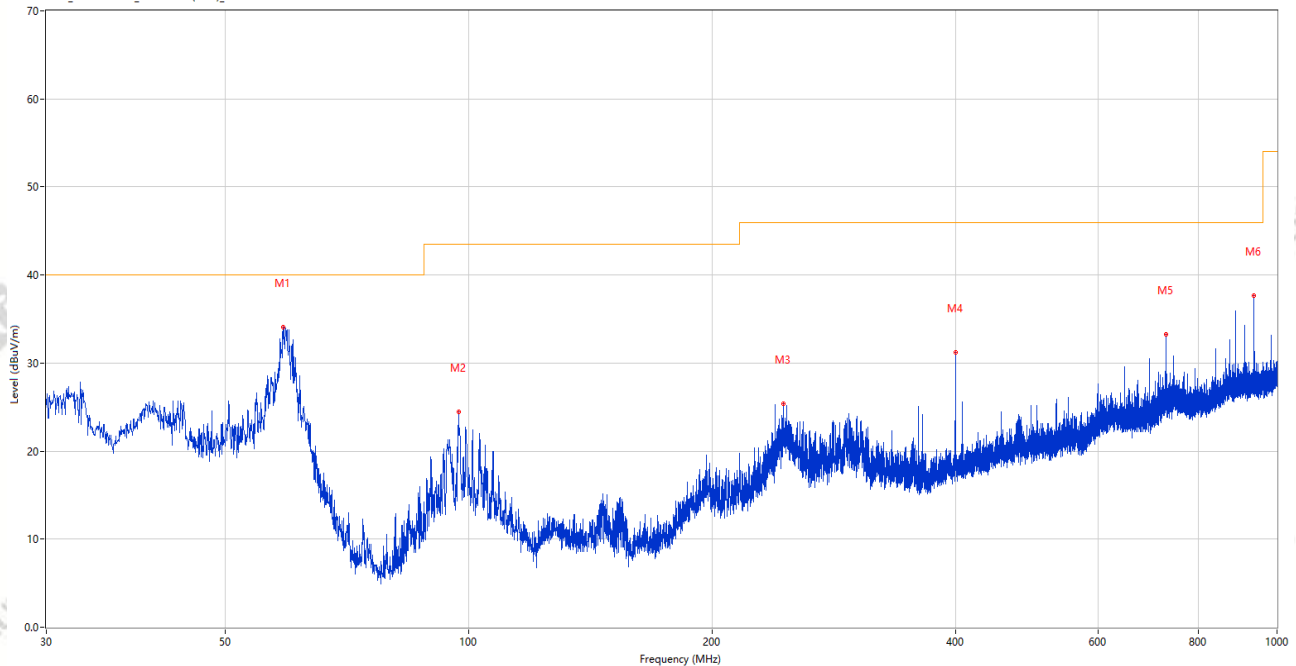


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	58.955	34.06	-25.80	40.0	5.94	Peak	34.00	100	Vertical	Pass
2	97.076	24.43	-26.35	43.5	19.07	Peak	0.00	100	Vertical	Pass
3	244.806	25.41	-24.26	46.0	20.59	Peak	256.00	200	Vertical	Pass
4	400.006	31.22	-20.42	46.0	14.78	Peak	0.00	100	Vertical	Pass
5	729.031	33.22	-12.77	46.0	12.78	Peak	113.00	100	Vertical	Pass
6	935.980	37.66	-8.93	46.0	8.34	Peak	180.00	100	Vertical	Pass

Test Result

Project Number: P-EE26010251
Test Time: 2026-02-04_04.00.50

EUT Name:	Dash Cam	Temp.(°C):	22.8
Model Number:	A810LITE-RC21	Humidity (%RH):	55
Sample Number:	EE26010272-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Siyuan	Remark:	N/A

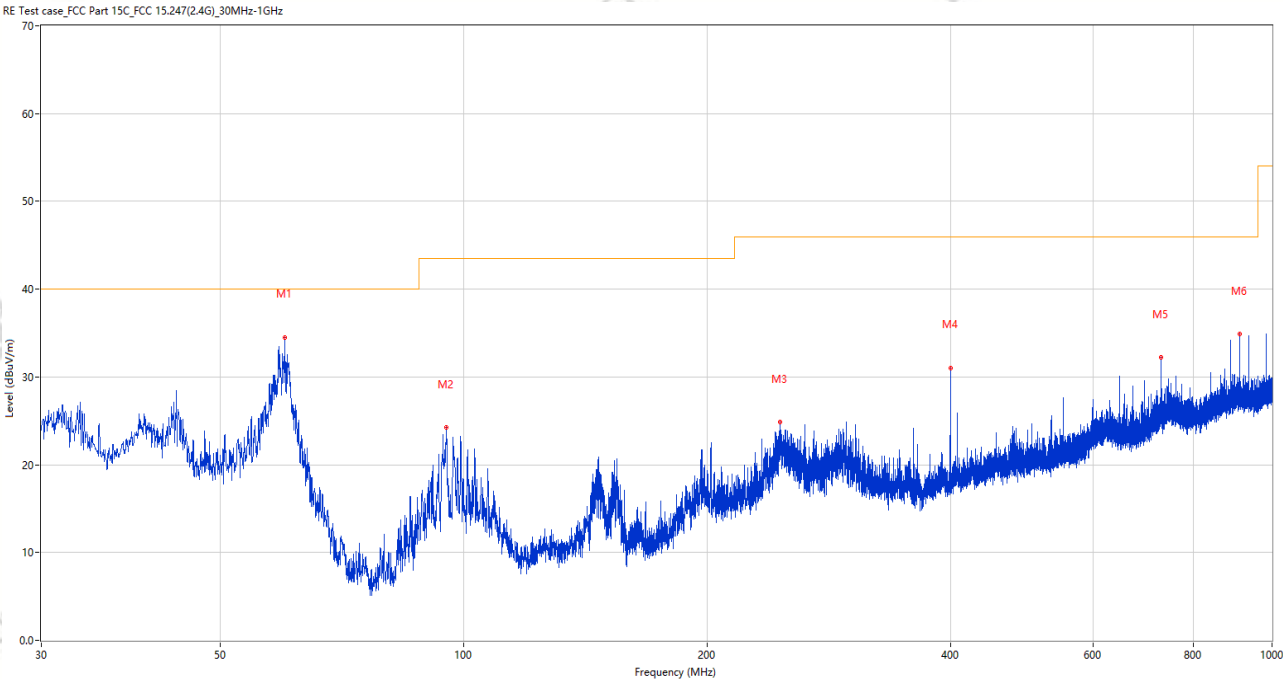

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	60.022	34.49	-26.03	40.0	5.51	Peak	3.00	100	Horizontal	Pass
2	95.087	24.20	-26.67	43.5	19.30	Peak	158.00	200	Horizontal	Pass
3	246.262	24.82	-24.21	46.0	21.18	Peak	306.00	100	Horizontal	Pass
4	400.006	31.02	-20.42	46.0	14.98	Peak	360.00	100	Horizontal	Pass
5	728.982	32.20	-12.78	46.0	13.80	Peak	251.00	100	Horizontal	Pass
6	911.196	34.85	-9.23	46.0	11.15	Peak	135.00	200	Horizontal	Pass