


Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

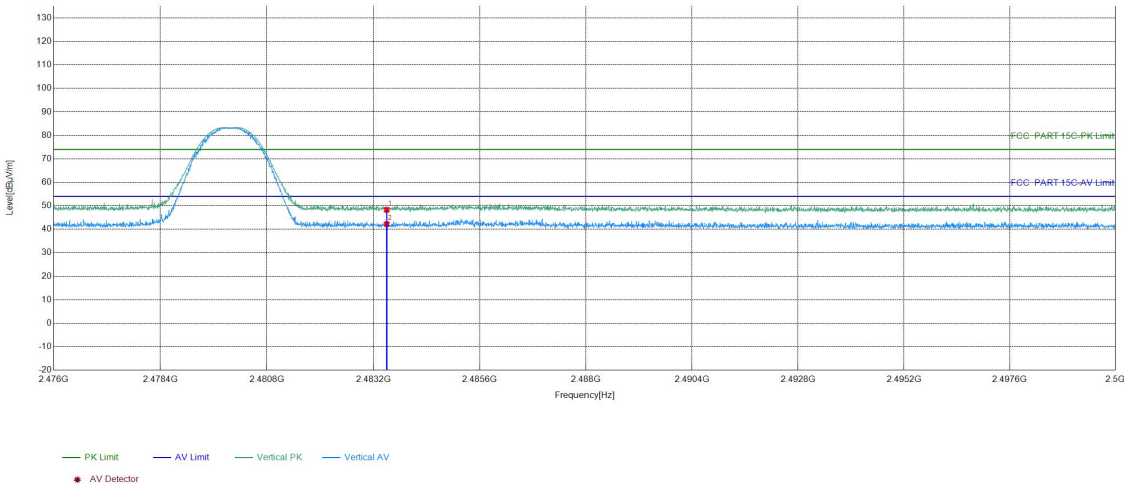

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.98	48.27	74.00	25.73	PASS	Vertical	PK
2	2483.5	16.29	25.90	42.19	54.00	11.81	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

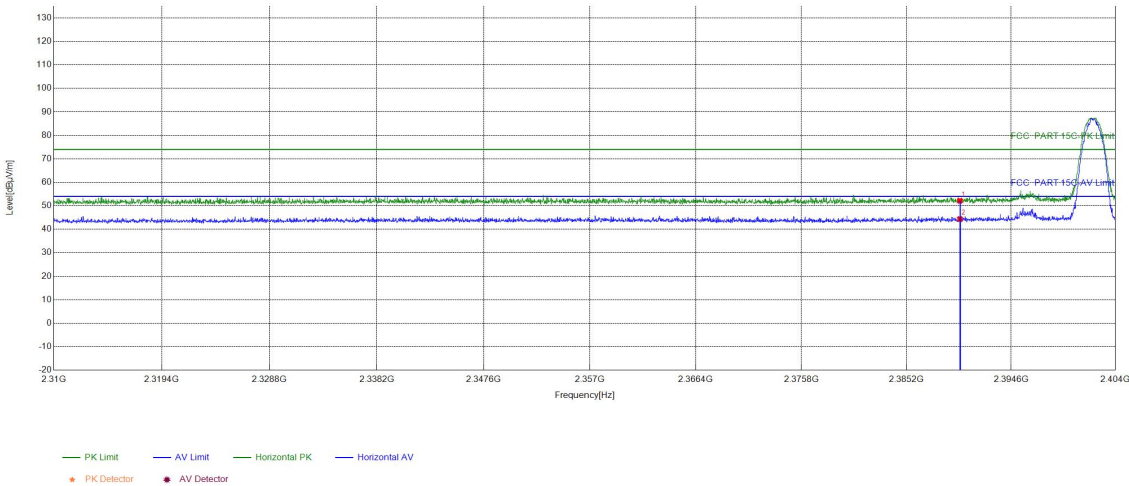

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.19	52.15	74.00	21.85	PASS	Horizontal	PK
2	2390	15.96	28.39	44.35	54.00	9.65	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

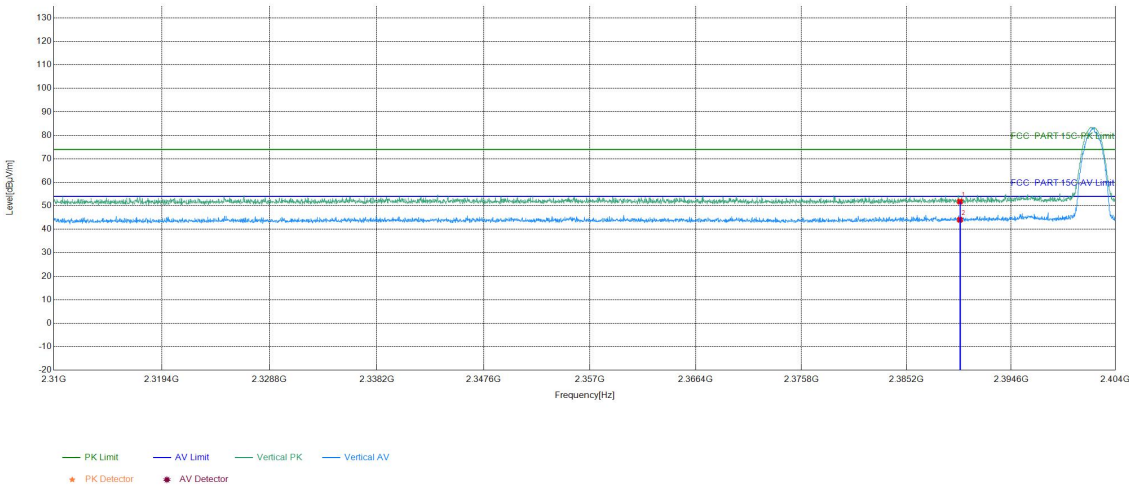

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.85	51.81	74.00	22.19	PASS	Vertical	PK
2	2390	15.96	28.10	44.06	54.00	9.94	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

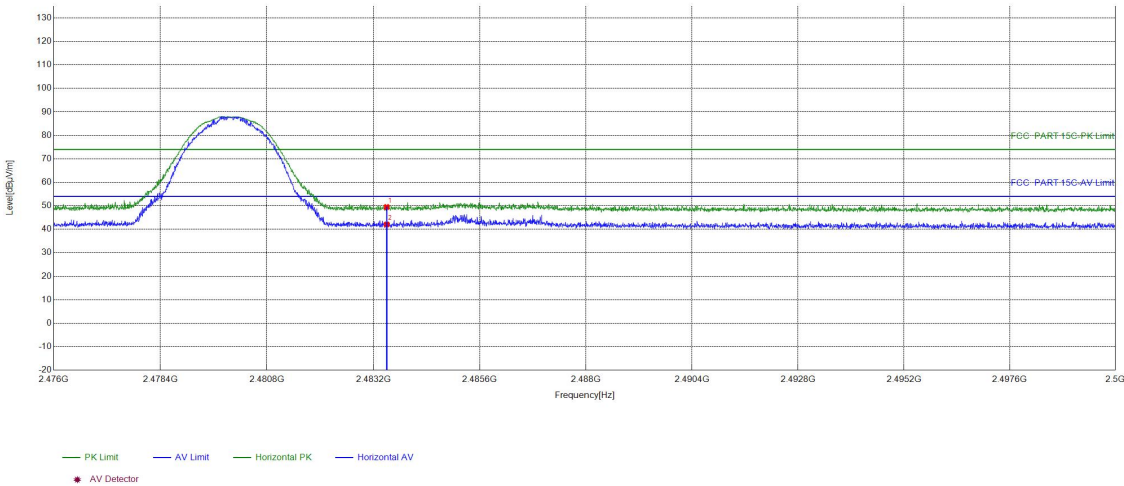

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.19	49.48	74.00	24.52	PASS	Horizontal	PK
2	2483.5	16.29	25.77	42.06	54.00	11.94	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

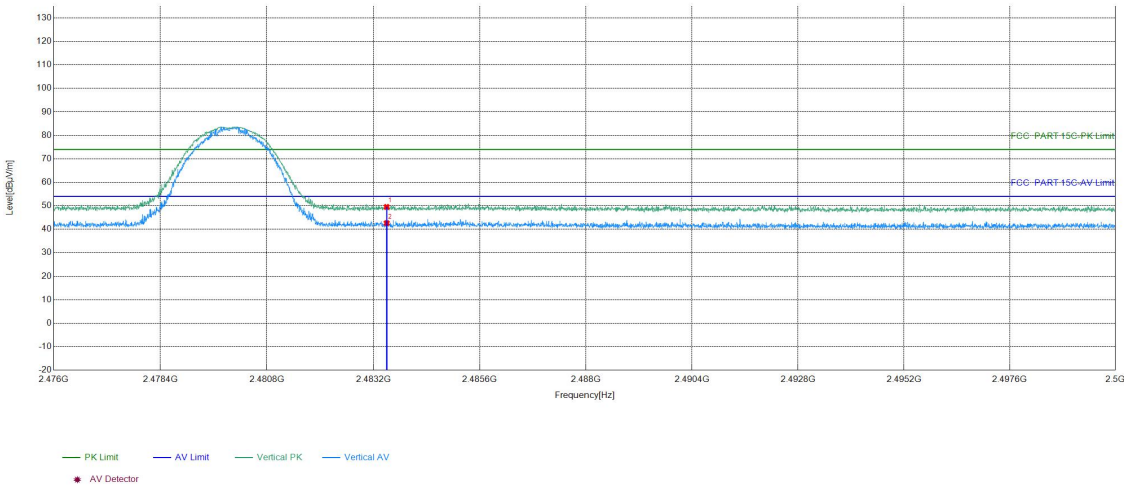

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.23	49.52	74.00	24.48	PASS	Vertical	PK
2	2483.5	16.29	26.33	42.62	54.00	11.38	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

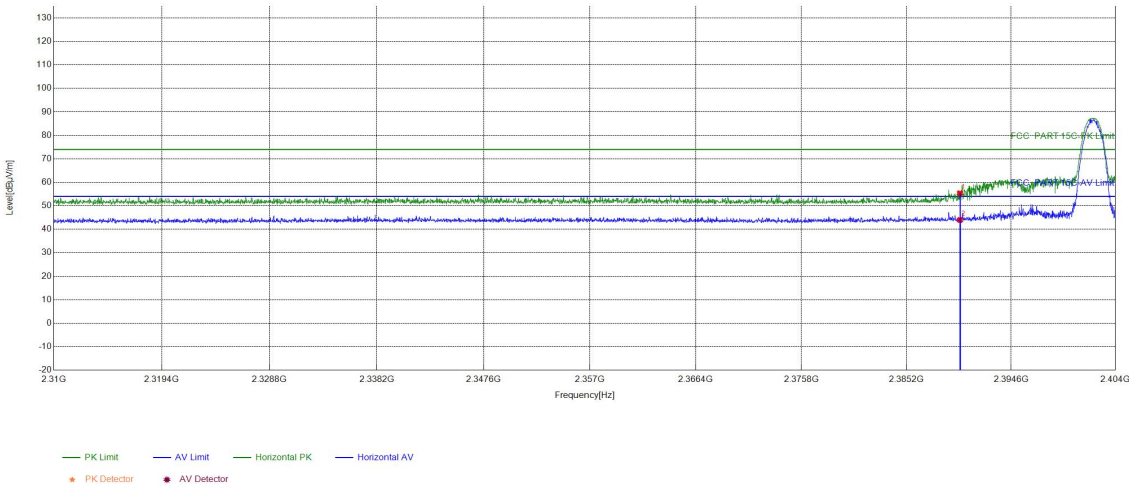

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	39.38	55.34	74.00	18.66	PASS	Horizontal	PK
2	2390	15.96	28.00	43.96	54.00	10.04	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

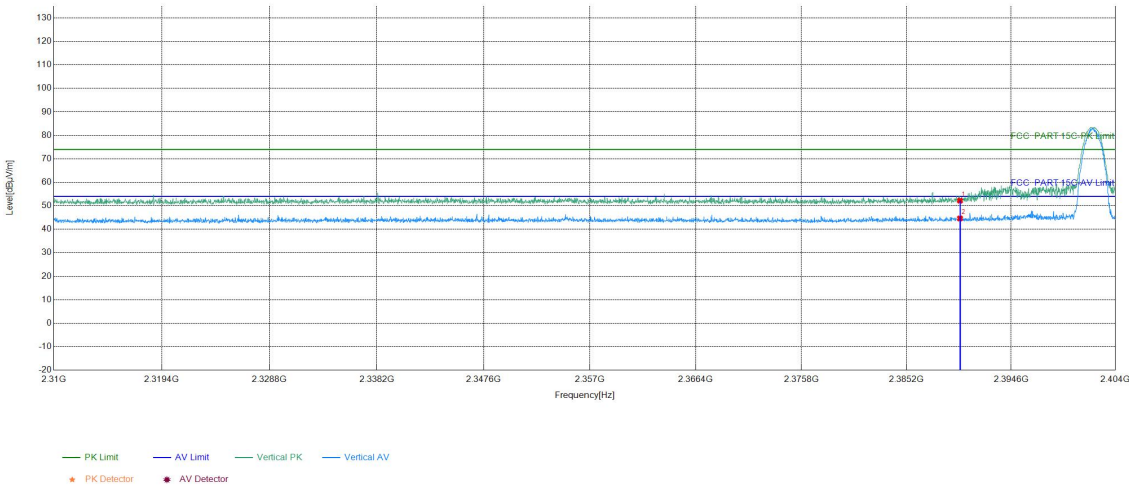

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.24	52.20	74.00	21.80	PASS	Vertical	PK
2	2390	15.96	28.66	44.62	54.00	9.38	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

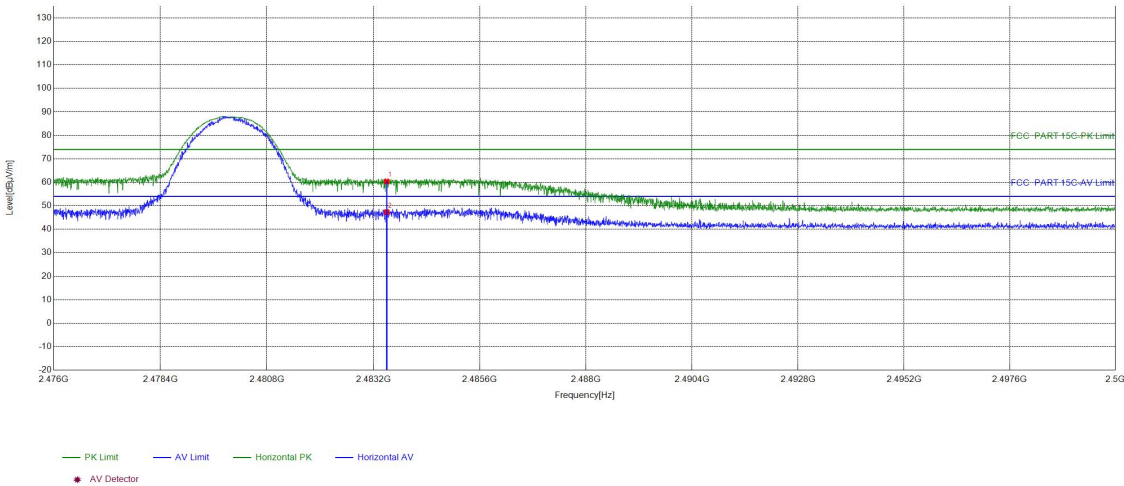

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	44.07	60.36	74.00	13.64	PASS	Horizontal	PK
2	2483.5	16.29	31.03	47.32	54.00	6.68	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480MHz
Remark:	\	Test_Date	2026/7/8

Test Graph

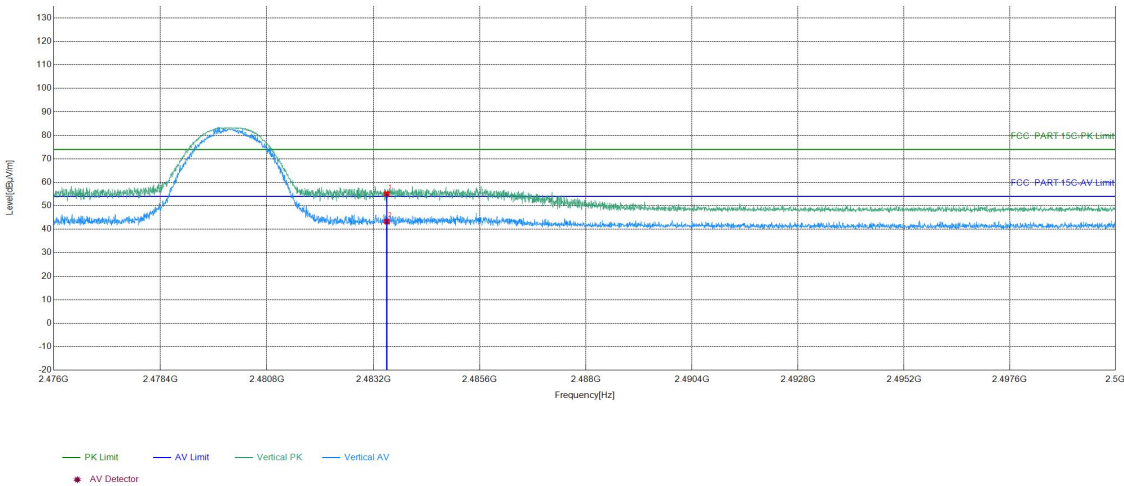

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.81	55.10	74.00	18.90	PASS	Vertical	PK
2	2483.5	16.29	27.01	43.30	54.00	10.70	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S813807

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S813807.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated,the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***