

# FCC Part 15.247

## TEST REPORT

For

### Suzhou Etag-Technology Corporation

Room 236,2/F Ming De Building, No.166 Ren ai Road,Suzhou Industrial  
Park,Suzhou,China

**FCC ID: 2ARJ5-ET0266-82**

|                                                                                                                                                                                                                                                                                                       |                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                | <b>Product Type:</b><br>ESL ( Electronic Shelf Label ) |
| <b>Report Producer :</b> <u>Sandy Luo</u>                                                                                                                                                                                                                                                             |                                                        |
| <b>Report Number :</b> <u>RXZ251216043RF02</u>                                                                                                                                                                                                                                                        |                                                        |
| <b>Report Date :</b> <u>2026-01-29</u>                                                                                                                                                                                                                                                                |                                                        |
| <b>Reviewed By:</b> <u>Andy Shih</u> <i>andy.shih</i>                                                                                                                                                                                                                                                 |                                                        |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp.<br>(New Taipei Laboratory)<br>70, Lane 169, Sec. 2, Datong Road, Xizhi Dist.,<br>New Taipei City 221, Taiwan, R.O.C.<br>Tel: +886 (2) 2647 6898<br>Fax: +886 (2) 2647 6895<br><a href="http://www.baclcorp.com.tw">www.baclcorp.com.tw</a> |                                                        |

## Revision History

| Revision | No.          | Report Number    | Issue Date | Description     | Author/<br>Revised by |
|----------|--------------|------------------|------------|-----------------|-----------------------|
| 0.0      | RXZ251216043 | RXZ251216043RF02 | 2026-01-29 | Original Report | Sandy Luo             |

## **TABLE OF CONTENTS**

|           |                                                                                   |           |
|-----------|-----------------------------------------------------------------------------------|-----------|
| <b>1</b>  | <b>General Information.....</b>                                                   | <b>4</b>  |
| 1.1       | Product Description for Equipment under Test (EUT) .....                          | 4         |
| 1.2       | Objective .....                                                                   | 5         |
| 1.3       | Test Methodology.....                                                             | 5         |
| 1.4       | Statement.....                                                                    | 5         |
| 1.5       | Measurement Uncertainty .....                                                     | 6         |
| 1.6       | Environmental Conditions.....                                                     | 6         |
| 1.7       | Test Facility.....                                                                | 6         |
| <b>2</b>  | <b>System Test Configuration.....</b>                                             | <b>7</b>  |
| 2.1       | Description of Test Configuration.....                                            | 7         |
| 2.2       | EUT Exercise Software .....                                                       | 7         |
| 2.3       | Equipment Modifications .....                                                     | 7         |
| 2.4       | Test Mode.....                                                                    | 7         |
| 2.5       | Support Equipment List and Details.....                                           | 8         |
| 2.6       | External Cable List and Details.....                                              | 8         |
| 2.7       | Block Diagram of Test Setup .....                                                 | 8         |
| 2.8       | Duty Cycle.....                                                                   | 10        |
| <b>3</b>  | <b>Summary of Test Results.....</b>                                               | <b>11</b> |
| <b>4</b>  | <b>Test Equipment List and Details .....</b>                                      | <b>12</b> |
| <b>5</b>  | <b>FCC §15.203 – Antenna Requirements.....</b>                                    | <b>13</b> |
| 5.1       | Applicable Standard .....                                                         | 13        |
| 5.2       | Antenna List and Details .....                                                    | 13        |
| <b>6</b>  | <b>FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions .....</b>               | <b>14</b> |
| 6.1       | Applicable Standard .....                                                         | 14        |
| 6.2       | EUT Setup .....                                                                   | 15        |
| 6.3       | EMI Test Receiver & Spectrum Analyzer Setup.....                                  | 16        |
| 6.4       | Test Procedure.....                                                               | 17        |
| 6.5       | Corrected Factor & Margin Calculation.....                                        | 17        |
| 6.6       | Test Results .....                                                                | 18        |
| <b>7</b>  | <b>FCC §15.247(a)(2) – 6 dB Emission Bandwidth &amp; Occupied Bandwidth .....</b> | <b>31</b> |
| 7.1       | Applicable Standard .....                                                         | 31        |
| 7.2       | Test Procedure.....                                                               | 31        |
| 7.3       | Test Results .....                                                                | 32        |
| <b>8</b>  | <b>FCC §15.247(b)(3) – Maximum Output Power.....</b>                              | <b>39</b> |
| 8.1       | Applicable Standard .....                                                         | 39        |
| 8.2       | Test Procedure.....                                                               | 39        |
| 8.3       | Test Results .....                                                                | 39        |
| <b>9</b>  | <b>FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge .....</b>             | <b>40</b> |
| 9.1       | Applicable Standard .....                                                         | 40        |
| 9.2       | Test Procedure.....                                                               | 40        |
| 9.3       | Test Results .....                                                                | 40        |
| <b>10</b> | <b>FCC §15.247(e) – Power Spectral Density .....</b>                              | <b>43</b> |
| 10.1      | Applicable Standard .....                                                         | 43        |
| 10.2      | Test Procedure.....                                                               | 43        |
| 10.3      | Test Results .....                                                                | 43        |

# 1 General Information

## 1.1 Product Description for Equipment under Test (EUT)

|                                     |                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------|
| Applicant                           | Suzhou Etag-Technology Corporation                                                    |
|                                     | Room 236,2/F Ming De Building, No.166 Ren ai Road,Suzhou Industrial Park,Suzhou,China |
| Brand(Trade) Name                   | ETGtag                                                                                |
| Product (Equipment)                 | ESL ( Electronic Shelf Label )                                                        |
| Main Model Name                     | ET0266-82                                                                             |
| Series Model Name                   | ET0266-5B                                                                             |
| Model Discrepancy                   | Please refer to the difference declaration letter provided by the Applicant.          |
| Frequency Range                     | BLE(1M) / BLE(2M) : 2402 ~ 2480 MHz                                                   |
| Maximum Conducted Peak Output Power | BLE(1M) Mode : -3.11 dBm<br>BLE(2M) Mode : -2.63 dBm                                  |
| Modulation Technique                | BLE(1M) / BLE(2M) : GFSK                                                              |
| Transmit Data Rate                  | BLE(1M) Mode : 1 Mbps<br>BLE(2M) Mode : 2 Mbps                                        |
| Power Operation (Voltage Range)     | 3Vdc from Battery                                                                     |
| Received Date                       | 2025/12/16                                                                            |

\*All measurement and test data in this report was gathered from production sample serial number:  
RXZ251216043-1 (Assigned by BACL, New Taipei Laboratory).

## 1.2 Objective

This report is prepared on behalf of *Suzhou Etag-Technology Corporation* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.4 Statement

Decision Rule: No, (The test results do not include MU judgment)

1. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory)
2. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
3. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
4. The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.
5. Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

## 1.5 Measurement Uncertainty

| Parameter                         |               | Uncertainty |
|-----------------------------------|---------------|-------------|
| AC Mains                          |               | +/- 3.02 dB |
| RF output power, conducted        |               | +/- 0.57 dB |
| Power Spectral Density, conducted |               | +/- 0.60 dB |
| Occupied Bandwidth                |               | +/- 0.09 %  |
| Unwanted Emissions, conducted     |               | +/- 1.09 dB |
| Emissions, radiated               | 9 kHz~30 MHz  | +/- 3.20 dB |
|                                   | 30 MHz~1 GHz  | +/- 3.30 dB |
|                                   | 1 GHz~18 GHz  | +/- 5.14 dB |
|                                   | 18 GHz~40 GHz | +/- 4.75 dB |
| Temperature                       |               | +/- 0.76 °C |
| Humidity                          |               | +/- 0.41 %  |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor *K* with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

## 1.6 Environmental Conditions

| Test Site                                | Test Date             | Temperature (°C) | Relative Humidity (%) | Test Engineer |
|------------------------------------------|-----------------------|------------------|-----------------------|---------------|
| Radiation Spurious Emissions             | 2025/12/18~2025/12/22 | 20.6~22.9        | 59~68                 | Toney         |
| Duty Cycle                               | 2025/12/24            | 25.3             | 51                    | Victor        |
| Conducted Spurious Emissions             | 2025/12/24            | 25.3             | 51                    | Victor        |
| Emission Bandwidth                       | 2025/12/24            | 25.3             | 51                    | Victor        |
| Maximum Output Power                     | 2025/12/24            | 25.3             | 51                    | Victor        |
| 100 kHz Bandwidth of Frequency Band Edge | 2025/12/24            | 25.3             | 51                    | Victor        |
| Power Spectral Density                   | 2025/12/24            | 25.3             | 51                    | Victor        |

## 1.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) to collect test data is located on

☒ 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 221, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3732) and the FCC designation No.TW3732 under the Mutual Recognition Agreement (MRA) in FCC Test.

## 2 System Test Configuration

### 2.1 Description of Test Configuration

For BLE mode, there are totally 40 channels.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | --      | --              |
| 2       | 2406            | --      | --              |
| 3       | 2408            | 37      | 2476            |
| --      | --              | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

For BLE Modes were tested with channel 0, 19 and 39.

### 2.2 EUT Exercise Software

The test software was used “Atmosic RF Tool v1.5.3”

The system was configured for testing in engineering mode, which was provided by Applicant.

| Test Frequency      |        | Low | Middle | High |
|---------------------|--------|-----|--------|------|
| Power Level Setting | BLE 1M | 5   | 5      | 5    |
|                     | BLE 2M | 5   | 5      | 5    |

### 2.3 Equipment Modifications

No modification was made to the EUT.

### 2.4 Test Mode

Full System (model: ET0266-82) for all test item.

## 2.5 Support Equipment List and Details

| Description | Manufacturer | Model Number  |
|-------------|--------------|---------------|
| NB          | DELL         | E6410         |
| Fixture     | GZU          | USB->TTL V2.2 |

## 2.6 External Cable List and Details


N/A

## 2.7 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

### Radiation:


Below 1GHz:

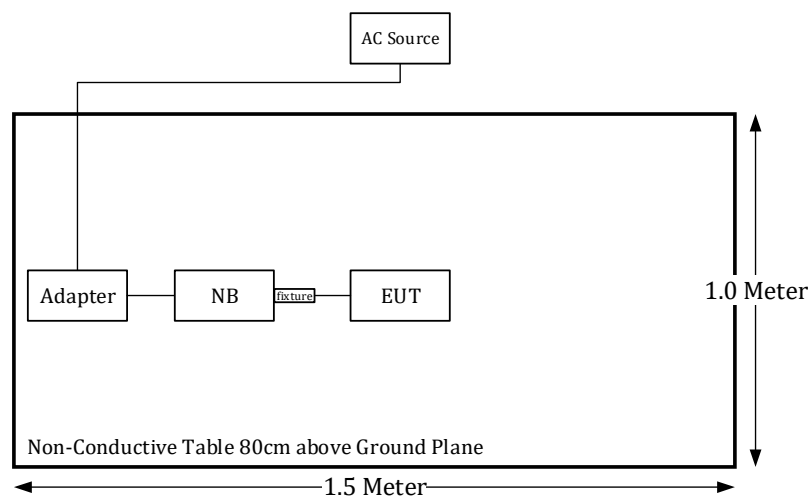

Above 1GHz:

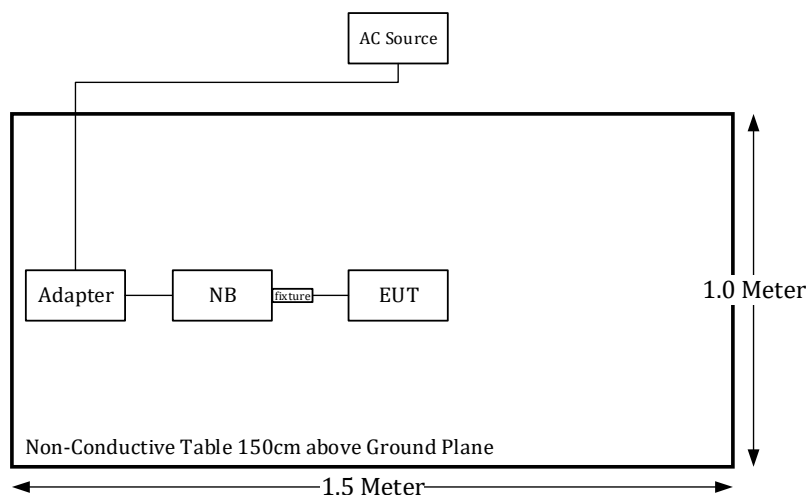

Conducted:

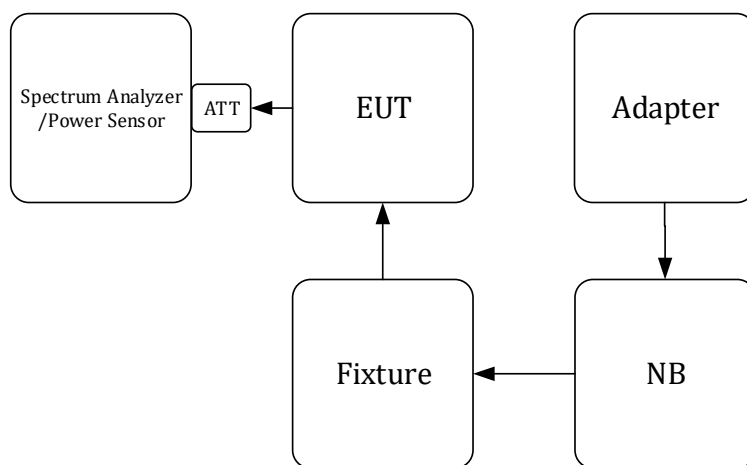


## 2.8 Duty Cycle

The duty cycle as below:


| Radio Mode | Ton (ms) | Toff (ms) | Duty Cycle (%) | 1/T (kHz) | 1/T VBW setting (kHz) |
|------------|----------|-----------|----------------|-----------|-----------------------|
| BLE(1M)    | 0.194    | 0.435     | 31             | 5.15      | 10                    |
| BLE(2M)    | 0.410    | 0.845     | 33             | 2.44      | 3                     |

Please refer to the following plots.

### BLE(1M) Mode

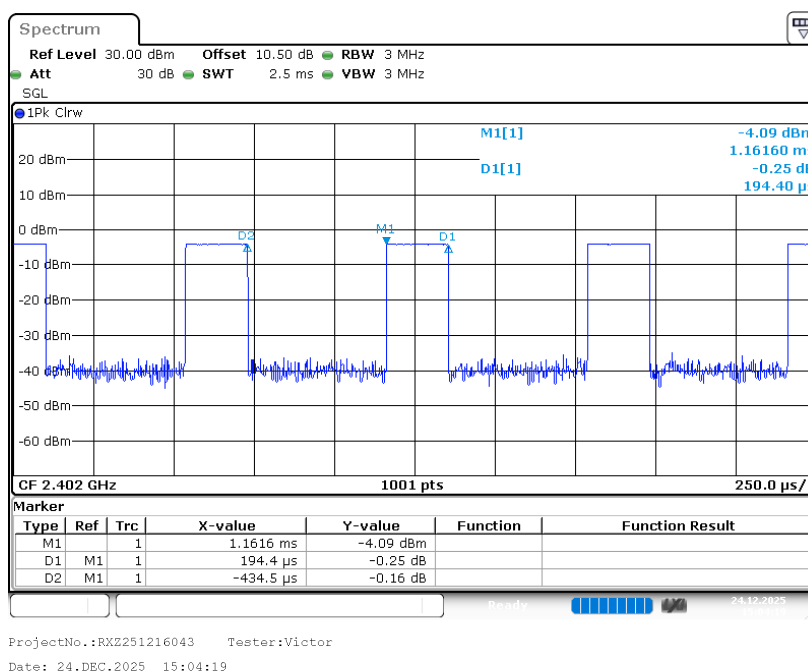

### BLE(2M) Mode

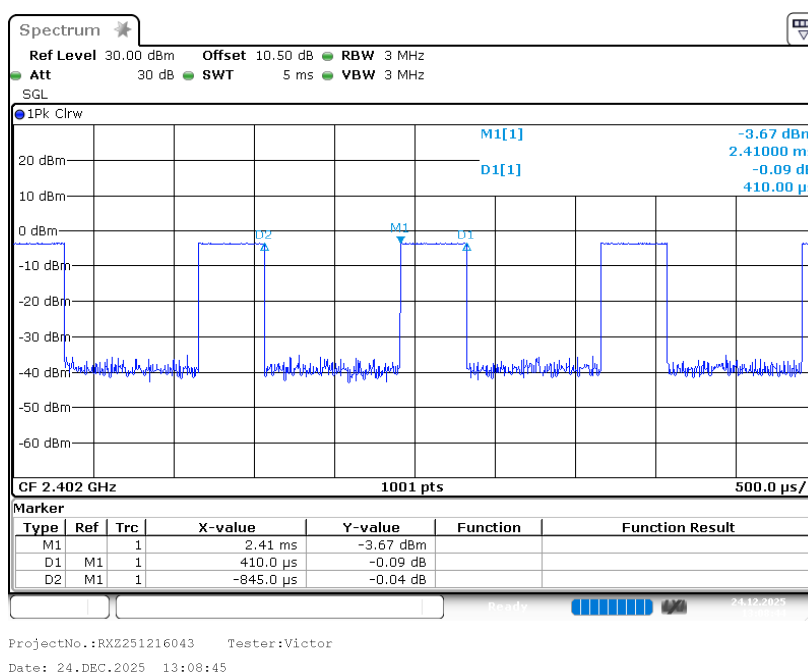

### 3 Summary of Test Results

| FCC Rules                    | Description of Test                      | Results        |
|------------------------------|------------------------------------------|----------------|
| §15.203                      | Antenna Requirement                      | Compliance     |
| §15.207(a)                   | AC Line Conducted Emissions              | Not Applicable |
| §15.205, §15.209, §15.247(d) | Spurious Emissions                       | Compliance     |
| §15.247(a)(2)                | 6 dB Emission Bandwidth                  | Compliance     |
| §15.247(b)(3)                | Maximum Peak Output Power                | Compliance     |
| §15.247(d)                   | 100 kHz Bandwidth of Frequency Band Edge | Compliance     |
| §15.247(e)                   | Power Spectral Density                   | Compliance     |

Not Applicable: The EUT is powered by battery only.

## 4 Test Equipment List and Details

| Description                            | Manufacturer                   | Model                    | Serial Number     | Calibration Date | Calibration Due Date |
|----------------------------------------|--------------------------------|--------------------------|-------------------|------------------|----------------------|
| Radiation 3M Room - Below 1GHz (966-A) |                                |                          |                   |                  |                      |
| Active Loop Antenna                    | ETS-Lindgren                   | 6502                     | 35796             | 2025/3/27        | 2026/3/27            |
| Bilog Antenna with 6 dB Attenuator     | SUNOL SCIENCES & MINI-CIRCUITS | JB6/UNAT-6+              | A050115/1554 2_01 | 2025/1/16        | 2026/1/16            |
| Preamplifier                           | Sonoma                         | 310N                     | 130602            | 2025/6/17        | 2026/6/17            |
| EMI Test Receiver                      | Rohde & Schwar                 | ESR3                     | 102415            | 2025/3/19        | 2026/3/19            |
| Microflex Cable                        | UTIFLEX                        | UFB197C-1-2362-70U-70U   | 225757-001        | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Coaxial Cable                          | UTIFLEX                        | UFB311A-Q-1440-300300    | 220490-006        | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Coaxial Cable                          | COMMATE                        | PEWC                     | 8Dr               | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Cable                                  | EMC                            | EMC105-SM-SM-10000       | 201003            | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Coaxial Cable                          | JUNFLON                        | J12J102248-00-B-5        | AUG-07-15-044     | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Software                               | AUDIX                          | E3                       | 18621a            | N.C.R            | N.C.R                |
| Radiation 3M Room - Above 1GHz (966-A) |                                |                          |                   |                  |                      |
| Horn Antenna                           | ETS-Lindgren                   | 3115                     | 40736             | 2025/5/6         | 2026/5/6             |
| Horn Antenna                           | ETS-Lindgren                   | 3116                     | 62638             | 2025/9/4         | 2026/9/4             |
| Preamplifier                           | Channel                        | ERA-100M-18G-01D1748     | EC2300051         | 2025/4/10        | 2026/4/10            |
| Preamplifier                           | BACL                           | BACL-1313-A1840          | 4011511           | 2025/2/12        | 2026/2/12            |
| Spectrum Analyzer                      | Rohde & Schwarz                | FSV40                    | 101939            | 2025/3/27        | 2026/3/27            |
| Microflex Cable                        | UTIFLEX                        | UFB197C-1-2362-70U-70U   | 225757-001        | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Coaxial Cable                          | UTIFLEX                        | UFB311A-Q-1440-300300    | 220490-006        | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Coaxial Cable                          | COMMATE                        | PEWC                     | 8Dr               | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Cable                                  | EMC                            | EMC105-SM-SM-10000       | 201003            | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Coaxial Cable                          | JUNFLON                        | J12J102248-00-B-5        | AUG-07-15-044     | 2024/12/20       | 2025/12/20           |
|                                        |                                |                          |                   | 2025/12/19       | 2026/12/19           |
| Coaxial Cable                          | ROSNO                          | K1K50-UP0264-K1K50-450CM | 160309-1          | 2025/1/21        | 2026/1/21            |
| Microflex Cable                        | ROSNO                          | K1K50-UP0264-K1K50-80CM  | 160309-2          | 2025/1/21        | 2026/1/21            |
| Band-reject filter                     | Woken                          | STI15-9831               | STI15-9831-1      | 2025/10/17       | 2026/10/17           |
| High-pass filter                       | XINGBOKEJI                     | XBLBQ-GTA54              | 200108-3-2        | 2025/10/17       | 2026/10/17           |
| Software                               | AUDIX                          | E3                       | 18621a            | N.C.R            | N.C.R                |
| Conducted Room                         |                                |                          |                   |                  |                      |
| Spectrum Analyzer                      | Rohde & Schwarz(R&S)           | FSV40                    | 101204            | 2025/6/4         | 2026/6/4             |
| Cable                                  | UTIFLEX                        | UFA210A                  | 9435              | 2025/9/30        | 2026/9/30            |
| Power Sensor                           | Boonton                        | RTP5006                  | 11037             | 2025/5/16        | 2026/5/16            |
| Attenuator                             | MCL                            | BW-S10W5+                | 1419              | 2025/3/6         | 2026/3/6             |

**\*Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements.

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory)

## 5 FCC §15.203 – Antenna Requirements

### 5.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

### 5.2 Antenna List and Details

| Antenna Type | Antenna Gain |
|--------------|--------------|
| Plate        | -1.4 dBi     |

Antenna was permanently attached to the unit.

**Result: Compliance**

## 6 FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions

### 6.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz           |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 – 0.110       | 16.42 – 16.423        | 608 – 614       | 4.5 – 5.15    |
| 0.495 – 0.505       | 16.69475 – 16.69525   | 960 – 1240      | 5.35 – 5.46   |
| 2.1735 – 2.1905     | 16.80425 – 16.80475   | 1300 – 1427     | 7.25 – 7.75   |
| 4.125 – 4.128       | 25.5 – 25.67          | 1435 – 1626.5   | 8.025 – 8.5   |
| 4.17725 – 4.17775   | 37.5 – 38.25          | 1645.5 – 1646.5 | 9.0 – 9.2     |
| 4.20725 – 4.20775   | 73 – 74.6             | 1660 – 1710     | 9.3 – 9.5     |
| 6.215 – 6.218       | 74.8 – 75.2           | 1718.8 – 1722.2 | 10.6 – 12.7   |
| 6.26775 – 6.26825   | 108 – 121.94          | 2200 – 2300     | 13.25 – 13.4  |
| 6.31175 – 6.31225   | 123 – 138             | 2310 – 2390     | 14.47 – 14.5  |
| 8.291 – 8.294       | 149.9 – 150.05        | 2483.5 – 2500   | 15.35 – 16.2  |
| 8.362 – 8.366       | 156.52475 – 156.52525 | 2690 – 2900     | 17.7 – 21.4   |
| 8.37625 – 8.38675   | 156.7 – 156.9         | 3260 – 3267     | 22.01 – 23.12 |
| 8.41425 – 8.41475   | 162.0125 – 167.17     | 3.332 – 3.339   | 23.6 – 24.0   |
| 12.29 – 12.293      | 167.72 – 173.2        | 3.3458 – 3.358  | 31.2 – 31.8   |
| 12.51975 – 12.52025 | 240 – 285             | 3.600 – 4.400   | 36.43 – 36.5  |
| 12.57675 – 12.57725 | 322 – 335.4           |                 | Above 38.6    |
| 13.36 – 13.41       | 399.9 – 410           |                 |               |

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                           |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                            |
| 1.705 - 30.0    | 30                                 | 30                            |
| 30 - 88         | 100**                              | 3                             |
| 88 - 216        | 150**                              | 3                             |
| 216 - 960       | 200**                              | 3                             |
| Above 960       | 500                                | 3                             |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


According to ANSI C63.10-2020, section 5.3.3

Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field, and the emissions to be measured can be detected by the measurement equipment (see 4.3.4). Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. Measurements from 18 GHz to 40 GHz are typically made at distances significantly less than 3 m from the EUT. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements or inverse of linear distance-squared for power-density measurements).


As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## 6.2 EUT Setup


9kHz-30MHz:

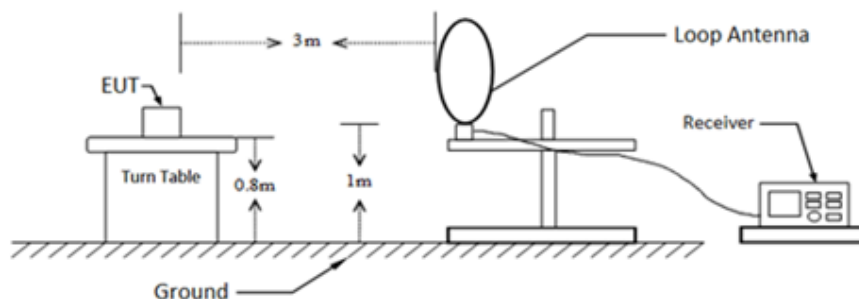


30MHz-1GHz:

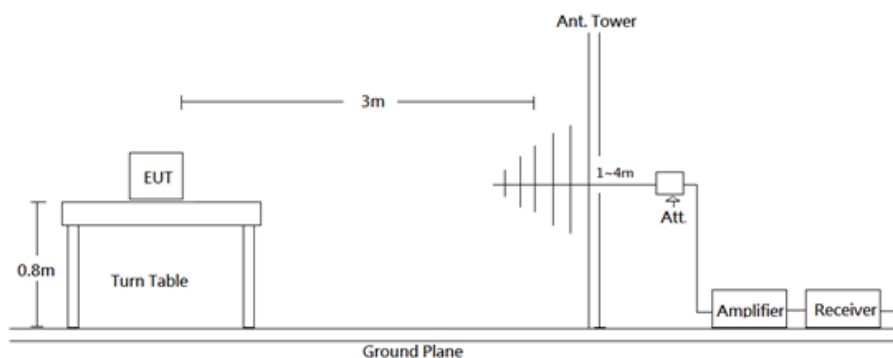

1-18 GHz:

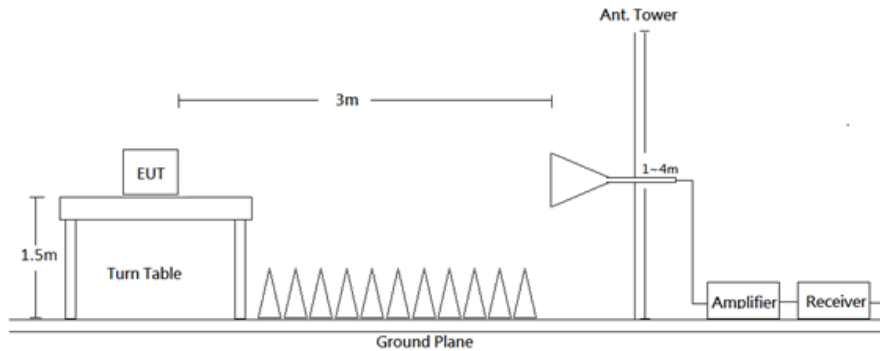

18-26.5 GHz:

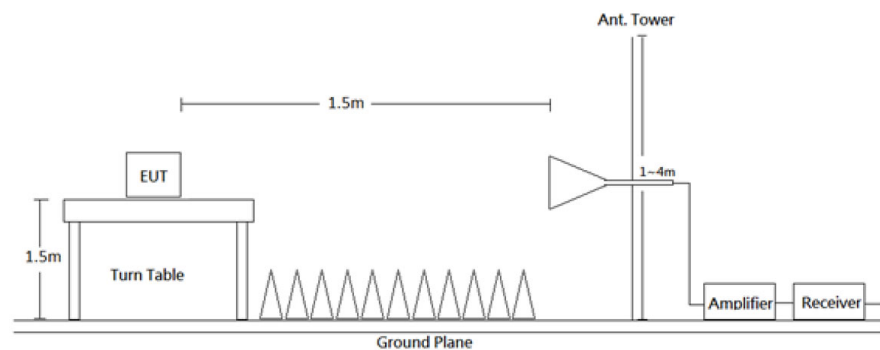

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

### 6.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

| Frequency Range  | RBW                                                         | Video B/W                             | IF B/W  | Duty cycle | Measurement method | Detector |
|------------------|-------------------------------------------------------------|---------------------------------------|---------|------------|--------------------|----------|
| 9 kHz - 150 kHz  | 300 Hz                                                      | 1 kHz                                 | 200 Hz  | /          | QP/AV              | QP/AV    |
| 150 kHz - 30 MHz | 10 kHz                                                      | 30 kHz                                | 9 kHz   | /          | QP/AV              | QP/AV    |
| 30-1000 MHz      | 100 kHz                                                     | 300 kHz                               | /       | /          | PK                 | PK       |
|                  | /                                                           | /                                     | 120 kHz | /          | QP                 | QP       |
| Above 1 GHz      | Pre-scan :                                                  |                                       |         |            |                    |          |
|                  | 1 MHz                                                       | 3 MHz                                 | /       | /          | PK                 | PK       |
|                  | 1 MHz                                                       | 1 kHz                                 | /       | >98%       | Ave                | PK       |
|                  | 1 MHz                                                       | $\geq 1/T_{on}$ , not less than 1 kHz | /       | <98%       | Ave                | PK       |
|                  | Final measurement for emission identified during pre-scan : |                                       |         |            |                    |          |
|                  | 1 MHz                                                       | 3 MHz                                 | /       | /          | PK                 | PK       |
|                  | 1 MHz                                                       | 10 Hz                                 | /       | >98%       | Ave                | PK       |
|                  | 1 MHz                                                       | $\geq 1/T_{on}$                       | /       | <98%       | Ave                | PK       |

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement

## 6.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in Quasi-peak and average detector mode from 9 kHz to 30 MHz, Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

For Conducted Spurious Emissions:

According to ANSI C63.10-2020, section 11.11

- a) Set the frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

## 6.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Level} - \text{Limit}$$

## 6.6 Test Results


Test Mode: Transmitting

(Pre-scan with three orthogonal axis, and worse case as Z axis.)

9kHz-30MHz:

(Worst case is BLE(2M) mode, middle channel)

(Pre-scan using three directional polarities, worst case as parallel.)

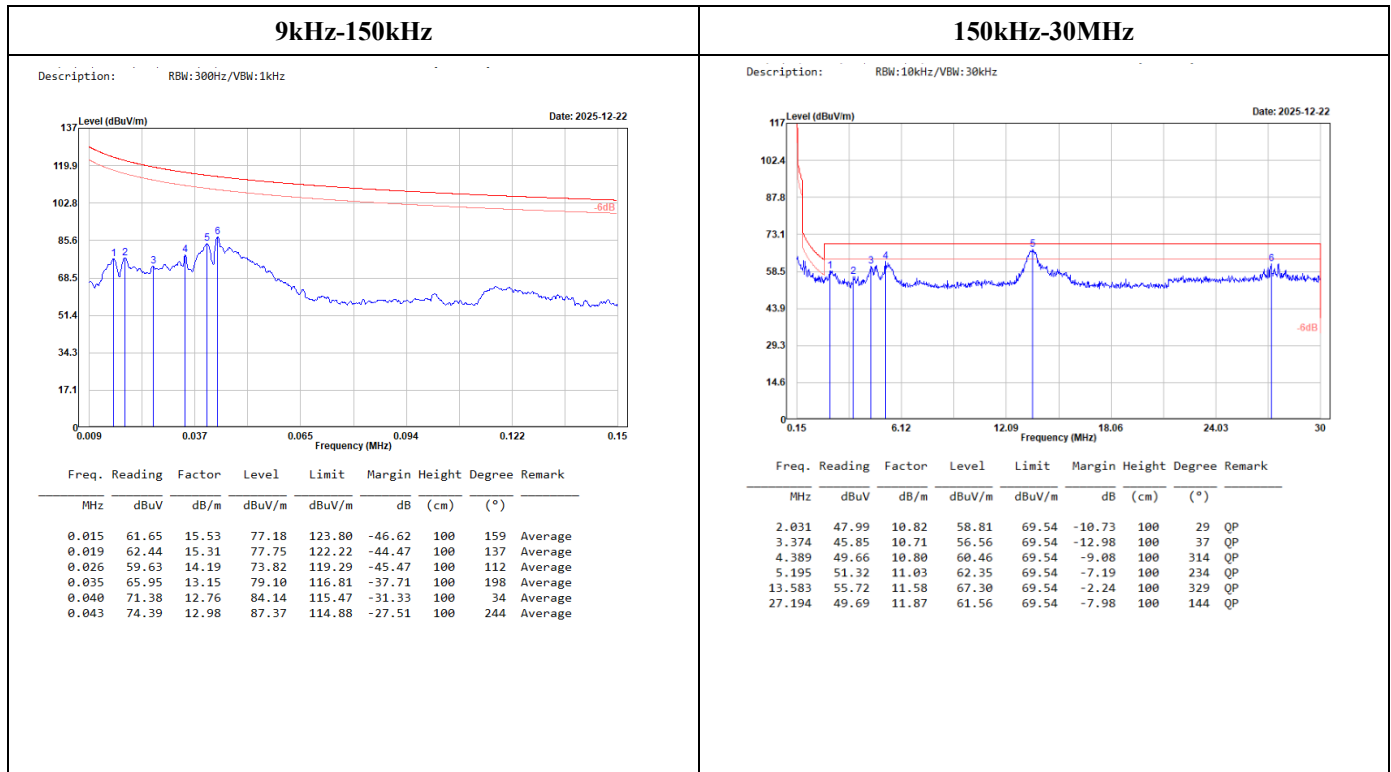


30MHz-1GHz:

Worst case is BLE(2M) mode

## Low channel

## Horizontal


Description: BLE-TX-LOW, RBW:100kHz/VBW:300kHz

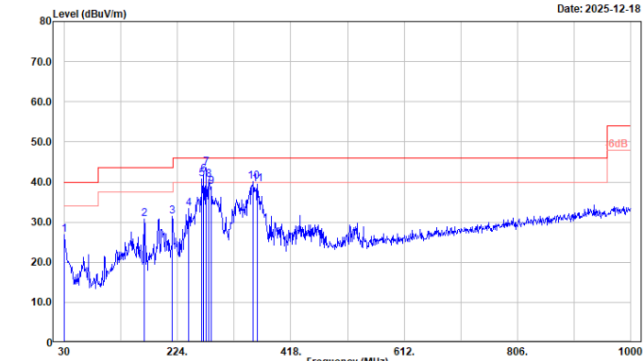

| Freq.   | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark |
|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| MHz     | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |        |
| 30.000  | 31.16   | -4.32  | 26.84  | 40.00  | -13.16 | 100    | 52     | QP     |
| 167.740 | 43.07   | -12.38 | 30.69  | 43.50  | -12.81 | 100    | 315    | QP     |
| 215.270 | 44.70   | -13.35 | 31.35  | 43.50  | -12.15 | 100    | 25     | QP     |
| 243.400 | 45.64   | -12.18 | 33.46  | 46.00  | -12.54 | 100    | 112    | QP     |
| 265.710 | 51.52   | -10.76 | 40.76  | 46.00  | -5.24  | 100    | 48     | QP     |
| 268.620 | 52.30   | -10.51 | 41.79  | 46.00  | -4.21  | 100    | 97     | QP     |
| 272.500 | 53.85   | -10.32 | 43.53  | 46.00  | -2.47  | 100    | 246    | QP     |
| 277.350 | 50.71   | -10.24 | 40.47  | 46.00  | -5.53  | 100    | 182    | QP     |
| 282.200 | 48.95   | -10.11 | 38.84  | 46.00  | -7.16  | 100    | 337    | QP     |
| 353.980 | 49.05   | -8.91  | 40.14  | 46.00  | -5.86  | 100    | 79     | QP     |
| 360.770 | 48.20   | -8.74  | 39.46  | 46.00  | -6.54  | 100    | 67     | QP     |

## Vertical

Description: BLE-TX-LOW, RBW:100kHz/VBW:300kHz

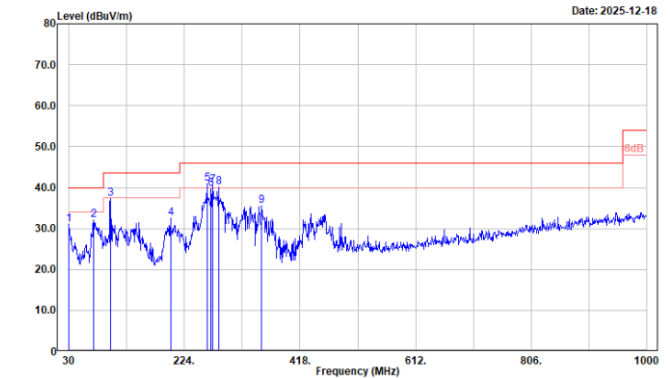


| Freq.   | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark |
|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| MHz     | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |        |
| 30.000  | 35.25   | -4.32  | 30.93  | 40.00  | -9.07  | 100    | 353    | QP     |
| 71.710  | 48.99   | -16.88 | 32.11  | 40.00  | -7.89  | 100    | 322    | QP     |
| 99.840  | 52.06   | -14.77 | 37.29  | 43.50  | -6.21  | 100    | 14     | QP     |
| 200.720 | 43.90   | -11.40 | 32.50  | 43.50  | -11.00 | 100    | 349    | QP     |
| 261.830 | 52.30   | -11.34 | 40.96  | 46.00  | -5.04  | 100    | 326    | QP     |
| 268.620 | 50.09   | -10.51 | 39.58  | 46.00  | -6.42  | 100    | 192    | QP     |
| 271.530 | 50.96   | -10.35 | 40.61  | 46.00  | -5.39  | 100    | 271    | QP     |
| 281.230 | 50.24   | -10.16 | 40.08  | 46.00  | -5.92  | 100    | 33     | QP     |
| 353.980 | 44.40   | -8.91  | 35.49  | 46.00  | -10.51 | 100    | 37     | QP     |

## Middle channel

## Horizontal


Description: BLE-TX-Middle, RBW:100kHz/VBW:300kHz

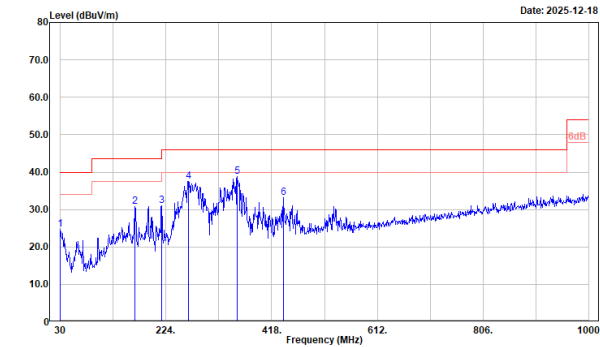

| Freq.   | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark |
|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| MHz     | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |        |
| 30.000  | 29.14   | -4.32  | 24.82  | 40.00  | -15.18 | 100    | 226    | QP     |
| 167.740 | 43.23   | -12.38 | 30.85  | 43.50  | -12.65 | 100    | 353    | QP     |
| 216.240 | 44.34   | -13.31 | 31.03  | 46.00  | -14.97 | 100    | 23     | QP     |
| 264.740 | 48.47   | -10.86 | 37.61  | 46.00  | -8.39  | 100    | 56     | QP     |
| 354.950 | 47.80   | -8.89  | 38.91  | 46.00  | -7.09  | 100    | 71     | QP     |
| 439.340 | 39.18   | -5.97  | 33.21  | 46.00  | -12.79 | 100    | 320    | QP     |

## Vertical

Description: BLE-TX-Middle, RBW:100kHz/VBW:300kHz

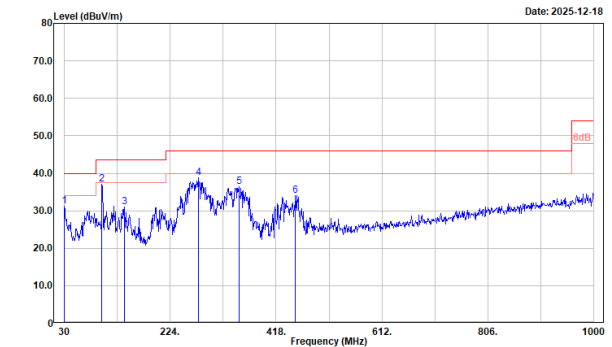


| Freq.   | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark |
|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| MHz     | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |        |
| 30.000  | 35.47   | -4.32  | 31.15  | 40.00  | -8.85  | 100    | 1      | QP     |
| 98.870  | 52.06   | -15.07 | 36.99  | 43.50  | -6.51  | 100    | 77     | QP     |
| 140.580 | 42.31   | -11.28 | 31.03  | 43.50  | -12.47 | 100    | 48     | QP     |
| 275.410 | 49.01   | -10.25 | 38.76  | 46.00  | -7.24  | 100    | 320    | QP     |
| 350.100 | 45.51   | -9.00  | 36.51  | 46.00  | -9.49  | 100    | 48     | QP     |
| 453.890 | 39.70   | -5.70  | 34.00  | 46.00  | -12.00 | 100    | 17     | QP     |

High channel

Horizontal


Description: BLE-TX-Hight, RBW:100kHz/VBW:300kHz

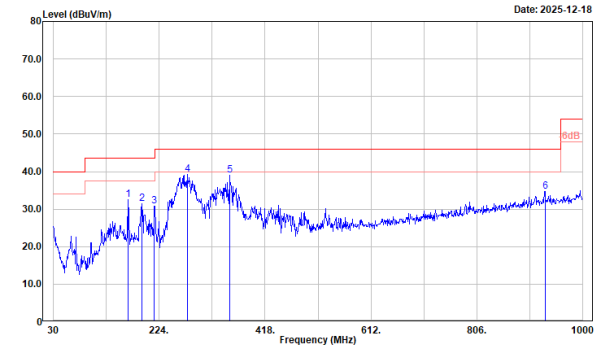

| Freq.   | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark |
|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| MHz     | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |        |
| 167.740 | 44.84   | -12.38 | 32.46  | 43.50  | -11.04 | 100    | 93     | QP     |
| 191.990 | 44.22   | -12.72 | 31.50  | 43.50  | -12.00 | 100    | 140    | QP     |
| 215.270 | 44.07   | -13.35 | 30.72  | 43.50  | -12.78 | 100    | 144    | QP     |
| 275.410 | 49.47   | -10.25 | 39.22  | 46.00  | -6.78  | 100    | 120    | QP     |
| 353.010 | 47.93   | -8.93  | 39.00  | 46.00  | -7.00  | 100    | 79     | QP     |
| 931.130 | 31.40   | 3.28   | 34.68  | 46.00  | -11.32 | 100    | 347    | QP     |

Vertical

Description: BLE-TX-Hight, RBW:100kHz/VBW:300kHz

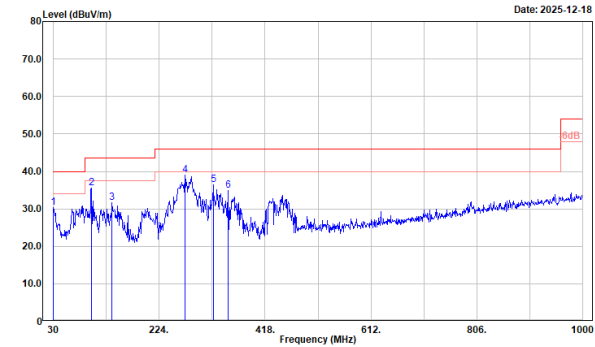

| Freq.   | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark |
|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| MHz     | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |        |
| 30.000  | 34.58   | -4.32  | 30.26  | 40.00  | -9.74  | 100    | 106    | QP     |
| 99.840  | 50.24   | -14.77 | 35.47  | 43.50  | -8.03  | 100    | 344    | QP     |
| 137.670 | 42.80   | -11.20 | 31.60  | 43.50  | -11.90 | 100    | 25     | QP     |
| 271.530 | 49.35   | -10.35 | 39.00  | 46.00  | -7.00  | 100    | 162    | QP     |
| 322.940 | 45.85   | -9.43  | 36.42  | 46.00  | -9.58  | 100    | 317    | QP     |
| 351.070 | 43.80   | -8.98  | 34.82  | 46.00  | -11.18 | 100    | 72     | QP     |

Level = Reading + Factor.  
Margin = Level – Limit.  
Factor = Antenna Factor + Cable Loss – Amplifier Gain.


## Band-Edge:

## BLE(1M) Mode

## Low channel

## Horizontal


Description: BLE\_1M-TX-2402,Peak RBW:1MHz/VBW:3MHz,Avg RBW:1MHz/VBW:10kHz

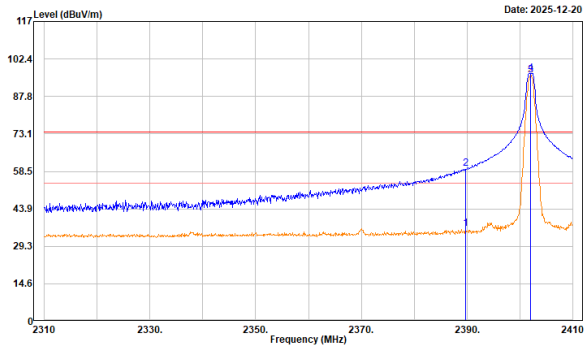

| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2389.800 | 46.98   | -10.72 | 36.26  | 54.00  | -17.74 | 155    | 180    | Average |
| 2389.800 | 70.25   | -10.72 | 59.53  | 74.00  | -14.47 | 155    | 180    | Peak    |
| 2402.000 | 106.76  | -10.71 | 96.05  |        |        | 155    | 180    | Average |
| 2402.000 | 107.42  | -10.71 | 96.71  |        |        | 155    | 180    | Peak    |

## Vertical

Description: BLE\_1M-TX-2402,Peak RBW:1MHz/VBW:3MHz,Avg RBW:1MHz/VBW:10kHz

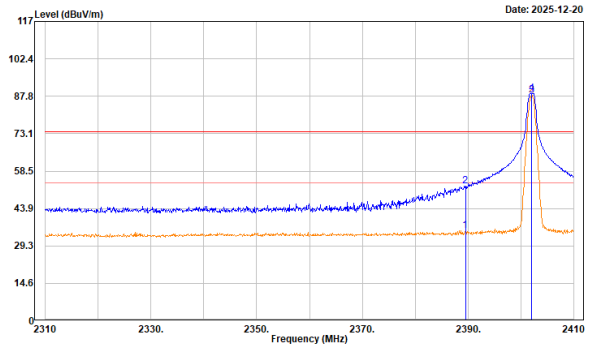


| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2389.500 | 45.86   | -10.73 | 35.13  | 54.00  | -18.87 | 313    | 341    | Average |
| 2389.500 | 63.49   | -10.73 | 52.76  | 74.00  | -21.24 | 313    | 341    | Peak    |
| 2402.000 | 98.83   | -10.71 | 88.12  |        |        | 313    | 341    | Average |
| 2402.000 | 99.50   | -10.71 | 88.79  |        |        | 313    | 341    | Peak    |

## High channel

## Horizontal


Description: BLE\_1M-TX-2480,Peak RBW:1MHz/VBW:3MHz,Avg RBW:1MHz/VBW:10kHz

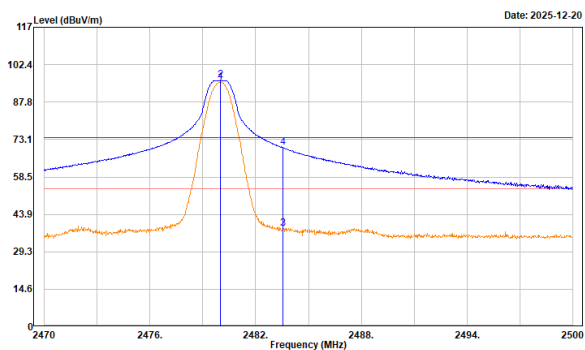

| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2480.000 | 105.68  | -10.17 | 95.51  |        |        | 118    | 177    | Average |
| 2480.000 | 106.40  | -10.17 | 96.23  |        |        | 118    | 177    | Peak    |
| 2483.560 | 48.43   | -10.12 | 38.31  | 54.00  | -15.69 | 118    | 177    | Average |
| 2483.560 | 80.12   | -10.12 | 70.00  | 74.00  | -4.00  | 118    | 177    | Peak    |

## Vertical

Description: BLE\_1M-TX-2480,Peak RBW:1MHz/VBW:3MHz,Avg RBW:1MHz/VBW:10kHz

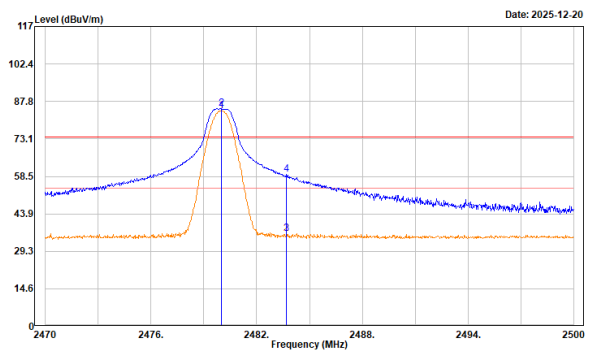


| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2480.000 | 94.27   | -10.17 | 84.10  |        |        | 100    | 109    | Average |
| 2480.000 | 95.04   | -10.17 | 84.87  |        |        | 100    | 109    | Peak    |
| 2483.680 | 46.34   | -10.12 | 36.22  | 54.00  | -17.78 | 100    | 109    | Average |
| 2483.680 | 69.27   | -10.12 | 59.15  | 74.00  | -14.85 | 100    | 109    | Peak    |

## BLE(2M) Mode

## Low channel

## Horizontal


Description: BLE\_2M-TX-2402, Peak RBW: 1MHz/VBW: 3MHz, Avg RBW: 1MHz/VBW: 3kHz

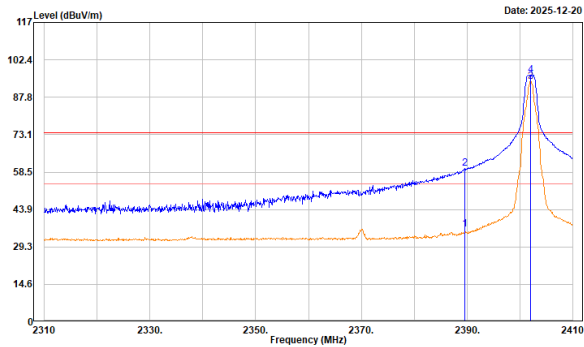

| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2389.600 | 46.76   | -10.73 | 36.03  | 54.00  | -17.97 | 148    | 180    | Average |
| 2389.600 | 70.51   | -10.73 | 59.78  | 74.00  | -14.22 | 148    | 180    | Peak    |
| 2402.000 | 104.68  | -10.71 | 93.97  |        |        | 148    | 180    | Average |
| 2402.000 | 107.16  | -10.71 | 96.45  |        |        | 148    | 180    | Peak    |

## Vertical

Description: BLE\_2M-TX-2402, Peak RBW: 1MHz/VBW: 3MHz, Avg RBW: 1MHz/VBW: 3kHz

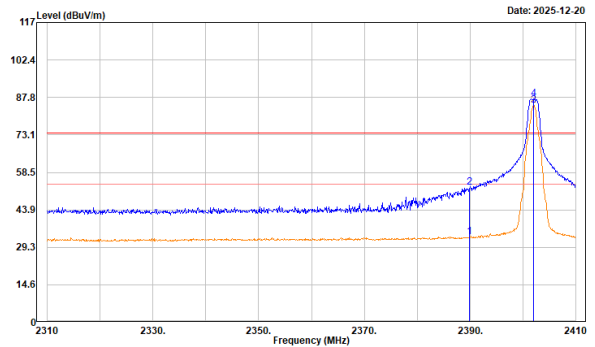


| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2389.890 | 44.00   | -10.72 | 33.28  | 54.00  | -20.72 | 301    | 107    | Average |
| 2389.890 | 63.22   | -10.72 | 52.50  | 74.00  | -21.50 | 301    | 107    | Peak    |
| 2402.000 | 95.33   | -10.71 | 84.62  |        |        | 301    | 107    | Average |
| 2402.000 | 97.86   | -10.71 | 87.15  |        |        | 301    | 107    | Peak    |

## High channel

## Horizontal


Description: BLE\_2M-TX-2480, Peak RBW: 1MHz/VBW: 3MHz, Avg RBW: 1MHz/VBW: 3kHz

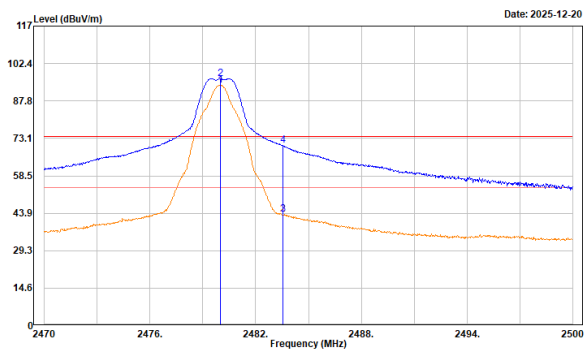

| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2480.000 | 104.06  | -10.17 | 93.89  |        |        | 116    | 177    | Average |
| 2480.000 | 106.57  | -10.17 | 96.40  |        |        | 116    | 177    | Peak    |
| 2483.530 | 53.62   | -10.12 | 43.50  | 54.00  | -10.50 | 116    | 177    | Average |
| 2483.530 | 80.49   | -10.12 | 70.37  | 74.00  | -3.63  | 116    | 177    | Peak    |

## Vertical


Description: BLE\_2M-TX-2480, Peak RBW: 1MHz/VBW: 3MHz, Avg RBW: 1MHz/VBW: 3kHz

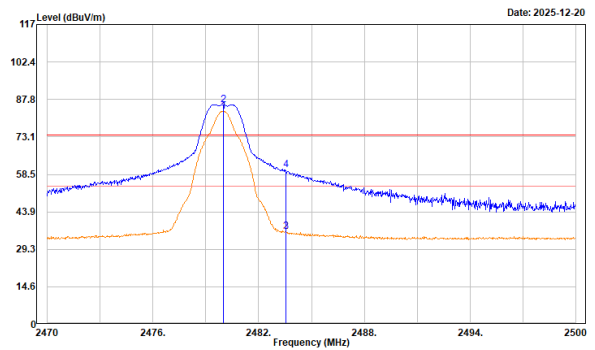


| Freq.    | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
|----------|---------|--------|--------|--------|--------|--------|--------|---------|
| MHz      | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 2480.000 | 93.28   | -10.17 | 83.11  |        |        | 100    | 106    | Average |
| 2480.000 | 95.87   | -10.17 | 85.70  |        |        | 100    | 106    | Peak    |
| 2483.570 | 46.38   | -10.12 | 36.26  | 54.00  | -17.74 | 100    | 106    | Average |
| 2483.570 | 70.26   | -10.12 | 60.14  | 74.00  | -13.86 | 100    | 106    | Peak    |

1GHz-18GHz:

(Worst case is BLE(1M) mode, middle channel)

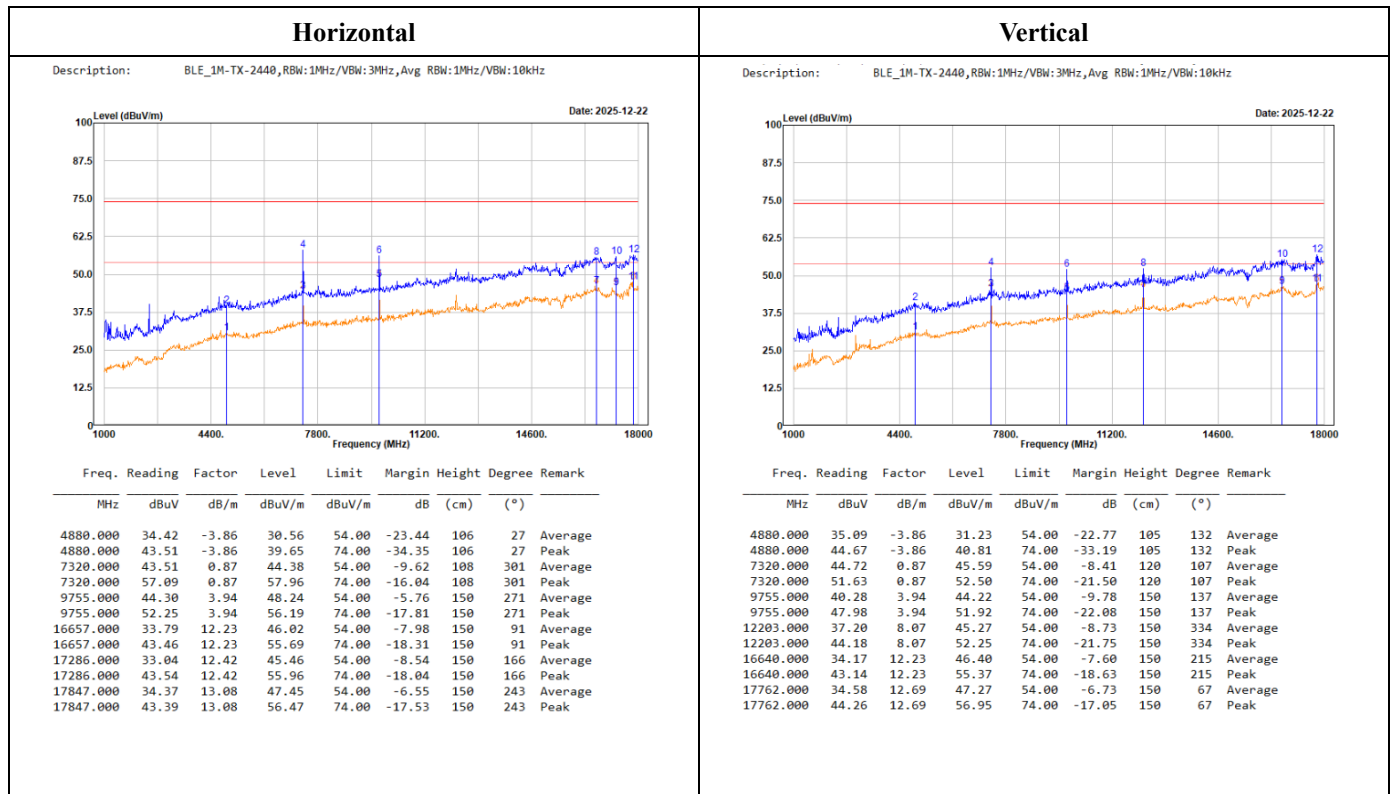

(Worst case is BLE(2M) mode, High channel)

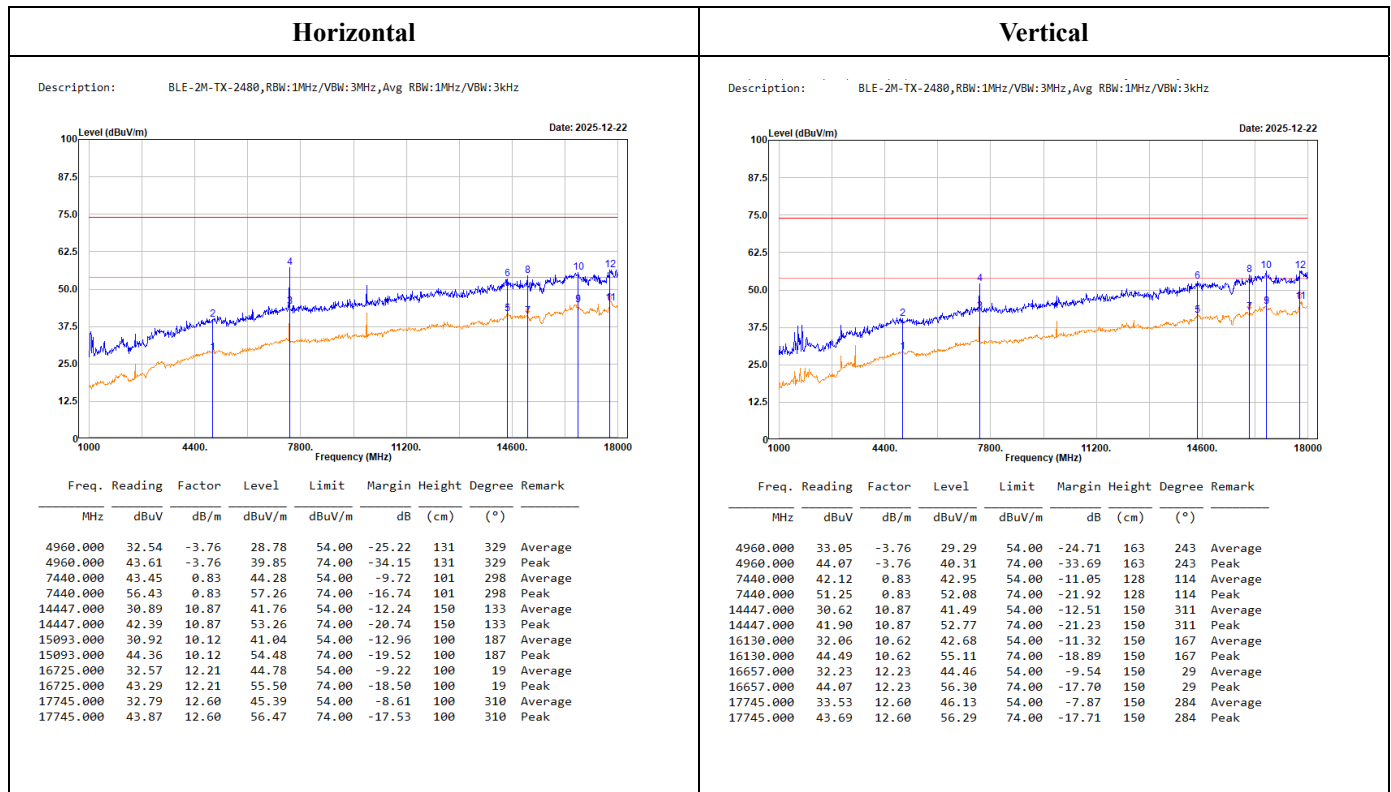


Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

(New Taipei Laboratory)

18GHz-26.5GHz:

(Worst case is BLE(2M) mode, middle channel)

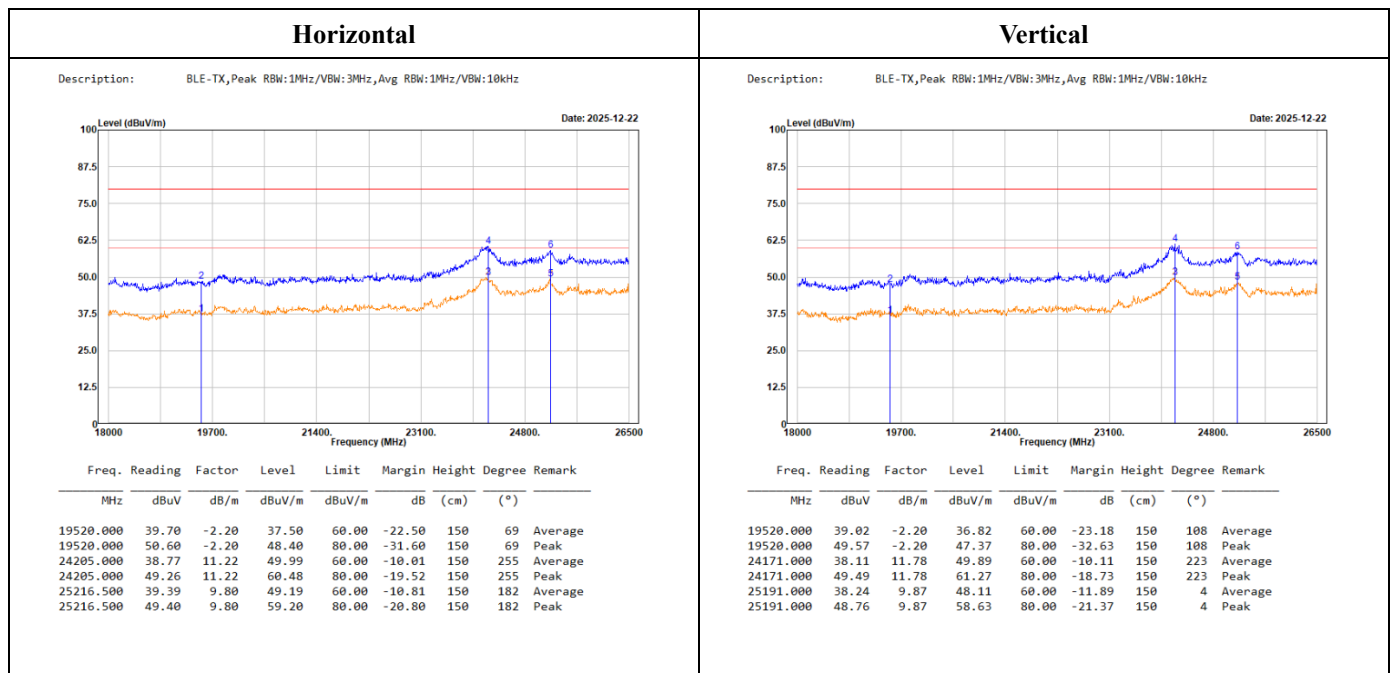

Level = Reading + Factor.

Margin = Level - Limit.

Factor = Antenna Factor + Cable Loss - Amplifier Gain.

For 18-26.5GHz Convert the test distance limit of 3 meters to a limit of 1.5 meter:

Conversion factor =  $20 \log (1.5\text{m}/3\text{m}) = 6 \text{ dB}$ ,Average Limit =  $54 + 6 = 60 \text{ dBuV/m@1.5m}$ , Peak Limit =  $60 + 20 = 80 \text{ dBuV/m@1.5m}$

Above 1GHz

BLE 1M Mode:

| Low channel |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
|-------------|---------|--------|--------|--------|--------|--------|--------|---------|-----------|---------|--------|--------|--------|--------|--------|--------|---------|
| Horizontal  |         |        |        |        |        |        |        |         | Vertical  |         |        |        |        |        |        |        |         |
|             |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
| Freq.       | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  | Freq.     | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
| MHz         | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         | MHz       | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 4804.000    | 34.07   | -4.02  | 30.05  | 54.00  | -23.95 | 113    | 28     | Average | 4804.000  | 34.76   | -4.02  | 30.74  | 54.00  | -23.26 | 177    | 143    | Average |
| 4804.000    | 42.92   | -4.02  | 38.90  | 74.00  | -35.10 | 113    | 28     | Peak    | 4804.000  | 43.91   | -4.02  | 39.89  | 74.00  | -34.11 | 177    | 143    | Peak    |
| 7206.000    | 42.17   | 0.42   | 42.59  | 54.00  | -11.41 | 114    | 275    | Average | 7206.000  | 43.66   | 0.42   | 44.08  | 54.00  | -9.92  | 319    | 56     | Average |
| 7206.000    | 55.41   | 0.42   | 55.83  | 74.00  | -18.17 | 114    | 275    | Peak    | 7206.000  | 51.35   | 0.42   | 51.77  | 74.00  | -22.23 | 319    | 56     | Peak    |
| 14413.000   | 33.68   | 10.67  | 44.35  | 54.00  | -9.65  | 150    | 36     | Average | 14736.000 | 31.93   | 10.67  | 42.60  | 54.00  | -11.40 | 150    | 37     | Average |
| 14413.000   | 43.63   | 10.67  | 54.30  | 74.00  | -19.70 | 150    | 36     | Peak    | 14736.000 | 43.36   | 10.67  | 54.03  | 74.00  | -19.97 | 150    | 37     | Peak    |
| 15739.000   | 35.79   | 8.89   | 44.68  | 54.00  | -9.32  | 150    | 244    | Average | 15365.000 | 33.87   | 8.61   | 42.48  | 54.00  | -11.52 | 150    | 182    | Average |
| 15739.000   | 44.81   | 8.89   | 53.70  | 74.00  | -20.30 | 150    | 244    | Peak    | 15365.000 | 44.87   | 8.61   | 53.48  | 74.00  | -20.52 | 150    | 182    | Peak    |
| 16827.000   | 34.72   | 11.87  | 46.59  | 54.00  | -7.41  | 150    | 137    | Average | 16657.000 | 33.61   | 12.23  | 45.84  | 54.00  | -8.16  | 150    | 243    | Average |
| 16827.000   | 43.57   | 11.87  | 55.44  | 74.00  | -18.56 | 150    | 137    | Peak    | 16657.000 | 44.37   | 12.23  | 56.60  | 74.00  | -17.40 | 150    | 243    | Peak    |
| 17813.000   | 34.30   | 12.99  | 47.29  | 54.00  | -6.71  | 150    | 26     | Average | 17796.000 | 34.06   | 12.93  | 46.99  | 54.00  | -7.01  | 150    | 311    | Average |
| 17813.000   | 44.45   | 12.99  | 57.44  | 74.00  | -16.56 | 150    | 26     | Peak    | 17796.000 | 44.02   | 12.93  | 56.95  | 74.00  | -17.05 | 150    | 311    | Peak    |

| Middle channel |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
|----------------|---------|--------|--------|--------|--------|--------|--------|---------|-----------|---------|--------|--------|--------|--------|--------|--------|---------|
| Horizontal     |         |        |        |        |        |        |        |         | Vertical  |         |        |        |        |        |        |        |         |
|                |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
| Freq.          | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  | Freq.     | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
| MHz            | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         | MHz       | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 4880.000       | 34.42   | -3.86  | 30.56  | 54.00  | -23.44 | 106    | 27     | Average | 4880.000  | 35.09   | -3.86  | 31.23  | 54.00  | -22.77 | 105    | 132    | Average |
| 4880.000       | 43.51   | -3.86  | 39.65  | 74.00  | -34.35 | 106    | 27     | Peak    | 4880.000  | 44.67   | -3.86  | 40.81  | 74.00  | -33.19 | 105    | 132    | Peak    |
| 7320.000       | 43.51   | 0.87   | 44.38  | 54.00  | -9.62  | 108    | 301    | Average | 7320.000  | 44.72   | 0.87   | 45.59  | 54.00  | -8.41  | 120    | 107    | Average |
| 7320.000       | 57.09   | 0.87   | 57.96  | 74.00  | -16.04 | 108    | 301    | Peak    | 7320.000  | 51.63   | 0.87   | 52.50  | 74.00  | -21.50 | 120    | 107    | Peak    |
| 9755.000       | 44.30   | 3.94   | 48.24  | 54.00  | -5.76  | 150    | 271    | Average | 9755.000  | 40.28   | 3.94   | 44.22  | 54.00  | -9.78  | 150    | 137    | Average |
| 9755.000       | 52.25   | 3.94   | 56.19  | 74.00  | -17.81 | 150    | 271    | Peak    | 9755.000  | 47.98   | 3.94   | 51.92  | 74.00  | -22.08 | 150    | 137    | Peak    |
| 16657.000      | 33.79   | 12.23  | 46.02  | 54.00  | -7.98  | 150    | 91     | Average | 12203.000 | 37.20   | 8.07   | 45.27  | 54.00  | -8.73  | 150    | 334    | Average |
| 16657.000      | 43.46   | 12.23  | 55.69  | 74.00  | -18.31 | 150    | 91     | Peak    | 12203.000 | 44.18   | 8.07   | 52.25  | 74.00  | -21.75 | 150    | 334    | Peak    |
| 17286.000      | 33.04   | 12.42  | 45.46  | 54.00  | -8.54  | 150    | 166    | Average | 16640.000 | 34.17   | 12.23  | 46.40  | 54.00  | -7.60  | 150    | 215    | Average |
| 17286.000      | 43.54   | 12.42  | 55.96  | 74.00  | -18.04 | 150    | 166    | Peak    | 16640.000 | 43.14   | 12.23  | 55.37  | 74.00  | -18.63 | 150    | 215    | Peak    |
| 17847.000      | 34.37   | 13.08  | 47.45  | 54.00  | -6.55  | 150    | 243    | Average | 17762.000 | 34.58   | 12.69  | 47.27  | 54.00  | -6.73  | 150    | 67     | Average |
| 17847.000      | 43.39   | 13.08  | 56.47  | 74.00  | -17.53 | 150    | 243    | Peak    | 17762.000 | 44.26   | 12.69  | 56.95  | 74.00  | -17.05 | 150    | 67     | Peak    |

| High channel |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
|--------------|---------|--------|--------|--------|--------|--------|--------|---------|-----------|---------|--------|--------|--------|--------|--------|--------|---------|
| Horizontal   |         |        |        |        |        |        |        |         | Vertical  |         |        |        |        |        |        |        |         |
|              |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
| Freq.        | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  | Freq.     | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
| MHz          | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         | MHz       | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 4960.000     | 36.70   | -3.76  | 32.94  | 54.00  | -21.06 | 100    | 31     | Average | 4960.000  | 34.29   | -3.76  | 30.53  | 54.00  | -23.47 | 267    | 286    | Average |
| 4960.000     | 44.37   | -3.76  | 40.61  | 74.00  | -33.39 | 100    | 31     | Peak    | 4960.000  | 43.98   | -3.76  | 40.22  | 74.00  | -33.78 | 267    | 286    | Peak    |
| 7440.000     | 43.95   | 0.83   | 44.78  | 54.00  | -9.22  | 107    | 269    | Average | 7440.000  | 44.60   | 0.83   | 45.43  | 54.00  | -8.57  | 154    | 104    | Average |
| 7440.000     | 56.85   | 0.83   | 57.68  | 74.00  | -16.32 | 107    | 269    | Peak    | 7440.000  | 50.99   | 0.83   | 51.82  | 74.00  | -22.18 | 154    | 104    | Peak    |
| 14872.000    | 32.98   | 10.37  | 43.35  | 54.00  | -10.65 | 150    | 37     | Average | 9925.000  | 31.90   | 3.97   | 35.87  | 54.00  | -18.13 | 150    | 37     | Average |
| 14872.000    | 43.34   | 10.37  | 53.71  | 74.00  | -20.29 | 150    | 37     | Peak    | 9925.000  | 48.90   | 3.97   | 52.87  | 74.00  | -21.13 | 150    | 37     | Peak    |
| 16164.000    | 33.33   | 10.74  | 44.07  | 54.00  | -9.93  | 150    | 255    | Average | 14481.000 | 32.06   | 10.95  | 43.01  | 54.00  | -10.99 | 150    | 234    | Average |
| 16164.000    | 45.05   | 10.74  | 55.79  | 74.00  | -18.21 | 150    | 255    | Peak    | 14481.000 | 42.99   | 10.95  | 53.94  | 74.00  | -20.06 | 150    | 234    | Peak    |
| 16640.000    | 34.50   | 12.23  | 46.73  | 54.00  | -7.27  | 150    | 346    | Average | 16674.000 | 33.64   | 12.24  | 45.88  | 54.00  | -8.12  | 150    | 155    | Average |
| 16640.000    | 44.46   | 12.23  | 56.69  | 74.00  | -17.31 | 150    | 346    | Peak    | 16674.000 | 43.92   | 12.24  | 56.16  | 74.00  | -17.84 | 150    | 155    | Peak    |
| 17762.000    | 34.20   | 12.69  | 46.89  | 54.00  | -7.11  | 150    | 133    | Average | 17813.000 | 34.05   | 12.99  | 47.04  | 54.00  | -6.96  | 150    | 97     | Average |
| 17762.000    | 43.68   | 12.69  | 56.37  | 74.00  | -17.63 | 150    | 133    | Peak    | 17813.000 | 43.38   | 12.99  | 56.37  | 74.00  | -17.63 | 150    | 97     | Peak    |

**BLE 2M Mode:**

| Low channel |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
|-------------|---------|--------|--------|--------|--------|--------|--------|---------|-----------|---------|--------|--------|--------|--------|--------|--------|---------|
| Horizontal  |         |        |        |        |        |        |        |         | Vertical  |         |        |        |        |        |        |        |         |
|             |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
| Freq.       | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  | Freq.     | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
| MHz         | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         | MHz       | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 4804.000    | 32.75   | -4.02  | 28.73  | 54.00  | -25.27 | 192    | 231    | Average | 4804.000  | 33.11   | -4.02  | 29.09  | 54.00  | -24.91 | 180    | 117    | Average |
| 4804.000    | 45.12   | -4.02  | 41.10  | 74.00  | -32.90 | 192    | 231    | Peak    | 4804.000  | 43.64   | -4.02  | 39.62  | 74.00  | -34.38 | 180    | 117    | Peak    |
| 7206.000    | 39.26   | 0.42   | 39.68  | 54.00  | -14.32 | 104    | 273    | Average | 7206.000  | 41.47   | 0.42   | 41.89  | 54.00  | -12.11 | 129    | 55     | Average |
| 7206.000    | 55.89   | 0.42   | 56.31  | 74.00  | -17.69 | 104    | 273    | Peak    | 7206.000  | 51.12   | 0.42   | 51.54  | 74.00  | -22.46 | 129    | 55     | Peak    |
| 14413.000   | 31.50   | 10.67  | 42.17  | 54.00  | -11.83 | 150    | 261    | Average | 9602.000  | 38.05   | 3.68   | 41.73  | 54.00  | -12.27 | 150    | 72     | Average |
| 14413.000   | 42.75   | 10.67  | 53.42  | 74.00  | -20.58 | 150    | 261    | Peak    | 9602.000  | 48.87   | 3.68   | 52.55  | 74.00  | -21.45 | 150    | 72     | Peak    |
| 16062.000   | 32.46   | 10.35  | 42.81  | 54.00  | -11.19 | 150    | 137    | Average | 14974.000 | 30.75   | 10.29  | 41.04  | 54.00  | -12.96 | 150    | 133    | Average |
| 16062.000   | 44.10   | 10.35  | 54.45  | 74.00  | -19.55 | 150    | 137    | Peak    | 14974.000 | 43.71   | 10.29  | 54.00  | 74.00  | -20.00 | 150    | 133    | Peak    |
| 16606.000   | 32.42   | 12.22  | 44.64  | 54.00  | -9.36  | 150    | 164    | Average | 16419.000 | 32.10   | 11.45  | 43.55  | 54.00  | -10.45 | 150    | 315    | Average |
| 16606.000   | 44.23   | 12.22  | 56.45  | 74.00  | -17.55 | 150    | 164    | Peak    | 16419.000 | 44.71   | 11.45  | 56.16  | 74.00  | -17.84 | 150    | 315    | Peak    |
| 17932.000   | 32.40   | 13.55  | 45.95  | 54.00  | -8.05  | 150    | 37     | Average | 17745.000 | 33.43   | 12.60  | 46.03  | 54.00  | -7.97  | 150    | 240    | Average |
| 17932.000   | 44.10   | 13.55  | 57.65  | 74.00  | -16.35 | 150    | 37     | Peak    | 17745.000 | 44.68   | 12.60  | 57.28  | 74.00  | -16.72 | 150    | 240    | Peak    |

| Middle channel |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
|----------------|---------|--------|--------|--------|--------|--------|--------|---------|-----------|---------|--------|--------|--------|--------|--------|--------|---------|
| Horizontal     |         |        |        |        |        |        |        |         | Vertical  |         |        |        |        |        |        |        |         |
|                |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
| Freq.          | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  | Freq.     | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
| MHz            | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         | MHz       | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 4880.000       | 32.99   | -3.86  | 29.13  | 54.00  | -24.87 | 108    | 29     | Average | 4880.000  | 33.34   | -3.86  | 29.48  | 54.00  | -24.52 | 156    | 238    | Average |
| 4880.000       | 44.30   | -3.86  | 40.44  | 74.00  | -33.56 | 108    | 29     | Peak    | 4880.000  | 44.29   | -3.86  | 40.43  | 74.00  | -33.57 | 156    | 238    | Peak    |
| 7320.000       | 42.51   | 0.87   | 43.38  | 54.00  | -10.62 | 112    | 274    | Average | 7320.000  | 43.22   | 0.87   | 44.09  | 54.00  | -9.91  | 106    | 113    | Average |
| 7320.000       | 54.34   | 0.87   | 55.21  | 74.00  | -18.79 | 112    | 274    | Peak    | 7320.000  | 51.08   | 0.87   | 51.95  | 74.00  | -22.05 | 106    | 113    | Peak    |
| 14566.000      | 30.43   | 10.76  | 41.19  | 54.00  | -12.81 | 150    | 267    | Average | 14396.000 | 31.48   | 10.58  | 42.06  | 54.00  | -11.94 | 150    | 137    | Average |
| 14566.000      | 42.45   | 10.76  | 53.21  | 74.00  | -20.79 | 150    | 267    | Peak    | 14396.000 | 42.52   | 10.58  | 53.10  | 74.00  | -20.90 | 150    | 137    | Peak    |
| 16028.000      | 32.18   | 10.08  | 42.26  | 54.00  | -11.74 | 150    | 156    | Average | 16028.000 | 32.91   | 10.08  | 42.99  | 54.00  | -11.01 | 150    | 321    | Average |
| 16028.000      | 44.11   | 10.08  | 54.19  | 74.00  | -19.81 | 150    | 156    | Peak    | 16028.000 | 44.38   | 10.08  | 54.46  | 74.00  | -19.54 | 150    | 321    | Peak    |
| 16572.000      | 32.33   | 12.21  | 44.54  | 54.00  | -9.46  | 150    | 37     | Average | 16674.000 | 33.09   | 12.24  | 45.33  | 54.00  | -8.67  | 150    | 64     | Average |
| 16572.000      | 43.60   | 12.21  | 55.81  | 74.00  | -18.19 | 150    | 37     | Peak    | 16674.000 | 43.78   | 12.24  | 56.02  | 74.00  | -17.98 | 150    | 64     | Peak    |
| 17779.000      | 32.75   | 12.80  | 45.55  | 54.00  | -8.45  | 150    | 199    | Average | 17796.000 | 33.02   | 12.93  | 45.95  | 54.00  | -8.05  | 150    | 291    | Average |
| 17779.000      | 44.40   | 12.80  | 57.20  | 74.00  | -16.80 | 150    | 199    | Peak    | 17796.000 | 44.55   | 12.93  | 57.48  | 74.00  | -16.52 | 150    | 291    | Peak    |

| High channel |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
|--------------|---------|--------|--------|--------|--------|--------|--------|---------|-----------|---------|--------|--------|--------|--------|--------|--------|---------|
| Horizontal   |         |        |        |        |        |        |        |         | Vertical  |         |        |        |        |        |        |        |         |
|              |         |        |        |        |        |        |        |         |           |         |        |        |        |        |        |        |         |
| Freq.        | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  | Freq.     | Reading | Factor | Level  | Limit  | Margin | Height | Degree | Remark  |
| MHz          | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         | MHz       | dBuV    | dB/m   | dBuV/m | dBuV/m | dB     | (cm)   | (°)    |         |
| 4960.000     | 32.54   | -3.76  | 28.78  | 54.00  | -25.22 | 131    | 329    | Average | 4960.000  | 33.05   | -3.76  | 29.29  | 54.00  | -24.71 | 163    | 243    | Average |
| 4960.000     | 43.61   | -3.76  | 39.85  | 74.00  | -34.15 | 131    | 329    | Peak    | 4960.000  | 44.07   | -3.76  | 40.31  | 74.00  | -33.69 | 163    | 243    | Peak    |
| 7440.000     | 43.45   | 0.83   | 44.28  | 54.00  | -9.72  | 101    | 298    | Average | 7440.000  | 42.12   | 0.83   | 42.95  | 54.00  | -11.05 | 128    | 114    | Average |
| 7440.000     | 56.43   | 0.83   | 57.26  | 74.00  | -16.74 | 101    | 298    | Peak    | 7440.000  | 51.25   | 0.83   | 52.08  | 74.00  | -21.92 | 128    | 114    | Peak    |
| 14447.000    | 30.89   | 10.87  | 41.76  | 54.00  | -12.24 | 150    | 133    | Average | 14447.000 | 30.62   | 10.87  | 41.49  | 54.00  | -12.51 | 150    | 311    | Average |
| 14447.000    | 42.39   | 10.87  | 53.26  | 74.00  | -20.74 | 150    | 133    | Peak    | 14447.000 | 41.90   | 10.87  | 52.77  | 74.00  | -21.23 | 150    | 311    | Peak    |
| 15093.000    | 30.92   | 10.12  | 41.04  | 54.00  | -12.96 | 100    | 187    | Average | 16130.000 | 32.06   | 10.62  | 42.68  | 54.00  | -11.32 | 150    | 167    | Average |
| 15093.000    | 44.36   | 10.12  | 54.48  | 74.00  | -19.52 | 100    | 187    | Peak    | 16130.000 | 44.49   | 10.62  | 55.11  | 74.00  | -18.89 | 150    | 167    | Peak    |
| 16725.000    | 32.57   | 12.21  | 44.78  | 54.00  | -9.22  | 100    | 19     | Average | 16657.000 | 32.23   | 12.23  | 44.46  | 54.00  | -9.54  | 150    | 29     | Average |
| 16725.000    | 43.29   | 12.21  | 55.50  | 74.00  | -18.50 | 100    | 19     | Peak    | 16657.000 | 44.07   | 12.23  | 56.30  | 74.00  | -17.70 | 150    | 29     | Peak    |
| 17745.000    | 32.79   | 12.60  | 45.39  | 54.00  | -8.61  | 100    | 310    | Average | 17745.000 | 33.53   | 12.60  | 46.13  | 54.00  | -7.87  | 150    | 284    | Average |
| 17745.000    | 43.87   | 12.60  | 56.47  | 74.00  | -17.53 | 100    | 310    | Peak    | 17745.000 | 43.69   | 12.60  | 56.29  | 74.00  | -17.71 | 150    | 284    | Peak    |

Note:


Level = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.


**Conducted Spurious Emissions:**

| Channel      | Frequency (MHz) | Delta Peak to Band Emission (dBc) | Limit (dBc) | Result |
|--------------|-----------------|-----------------------------------|-------------|--------|
| BLE(1M) Mode |                 |                                   |             |        |
| Low          | 2402            | 31.20                             | $\geq 20$   | PASS   |
| Mid          | 2440            | 36.37                             | $\geq 20$   | PASS   |
| High         | 2480            | 35.04                             | $\geq 20$   | PASS   |
| BLE(2M) Mode |                 |                                   |             |        |
| Low          | 2402            | 32.42                             | $\geq 20$   | PASS   |
| Mid          | 2440            | 34.70                             | $\geq 20$   | PASS   |
| High         | 2480            | 34.10                             | $\geq 20$   | PASS   |

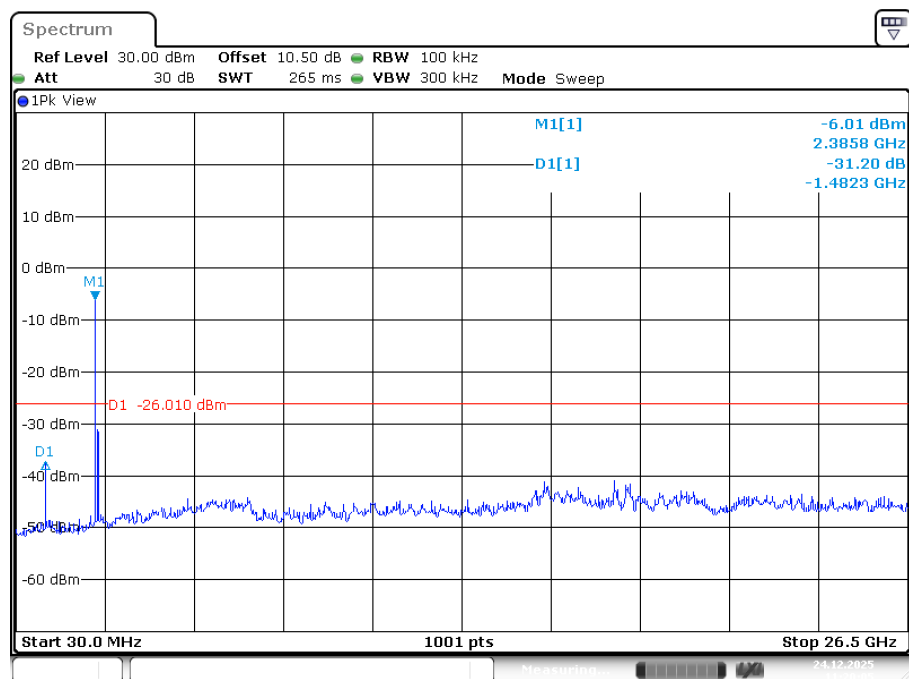**BLE(1M) Mode****Low Channel**


ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:20:06

## Middle Channel

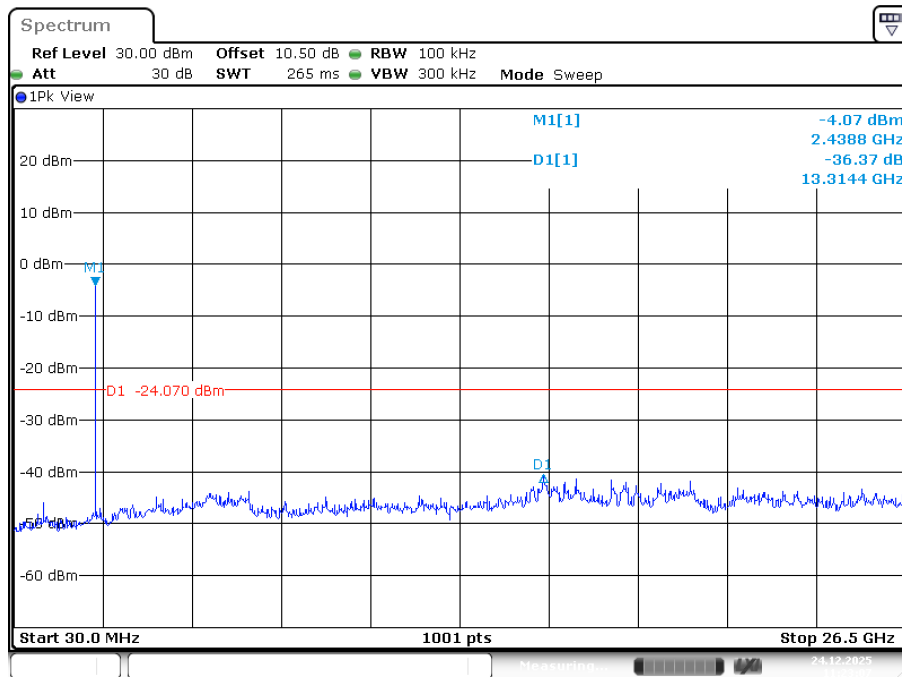


ProjectNo.:RXZ251216043 Tester:Victor  
 Date: 24.DEC.2025 11:23:07

## High Channel

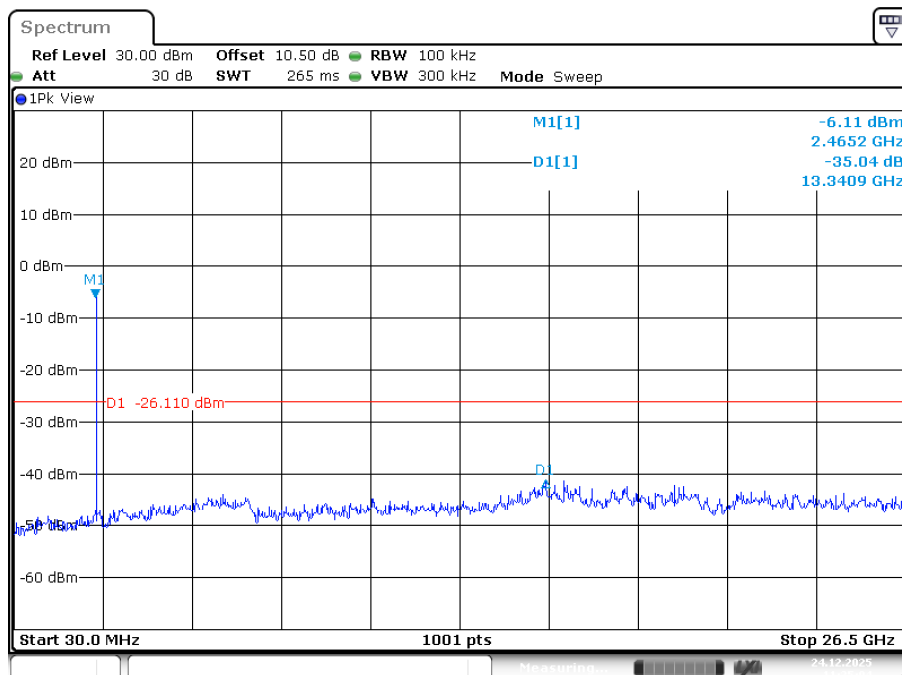


ProjectNo.:RXZ251216043 Tester:Victor  
 Date: 24.DEC.2025 11:25:04

## BLE(2M) Mode Low Channel

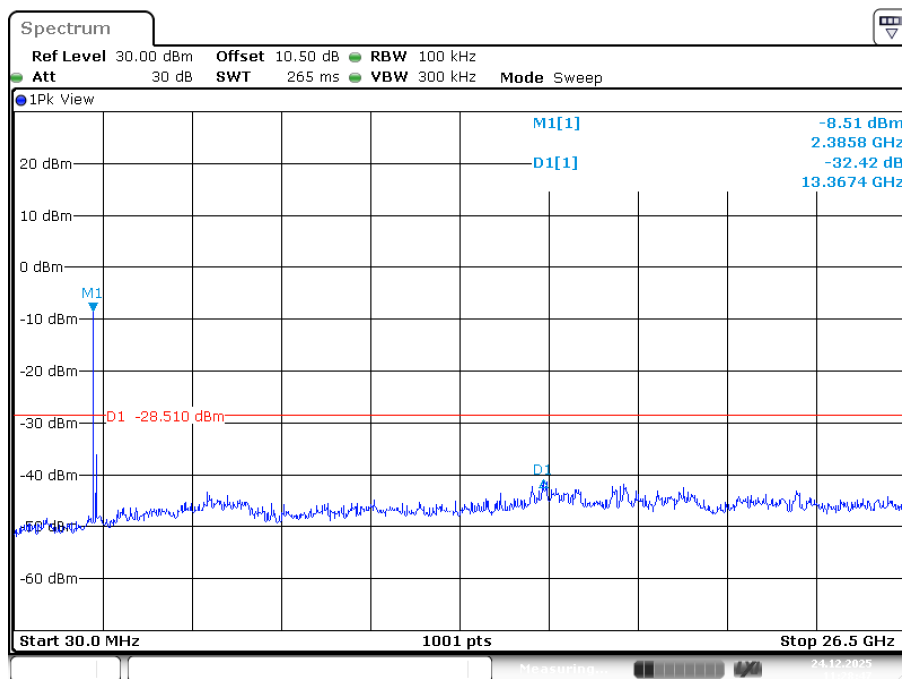


ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:28:48

## Middle Channel

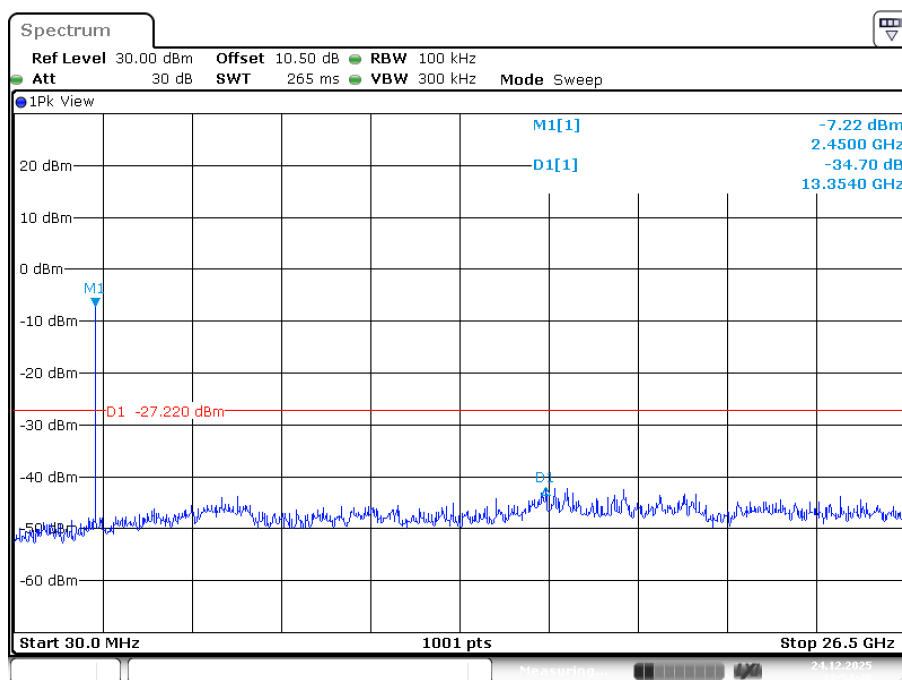

ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 12:54:49

High Channel

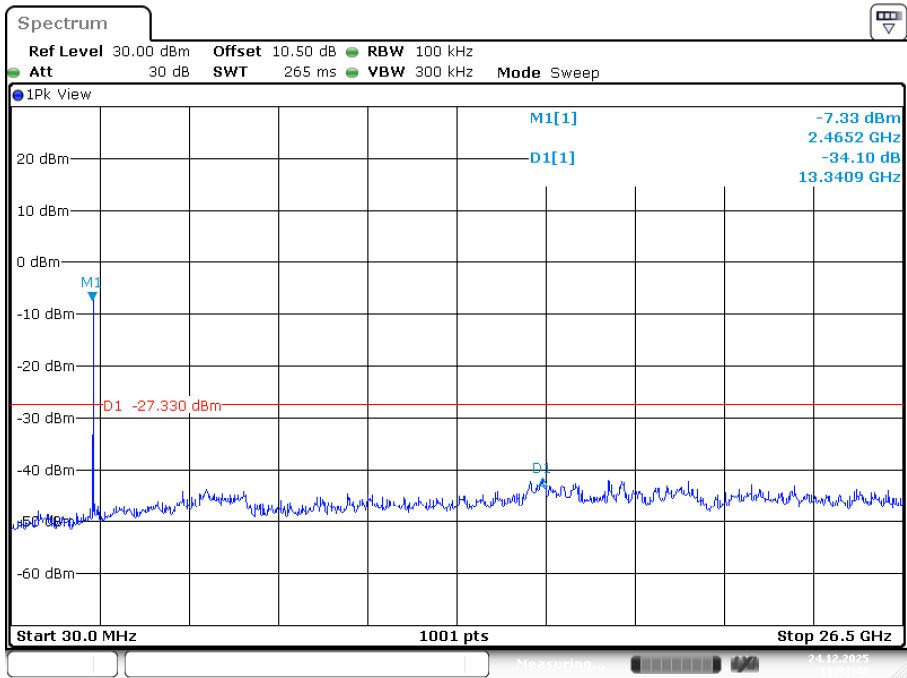

ProjectNo.:RXZ251216043    Tester:Victor  
Date: 24.DEC.2025    11:33:41

## **7 FCC §15.247(a)(2) – 6 dB Emission Bandwidth & Occupied Bandwidth**

### **7.1 Applicable Standard**

According to FCC §15.247(a)(2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### **7.2 Test Procedure**

According to ANSI C63.10-2020, section 11.8

The steps for the first option are as follows:

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–6 dB down amplitude”. If a marker is below this “–6 dB down amplitude” value, then it shall be as close as possible to this value.

According to ANSI C63.10-2020, Section 6.9.3

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).


### 7.3 Test Results

| Channel      | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | 99% Bandwidth (MHz) | 6 dB Emission Bandwidth Limit (kHz) | Result |
|--------------|-----------------|-------------------------------|---------------------|-------------------------------------|--------|
| BLE(1M) Mode |                 |                               |                     |                                     |        |
| Low          | 2402            | 0.70                          | 1.04                | > 500                               | PASS   |
| Middle       | 2440            | 0.70                          | 1.05                | > 500                               | PASS   |
| High         | 2480            | 0.71                          | 1.05                | > 500                               | PASS   |
| BLE(2M) Mode |                 |                               |                     |                                     |        |
| Low          | 2402            | 1.27                          | 2.02                | > 500                               | PASS   |
| Middle       | 2440            | 1.27                          | 2.03                | > 500                               | PASS   |
| High         | 2480            | 1.32                          | 2.04                | > 500                               | PASS   |

Please refer to the following plots


### 6 dB Emission Bandwidth

#### BLE(1M) Mode Low Channel

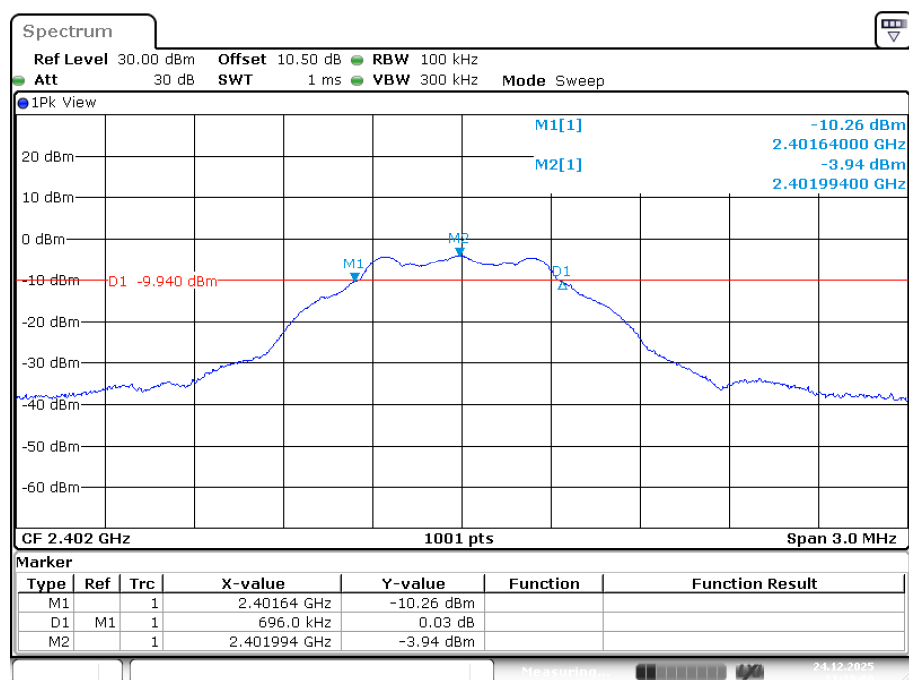

ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:19:01


## Middle Channel

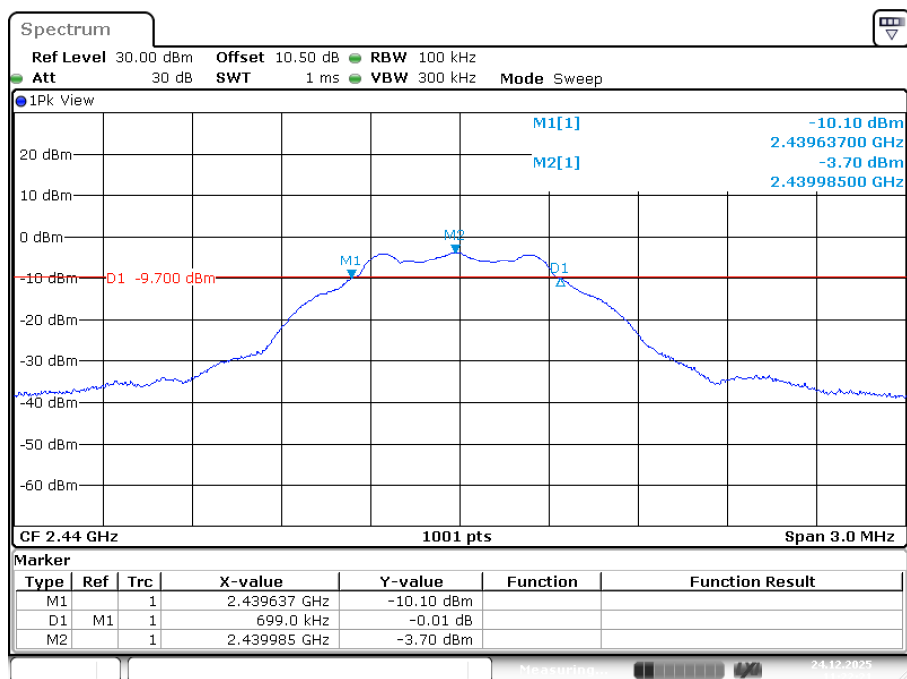

ProjectNo.:RXZ251216043 Tester:Victor

Date: 24.DEC.2025 11:22:21


## High Channel

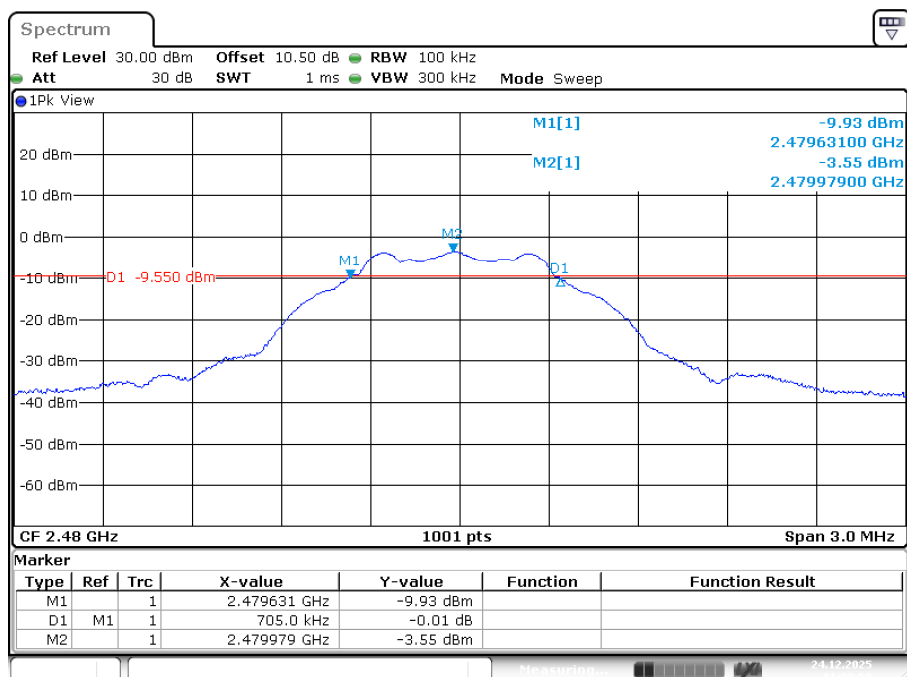

ProjectNo.:RXZ251216043 Tester:Victor


Date: 24.DEC.2025 11:23:59

## BLE(2M) Mode Low Channel

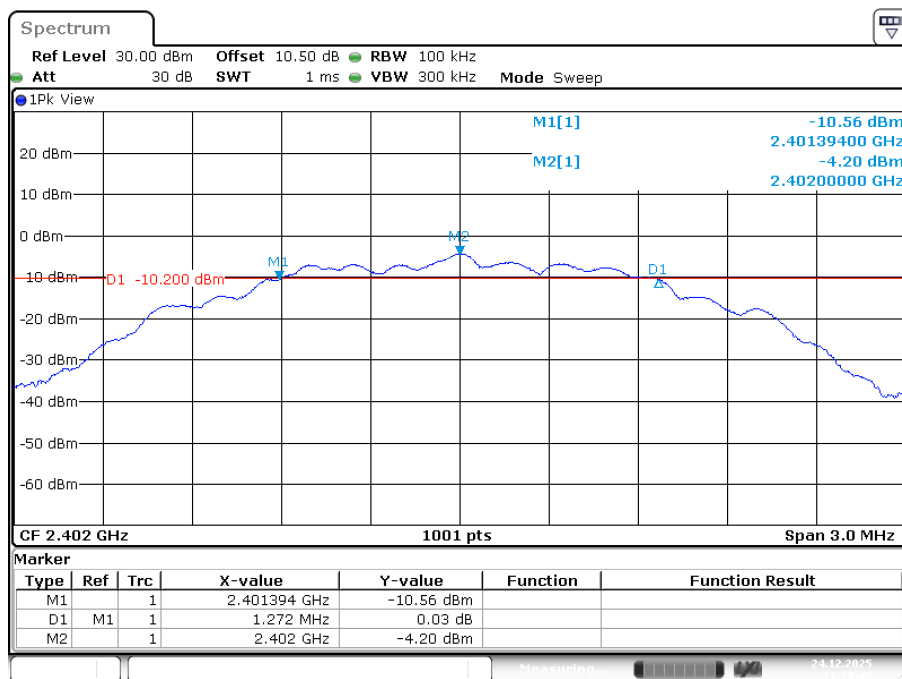


ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:27:43

## Middle Channel

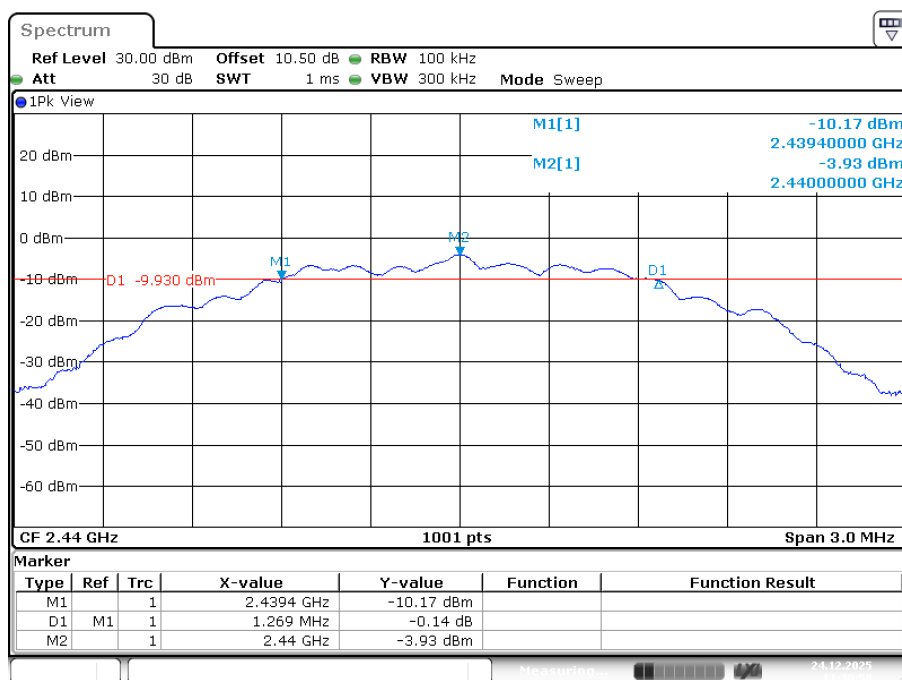

ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:30:59

## High Channel

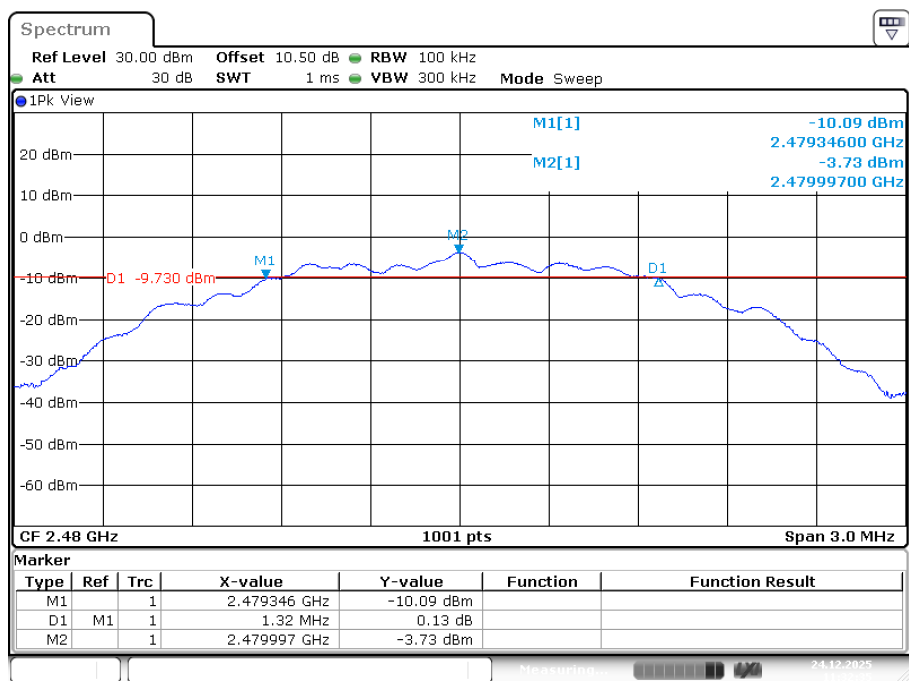


ProjectNo.:RXZ251216043 Tester:Victor

Date: 24.DEC.2025 11:32:36

## 99% Bandwidth

## BLE(1M) Mode


## Low Channel

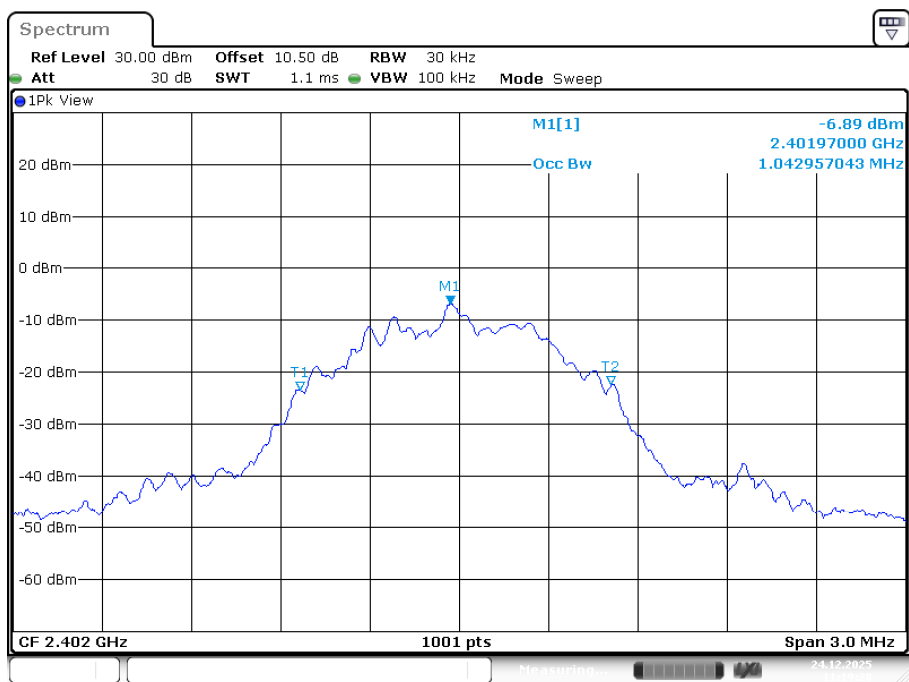

ProjectNo.:RXZ251216043 Tester:Victor


Date: 24.DEC.2025 11:19:28

### Middle Channel

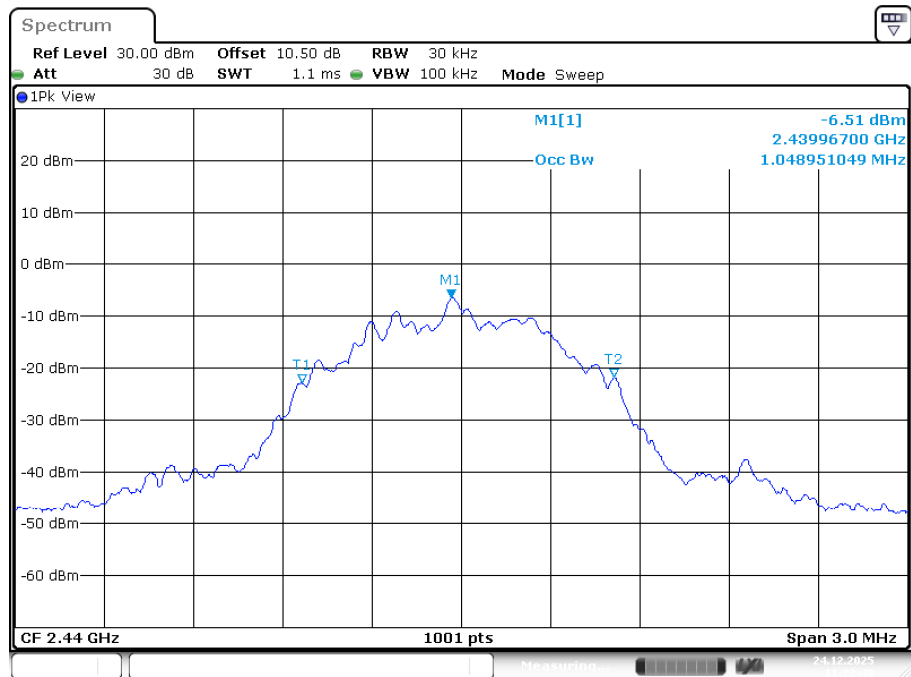


ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:22:48

### High Channel

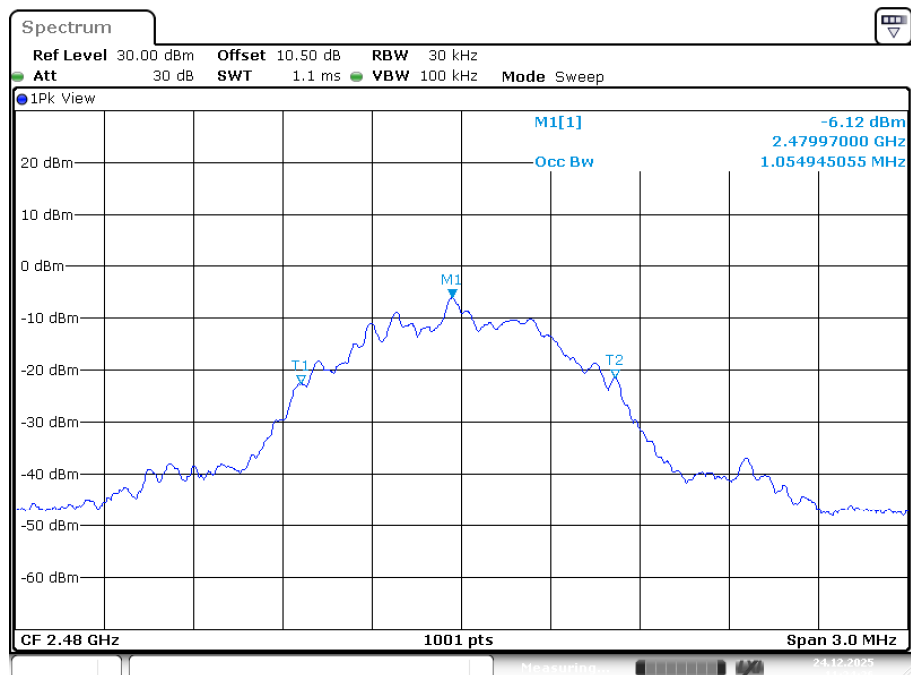


ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:24:26

## BLE(2M) Mode Low Channel

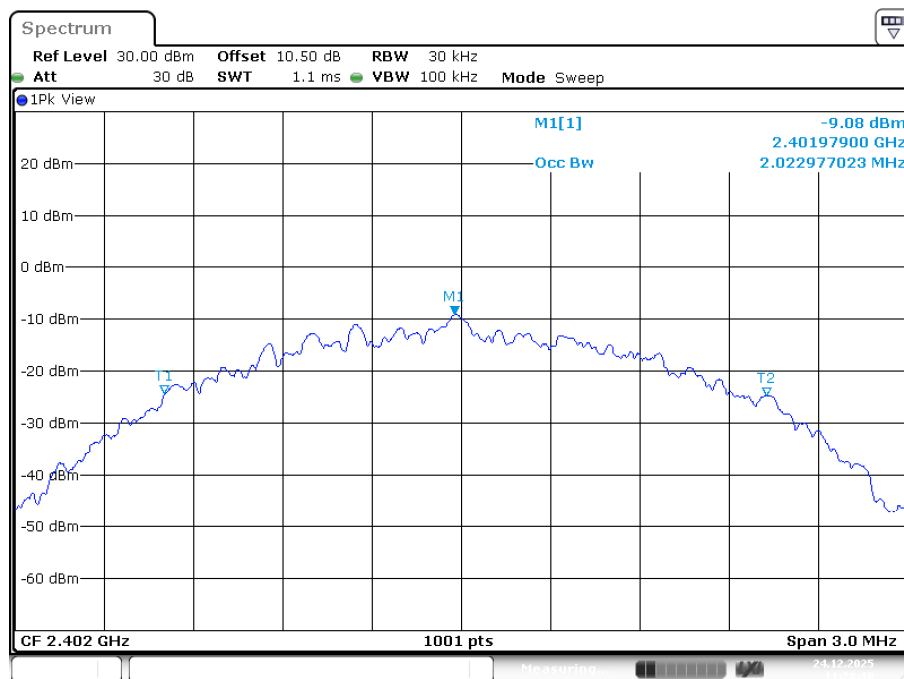


ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:28:10

## Middle Channel

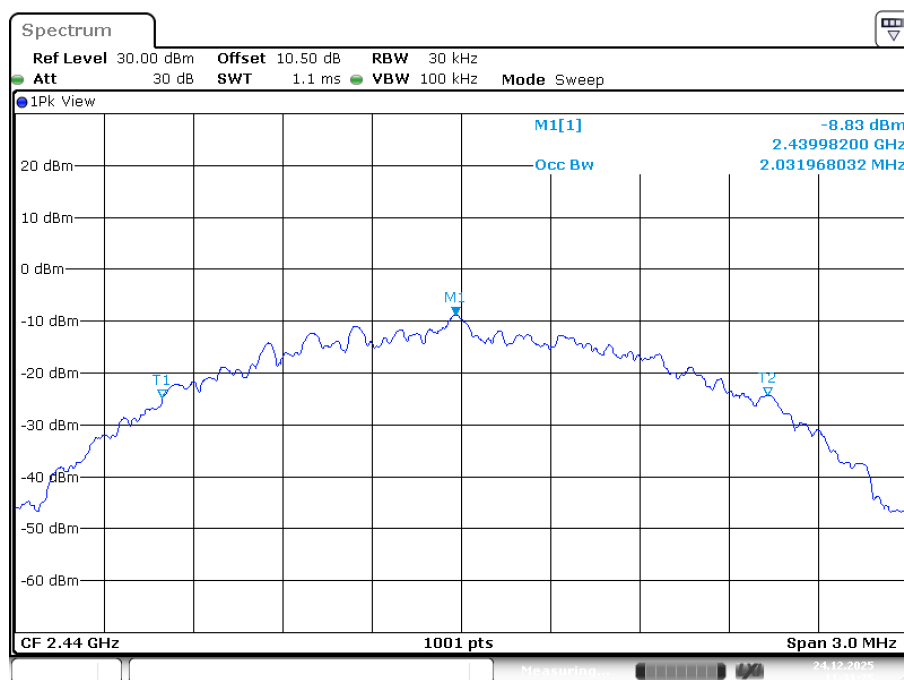

ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:31:26

High Channel

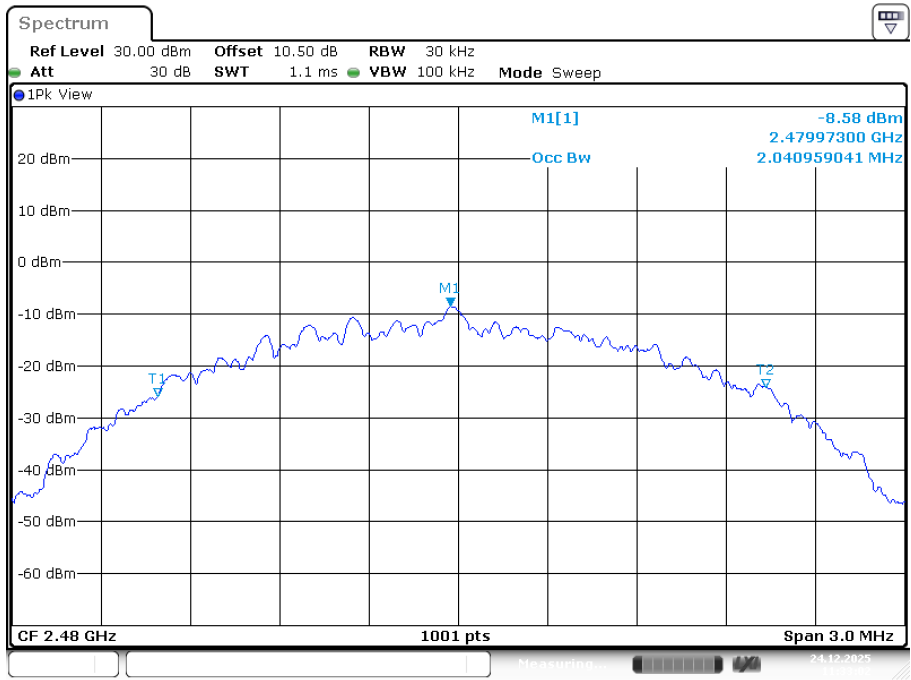

ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:33:03

## 8 FCC §15.247(b)(3) – Maximum Output Power

### 8.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 8.2 Test Procedure

According to ANSI C63.10-2020, section 11.9.1.2

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to power meter.

### 8.3 Test Results

#### Conducted Peak Output Power

| Channel      | Frequency (MHz) | Conducted Peak Output Power (dBm) | Limit (dBm) | Result |
|--------------|-----------------|-----------------------------------|-------------|--------|
| BLE(1M) Mode |                 |                                   |             |        |
| Low          | 2402            | -3.91                             | 30          | PASS   |
| Middle       | 2440            | -3.11                             | 30          | PASS   |
| High         | 2480            | -3.64                             | 30          | PASS   |
| BLE(2M) Mode |                 |                                   |             |        |
| Low          | 2402            | -3.35                             | 30          | PASS   |
| Middle       | 2440            | -2.63                             | 30          | PASS   |
| High         | 2480            | -2.88                             | 30          | PASS   |

## 9 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

### 9.1 Applicable Standard

According to FCC §15.247(d).

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 9.2 Test Procedure

According to ANSI C63.10-2020 Section 11.11.3


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 9.3 Test Results


| Channel      | Frequency (MHz) | Delta Peak to Band Emission (dBc) | Limit (dBc) | Result |
|--------------|-----------------|-----------------------------------|-------------|--------|
| BLE(1M) Mode |                 |                                   |             |        |
| Low          | 2402            | 37.12                             | $\geq 20$   | PASS   |
| High         | 2480            | 40.48                             | $\geq 20$   | PASS   |
| BLE(2M) Mode |                 |                                   |             |        |
| Low          | 2402            | 31.54                             | $\geq 20$   | PASS   |
| High         | 2480            | 40.33                             | $\geq 20$   | PASS   |

Please refer to the following plots.


## BLE(1M) Mode Band Edge, Low Channel

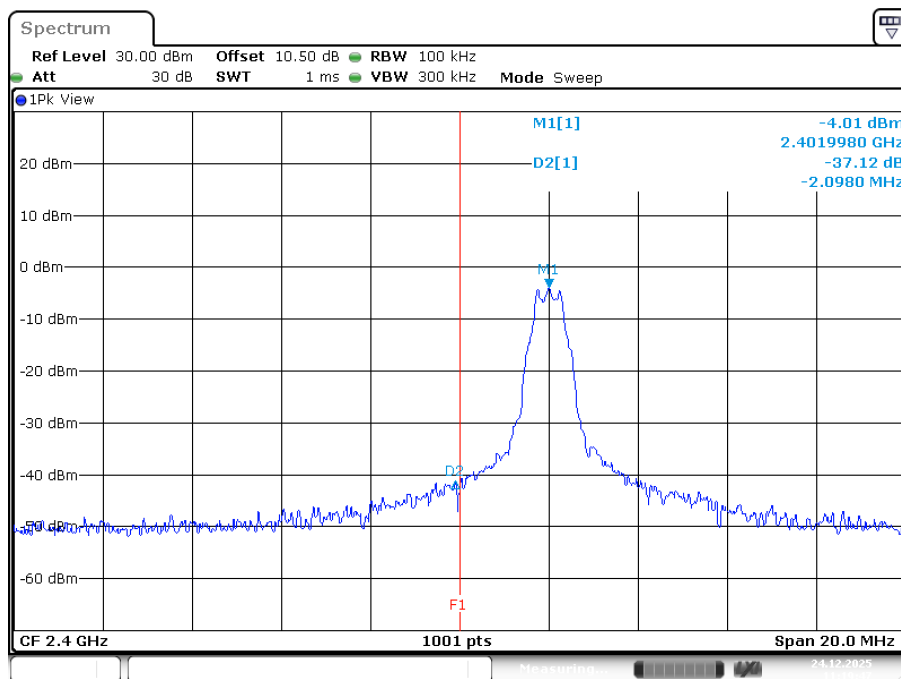

## Band Edge, High Channel

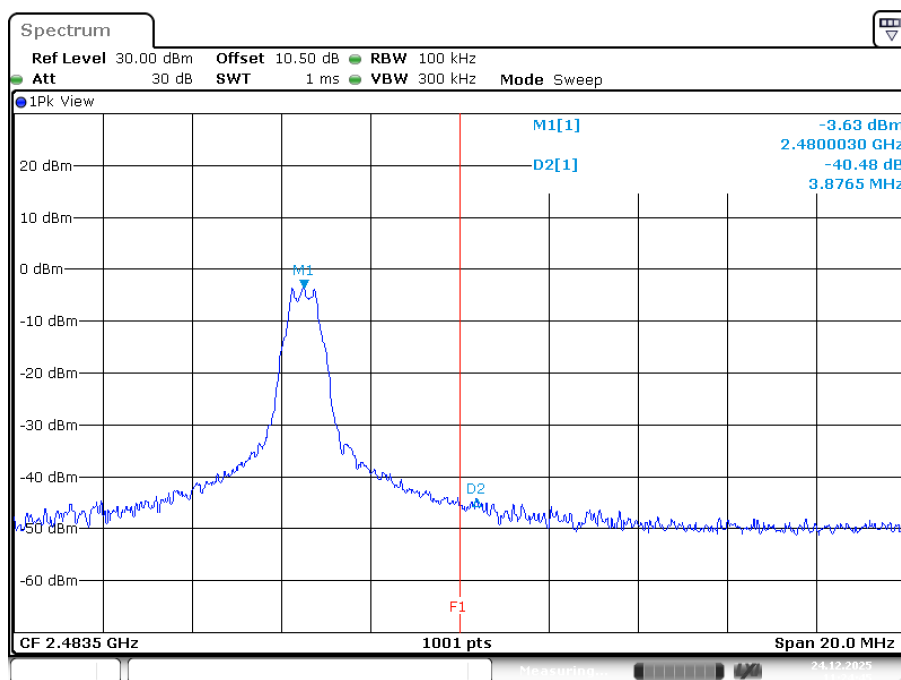


## BLE(2M) Mode Band Edge, Low Channel

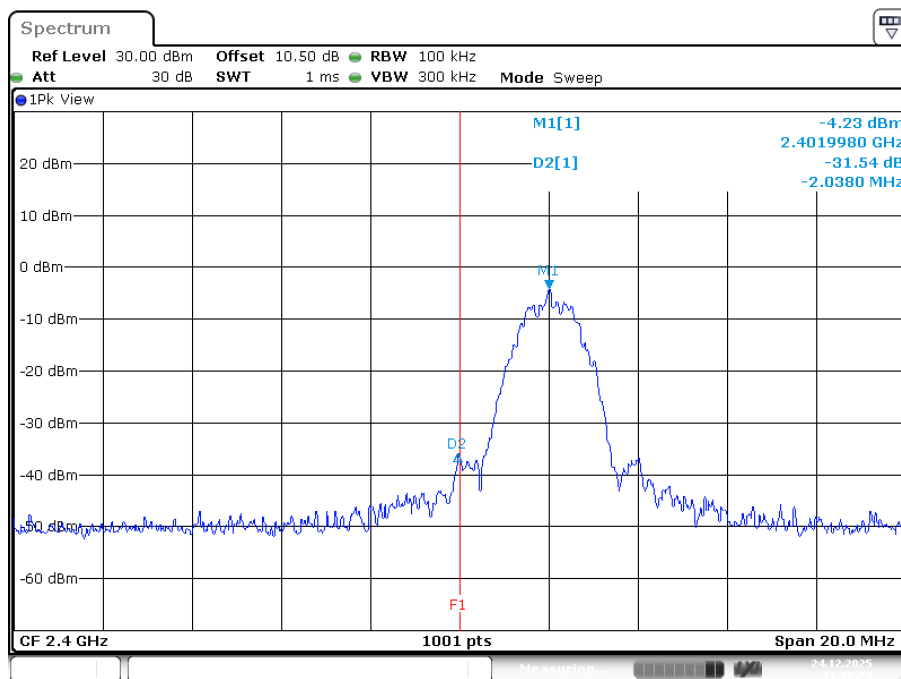

ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:28:29

## Band Edge, High Channel

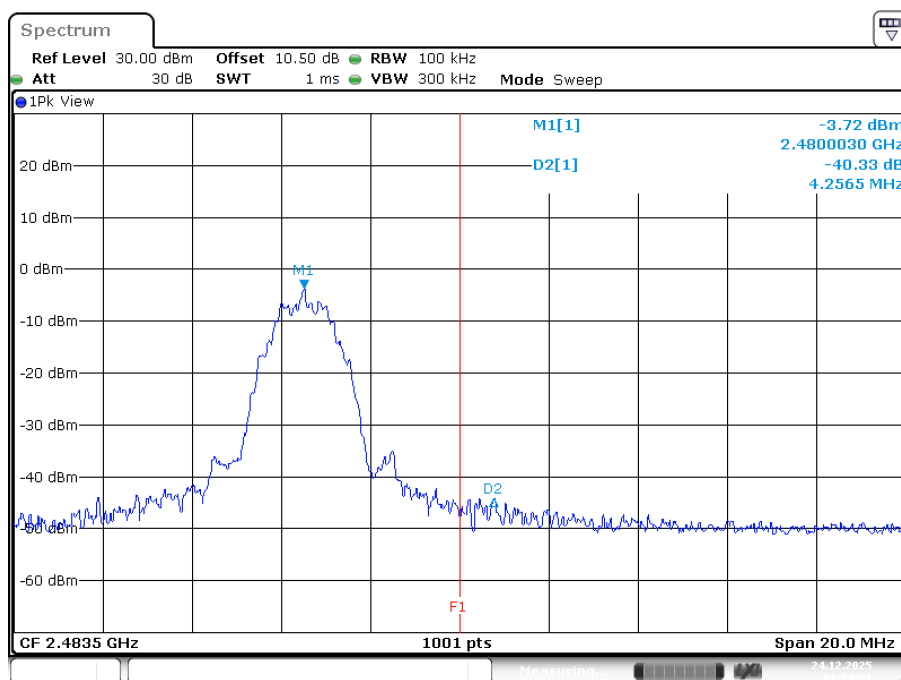

ProjectNo.:RXZ251216043 Tester:Victor  
Date: 24.DEC.2025 11:33:22

## 10 FCC §15.247(e) – Power Spectral Density

### 10.1 Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 10.2 Test Procedure

According to ANSI C63.10-2020, section 11.10.2


- Set analyzer center frequency to DTS channel center frequency.
- Set the span  $>1.5$  times the DTS bandwidth.
- Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat

### 10.3 Test Results

| Channel      | Frequency (MHz) | Power Spectral Density (dBm/3 kHz) | Limit (dBm/3 kHz) | Result |
|--------------|-----------------|------------------------------------|-------------------|--------|
| BLE(1M) Mode |                 |                                    |                   |        |
| Low          | 2402            | -19.17                             | 8                 | PASS   |
| Middle       | 2440            | -19.04                             | 8                 | PASS   |
| High         | 2480            | -18.98                             | 8                 | PASS   |
| BLE(2M) Mode |                 |                                    |                   |        |
| Low          | 2402            | -21.97                             | 8                 | PASS   |
| Middle       | 2440            | -21.75                             | 8                 | PASS   |
| High         | 2480            | -21.59                             | 8                 | PASS   |


Please refer to the following plots

## BLE(1M) Mode Low Channel

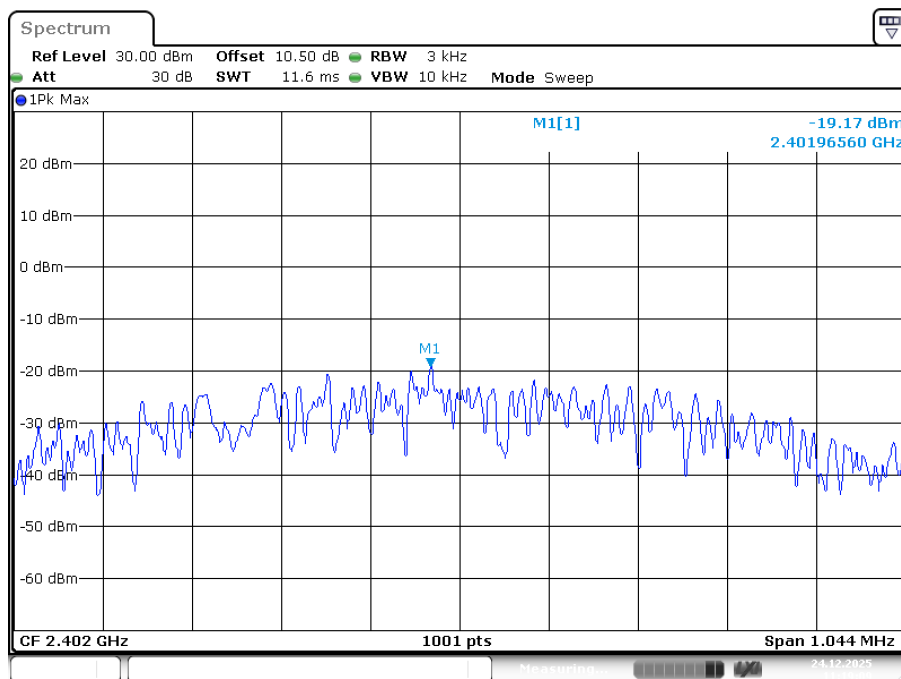


ProjectNo.:RXZ251216043 Tester:Victor  
 Date: 24.DEC.2025 11:19:10

## Middle Channel

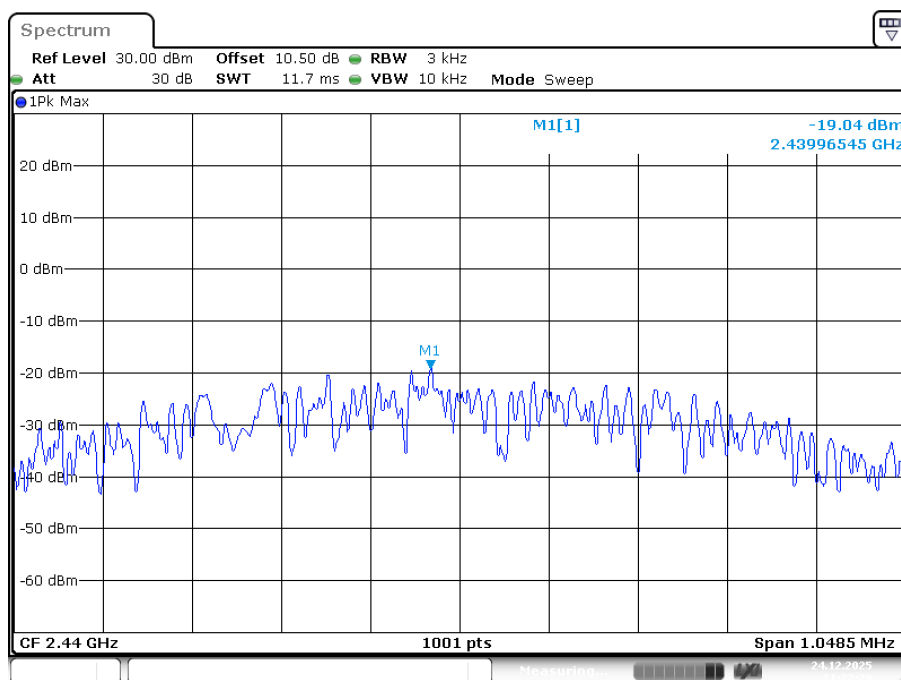


ProjectNo.:RXZ251216043 Tester:Victor  
 Date: 24.DEC.2025 11:22:30

## High Channel

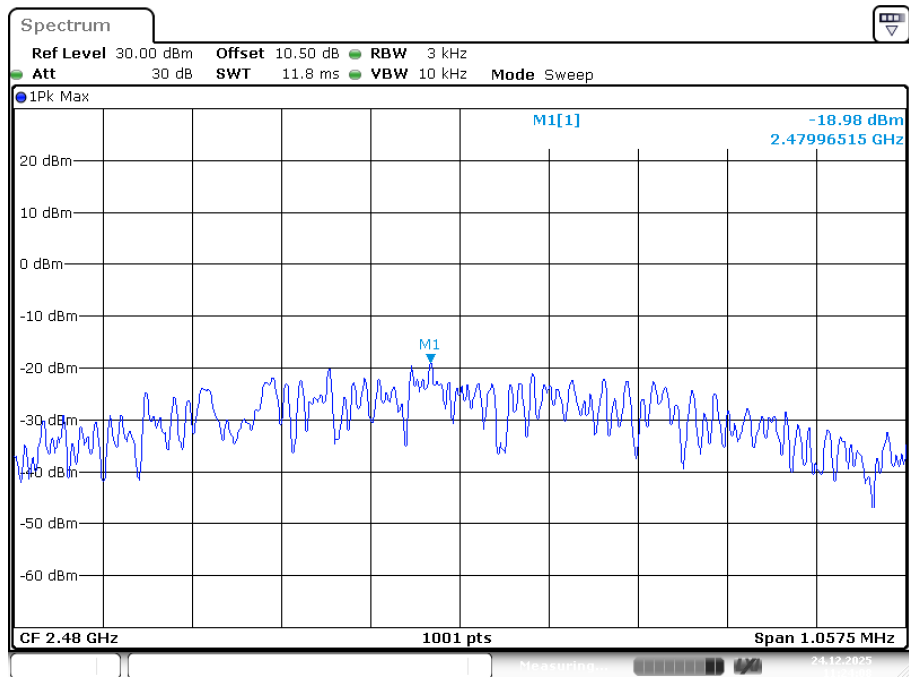


ProjectNo.:RXZ251216043 Tester:Victor  
 Date: 24.DEC.2025 11:24:08

## BLE(2M) Mode Low Channel

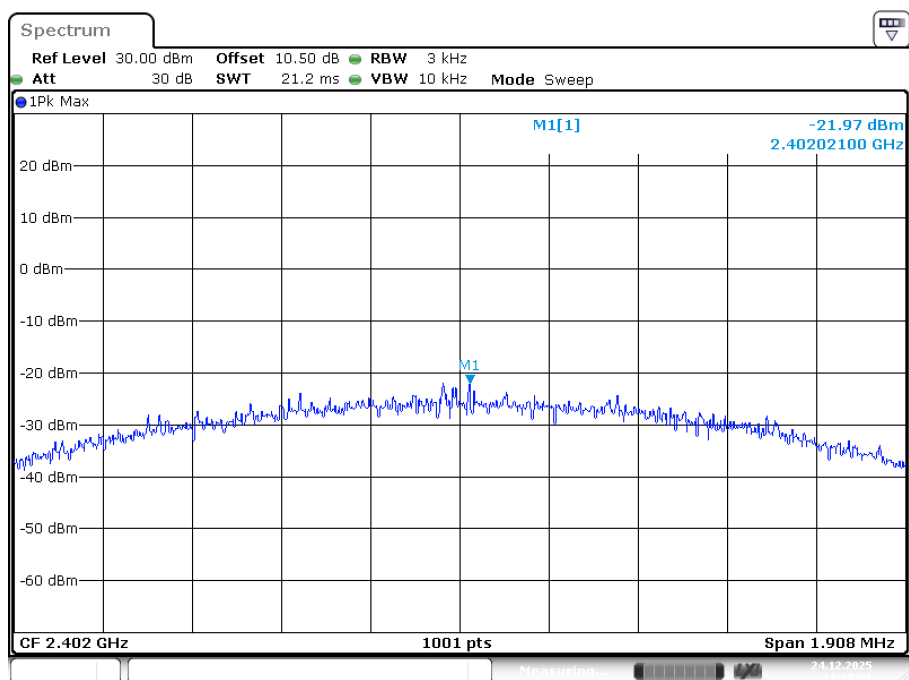

ProjectNo.:RXZ251216043 Tester:Victor  
 Date: 24.DEC.2025 11:27:52


### Middle Channel

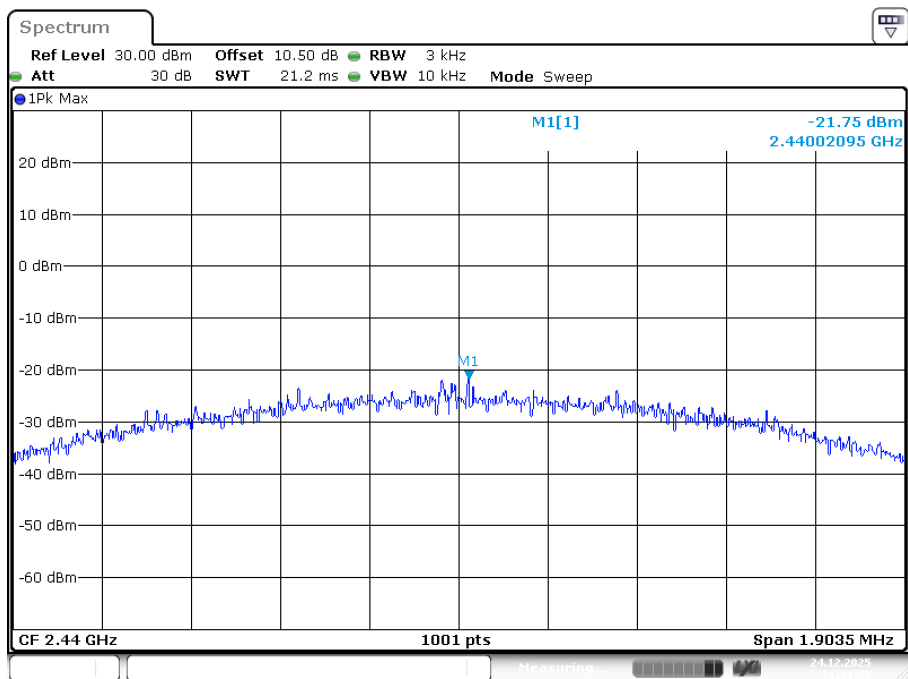

ProjectNo.:RXZ251216043 Tester:Victor

Date: 24.DEC.2025 11:31:08

### High Channel

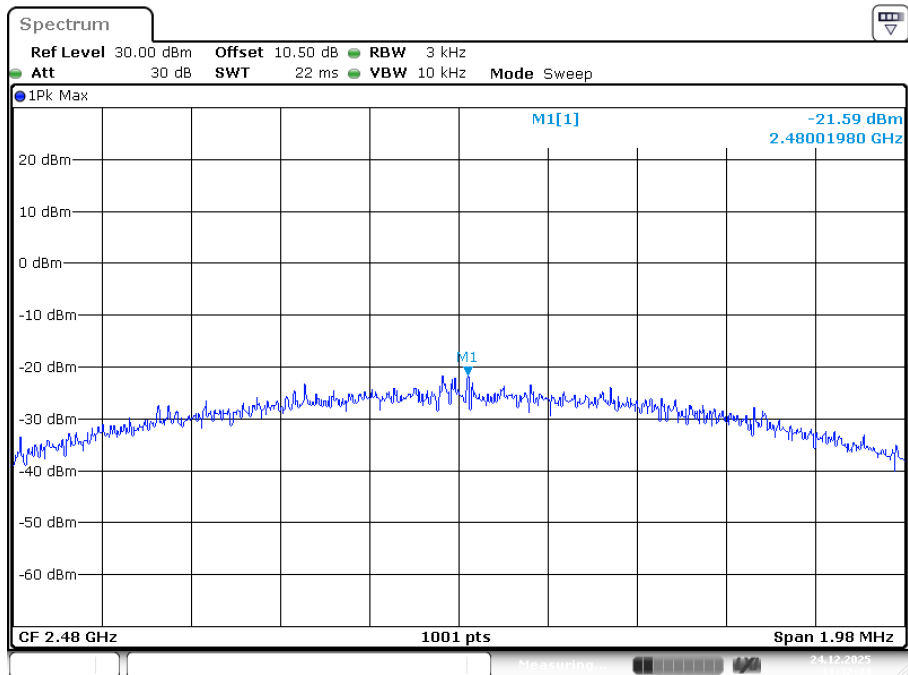

ProjectNo.:RXZ251216043 Tester:Victor

Date: 24.DEC.2025 11:32:45

\*\*\*\*\* END OF REPORT \*\*\*\*\*