

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/16

G06_GSM 850_GSM_CH251_Left Cheek_Ant 31_SIM 1**DUT: Test sample;**

Communication System: UID 0, Generic GSM (0); Frequency: 848.6 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 848.6$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.098$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 848.6 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.277 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.445 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.177 W/kg

Smallest distance from peaks to all points 3 dB below = 21 mm

Ratio of SAR at M2 to SAR at M1 = 75%

Maximum value of SAR (measured) = 0.291 W/kg

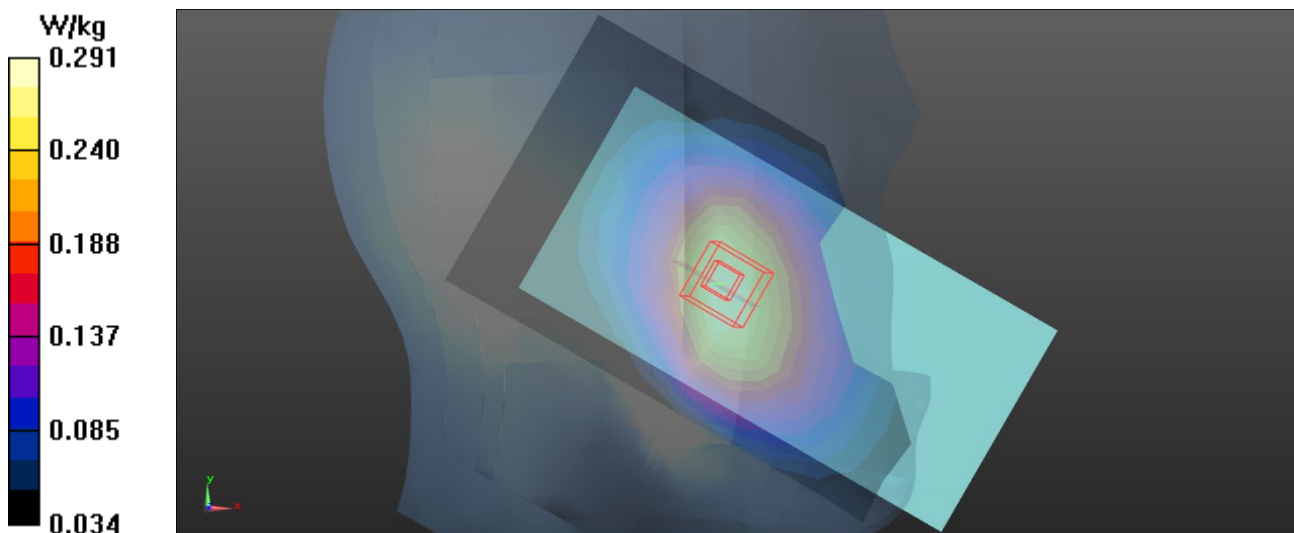

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/17

G15_GSM 1900_GSM_CH512_Left Cheek_Ant 31_SIM 2**DUT: Test sample;**

Communication System: UID 0, Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.485$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.79, 7.79, 7.79) @ 1850.2 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0976 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.166 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 0.117 W/kg

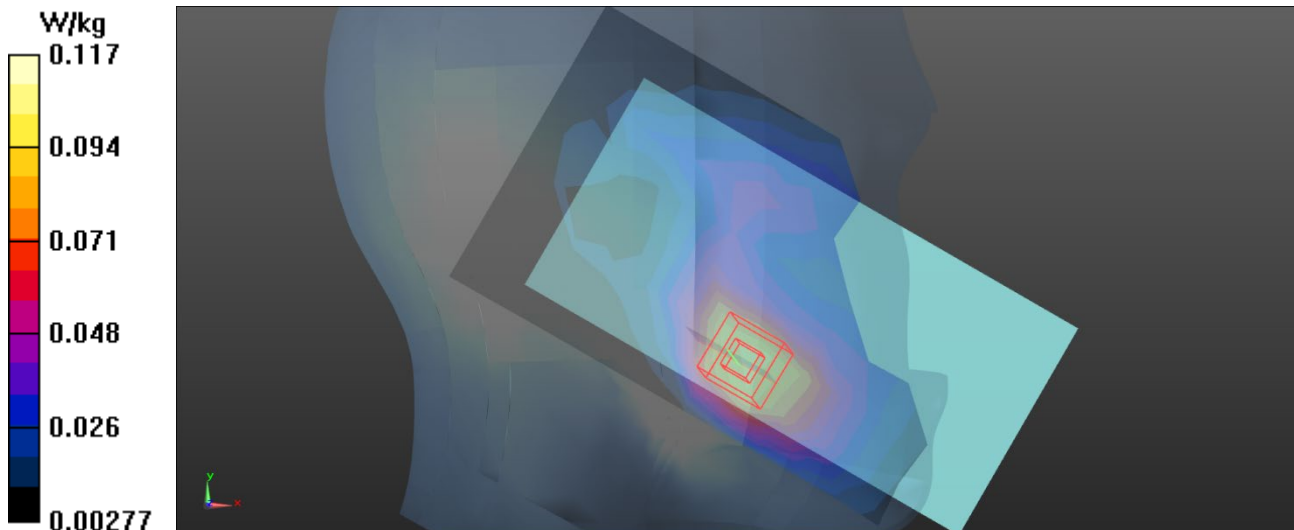

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/17

U05_UMTS B2_RMC12.2K_CH9262_Left Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1852.4 \text{ MHz}$; $\sigma = 1.314 \text{ S/m}$; $\epsilon_r = 39.478$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.7 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.79, 7.79, 7.79) @ 1852.4 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.175 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.657 V/m ; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.155 W/kg ; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 0.213 W/kg

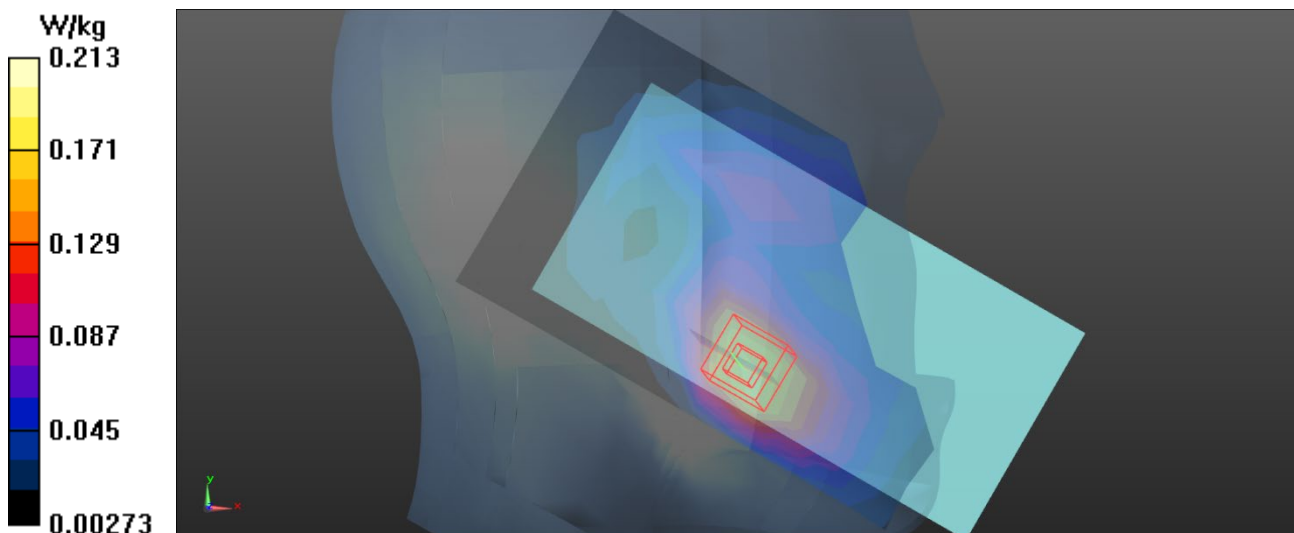

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/17

U11_UMTS B4_RMC12.2K_CH1413_Left Cheek_Ant 31_SIM 1

DUT: Test sample;


Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1732.6$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 39.099$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.7 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(8.04, 8.04, 8.04) @ 1732.6 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.116 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 2.743 V/m; Power Drift = 0 dB
Peak SAR (extrapolated) = 0.151 W/kg
SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.063 W/kg
Smallest distance from peaks to all points 3 dB below = 14.6 mm
Ratio of SAR at M2 to SAR at M1 = 65.6%
Maximum value of SAR (measured) = 0.132 W/kg

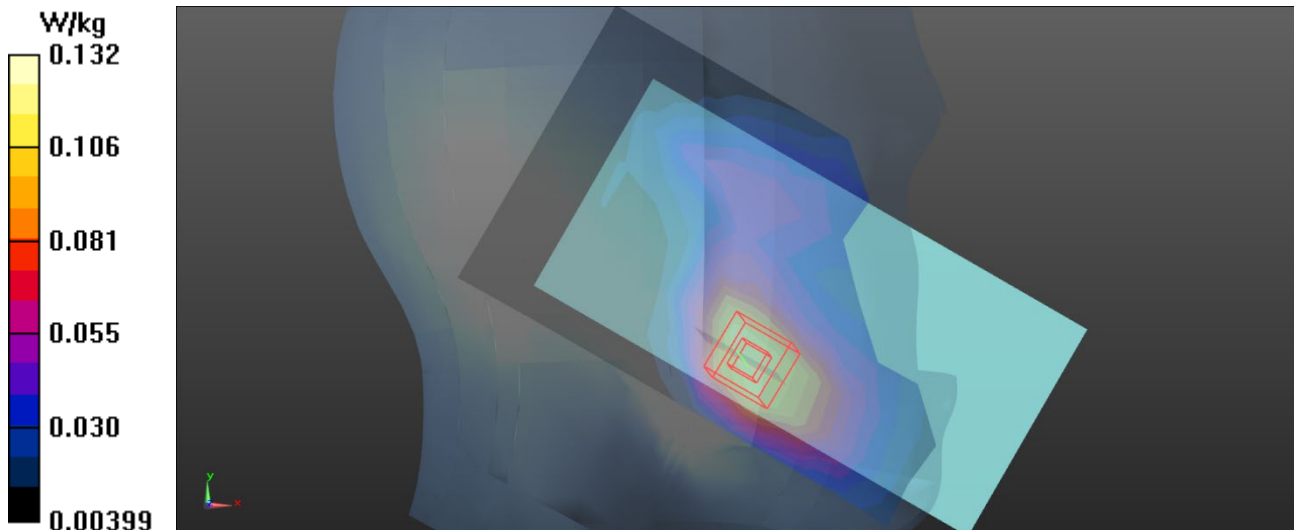

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/16

U22_UMTS B5_RMC12.2K_CH4233_Left Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 846.6$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.109$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 846.6 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.271 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.665 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.2%.

Maximum value of SAR (measured) = 0.275 W/kg

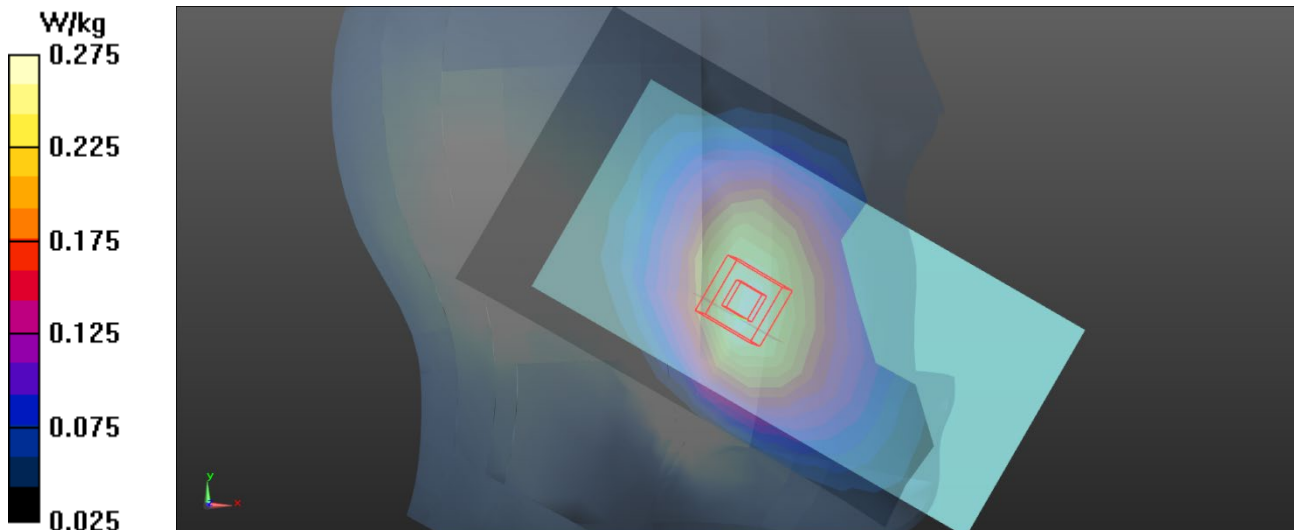

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/27

L03_LTE B2_QPSK20M_CH18700_1RB Offset 0_Left Cheek_Ant 31_SIM 1**DUT: Test sample;**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 1860 MHz;
Duty Cycle: 1:1

Medium parameters used : $f = 1860$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 39.449$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.6 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.79, 7.79, 7.79) @ 1860 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.141 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 4.336 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.201 W/kg
SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.075 W/kg
Smallest distance from peaks to all points 3 dB below = 13.4 mm
Ratio of SAR at M2 to SAR at M1 = 61.7%
Maximum value of SAR (measured) = 0.170 W/kg

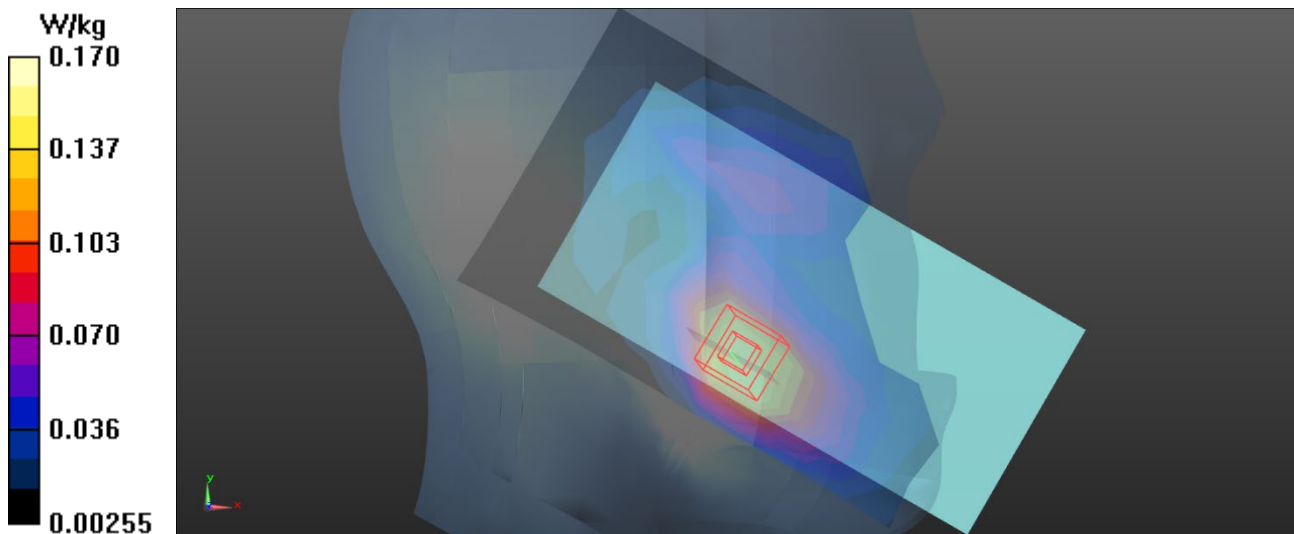

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/28

L16_LTE B4_QPSK20M_CH20300_1RB Offset 0_Left Cheek_Ant 31_SIM 1**DUT: Test sample;**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 1745 MHz;
Duty Cycle: 1:1

Medium parameters used : $f = 1745$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 39.046$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.5 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(8.04, 8.04, 8.04) @ 1745 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0973 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 2.974 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.129 W/kg
SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.052 W/kg
Smallest distance from peaks to all points 3 dB below = 14.5 mm
Ratio of SAR at M2 to SAR at M1 = 64.8%
Maximum value of SAR (measured) = 0.112 W/kg

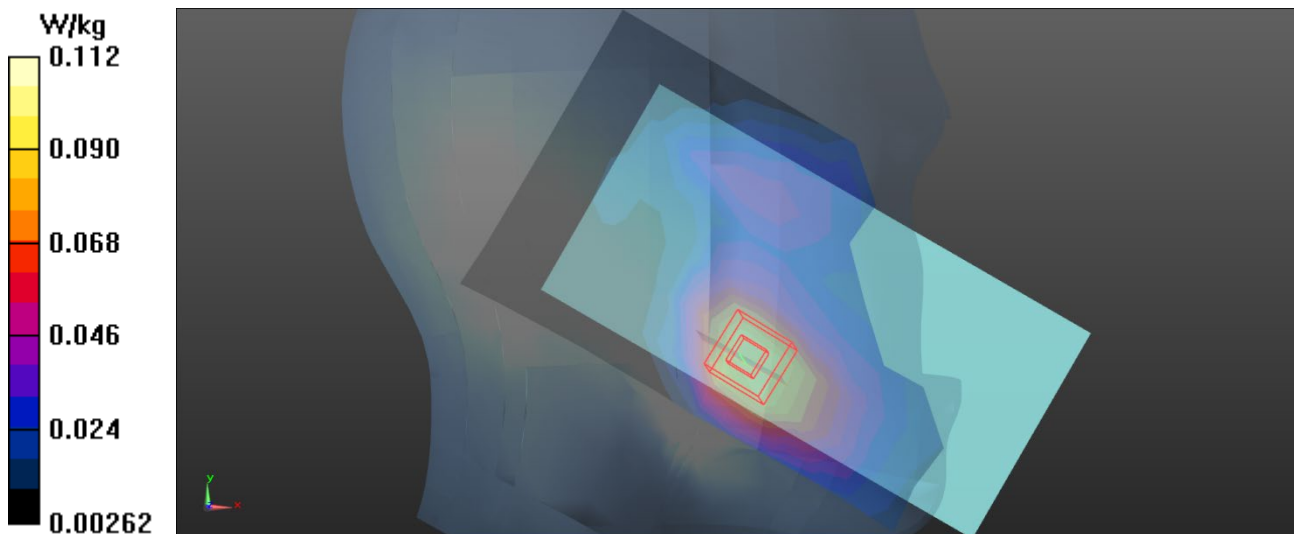

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/719

L36_LTE B5_QPSK10M_CH20600_1RB Offset 24_Left Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 844 MHz;
Duty Cycle: 1:1

Medium parameters used : $f = 844 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 42.127$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 844 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.194 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.378 V/m ; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.166 W/kg ; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 18.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.1%

Maximum value of SAR (measured) = 0.216 W/kg

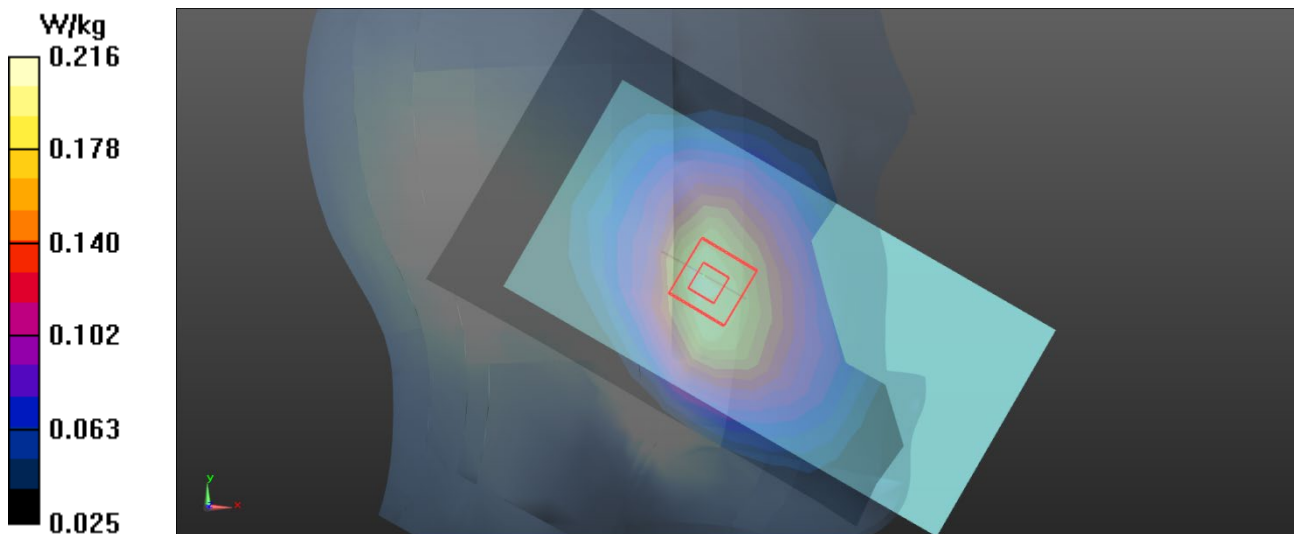

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/26

L48_LTE B7_QPSK20M_CH20850_1RB Offset 50_Right Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 38.208$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.8 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.3, 7.3, 7.3) @ 2510 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.383 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 2.734 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.447 W/kg
SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.135 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 54.9%
Maximum value of SAR (measured) = 0.362 W/kg

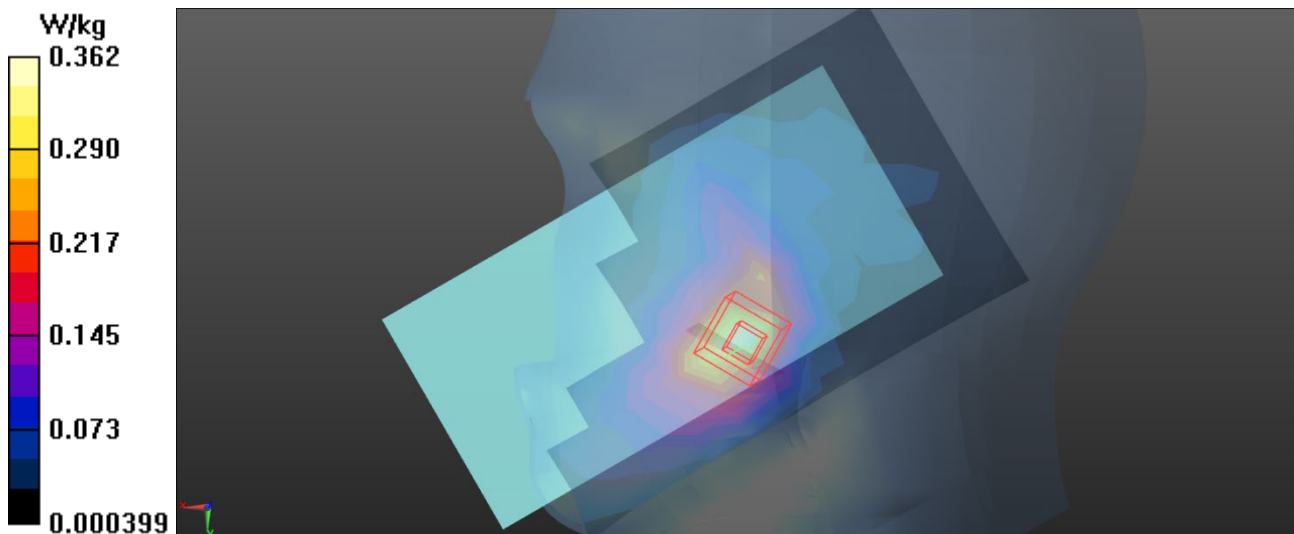

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/19

L55_LTE B13_QPSK10M_CH23230_1RB Offset 24_Left Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 782 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 42.453$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 782 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.0673 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.078 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.0760 W/kg
SAR(1 g) = 0.057 W/kg ; SAR(10 g) = 0.043 W/kg
Smallest distance from peaks to all points 3 dB below = 11.6 mm
Ratio of SAR at M2 to SAR at M1 = 73.8%
Maximum value of SAR (measured) = 0.0677 W/kg

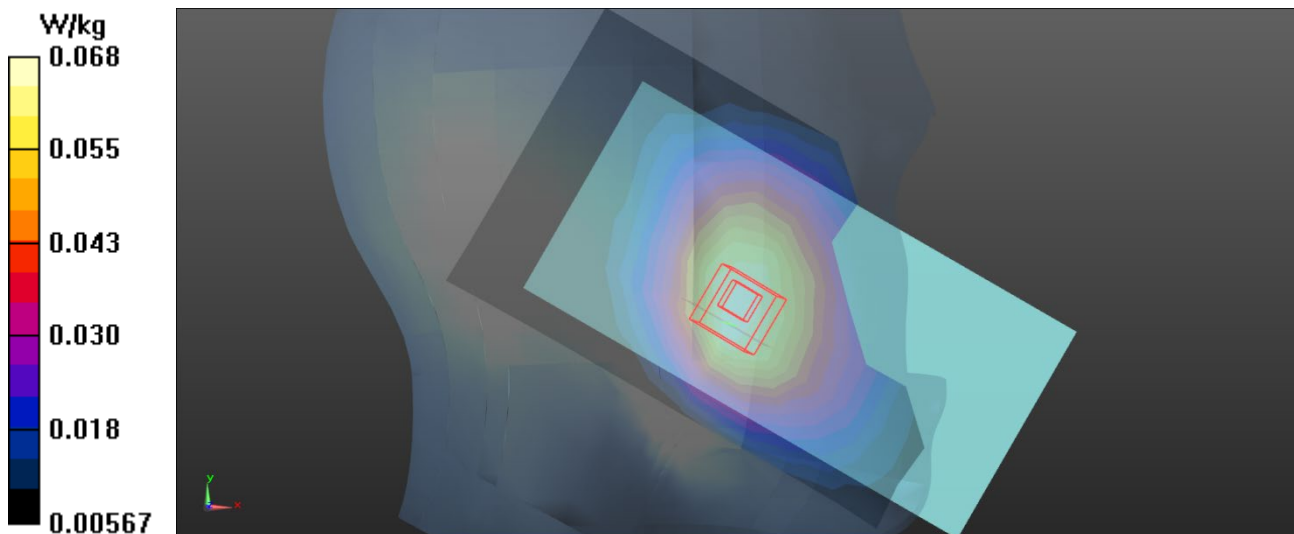

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/19

L70_LTE B26_QPSK15M_CH26865_1RB Offset 37_Left Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.3 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(9.15, 9.15, 9.15) @ 831.5 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.210 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.720 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 0.236 W/kg

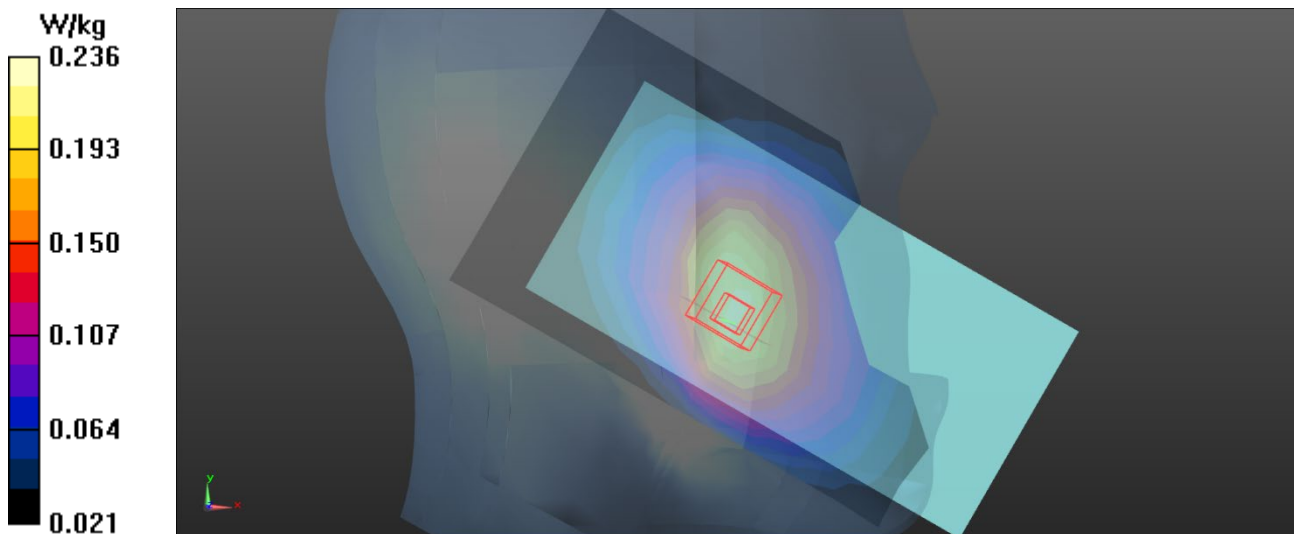

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/26

L75_LTE B38_QPSK20M_CH38000_1RB Offset 50_Right Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 2.039 \text{ S/m}$; $\epsilon_r = 37.871$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.3, 7.3, 7.3) @ 2595 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.265 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.738 V/m ; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.170 W/kg ; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.257 W/kg

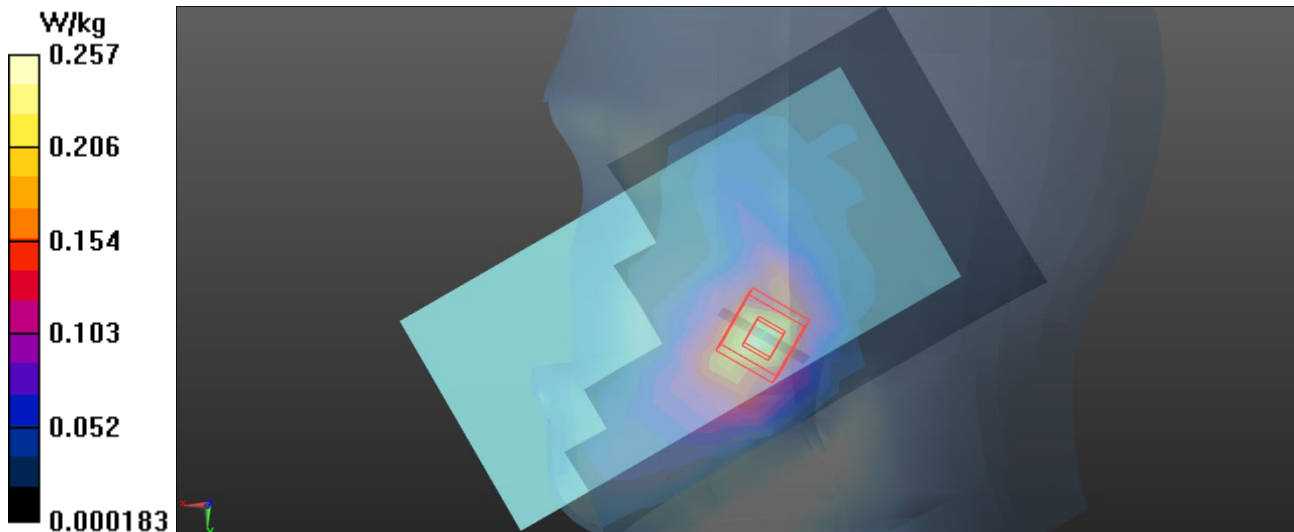

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/26

L101_LTE B41_QPSK20M_CH41490_1RB Offset 0_Right Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.136$ S/m; $\epsilon_r = 37.526$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.8 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(7.3, 7.3, 7.3) @ 2680 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.297 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 1.609 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.357 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.095 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 53.3%
Maximum value of SAR (measured) = 0.286 W/kg

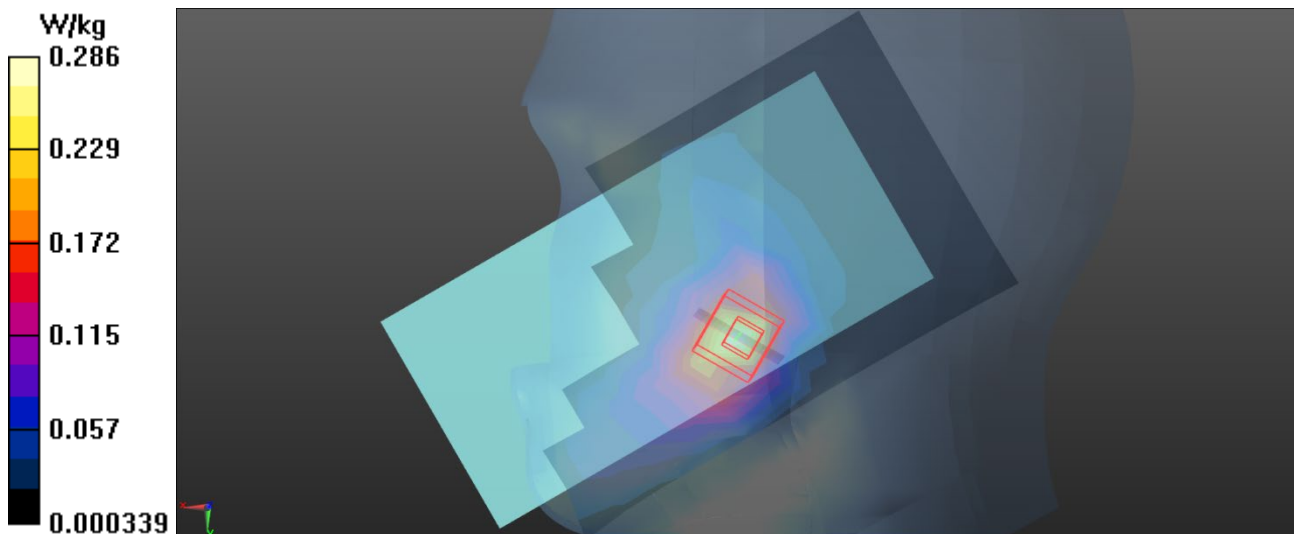

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/28

L125_LTE B66_QPSK20M_CH132572_1RB Offset 50_Left Cheek_Ant 31_SIM 1

DUT: Test sample;

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 38.918$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN3809; ConvF(8.04, 8.04, 8.04) @ 1770 MHz; Calibrated: 2026/2/9
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn420; Calibrated: 2026/4/17
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.132 W/kg

/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.479 V/m; Power Drift = 0 dB


Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 0.146 W/kg

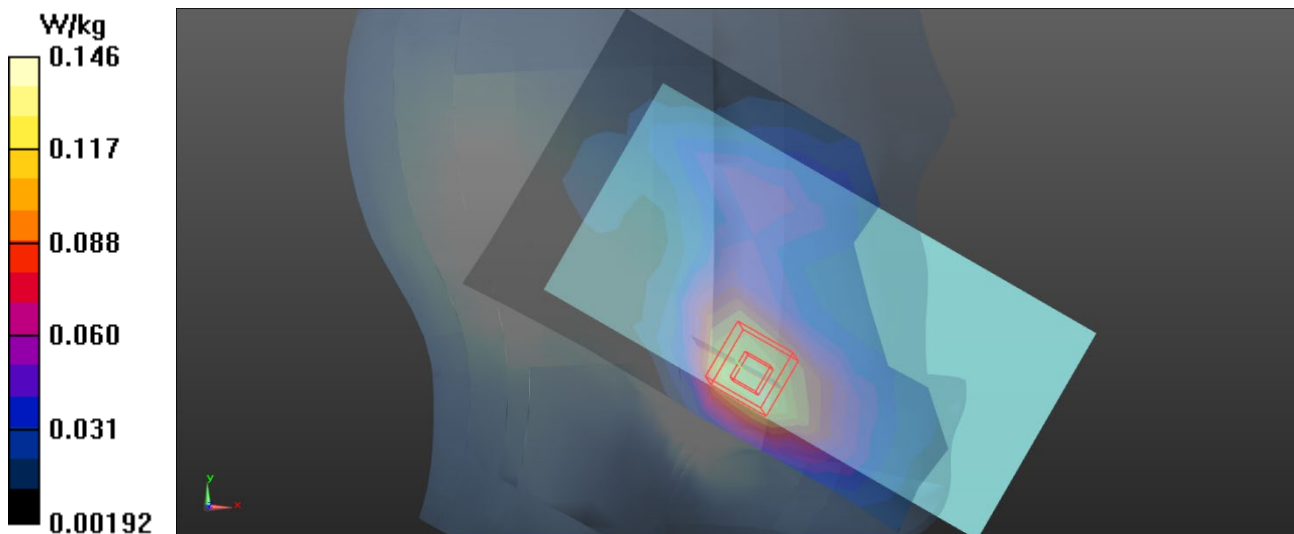

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/20

W03_WiFi 2.4G_802.11b_CH11_Left Cheek

DUT: Test sample;

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS,1Mbps) (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.898 \text{ S/m}$; $\epsilon_r = 39.487$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(7.29,7.14,7.75) @ 2462 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.17 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.83 V/m ; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.791 W/kg ; SAR(10 g) = 0.383 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 1.21 W/kg

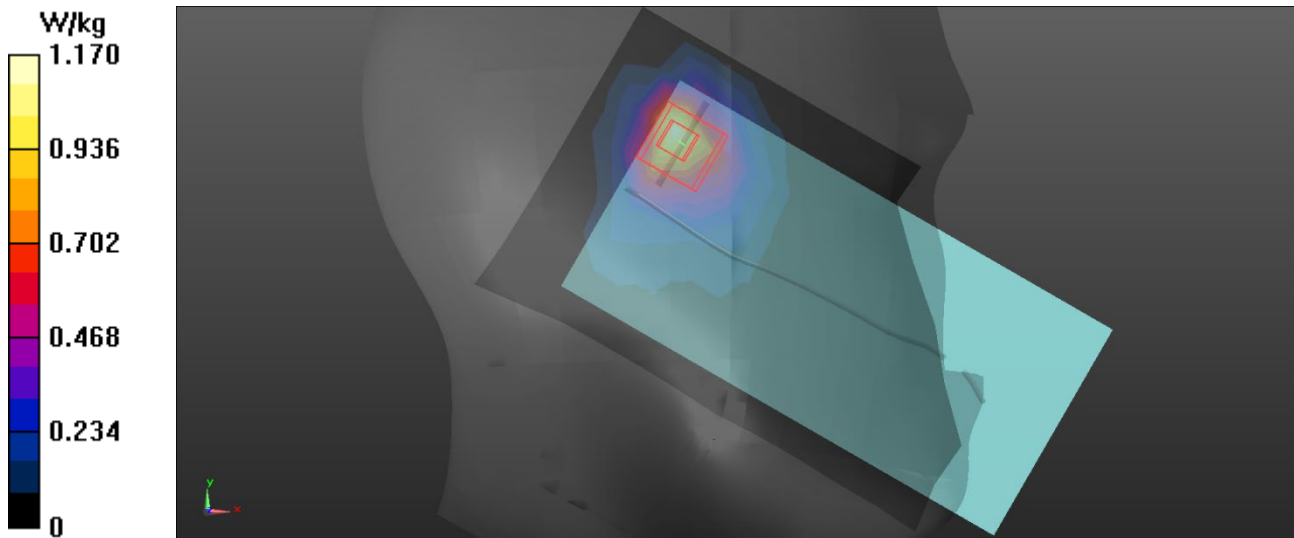

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/20

W31_WiFi 2.4G_802.11b_CH6_Left Cheek**DUT: Test sample;**

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS, 1Mbps) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 39.596$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.29, 7.14, 7.75) @ 2437 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.950 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.893 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 0.949 W/kg

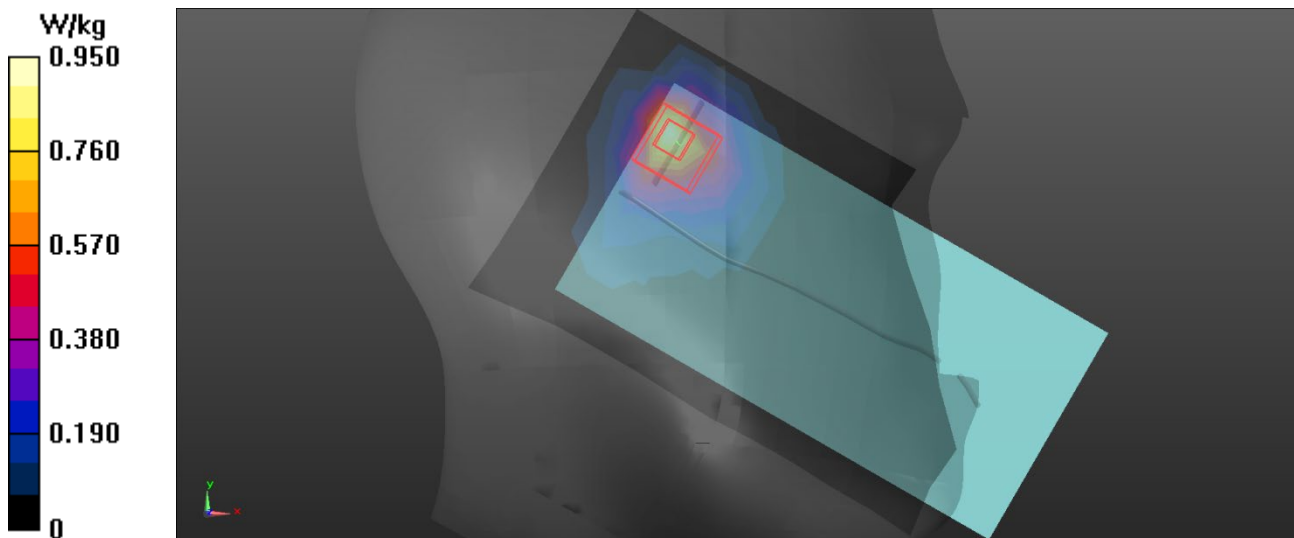

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/20

B05_BT_DH5_CH0_Left Cheek

DUT: Test sample;

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2402 \text{ MHz}$; $\sigma = 1.829 \text{ S/m}$; $\epsilon_r = 39.73$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.29, 7.14, 7.75) @ 2402 MHz; Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (10x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Maximum value of SAR (measured) = 0.138 W/kg
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.539 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.237 W/kg
SAR(1 g) = 0.117 W/kg ; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

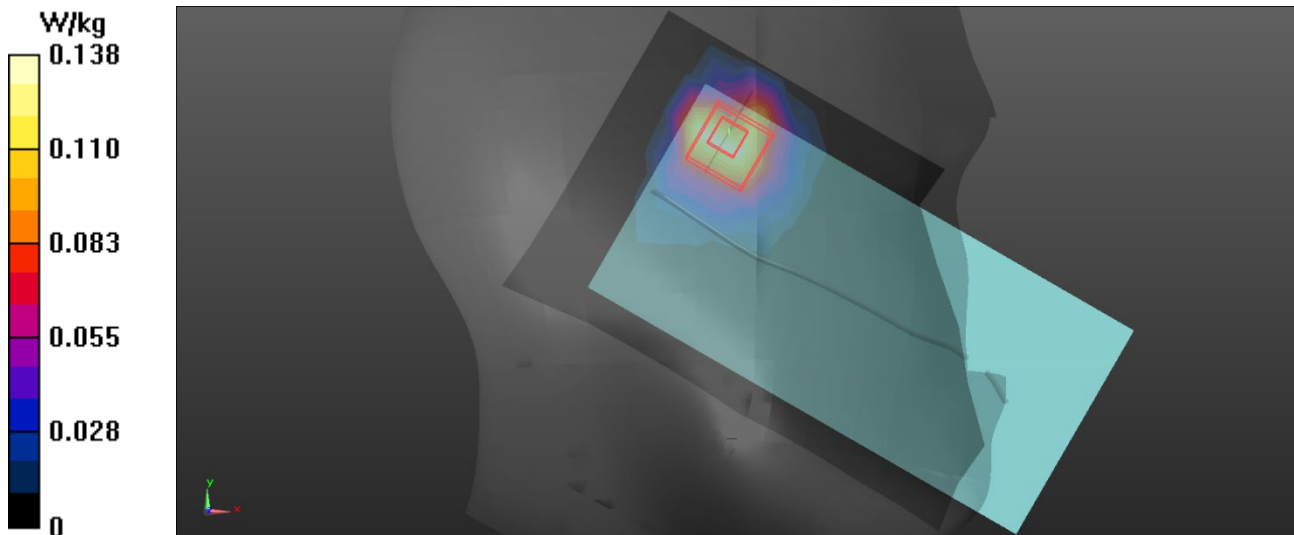Maximum value of SAR (measured) = 0.188 W/kg


Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/21

W10_WiFi 5.2G UNII_1_802.11a_CH36_Left Tilted

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.648 \text{ S/m}$; $\epsilon_r = 36.378$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.71,5.65, 6.1) @ 5180 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.717 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.183 V/m ; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 0.811 W/kg ; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 20.1%

Maximum value of SAR (measured) = 2.25 W/kg

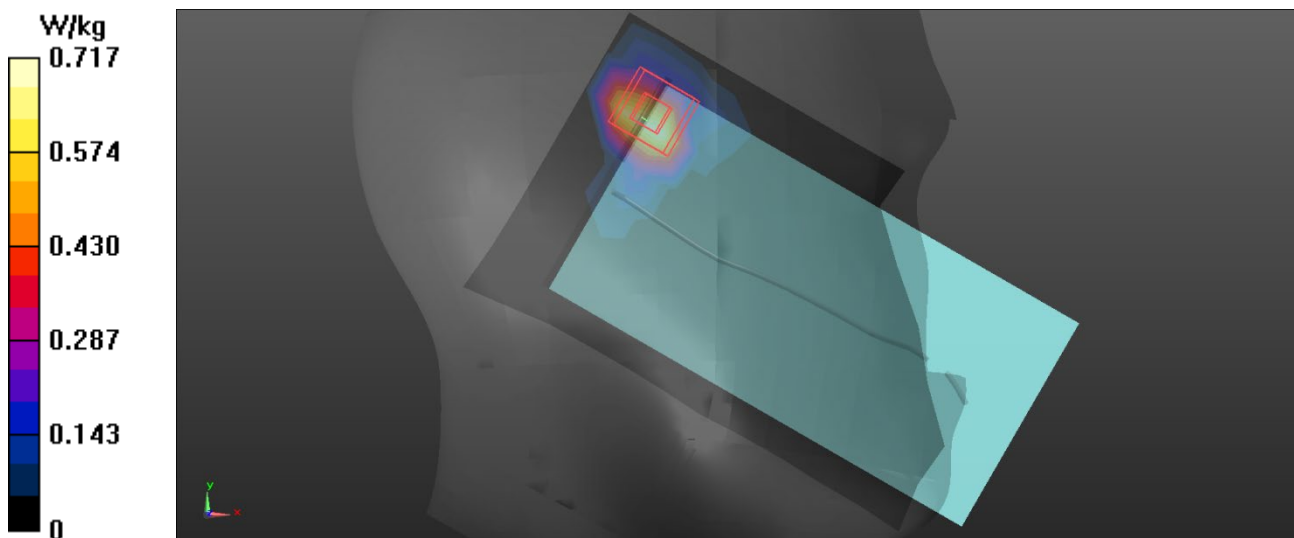

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/21

W16_WiFi 5.3G UNII_2A_802.11a_CH52_Left Tilted

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.743$ S/m; $\epsilon_r = 36.196$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.71,5.65,6.1) @ 5260 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.636 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.7520 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 3.83 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 21.4%

Maximum value of SAR (measured) = 1.91 W/kg

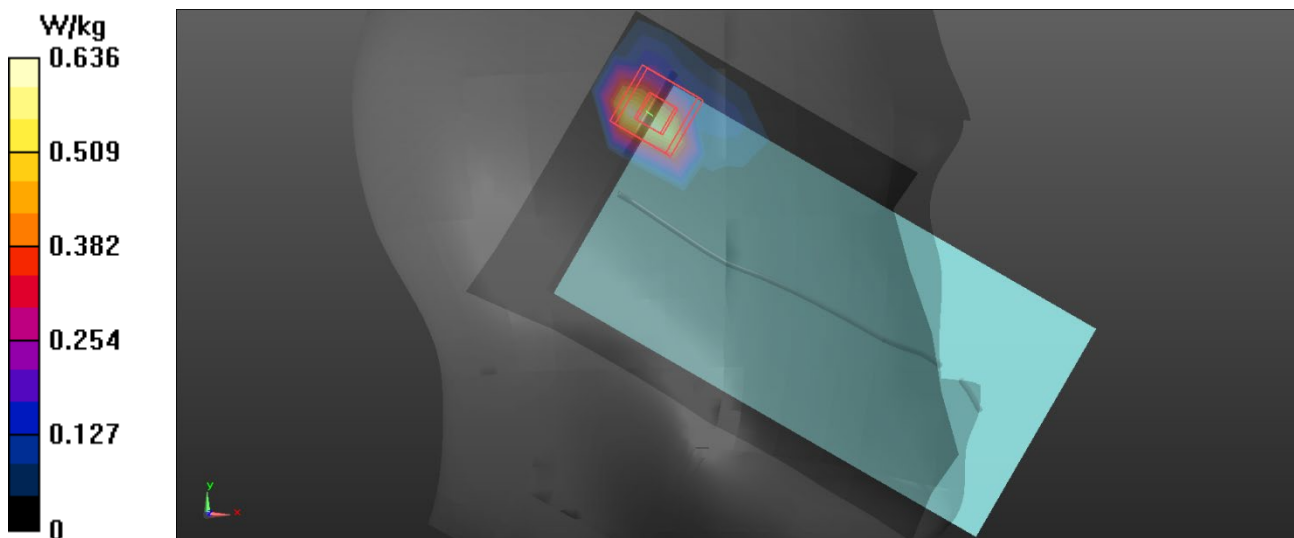

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

W19_WiFi 5.6G UNII_2C_802.11a_CH120_Left Cheek

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 35.386$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.33,5.27,5.69) @ 5600 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.80 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.869 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 4.79 W/kg

SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 16.7%

Maximum value of SAR (measured) = 2.35 W/kg

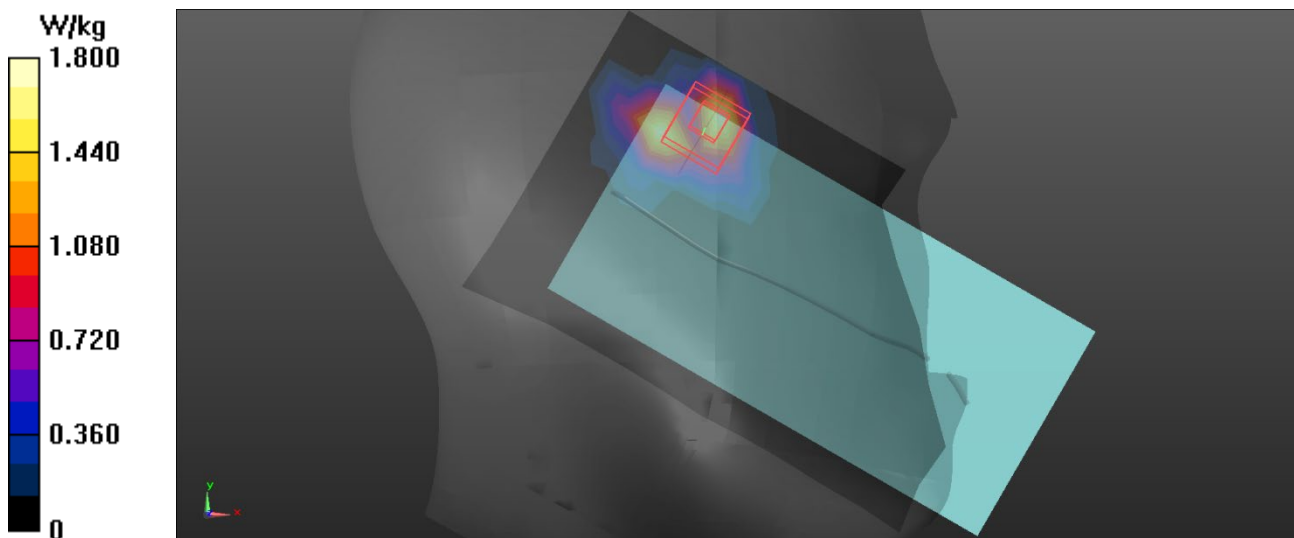

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

W26_WiFi 5.8G UNII_3_802.11a_CH149_Left Tilted

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.31 \text{ S/m}$; $\epsilon_r = 35.08$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.25,5.19,5.61) @ 5745 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.26 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 4.11 W/kg

SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 17.1%

Maximum value of SAR (measured) = 2.17 W/kg

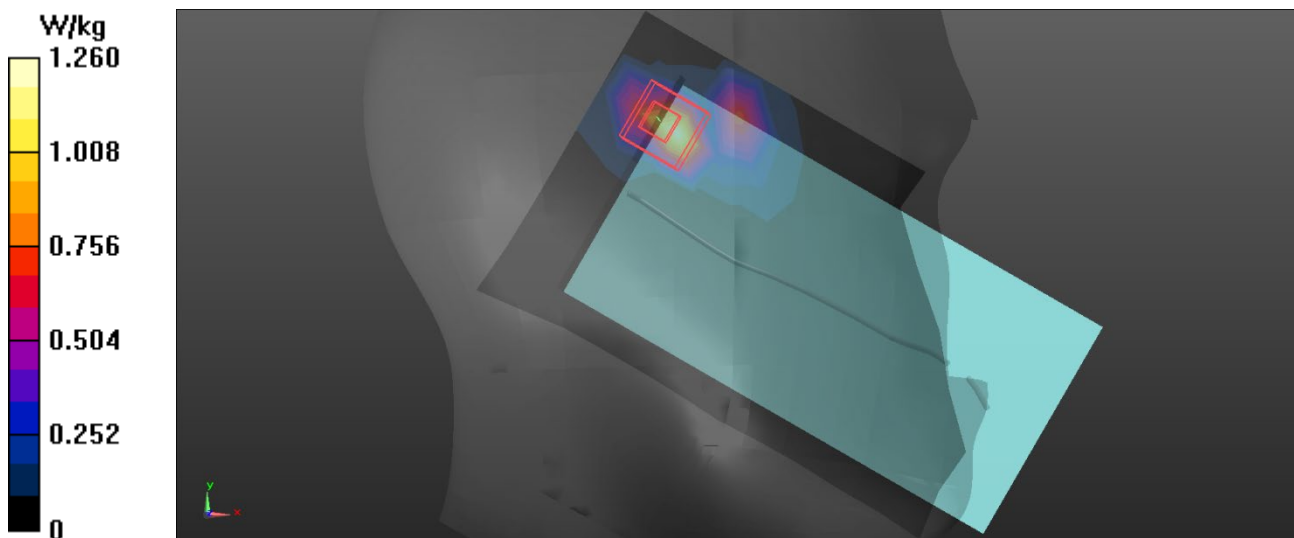

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/21

W38_WiFi 5.2G UNII_1_802.11a_CH36_Left Tilted

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.648 \text{ S/m}$; $\epsilon_r = 36.378$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.71,5.65,6.1) @ 5180 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.672 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.835 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 4.52 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 19.4%

Maximum value of SAR (measured) = 2.13 W/kg

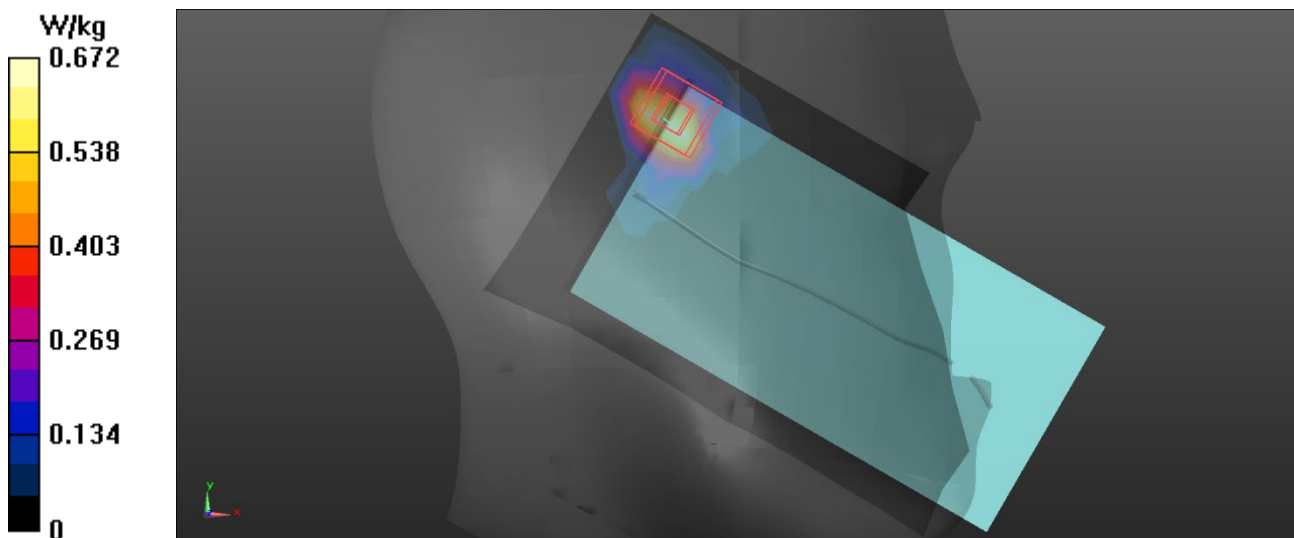

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/21

W44_WiFi 5.3G UNII_2A_802.11a_CH52_Left Tilted

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.743 \text{ S/m}$; $\epsilon_r = 36.196$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.71,5.65, 6.1) @ 5260 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.589 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.213 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 21.8%

Maximum value of SAR (measured) = 1.66 W/kg

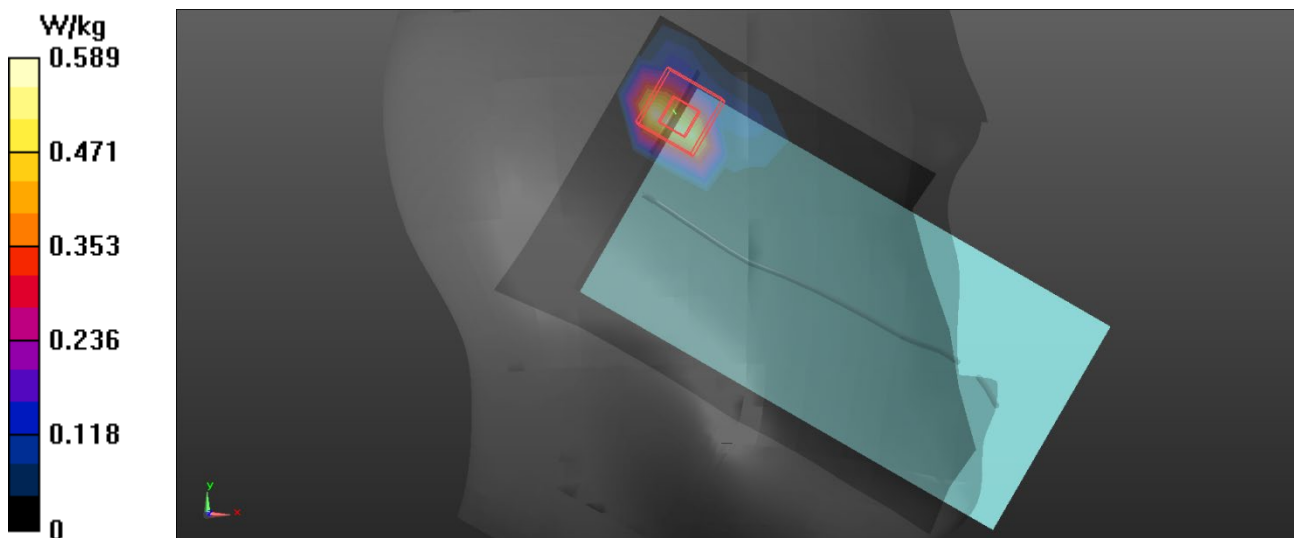

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

W47_WiFi 5.6G UNII_2C_802.11a_CH140_Left Cheek

DUT: Test sample;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 5700 \text{ MHz}$; $\sigma = 5.26 \text{ S/m}$; $\epsilon_r = 35.157$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8°C ; Liquid Temperature : 22.5°C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.25,5.19,5.61) @ 5700 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.64 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.8290 V/m ; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 0.838 W/kg ; SAR(10 g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 16.7%

Maximum value of SAR (measured) = 2.22 W/kg

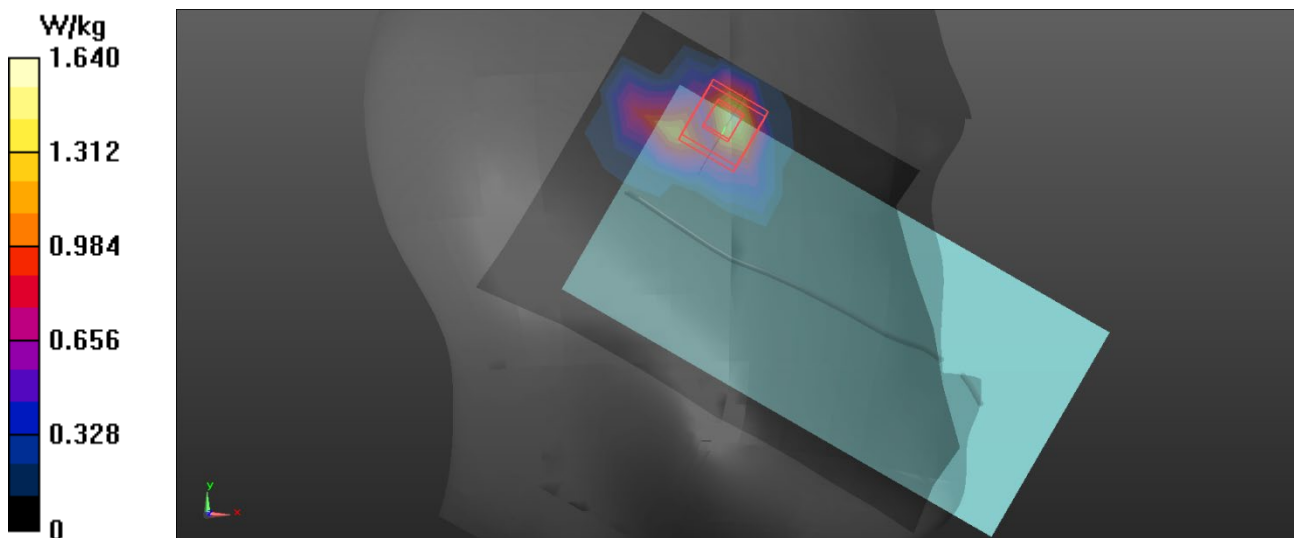

Test Laboratory: BTL Inc. (Dongguan)

Date: 2026/7/22

W54_WiFi 5.8G UNII_3_802.11a_CH149_Left Tilted**DUT: Test sample;**

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 5745$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 35.08$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe:EX3DV4 - SN7693;ConvF(5.25,5.19,5.61) @ 5745 MHz;Calibrated: 2025/11/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1390; Calibrated: 2025/11/19
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD000P40CB; Serial: TP:1469
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.908 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 16.7%

Maximum value of SAR (measured) = 1.57 W/kg

