TEST REPORT

APPLICANT	: XC Tracer GmbH
PRODUCT NAME	: XC Tracer Maxx III
MODEL NAME	: XC Tracer Maxx III
TRADE NAME	: XC Tracer
BRAND NAME	: XC Tracer
STANDARD(S)	: IEEE Std 149-2021
RECEIPT DATE	: 2025-10-27
TEST DATE	: 2025-10-27
ISSUE DATE	: 2026-02-04

Edited by: MaoRuJie

Mao Rujie(Rapporteur)

Approved by:

Chi Shide(Supervisor)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn

DIRECTORY

Change History		
Version	**Date**	**Reason for change**
1.1	2026-02-04	Updated client information
1.0	2025-11-05	First edition

1.Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	XC Tracer GmbH
Applicant Address:	Junkerngasse 53, 3011 Bern, Switzerland
Manufacturer:	XC Tracer GmbH
Manufacturer Address:	Junkerngasse 53, 3011 Bern, Switzerland

1.2. Equipment Under Test (EUT) Description

Wireless Type	N/A
Frequency	868MHz, 868.3MHz, 868.6MHz, 902MHz,914MHz,928MHz
IMEI	N/A
Sample No.	1#

2. Test Results

2.1.Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	IEEE Std 149-2021	IEEE Recommended Practice for Antenna Measurements

2.2. Test Conditions

Test Environment Conditions:

Relative Humidity(%):	25 - 75
Temperature(°C):	10 - 30

2.3. Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in Measurement” (GUM) published by ISO. When the test result is a critical value,we will use the measurement uncertainty give the judgment result based on the 95% Confidence intervals.

2.4. Test Results lists

2.4.1.Gain

Frequency (MHz)	Gain(dBi)
868	-0.38
868.3	-0.38
868.6	-0.38
902	-0.51
914	-0.00
928	-0.25

Annex A Test Setup Photos

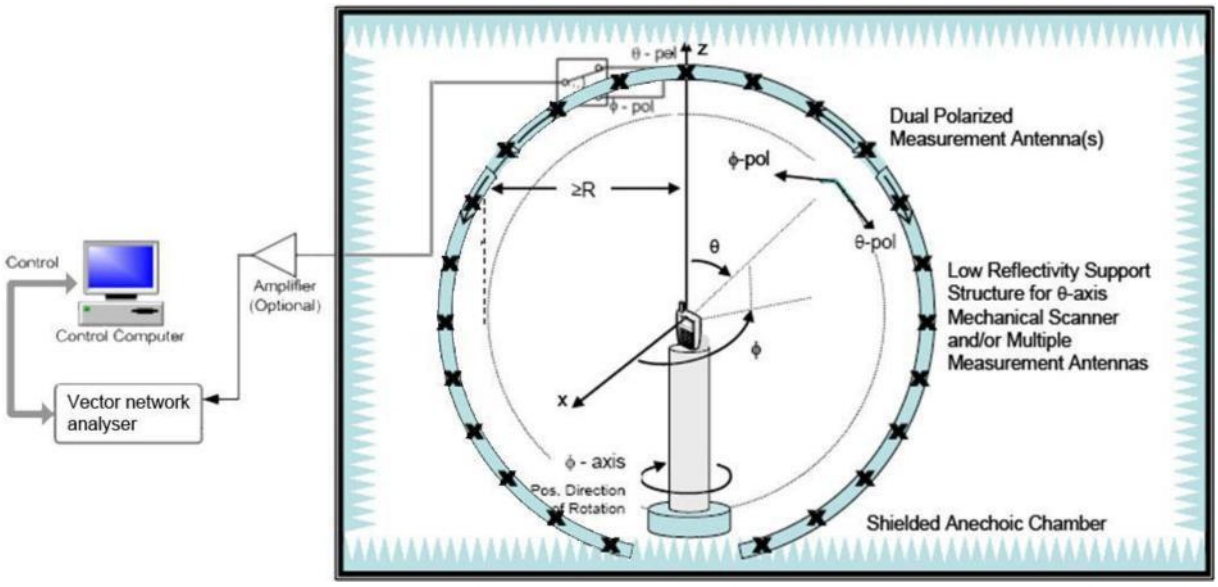

Annex B Figures

1. 2D Radiation Pattern

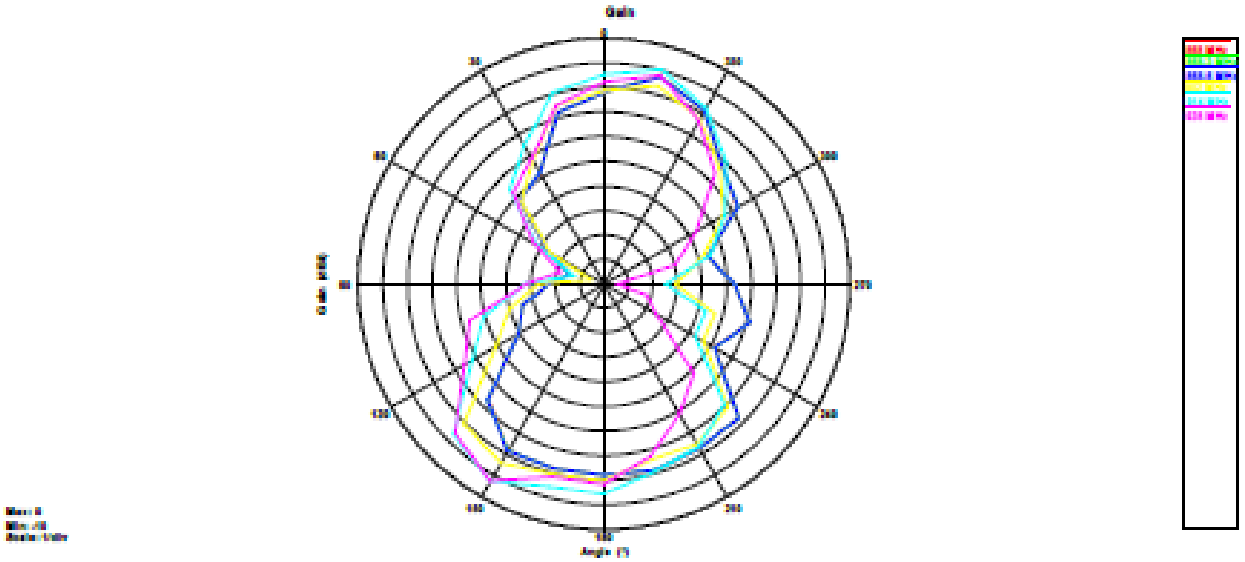

Phi=0°

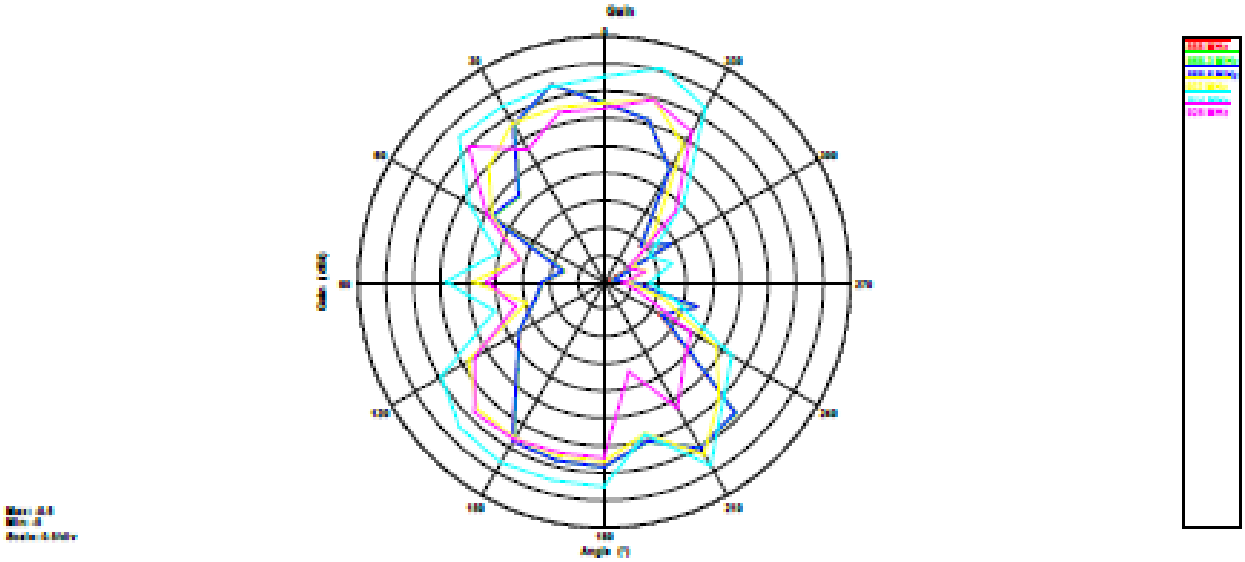

Phi=90°

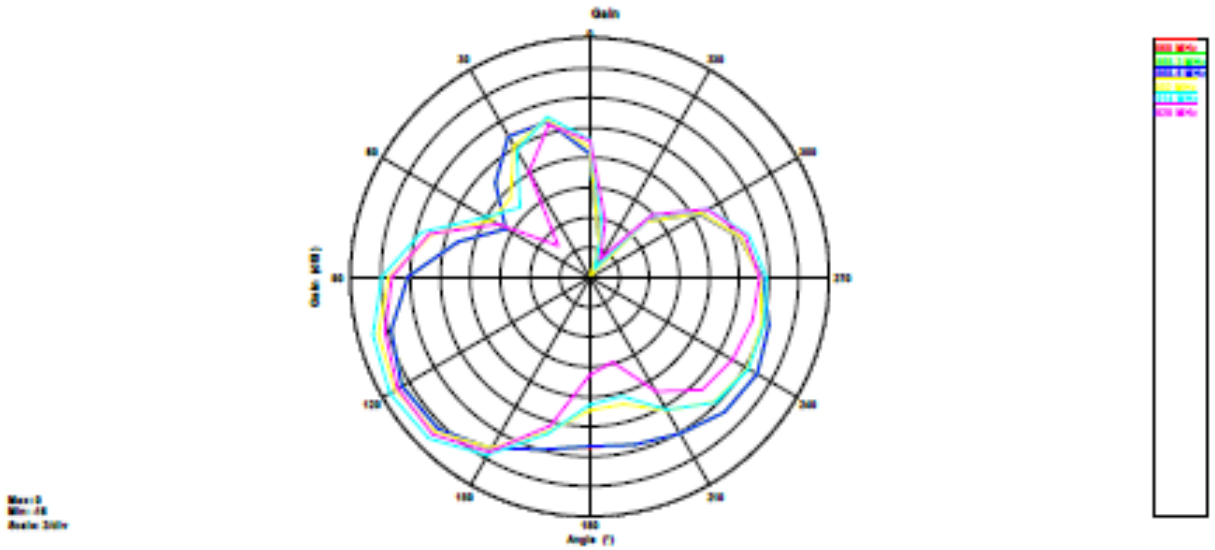

Theta=90°

2. 3D Radiation Pattern

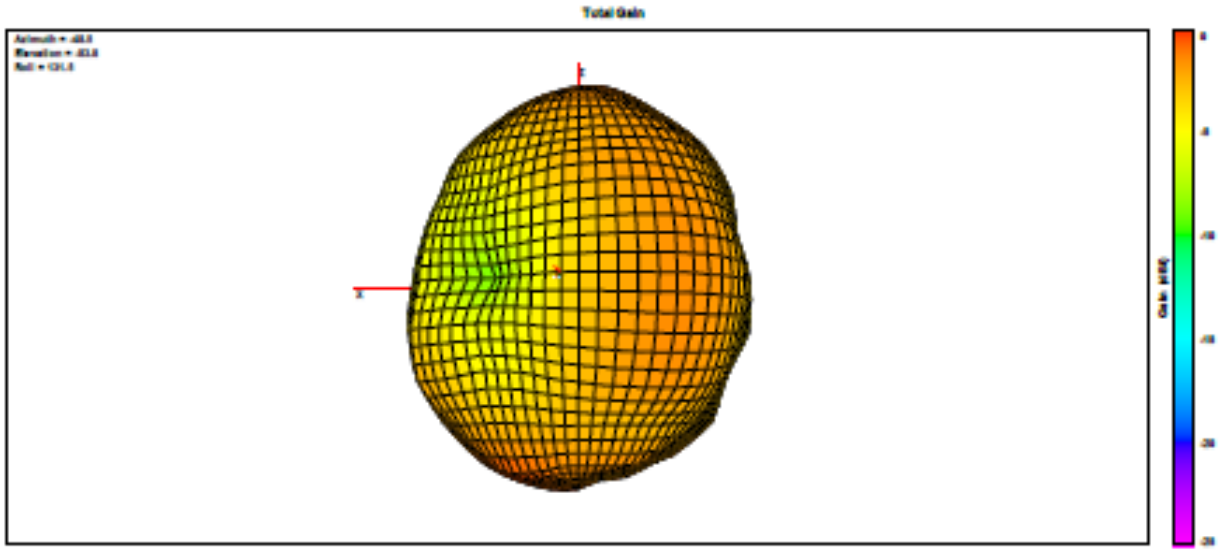

868MHz

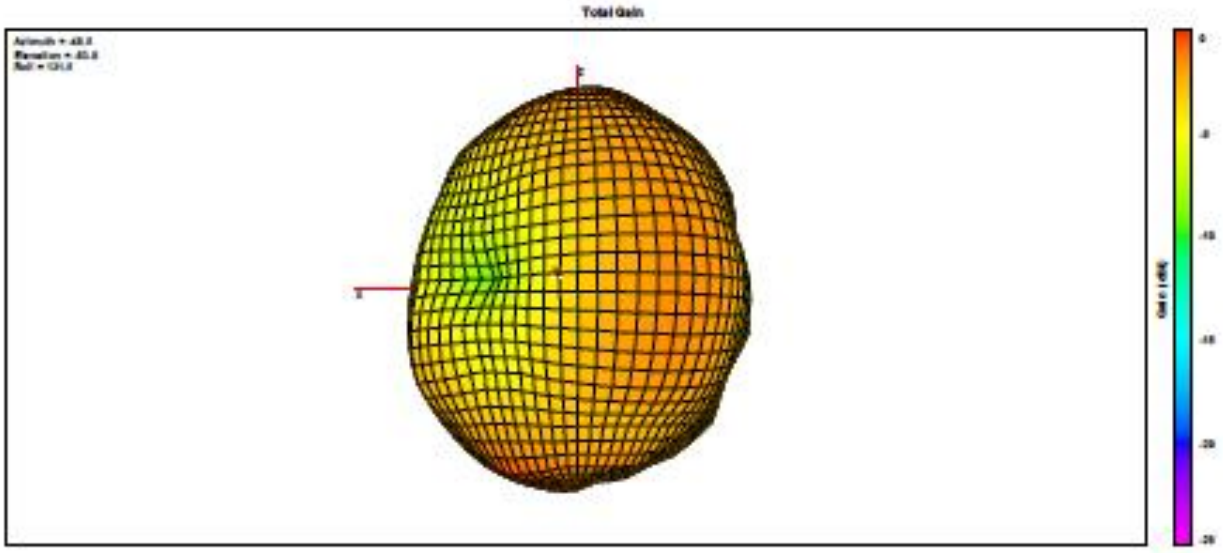

868.3MHz

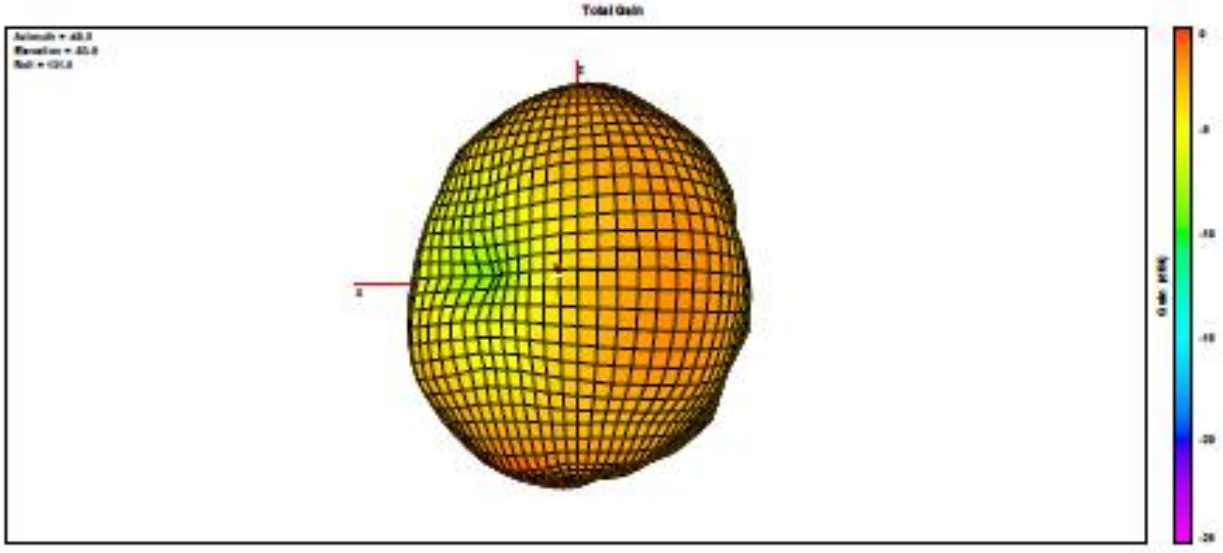

868.6MHz

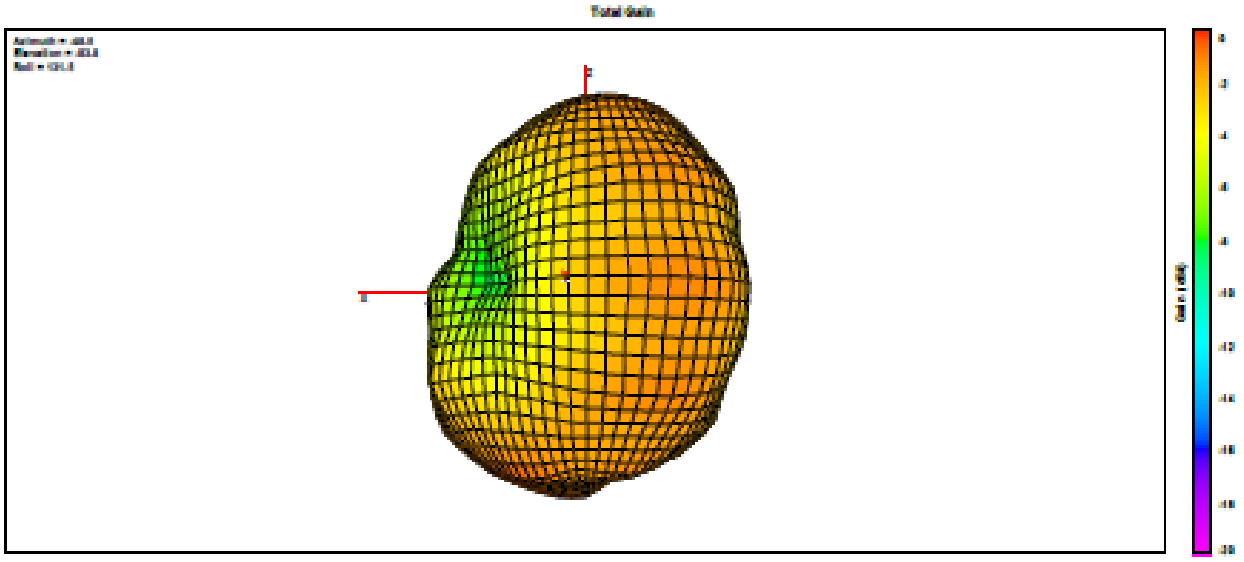

902MHz

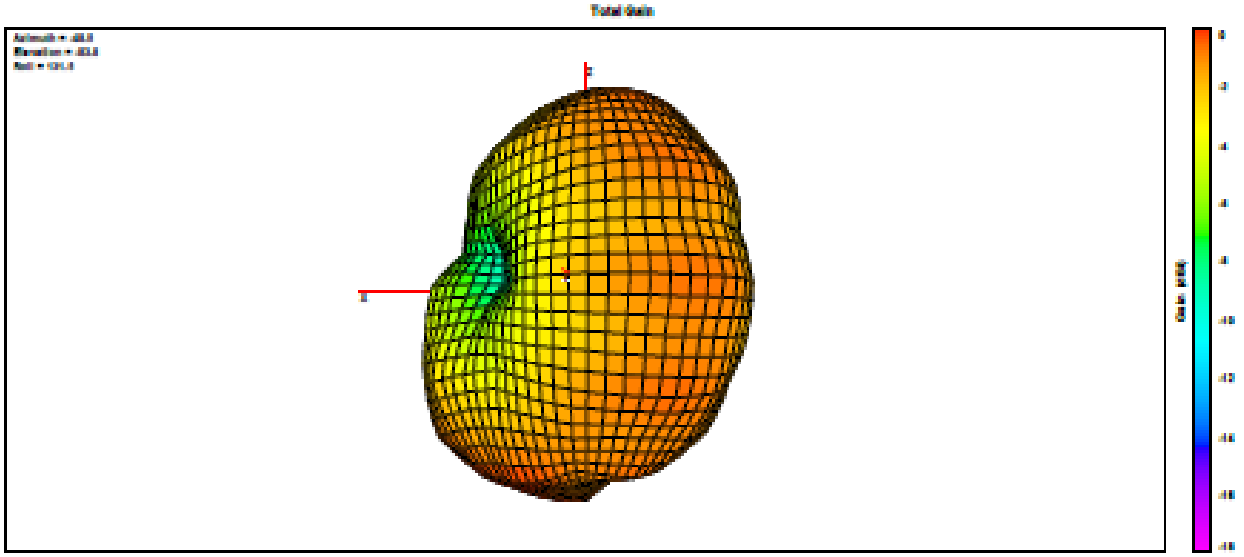

914MHz

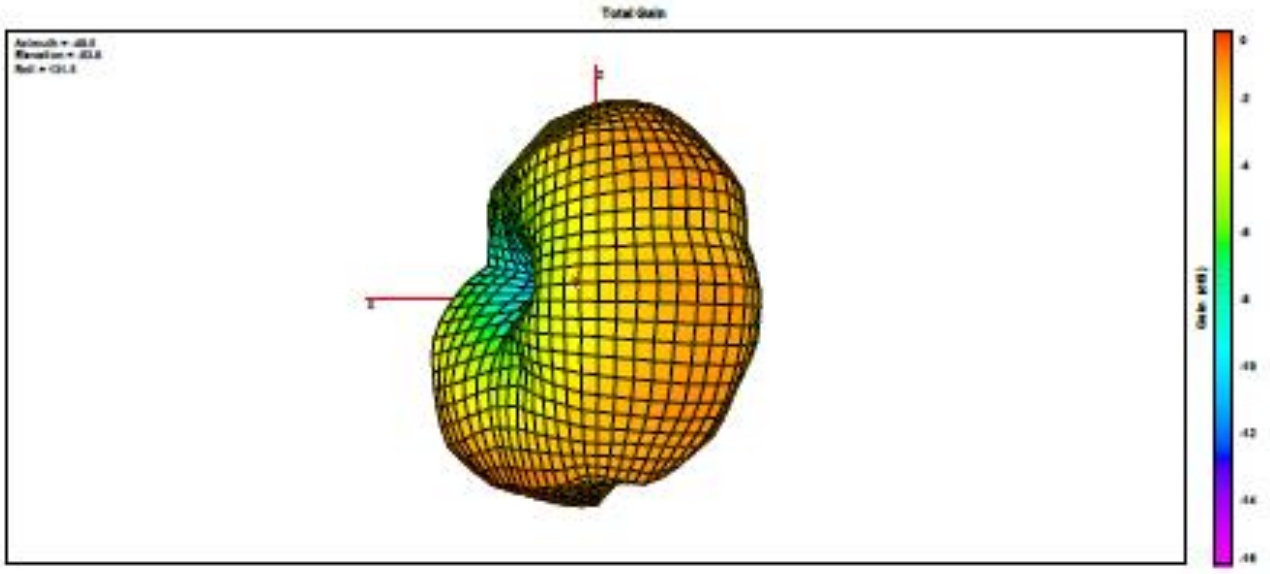

928MHz

Annex C General Information

1.1 Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

1.3 Test Equipments Utilized

No.	Equipement Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Network Analyzer	MY46110140	E5071C	Agilent	2024.05.30	2025.05.29
2	OTA Chamber	TJ2235-Q1793	AMS-8923 -150	ETS	2022.11.30	2025.11.29

1.4 Test Software Utilized

No.	Software Name	Serial No.	Version	Manufacturer
1	Antenna Measurement System	1685	EMQuest EMQ-100 V 1.13 Build 21267	ETS

Note: The Main report is end here and the other Annex D will be submitted separately.

END OF MAIN REPORT