


Outdoor Aurora Projector Light User Manual

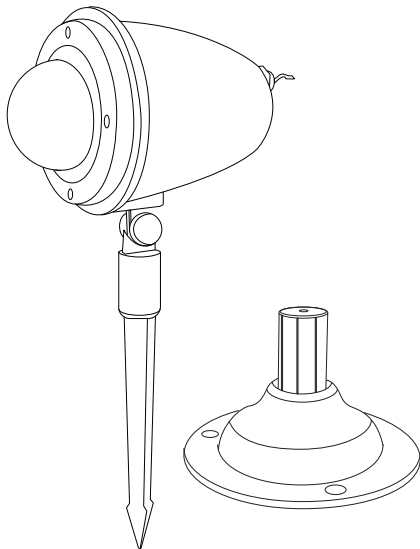

Unboxing Check

Thank you for purchasing our products, please read the instruction manual carefully before use. Instruction manual contains necessary safety advice and user instructions, follow the instruction manual to operate in order to avoid damaging the product for misuse. Check whether the product is damaged or not when you receive the product.

Package List:

Outdoor Aurora Projector
Light x 1
Power Adapter x 1
Ground Stake x 1
Round Base x 1
Remote Control x 1
User Manual x 1


Notice:

1. Strictly in accordance with the instructions of this operation, do not disassemble the host and accessories.
2. This product is suitable for indoor and outdoor use.

Warnings:


The power requirement of this product is 100-240V/50-60Hz. Once it exceeded the range, please use with the regulator device to avoid shorten the lifetime.

How to Use

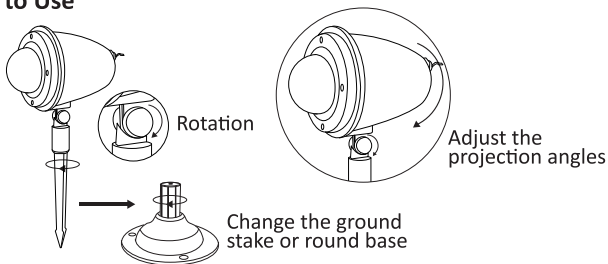


Assemble Instruction

1. Aurora projector light can be placed into the ground with the ground stake.
2. Place the projection light about 10 to 15 feet from the projected surface (see fig. 1), you can adjust the projected distance and direction to get the best projection effect.
3. Aurora projector light can be fixed with the round base for indoor use.



Remote Control Function Description:



- Button 1: Power On/Off (the light will back to default mode once the device restarts)
- Button 2: Control ocean wave moving speed up (0%-50%-80%, 50% by default)
- Button 3: Control ocean wave moving speed down (0%-50%-80%)
- Button 4: Change RGBW ocean wave colors, the light is default in circular mode
Once Press: Turn off ocean wave light

Press again: B - R - G - W - RB - GB - BW - RG - RW - GW - Back to the default circular mode (the light will circle through B - R - G - W - RB - GB - BW - RG - RW - GW)

-  Button 5: FADE 1/FADE 2: Single color mode and double-color mode switch
 Press the button, ocean wave move circularly in R-G-B-W single color mode
 Press again, ocean wave move circularly in RB - GB - BW - RG - RW - GW double-color mode
-  Button 6: Aurora light switch on/off
-  Button 7: 2H Timer (The light flash once time as prompting)
-  Button 8: 4H Timer (The light flash 2 times as prompting)
-  Button 9: Timer Off (The light flash 3 times as prompting)

Notice

The product with built-in 6 hours automatically shut off that is working for 6 hours and automatically shut down. Once it automatically shut down, please use the remote control to power on again and the light will back to the default mode.

Specifications

Host Material	ABS
Input Rated Voltage	14V
Maximum Power	4.9W
Maximum Working Current	350mA
Projection Light Source	LED light bead
Projection Light Source Wavelength	Red light beads (620-625nm), green light beads (520-525nm), blue light beads (460-465nm), white light beads (5500-6000k)

Projection Distance	2-10M
Projection Area	The projection area is 40 m ² at a distance of 5M, and 60 m ² at a distance of 8M
Input Power	100-240V 50/60Hz 0.7A Max
Operating Temperature	-20~75℃ /-4~122°F
Storage Temperature	-20~60℃ /-4~140°F
Product Model	BL-DP-BJG
Power Cable Length	10M
Waterproof Grade	IP65
Use and Maintenance	Indoor and Outdoor Use

§ 15.19 Labelling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.