

FCC SAR Test Report

Report No. : 1812C50490112501

Applicant : Revopoint 3D Technologies Inc

Address : Office 902, 9/F, Tinno Building, Tongfa South
Rd, Xili Street, Nanshan District, Shenzhen,
China

Product Name : 3D Scanner

Report Date : 2025-12-01

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. Statement of Compliance	6
2. General Information	7
2.1. Client Information	7
2.2. Description of Equipment Under Test (EUT)	7
2.3. Device Category and SAR Limits	8
2.4. Applied Standard	8
2.5. Environment of Test Site	8
2.6. Test Configuration	8
2.7. Description of Test Facility	8
2.8. Disclaimer	9
3. Specific Absorption Rate (SAR)	10
3.1. Introduction	10
3.2. SAR Definition	10
4. SAR Measurement System	11
4.1. E-Field Probe	12
4.2. Data Acquisition Electronics (DAE)	12
4.3. Robot	13
4.4. Measurement Server	13
4.5. Phantom	14
4.6. Device Holder	15
4.7. Data Storage and Evaluation	15
5. Test Equipment List	18
6. Tissue Simulating Liquids	19
7. System Verification Procedures	20
8. EUT Testing Position	22
8.1. Body Position	22
9. Measurement Procedures	23
9.1. Spatial Peak SAR Evaluation	23
9.2. Power Reference Measurement	24
9.3. Area Scan Procedures	24
9.4. Zoom Scan Procedures	25
9.5. Volume Scan Procedures	26
10. Output Power	27
11. Exposure Positions Consideration	32
12. SAR Test Results Summary	33
12.1. SAR Test Results	33
13. Simultaneous Transmission Analysis	36

13.1. Simultaneous TX SAR Considerations36

14. Measurement Uncertainty37

TEST REPORT

Applicant : Revopoint 3D Technologies Inc
Manufacturer : Revopoint 3D Technologies Inc
Product Name : 3D Scanner
Model No. : MetroY Pro, MetroY Max, MetroY Ultra, Laserscan 17

Trade Mark :  **REVOPOINT**

Rating(s) : Input: 12V=3A

**Test Standard(s) : IEEE Std 1528™-2013; FCC 47 CFR Part 2.1093;
ANSI/IEEE C95.1:2019; Reference FCC KDB 447498 D01 v06; KDB
248227 D01 v02r02; KDB 865664 D01**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the IEEE Std 1528™-2013, FCC 47 CFR Part 2.1093, IEEE Std C95.1-2019 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt 2025-11-19

Date of Test 2025-11-19 to 2025-11-21

Prepared By



(Qiangfei Yang)

Approved & Authorized Signer



(Yufan Xie)

Version

Version No.	Date	Description
R00	2025-12-01	Original

1. Statement of Compliance

<Highest SAR Summary>

Frequency Band	Highest Reported 10g-SAR(W/Kg)	SAR Test Limit (W/Kg)
	limbs (0mm)	
WLAN5.2G	1.346	4.0
WLAN5.3G	1.301	
Test Result	PASS	

Frequency Band	Highest Reported 1g-SAR(W/Kg)	SAR Test Limit (W/Kg)
	Body (5mm)	
WLAN5.2G	0.718	1.6
WLAN5.3G	0.977	
Test Result	PASS	

This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6 W/kg as averaged over any 1 gram of tissue and 4.0 W/kg as averaged over any 10 gram of tissue; specified in RSS-102, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528™-2013 and FCC KDB publications.

2. General Information

2.1. Client Information

Applicant	:	Revopoint 3D Technologies Inc
Address	:	Office 902, 9/F, Tinno Building, Tongfa South Rd, Xili Street, Nanshan District, Shenzhen, China
Manufacturer	:	Revopoint 3D Technologies Inc
Address	:	Office 902, 9/F, Tinno Building, Tongfa South Rd, Xili Street, Nanshan District, Shenzhen, China
Factory	:	Zhejiang Revopoint Optoelectronics Technology Co.,Ltd
Address	:	2F, Building 7, No.1, Weizhong Road, Weitang Street, Jiashan County, Jiaxing City, Zhejiang Province, China

2.2. Description of Equipment Under Test (EUT)

Product Name	:	3D Scanner
Model No.	:	MetroY Pro, MetroY Max, MetroY Ultra, Laserscan 17 (Note: All samples are the same except the model number and button location, so we prepare "MetroY Pro" for test only.)
Trade Mark	:	 REVOPOINT
Test Power Supply	:	DC 12V from adapter
Test Sample No.	:	1-2-2(Engineering Sample)
Tx Frequency	:	WLAN5.2G:5180MHz-5250MHz WLAN5.3G:5250MHz-5320MHz
Type of Modulation	:	WIFI:OFDM
Category of device	:	Portable device
Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.		

2.3. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.4. Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2.1093
- IEEE Std C95.1-2019
- IEEE Std 1528™-2013
- KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- KDB 865664 D02 RF Exposure Reporting v01r02
- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02

2.5. Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

2.6. Test Configuration

For WiFi testing, the prototype can continuously transmit RF signals through a frequency-fixing software to conduct SAR testing.

2.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,

Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

2.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

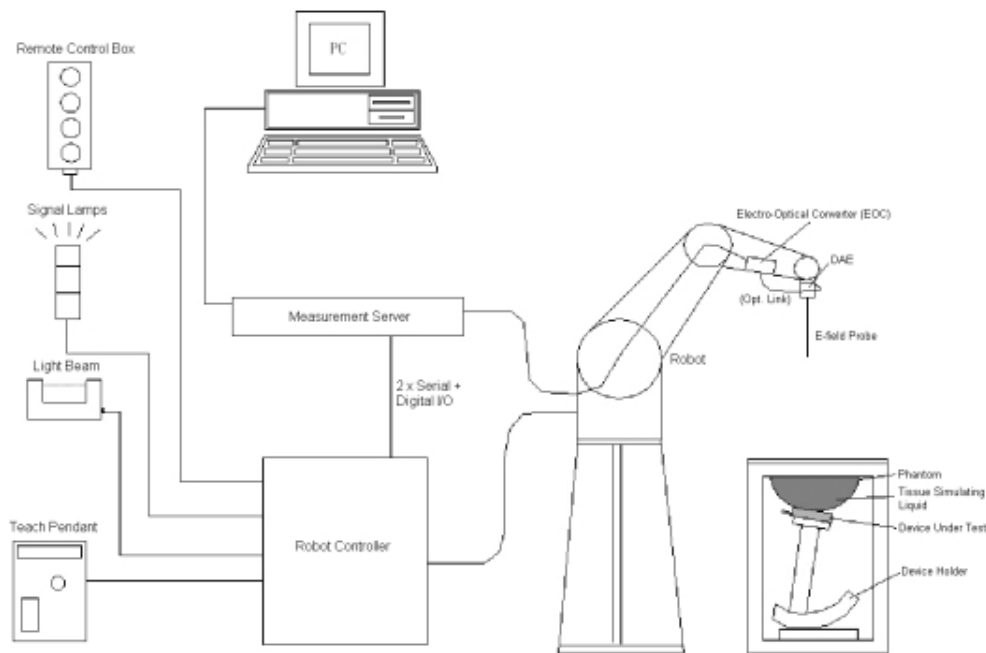

DASY System Configurations

The DASYS system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASYS software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom and ELI4 Phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

4.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 Photo of EX3DV4
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

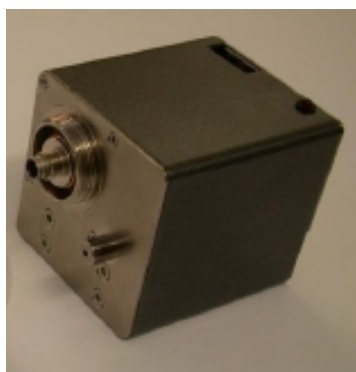


Photo of DAE

4.3. Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60L) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Photo of DASY5

4.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASYS5

4.5. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm

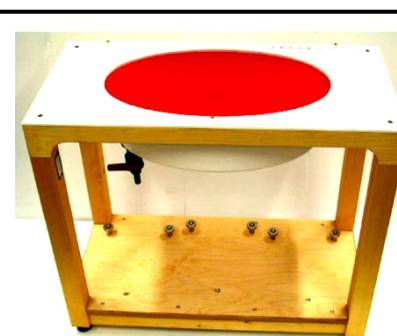


Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6. Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-loss

media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i= x, y, z)
 Norm_i = sensor sensitivity of channel i, (i= x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	5GHz System Validation Kit	D5GHzV2	1093	Sep.17,2025	Sep.16,2028
SPEAG	Data Acquisition Electronics	DAE4	387	Oct.13, 2025	Oct.12, 2026
SPEAG	Dosimetric E-Field Probe	EX3DV4	7396	Oct.09, 2025	Oct.08, 2026
Agilent	ENA Series Network Analyzer	MS46121A	1618412	Feb.24, 2025	Feb.23, 2026
SPEAG	DAK	DAK-3.5	1256	Oct.10, 2025	Oct.09, 2026
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
Mini-Circuits	Amplifier	ZVA-183W-S+	932502132	NCR	NCR
Agilent	Power Meter	N1914A	MY50001102	Oct.25, 2025	Oct.24, 2026
Agilent	Power Sensor	E9323A	US40410647	Jan. 23, 2025	Jan. 22, 2026
Agilent	Power Sensor	E9323A	MY53100007	Jan. 23, 2025	Jan. 22, 2026
CDKMV	Attenuator	6610	6610-1	May.21, 2025	May.20, 2026
CDKMV	Attenuator	6606	6606-1	May.21, 2025	May.20, 2026
Agilent	Spectrum Analyzer	N9020A	MY51170037	Oct.25, 2025	Oct.24, 2026
Agilent	Signal Generation	N5182A	MY48180656	Oct.25, 2025	Oct.24, 2026
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Oct.25, 2025	Oct.24, 2026

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:

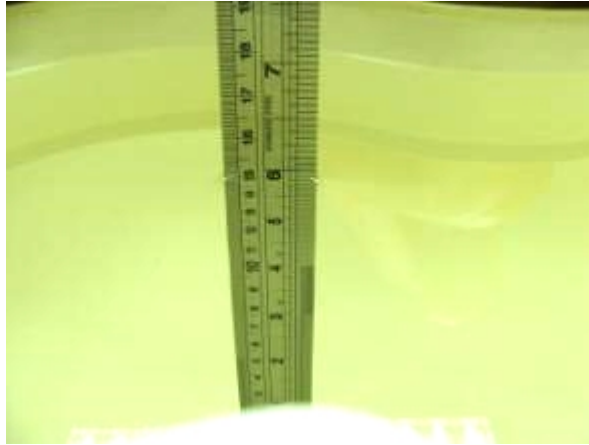


Photo of Liquid Height for Head SAR

The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Measured Tissue		Target Tissue		Dev. (%)		Liquid Temp.	Test Date
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)		
5190	4.47	35.46	4.63	36.00	-3.46	-1.50	22.5	2025-11-21
5230	4.55	35.38	4.64	35.99	-1.94	-1.69	22.5	2025-11-21
5250	4.59	35.34	4.66	35.98	-1.50	-1.78	22.5	2025-11-21
5260	4.61	35.32	4.67	35.95	-1.28	-1.75	22.5	2025-11-21
5300	4.69	35.26	4.70	35.93	-0.21	-1.86	22.5	2025-11-21
5320	4.73	35.22	4.73	35.91	0.00	-1.92	22.5	2025-11-21

7. System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

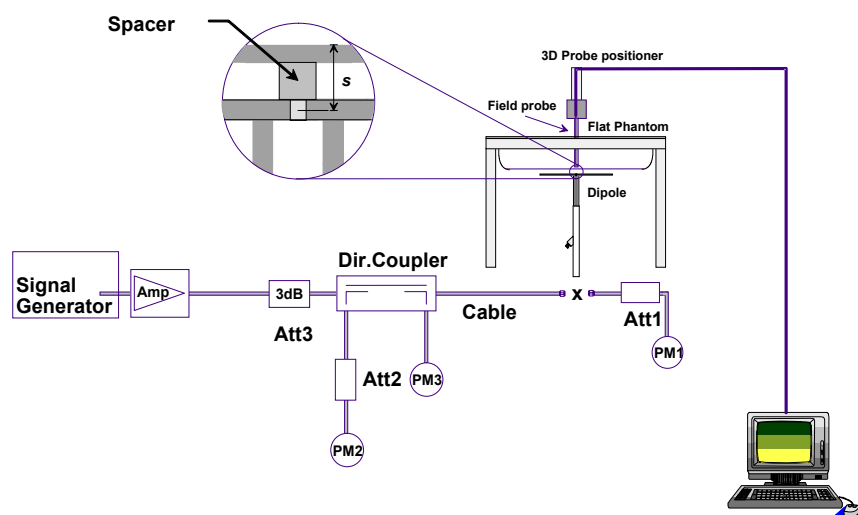

System Setup for System Evaluation

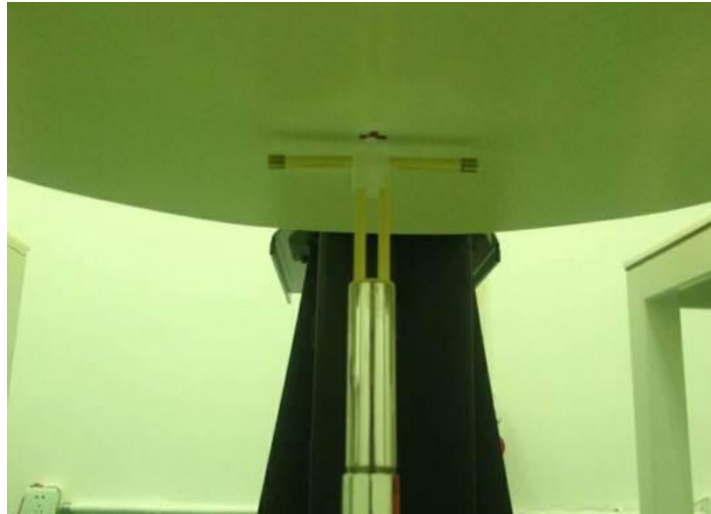


Photo of Dipole Setup

➤ **Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR 1g(W/kg)	Measured SAR 1g(W/kg)	Normalized SAR 1g(W/kg)	Deviation (%)	Test Date
5250	100	82.9	7.56	75.6	-8.81	2025-11-21


Target and Measurement SAR after Normalized

8. EUT Testing Position

8.1. Body Position

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 v06, 2015 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

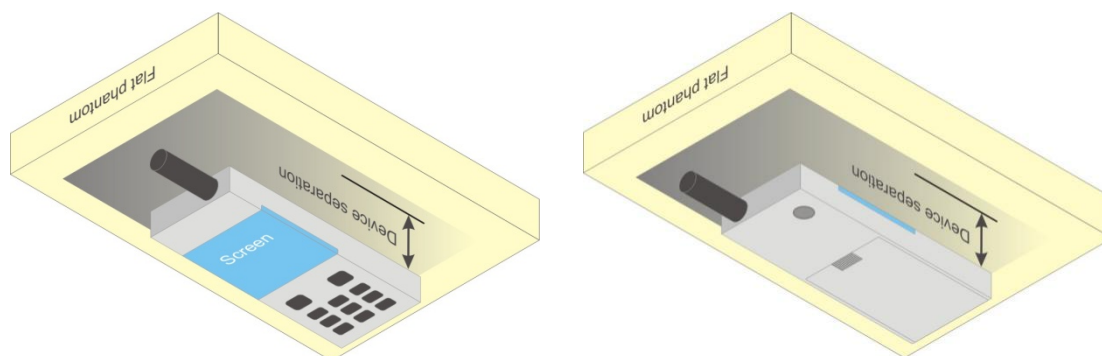

Body Worn Position

9. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3. Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4. Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5. Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregateSAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10. Output Power

<WIFI5.2G>

<ANT1>

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
802.11a	36	5180	14.02	15.00
	44	5220	14.83	15.00
	48	5240	15.02	16.00
802.11n20	36	5180	13.04	14.00
	44	5220	13.74	14.00
	48	5240	14.18	15.00
802.11n40	38	5190	12.73	13.00
	46	5230	13.46	14.00
802.11ac20	36	5180	13.07	14.00
	44	5220	13.77	14.00
	48	5240	14.17	15.00
802.11ac40	38	5190	13.7	14.00
	46	5230	14.42	15.00
802.11ac80	42	5210	13.85	14.00
802.11ax20	42	5180	14.86	15.00
	40	5220	14.55	15.00
	48	5240	14.93	15.00
802.11ax40	38	5190	14.29	15.00
	46	5230	14.95	15.00
802.11ax80	42	5210	13.26	14.00

<ANT2>

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
802.11a	36	5180	13.92	14.00
	44	5220	14.69	15.00
	48	5240	15.1	16.00
802.11n20	36	5180	13.02	14.00
	44	5220	13.69	14.00
	48	5240	14.07	15.00
802.11n40	38	5190	12.77	13.00
	46	5230	13.53	14.00
802.11ac20	36	5180	13.12	14.00
	44	5220	13.64	14.00

	48	5240	14.13	15.00
802.11ac40	38	5190	13.78	14.00
	46	5230	14.43	15.00
802.11ac80	42	5210	13.87	14.00
802.11ax20	42	5180	14.82	15.00
	40	5220	14.64	15.00
	48	5240	14.85	15.00
802.11ax40	38	5190	14.28	15.00
	46	5230	14.98	15.00
802.11ax80	42	5210	13.2	14.00

<MIMO>

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
802.11n20	36	5180	16.04	17.00
	44	5220	16.73	17.00
	48	5240	17.14	18.00
802.11n40	38	5190	15.76	16.00
	46	5230	16.51	17.00
802.11ac20	36	5180	16.11	17.00
	44	5220	16.72	17.00
	48	5240	17.16	18.00
802.11ac40	38	5190	16.75	17.00
	46	5230	17.44	18.00
802.11ac80	42	5210	16.87	17.00
802.11ax20	42	5180	17.85	18.00
	40	5220	17.61	18.00
	48	5240	17.9	18.00
802.11ax40	38	5190	17.3	18.00
	46	5230	17.98	18.00
802.11ax80	42	5210	16.24	17.00

<WIFI5.3G>

<ANT1>

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
802.11a	52	5260	14.33	15.00
	60	5300	15.04	16.00
	64	5320	15.35	16.00
802.11n20	52	5260	14.57	15.00
	60	5300	15.02	16.00
	64	5320	14.38	15.00
802.11n40	54	5270	14.28	15.00
	62	5310	14.81	15.00
802.11ac20	52	5260	14.6	15.00
	60	5300	15.13	16.00
	64	5320	14.27	15.00
802.11ac40	54	5270	14.22	15.00
	62	5310	14.85	15.00
802.11ac80	58	5290	14.28	15.00
802.11ax20	52	5260	15.14	16.00
	60	5300	14.68	15.00
	64	5320	13.78	14.00
802.11ax40	54	5270	13.72	14.00
	62	5310	14.4	15.00
802.11ax80	58	5290	13.86	14.00

<ANT2>

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
802.11a	52	5260	14.48	15.00
	60	5300	15.1	16.00
	64	5320	14.41	15.00
802.11n20	52	5260	14.55	15.00
	60	5300	15.04	16.00
	64	5320	14.43	15.00
802.11n40	54	5270	14.27	15.00
	62	5310	14.82	15.00
802.11ac20	52	5260	14.52	15.00
	60	5300	15.1	16.00
	64	5320	14.3	15.00

802.11ac40	54	5270	14.21	15.00
	62	5310	14.81	15.00
802.11ac80	58	5290	14.24	15.00
802.11ax20	52	5260	15.22	16.00
	60	5300	14.71	15.00
	64	5320	13.76	14.00
802.11ax40	54	5270	13.72	14.00
	62	5310	14.38	15.00
802.11ax80	58	5290	13.86	14.00

<MIMO>

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
802.11n20	52	5260	17.57	18.00
	60	5300	18.04	19.00
	64	5320	17.42	18.00
802.11n40	54	5270	17.29	18.00
	62	5310	17.83	18.00
802.11ac20	52	5260	17.57	18.00
	60	5300	18.13	19.00
	64	5320	17.3	18.00
802.11ac40	54	5270	17.23	18.00
	62	5310	17.84	18.00
802.11ac80	58	5290	17.27	18.00
802.11ax20	52	5260	18.19	19.00
	60	5300	17.71	18.00
	64	5320	16.78	17.00
802.11ax40	54	5270	16.73	17.00
	62	5310	17.4	18.00
802.11ax80	58	5290	16.87	17.00

Note:

1. Per KDB 447498 D01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

2. Base on the result of note1, RF exposure evaluation of 2.4G/5.2G/5.3G/5.4G/5.8G WIFI mode is

required.

3. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.

4. Per KDB 248227 D01, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

11. Exposure Positions Consideration

Distance of The Antenna to the EUT surface and edge						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
WLAN5G	<25mm	<25mm	<25mm	>25mm	<25mm	<25mm

Positions for SAR tests; Body mode						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
WLAN5G	Yes	Yes	<25mm	No	Yes	Yes

12. SAR Test Results Summary

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR(W/kg)= Measured SAR(W/kg) Scaling Factor*

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR≤0.8W/kg, other channels SAR testing are not necessary

12.1. SAR Test Results

<Limbs SAR Test Results>

WLAN 5.2G

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR10g (W/kg)	Reported SAR10g (W/kg)	Plot
AX40	Front	0	46	5230	17.98	18.00	1.005	-0.16	0.414	0.416	
AX40	Back	0	46	5230	17.98	18.00	1.005	0.11	0.744	0.747	
AX40	Left	0	46	5230	17.98	18.00	1.005	0.05	0.819	0.823	
AX40	Right	0	46	5230	17.98	18.00	1.005	N/A	N/A	N/A	
AX40	Top	0	46	5230	17.98	18.00	1.005	-0.08	1.340	1.346	#1
AX40	Bottom	0	46	5230	17.98	18.00	1.005	0.05	0.862	0.866	
AX40	Top	0	38	5190	17.30	18.00	1.175	0.02	1.101	0.912	

WLAN 5.3G

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR10g (W/kg)	Reported SAR10g (W/kg)	Plot
AX20	Front	0	52	5260	18.19	19.00	1.205	0.02	0.334	0.402	
AX20	Back	0	52	5260	18.19	19.00	1.205	0.11	0.600	0.722	
AX20	Left	0	52	5260	18.19	19.00	1.205	-0.05	0.660	0.796	
AX20	Right	0	52	5260	18.19	19.00	1.205	N/A	N/A	N/A	
AX20	Top	0	52	5260	18.19	19.00	1.205	0.15	1.080	1.301	#2
AX20	Bottom	0	52	5260	18.19	19.00	1.205	0.03	0.695	0.838	
AX20	Top	0	60	5300	17.71	18.00	1.069	0.11	0.813	0.869	
AX20	Top	0	64	5320	16.78	17.00	1.052	0.13	0.528	0.555	

Repeat SAR

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR10g (W/kg)	Reported SAR10g (W/kg)
WLAN 5.2G	Top	0	46	5230	17.98	18.00	1.005	-0.12	1.295	1.301
WLAN 5.3G	Top	0	52	5260	18.19	19.00	1.205	0.05	1.113	1.341

<Body SAR Test Results>

WLAN 5.2G

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX40	Front	5	46	5230	17.98	18.00	1.005	-0.11	0.454	0.456	
AX40	Back	5	46	5230	17.98	18.00	1.005	-0.03	0.480	0.482	
AX40	Left	5	46	5230	17.98	18.00	1.005	-0.17	0.535	0.537	
AX40	Right	5	46	5230	17.98	18.00	1.005	N/A	N/A	N/A	
AX40	Top	5	46	5230	17.98	18.00	1.005	-0.04	0.715	0.718	#3
AX40	Bottom	5	46	5230	17.98	18.00	1.005	0.11	0.489	0.491	
AX40	Top	5	38	5190	17.30	18.00	1.175	0.05	0.685	0.805	

WLAN 5.3G

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX20	Front	5	52	5260	18.19	19.00	1.205	0.03	0.515	0.621	
AX20	Back	5	52	5260	18.19	19.00	1.205	0.12	0.544	0.656	
AX20	Left	5	52	5260	18.19	19.00	1.205	0.15	0.606	0.731	
AX20	Right	5	52	5260	18.19	19.00	1.205	N/A	N/A	N/A	
AX20	Top	5	52	5260	18.19	19.00	1.205	-0.11	0.811	0.977	#4
AX20	Bottom	5	52	5260	18.19	19.00	1.205	-0.10	0.555	0.669	
AX20	Top	5	60	5300	17.71	18.00	1.069	0.11	0.712	0.761	
AX20	Top	5	64	5320	16.78	17.00	1.052	0.13	0.624	0.656	

13. Simultaneous Transmission Analysis

13.1. Simultaneous TX SAR Considerations

No.	Applicable Simultaneous Transmission
1.	N/A

Note: There is only one WLAN 5GHz transmitter in this device so simultaneous transmission evaluation is not required.

14. Measurement Uncertainty

Note:Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Note:

The main report is end here and the other Appendix (A,B,C,D) will be submitted separately.

*****END OF MAIN REPORT*****