


Case No. : <u>GTS20260316016-1-12</u>
Ambient Condition: <u>24</u> °C, <u>46</u> %RH
According Standard: ■Part15C
Test Date: <u>2026.7.10-2026.7.28</u> Test Engineer: <u>Evan ouyang</u>

AppendixB.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.732	2401.612	2402.344	0.5	PASS
		2440	0.660	2439.652	2440.312	0.5	PASS
		2480	0.692	2479.620	2480.312	0.5	PASS

Test Graphs

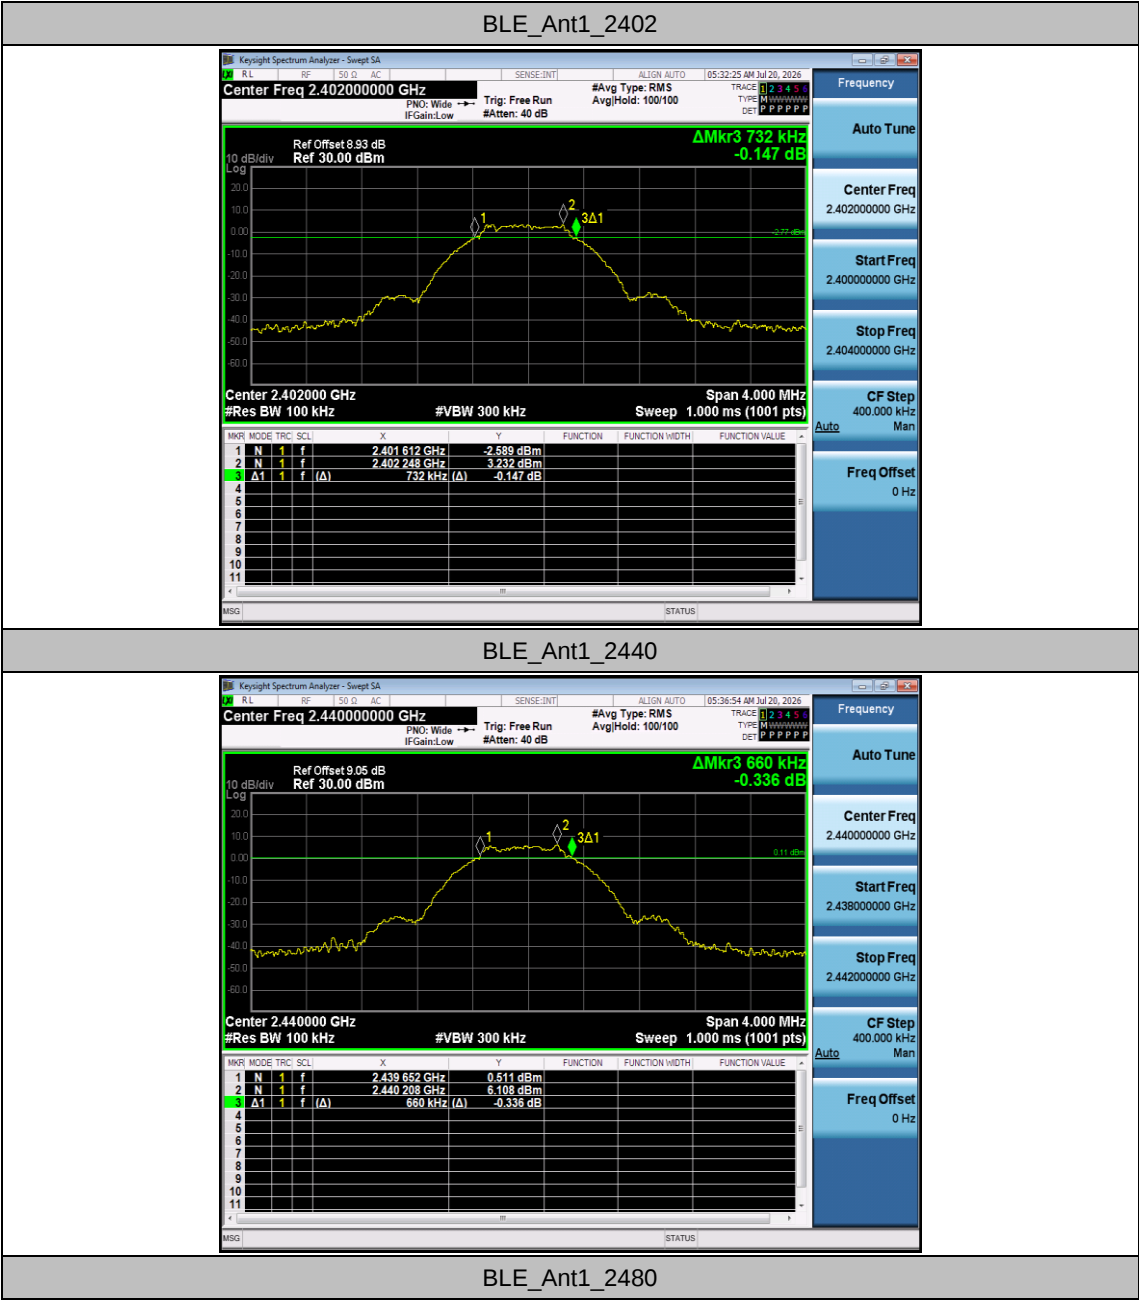


BLE_Ant1_2440

Frequency

Auto Tune

Center Freq
2.440000000 GHzStart Freq
2.438000000 GHzStop Freq
2.442000000 GHzCF Step
400.000 kHz
Auto ManFreq Offset
0 Hz

BLE_Ant1_2480

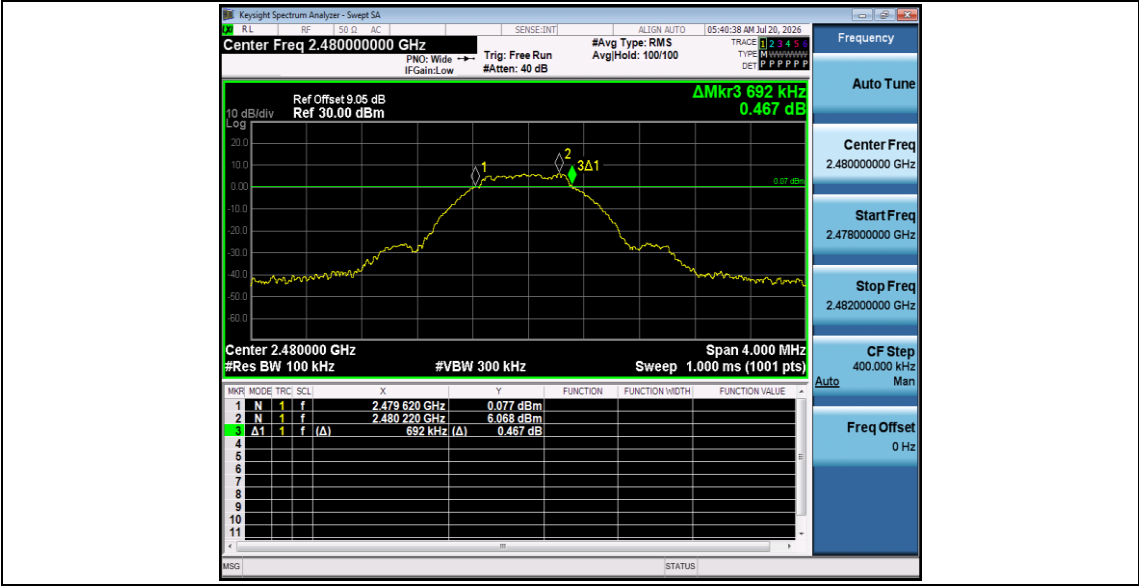

AppendixB.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	1.0230	2401.4690	2402.4920	---	---
		2440	1.0201	2439.4678	2440.4879	---	---
		2480	1.0231	2479.4668	2480.4899	---	---

Test Graphs



Appendix B.3: Maximum conducted output power

Test Result Peak

DC 24V:

TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant1	2402	5.86	≤30	PASS
		2440	7.80	≤30	PASS
		2480	8.06	≤30	PASS

DC 55V(PoE++):


TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant1	2402	5.42	≤30	PASS
		2440	7.55	≤30	PASS
		2480	7.85	≤30	PASS


AppendixB.4: Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-11.31	≤8.00	PASS
		2440	-9.33	≤8.00	PASS
		2480	-9.09	≤8.00	PASS

Test Graphs

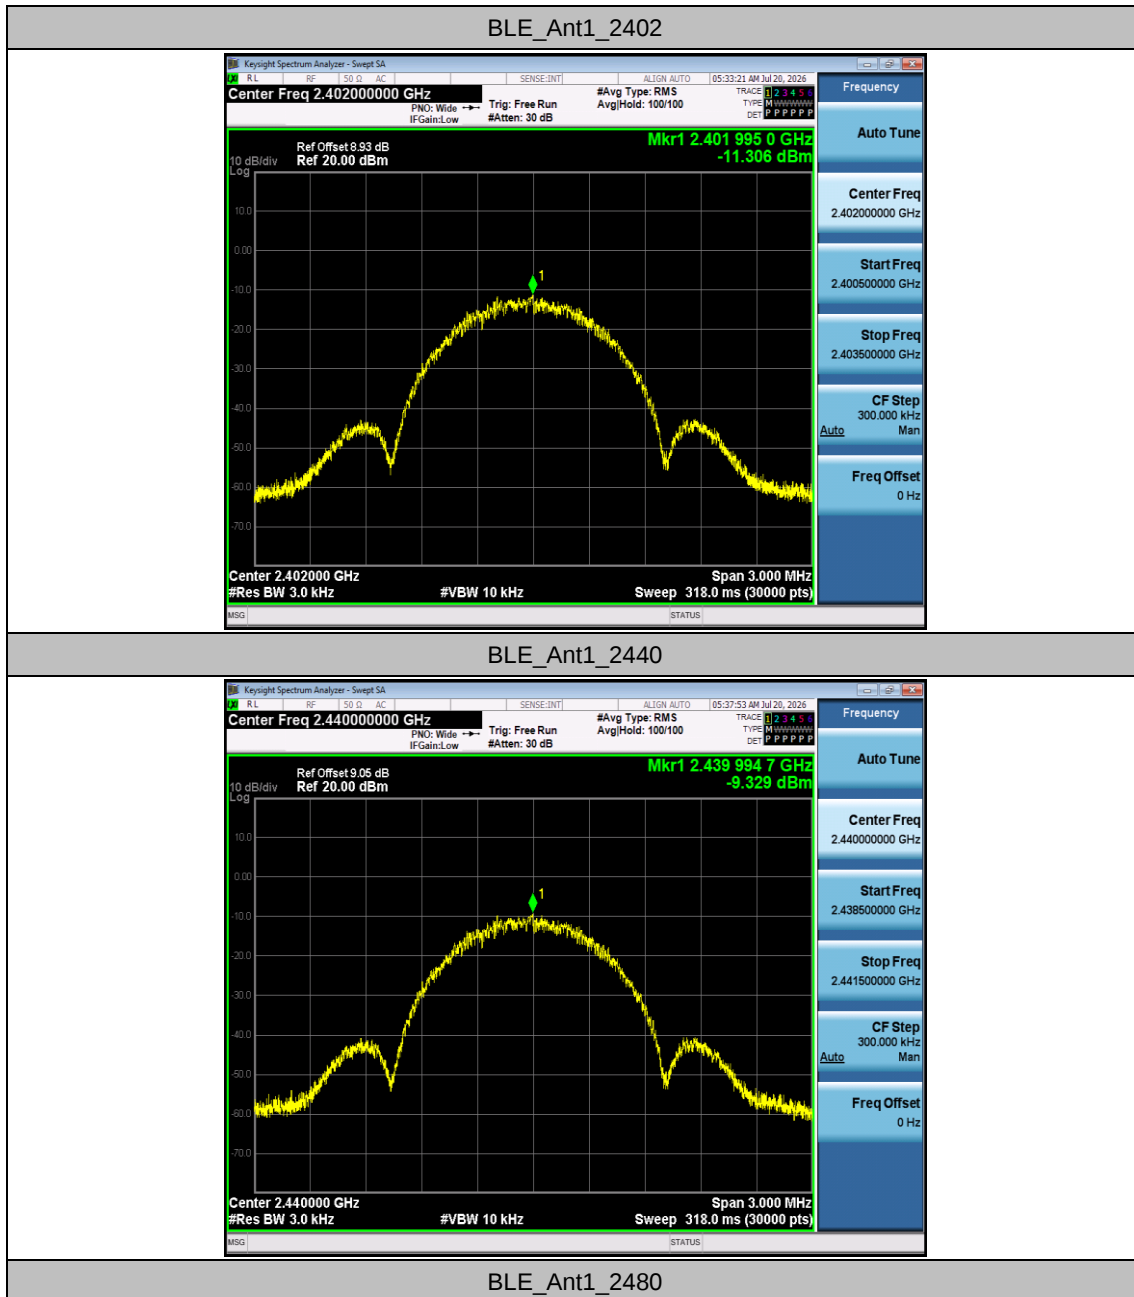

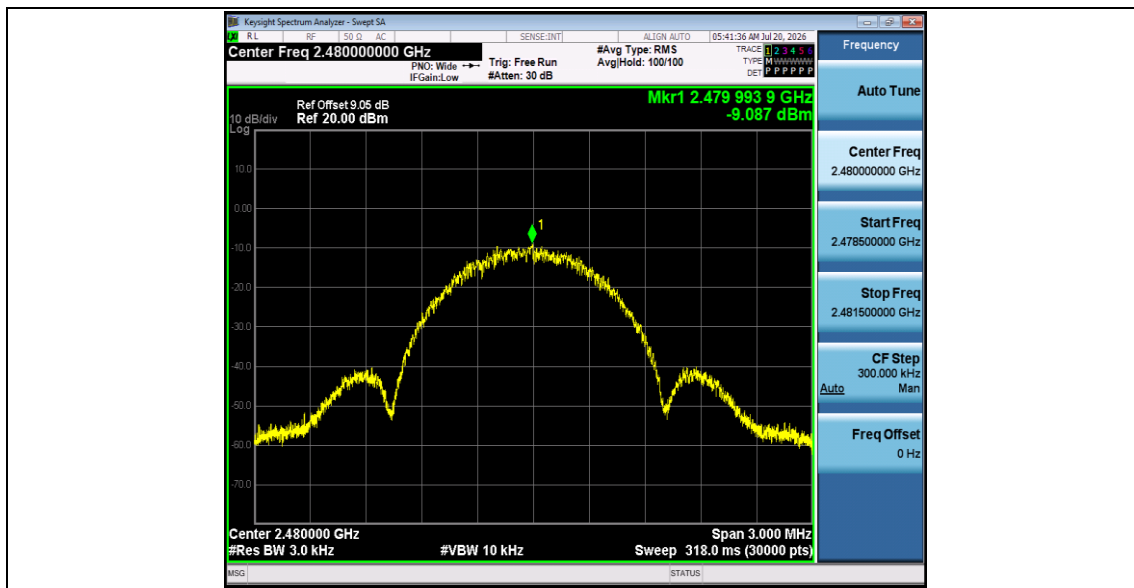


Appendix B.5: Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	4.56	-49.13	≤-15.44	PASS
		High	2480	6.38	-49.24	≤-13.62	PASS

Test Graphs

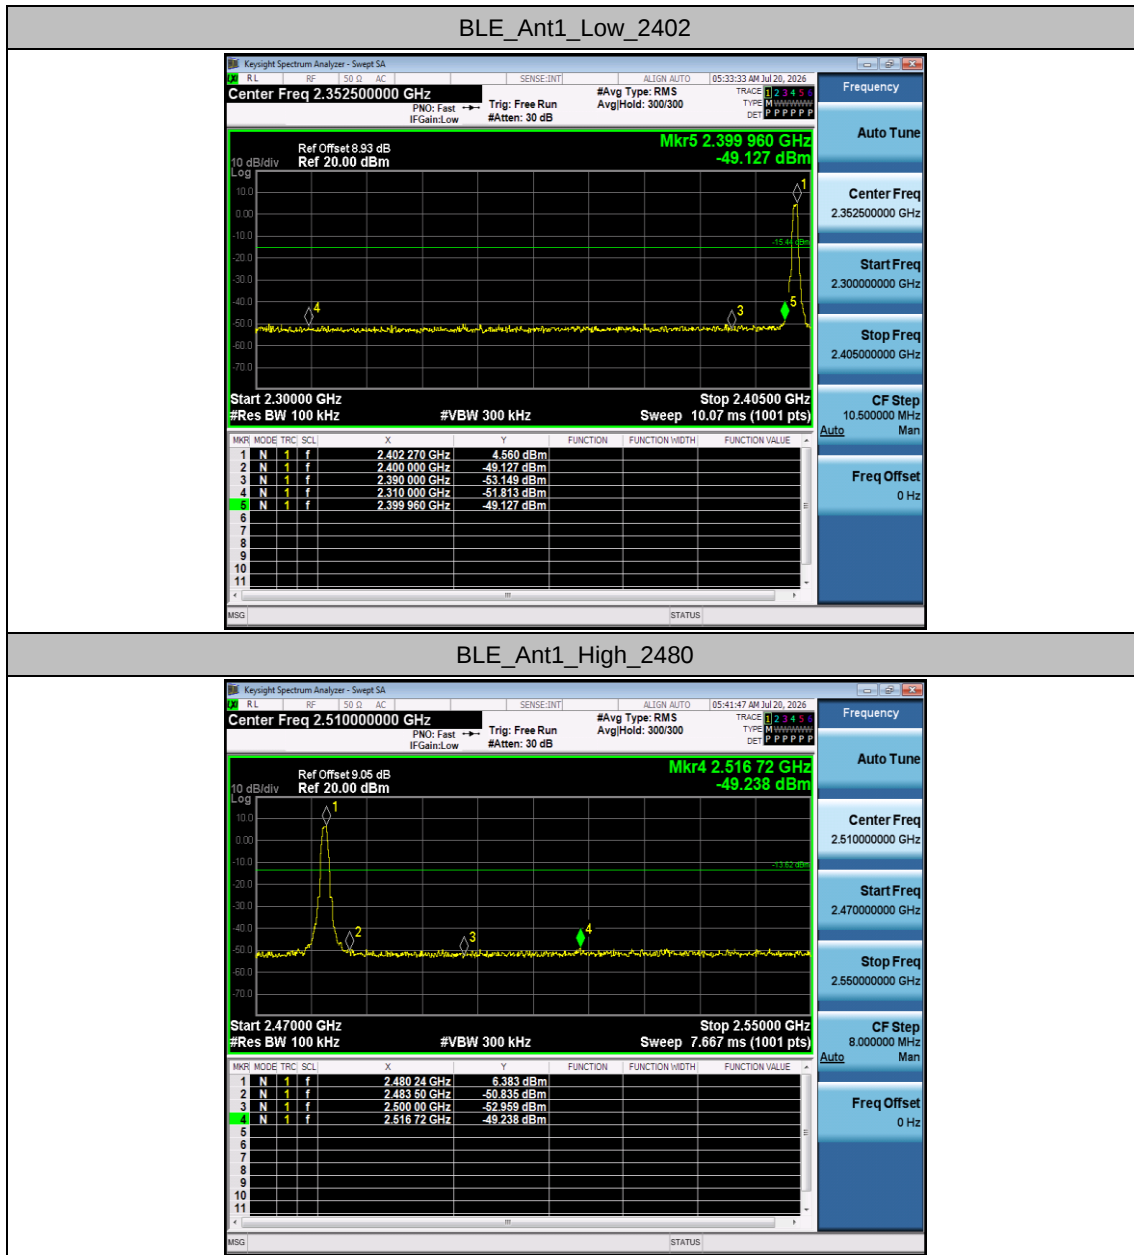



Appendix B.6: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	4.61	4.61	---	PASS
			30~1000	4.61	-60.8	≤ -15.39	PASS
			1000~26500	4.61	-47.86	≤ -15.39	PASS
		2440	Reference	6.56	6.56	---	PASS
			30~1000	6.56	-60.25	≤ -13.44	PASS
			1000~26500	6.56	-47.61	≤ -13.44	PASS
		2480	Reference	6.86	6.86	---	PASS
			30~1000	6.86	-60.52	≤ -13.14	PASS
			1000~26500	6.86	-47.93	≤ -13.14	PASS

Test Graphs

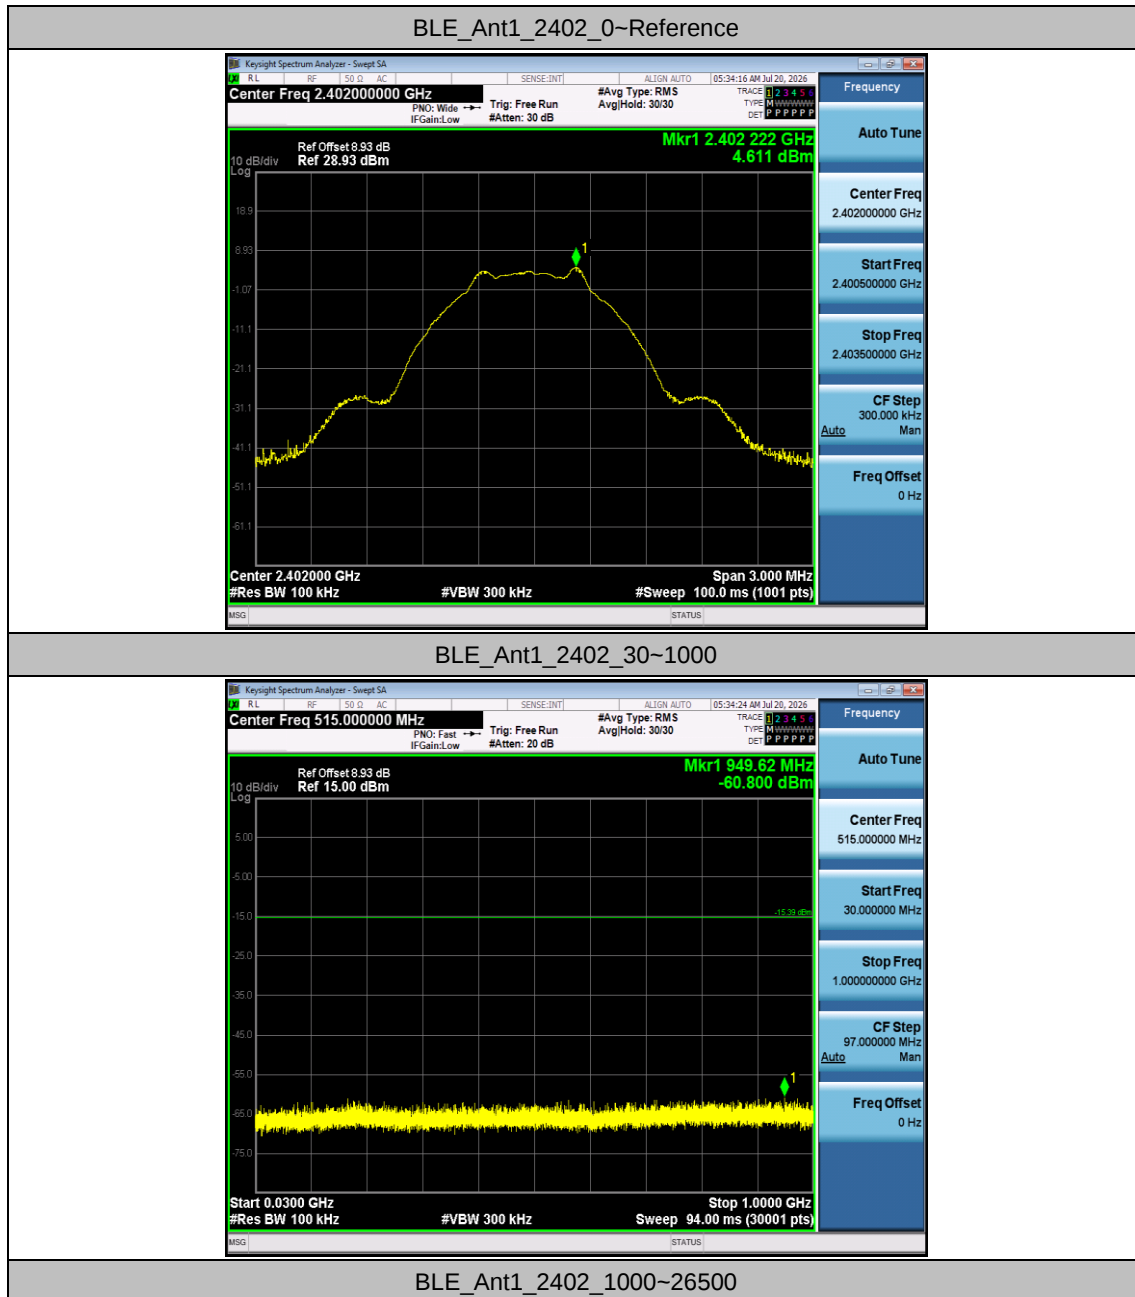


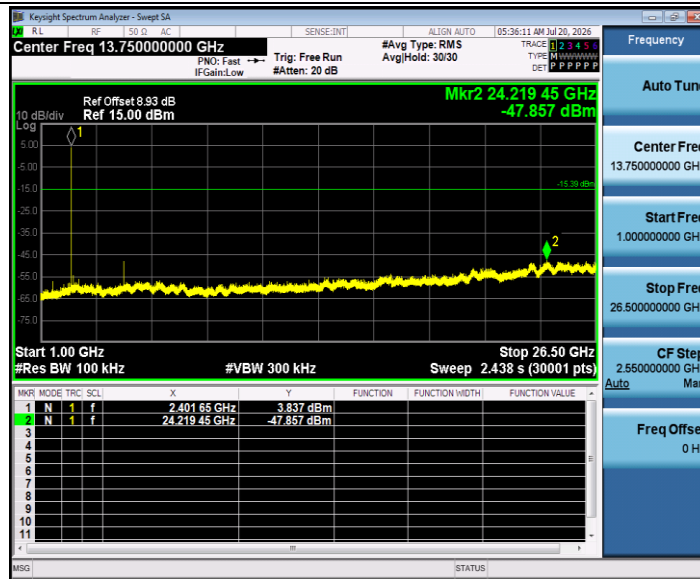


BLE_Ant1_2440_0~Reference



BLE_Ant1_2440_30~1000

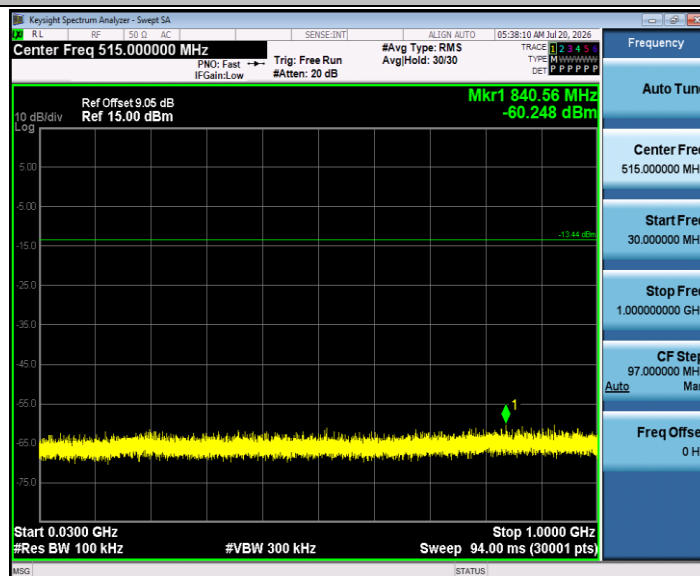


BLE_Ant1_2440_1000~26500

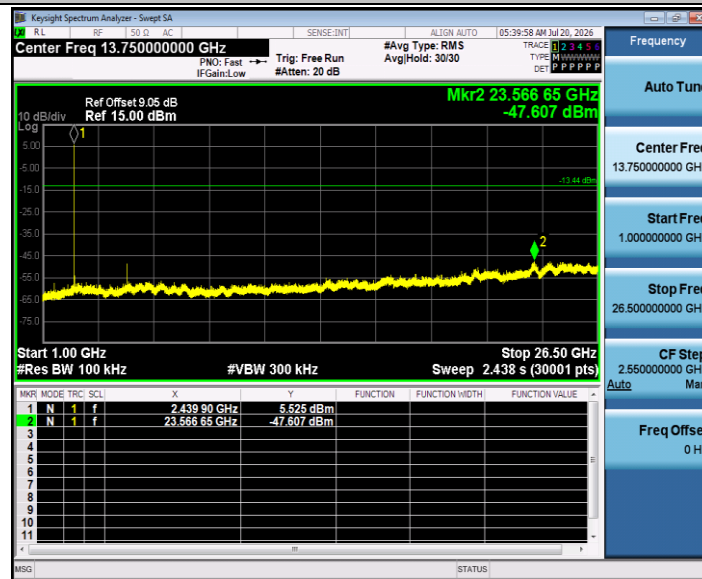

BLE_Ant1_2480_0~Reference



BLE_Ant1_2480_30~1000

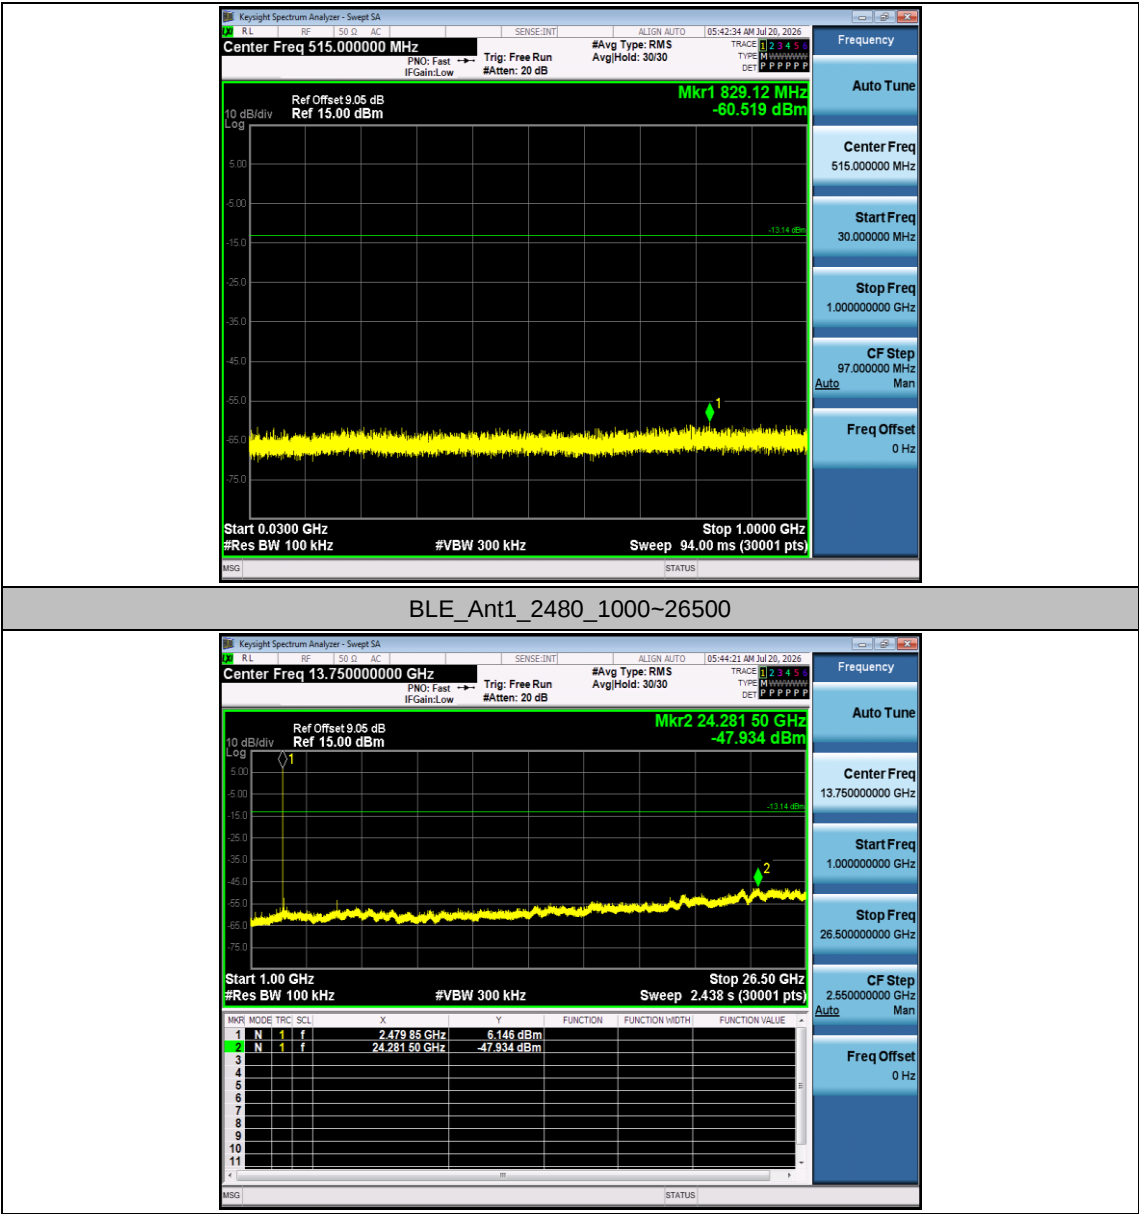



AppendixB.7: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
BLE	Ant1	2402	2.13	2.51	0.8486	84.86	0.71	0.47
		2440	2.12	2.49	0.8514	85.14	0.70	0.47
		2480	2.12	2.49	0.8514	85.14	0.70	0.47

Test Graphs

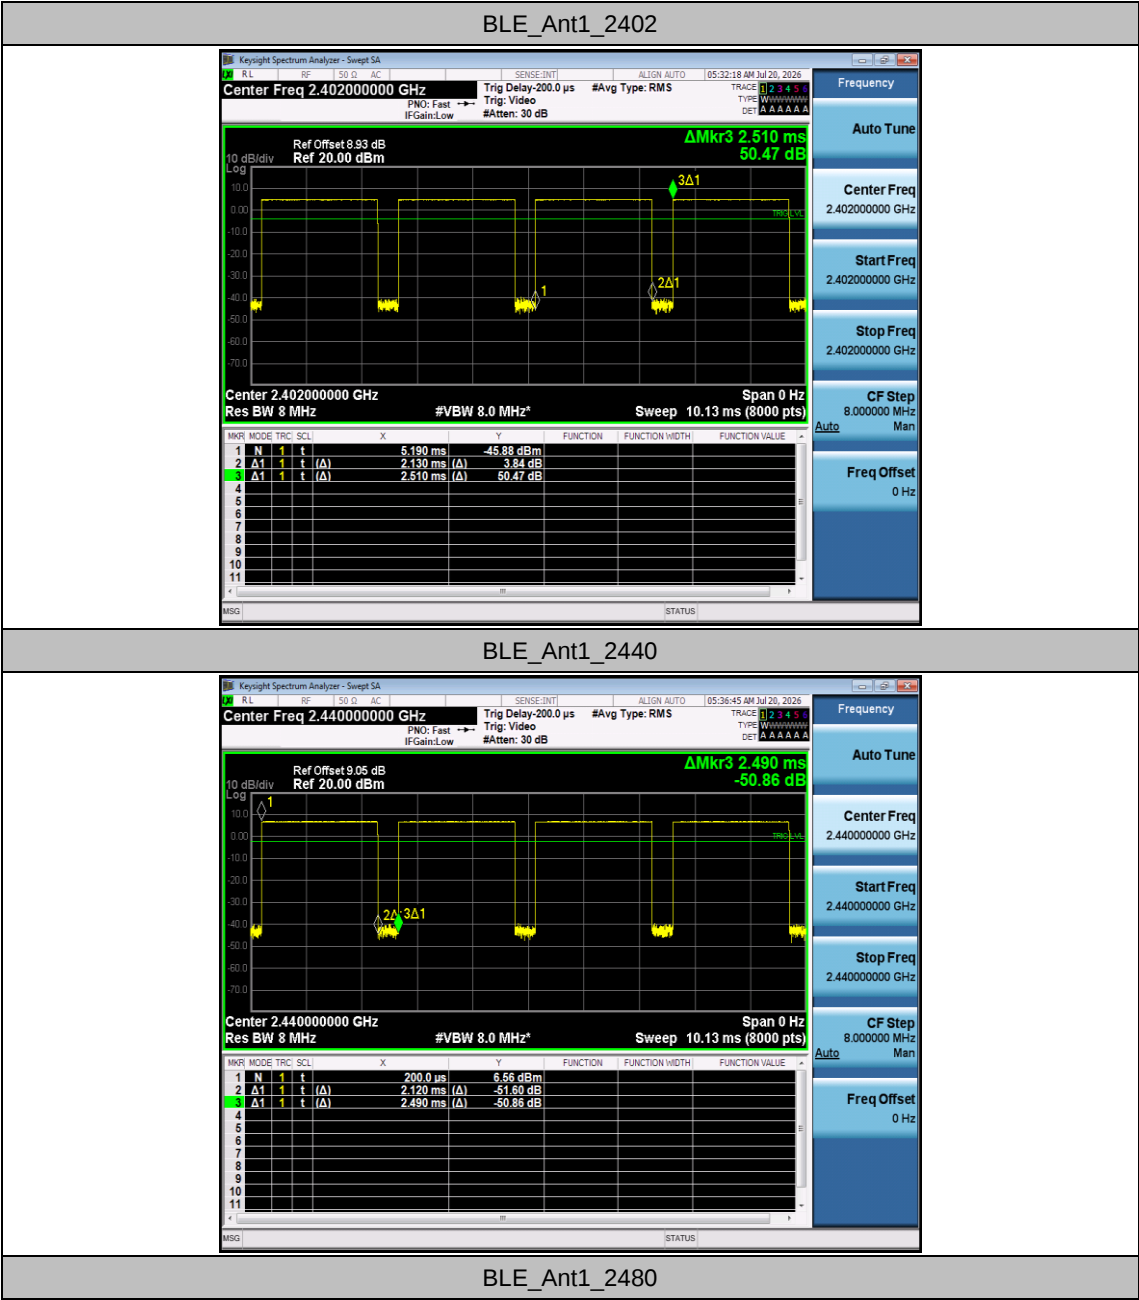

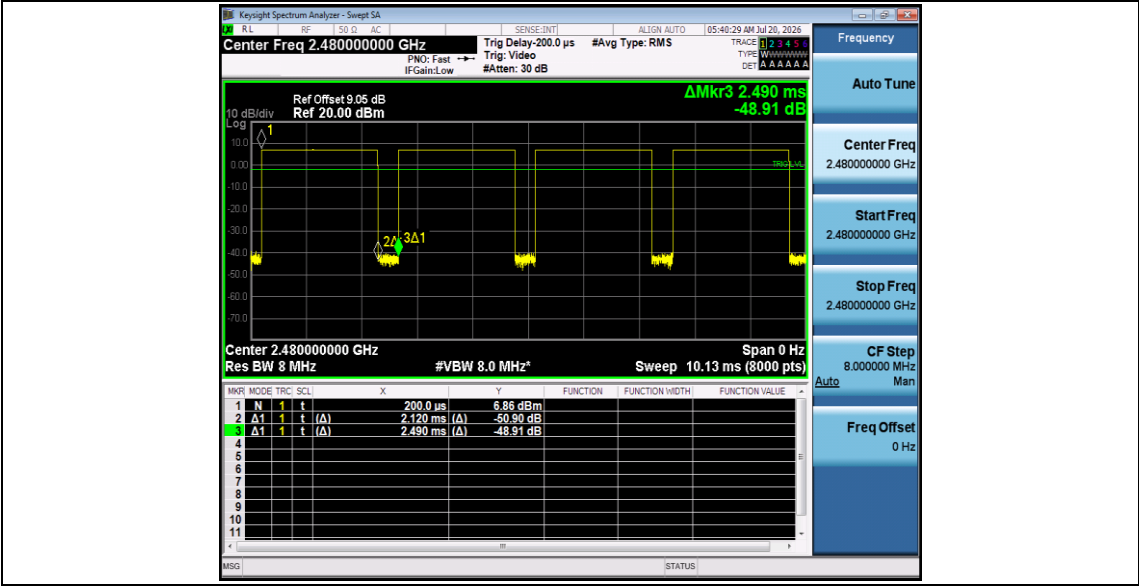

Appendix B.8: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant1	Low	2402	AV	2310.000	-49.27	≤-41.20	45.93	≤54	PASS
				AV	2384.630	-48.64	≤-41.20	46.56	≤54	PASS
				AV	2390.000	-48.86	≤-41.20	46.34	≤54	PASS
				Peak	2310.000	-42.71	≤-21.20	52.49	≤74	PASS
				Peak	2376.125	-39.22	≤-21.20	55.98	≤74	PASS
				Peak	2390.000	-42.85	≤-21.20	52.35	≤74	PASS
		High	2480	AV	2483.500	-45.34	≤-41.20	49.86	≤54	PASS
				AV	2483.520	-45.33	≤-41.20	49.87	≤54	PASS
				AV	2500.000	-48.28	≤-41.20	46.92	≤54	PASS
				Peak	2483.500	-41.95	≤-21.20	53.25	≤74	PASS
				Peak	2490.240	-38.37	≤-21.20	56.83	≤74	PASS
				Peak	2500.000	-42.24	≤-21.20	52.96	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

