



REPORT No.: SZ25070156W01

TEST REPORT

APPLICANT : Sound Extreme Inc.

PRODUCT NAME : SEB PULSE

MODEL NAME : SEI-PLSB2801

BRAND NAME : SOUNDEXTREME BY ECOXGEAR

FCC ID : 2BADE-SEIPLSB2801

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2025-09-22

TEST DATE : 2025-10-09 to 2025-10-28

ISSUE DATE : 2025-11-26

Edited by:

Peng Mi

Peng-Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	11
3. Test Results	14
3.1. Antenna Requirement	14
3.2. Duty Cycle of Test Signal	15
3.3. Maximum Peak Conducted Output Power	16
3.4. Maximum Average Conducted Output Power	17
3.5. 6 dB Bandwidth	18
3.6. Conducted Spurious Emissions and Band Edge	19
3.7. Power Spectral Density	20
3.8. Conducted Emission	21
3.9. Restricted Frequency Bands	22
3.10. Radiated Emission	23
Annex A Test Data and Result	25



REPORT No.: SZ25070156W01

Change History		
Version	Date	Reason for change
1.0	2025-11-26	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Oct. 13, 2025	Li Yue	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Oct. 13, 2025	Li Yue	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Oct. 13, 2025	Li Yue	PASS	/
5	15.247(a)	Bandwidth	Oct. 13, 2025	Li Yue	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Oct. 13, 2025	Li Yue	PASS	/
7	15.247(e)	Power Spectral Density	Oct. 13, 2025	Li Yue	PASS	/
8	15.207	Conducted Emission	N/A	N/A ^{Note1}	N/A	/
9	15.247(d)	Restricted Frequency Bands	Oct. 11, 2025	Tian Xin	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Oct. 28, 2025	Wang Deyong	PASS	/

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020 and KDB 558074 D01 v05r02.

Note 3: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0

1.2.3 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2025.06.20	2026.06.19
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12



RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40- KK-0.5	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40- KKF-2	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18- NN-5	Qualwave	2025.09.03	2026.09.02
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Sound Extreme Inc.
Applicant Address:	9212 Fry Road, Suite 105-351, Cypress, TX 77433, United States of America.
Manufacturer:	Xingtel Xiamen Group Co., Ltd.
Manufacturer Address:	Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 3 61006, PR China

2.2. Information of EUT

Product Name:	SEB PULSE
Sample No.:	2#, 3#
Hardware Version:	BT-385-M-V1.4
Software Version:	BT385_M433SE8AE_9D63
Module Type:	☐ BT1; ☒ U5 (The product includes two modules.)
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.0
Modulation Type:	GFSK
Data Rate:	1Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


The EUT is controlled by dedicated software to transmit at the default maximum power level.

2.5. Test Conditions


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

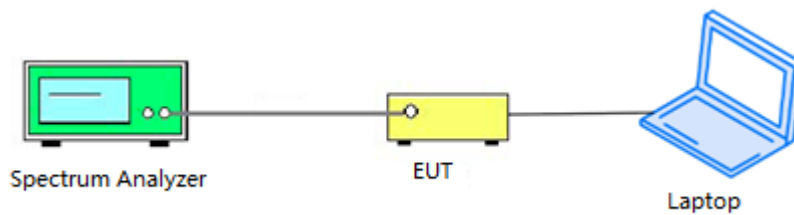


2.6.2. Conducted Emission Measurement

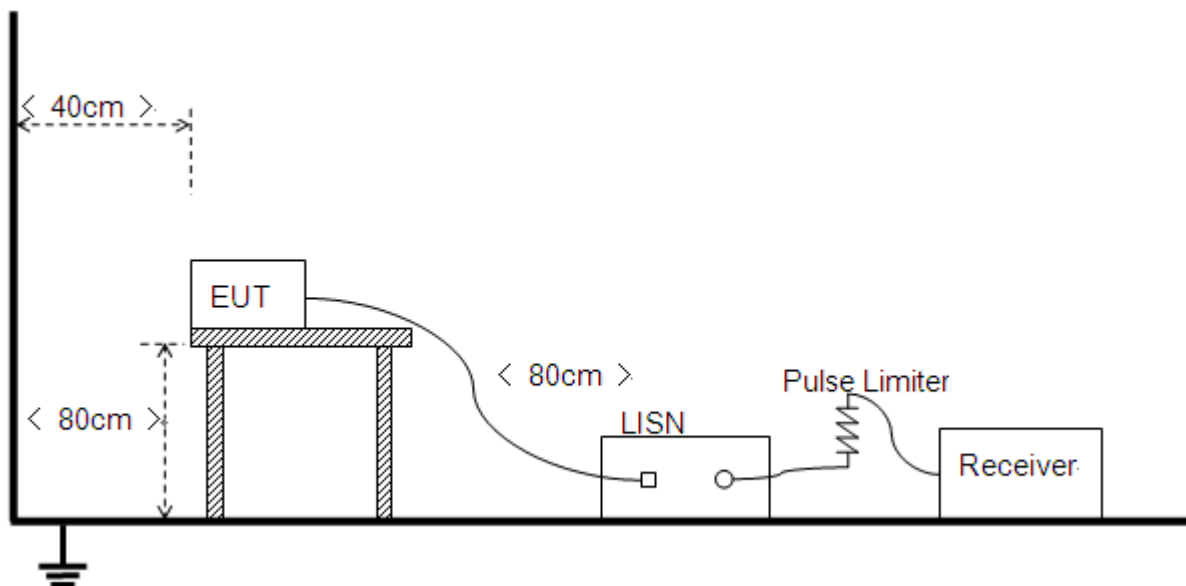


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

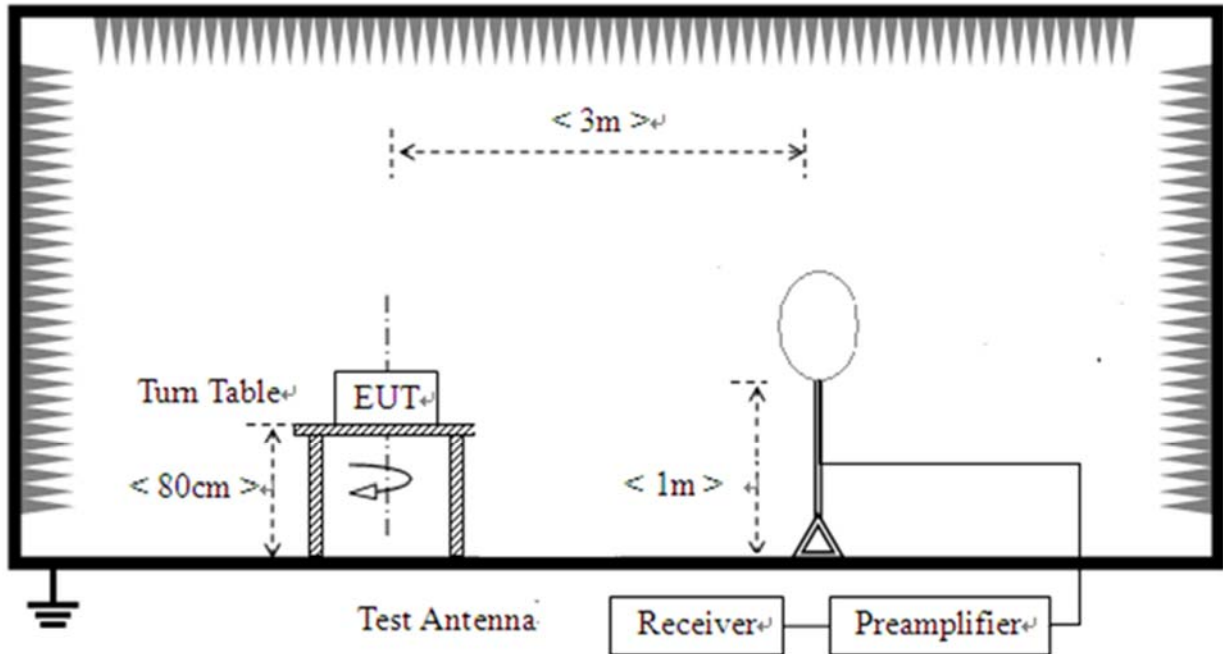

2) For radiated emissions from 30MHz to 1GHz

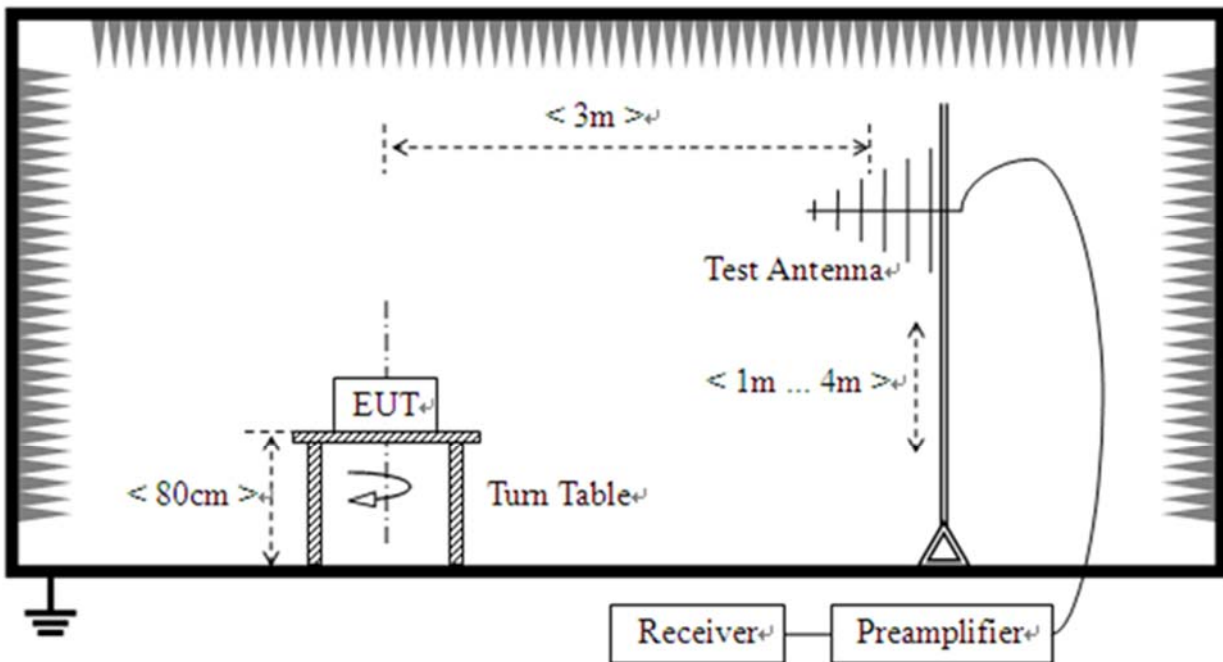

3) For radiated emissions above 1GHz

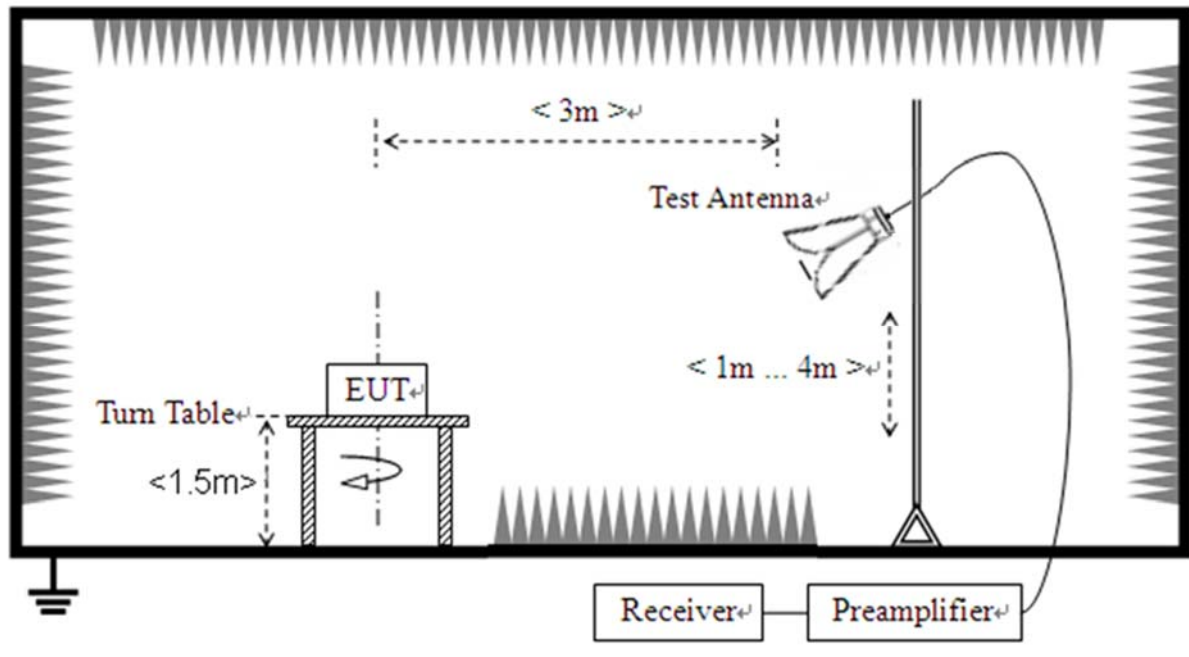



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☐ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☐ Dipole Antenna ☒ PCB Antenna ☐ PIFA Antenna ☐ Monopole Antenna	☐ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☐ Metal Shrapnel ☒ Layout

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.

3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

This test case does not apply this kind of EUT.

3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.8 in this report.

3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.9 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	35.49	4.5	0.98
NVNT	BLE 1M	2440	Ant1	35.49	4.5	0.98
NVNT	BLE 1M	2480	Ant1	35.49	4.5	0.98

Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

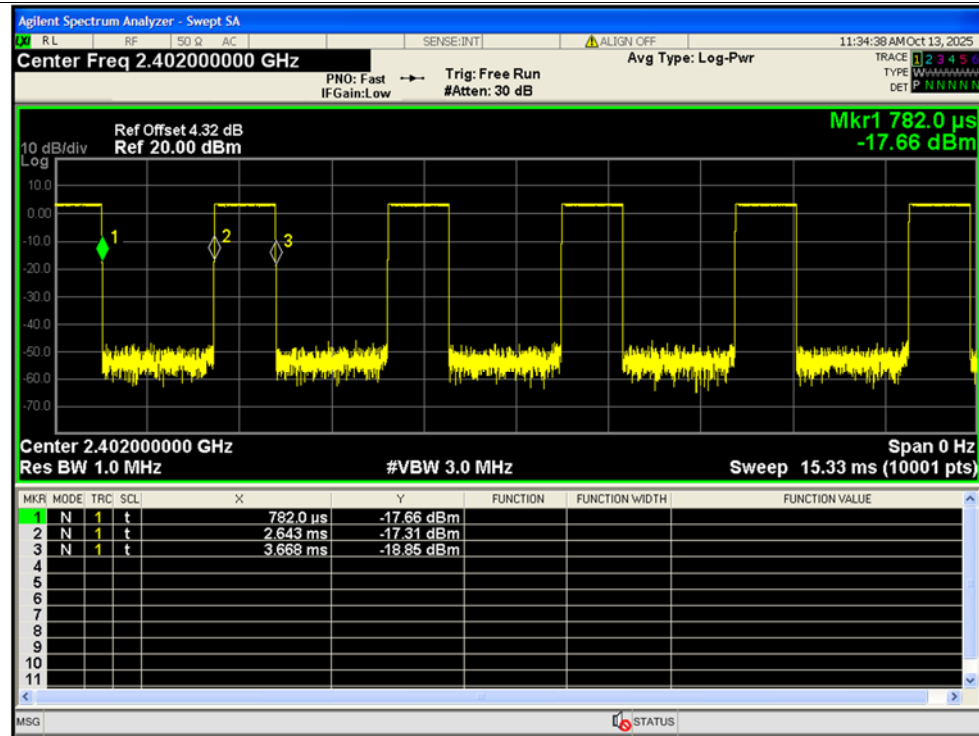


Duty Cycle NVNT BLE 1M 2440MHz Ant1

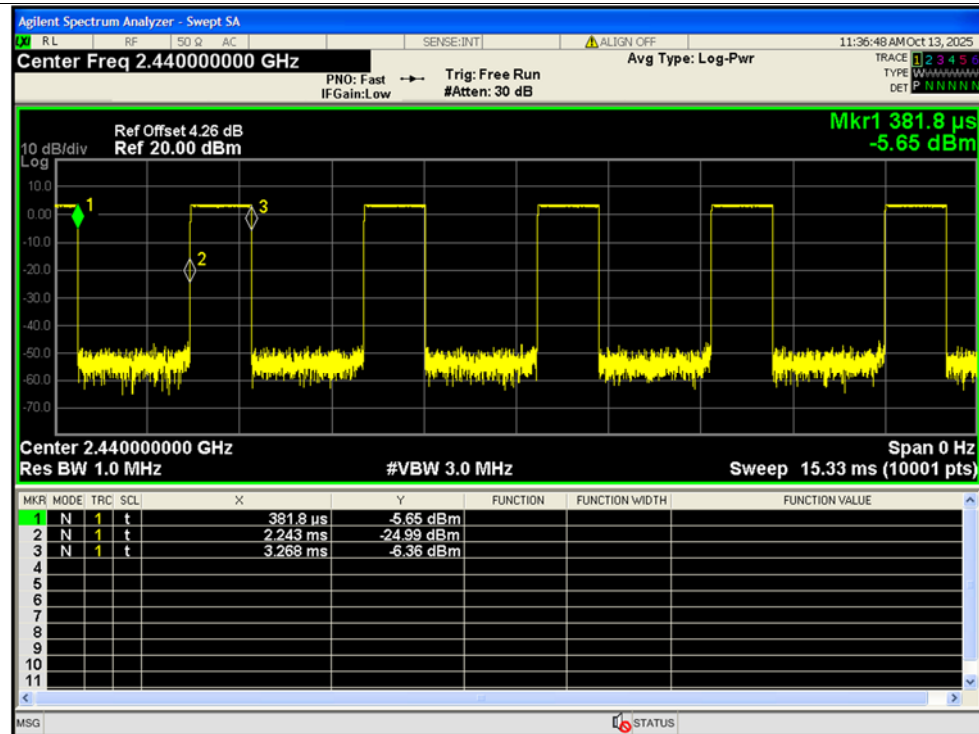



Duty Cycle NVNT BLE 1M 2480MHz Ant1

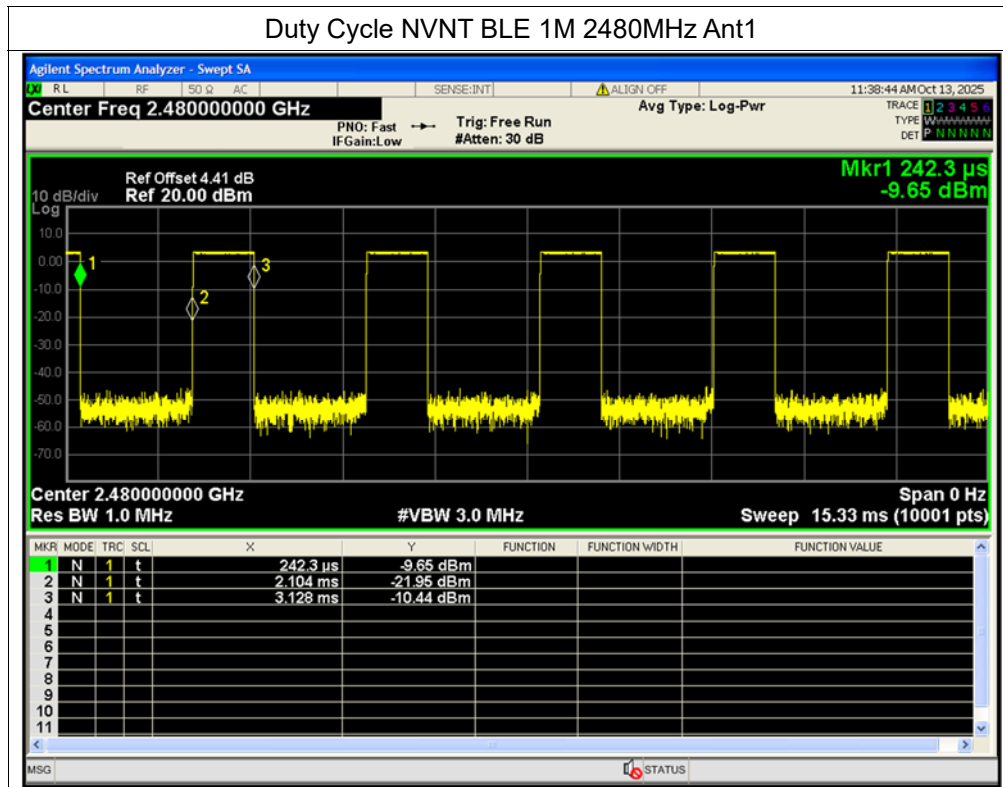


**A.2. Maximum Peak Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	3.78	0	3.78	0.00239	30	Pass
NVNT	BLE 1M	2440	Ant1	3.71	0	3.71	0.00235	30	Pass
NVNT	BLE 1M	2480	Ant1	3.74	0	3.74	0.00237	30	Pass

Test Graphs

Peak Power NVNT BLE 1M 2402MHz Ant1

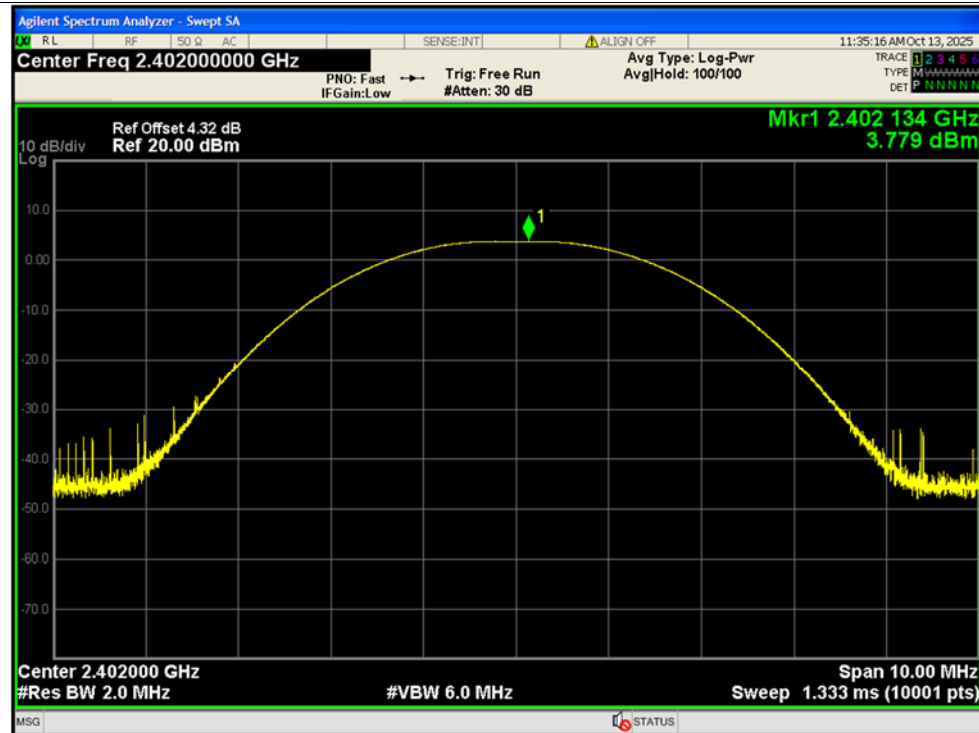


Peak Power NVNT BLE 1M 2440MHz Ant1

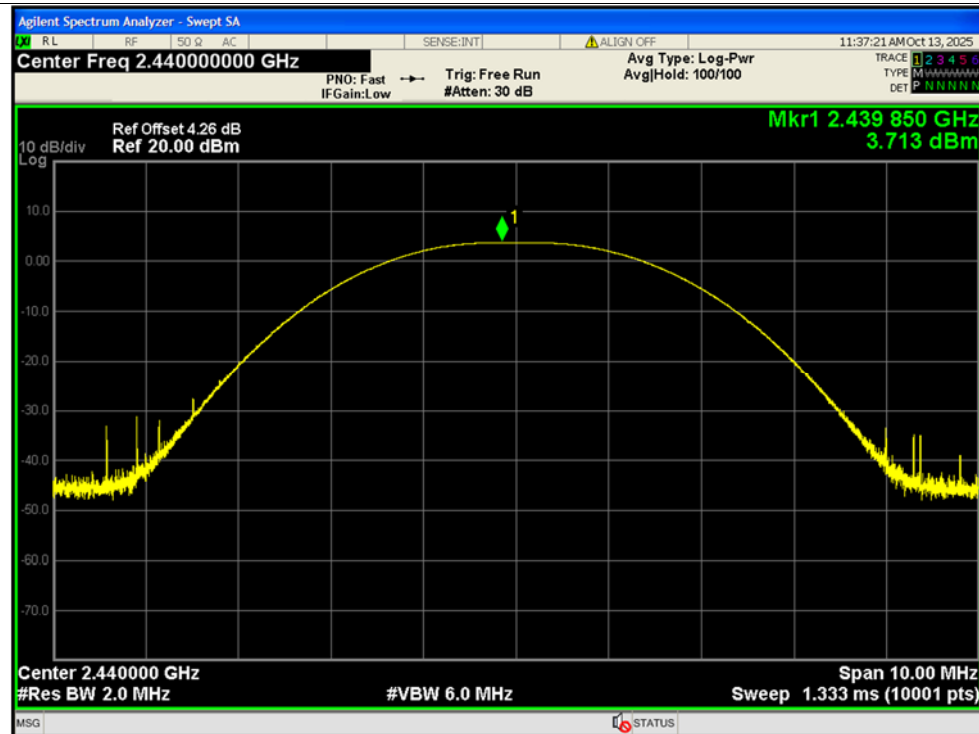



Peak Power NVNT BLE 1M 2480MHz Ant1

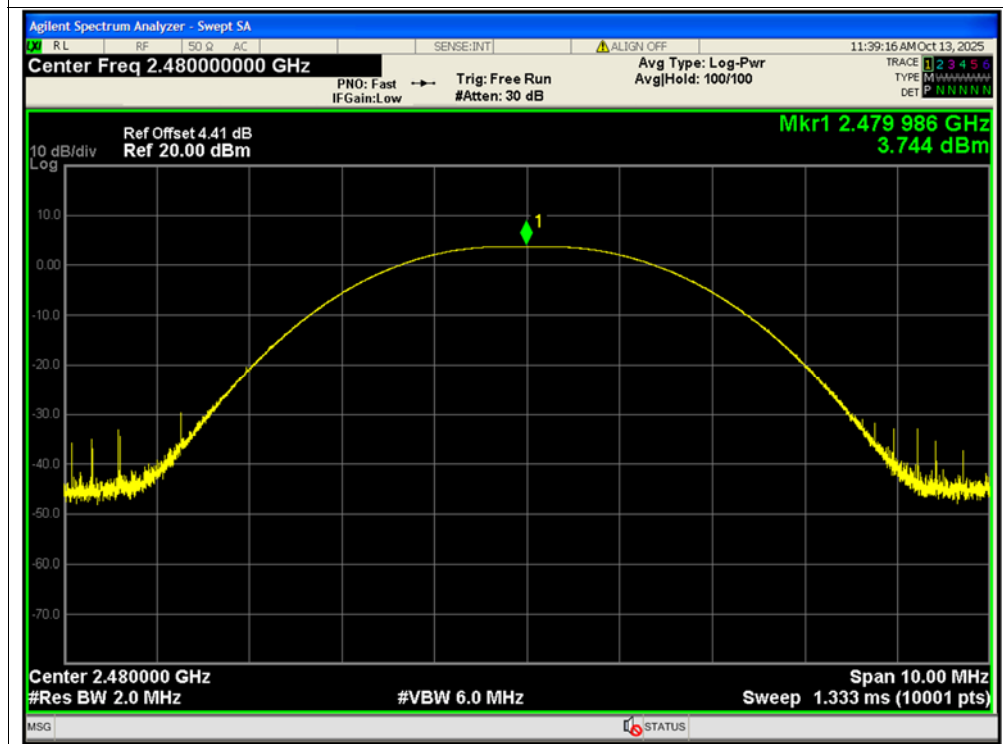



REPORT No.: SZ25070156W01


A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.9	4.5	3.6	0.00229	30	Pass
NVNT	BLE 1M	2440	Ant1	-1.03	4.5	3.47	0.00222	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.83	4.5	3.67	0.00233	30	Pass





Test Graphs

Average Power NVNT BLE 1M 2402MHz Ant1

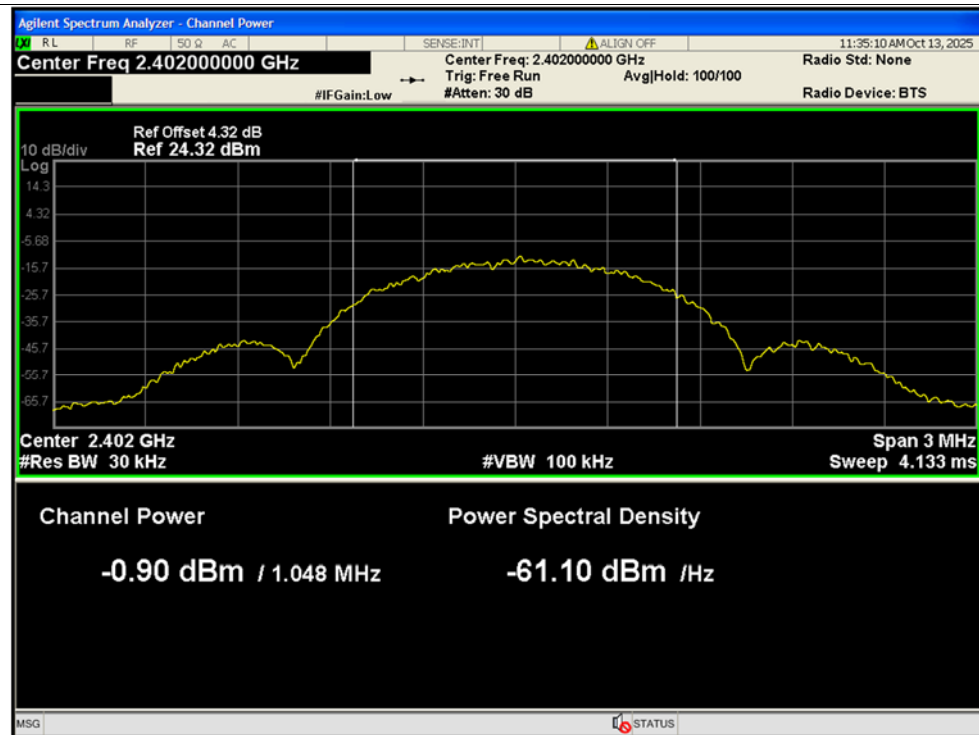

Average Power NVNT BLE 1M 2440MHz Ant1

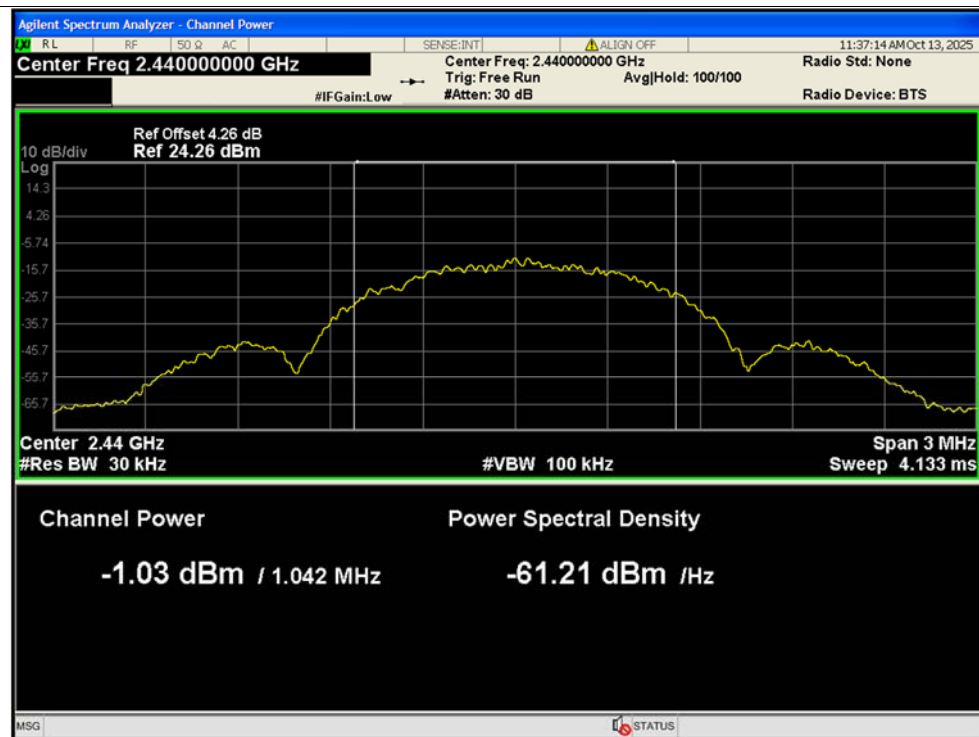

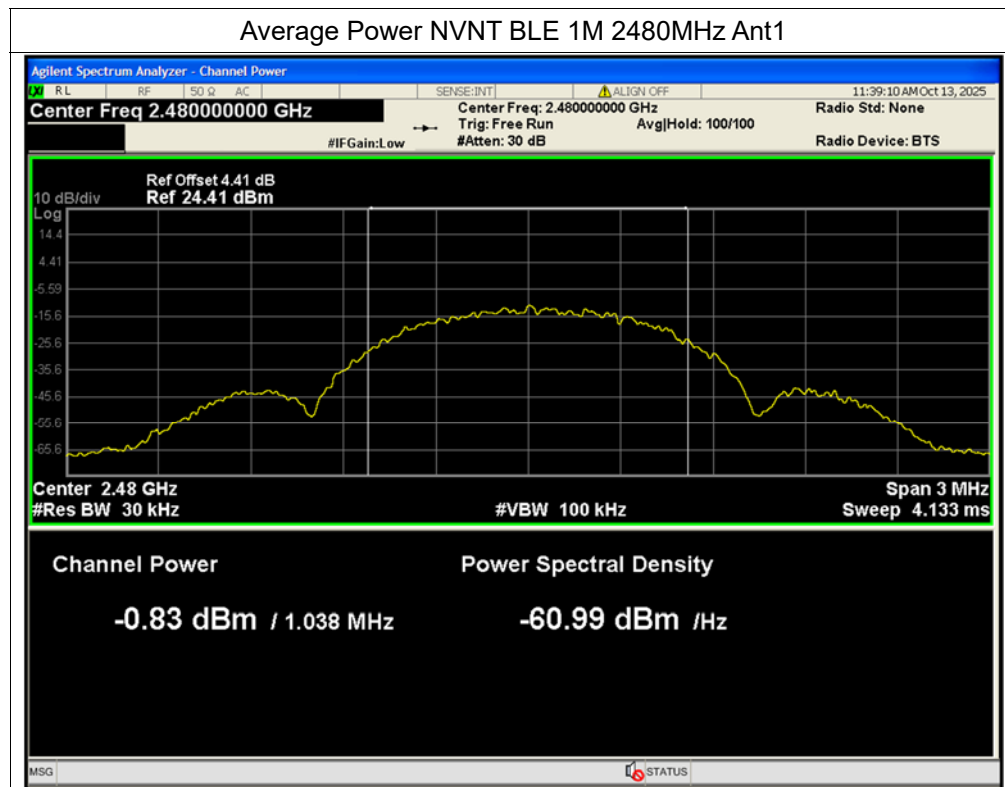


**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6646	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6553	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6843	0.5	Pass





Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

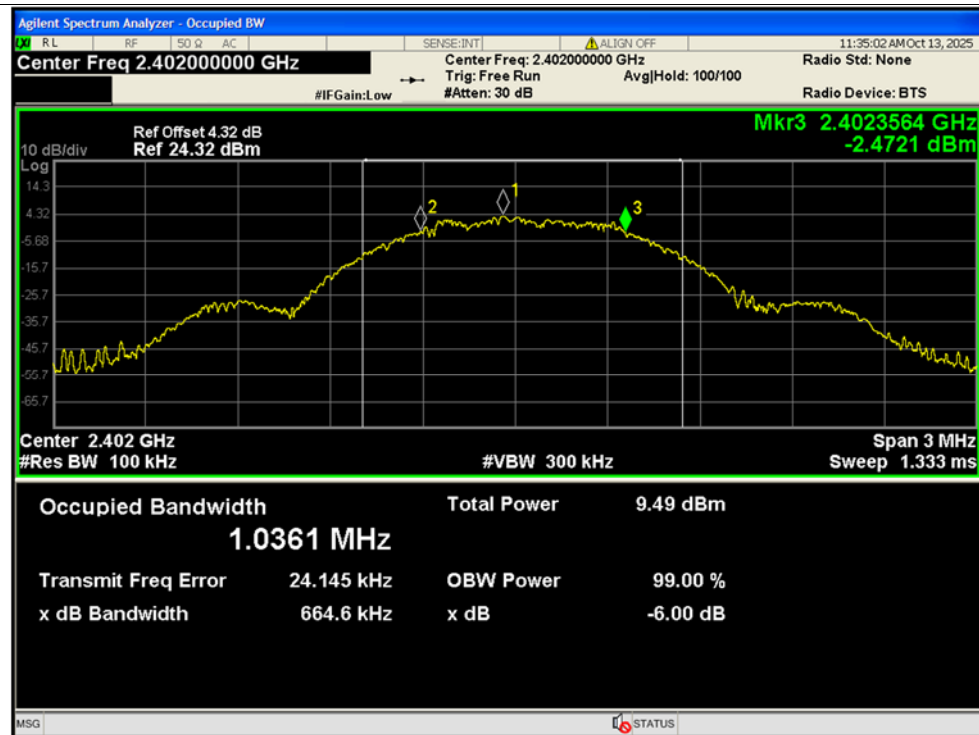

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

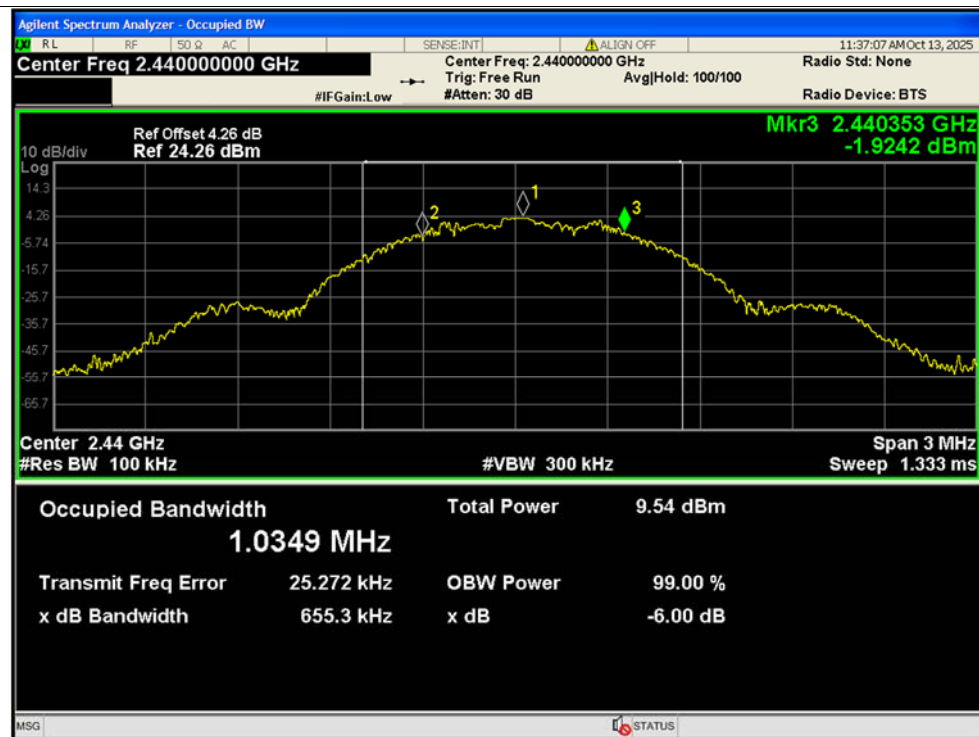

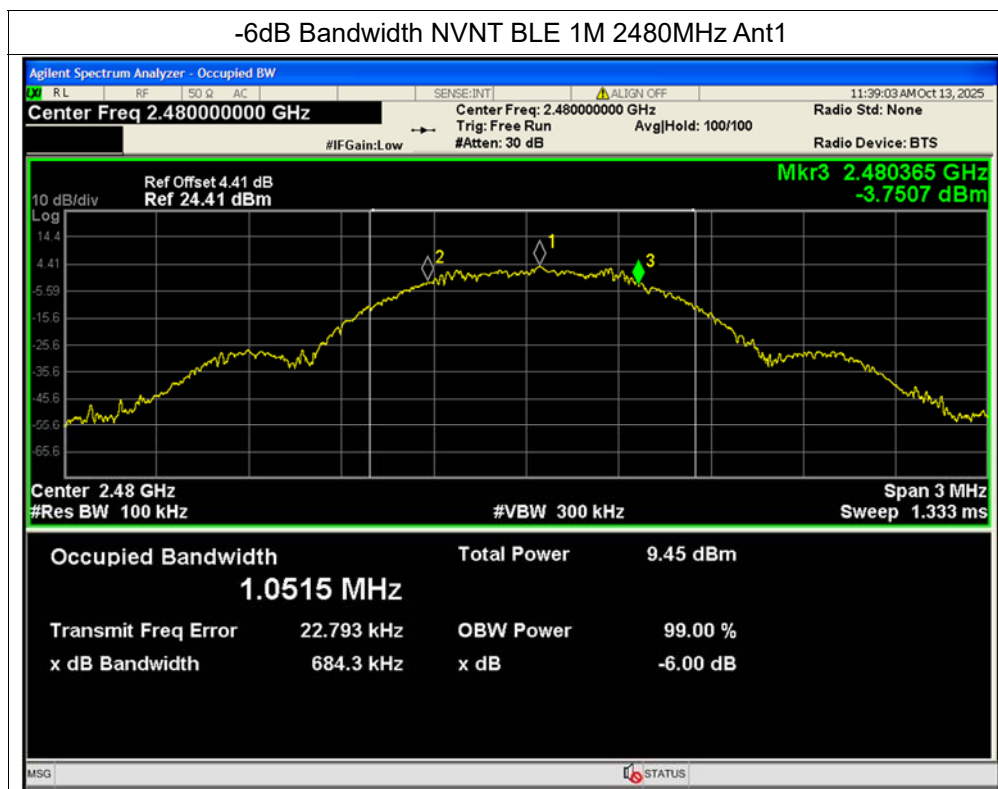


**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-41.61	-20	Pass
NVNT	BLE 1M	2440	Ant1	-41.58	-20	Pass
NVNT	BLE 1M	2480	Ant1	-40.16	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

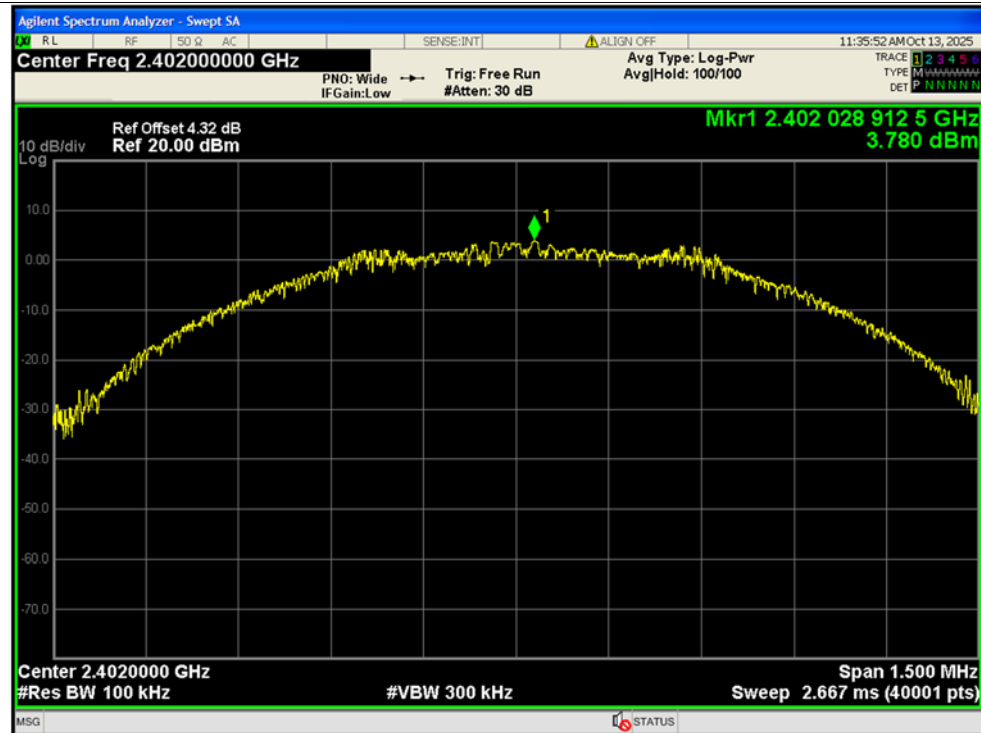


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

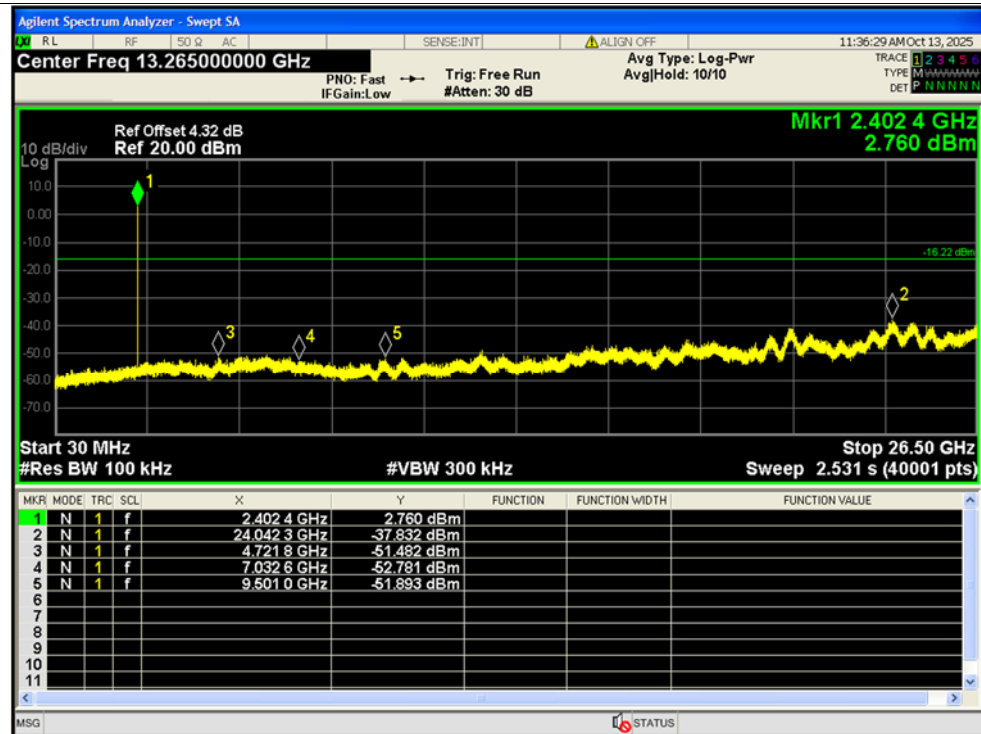


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

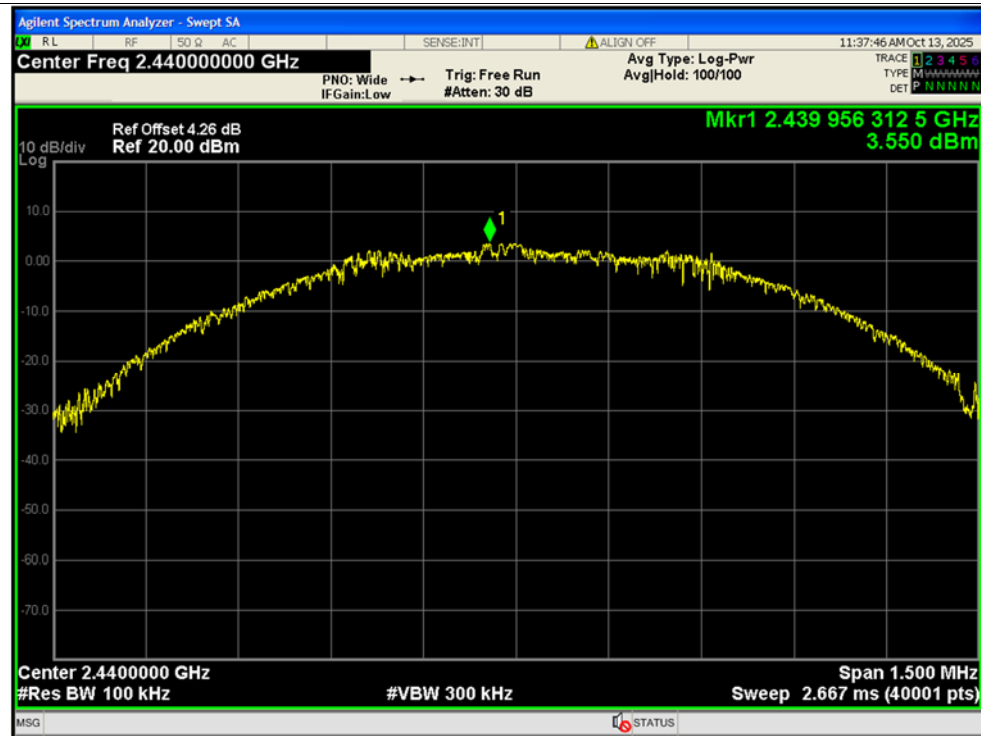


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

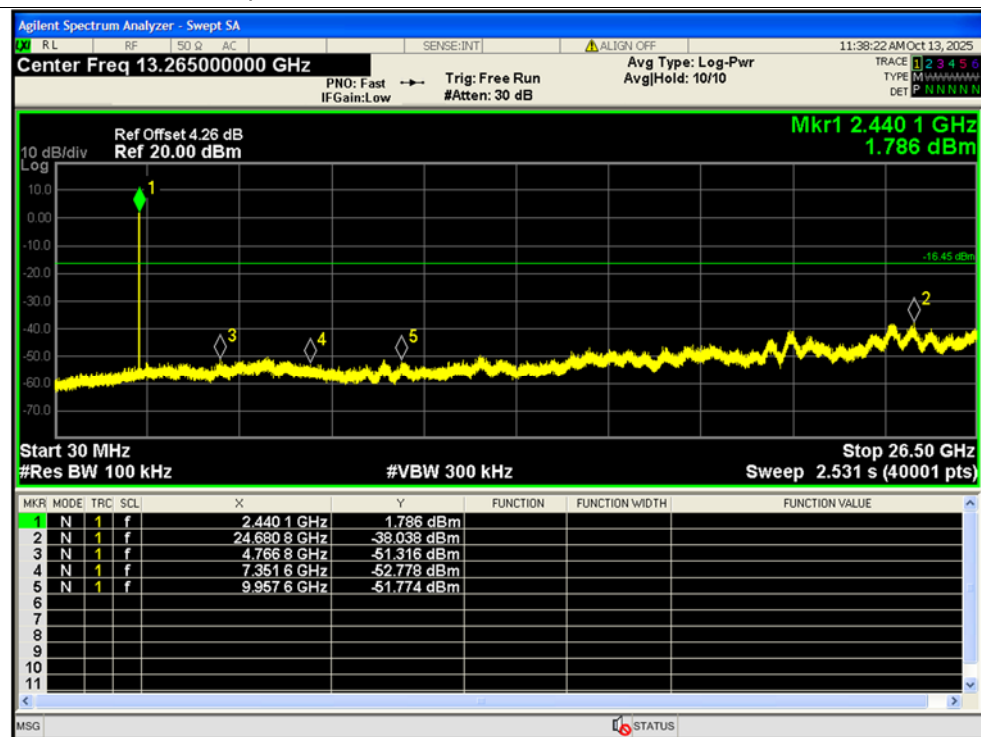

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

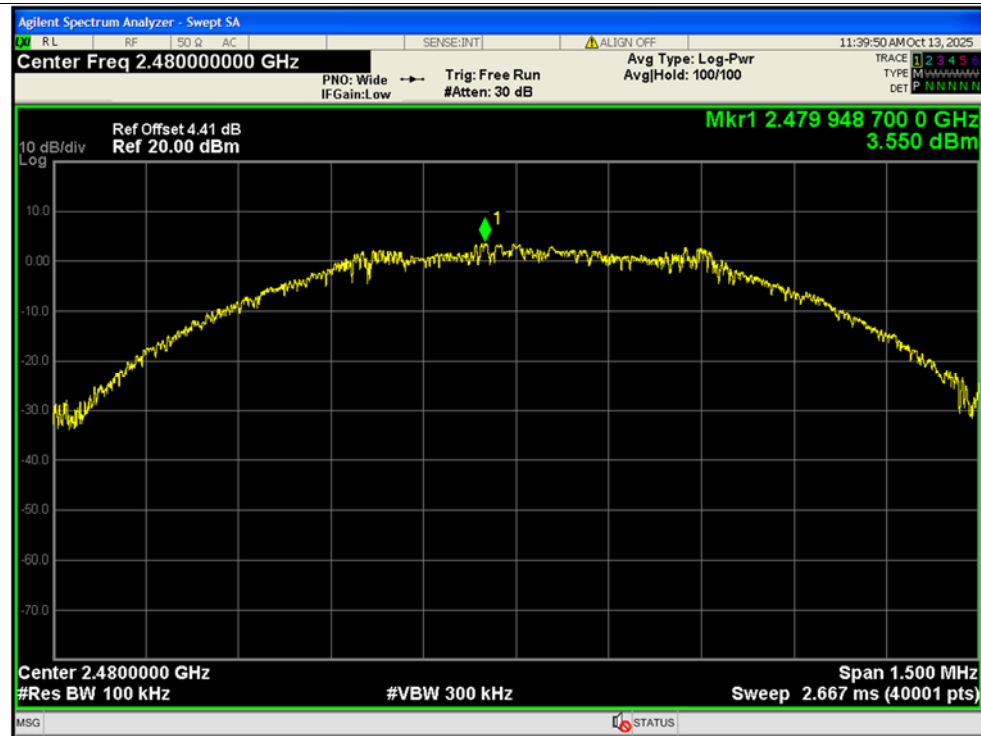

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

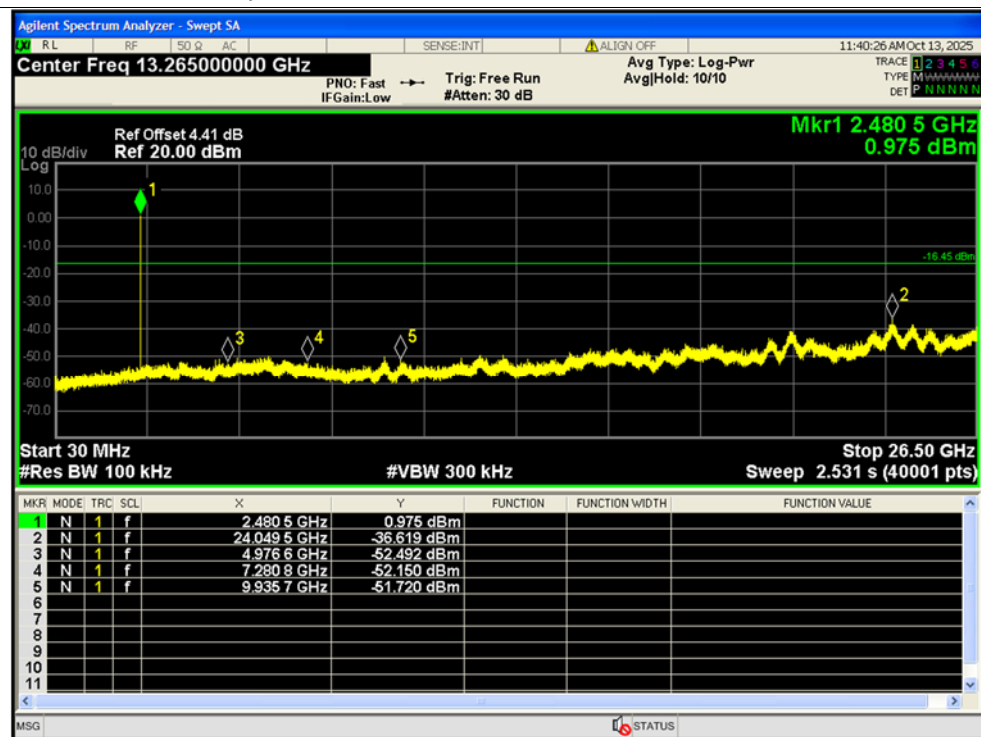




REPORT No.: SZ25070156W01

A.6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-52.64	-20	Pass
NVNT	BLE 1M	2480	Ant1	-55.35	-20	Pass

Test Graphs


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

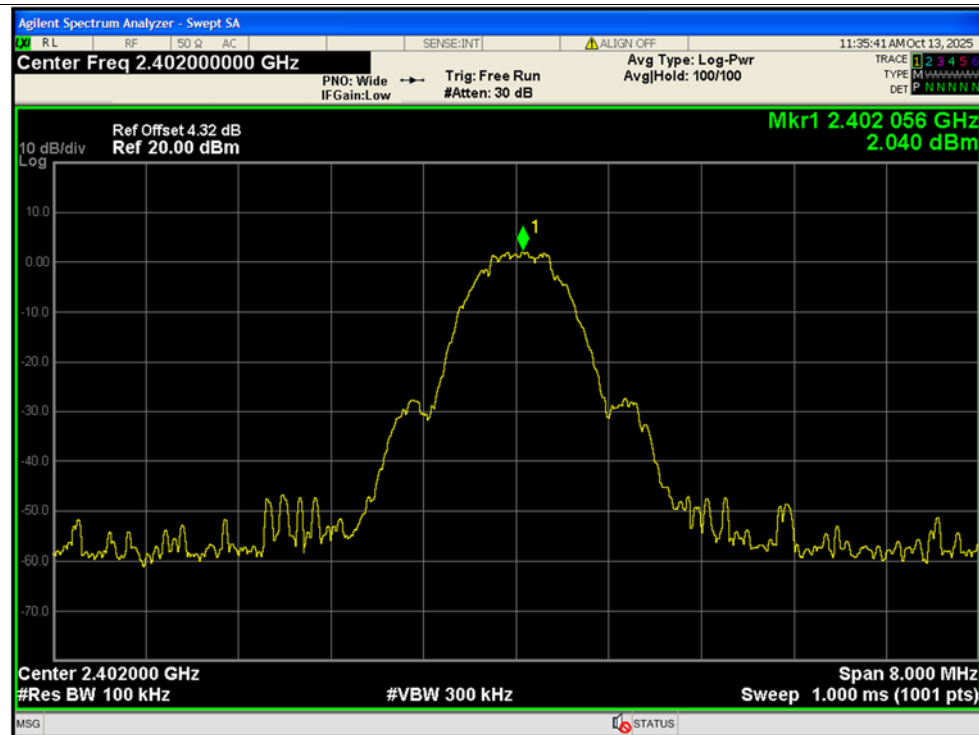


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

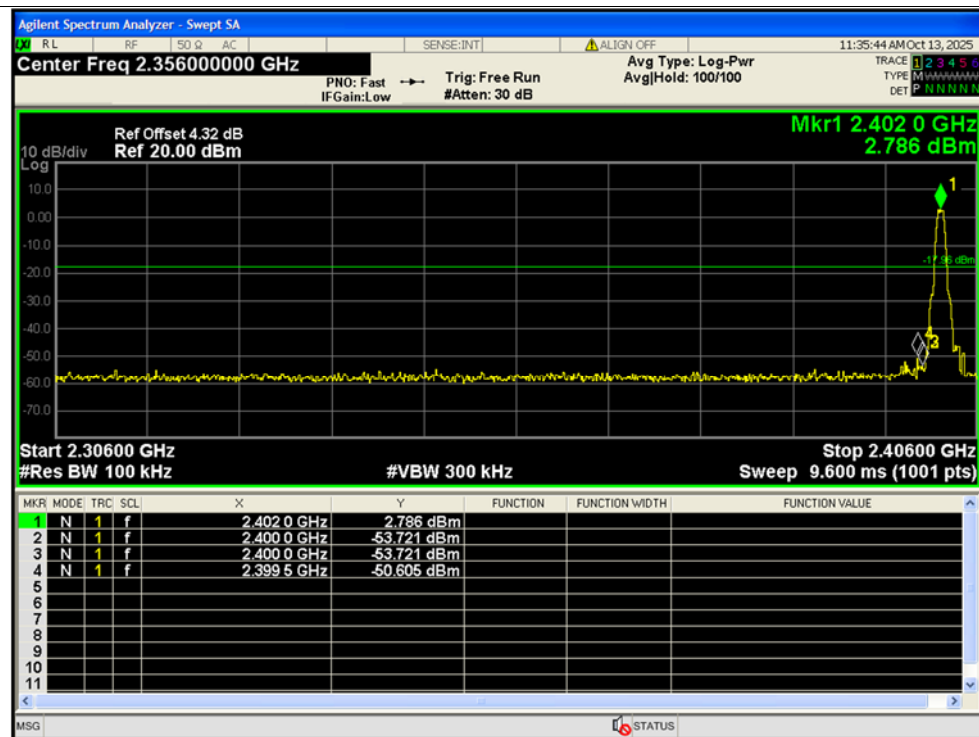

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

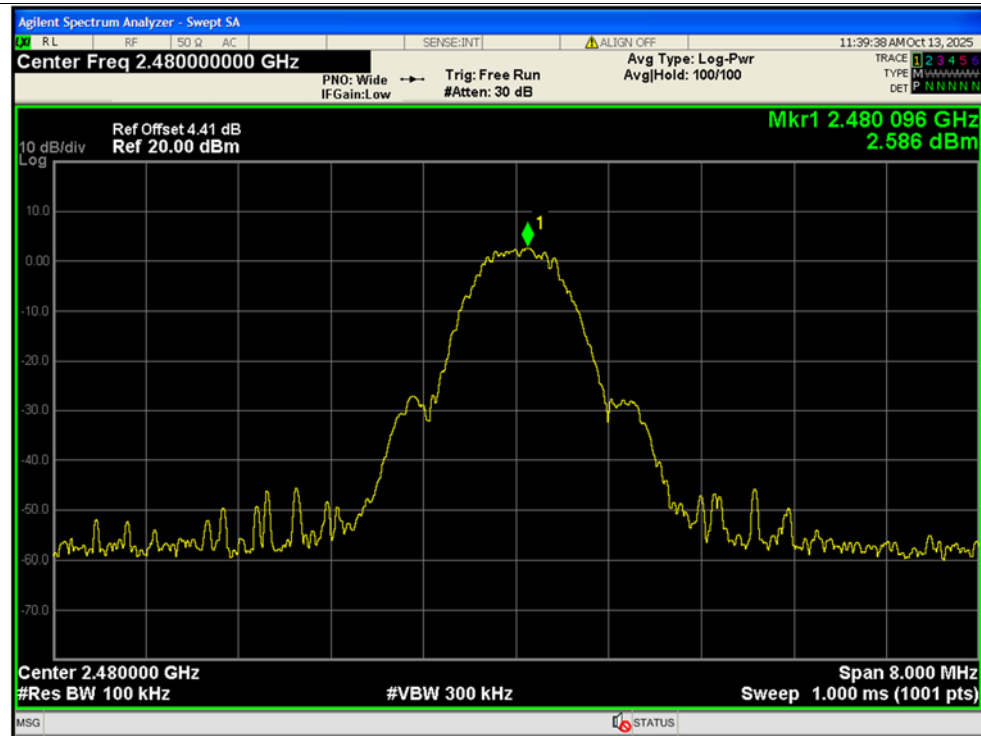

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

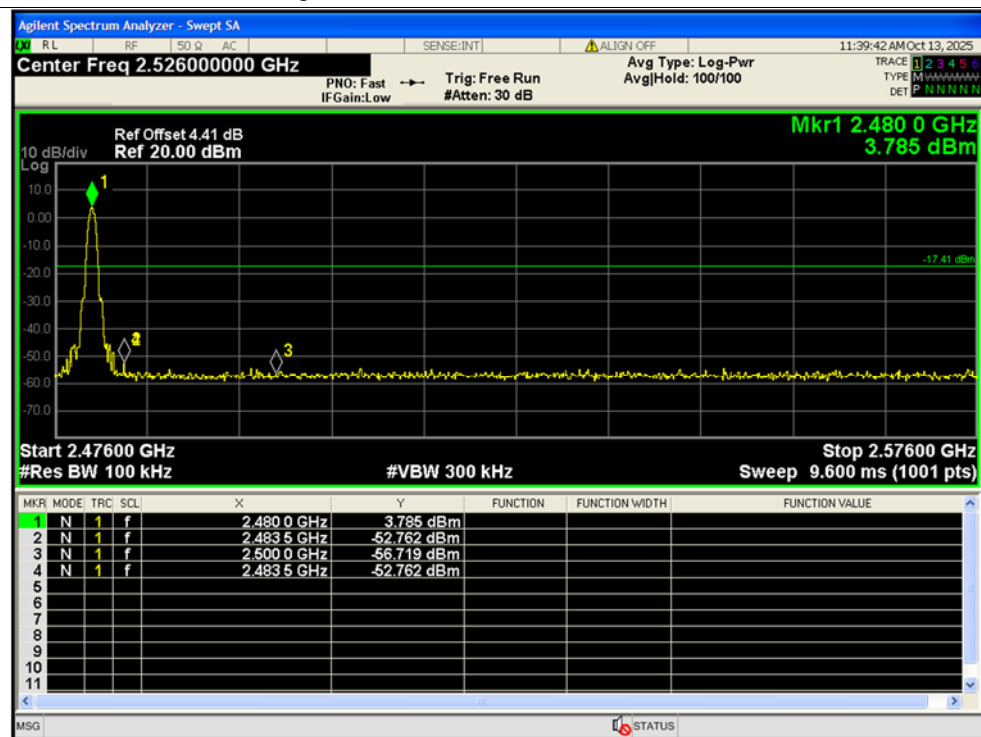


**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-10.06	0	-10.06	8	Pass
NVNT	BLE 1M	2440	Ant1	-10.2	0	-10.2	8	Pass
NVNT	BLE 1M	2480	Ant1	-10.06	0	-10.06	8	Pass




Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

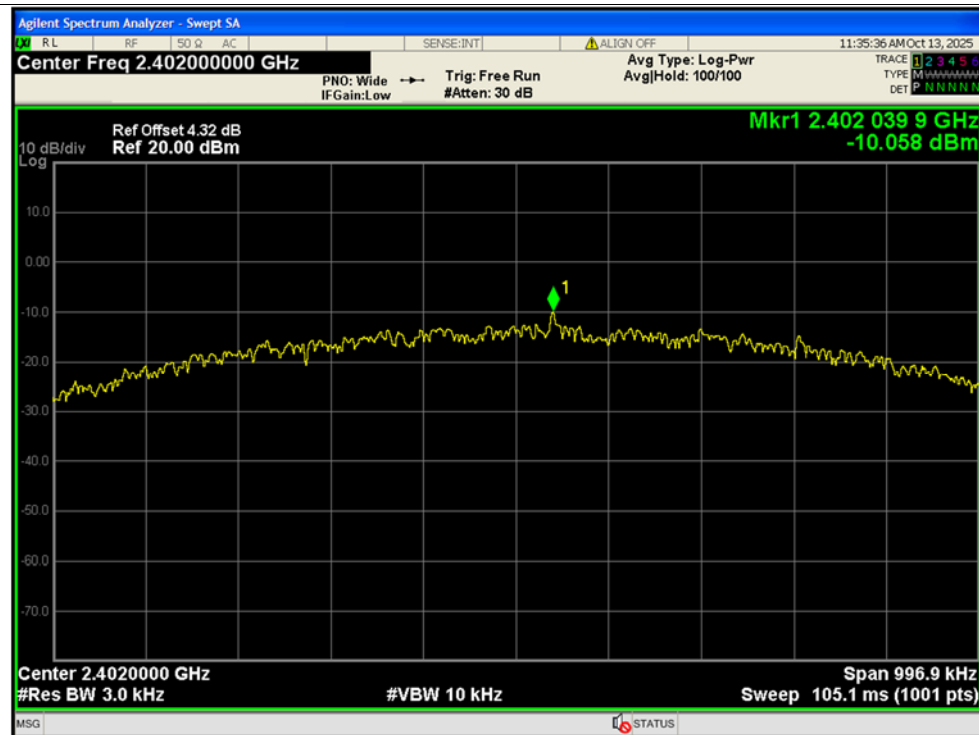


PSD NVNT BLE 1M 2440MHz Ant1

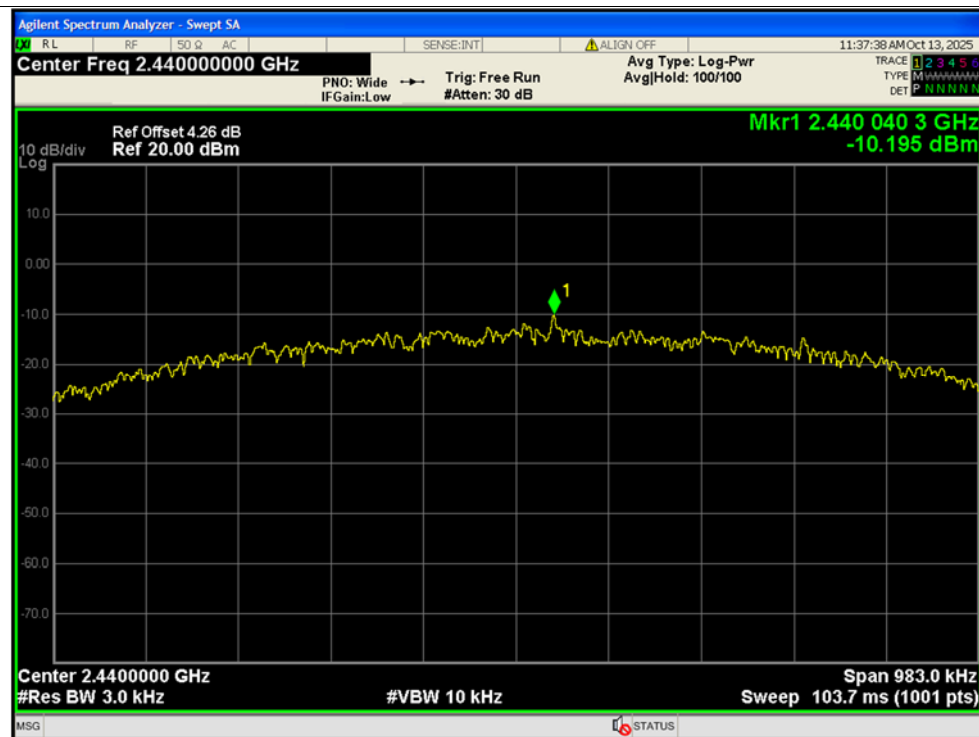



PSD NVNT BLE 1M 2480MHz Ant1

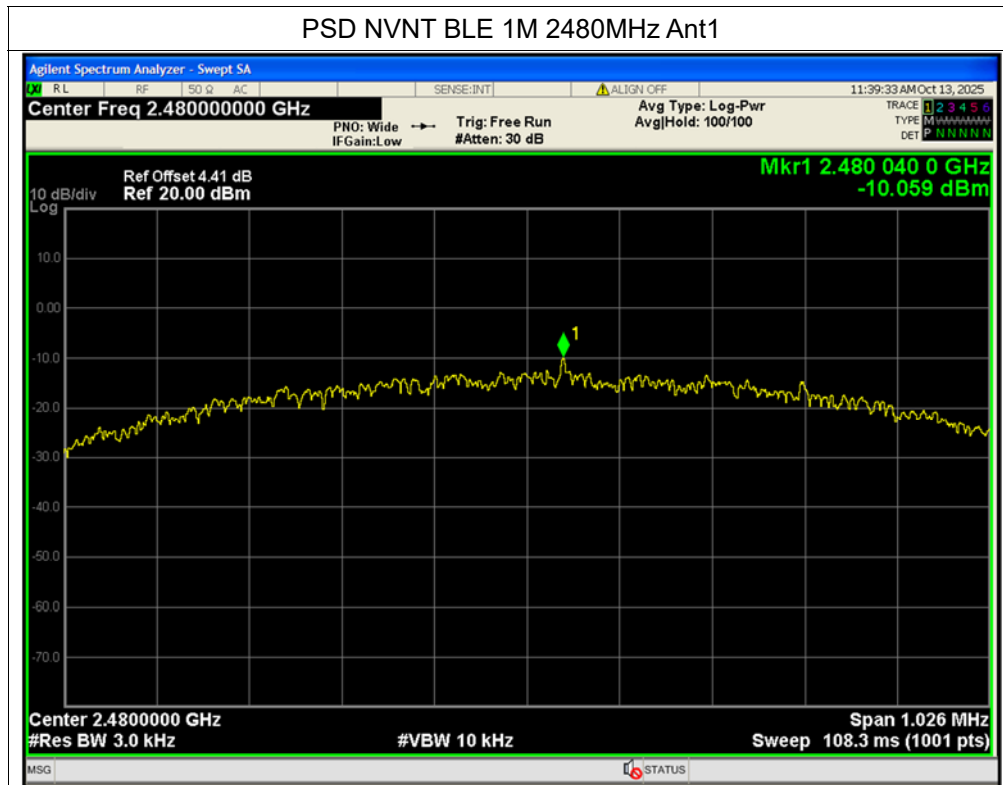


A.8. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.

1Mbps


Plot for Channel 0

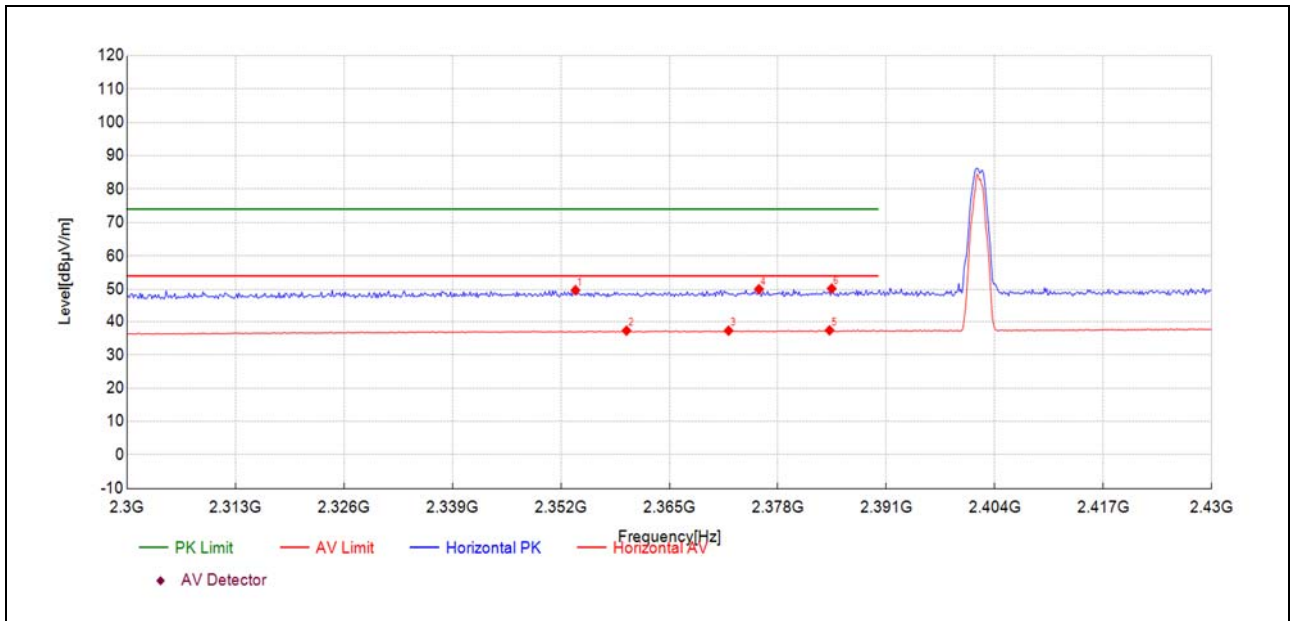

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2353.74	17.3	49.72	32.420	74.00	24.28	150	194	PK	PASS
2359.86	4.8	37.28	32.440	54.00	16.72	150	166	AV	PASS
2372.09	4.8	37.27	32.480	54.00	16.73	150	349	AV	PASS
2375.74	17.5	50.02	32.490	74.00	23.98	150	349	PK	PASS
2384.19	4.9	37.37	32.520	54.00	16.63	150	272	AV	PASS
2384.45	17.7	50.20	32.530	74.00	23.80	150	184	PK	PASS



Plot for Channel 39

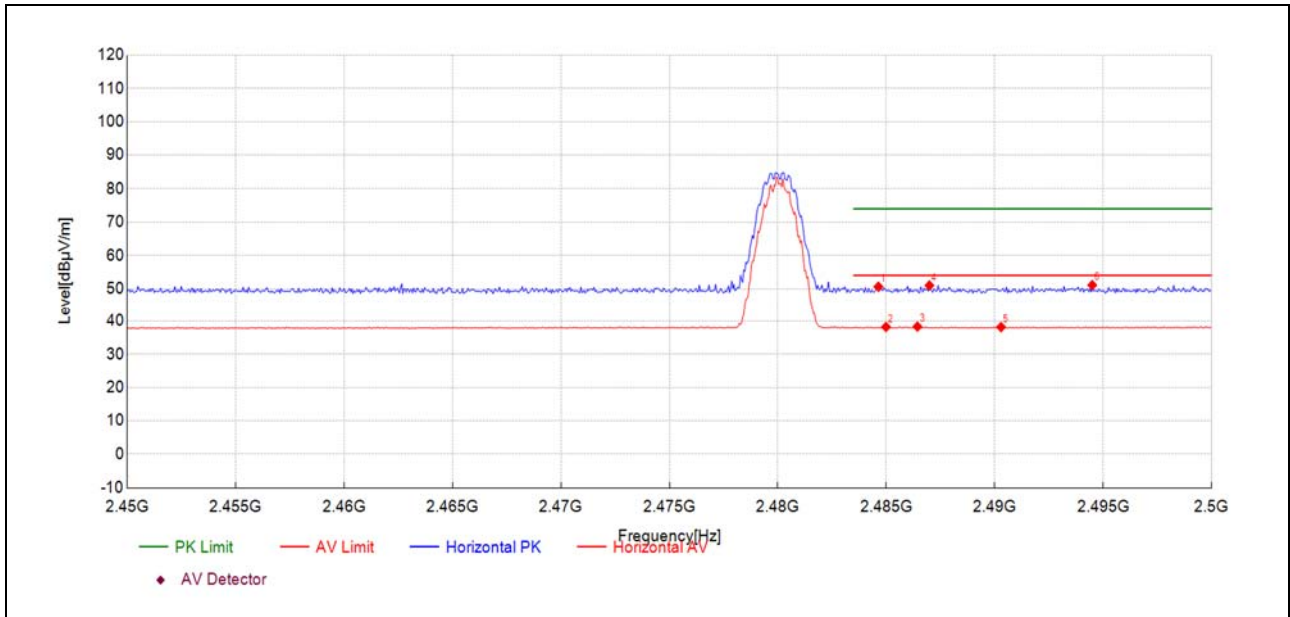

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2484.63	17.6	50.60	33.030	74.00	23.40	150	127	PK	PASS
2484.98	5.2	38.20	33.030	54.00	15.80	150	88	AV	PASS
2486.44	5.3	38.30	33.030	54.00	15.70	150	49	AV	PASS
2486.99	17.9	50.97	33.030	74.00	23.03	150	195	PK	PASS
2490.29	5.1	38.16	33.020	54.00	15.84	150	10	AV	PASS
2494.49	18.1	51.07	33.010	74.00	22.93	150	60	PK	PASS



A.9. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.


1Mbps

Plot for Channel 0

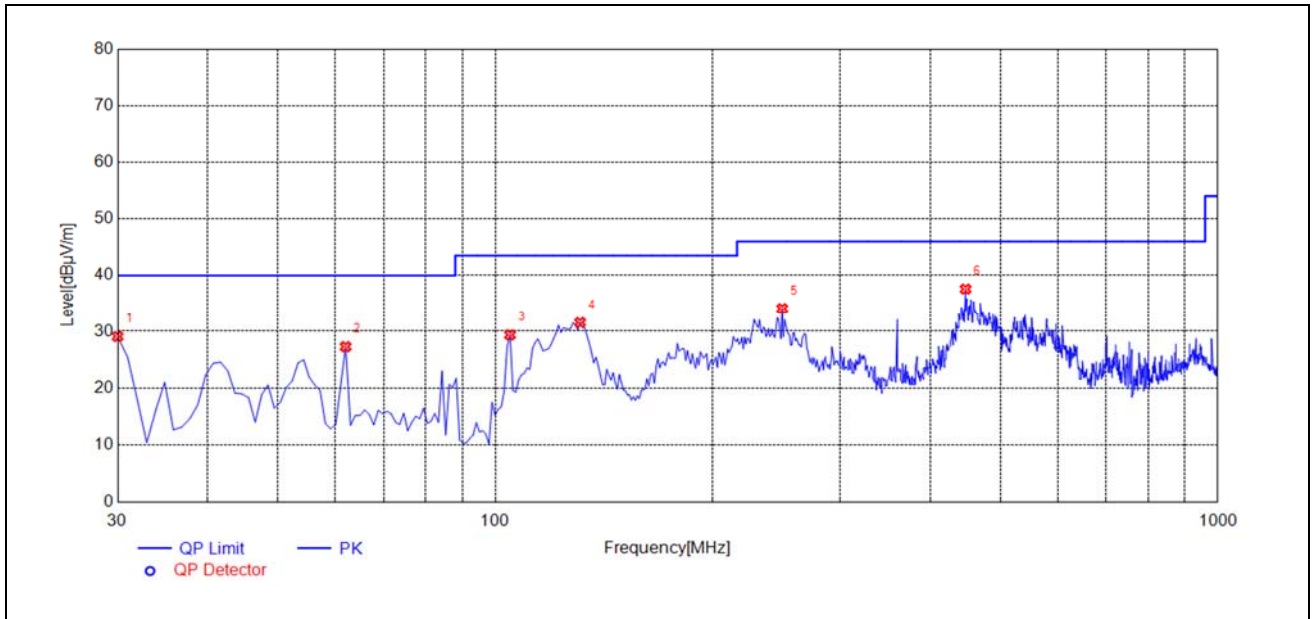


(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
30.0000	29.06	-31.67	40.00	10.94	150	235	Horizontal	PASS
62.0420	27.27	-29.99	40.00	12.73	150	76	Horizontal	PASS
104.7648	29.35	-30.84	43.50	14.15	150	257	Horizontal	PASS
130.9810	31.55	-32.82	43.50	11.95	150	250	Horizontal	PASS
249.4394	34.10	-30.32	46.00	11.90	150	213	Horizontal	PASS
447.5175	37.58	-24.71	46.00	8.42	150	271	Horizontal	PASS

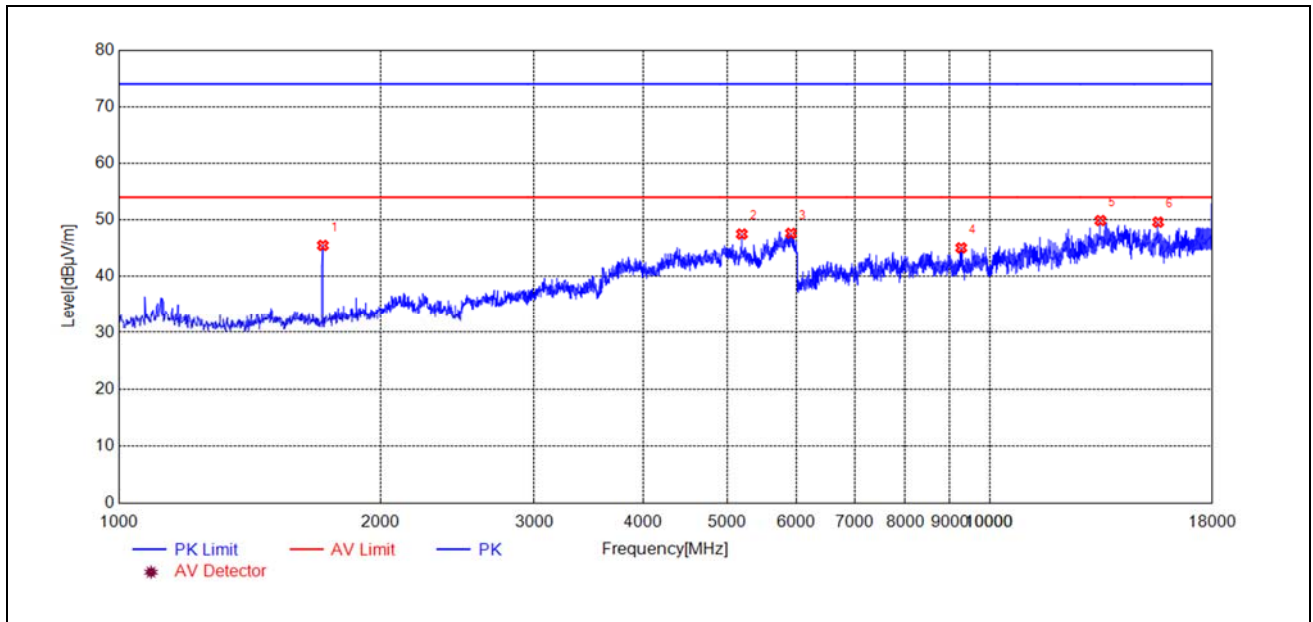


(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1715.7716	45.50	-23.81	74.00	28.50	150	314	Horizontal	PASS
5192.6193	47.51	-9.67	74.00	26.49	150	267	Horizontal	PASS
5913.4913	47.64	-6.82	74.00	26.36	150	15	Horizontal	PASS
9273.0273	45.07	0.70	74.00	28.93	150	256	Horizontal	PASS
13395.9396	49.90	7.04	74.00	24.10	150	291	Horizontal	PASS
15601.0601	49.61	6.58	74.00	24.39	150	359	Horizontal	PASS

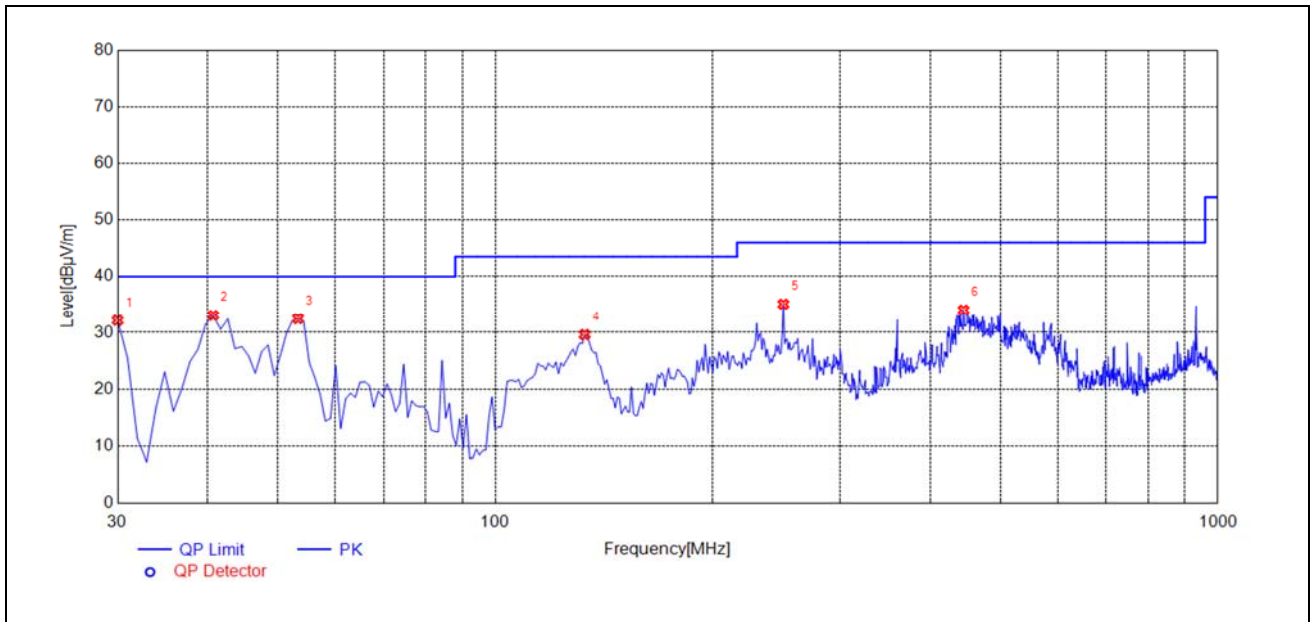

(Antenna Vertical, 30MHz to 1GHz)


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
30.0000	32.15	-31.67	40.00	7.85	150	241	Vertical	PASS
40.6807	33.05	-30.60	40.00	6.95	150	313	Vertical	PASS
53.3033	32.45	-28.68	40.00	7.55	150	52	Vertical	PASS
132.9229	29.62	-32.93	43.50	13.88	150	175	Vertical	PASS
250.4104	35.09	-30.31	46.00	10.91	150	269	Vertical	PASS
444.6046	34.03	-24.60	46.00	11.97	150	262	Vertical	PASS

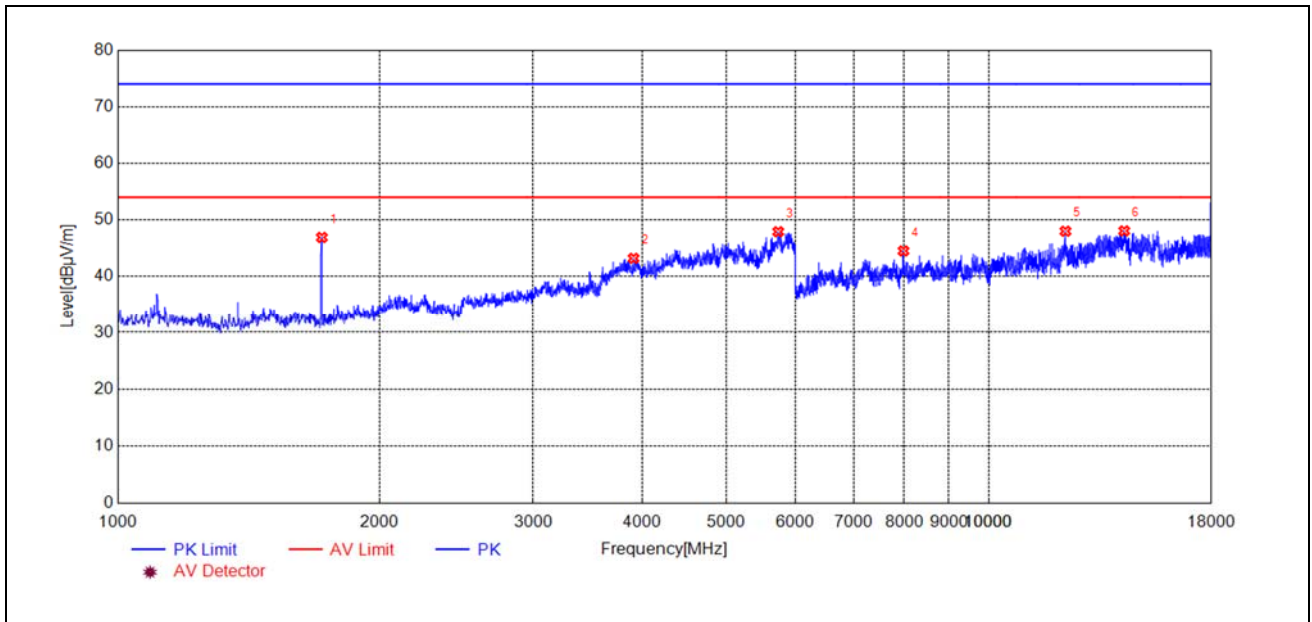

(Antenna Vertical, 1GHz to 18GHz)


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1715.7716	46.91	-23.81	74.00	27.09	150	242	Vertical	PASS
3910.6911	43.22	-14.71	74.00	30.78	150	92	Vertical	PASS
5731.5732	47.92	-7.03	74.00	26.08	150	12	Vertical	PASS
7980.8981	44.53	-2.60	74.00	29.47	150	138	Vertical	PASS
12244.9245	48.01	5.21	74.00	25.99	150	24	Vertical	PASS
14303.8304	48.07	7.77	74.00	25.93	150	276	Vertical	PASS

Plot for Channel 19

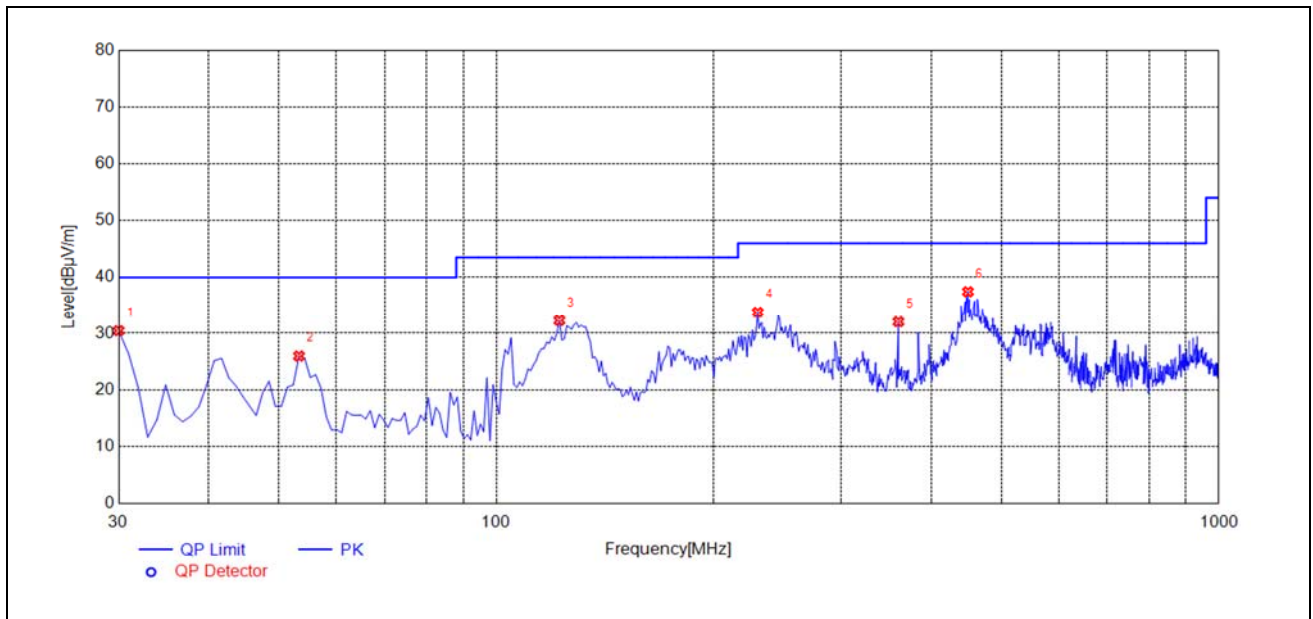


(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
30.0000	30.44	-31.67	40.00	9.56	150	285	Horizontal	PASS
53.3033	25.95	-28.68	40.00	14.05	150	360	Horizontal	PASS
122.2422	32.27	-32.80	43.50	11.23	150	263	Horizontal	PASS
230.0200	33.79	-30.71	46.00	12.21	150	242	Horizontal	PASS
360.1301	32.05	-26.34	46.00	13.95	150	169	Horizontal	PASS
449.4595	37.45	-24.81	46.00	8.55	150	278	Horizontal	PASS

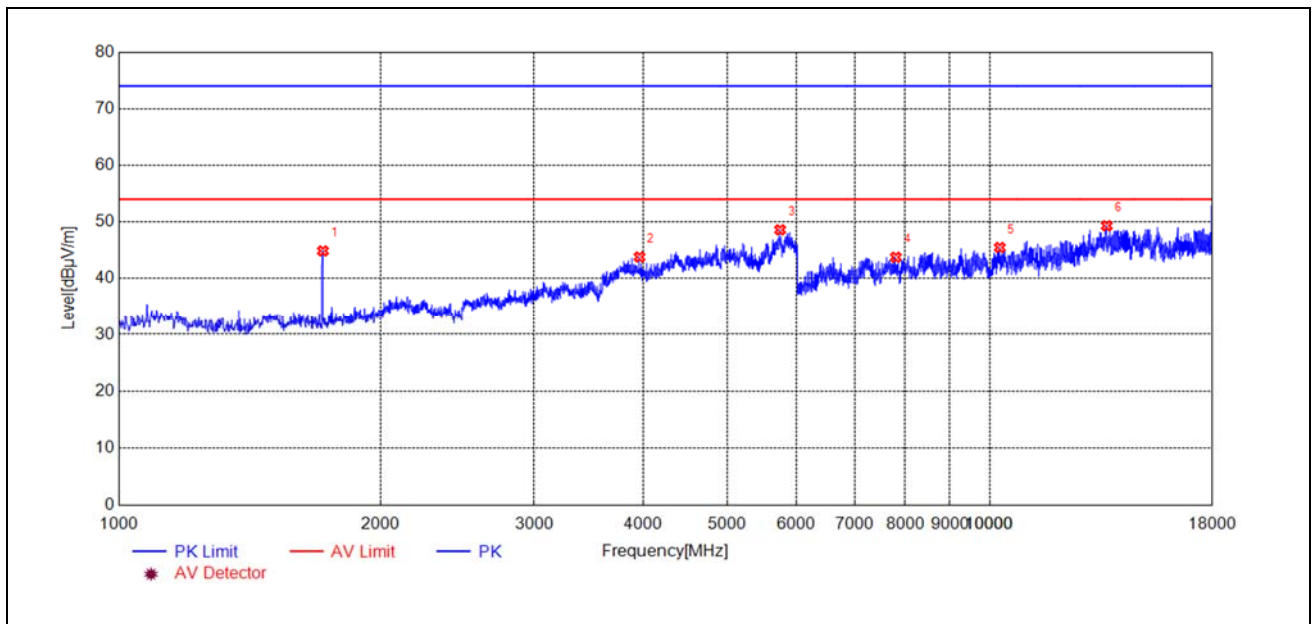


(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1715.7716	44.88	-23.81	74.00	29.12	150	15	Horizontal	PASS
3961.6962	43.81	-13.91	74.00	30.19	150	342	Horizontal	PASS
5745.1745	48.61	-6.81	74.00	25.39	150	238	Horizontal	PASS
7800.6801	43.77	-2.44	74.00	30.23	150	111	Horizontal	PASS
10267.6268	45.49	1.83	74.00	28.51	150	360	Horizontal	PASS
13622.0622	49.33	6.44	74.00	24.67	150	342	Horizontal	PASS

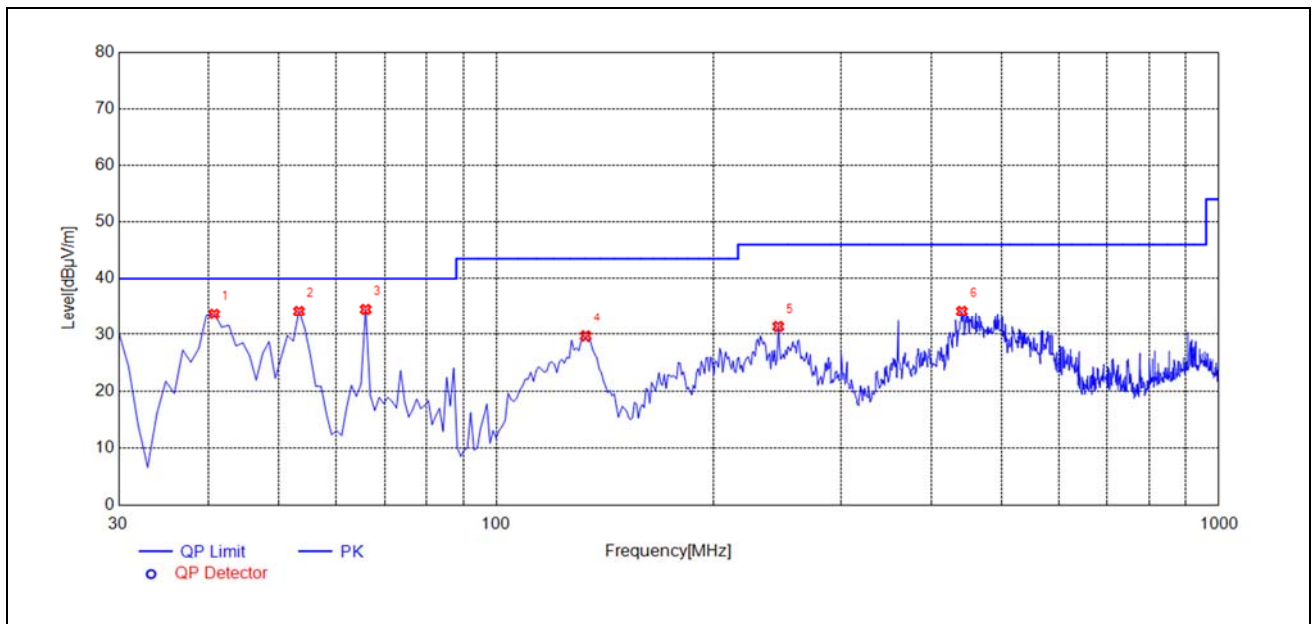

(Antenna Vertical, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
40.6807	33.68	-30.60	40.00	6.32	150	197	Vertical	PASS
53.3033	34.18	-28.68	40.00	5.82	150	125	Vertical	PASS
65.9259	34.54	-31.13	40.00	5.46	150	343	Vertical	PASS
132.9229	29.70	-32.93	43.50	13.80	150	183	Vertical	PASS
245.5556	31.37	-30.48	46.00	14.63	150	278	Vertical	PASS
440.7207	34.20	-24.79	46.00	11.80	150	125	Vertical	PASS

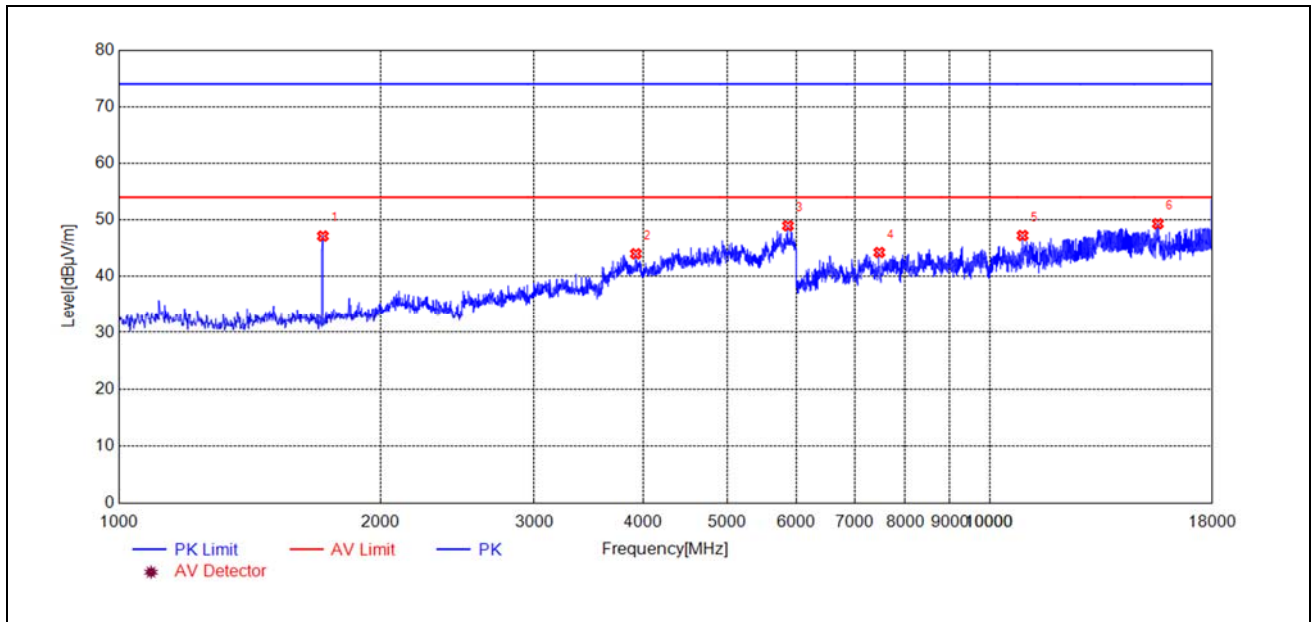


(Antenna Vertical, 1GHz to 18GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1715.7716	47.15	-23.81	74.00	26.85	150	12	Vertical	PASS
3924.2924	44.03	-14.36	74.00	29.97	150	81	Vertical	PASS
5865.8866	48.97	-6.95	74.00	25.03	150	92	Vertical	PASS
7467.4467	44.26	-3.58	74.00	29.74	150	322	Vertical	PASS
10903.4903	47.25	3.07	74.00	26.75	150	12	Vertical	PASS
15592.5593	49.33	6.46	74.00	24.67	150	333	Vertical	PASS




Plot for Channel 39

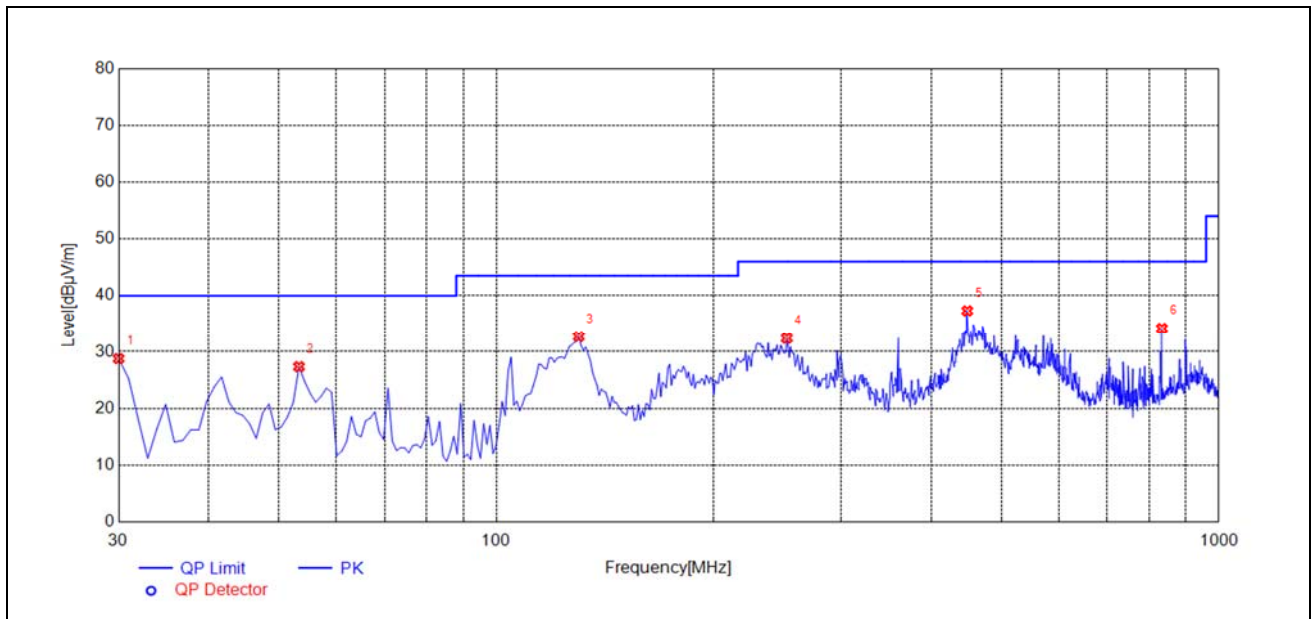


(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
30.0000	28.77	-31.67	40.00	11.23	150	204	Horizontal	PASS
53.3033	27.34	-28.68	40.00	12.66	150	52	Horizontal	PASS
130.0100	32.68	-33.03	43.50	10.82	150	234	Horizontal	PASS
252.3524	32.39	-30.33	46.00	13.61	150	204	Horizontal	PASS
448.4885	37.31	-24.76	46.00	8.69	150	255	Horizontal	PASS
833.9640	34.19	-19.15	46.00	11.81	150	204	Horizontal	PASS

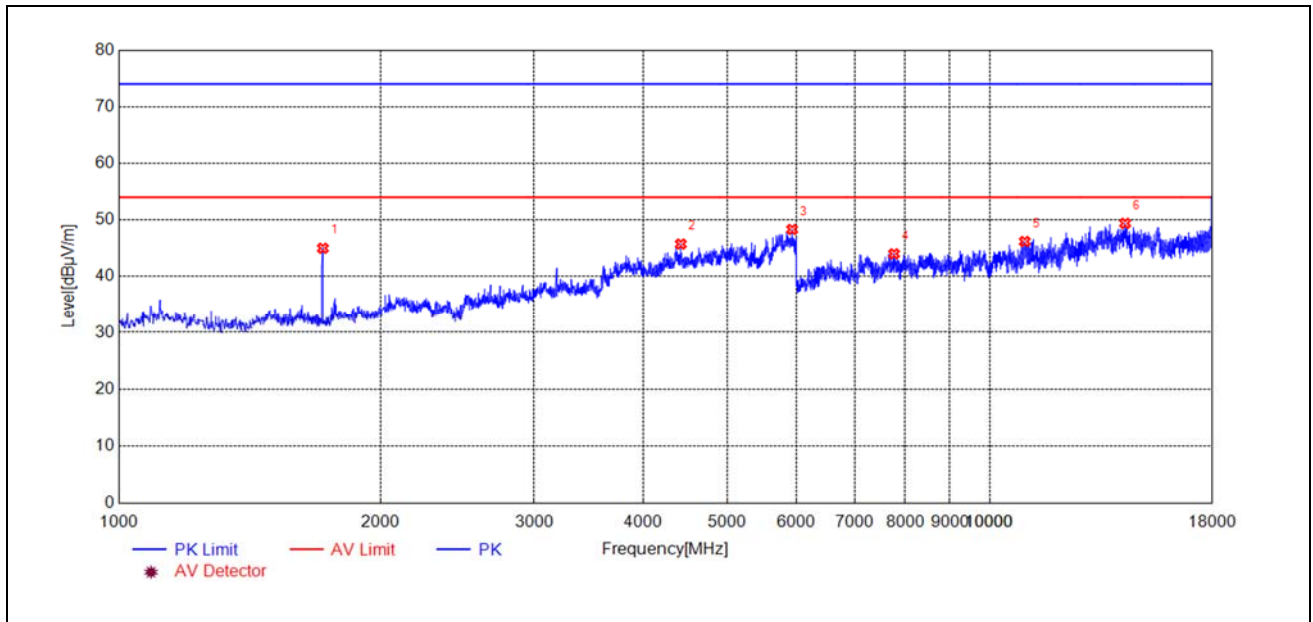


(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1715.7716	45.00	-23.81	74.00	29.00	150	306	Horizontal	PASS
4419.0419	45.74	-12.40	74.00	28.26	150	0	Horizontal	PASS
5930.4930	48.33	-6.57	74.00	25.67	150	318	Horizontal	PASS
7763.2763	44.02	-2.95	74.00	29.98	150	88	Horizontal	PASS
10968.0968	46.20	2.99	74.00	27.80	150	123	Horizontal	PASS
14300.4300	49.40	7.79	74.00	24.60	150	271	Horizontal	PASS

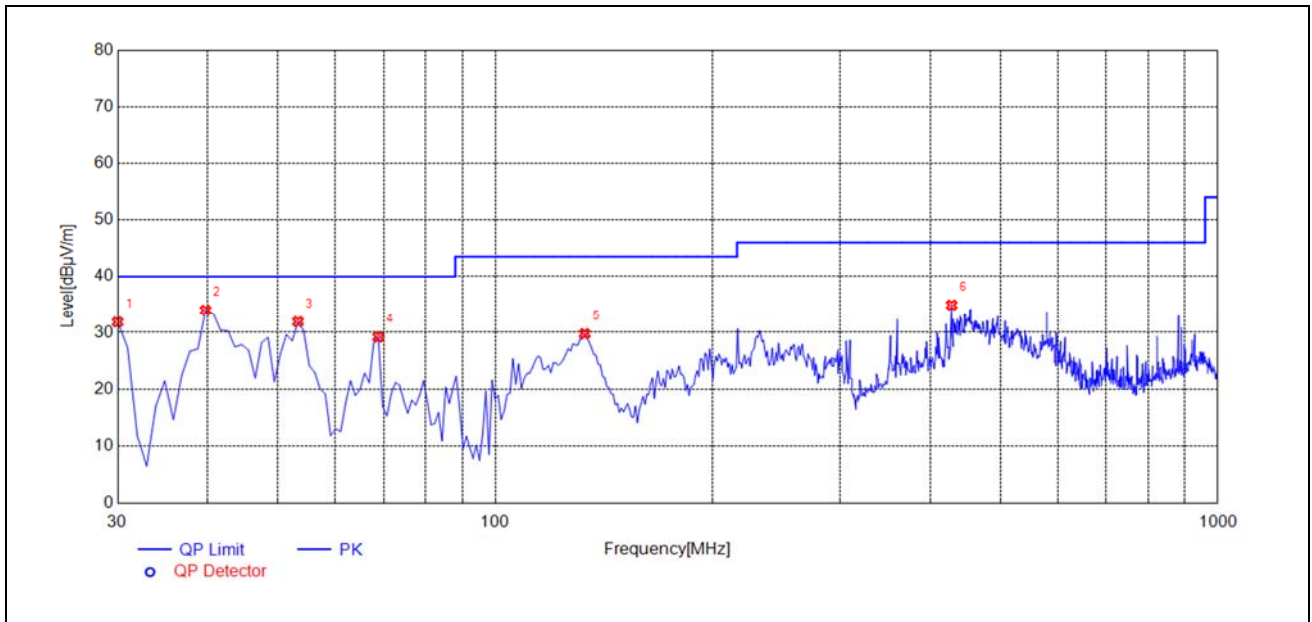

(Antenna Vertical, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
30.0000	31.85	-31.67	40.00	8.15	150	40	Vertical	PASS
39.7097	33.99	-32.97	40.00	6.01	150	141	Vertical	PASS
53.3033	31.91	-28.68	40.00	8.09	150	134	Vertical	PASS
68.8388	29.19	-31.47	40.00	10.81	150	351	Vertical	PASS
132.9229	29.76	-32.93	43.50	13.74	150	177	Vertical	PASS
428.0981	34.92	-25.34	46.00	11.08	150	278	Vertical	PASS

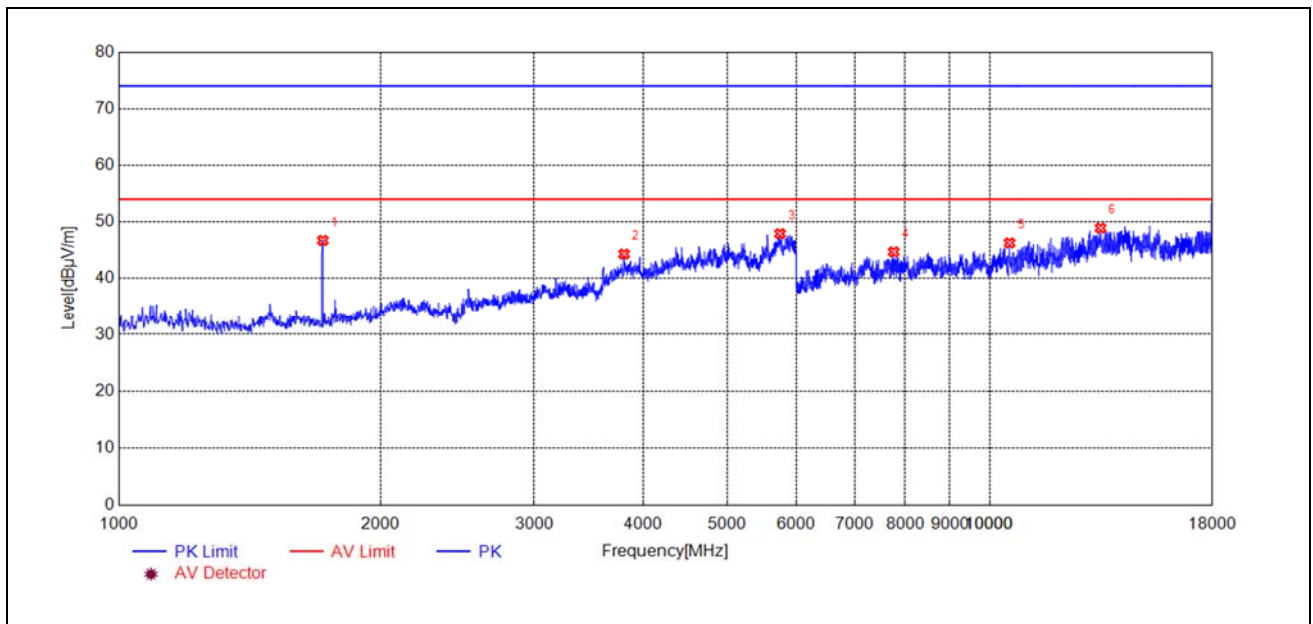

(Antenna Vertical, 1GHz to 18GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1715.7716	46.73	-23.81	74.00	27.27	150	255	Vertical	PASS
3803.5804	44.33	-14.41	74.00	29.67	150	15	Vertical	PASS
5743.4743	47.92	-6.84	74.00	26.08	150	38	Vertical	PASS
7756.4756	44.71	-3.04	74.00	29.29	150	26	Vertical	PASS
10536.2536	46.29	3.03	74.00	27.71	150	358	Vertical	PASS
13401.0401	48.91	7.04	74.00	25.09	150	152	Vertical	PASS

————— END OF REPORT —————