

FCC TEST REPORT

Report No.....: AB25110028FW01

FCC ID.....: **2BBNW-XG42**

Applicant.....: ShenZhen XinTu Century Technology Co.,Ltd

Address.....: No.5/FA, Building A1, Anle industrial Zone,172 Hangcheng Avenue, Hangcheng Street, Baoan District, Shenzhen

Manufacturer.....: ShenZhen XinTu Century Technology Co.,Ltd

Address.....: No.5/FA, Building A1, Anle industrial Zone,172 Hangcheng Avenue, Hangcheng Street, Baoan District, Shenzhen

Product Name.....: bluetooth headset

Trade Mark.....: /

Test Model.....: XG42

Additional Model(s).....: /

Standard.....: FCC 47 CFR Part 15 Subpart C (Part 15.247)
IEEE/ANSI/USEMCSC C63.10-2020

Date of Receipt.....: 2025.11.06

Date of Test Date.....: 2025.11.06-2025.11.29


Date of Issue.....: 2025.12.03

Test Result.....: Pass

Compiled by:

(Printed Name + Signature)

Huaijie Li



Supervised by:

(Printed Name + Signature)

David Huang



Approved by:

(Printed Name + Signature)

Jay Liu



Testing Laboratory Name.....: Aibo Standard Technology (Shenzhen) Co., Ltd.

Address.....: 101, Building B, Tuori New Energy Industrial Park, High-tech Park,
Tianliao Community, Yutang Street, Guangming District, Shenzhen
City, Guangdong Province, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Aibo. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Aibo within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

Aibo Standard Technology (Shenzhen) Co., Ltd.

101, Building B, Tuori New Energy Industrial Park, High-tech Park, Tianliao Community, Yutang Street,
Guangming District, Shenzhen City, Guangdong Province, China

Tel.: +86 755 85250797

E-mail: aibo@aibonorm.comWebsite: www.aibonorm.com

FCC TEST REPORT

EUT.....	: bluetooth headset
Test Model.....	: XG42
Applicant.....	: ShenZhen XinTu Century Technology Co.,Ltd
Address.....	: No.5/FA, Building A1, Anle industrial Zone,172 Hangcheng Avenue, Hangcheng Street, Baoan District, Shenzhen
Manufacturer.....	: ShenZhen XinTu Century Technology Co.,Ltd
Address.....	: No.5/FA, Building A1, Anle industrial Zone,172 Hangcheng Avenue, Hangcheng Street, Baoan District, Shenzhen

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

REPORT VERSION

Version No.	Issue Date	Description
01	2025.12.03	Initial Issue

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. GENERAL DESCRIPTION OF EUT	6
1.2. DESCRIPTION OF SUPPORT EQUIPMENT	7
1.3. DESCRIPTION OF EXTERNAL I/O	7
1.4. GENERAL DESCRIPTION OF APPLIED STANDARDS	8
1.5. DESCRIPTION OF TEST FACILITY	8
1.6. MEASUREMENT UNCERTAINTY	9
1.7. ENVIRONMENTAL CONDITIONS	9
1.8. DESCRIPTION OF TEST MODES	10
2. SUMMARY OF TEST RESULT	11
3. MEASUREMENT INSTRUMENTS LIST	12
4. ANTENNA REQUIREMENT	13
5. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	14
6. CONDUCTED OUTPUT POWER	15
6.1. LIMIT	15
6.2. TEST SETUP	15
6.3. TEST PROCEDURE	15
6.4. TEST RESULT	16
7. 20DB BANDWIDTH AND OCCUPIED BANDWIDTH	17
7.1. LIMIT	17
7.2. TEST SETUP	17
7.3. TEST PROCEDURE	17
7.4. TEST RESULT	17
8. CARRIER FREQUENCIES SEPARATION	18
8.1. LIMIT	18
8.2. TEST SETUP	18
8.3. TEST PROCEDURE	18
8.4. TEST RESULT	18
9. NUMBER OF HOPPING CHANNEL	19
9.1. LIMIT	19
9.2. TEST SETUP	19
9.3. TEST PROCEDURE	19
9.4. TEST RESULT	19
10. TIME OF OCCUPANCY (DWEIL TIME)	20
10.1. LIMIT	20
10.2. TEST SETUP	20
10.3. TEST PROCEDURE	20
10.4. TEST RESULT	20
11. CONDUCTED BAND EDGES MEASUREMENT	21
11.1. LIMIT	21
11.2. TEST SETUP	21
11.3. TEST PROCEDURE	21
11.4. TEST RESULT	21
12. RADIATED EMISSIONS AND RADIATED BAND EDGES MEASUREMENT	22

12.1. LIMIT	22
12.2. TEST SETUP	22
12.3. TEST PROCEDURE	23
12.4. TEST RESULT	24
13. PHOTOGRAPHS OF TEST SETUP	35
14. EXTERNAL PHOTOGRAPHS OF THE EUT	35
15. INTERNAL PHOTOGRAPHS OF THE EUT	35

1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF EUT

Product Name:	bluetooth headset
Trade Mark:	/
Test Model:	XG42
Additional Model(s):	/
Hardware Version:	/
Software Version:	/
Power Supply:	DC 5V 1A charged by AC/DC port
Battery	3.7V/30mAh
EUT Supports Function: (Provided by the customer)	2.4GHz ISM Bands:
Test Sample(s) Number:	AB25110028-01 (Engineer Sample) AB25110028-02 (Normal Sample)
Radio Specification Subject to this Report	
Bluetooth Version:	Bluetooth BDR + EDR
Frequency Range:	2402MHz~2480MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Channel Spacing:	1MHz
Channel Number(s):	79
Antenna Type:	Chip Antenna
Antenna Gain:	2dBi

1.2. DESCRIPTION OF SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	Supplied by
AC/DC Adapter	Quick Charger	PD1005UX-1001P	5003982	Applicant
Notebook	Lenovo	B470	WB05067151	Applicant

1.3. DESCRIPTION OF EXTERNAL I/O

I/O Port Description	Quantity	Cable
USB Type-C Interface	1	0.8m, unshielded

1.4. GENERAL DESCRIPTION OF APPLIED STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#) - Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[IEEE/ANSI/USEMCSC C63.10-2020](#) - American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

[KDB 558074 D01 15.247 Meas Guidance v05r02](#) - Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under Section 15.247 Of the FCC Rules.

1.5. DESCRIPTION OF TEST FACILITY

Test Lab: Aibo Standard Technology (Shenzhen) Co., Ltd.

Address: 101, Building B, Tuori New Energy Industrial Park, High-tech Park, Tianliao Community, Yutang Street, Guangming District, Shenzhen City, Guangdong Province, China

Tel.: +86 755 85250797

E-mail: aibo@aibonorm.com

Website: www.aibonorm.com

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Certificate No.: 7514.01

Aibo Standard Technology (Shenzhen) Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1411

Test Firm Registration Number: 567066

ISED Wireless Device Testing Laboratories

Company Number: 33924

CAB identifier: CN0185

1.6. MEASUREMENT UNCERTAINTY

The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Items	Measurement Uncertainty
Power Line Conducted Emission (9kHz~150kHz)	±3.62dB
Power Line Conducted Emission (150kHz~30MHz)	±3.38dB
Radiated Emission (9kHz~30MHz)	±3.10dB
Radiated Emission (30MHz~1GHz)	±4.90dB
Radiated Emission (1GHz~18GHz)	±3.88dB
Radiated Emission (18GHz~40GHz)	±5.32dB
RF Conducted Power	±0.57dB
Conducted Spurious Emissions	±1.60dB
RF Frequency	±6.0 x 10 ⁻⁷
Occupied Channel Bandwidth	±28.87KHz
Maximum Power Spectral Density Level	±0.59dB

Note: All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95 % level of confidence.

1.7. ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	+15°C ~ +35°C
Lative Humidity	20 % ~ 75 %
Air Pressure	98KPa ~ 101KPa

1.8. DESCRIPTION OF TEST MODES

Operation Frequency List	
Channel Number	Frequency (MHz)
00	2402
01	2403
⋮	⋮
37	2439
38	2440
39	2441
⋮	⋮
77	2479
78	2480

For portable device, radiated emission was verified over X, Y, Z Axis, and shown the worst case in this report. The following operating modes were applied for the related test items. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture), only the result of the worst case was recorded in the report.

List of Test Modes	
Test Mode(s)	Description
TM1	Keep the EUT works in continuously transmitting mode (non-hopping) with GFSK Modulation
TM2	Keep the EUT works in continuously transmitting mode (non-hopping) with $\pi/4$ DQPSK Modulation
TM3	Keep the EUT works in continuously transmitting mode (non-hopping) with 8DPSK Modulation
TM4	Keep the EUT works in continuously transmitting mode (hopping) with GFSK Modulation
TM5	Keep the EUT works in continuously transmitting mode (hopping) with $\pi/4$ DQPSK Modulation
TM6	Keep the EUT works in continuously transmitting mode (hopping) with 8DPSK Modulation

Power setting during the test:

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Frequency	2402MHz	2440MHz	2480MHz
RF Power Parameter(s)	Default	Default	Default

2. SUMMARY OF TEST RESULT

FCC 47 CFR Part 15 Subpart C Test Cases			
FCC Rule	Description of Test Item(s)	Result	Test Engineer
Part 15.203	Antenna Requirement	Pass	Jacey Fu
Part 15.247(b)(1)	Maximum Peak Conducted Output Power	Pass	Jacey Fu
Part 15.247(a)(1)	20dB Bandwidth	Pass	Jacey Fu
Part 15.247(a)(1)	Carrier Frequencies Separation	Pass	Jacey Fu
Part 15.247(a)(1)(iii)	Number of Hopping Channel	Pass	Jacey Fu
Part 15.247(a)(1)(iii)	Time Of Occupancy (Dwell Time)	Pass	Jacey Fu
Part 15.247(d)	Conducted Band Edges Measurement	Pass	Jacey Fu
Part 15.205, 15.209, 15.247(d)	Radiated Emissions and Radiated Band Edges Measurement	Pass	Jacey Fu
Part 15.207	Power Line Conducted Emissions	N/A	NOTE
Part 15.247(i)	RF Exposure (see the RF Exposure Report)	Pass	Jacey Fu

Note: The product bluetooth headset, model JM47, is powered by battery, so it is no need testing against this item..

3. MEASUREMENT INSTRUMENTS LIST

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Loop Antenna	Schwarzbeck	FMZB 1519	1519-025	02/19/2025	02/18/2026
2	ESCI EMI TEST RECEIVER	ROHDE & SCHWARZ	ESPI 7	/	01/20/2025	01/19/2026
3	Power Amplifier	HZEMC	HPA-9K0133	HYP A23029	02/19/2025	02/18/2026
4	Broadband Antenna	Schwarzbeck	VULB 9168	01763	02/19/2025	02/18/2026
5	Attenuator	PRM	ATT50-6-3	ATT50-6-3	01/20/2025	01/19/2026
6	Spectrum Analyzer	R&S	FSV40-N	101365	01/20/2025	01/19/2026
7	Horn Antenna	Schwarzbeck	BBHA 9120 D	02786	02/19/2025	02/18/2026
8	Horn Antenna	Schwarzbeck	ZLB7-18-40G-77	072410839	02/19/2025	02/18/2026
9	Power Amplifier	HZEMC	PA0118-43	HYP A23030	02/19/2025	02/18/2026
10	Power Amplifier	HZEMC	PA01840-45	HYP A23031	02/19/2025	02/18/2026
11	EMI Test Receiver	R&S	ESCI	101196	01/20/2025	01/19/2026
12	LISN	R&S	ENV216	102374	01/20/2025	01/19/2026
13	Pulse Limiter	Schwarzbeck	ESH3-Z2	0357.8810.54	01/20/2025	01/19/2026
14	MXA Signal Analyzer	Keysight	N9020A	MY52091389	01/20/2025	01/19/2026
15	Power Sensor	Agilent	U2021XA	MY54110007	01/31/2025	01/30/2026
16	Power Sensor	Agilent	U2021XA	MY54110009	01/31/2025	01/30/2026
17	MXG Vector Signal Generator	Agilent	N5182A	MY47070153	01/20/2025	01/19/2026
18	Analog Signal Source	Keysight	N5173B	MY60403029	01/20/2025	01/19/2026
19	Vector Signal Generator	R&S	SMCV100B	106103	01/20/2025	01/19/2026
20	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	118780	01/20/2025	01/19/2026
21	DC POWER SUPPLY	MAISHENG	MT-305DS	2021040016	02/28/2025	02/27/2026
22	Const Temp. & Humidity Chamber	GRT	GR-HWX-150L	GR25010601	01/20/2025	01/19/2026

Test Software		
Software name	Model	Version
Conducted Emission Measurement Software	FASLAB	V4.1
Radiated Emission Measurement Software	FASLAB	V4.1
Bluetooth and WIFI Test System	MTS 8310	V3.0.0.0

4. ANTENNA REQUIREMENT

1) Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2) Conclusion

Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 2dBi (Max.). It complies with the standard requirement.

5. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE


For 47 CFR Part 15C section 15.247(a)(1),(g),(h) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- a) Number of shift register stages: 9
- b) Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- c) Longest sequence of zeros: 8(non-inverted signal)

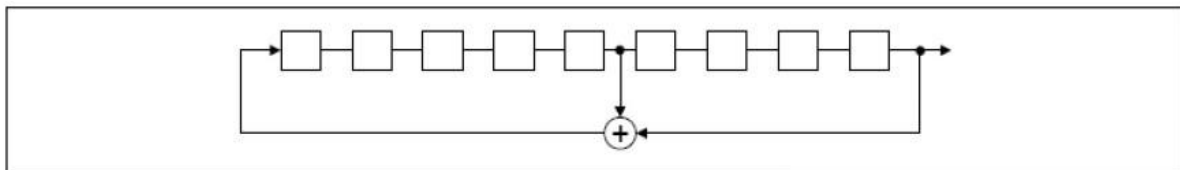

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

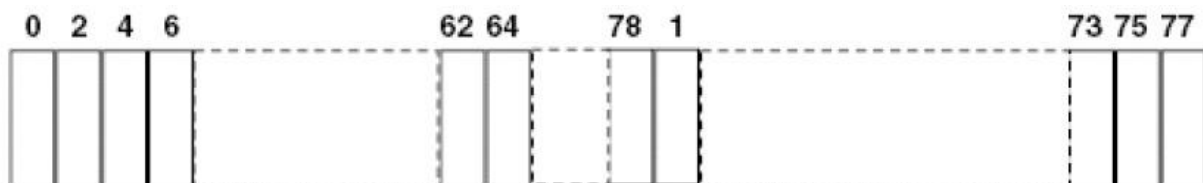

Each frequency used equally one the average by each transmitter.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


6. CONDUCTED OUTPUT POWER

6.1. LIMIT

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5MHz band: 0.125watts.

6.2. TEST SETUP

☒ Using a Spectrum Analyzer for Testing:

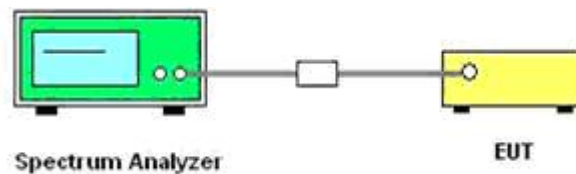

☐ Using a Broadband Power Meter for Testing:



6.3. TEST PROCEDURE

☒ Using a Spectrum Analyzer for Testing:

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20dB bandwidth, centered on a hopping channel.
- 2) RBW > 20dB bandwidth of the emission being measured.
- 3) VBW $\geq$ RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

e) A plot of the test results and setup description shall be included in the test report.

☐ **Using a Broadband Power Meter for Testing:**

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the broadband power meter.

6.4. TEST RESULT**Pass.**

Please refer to the Appendix A BR EDR RF Conducted Test Data.


Note: The test results including the cable lose.

7. 20DB BANDWIDTH AND OCCUPIED BANDWIDTH

7.1. LIMIT

None; for reporting purposes only.

7.2. TEST SETUP

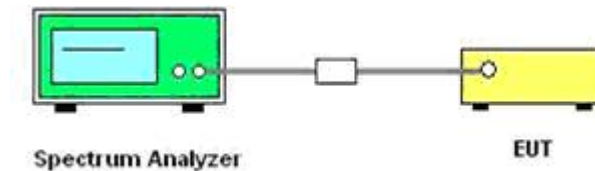

7.3. TEST PROCEDURE

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

For 20dB Bandwidth Measurement:

- a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
- b) RBW = 1% to 5% of the OBW.
- c) VBW $\geq 3 \times$ RBW
- d) Sweep = auto;
- e) Detector function = peak
- f) Trace = max hold
- g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

For 99% Occupied Bandwidth Measurement:

- a) Span = approximately 1.5 to 5 times the OBW, centered on a hopping channel.
- b) RBW = 1% to 5% of the OBW.
- c) VBW $\geq 3 \times$ RBW
- d) Sweep = auto;
- e) Detector function = peak
- f) Trace = max hold
- g) Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

7.4. TEST RESULT

Please refer to the Appendix A BR EDR RF Conducted Test Data.


8. CARRIER FREQUENCIES SEPARATION

8.1. LIMIT

According to 15.247(a)(1), Frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

8.2. TEST SETUP

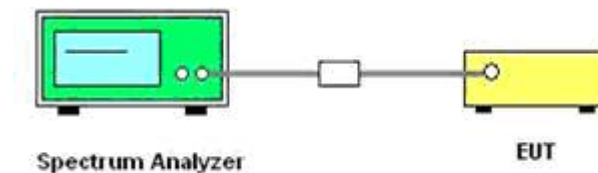

8.3. TEST PROCEDURE

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.
- Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

8.4. TEST RESULT

Pass.


Please refer to the Appendix A BR EDR RF Conducted Test Data.

9. NUMBER OF HOPPING CHANNEL

9.1. LIMIT

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 non-overlapping channels.

9.2. TEST SETUP

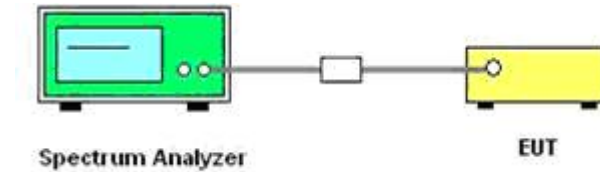

9.3. TEST PROCEDURE

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW $\geq$ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

9.4. TEST RESULT

Pass.


Please refer to the Appendix A BR EDR RF Conducted Test Data.

10. TIME OF OCCUPANCY (DWELL TIME)

10.1. LIMIT

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. TEST SETUP

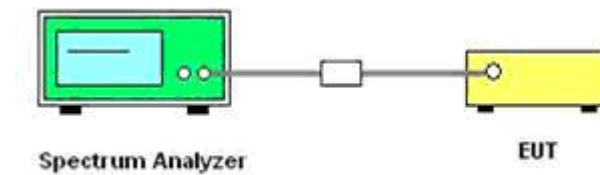

10.3. TEST PROCEDURE

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Set center frequency of Spectrum Analyzer = operating frequency. Spectrum Setting: RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak.
- Use video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for packet transmitting.
- Measure the maximum time duration of one single pulse.
- The EUT was set to the Hopping Mode for Dwell Time Test.

10.4. TEST RESULT

Pass.


Please refer to the Appendix A BR EDR RF Conducted Test Data.

11. CONDUCTED BAND EDGES MEASUREMENT

11.1. LIMIT

According to §15.247(d), In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

11.2. TEST SETUP

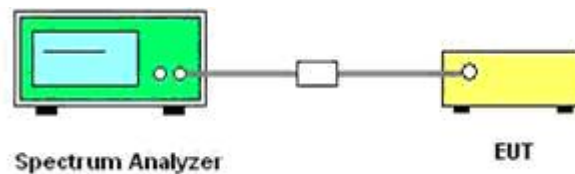

11.3. TEST PROCEDURE

- Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- Set the spectrum analyzer to any one measured frequency within its operating range.
- Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- Measure the highest amplitude appearing on spectral display and set it as a reference level.
- Set a convenient frequency span including 100 kHz bandwidth from band edge. Measure the emission and marking the edge frequency.
- Measure the spurious emissions with frequency range from 9kHz to 26.5GHz.

11.4. TEST RESULT

Pass.

Please refer to the Appendix A BR EDR RF Conducted Test Data.

12. RADIATED EMISSIONS AND RADIATED BAND EDGES MEASUREMENT

12.1. LIMIT


According to §15.247(d), radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).



Limits of Spurious Emissions				
Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz~0.490MHz	2400/F(kHz)	---	---	300
0.490MHz~1.705MHz	24000/F(kHz)	---	---	30
1.705MHz~30MHz	30	---	---	30
30MHz~88MHz	100	40.0	Quasi-peak	3
88MHz~216MHz	150	43.5	Quasi-peak	3
216MHz~960MHz	200	46.0	Quasi-peak	3
960MHz~1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBμV/m) = 20*log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

12.2. TEST SETUP

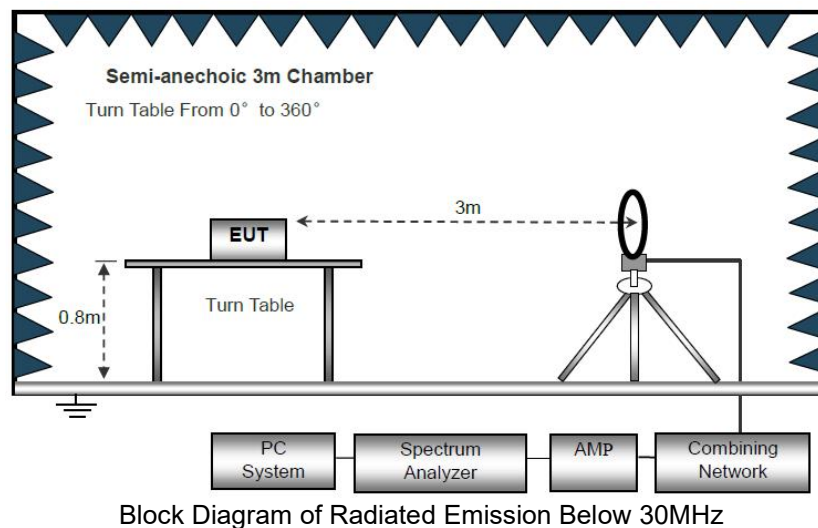

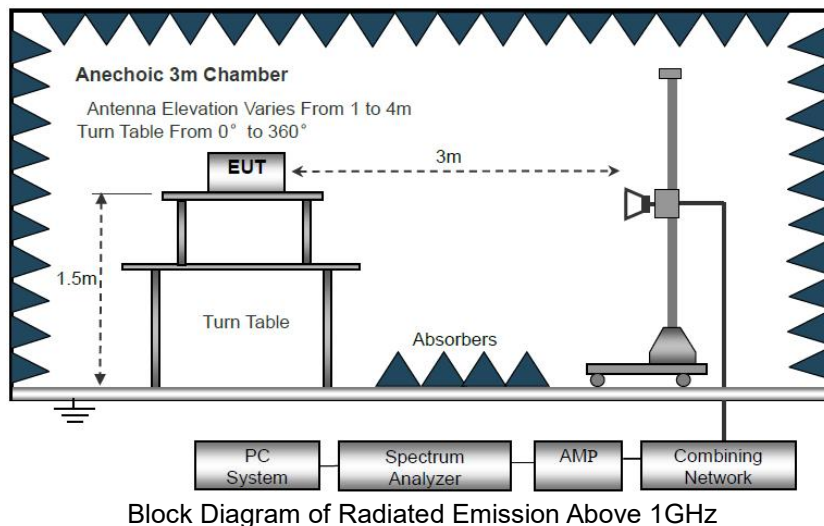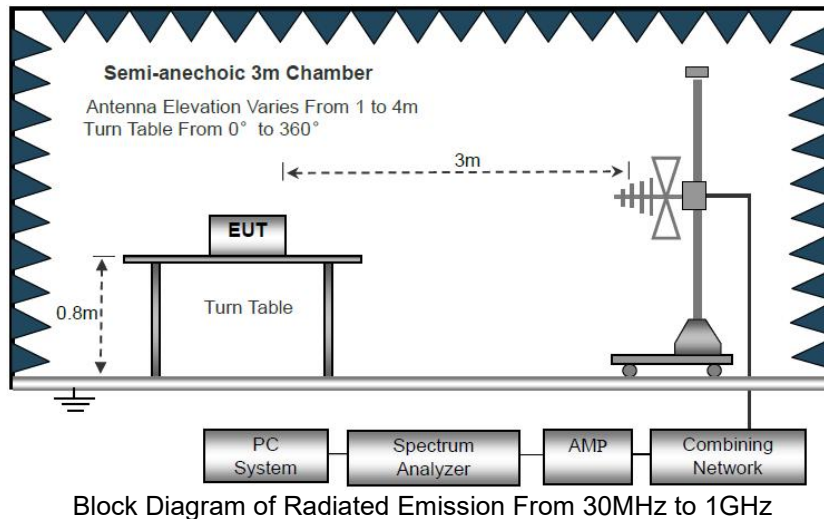

12.3. TEST PROCEDURE

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0 degree to 360 degree to acquire the highest emissions from EUT.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 25GHz.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and record the worst case in this report.

g) The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz~30MHz	Active Loop Antenna	3
30MHz~1GHz	Bilog Antenna	3
1GHz~18GHz	Horn Antenna	3
18GHz~25GHz	Horn Antenna	1

h) Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz~150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz~30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz~1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz~40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

12.4. TEST RESULT

Pass.

Remark:

a) Pre-scan all modes and recorded the worst case in this report.


b) Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and the emission levels from 9kHz to 30MHz are attenuated 20dB below the limit and not recorded in report.

Left earphone:

Radiated Spurious Emissions 9kHz~1GHz, the worst case DH5 mode and highest channel in the Radiated Spurious Emissions above 1GHz was tested.

Radiated Emission Test Data (30MHz to 1GHz) Highest Channel

Environmental Conditions	24.6°C, 53.4% RH	Test Engineer	He Chen
Worst Test Mode:	GFSK	Polarity:	Horizontal

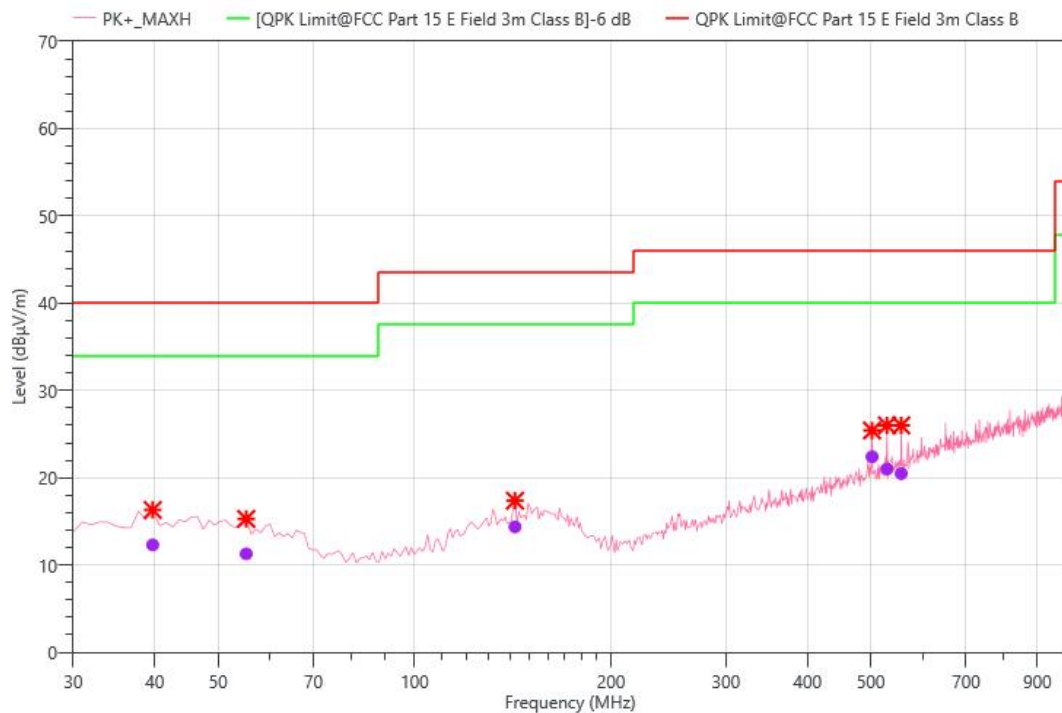

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	39.700	25.14	-12.83	12.31	40.00	27.69	QPK	H	PASS
2	55.220	24.93	-13.65	11.28	40.00	28.72	QPK	H	PASS
3	142.520	26.86	-12.49	14.37	43.50	29.13	QPK	H	PASS
4	502.390	29.97	-7.56	22.41	46.00	23.59	QPK	H	PASS
5	529.550	28.00	-7	21.00	46.00	25.00	QPK	H	PASS
6	556.710	26.85	-6.37	20.48	46.00	25.52	QPK	H	PASS

Remark:


Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin=Limit - Emission Level.

Radiated Emission Test Data (30MHz to 1GHz) Highest Channel

Environmental Conditions	24.6°C, 53.4% RH	Test Engineer	He Chen
Worst Test Mode:	GFSK	Polarity:	Vertical

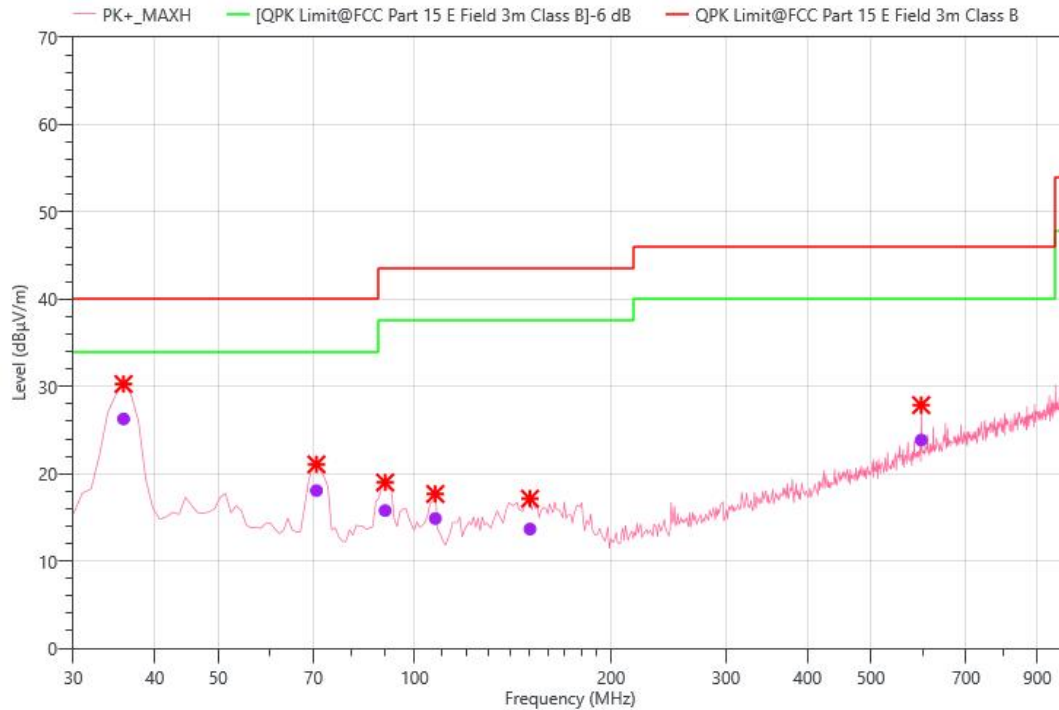

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Verdict
1	35.820	39.74	-13.46	26.28	40.00	13.72	QPK	V	PASS
2	70.740	34.05	-15.98	18.07	40.00	21.93	QPK	V	PASS
3	90.140	32.87	-17.09	15.78	43.50	27.72	QPK	V	PASS
4	107.600	30.43	-15.56	14.87	43.50	28.63	QPK	V	PASS
5	150.280	25.56	-11.9	13.66	43.50	29.84	QPK	V	PASS
6	597.450	29.45	-5.59	23.86	46.00	22.14	QPK	V	PASS

Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;


Margin=Limit - Emission Level.

Right earphone:

Radiated Spurious Emissions 9kHz~1GHz, the worst case DH5 mode and highest channel in the Radiated Spurious Emissions above 1GHz was tested.

Radiated Emission Test Data (30MHz to 1GHz) Highest Channel

Environmental Conditions	24.6°C, 53.4% RH	Test Engineer	He Chen
Worst Test Mode:	GFSK	Polarity:	Horizontal

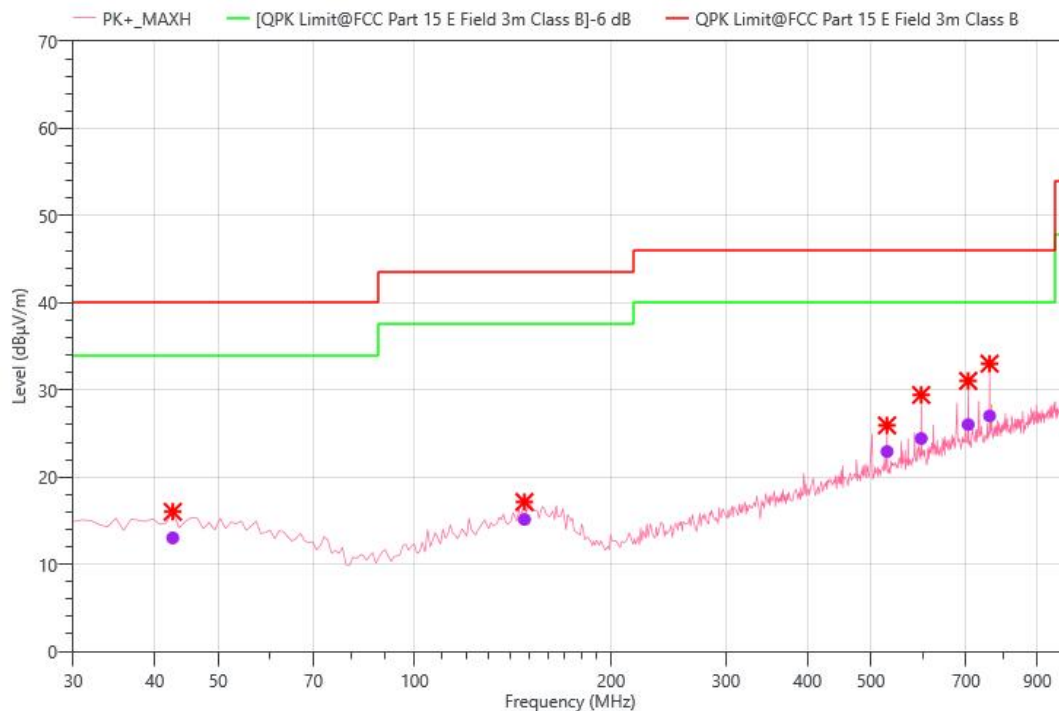

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	42.610	26.12	-13.1	13.02	40.00	26.98	QPK	100	H	234.9	PASS
2	147.370	27.26	-12.12	15.14	43.50	28.36	QPK	100	H	9.5	PASS
3	529.550	29.93	-7	22.93	46.00	23.07	QPK	100	H	289.9	PASS
4	597.450	30.01	-5.59	24.42	46.00	21.58	QPK	100	H	275.2	PASS
5	705.120	29.57	-3.54	26.03	46.00	19.97	QPK	100	H	75.7	PASS
6	760.410	29.90	-2.89	27.01	46.00	18.99	QPK	100	H	75.7	PASS

Remark:


Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin=Limit - Emission Level.

Radiated Emission Test Data (30MHz to 1GHz) Highest Channel

Environmental Conditions	24.6°C, 53.4% RH	Test Engineer	He Chen
Worst Test Mode:	GFSK	Polarity:	Vertical

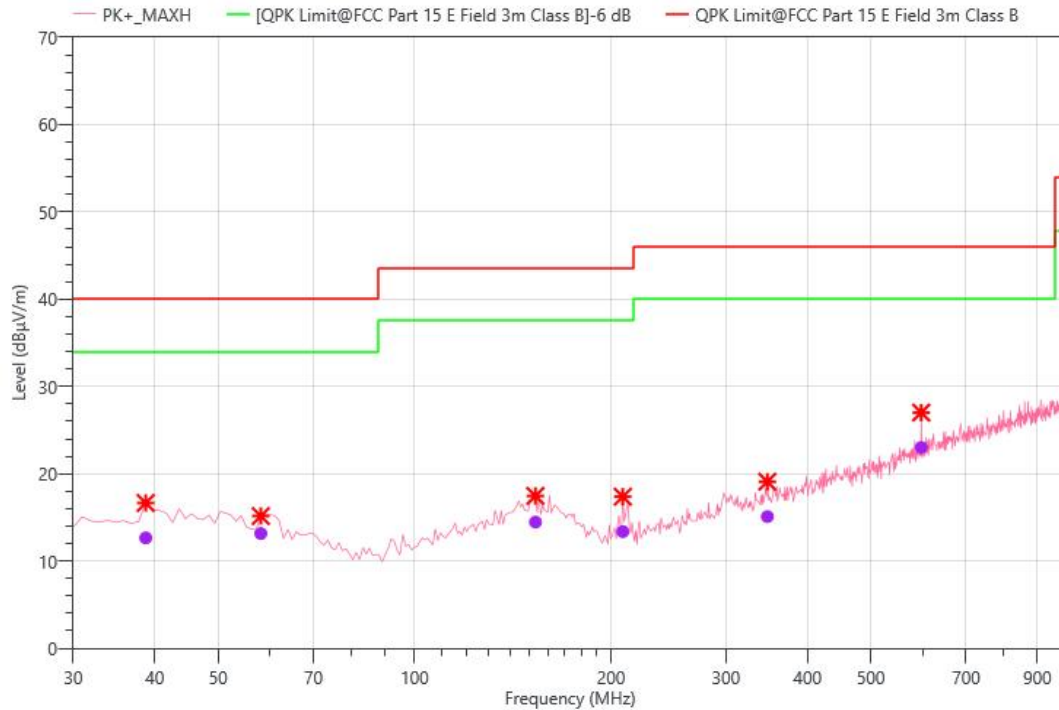

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	38.730	25.62	-12.97	12.65	40.00	27.35	QPK	100	V	358.6	PASS
2	58.130	27.00	-13.85	13.15	40.00	26.85	QPK	100	V	1.7	PASS
3	153.190	26.34	-11.88	14.46	43.50	29.04	QPK	100	V	358.6	PASS
4	208.480	28.93	-15.56	13.37	43.50	30.13	QPK	100	V	92.6	PASS
5	347.190	26.05	-10.96	15.09	46.00	30.91	QPK	100	V	280.7	PASS
6	597.450	28.60	-5.59	23.01	46.00	22.99	QPK	100	V	359.7	PASS

Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin=Limit - Emission Level.

Left earphone:

Radiated Emission Test Data (Above 1GHz)							
Environmental Conditions		24.6℃, 53.4% RH		Test Engineer		He Chen	
Lowest Channel (Worst Case: GFSK)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
1198.000	53.03	-11.72	41.31	74.00	32.69	PK+	H
1198.000	48.54	-11.72	36.82	54.00	17.18	AVG	H
2392.000	60.39	-8.68	51.71	74.00	22.29	PK+	H
2392.000	54.89	-8.68	46.21	54.00	7.79	AVG	H
3840.000	40.98	-16.98	24.00	54.00	30.00	AVG	H
4290.000	50.70	-15.64	35.06	74.00	38.94	PK+	H
4995.000	51.11	-12.68	38.43	74.00	35.57	PK+	H
5010.000	38.82	-12.65	26.17	54.00	27.83	AVG	H
7455.000	36.28	-5.9	30.38	54.00	23.62	AVG	H
7605.000	48.00	-6.14	41.86	74.00	32.14	PK+	H
14535.000	43.41	3.27	46.68	74.00	27.32	PK+	H
14835.000	32.58	3.07	35.65	54.00	18.35	AVG	H
1198.000	49.13	-11.72	37.41	54.00	16.59	AVG	V
1200.000	50.89	-11.7	39.19	74.00	34.81	PK+	V
2390.000	57.23	-8.68	48.55	74.00	25.45	PK+	V
2390.000	50.53	-8.68	41.85	54.00	12.15	AVG	V
2526.000	45.61	-8.42	37.19	54.00	16.81	AVG	V
2692.000	49.29	-8.34	40.95	74.00	33.05	PK+	V
4785.000	56.89	-14.24	42.65	74.00	31.35	PK+	V
4785.000	43.25	-14.24	29.01	54.00	24.99	AVG	V
9645.000	45.58	-3.22	42.36	74.00	31.64	PK+	V
10170.000	33.46	-2.01	31.45	54.00	22.55	AVG	V
16800.000	43.54	2.9	46.44	74.00	27.56	PK+	V
16815.000	31.74	2.98	34.72	54.00	19.28	AVG	V
Middle Channel (Worst Case: GFSK)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
1200.000	53.43	-11.7	41.73	74.00	32.27	PK+	H
1200.000	48.62	-11.7	36.92	54.00	17.08	AVG	H
1834.000	47.82	-10.6	37.22	74.00	36.78	PK+	H
1872.000	45.01	-10.46	34.55	54.00	19.45	AVG	H
2390.000	49.73	-8.68	41.05	54.00	12.95	AVG	H
2392.000	53.36	-8.68	44.68	74.00	29.32	PK+	H
4140.000	51.31	-16.27	35.04	74.00	38.96	PK+	H
4350.000	39.43	-15.55	23.88	54.00	30.12	AVG	H
6090.000	48.52	-10.97	37.55	74.00	36.45	PK+	H
6150.000	37.49	-10.51	26.98	54.00	27.02	AVG	H
14535.000	32.61	3.27	35.88	54.00	18.12	AVG	H
14940.000	43.45	2.75	46.20	74.00	27.80	PK+	H
1392.000	48.64	-11	37.64	74.00	36.36	PK+	V
1394.000	44.81	-11	33.81	54.00	20.19	AVG	V
1922.000	51.34	-10.34	41.00	74.00	33.00	PK+	V
1922.000	46.41	-10.34	36.07	54.00	17.93	AVG	V
2390.000	54.91	-8.68	46.23	74.00	27.77	PK+	V
2392.000	52.84	-8.68	44.16	54.00	9.84	AVG	V
4785.000	59.93	-14.24	45.69	74.00	28.31	PK+	V
4785.000	49.35	-14.24	35.11	54.00	18.89	AVG	V
7455.000	36.18	-5.9	30.28	54.00	23.72	AVG	V
7860.000	47.80	-5.96	41.84	74.00	32.16	PK+	V
14550.000	32.18	3.29	35.47	54.00	18.53	AVG	V
14805.000	43.06	3.03	46.09	74.00	27.91	PK+	V

Highest Channel (Worst Case: GFSK)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
1196.000	52.38	-11.74	40.64	74.00	33.36	PK+	H
1196.000	47.85	-11.74	36.11	54.00	17.89	AVG	H
2390.000	51.93	-8.68	43.25	54.00	10.75	AVG	H
2392.000	55.69	-8.68	47.01	74.00	26.99	PK+	H
2670.000	48.10	-8.32	39.78	74.00	34.22	PK+	H
2694.000	46.11	-8.35	37.76	54.00	16.24	AVG	H
4995.000	50.19	-12.68	37.51	74.00	36.49	PK+	H
6000.000	37.82	-11.22	26.60	54.00	27.40	AVG	H
10890.000	43.12	-0.05	43.07	74.00	30.93	PK+	H
10905.000	32.33	0.08	32.41	54.00	21.59	AVG	H
14520.000	32.35	3.25	35.60	54.00	18.40	AVG	H
14835.000	43.13	3.07	46.20	74.00	27.80	PK+	H
1198.000	47.17	-11.72	35.45	54.00	18.55	AVG	V
1200.000	50.43	-11.7	38.73	74.00	35.27	PK+	V
1922.000	45.80	-10.34	35.46	54.00	18.54	AVG	V
1926.000	49.12	-10.31	38.81	74.00	35.19	PK+	V
2390.000	57.26	-8.68	48.58	74.00	25.42	PK+	V
2390.000	55.22	-8.68	46.54	54.00	7.46	AVG	V
3585.000	56.00	-18.02	37.98	74.00	36.02	PK+	V
4785.000	43.73	-14.24	29.49	54.00	24.51	AVG	V
8685.000	37.89	-5.55	32.34	54.00	21.66	AVG	V
10185.000	45.02	-1.97	43.05	74.00	30.95	PK+	V
14535.000	43.18	3.27	46.45	74.00	27.55	PK+	V
14835.000	32.40	3.07	35.47	54.00	18.53	AVG	V
Remark: Emission Level = Reading + Factor; Factor = Antenna Factor + Cable Loss – Pre-amplifier; Margin=Limit - Emission Level . Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.							

Radiated Band Edges Test Data							
Environmental Conditions		24.6℃, 53.4% RH		Test Engineer		He Chen	
Lowest Channel (Worst Case: GFSK_2402MHz)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
2310	57.52	-13.61	47.29	74	-26.71	PEAK	H
2310	43.4	-13.61	38.7	54	-15.3	AVG	H
2390	59.63	-13.48	47.05	74	-26.95	PEAK	H
2390	42.65	-13.48	31.04	54	-22.96	AVG	H
2400	64.77	-13.4	48.67	74	-25.33	PEAK	H
2400	50.83	-13.4	40.87	54	-13.13	AVG	H
2310	57.1	-13.61	50.7	74	-23.3	PEAK	V
2310	45.76	-13.61	33.85	54	-20.15	AVG	V
2390	63.44	-13.48	57.6	74	-16.4	PEAK	V
2390	38.44	-13.48	26.65	54	-27.35	AVG	V
2400	60.22	-13.4	47.35	74	-26.65	PEAK	V
2400	44.91	-13.4	22.11	54	-31.89	AVG	V
Highest Channel (Worst Case: GFSK_2480MHz)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
2483.5	68.6	-13.36	46.15	74	-27.85	PEAK	H
2483.5	46.74	-13.36	37.23	54	-16.77	AVG	H
2500	59.31	-12.45	44.52	74	-29.48	PEAK	H
2500	42.82	-12.45	36.4	54	-17.6	AVG	H
2483.5	63.47	-13.36	46.8	74	-27.2	PEAK	V
2483.5	50.29	-13.36	30.74	54	-23.26	AVG	V
2500	59.18	-12.45	40.81	74	-33.19	PEAK	V
2500	41.31	-12.45	21.98	54	-32.02	AVG	V
Remark: Emission Level = Reading + Factor; Factor = Antenna Factor + Cable Loss – Pre-amplifier; Margin= Emission Level - Limit.							

Right earphone:

Radiated Emission Test Data (Above 1GHz)							
Environmental Conditions		24.6℃, 53.4% RH		Test Engineer		He Chen	
Lowest Channel (Worst Case: GFSK)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
1420.000	41.14	-11.04	30.10	54.00	23.90	AVG	H
1524.000	44.95	-11.34	33.61	74.00	40.39	PK+	H
2046.000	44.77	-9.62	35.15	74.00	38.85	PK+	H
2102.000	41.15	-9.08	32.07	54.00	21.93	AVG	H
2508.000	41.85	-8.41	33.44	54.00	20.56	AVG	H
2652.000	46.75	-8.3	38.45	74.00	35.55	PK+	H
3105.000	50.43	-18.79	31.64	74.00	42.36	PK+	H
3105.000	41.30	-18.79	22.51	54.00	31.49	AVG	H
6570.000	47.20	-9	38.20	74.00	35.80	PK+	H
6600.000	37.10	-9	28.10	54.00	25.90	AVG	H
14835.000	40.92	3.07	43.99	74.00	30.01	PK+	H
14955.000	31.50	2.57	34.07	54.00	19.93	AVG	H
1282.000	40.86	-11.25	29.61	54.00	24.39	AVG	V
1346.000	44.99	-11.03	33.96	74.00	40.04	PK+	V
1816.000	46.69	-10.7	35.99	74.00	38.01	PK+	V
1828.000	41.31	-10.64	30.67	54.00	23.33	AVG	V
2674.000	41.54	-8.32	33.22	54.00	20.78	AVG	V
2734.000	45.33	-8.36	36.97	74.00	37.03	PK+	V
5070.000	47.78	-12.54	35.24	74.00	38.76	PK+	V
5085.000	37.61	-12.43	25.18	54.00	28.82	AVG	V
7920.000	34.67	-5.72	28.95	54.00	25.05	AVG	V
8820.000	42.96	-5.58	37.38	74.00	36.62	PK+	V
14520.000	42.28	3.25	45.53	74.00	28.47	PK+	V
14835.000	31.60	3.07	34.67	54.00	19.33	AVG	V
Middle Channel (Worst Case: GFSK)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
1628.000	45.48	-11.22	34.26	74.00	39.74	PK+	H
1628.000	43.09	-11.22	31.87	54.00	22.13	AVG	H
2048.000	41.40	-9.62	31.78	54.00	22.22	AVG	H
2078.000	44.97	-9.32	35.65	74.00	38.35	PK+	H
2708.000	46.05	-8.36	37.69	74.00	36.31	PK+	H
2912.000	42.79	-8.07	34.72	54.00	19.28	AVG	H
4245.000	39.21	-15.84	23.37	54.00	30.63	AVG	H
4305.000	49.07	-15.59	33.48	74.00	40.52	PK+	H
6585.000	47.30	-9	38.30	74.00	35.70	PK+	H
6930.000	37.31	-8.35	28.96	54.00	25.04	AVG	H
14535.000	41.57	3.27	44.84	74.00	29.16	PK+	H
14535.000	31.60	3.27	34.87	54.00	19.13	AVG	H
1404.000	41.28	-11.01	30.27	54.00	23.73	AVG	V
1422.000	44.70	-11.04	33.66	74.00	40.34	PK+	V
2210.000	44.73	-8.38	36.35	74.00	37.65	PK+	V
2220.000	41.15	-8.36	32.79	54.00	21.21	AVG	V
2704.000	47.11	-8.36	38.75	74.00	35.25	PK+	V
2934.000	42.22	-8.19	34.03	54.00	19.97	AVG	V
4545.000	48.73	-14.73	34.00	74.00	40.00	PK+	V
4605.000	38.31	-14.38	23.93	54.00	30.07	AVG	V
6975.000	46.79	-8.22	38.57	74.00	35.43	PK+	V
6975.000	36.71	-8.22	28.49	54.00	25.51	AVG	V
14475.000	41.57	3.13	44.70	74.00	29.30	PK+	V
14850.000	31.84	3.09	34.93	54.00	19.07	AVG	V

Highest Channel (Worst Case: GFSK)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
1396.000	41.60	-11	30.60	54.00	23.40	AVG	H
1414.000	45.37	-11.03	34.34	74.00	39.66	PK+	H
2134.000	46.03	-8.88	37.15	74.00	36.85	PK+	H
2154.000	41.49	-8.75	32.74	54.00	21.26	AVG	H
2794.000	42.95	-8.34	34.61	54.00	19.39	AVG	H
2846.000	45.61	-8.03	37.58	74.00	36.42	PK+	H
4125.000	49.71	-16.39	33.32	74.00	40.68	PK+	H
4410.000	38.93	-15.19	23.74	54.00	30.26	AVG	H
5655.000	37.21	-11.52	25.69	54.00	28.31	AVG	H
5670.000	47.37	-11.64	35.73	74.00	38.27	PK+	H
14505.000	41.38	3.24	44.62	74.00	29.38	PK+	H
14505.000	31.56	3.24	34.80	54.00	19.20	AVG	H
1390.000	42.40	-11	31.40	54.00	22.60	AVG	V
1428.000	46.08	-11.06	35.02	74.00	38.98	PK+	V
2026.000	42.02	-9.65	32.37	54.00	21.63	AVG	V
2028.000	45.88	-9.65	36.23	74.00	37.77	PK+	V
2822.000	46.76	-8.16	38.60	74.00	35.40	PK+	V
2878.000	43.49	-8.01	35.48	54.00	18.52	AVG	V
4020.000	49.02	-16.68	32.34	74.00	41.66	PK+	V
4260.000	38.94	-15.78	23.16	54.00	30.84	AVG	V
7440.000	44.74	-5.96	38.78	74.00	35.22	PK+	V
7455.000	34.94	-5.9	29.04	54.00	24.96	AVG	V
14505.000	41.90	3.24	45.14	74.00	28.86	PK+	V
14505.000	31.28	3.24	34.52	54.00	19.48	AVG	V

Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin=Limit - Emission Level .

Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.

Radiated Band Edges Test Data							
Environmental Conditions		24.6℃, 53.4% RH		Test Engineer		He Chen	
Lowest Channel (Worst Case: GFSK_2402MHz)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
2310	57.52	-13.61	47.66	74	-26.34	PEAK	H
2310	43.4	-13.61	39.77	54	-14.23	AVG	H
2390	59.63	-13.48	50.87	74	-23.13	PEAK	H
2390	42.65	-13.48	31.27	54	-22.73	AVG	H
2400	64.77	-13.4	50.88	74	-23.12	PEAK	H
2400	50.83	-13.4	34.35	54	-19.65	AVG	H
2310	57.1	-13.61	43	74	-31	PEAK	V
2310	45.76	-13.61	34.65	54	-19.35	AVG	V
2390	63.44	-13.48	52.24	74	-21.76	PEAK	V
2390	38.44	-13.48	27.28	54	-26.72	AVG	V
2400	60.22	-13.4	47.04	74	-26.96	PEAK	V
2400	44.91	-13.4	26.41	54	-27.59	AVG	V
Highest Channel (Worst Case: GFSK_2480MHz)							
Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (PEAK/AVG)	Polar (H/V)
2483.5	68.6	-13.36	43.68	74	-30.32	PEAK	H
2483.5	46.74	-13.36	30.9	54	-23.1	AVG	H
2500	59.31	-12.45	45.2	74	-28.8	PEAK	H
2500	42.82	-12.45	41.37	54	-12.63	AVG	H
2483.5	63.47	-13.36	53.83	74	-20.17	PEAK	V
2483.5	50.29	-13.36	36.6	54	-17.4	AVG	V
2500	59.18	-12.45	38.6	74	-35.4	PEAK	V
2500	41.31	-12.45	20.79	54	-33.21	AVG	V
Remark:							
Emission Level = Reading + Factor;							
Factor = Antenna Factor + Cable Loss – Pre-amplifier;							
Margin= Emission Level - Limit.							

13. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

14. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

15. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

*****THE END*****