

Inverted F Antenna Specification

MANUFACTURE: Guangzhou Xinzhong Technology Co., LTD

Address: Room 302, No. 29 Tangli Road, Jianggao Town Baiyun District

PRODUCT NAME : Nternal Antenna

DATE : 2019-10-30


1. Antenna describe

Antenna plate: Inverted F Antenna


Frequency range: 2.4GHz-2.48GHz

ITEM Name	Inverted F Antenna Specification
Model Name	2.4GHz Antenna
Polarization	Horizontal and Vertical
Azimuth Beam Patten	Omni-directional
Impedance	50 Ohm
Antenna Lengh	14.4mm
Gain(Max)	2.0(± 1 dBi)

2. Antenna Photo& Lengh (mm)

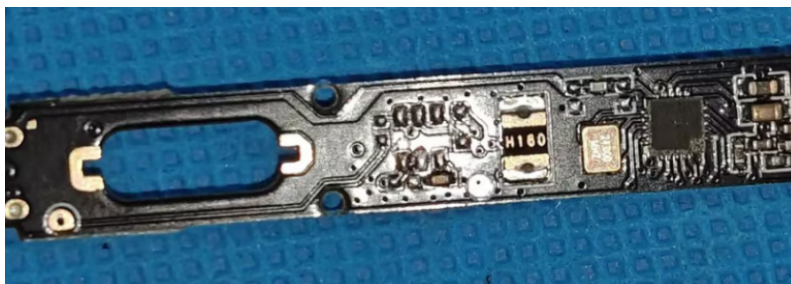

Antenna size

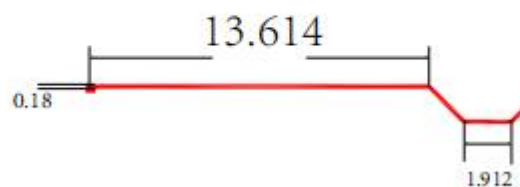

3. Gain


Frequency	Gain (dBi)
2400MHz	1.41
2410MHz	1.34
2420MHz	1.20
2430MHz	1.03
2440MHz	1.01
2450MHz	1.26
2460MHz	1.50
2470MHz	1.49
2480MHz	1.42
2490MHz	0.36
2500MHz	0.33

4. Return Loss/VSWR/Input Impedance

Frequency	Return Loss (dB)	VSWR	Input Impedance(Ω)
2400MHz	-7.23	2.53	25.37
2400MHz	-6.47	2.80	17.99
2450MHz	-6.22	2.90	17.18
2480MHz	-5.18	3.44	15.55
2500MHz	-4.56	3.89	15.48

Annex A Photographs


1. Test Setup

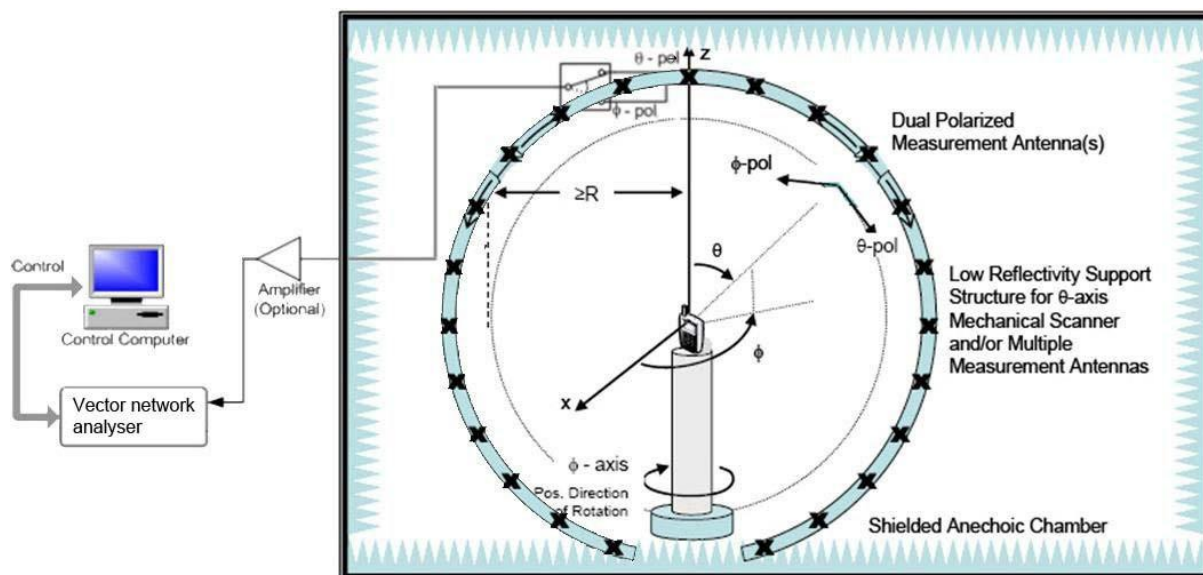


Annex B Figures

1. 2D Radiation Pattern


$\Phi=0^\circ$

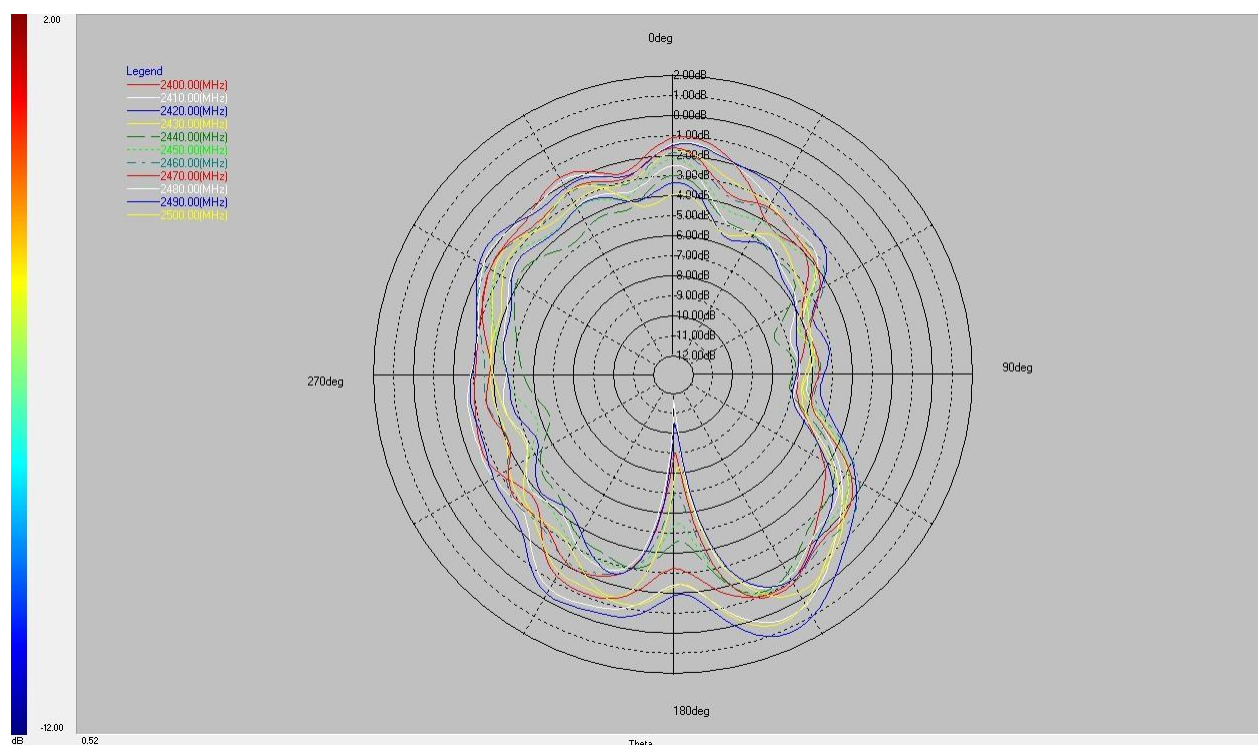


Phi=90°

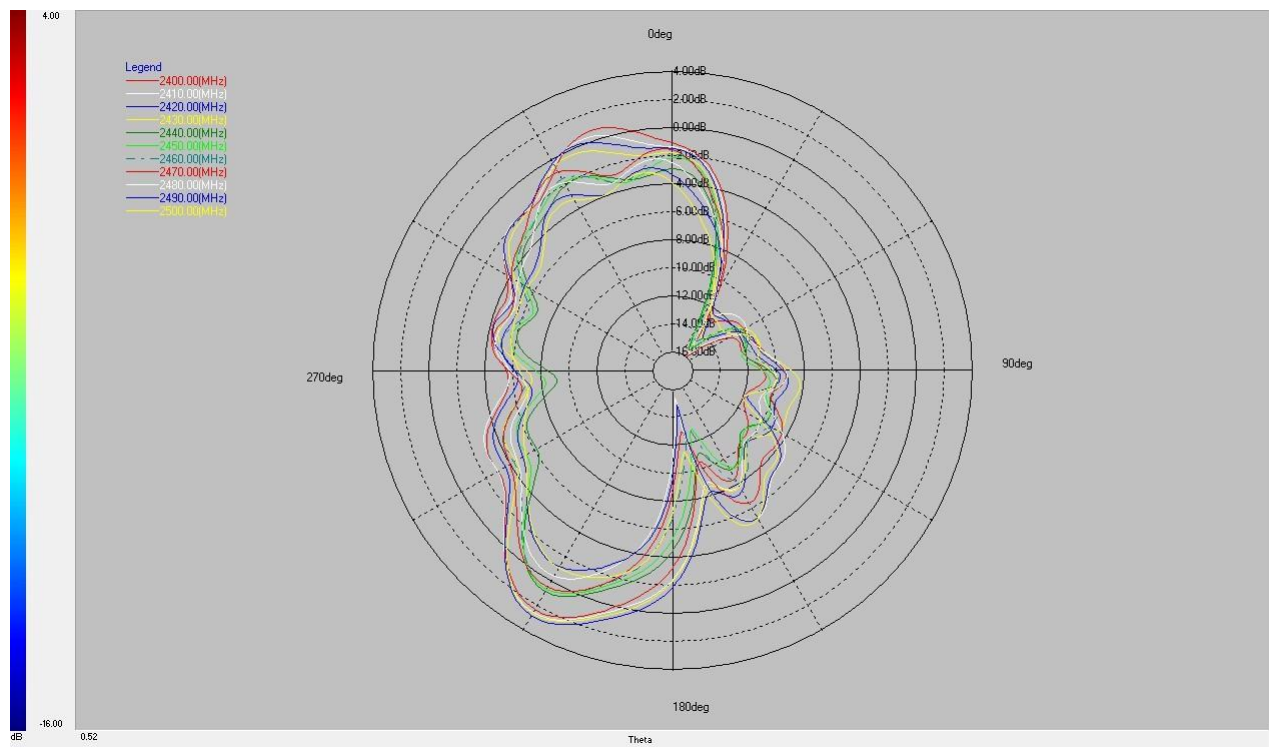


Theta=90°

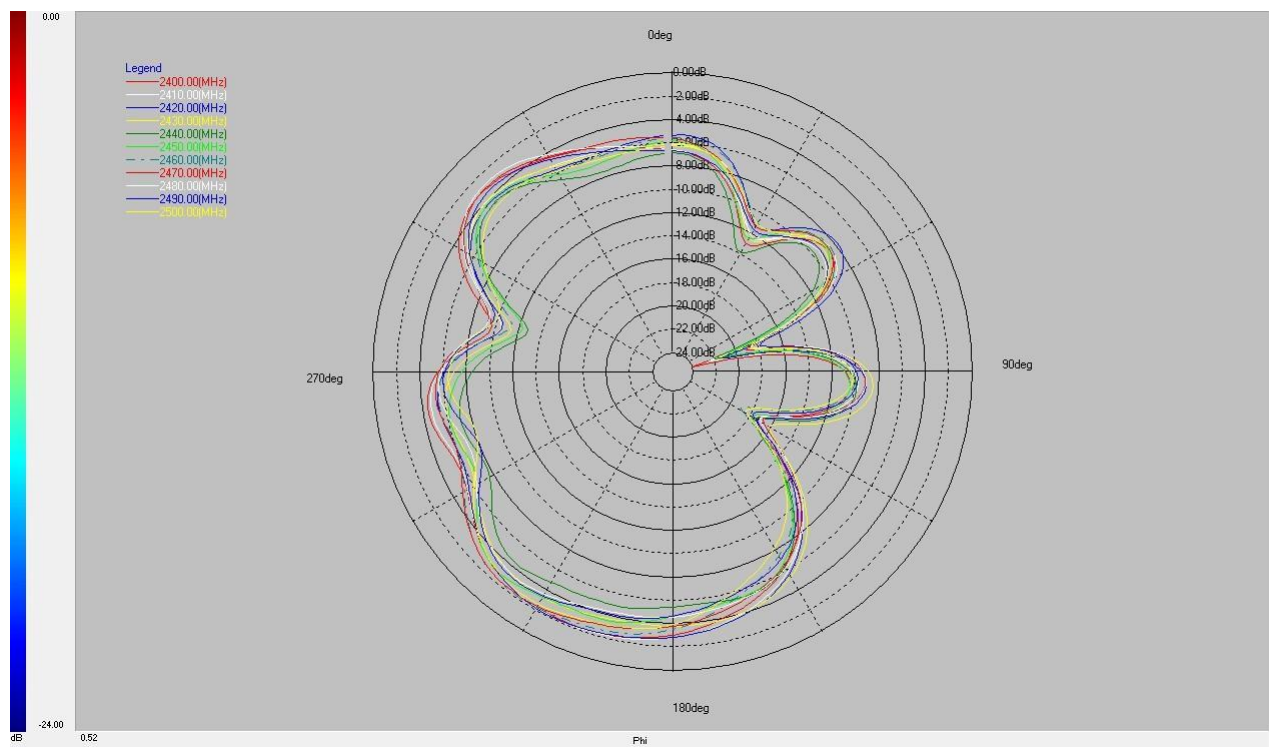


2. 3D Radiation Pattern

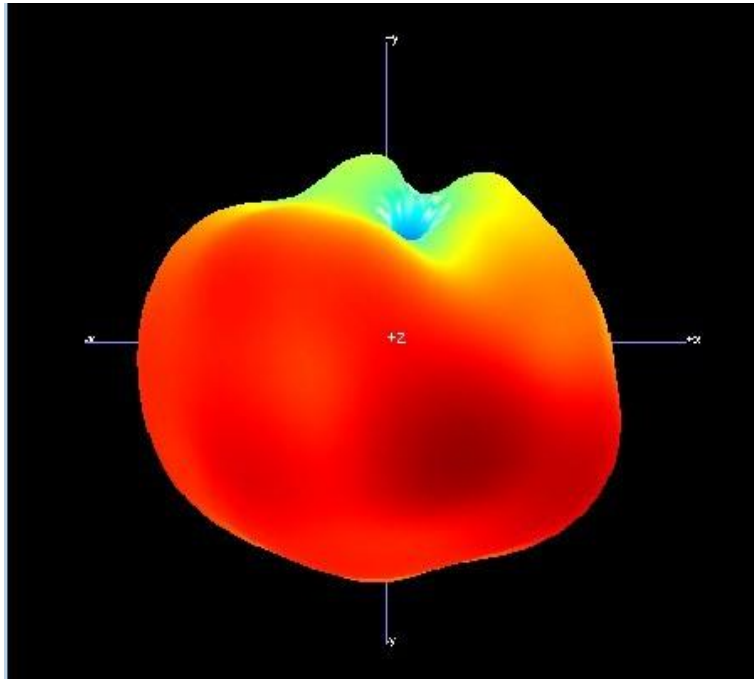

2400MHz

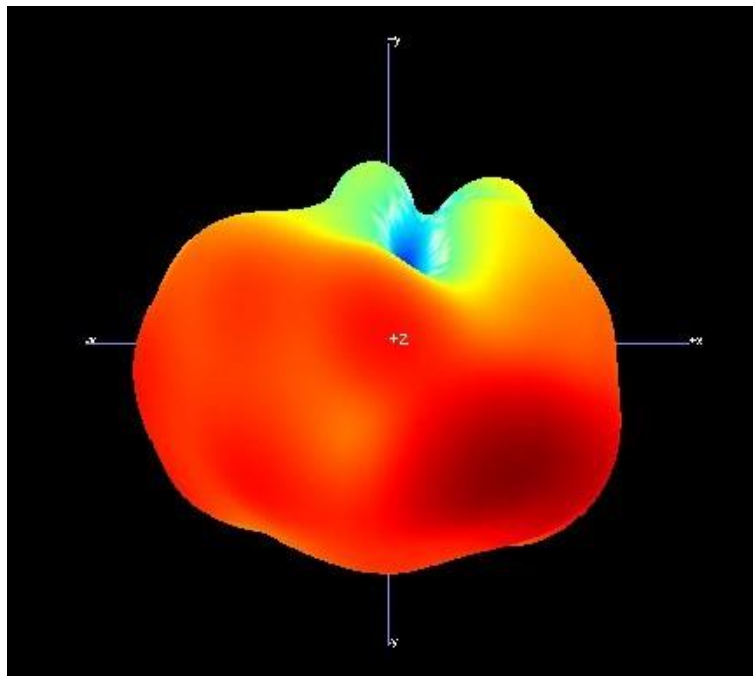

2450MHz

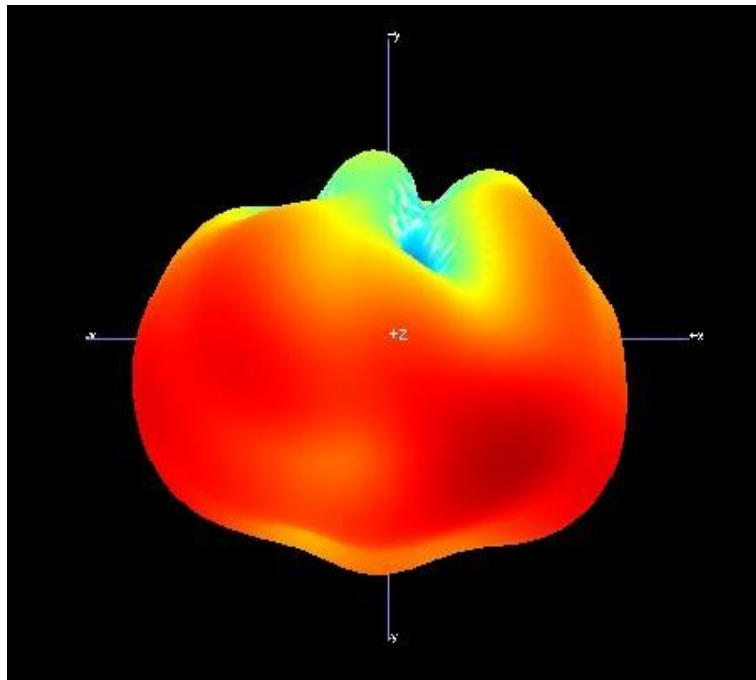


2500MH

3. Return Loss



4. VSWR

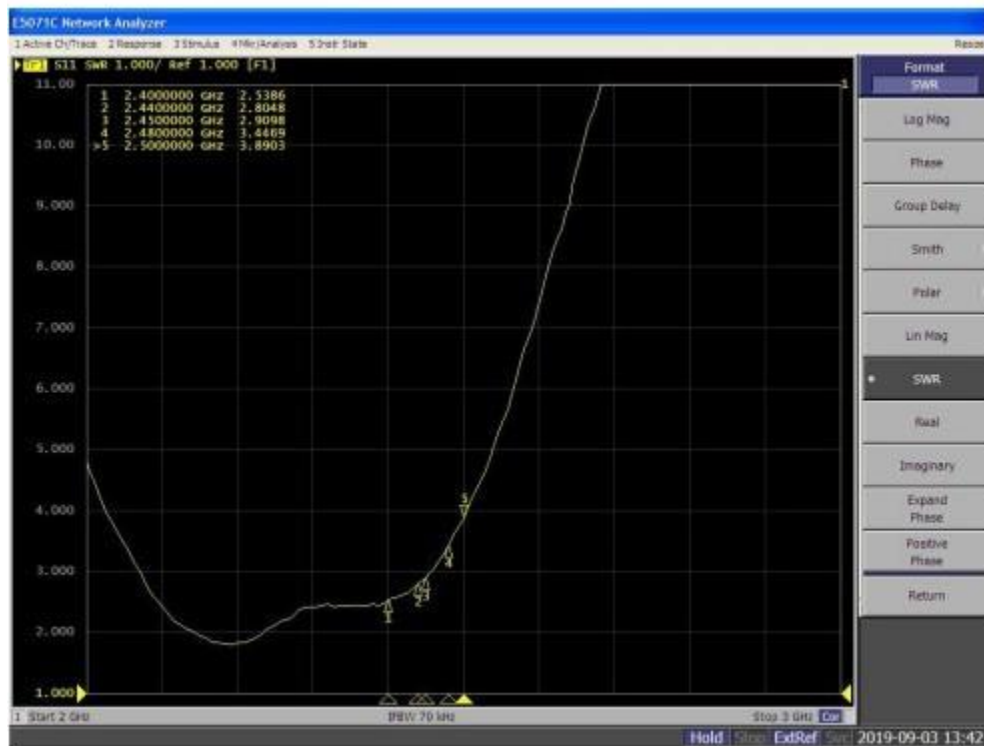

END