


Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

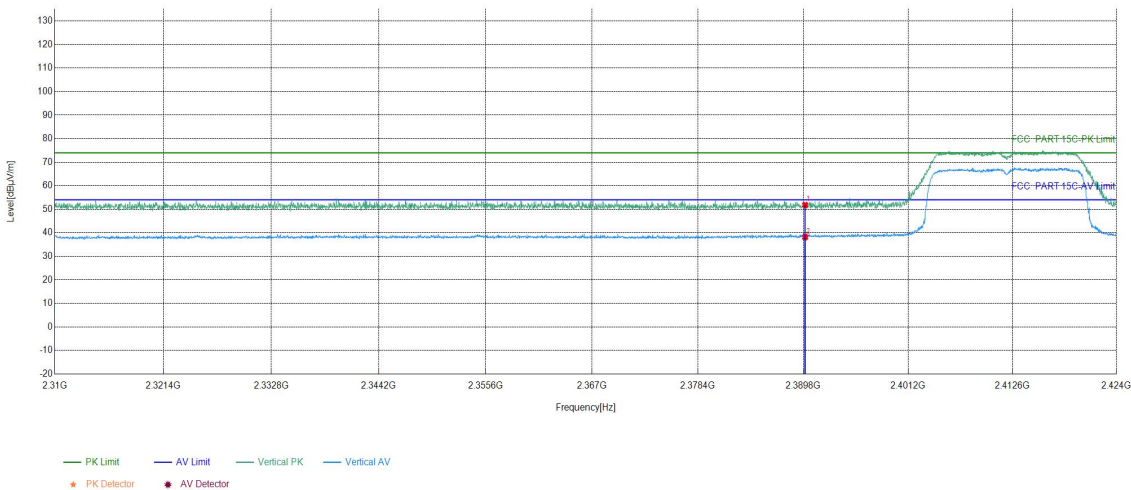

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.82	51.78	74.00	22.22	PASS	Vertical	PK
2	2390	15.96	22.22	38.18	54.00	15.82	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

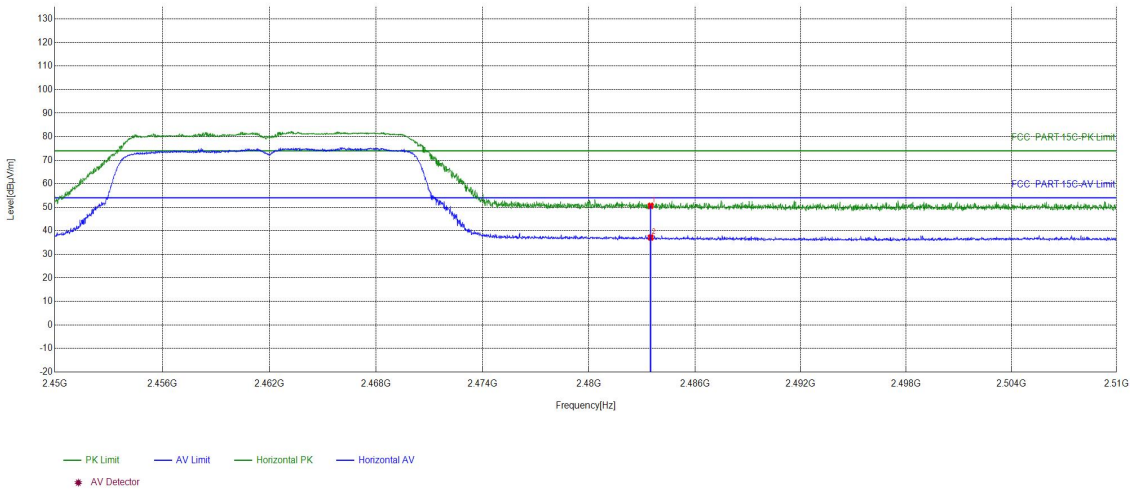

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.32	50.61	74.00	23.39	PASS	Horizontal	PK
2	2483.5	16.29	20.84	37.13	54.00	16.87	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

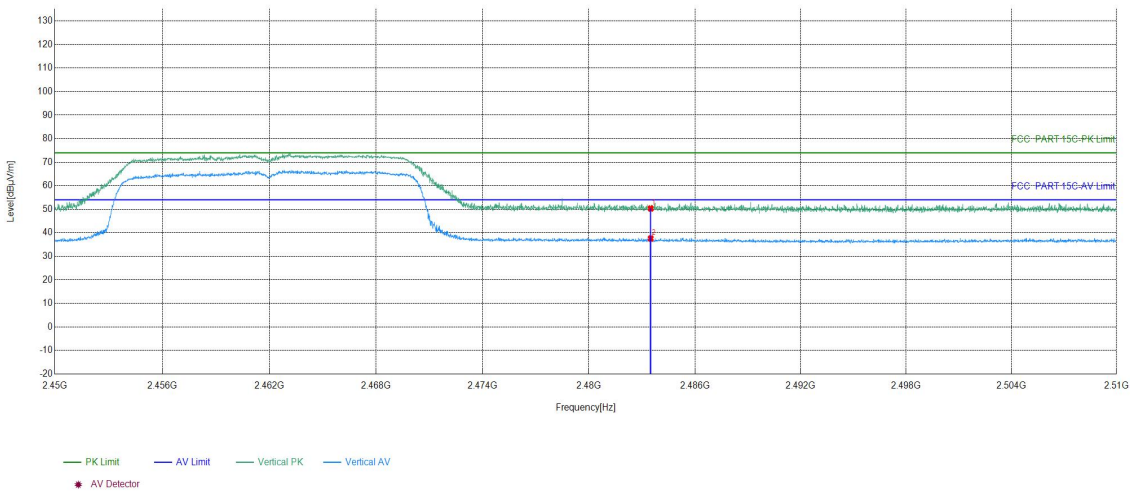

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.03	50.32	74.00	23.68	PASS	Vertical	PK
2	2483.5	16.29	21.27	37.56	54.00	16.44	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

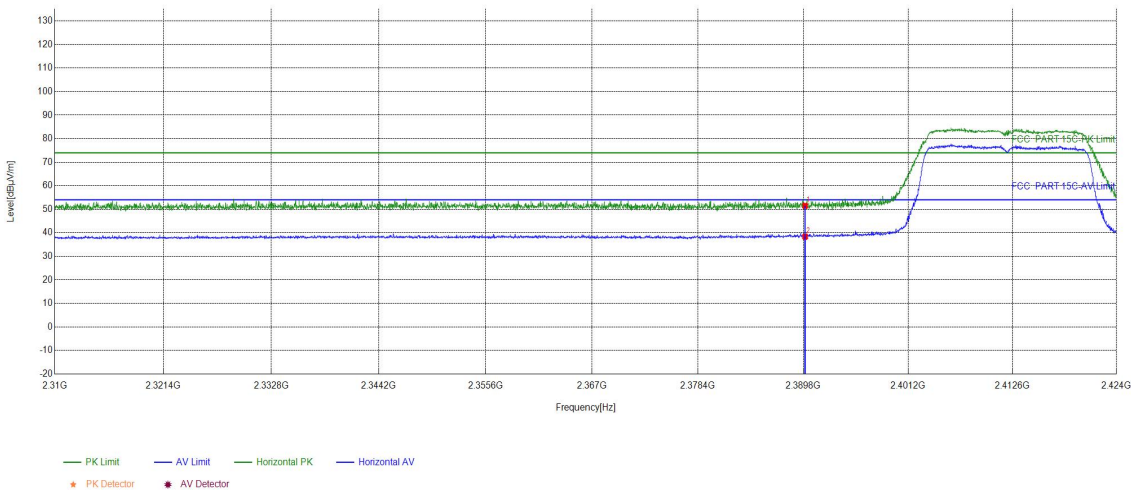

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.49	51.45	74.00	22.55	PASS	Horizontal	PK
2	2390	15.96	22.39	38.35	54.00	15.65	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

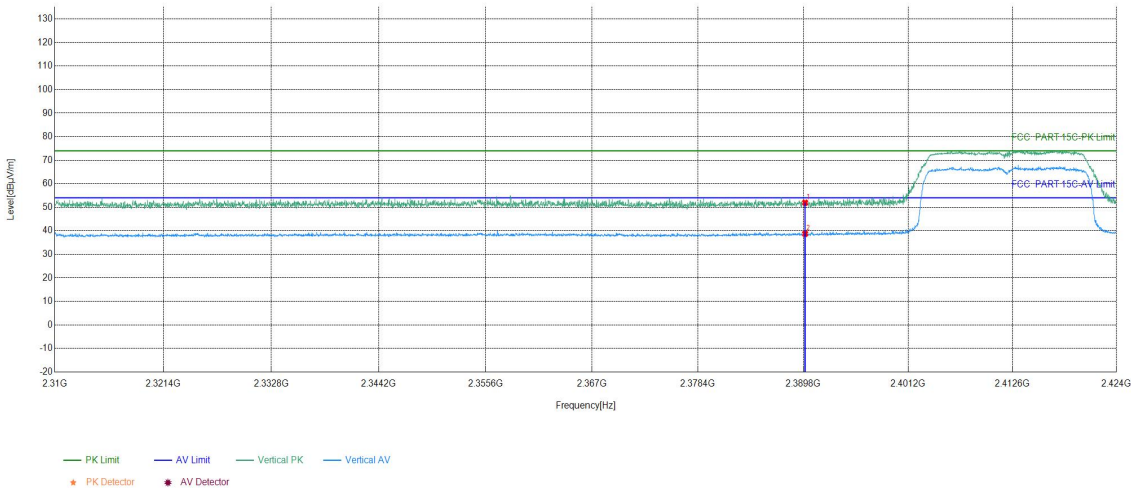

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.96	51.92	74.00	22.08	PASS	Vertical	PK
2	2390	15.96	22.77	38.73	54.00	15.27	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

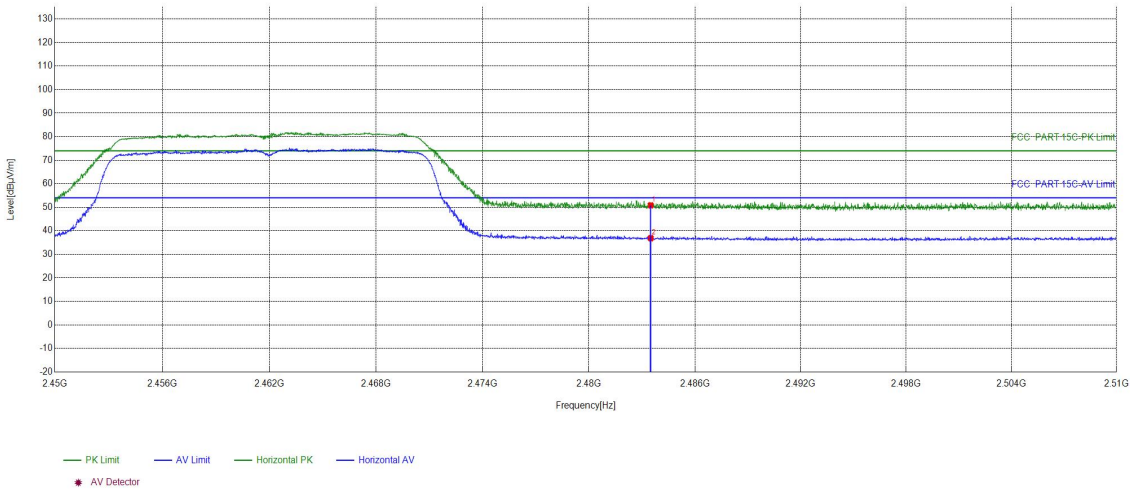

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.52	50.81	74.00	23.19	PASS	Horizontal	PK
2	2483.5	16.29	20.55	36.84	54.00	17.16	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

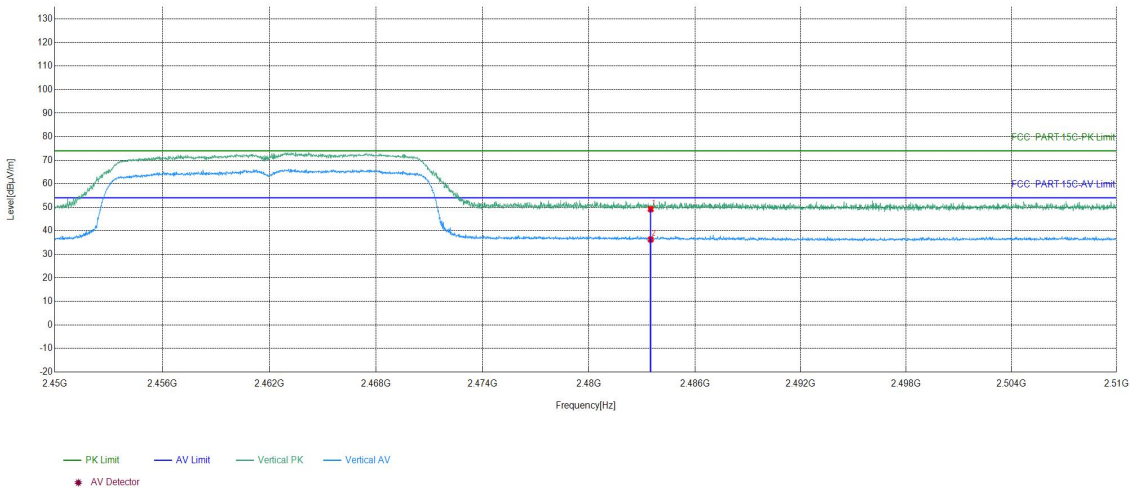

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.90	49.19	74.00	24.81	PASS	Vertical	PK
2	2483.5	16.29	20.01	36.30	54.00	17.70	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

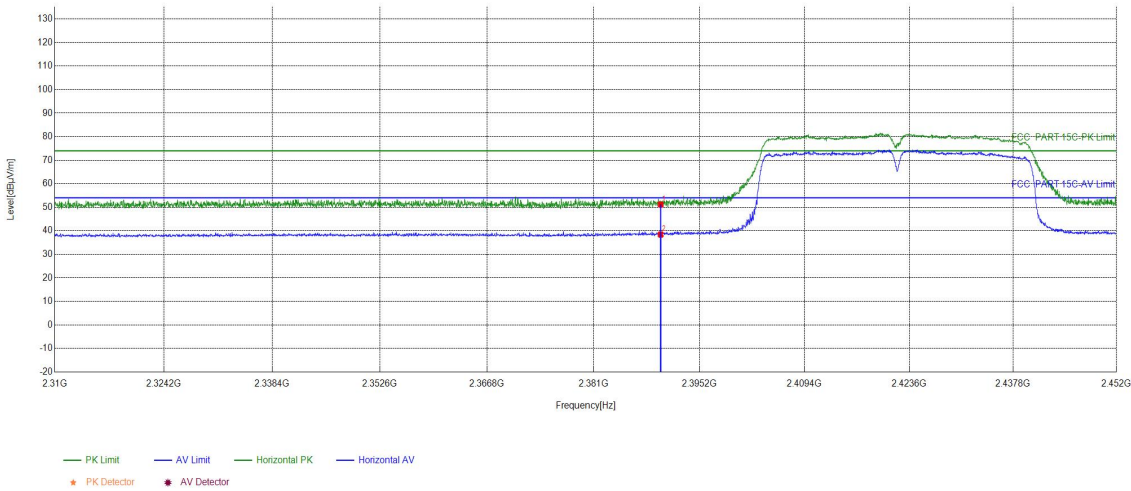

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.20	51.16	74.00	22.84	PASS	Horizontal	PK
2	2390	15.96	22.45	38.41	54.00	15.59	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

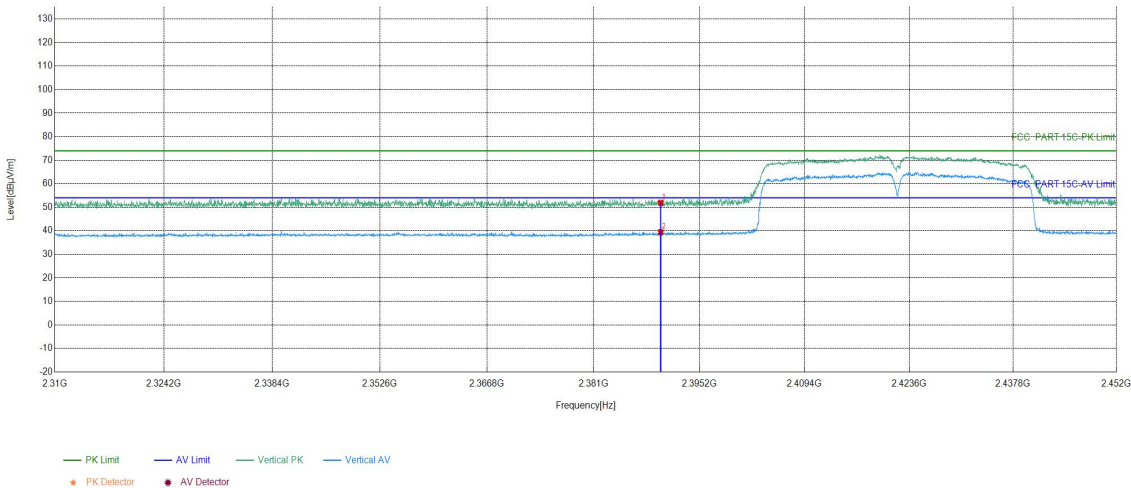

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.93	51.89	74.00	22.11	PASS	Vertical	PK
2	2390	15.96	23.43	39.39	54.00	14.61	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/30


Test Graph

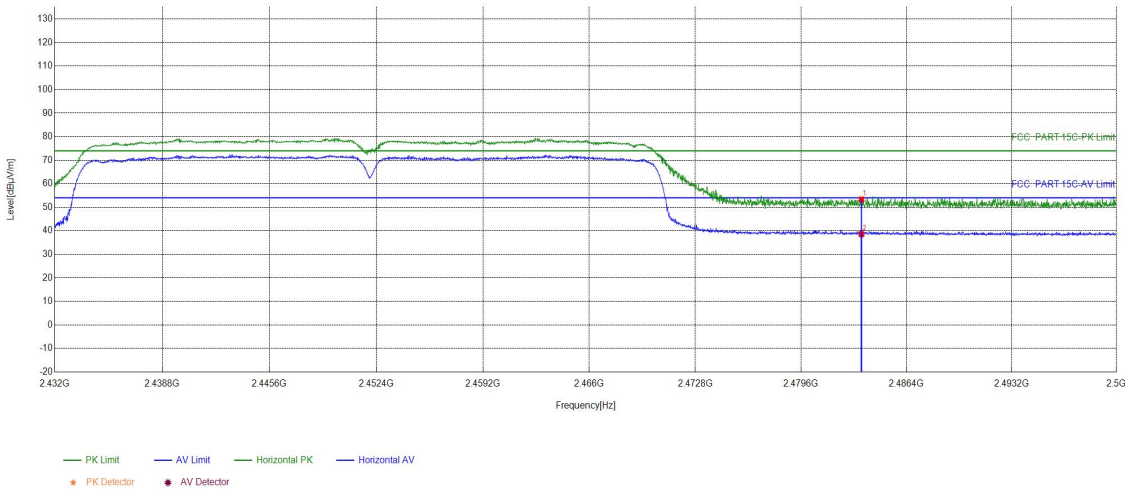

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.97	53.26	74.00	20.74	PASS	Horizontal	PK
2	2483.5	16.29	22.30	38.59	54.00	15.41	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/30

Test Graph

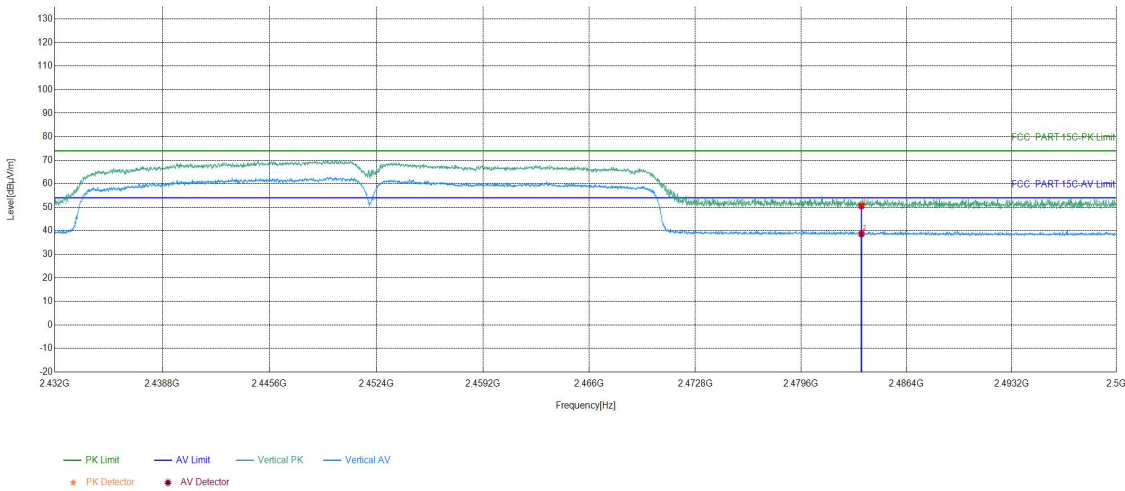

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.26	50.55	74.00	23.45	PASS	Vertical	PK
2	2483.5	16.29	22.40	38.69	54.00	15.31	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S817030

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S817029 .

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***