



FCC Test Report

Application No.: DNT2607134942R09944-14970

Applicant: Yongkang Chuangchen Industry and Trade Co., Ltd

Address of Applicant: No. 8, Xingguang Road, Fangyan Town Industrial Zone, Yongkang City,
Jinhua City, Zhejiang Province

EUT Description: Smart Automatic Feeder

Model No.: WSQ-402W

Addition Model(s): WSQ-402B, WSQ-403W, WSQ-403B, WSQ-405W, WSQ-405B, WSQ-
406W, WSQ-406B, WSQ-703W, WSQ-703B, WSQ-704W, WSQ-704B, WSQ-
706W, WSQ-706B

FCC ID: 2BG2F-WSQ-402W

Power Supply: Input: DC 5V; DC 1.5V*4 from AA batteries

Trade Mark: /

Standards: 47 CFR Part 2, Subpart J
47 CFR Part 15, Subpart C
ANSI C63.10: 2020

Date of Receipt: 2026/07/13

Date of Test: 2026/07/14 to 2026/09/08

Date of Issue: 2026/09/08

Test Result: **PASS**

Prepared By: Galek. Lin (Testing Engineer)

Reviewed By: Wayne. Lin (Project Engineer)

Approved By: Yenise Shan (Manager)



Note: If there is any objection to the results in this report, please submit a written inquiry to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp, and is issued by the company in accordance with the requirements of the "Conditions of Issuance of Test Reports" printed in the attached page. Unless otherwise stated, the results presented in this report only apply to the samples tested this time. Partial reproduction of this report is not allowed unless approved by the company in writing.

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	September 8, 2026	Valid	Original Report



1 Test Summary

Test Item	Test Requirement	Test Method	Test Result	Result
Antenna Requirement	15.203/247(b)	--	Clause 3.1	PASS
Duty Cycle	--	--	Clause 3.2	PASS
DTS (6 dB) Bandwidth	15.247 (a)(2)	ANSI C63.10: 2020	Clause 3.3	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10: 2020	Clause 3.4	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10: 2020	Clause 3.5	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10: 2020	Clause 3.6	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10: 2020	Clause 3.7	PASS
Radiated Spurious Emissions	15.247(d);15.205/15.209	ANSI C63.10: 2020	Clause 3.8	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d);15.205/15.209	ANSI C63.10: 2020	Clause 3.9	PASS
AC Power Line Conducted Emission	15.207	ANSI C63.10: 2020	Clause 3.10	PASS

Note:

1. "N/A" denotes test is not applicable in this test report.



Contents

1 Test Summary	3
2 General Information	5
2.1 Test Location	5
2.2 General Description of EUT	6
2.3 Channel List	7
2.4 Test Environment and Mode	7
2.5 Power Setting of Test Software	7
2.6 Description of Support Units	7
2.7 Test Facility	8
2.8 Measurement Uncertainty (95% confidence levels, k=2)	8
2.9 Equipment List	9
2.10 Assistant equipment used for test	10
3 Test results and Measurement Data	11
3.1 Antenna Requirement	11
3.2 Duty Cycle	12
3.3 DTS (6 dB) Bandwidth	13
3.4 Maximum conducted (average) output power	14
3.5 Power Spectral Density	15
3.6 Band-edge for RF Conducted Emissions	16
3.7 RF Conducted Spurious Emissions	17
3.8 Radiated Spurious Emissions	18
3.9 Restricted bands around fundamental frequency	26
3.10 AC Power Line Conducted Emissions	30
4 Appendix	33
Appendix A: Duty Cycle	33
Appendix B: DTS Bandwidth	37
Appendix C: Maximum conducted (average) output power	41
Appendix D: Maximum power spectral density	42
Appendix E: Band edge measurements	46
Appendix F: Conducted Spurious Emission	49



2 General Information

2.1 Test Location

Company:	Guangdong DN Testing Co., Ltd
Address:	No. 1, West Fourth Street, South Xinfu Road, Wusha Liwu, Chang ' an Town, Dongguan City, Guangdong P.R.China
Test engineer:	Gali Lin



2.2 General Description of EUT

Manufacturer:	Yongkang Chuangchen Industry and Trade Co., Ltd
Address of Manufacturer:	No. 8, Xingguang Road, Fangyan Town Industrial Zone, Yongkang City, Jinhua City, Zhejiang Province
Factory:	Yongkang Chuangchen Industry and Trade Co., Ltd
Address of Factory:	No. 8, Xingguang Road, Fangyan Town Industrial Zone, Yongkang City, Jinhua City, Zhejiang Province
EUT Description:	Smart Automatic Feeder
Model No.(EUT):	WSQ-402W
Addition Model(s):	WSQ-402B,WSQ-403W,WSQ-403B,WSQ-405W,WSQ-405B,WSQ-406W,WSQ-406B,WSQ-703W,WSQ-703B,WSQ-704W,WSQ-704B,WSQ-706W,WSQ-706B
Power Supply:	Input:DC 5V;DC 1.5V*4 from AA batteries
Trade Mark:	/
Hardware Version:	V1.0
Software Version:	V1.0
Serial number:	PR2607134942R09944
Chip Type:	W701
IEEE 802.11 WLAN Mode Supported	☒ 802.11b (20 MHz channel bandwidth) ☒ 802.11g (20 MHz channel bandwidth) ☒ 802.11n HT(20 MHz channel bandwidth)
Operation Frequency:	BW(20MHz): 2412-2462MHz
Type of Modulation:	IEEE for 802.11b: DSSS IEEE for 802.11g : OFDM IEEE for 802.11n(HT20) : OFDM
Sample Type:	☐ Portable Device, ☐ Module, ☒ Mobile Device
Antenna Type:	☐ External, ☒ Integrated
Antenna Ports	☒ Ant 1, ☐ Ant 2, ☐ Ant 3
Smart System	☒ SISO (for 802.11b/g/n), ☐ MIMO (for 802.11 b/g/n): 2 Tx & 2 Rx, ☐ Diversity (for 802.11b/g) : Tx & Rx
Antenna Gain*:	☒ Provided by applicant 2.54dBi
Directional Gain	/
RF Cable*:	☒ Provided by applicant 0.5dB(0.6~1GHz); 0.8dB(1.4~2GHz); 1.0dB(2.1~2.7GHz); 1.5dB(3~4GHz); 1.8dB(4.4~6GHz);
Note:	*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, DNT is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. *All models are just color and name differences, motherboard, PCB circuit board, chip, electronic components is all the same.



2.3 Channel List

Operation Frequency of each channel (802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
5	2432MHz	8	2447MHz				

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency for 802.11 b/g/n (HT20))
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

2.4 Test Environment and Mode

Operating Environment:	
Temperature:	20~25.0 °C
Humidity:	45~56 % RH
Atmospheric Pressure:	101.0~101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

2.5 Power Setting of Test Software

Software Name	UI_mptool		
Frequency(MHz)	2412	2437	2462
Setting	84	84	84

2.6 Description of Support Units

The EUT has been tested independent unit.



2.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• **FCC, USA**

Designation Number: CN1348

• **A2LA (Certificate No. 7050.01)**

GUANGDONG DN TESTING CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 7050.01.

• **Innovation, Science and Economic Development Canada**

GUANGDONG DN TESTING CO., LTD. EMC Laboratory has been recognized by ISED as an accredited testing laboratory. CAB identifier is CN0149.

IC#: 30755.

2.8 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	DTS Bandwidth	$\pm 0.0196\%$
2	Maximum Conducted Output Power	± 0.686 dB
3	Maximum Power Spectral Density Level	± 0.743 dB
4	Band-edge Compliance	± 1.328 dB
5	Unwanted Emissions In Non-restricted Freq Bands	9KHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.0 dB (150kHz to 30MHz)
2	Radiated Emission	± 4.8 dB (Below 1GHz)
		± 4.8 dB (1GHz to 6GHz)
		± 4.5 dB (6GHz to 18GHz)
		± 5.02 dB (Above 18GHz)



2.9 Equipment List

For Connect EUT Antenna Terminal Test					
Description	Manufacturer	Model	Serial Number	Cal date	Due date
Signal Generator	Keysight	N5181A-6G	MY48180415	2025-10-21	2026-10-20
Signal Generator	Keysight	N5182B	MY57300617	2025-10-21	2026-10-20
Power supply	Keysight	E3640A	ZB2022656	2025-10-21	2026-10-20
Radio Communication Tester	R&S	CMW500	105082	2025-10-21	2026-10-20
Spectrum Analyzer	Aglient	N9010A	MY52220200	2025-10-21	2026-10-20
BT/WIFI Test Software	Tonscend	JS1120 V3.1.83	NA	NA	NA
RF Control Unit	Tonscend	JS0806-2	22F8060581	NA	NA
Power Sensor	Anritsu	ML2495A	2129005	2025-10-21	2026-10-20
Pulse Power Sensor	Anritsu	MA2411B	1911397	2025-10-21	2026-10-20
temperature and humidity box	SCOTEK	SCD-C40-80PRO	6866682020008	2025-10-21	2026-10-20
RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	NA	2025-10-21	2026-10-20

Test Equipment for Conducted Emission					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESCI3	101152	2025-10-21	2026-10-20
LISN	R&S	ENV216	102874	2025-10-21	2026-10-20
ISN	R&S	ENY81-CA6	1309.8590.03	2025-10-21	2026-10-20
RF Cable	ETS-LINDGREN	Cable-CE TS01	/	2025-10-21	2026-10-20

Test Equipment for Radiated Emission(30MHz-1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESR7	102497	2025-10-21	2026-10-20
Test Software	Tonscend	JS32-RE	NA	NA	NA
RF Cable	ETS-LINDGREN	RE Cable-TS01	NA	2025-10-21	2026-10-20



Log periodic antenna	ETS-LINDGREN	VULB 9168	01475	2025-10-21	2026-10-20
Pre-amplifier	Schwarzbeck	BBV9743B	00423	2025-10-21	2026-10-20
Attenuator 1	Shanghai Huaxiang	TS2-6-18-A	22061803	2025-10-21	2026-10-20
Attenuator 2	Shanghai Huaxiang	TS2-6-6-A	230927163	2025-10-21	2026-10-20

Test Equipment for Radiated Emission(Above 1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Frequency analyser	Keysight	N9010A	MY52221458	2025-10-21	2026-10-20
RF Cable	ETS-LINDGREN	RE Cable-TS02	NA	2025-10-21	2026-10-20
Horn Antenna	ETS-LINDGREN	3117	00252567	2025-10-21	2026-10-20
Double ridged waveguide antenna	ETS-LINDGREN	3116C	00251780	2025-10-21	2026-10-20
Test Software	Tonscend	JS32-RE	NA	NA	NA
Pre-amplifier	ETS-LINDGREN	3117-PA	252567	2025-10-21	2026-10-20
Pre-amplifier	ETS-LINDGREN	3116C-PA	251780	2025-10-21	2026-10-20

2.10 Assistant equipment used for test

Code	Equipment	Manufacturer	Model No.	Equipment No.
1	Computer	acer	N22C8	EMC notebook01



3 Test results and Measurement Data

3.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.	
The antenna is integrated to the motherboard, The best case gain of the antenna is 2.54dBi .	



3.2 Duty Cycle


Refer to section : **Appendix A**

Note:

- 1.If duty cycle $< 98\%$, the conducted average output power and average power spectral density should be add duty factor.
- 2.If duty cycle $\geq 98\%$, the EUT is consider to be transmitting continuously, the conducted average output power and average power spectral density no need to add duty factor (consider to be zero).
- 3.The conducted peak output power and peak power spectral density no need to consider duty factor.
- 4.The on-time time is transmission duration (T).




3.3 DTS (6 dB) Bandwidth

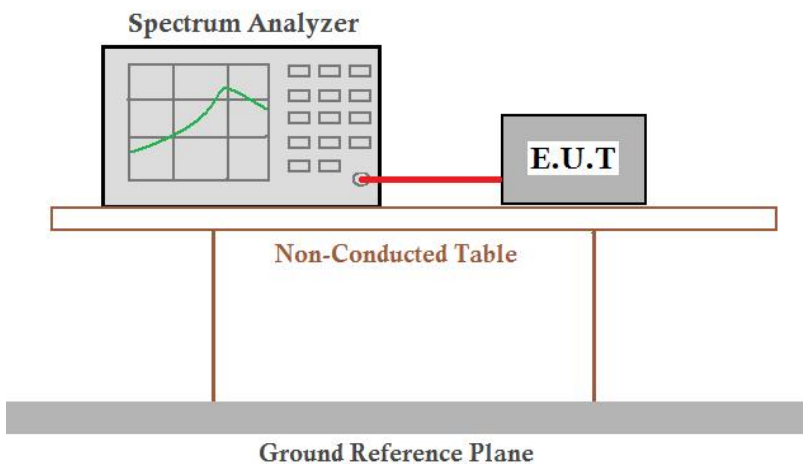Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2020 Section 11.8.1 Option 1
Test Setup:	
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).
Limit:	≥ 500 kHz
Test Results:	Pass

The detailed test data see: **Appendix B**




3.4 Maximum conducted (average) output power

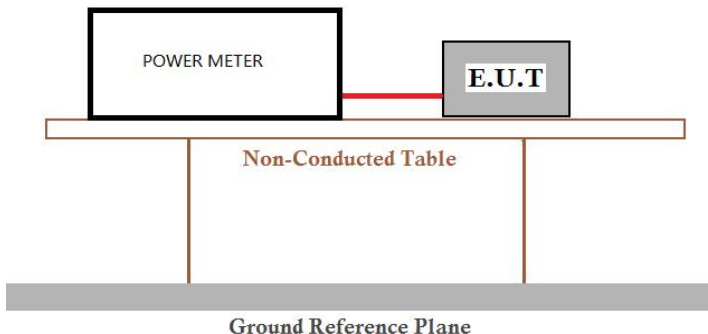Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2020 Section 11.9.2.3.1
Test Setup:	
Test Instruments:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).
Limit:	30dBm
Test Results:	Pass

The detailed test data see: **Appendix C**




3.5 Power Spectral Density

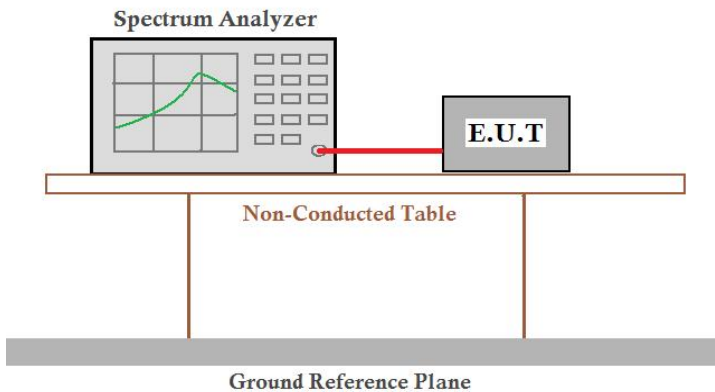Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2020 Section 11.10.5
Test Setup:	
Test Instruments:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass

The detailed test data see: **Appendix D**




3.6 Band-edge for RF Conducted Emissions

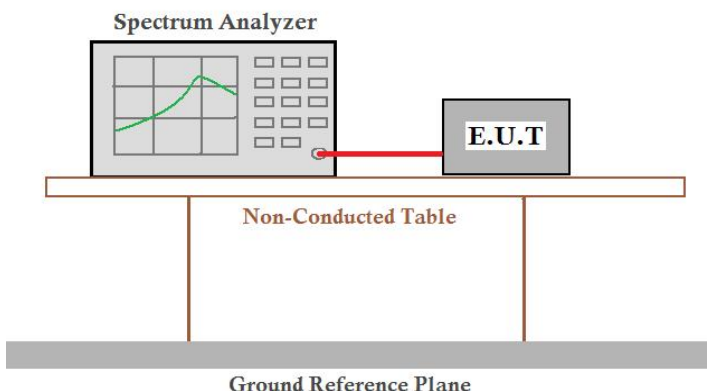Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020 Section 11.11
Test Setup:	
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

The detailed test data see: **Appendix E**



3.7 RF Conducted Spurious Emissions

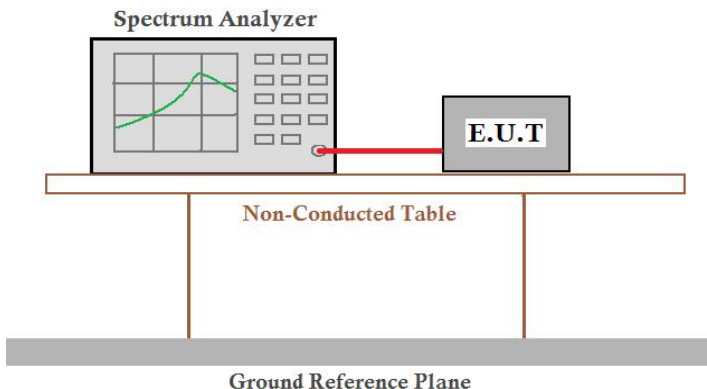Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020 Section 11.11
Test Setup:	
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

The detailed test data see: **Appendix F**



3.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2020 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz (DC $\geq$ 0.98) $\geq$ 1/T (DC<0.98)	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

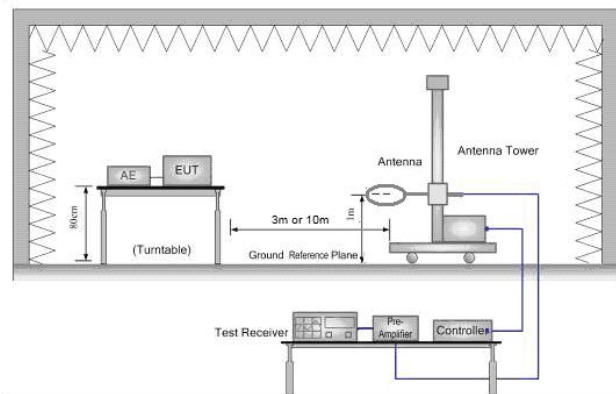
**Test Setup:**

Figure 1. Below 30MHz

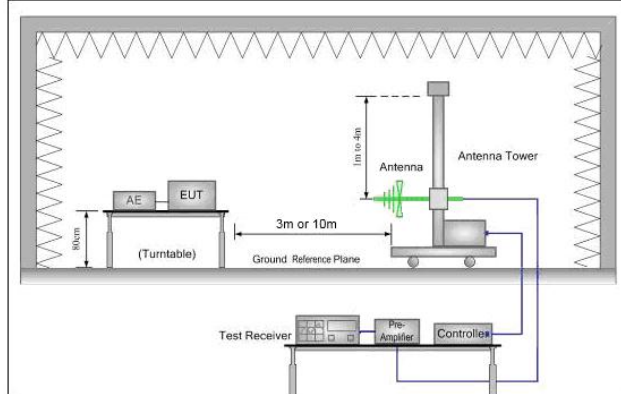


Figure 2. 30MHz to 1GHz

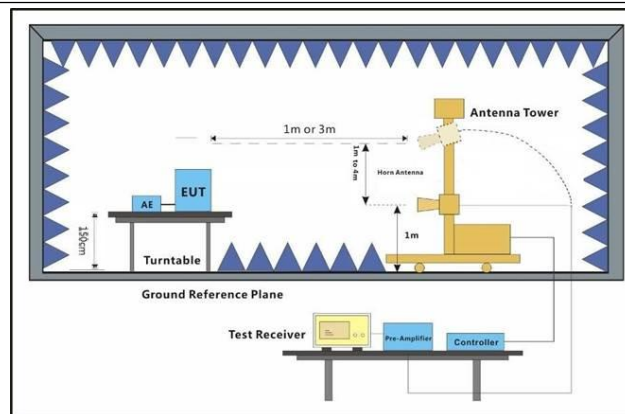


Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Test Configuration:

Measurements Below 1000MHz


- RBW = 120 kHz



	• VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b is the worst case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass


**Test Data****For 30-1000MHz**

Horizontal:

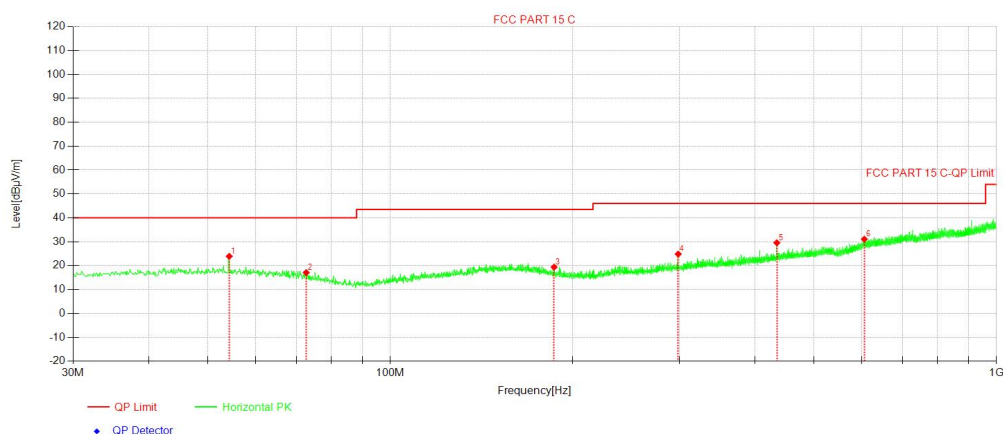

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	54.25	32.13	-8.22	23.91	40.00	16.09	100	267	PK	H
2	72.68	27.73	-10.63	17.10	40.00	22.90	100	339	PK	H
3	186.38	29.56	-10.15	19.41	43.50	24.09	100	248	PK	H
4	298.62	31.90	-7.03	24.87	46.00	21.13	100	267	PK	H
5	434.34	32.78	-3.20	29.58	46.00	16.42	100	127	PK	H
6	605.56	30.16	0.93	31.09	46.00	14.91	100	165	PK	H

Vertical :

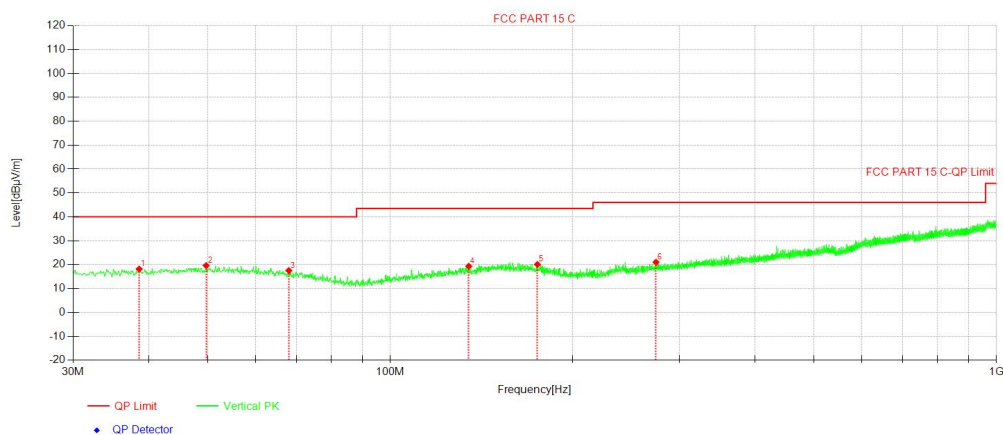


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	38.54	27.15	-8.98	18.17	40.00	21.83	100	359	PK	V
2	49.69	27.69	-8.06	19.63	40.00	20.37	100	166	PK	V
3	68.03	27.30	-9.75	17.55	40.00	22.45	100	347	PK	V
4	134.77	28.35	-8.98	19.37	43.50	24.13	100	48	PK	V
5	174.93	28.85	-8.74	20.11	43.50	23.39	100	166	PK	V
6	274.46	28.83	-7.79	21.04	46.00	24.96	100	360	PK	V



For above 1GHz


11B 2412MHz

Horizontal:

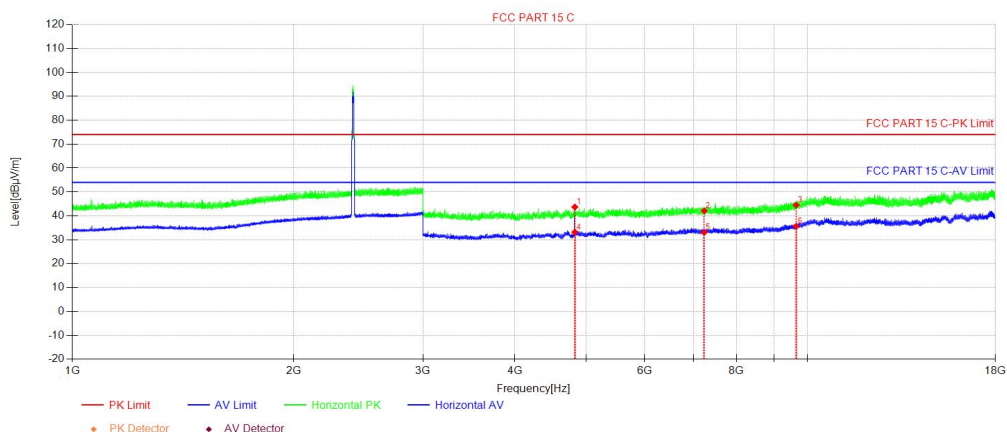

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4824.00	48.33	-4.63	43.70	74.00	30.30	150	41	PK	H
2	7236.00	43.81	-1.70	42.11	74.00	31.89	150	3	PK	H
3	9648.00	43.43	1.07	44.50	74.00	29.50	150	246	PK	H
4	4824.00	37.80	-4.63	33.17	54.00	20.83	150	41	AV	H
5	7236.00	34.83	-1.70	33.13	54.00	20.87	150	3	AV	H
6	9648.00	34.60	1.07	35.67	54.00	18.33	150	100	AV	H


Vertical:

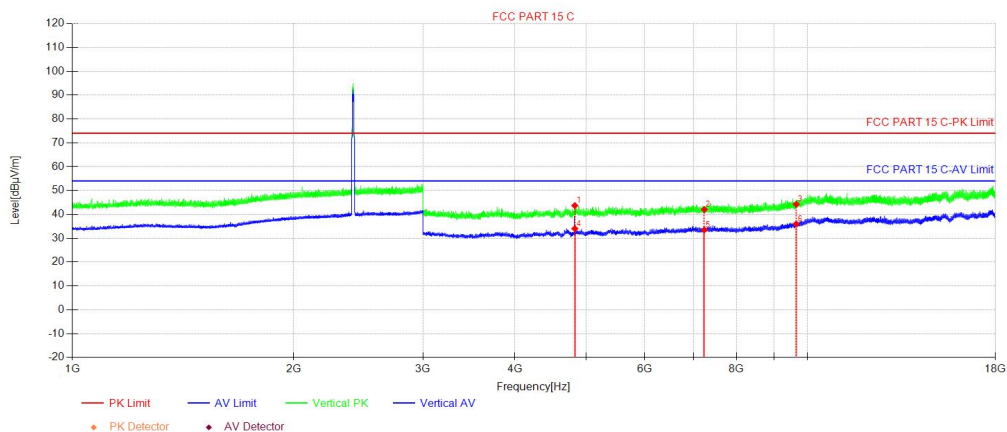

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4824.00	48.31	-4.63	43.68	74.00	30.32	150	38	PK	V
2	7236.00	43.74	-1.70	42.04	74.00	31.96	150	334	PK	V
3	9648.00	43.17	1.07	44.24	74.00	29.76	150	101	PK	V
4	4824.00	38.64	-4.63	34.01	54.00	19.99	150	66	AV	V
5	7236.00	35.20	-1.70	33.50	54.00	20.50	150	187	AV	V
6	9648.00	34.88	1.07	35.95	54.00	18.05	150	101	AV	V


**11B 2437MHz**

Horizontal:

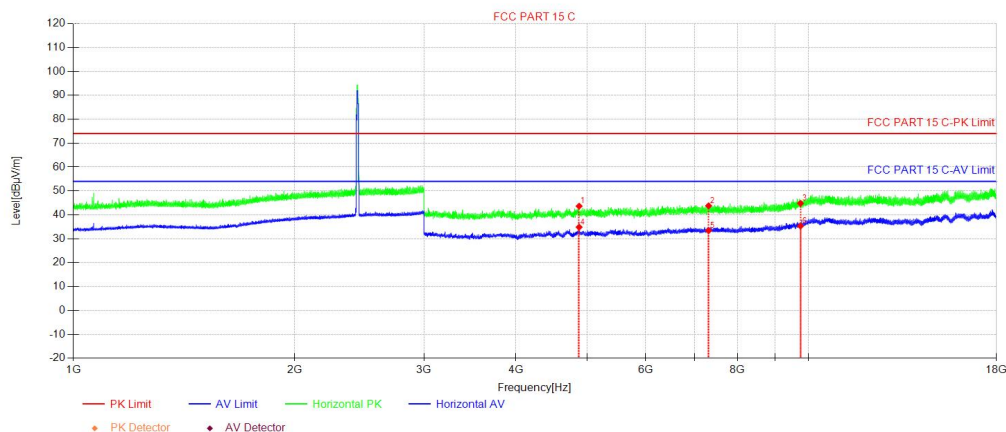

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4874.00	48.34	-4.70	43.64	74.00	30.36	150	157	PK	H
2	7311.00	45.32	-1.53	43.79	74.00	30.21	150	302	PK	H
3	9748.00	43.25	1.56	44.81	74.00	29.19	150	331	PK	H
4	4874.00	39.55	-4.70	34.85	54.00	19.15	150	72	AV	H
5	7311.00	34.95	-1.53	33.42	54.00	20.58	150	215	AV	H
6	9748.00	33.75	1.56	35.31	54.00	18.69	150	331	AV	H


Vertical:

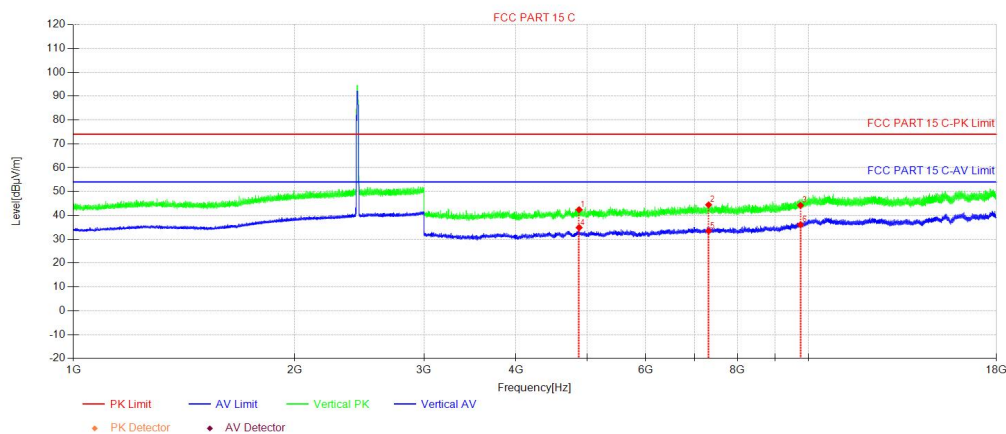

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4874.00	47.09	-4.70	42.39	74.00	31.61	150	156	PK	V
2	7311.00	45.96	-1.53	44.43	74.00	29.57	150	190	PK	V
3	9748.00	42.66	1.56	44.22	74.00	29.78	150	99	PK	V
4	4874.00	39.58	-4.70	34.88	54.00	19.12	150	216	AV	V
5	7311.00	35.01	-1.53	33.48	54.00	20.52	150	248	AV	V
6	9748.00	34.50	1.56	36.06	54.00	17.94	150	331	AV	V


**11B 2462MHz**

Horizontal:

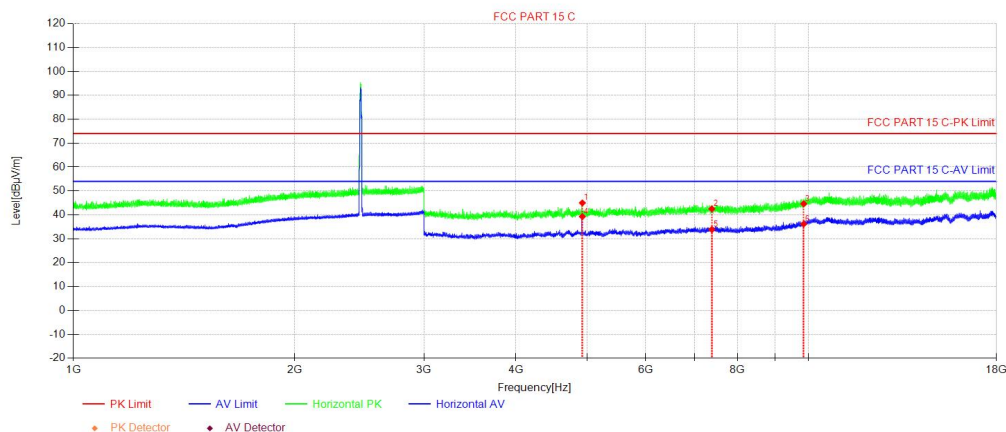

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4924.00	49.79	-4.79	45.00	74.00	29.00	150	70	PK	H
2	7386.00	43.83	-1.32	42.51	74.00	31.49	150	157	PK	H
3	9848.00	42.65	2.00	44.65	74.00	29.35	150	353	PK	H
4	4924.00	44.08	-4.79	39.29	54.00	14.71	150	70	AV	H
5	7386.00	35.25	-1.32	33.93	54.00	20.07	150	14	AV	H
6	9848.00	34.20	2.00	36.20	54.00	17.80	150	70	AV	H

Vertical:

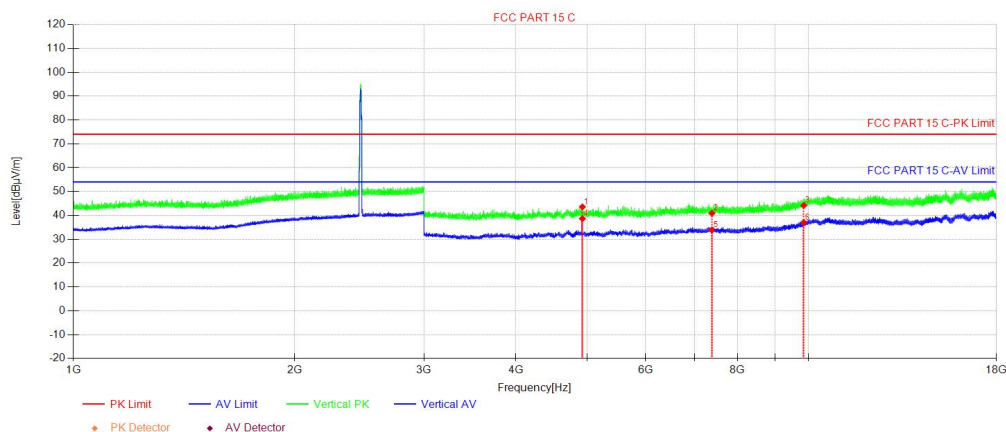

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4924.00	48.34	-4.79	43.55	74.00	30.45	150	158	PK	V
2	7386.00	42.22	-1.32	40.90	74.00	33.10	150	305	PK	V
3	9848.00	42.20	2.00	44.20	74.00	29.80	150	188	PK	V
4	4924.00	43.43	-4.79	38.64	54.00	15.36	150	74	AV	V
5	7386.00	35.18	-1.32	33.86	54.00	20.14	150	353	AV	V
6	9848.00	35.07	2.00	37.07	54.00	16.93	150	188	AV	V



Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:
$$\text{Result Level} = \text{Reading Level} + \text{Correct Factor}(\text{including Ant.Factor, Cable Factor etc.})$$
2. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
3. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be report.
4. All channels had been pre-test,only the worst case was reported.



3.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2020 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

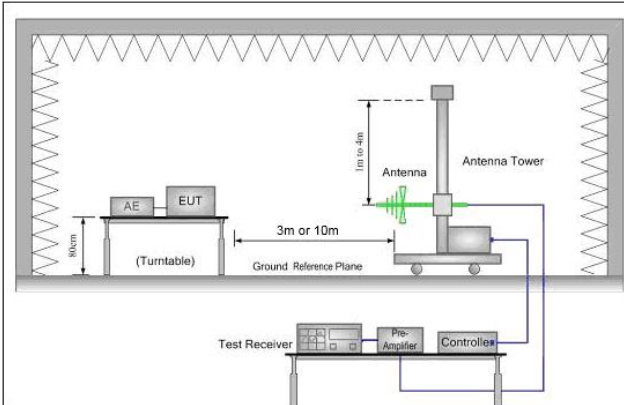


Figure 1. 30MHz to 1GHz

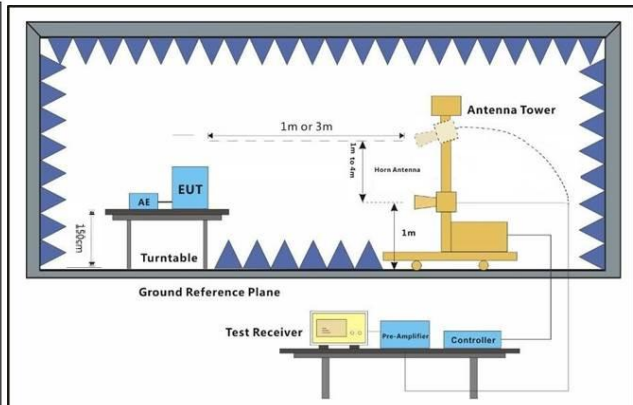


Figure 2. Above 1 GHz




Test Procedure:	- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass




Test Date
11G 2412MHz

Horizontal:

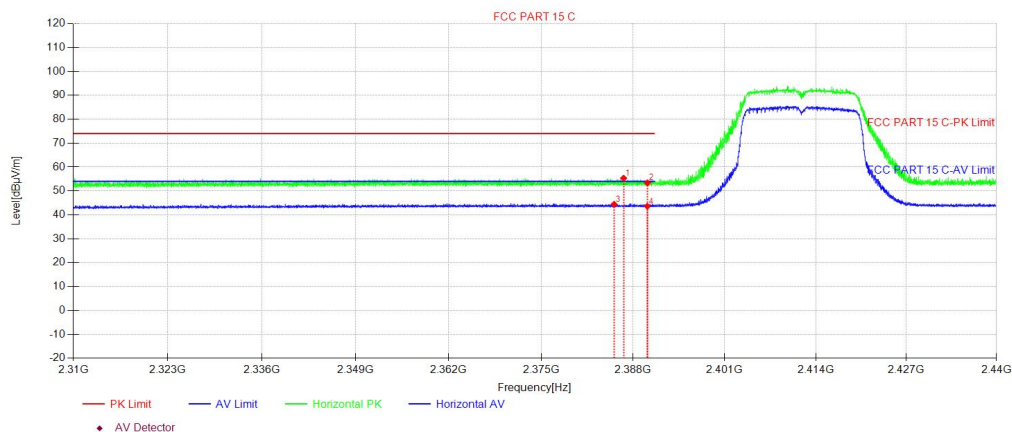

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2386.64	56.15	-0.81	55.34	74.00	18.66	150	208	PK	H
2	2390.01	54.19	-0.80	53.39	74.00	20.61	150	92	PK	H
3	2385.30	45.23	-0.81	44.42	54.00	9.58	150	274	AV	H
4	2390.00	44.38	-0.80	43.58	54.00	10.42	150	317	AV	H


Vertical:

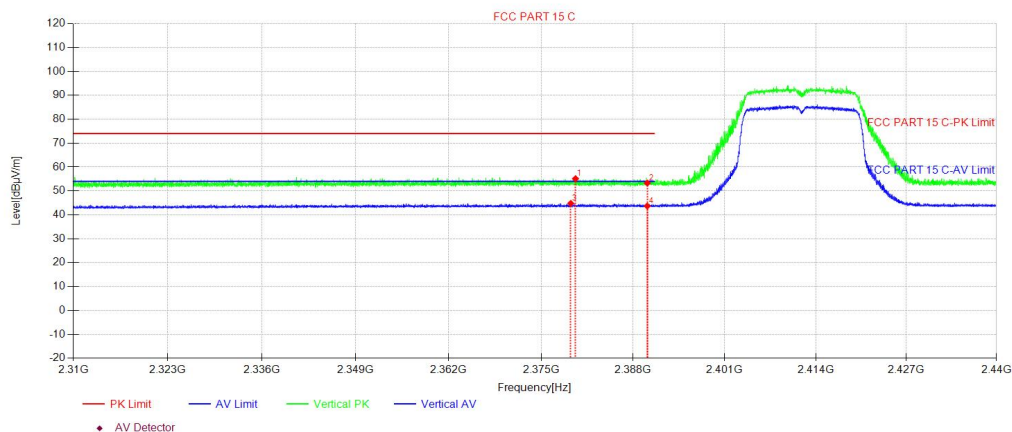

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2379.84	55.97	-0.83	55.14	74.00	18.86	150	205	PK	V
2	2390.00	54.08	-0.80	53.28	74.00	20.72	150	354	PK	V
3	2379.18	45.64	-0.84	44.80	54.00	9.20	150	354	AV	V
4	2390.00	44.48	-0.80	43.68	54.00	10.32	150	0	AV	V


**11G 2462MHz**

Horizontal:

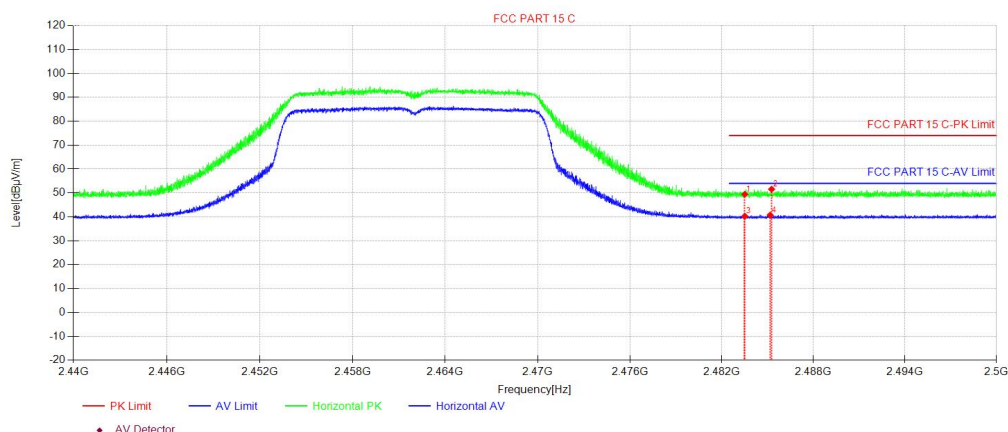

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2483.50	49.74	-0.29	49.45	74.00	24.55	150	91	PK	H
2	2485.26	51.84	-0.27	51.57	74.00	22.43	150	5	PK	H
3	2483.50	40.58	-0.29	40.29	54.00	13.71	150	5	AV	H
4	2485.16	41.01	-0.27	40.74	54.00	13.26	150	156	AV	H

Vertical:

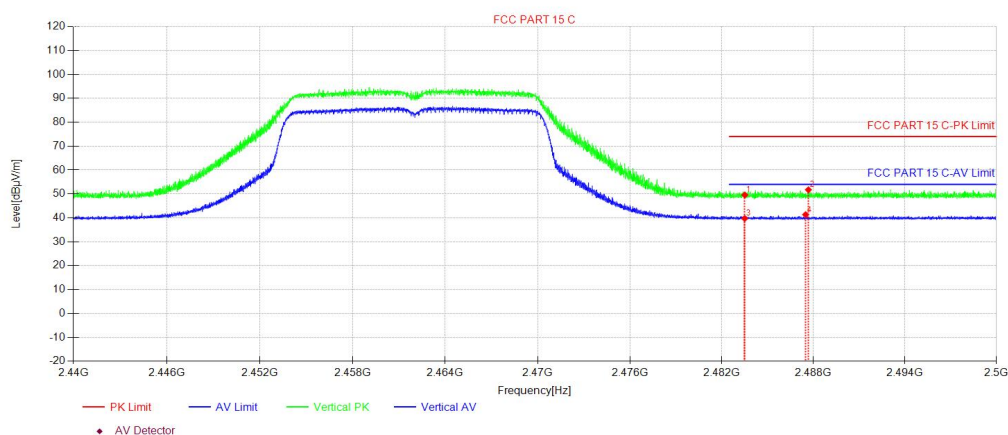

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2483.50	49.86	-0.29	49.57	74.00	24.43	150	93	PK	V
2	2487.66	52.01	-0.26	51.75	74.00	22.25	150	0	PK	V
3	2483.50	40.03	-0.29	39.74	54.00	14.26	150	114	AV	V
4	2487.48	41.60	-0.26	41.34	54.00	12.66	150	114	AV	V

Note:


1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including Ant.Factor ,Cable Factor etc.)

2. All channels had been pre-test,only the worst case was reported.



3.10AC Power Line Conducted Emissions

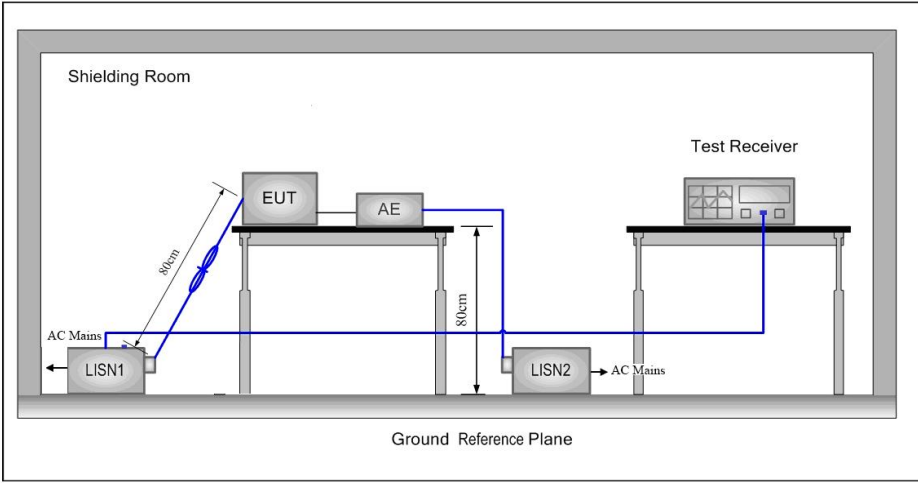Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2020		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 2020 on conducted measurement.		
Test Setup:			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.		




	Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 6.5Mbps of rate of 802.11n(HT20) at lowest channel is the worst case. Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

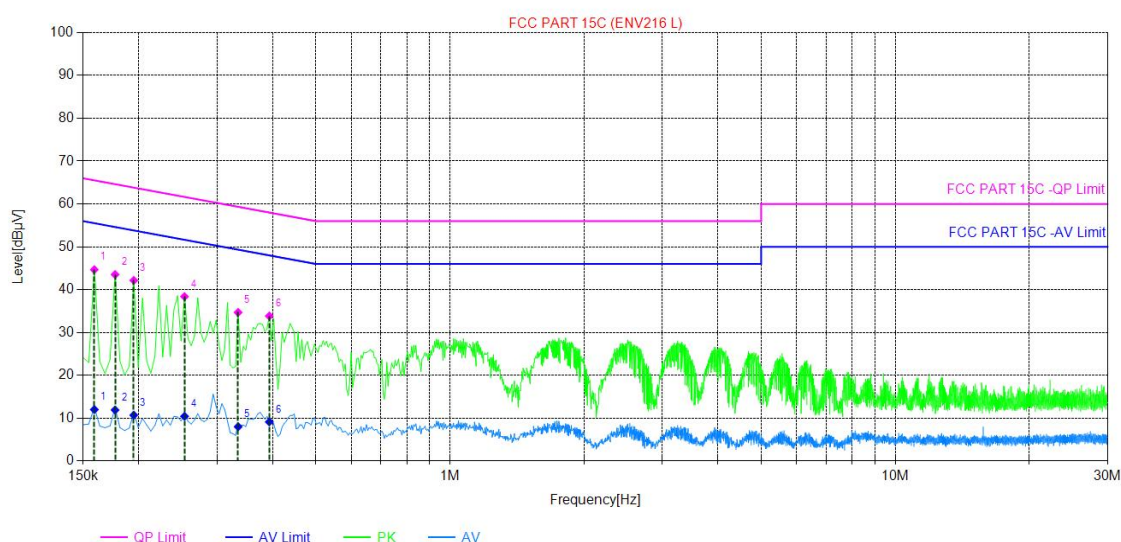


Final Data List

NO.	Freq. [MHz]	QP Reading[dB μV]	AV Reading[dB μV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.159	34.77	2.13	9.90	44.67	65.52	20.85	12.03	55.52	43.49	PASS
2	0.177	33.62	2.01	9.91	43.53	64.63	21.10	11.92	54.63	42.71	PASS
3	0.195	32.23	0.80	9.93	42.16	63.82	21.66	10.73	53.82	43.09	PASS
4	0.2535	28.48	0.54	9.91	38.39	61.64	23.25	10.45	51.64	41.19	PASS
5	0.3345	24.84	-1.83	9.85	34.69	59.34	24.65	8.02	49.34	41.32	PASS
6	0.393	24.09	-0.62	9.77	33.86	58.00	24.14	9.15	48.00	38.85	PASS



Neutral Line:

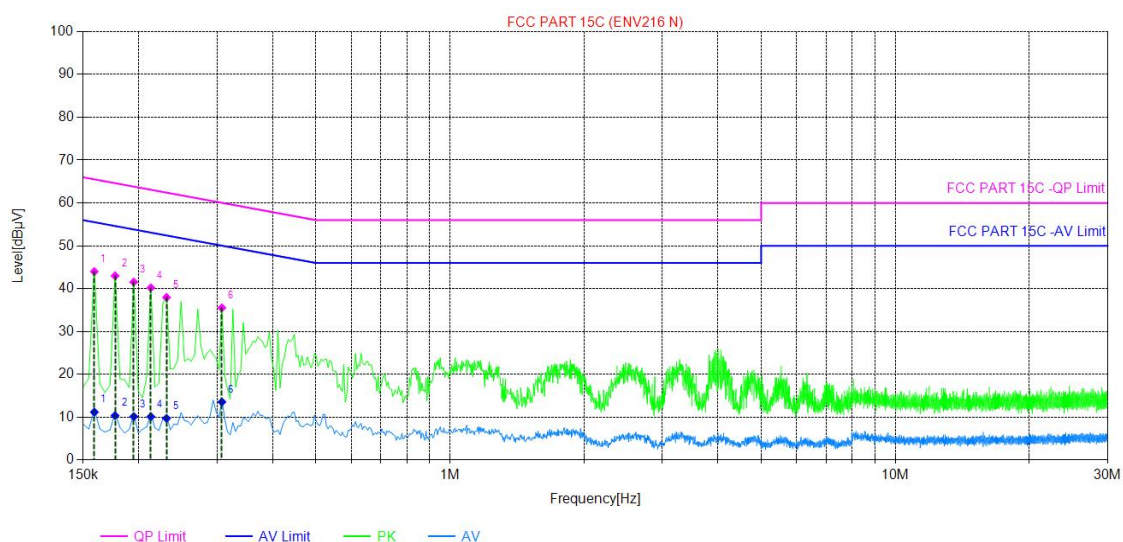

Final Data List

NO.	Freq. [MHz]	QP Reading[dB μV]	AV Reading[dB μV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.159	34.20	1.40	9.80	44.00	65.52	21.52	11.20	55.52	44.32	PASS
2	0.177	33.17	0.56	9.83	43.00	64.63	21.63	10.39	54.63	44.24	PASS
3	0.195	31.69	0.30	9.86	41.55	63.82	22.27	10.16	53.82	43.66	PASS
4	0.213	30.33	0.27	9.87	40.20	63.09	22.89	10.14	53.09	42.95	PASS
5	0.231	28.10	-0.13	9.87	37.97	62.41	24.44	9.74	52.41	42.67	PASS
6	0.3075	25.65	3.69	9.88	35.53	60.04	24.51	13.57	50.04	36.47	PASS

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including LISN Factor and the Cable Factor etc.), The basic equation is as follows:
Result Level= Reading Level + Correct Factor(including LISN Factor, Cable Factor etc.)
3. Only the worst case was reported.



4 Appendix

Appendix A: Duty Cycle


Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	12.41	12.54	98.96	0.05
		2437	12.42	12.55	98.96	0.05
		2462	12.42	12.55	98.96	0.05
11G	Ant1	2412	2.07	2.20	94.09	0.26
		2437	2.07	2.20	94.09	0.26
		2462	2.07	2.20	94.09	0.26
11N20SISO	Ant1	2412	1.92	2.05	93.66	0.28
		2437	1.92	2.05	93.66	0.28
		2462	1.92	2.05	93.66	0.28




Test Graphs


11B_Ant1_2412

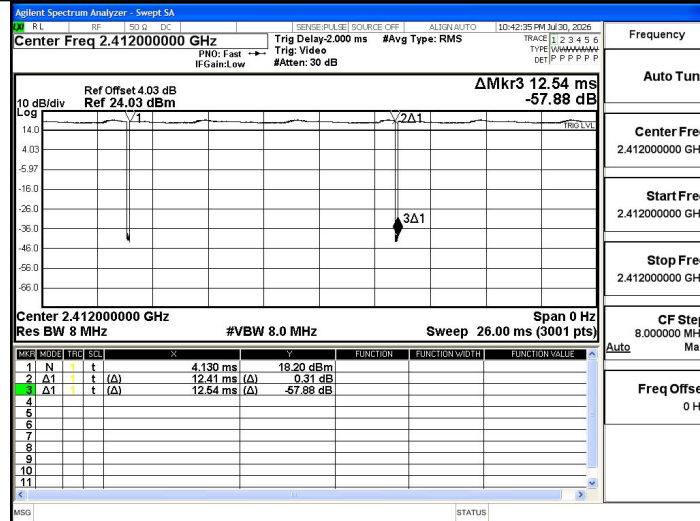

11B_Ant1_2437

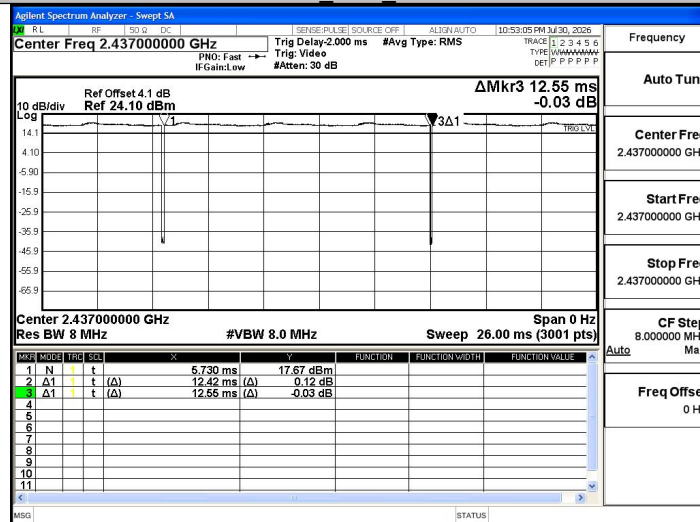


11B_Ant1_2462

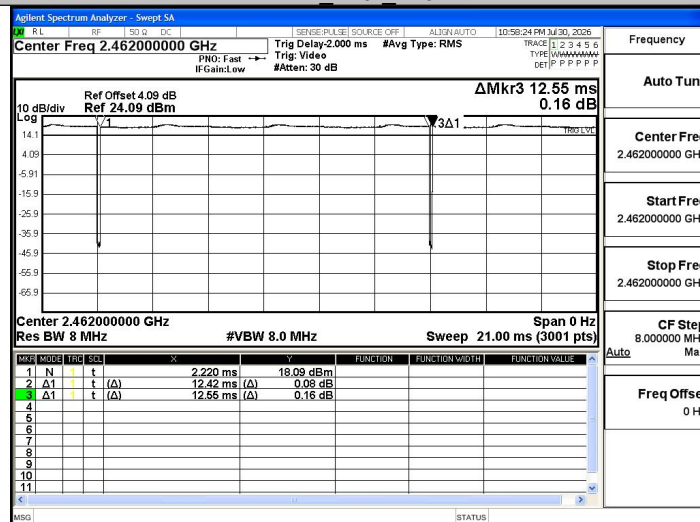





11G_Ant1_2412

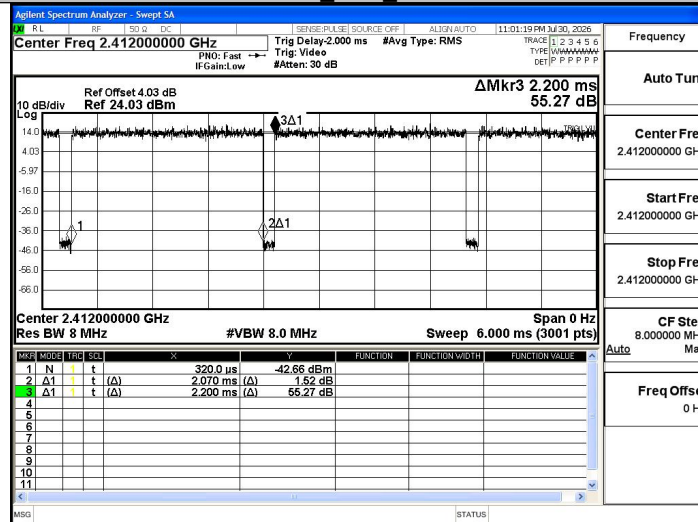

11G_Ant1_2437

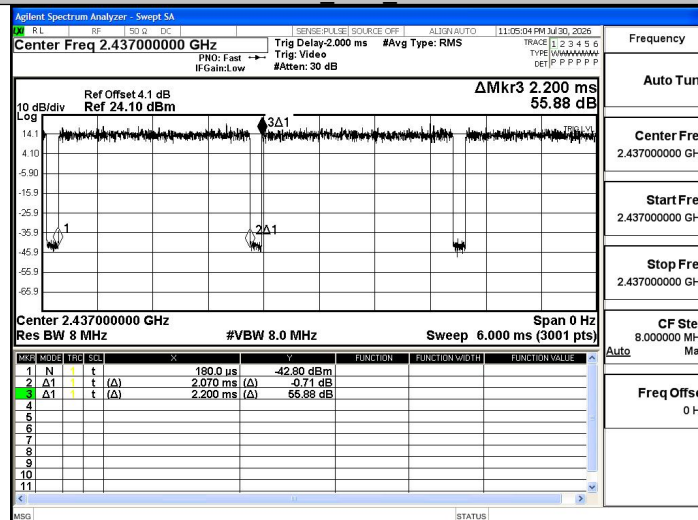


11G_Ant1_2462

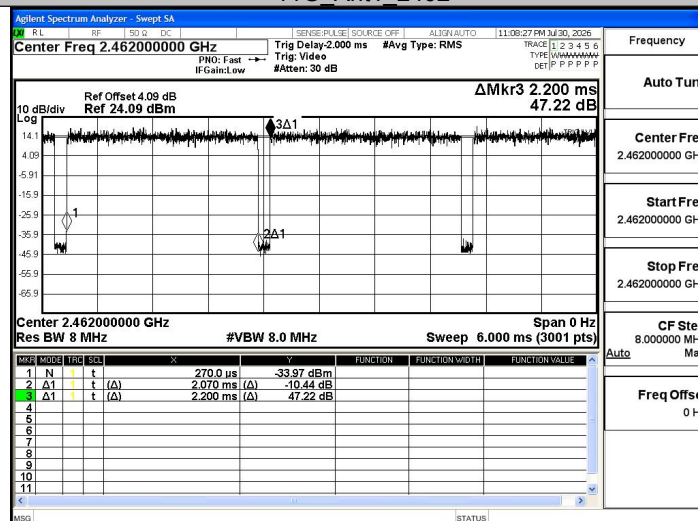





11N20SISO Ant1_2412

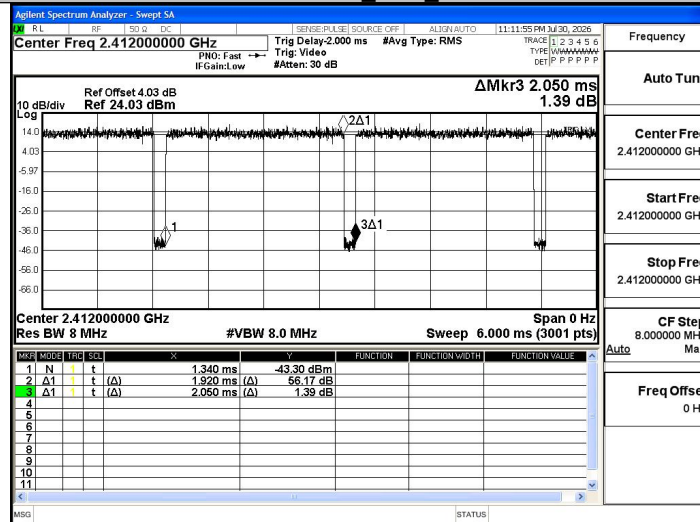

11N20SISO Ant1_2437

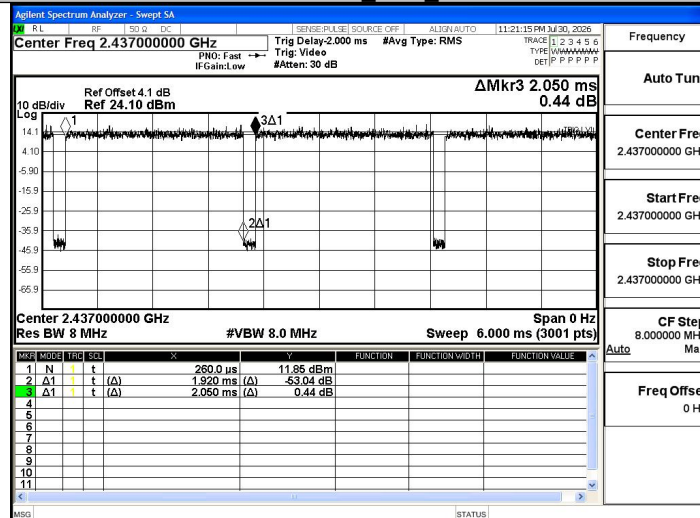

11N20SISO Ant1_2462

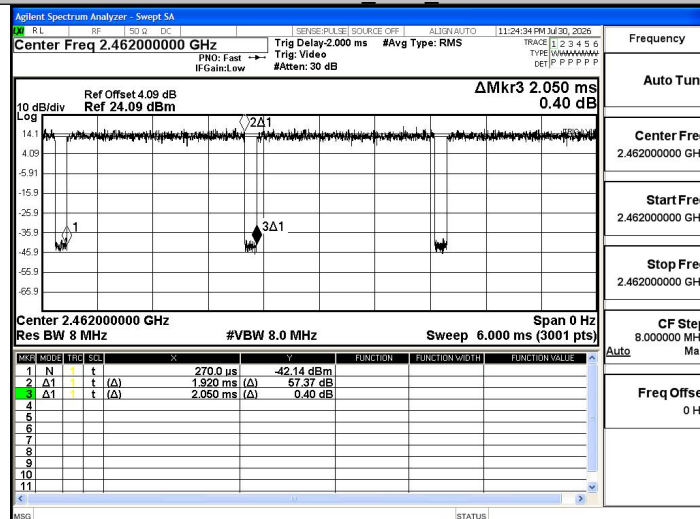



Appendix B: DTS Bandwidth


Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.120	2407.520	2416.640	0.5	PASS
		2437	9.120	2432.520	2441.640	0.5	PASS
		2462	9.120	2457.520	2466.640	0.5	PASS
11G	Ant1	2412	16.360	2403.920	2420.280	0.5	PASS
		2437	16.400	2428.880	2445.280	0.5	PASS
		2462	16.320	2453.920	2470.240	0.5	PASS
11N20SISO	Ant1	2412	17.480	2403.360	2420.840	0.5	PASS
		2437	17.600	2428.280	2445.880	0.5	PASS
		2462	17.600	2453.280	2470.880	0.5	PASS




Test Graphs


11B_Ant1_2412

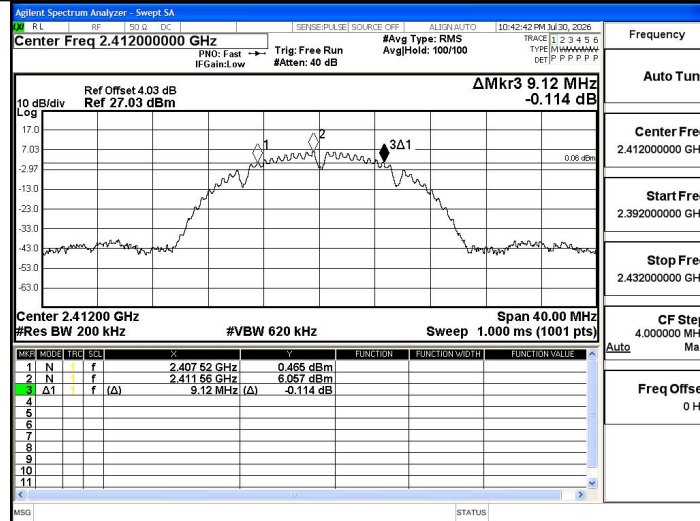

11B_Ant1_2437

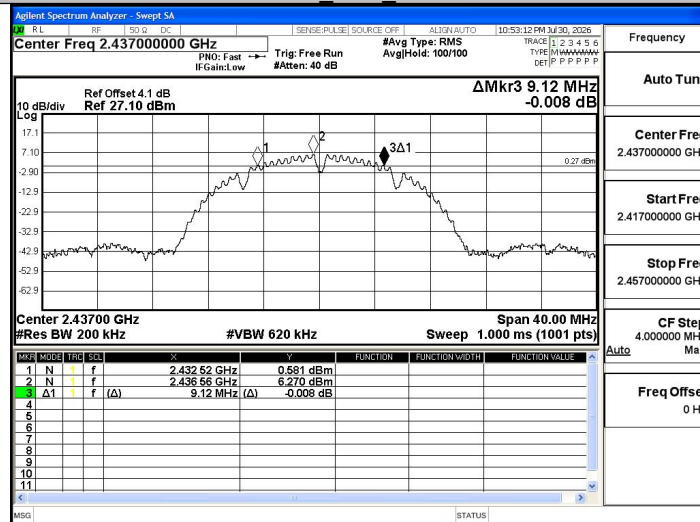


11B_Ant1_2462

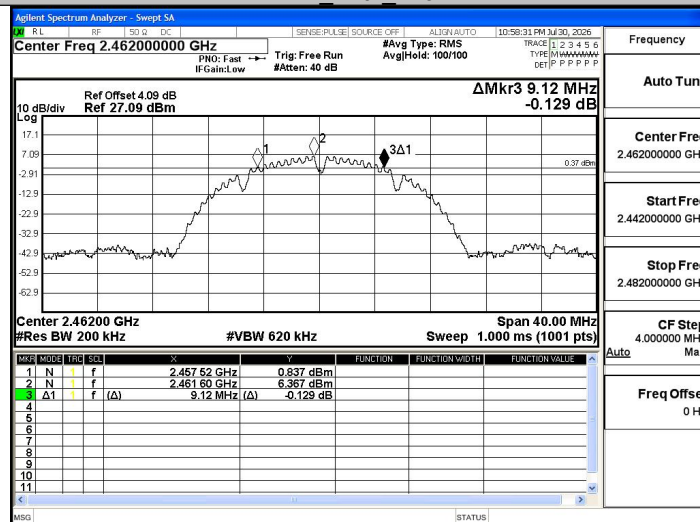





11G_Ant1_2412

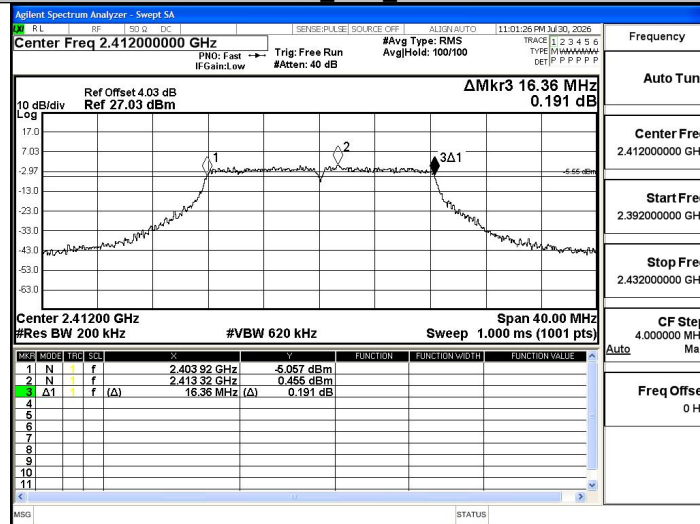

11G_Ant1_2437

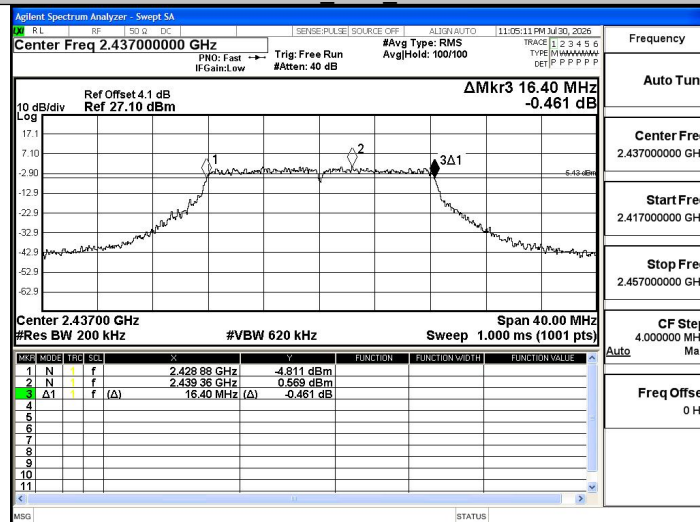


11G_Ant1_2462

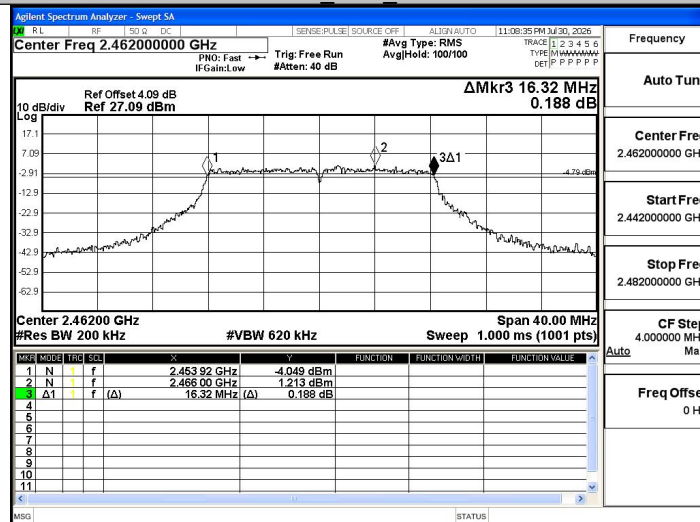





11N20SISO_Ant1_2412

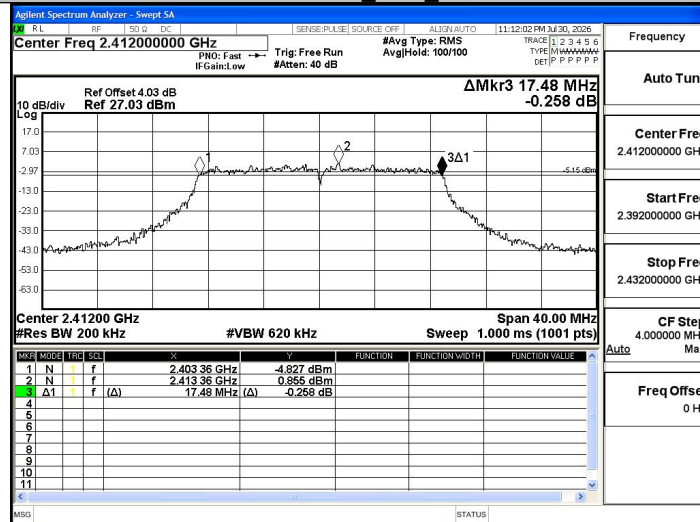

11N20SISO_Ant1_2437

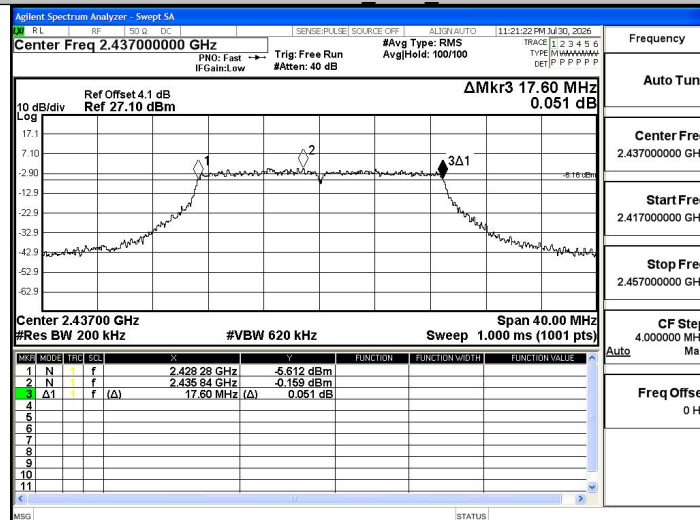

11N20SISO_Ant1_2462

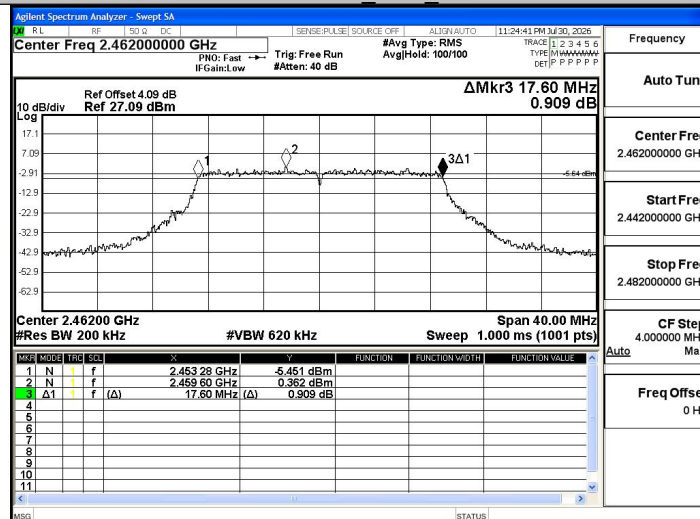

**Appendix C: Maximum conducted (average) output power****Test Result**

Test Mode	Antenna	Frequency[MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	16.75	98.96	0.05	16.80	≤30.00	PASS
		2437	16.99	98.96	0.05	17.04	≤30.00	PASS
		2462	17.11	98.96	0.05	17.16	≤30.00	PASS
11G	Ant1	2412	18.00	94.09	0.26	18.26	≤30.00	PASS
		2437	18.26	94.09	0.26	18.52	≤30.00	PASS
		2462	18.61	94.09	0.26	18.87	≤30.00	PASS
11N20SISO	Ant1	2412	17.99	93.66	0.28	18.27	≤30.00	PASS
		2437	17.72	93.66	0.28	18.00	≤30.00	PASS
		2462	17.87	93.66	0.28	18.15	≤30.00	PASS



Appendix D: Maximum power spectral density

Test Result


TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-7.44	≤8.00	PASS
		2437	-7.93	≤8.00	PASS
		2462	-6.76	≤8.00	PASS
11G	Ant1	2412	-14.36	≤8.00	PASS
		2437	-13.40	≤8.00	PASS
		2462	-13.05	≤8.00	PASS
11N20SISO	Ant1	2412	-13.73	≤8.00	PASS
		2437	-14.22	≤8.00	PASS
		2462	-13.91	≤8.00	PASS

Note: The duty factor is already compensated in the result.




Test Graphs


11B_Ant1_2412

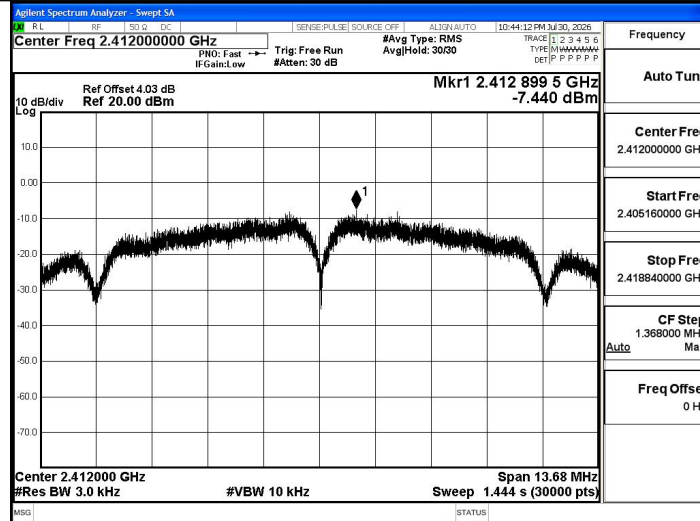

11B_Ant1_2437

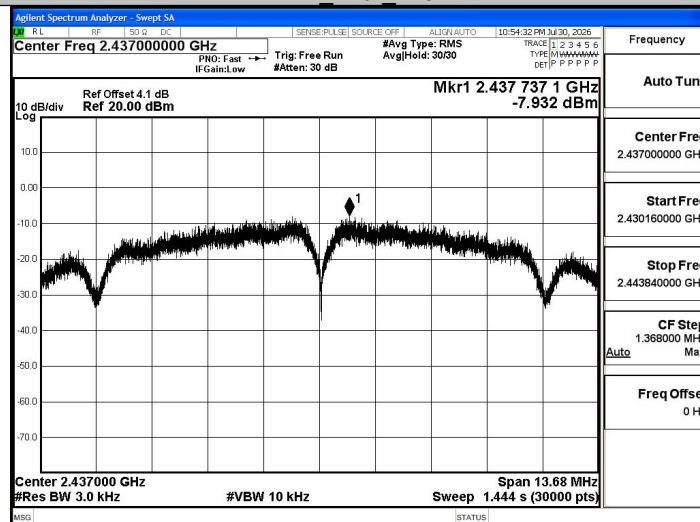


11B_Ant1_2462

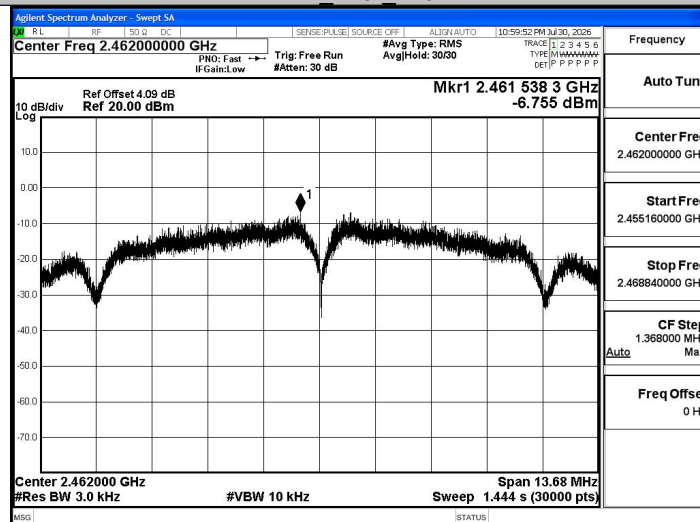




11G_Ant1_2412

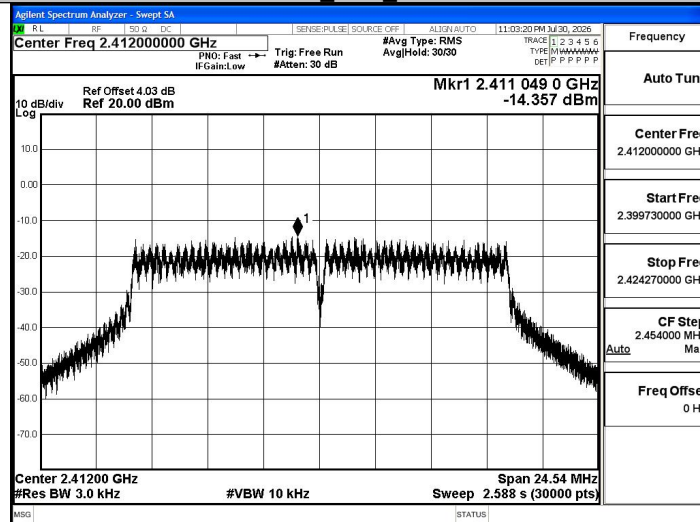

11G_Ant1_2437

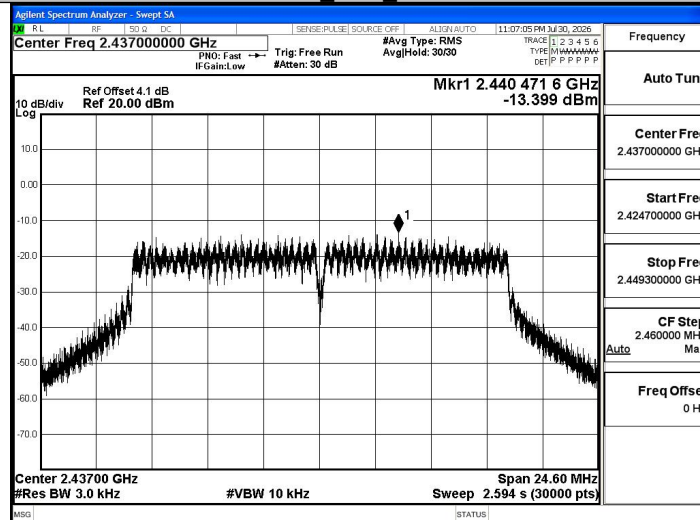

11G_Ant1_2462

