


Plot 37:

Test Date	2026-04-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 40
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.264
SAR 1g (W/Kg)	0.443
ConvF	1.47
Relative permittivity	40.23
Conductivity (S/m)	1.68

Maximum location: X=-5.00, Y=18.00 ; SAR Peak: 0.71 W/kg




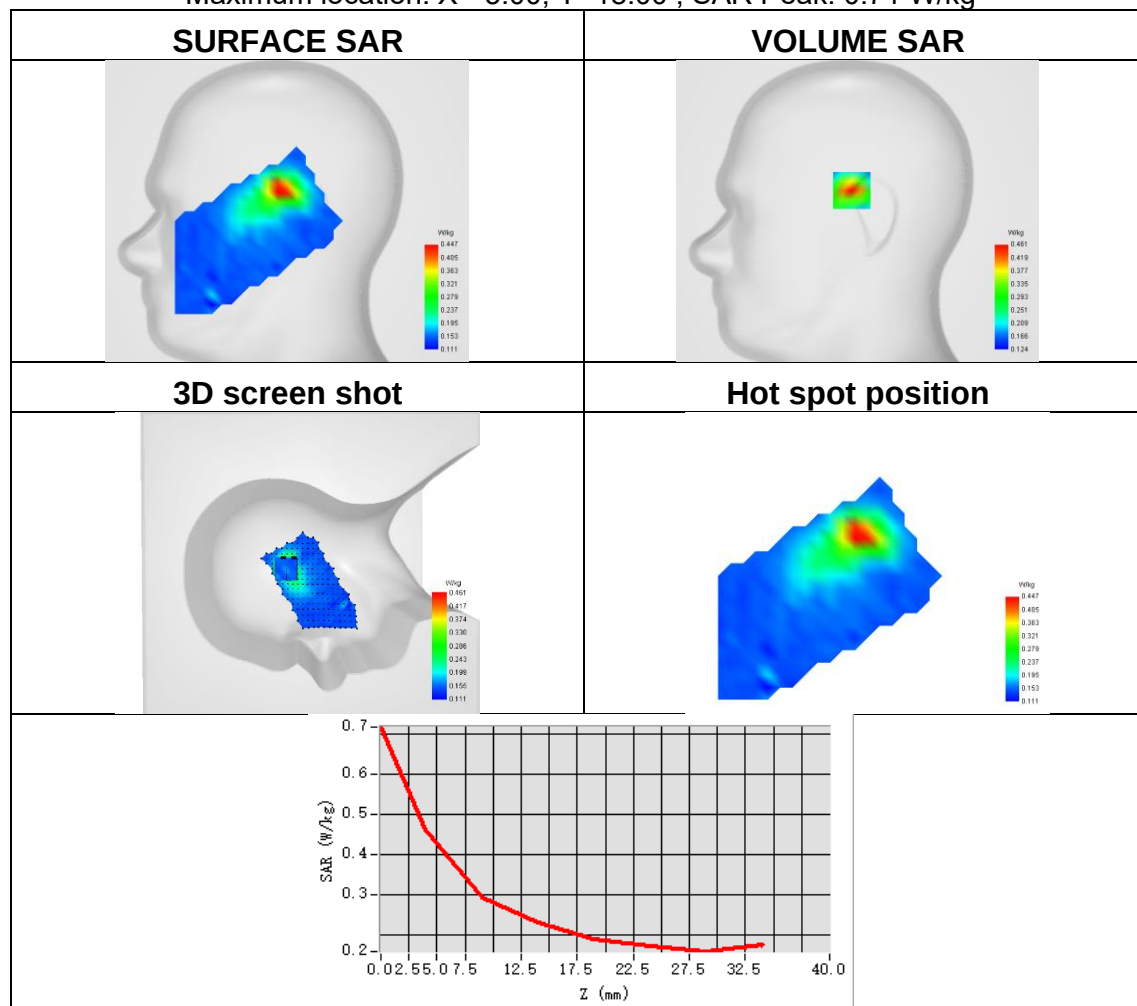

Plot 38:

Test Date	2026-04-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.276
SAR 1g (W/Kg)	0.551
ConvF	1.47
Relative permittivity	40.23
Conductivity (S/m)	1.68

Maximum location: X=16.00, Y=18.00 ; SAR Peak: 0.92 W/kg

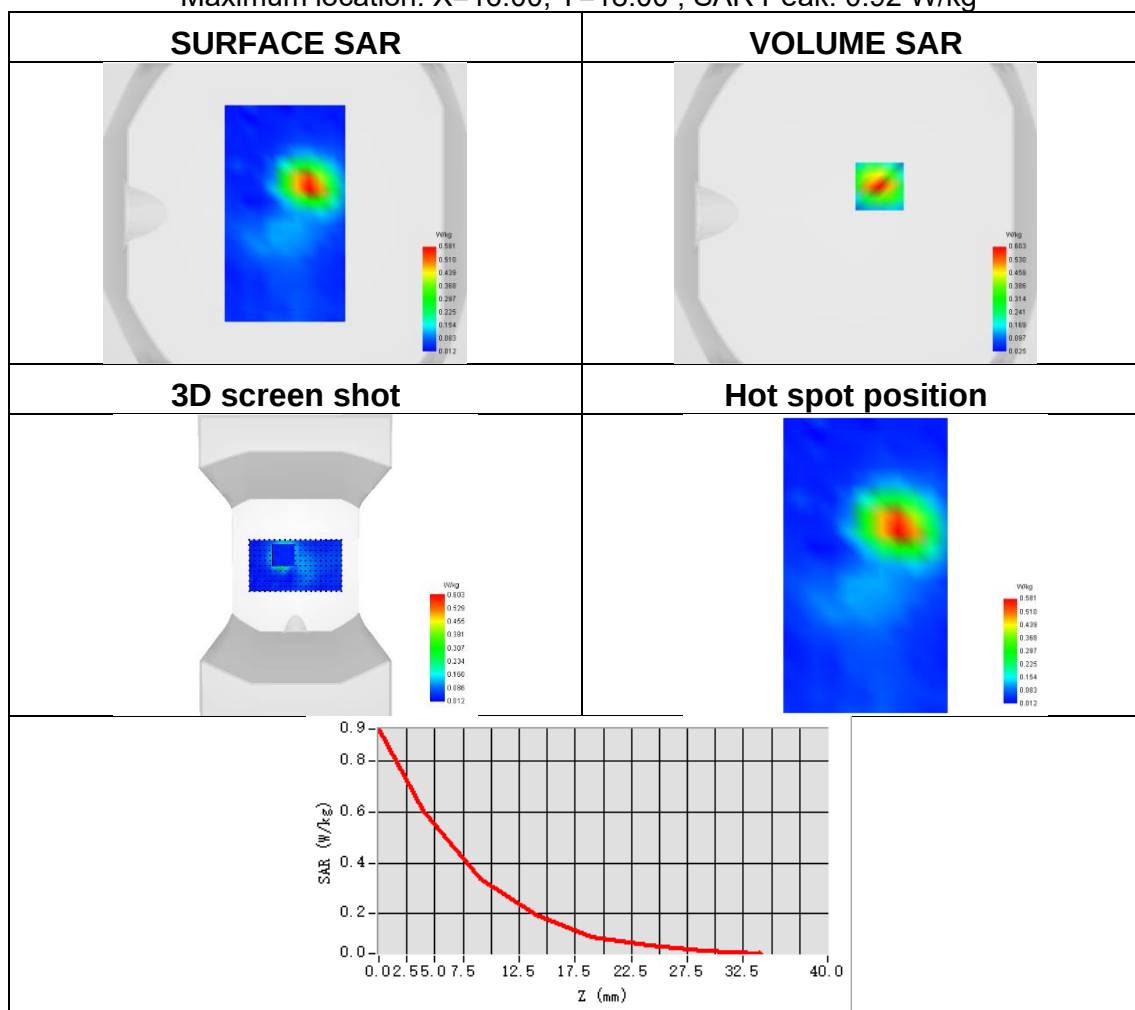




Plot 39:

Test Date	2026-04-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.308
SAR 1g (W/Kg)	0.474
ConvF	1.21
Relative permittivity	40.48
Conductivity (S/m)	1.42

Maximum location: X=-17.00, Y=9.00 ; SAR Peak: 0.72 W/kg

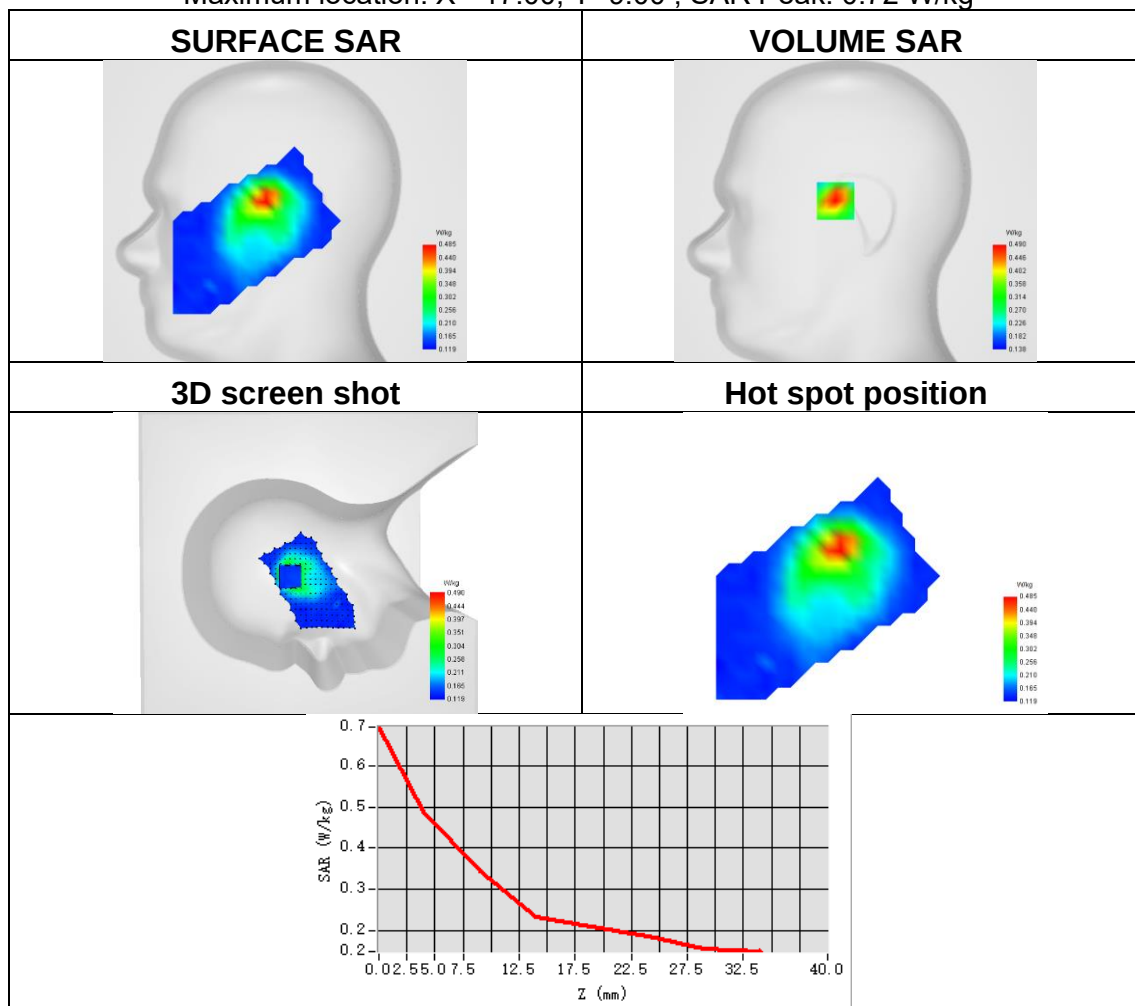




Plot 40:

Test Date	2026-04-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.309
SAR 1g (W/Kg)	0.506
ConvF	1.21
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=18.00, Y=46.00 ; SAR Peak: 0.77 W/kg

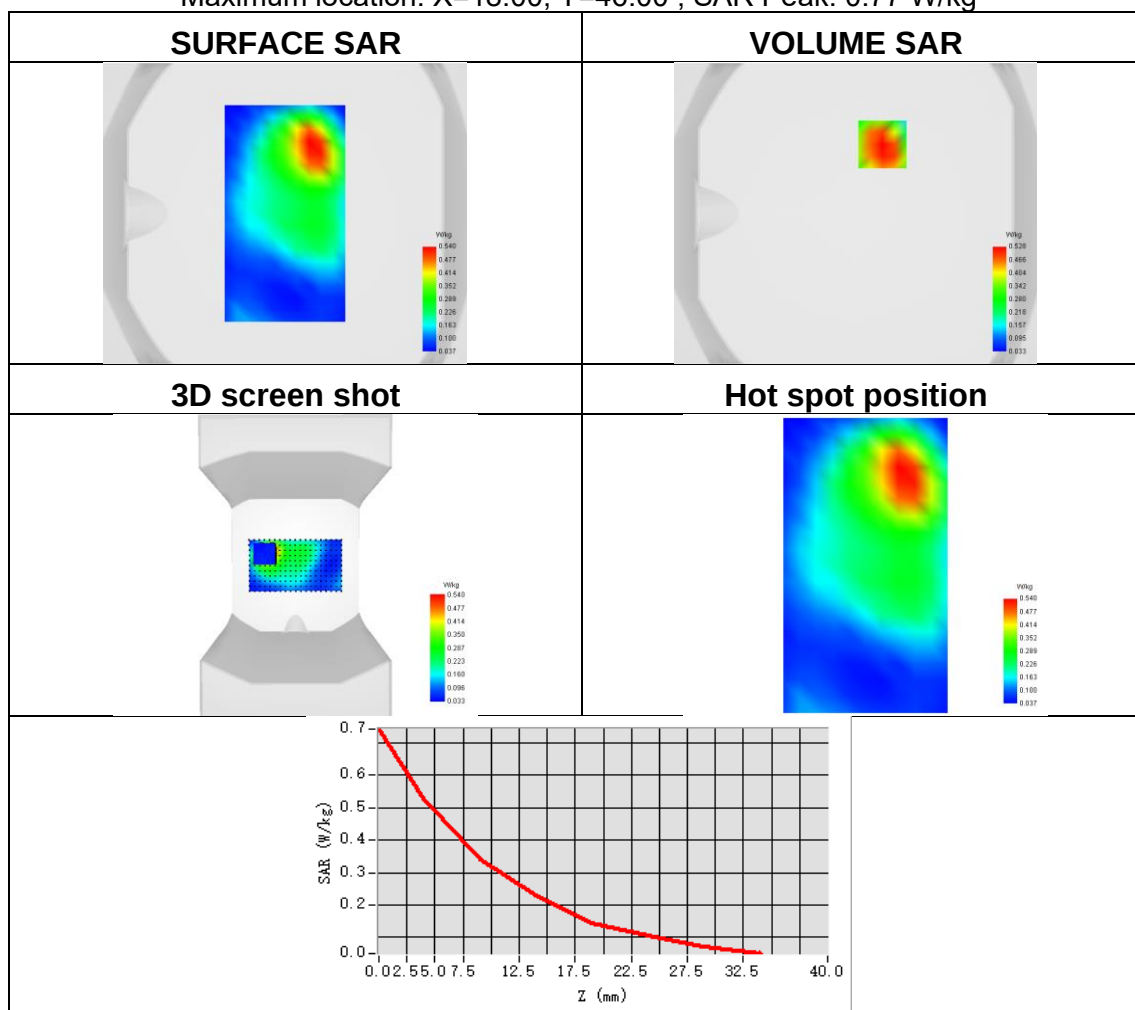




Plot 41:

Test Date	2026-04-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	824.2
SAR 10g (W/Kg)	0.082
SAR 1g (W/Kg)	0.157
ConvF	1.02
Relative permittivity	42.10
Conductivity (S/m)	0.91

Maximum location: X=-11.00, Y=-39.00 ; SAR Peak: 0.29 W/kg

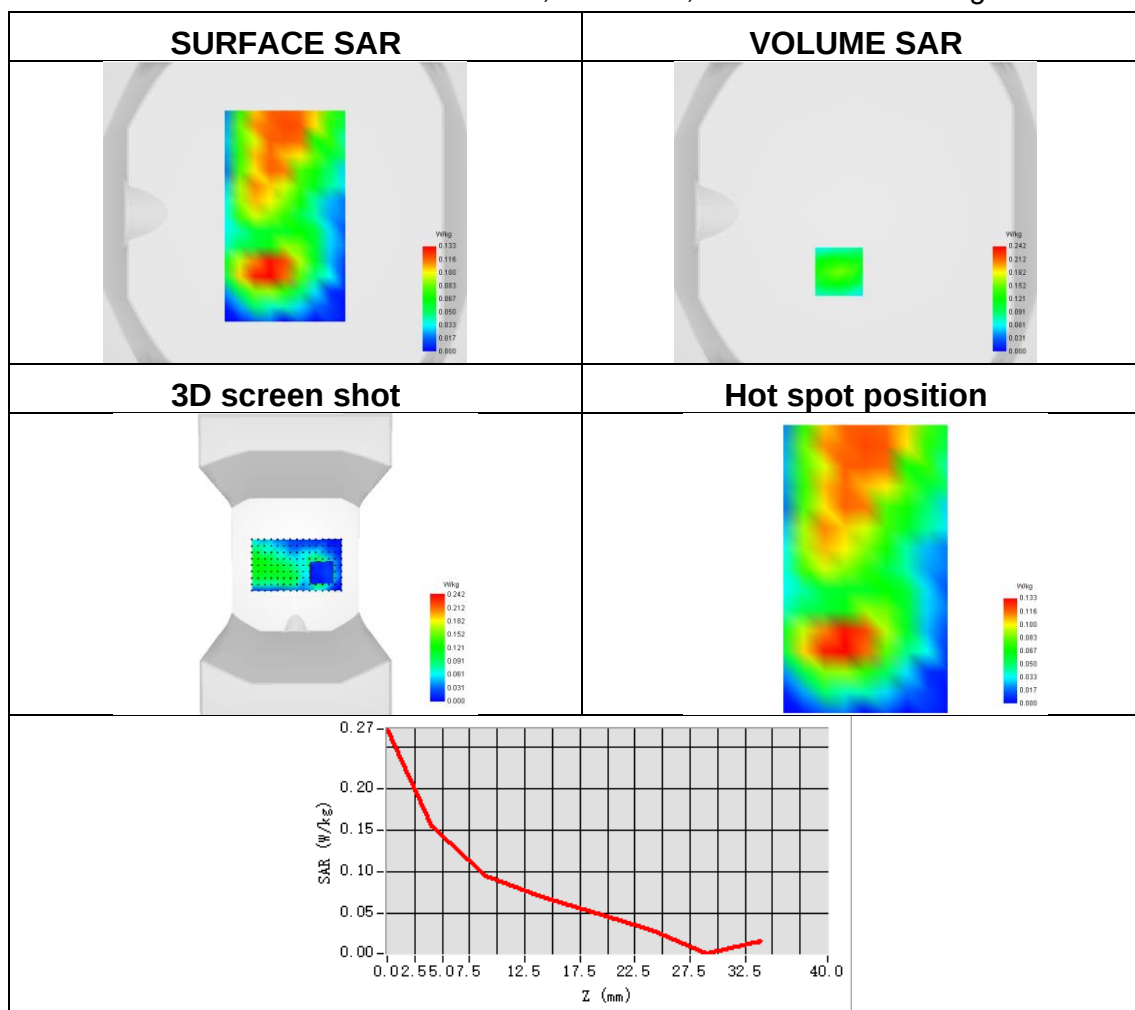




Plot 42:

Test Date	2026-04-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.341
ConvF	1.34
Relative permittivity	40.92
Conductivity (S/m)	1.38

Maximum location: X=-1.00, Y=37.00 ; SAR Peak: 1.27 W/kg

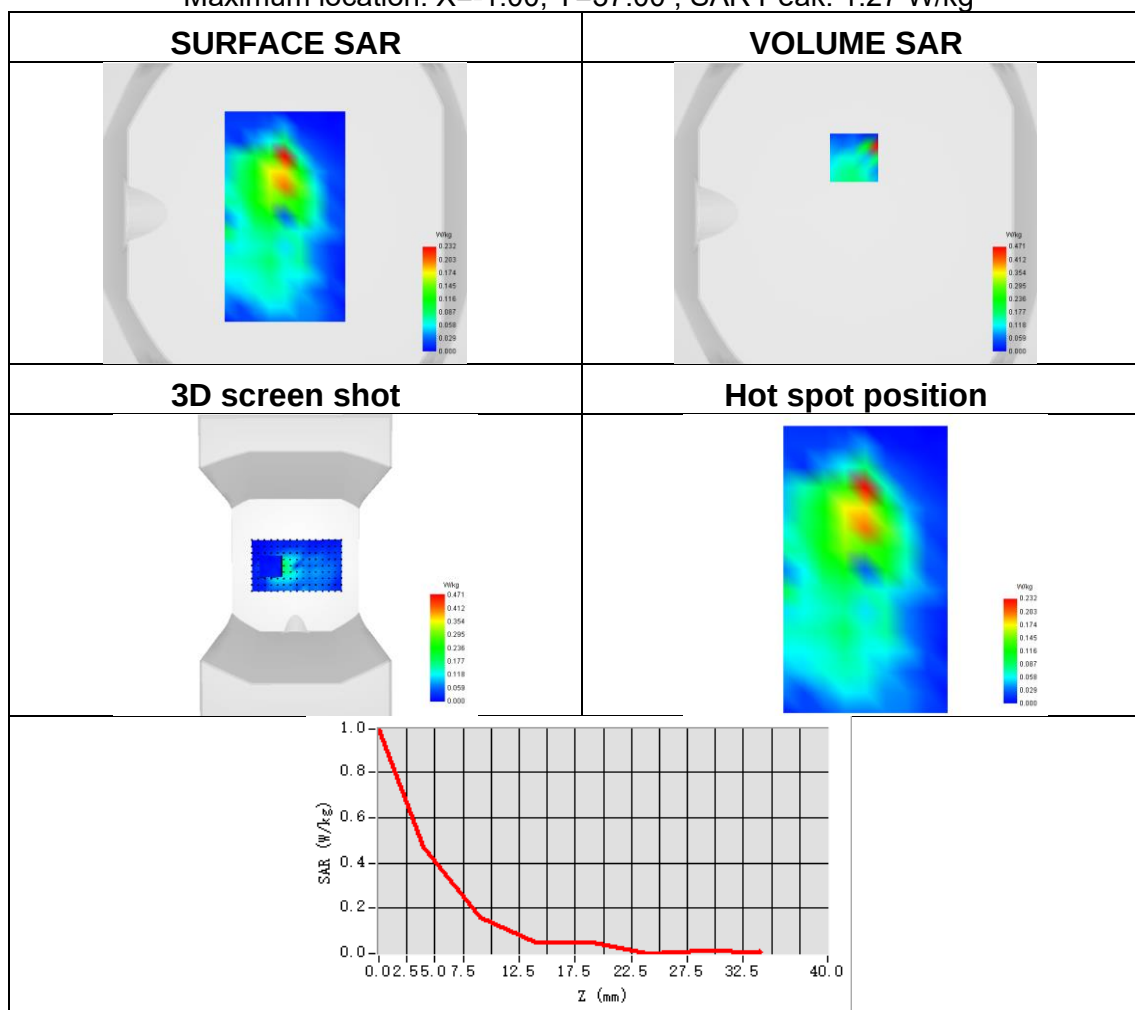




Plot 43:

Test Date	2026-04-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.276
SAR 1g (W/Kg)	0.424
ConvF	1.34
Relative permittivity	40.92
Conductivity (S/m)	1.38

Maximum location: X=9.00, Y=10.00 ; SAR Peak: 0.62 W/kg

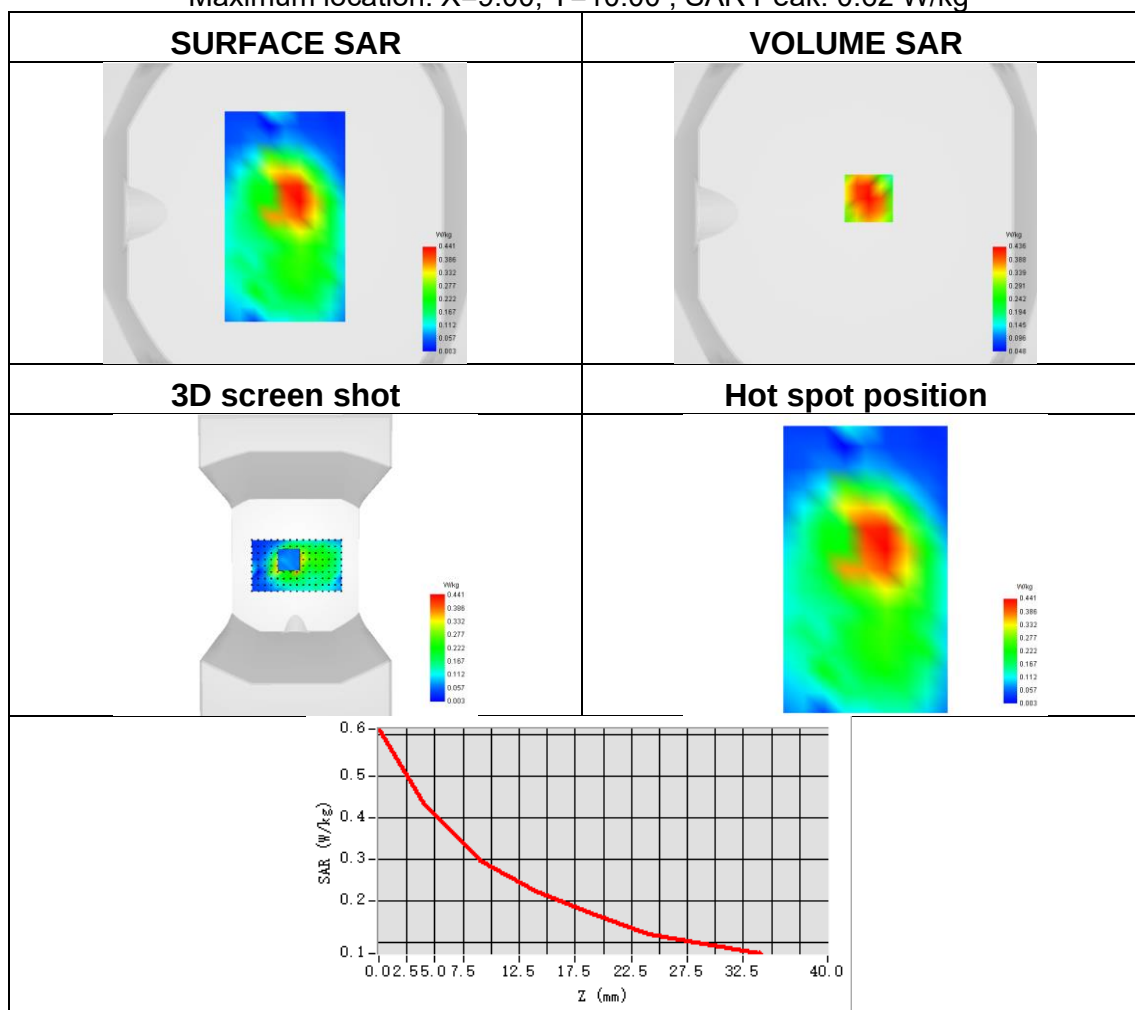




Plot 44:

Test Date	2026-04-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1712.6
SAR 10g (W/Kg)	0.189
SAR 1g (W/Kg)	0.299
ConvF	1.21
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=9.00, Y=10.00 ; SAR Peak: 0.48 W/kg

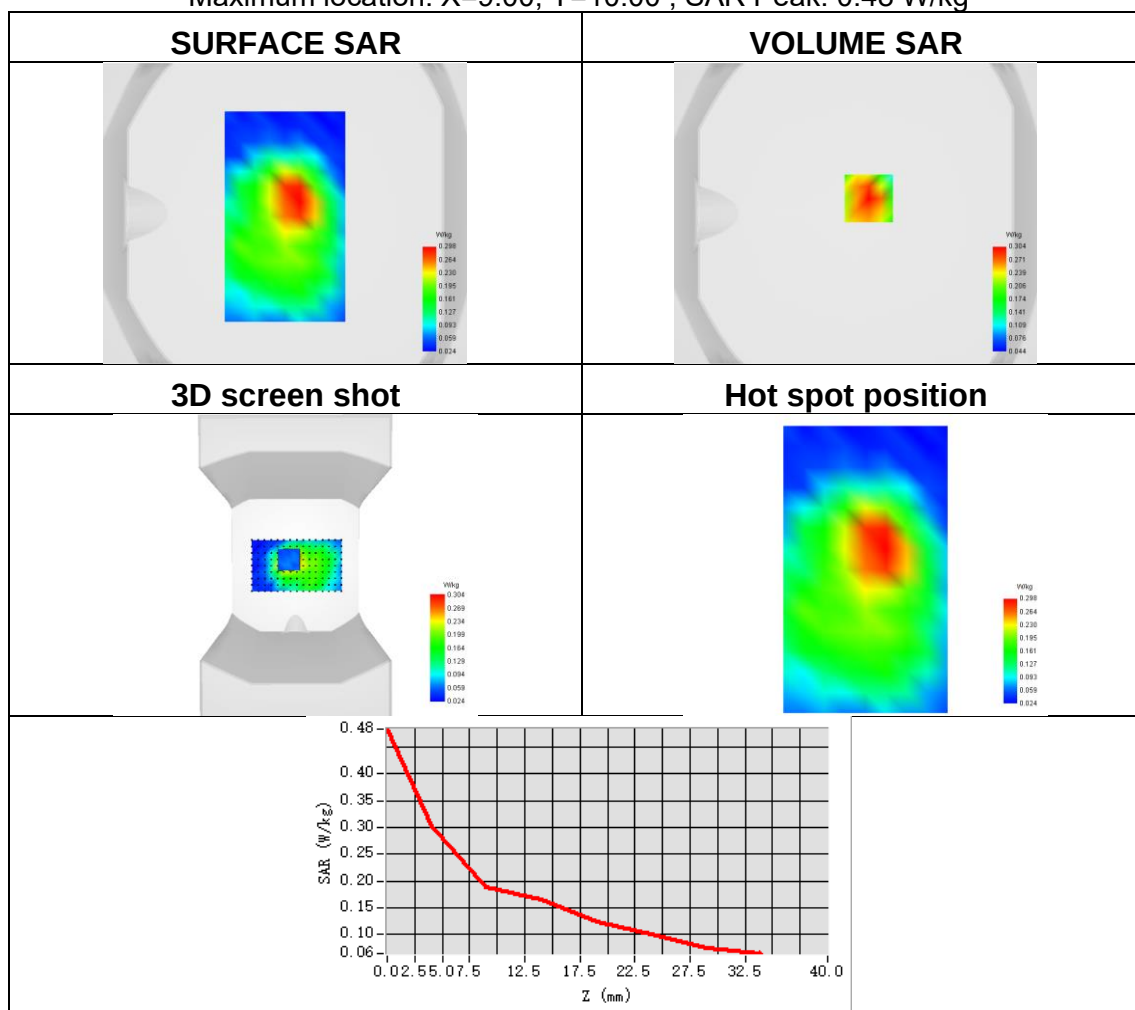




Plot 45:

Test Date	2026-04-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.094
SAR 1g (W/Kg)	0.162
ConvF	1.02
Relative permittivity	42.10
Conductivity (S/m)	0.91

Maximum location: X=0.00, Y=1.00 ; SAR Peak: 0.24 W/kg

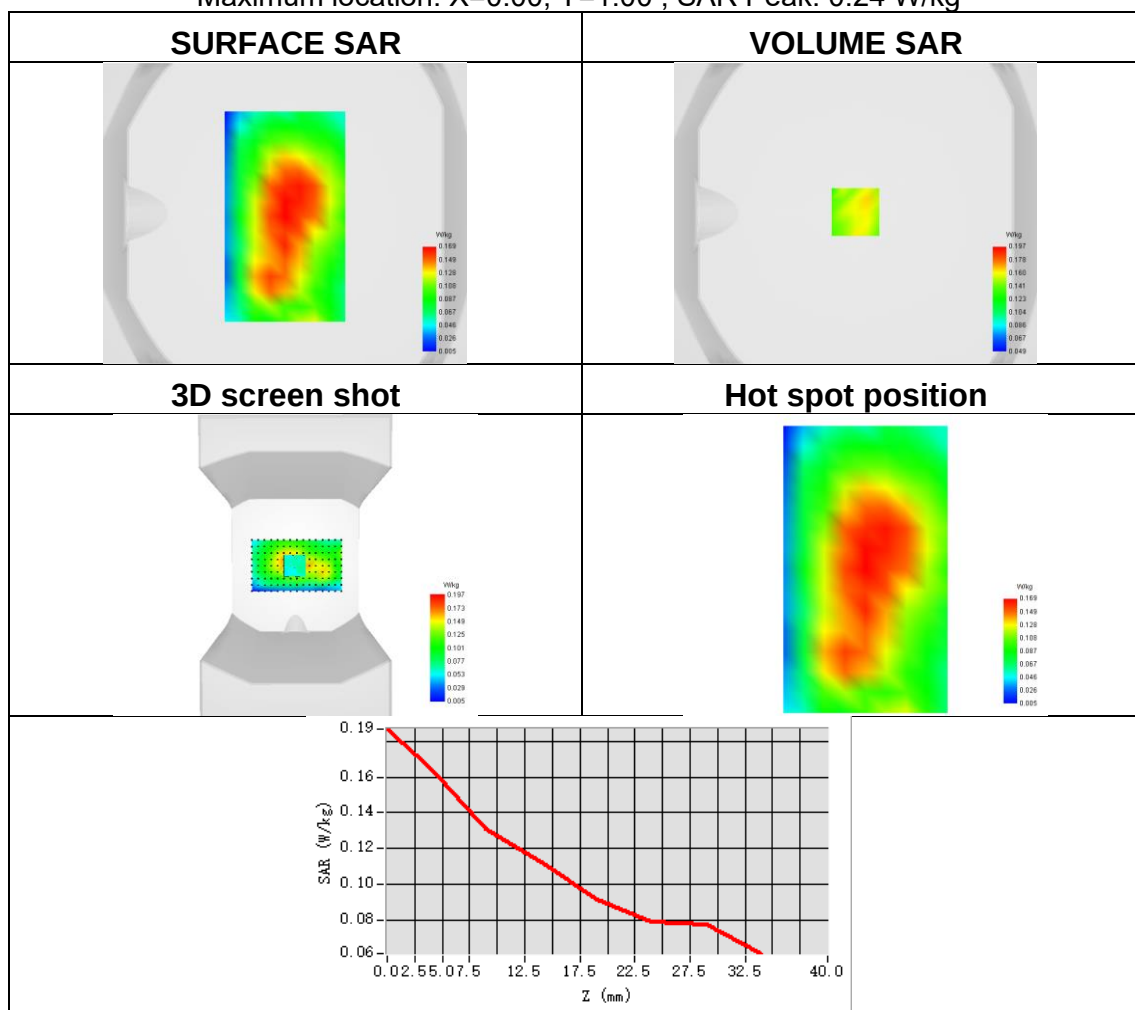




Plot 46:

Test Date	2026-04-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2437
SAR 10g (W/Kg)	0.061
SAR 1g (W/Kg)	0.129
ConvF	1.51
Relative permittivity	39.81
Conductivity (S/m)	1.75

Maximum location: X=0.00, Y=24.00 ; SAR Peak: 0.39 W/kg

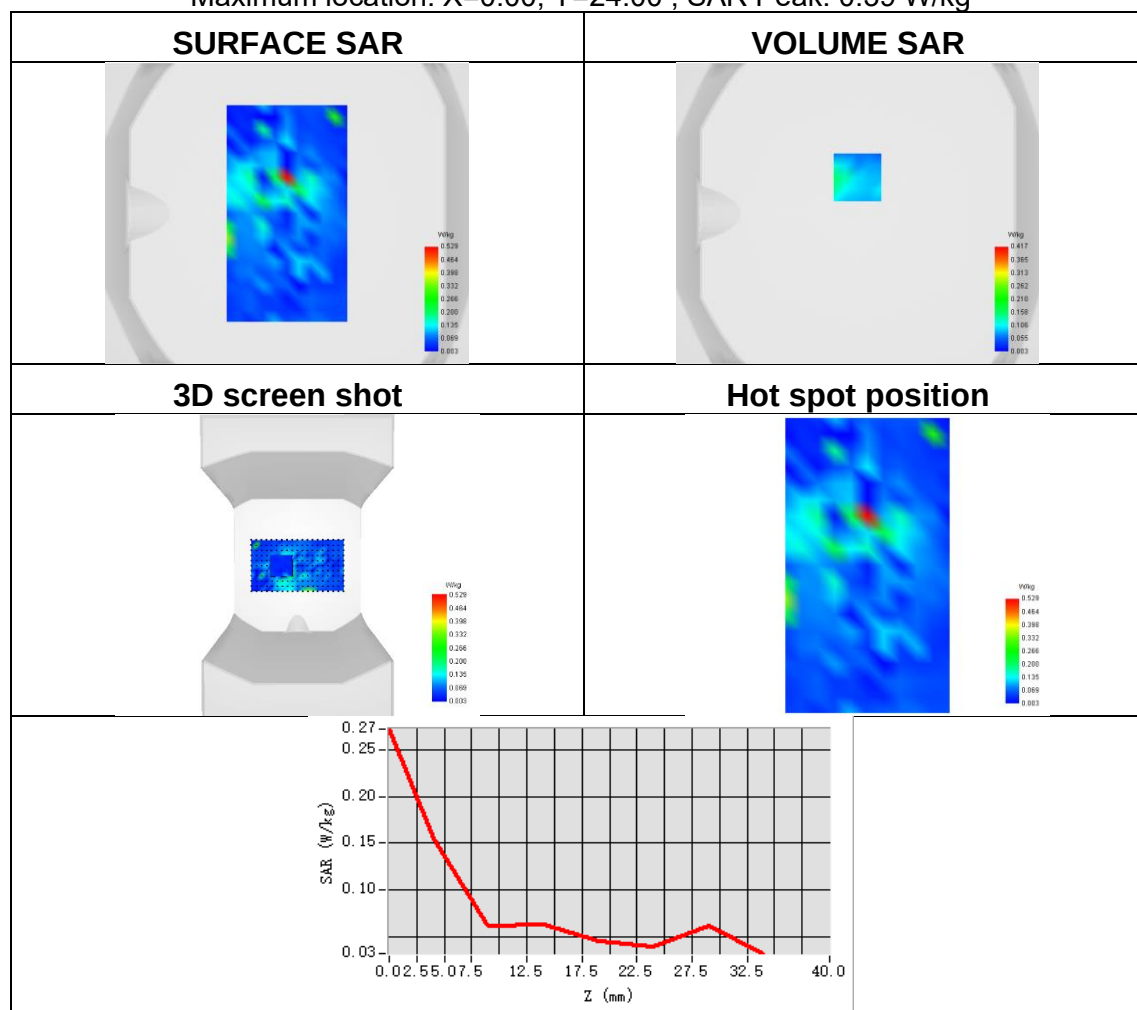




Plot 47:

Test Date	2026-04-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.240
SAR 1g (W/Kg)	0.363
ConvF	1.58
Relative permittivity	36.87
Conductivity (S/m)	4.60

Maximum location: X=0.00, Y=-24.00 ; SAR Peak: 0.75 W/kg

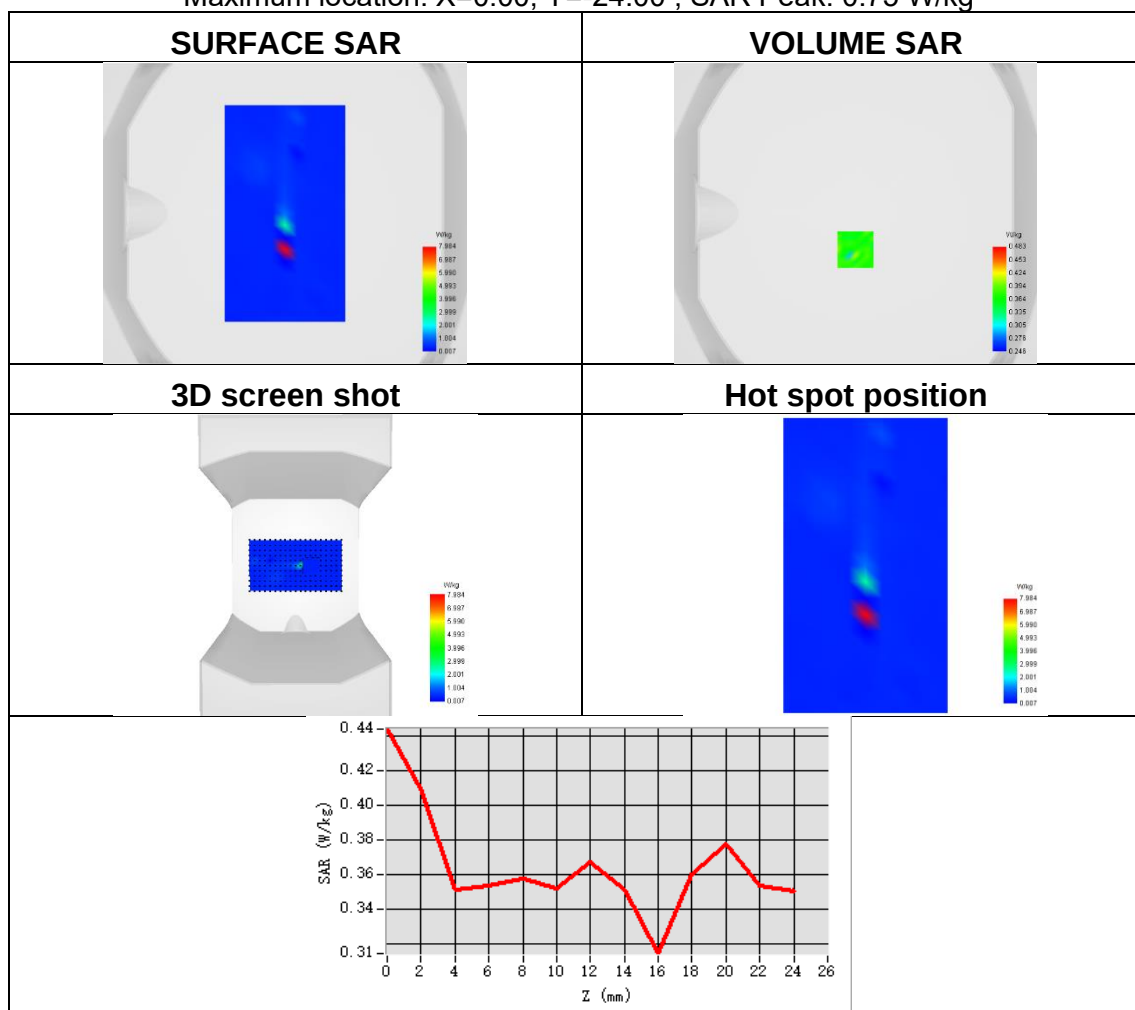




Plot 48:

Test Date	2026-04-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a
Signal	IEEE 802.11 a
Frequency	5260
SAR 10g (W/Kg)	0.114
SAR 1g (W/Kg)	0.289
ConvF	1.60
Relative permittivity	36.30
Conductivity (S/m)	4.89

Maximum location: X=-26.00, Y=28.00 ; SAR Peak: 4.57 W/kg

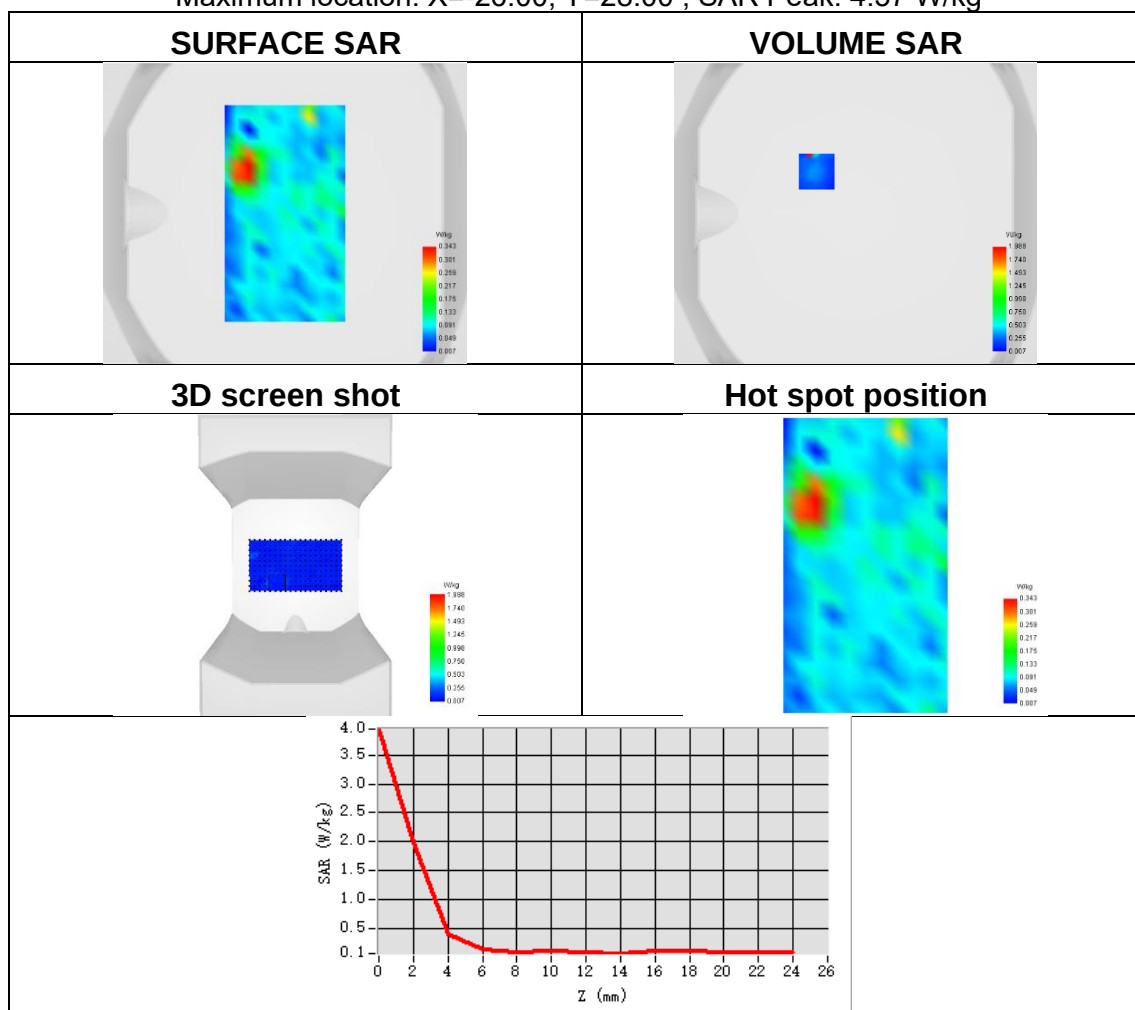




Plot 49:

Test Date	2026-04-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.244
SAR 1g (W/Kg)	0.427
ConvF	1.63
Relative permittivity	36.41
Conductivity (S/m)	5.11

Maximum location: X=-9.00, Y=24.00 ; SAR Peak: 0.81 W/kg

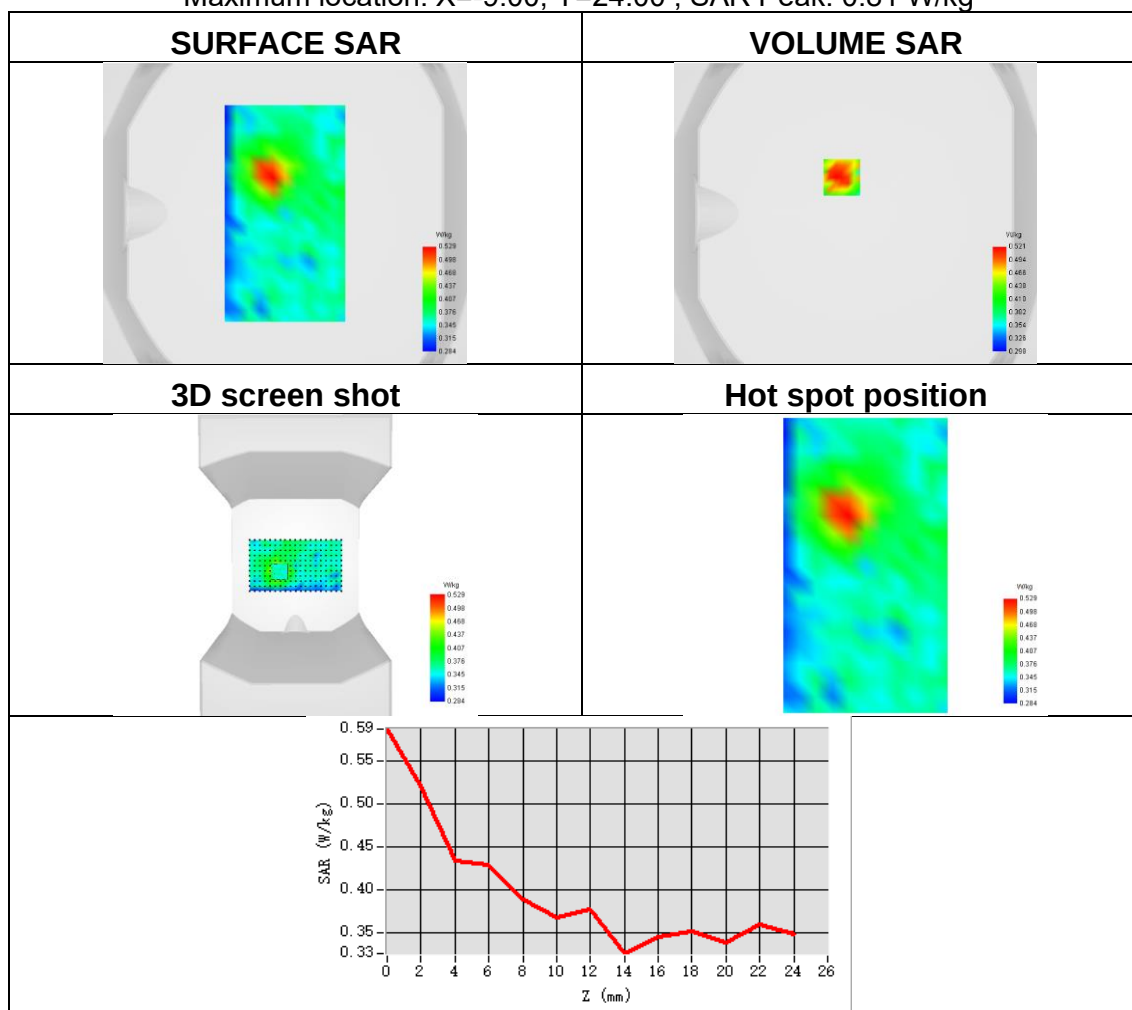




Plot 50:

Test Date	2026-04-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.369
SAR 1g (W/Kg)	0.479
ConvF	1.62
Relative permittivity	35.93
Conductivity (S/m)	5.30

Maximum location: X=-16.00, Y=24.00 ; SAR Peak: 0.76 W/kg

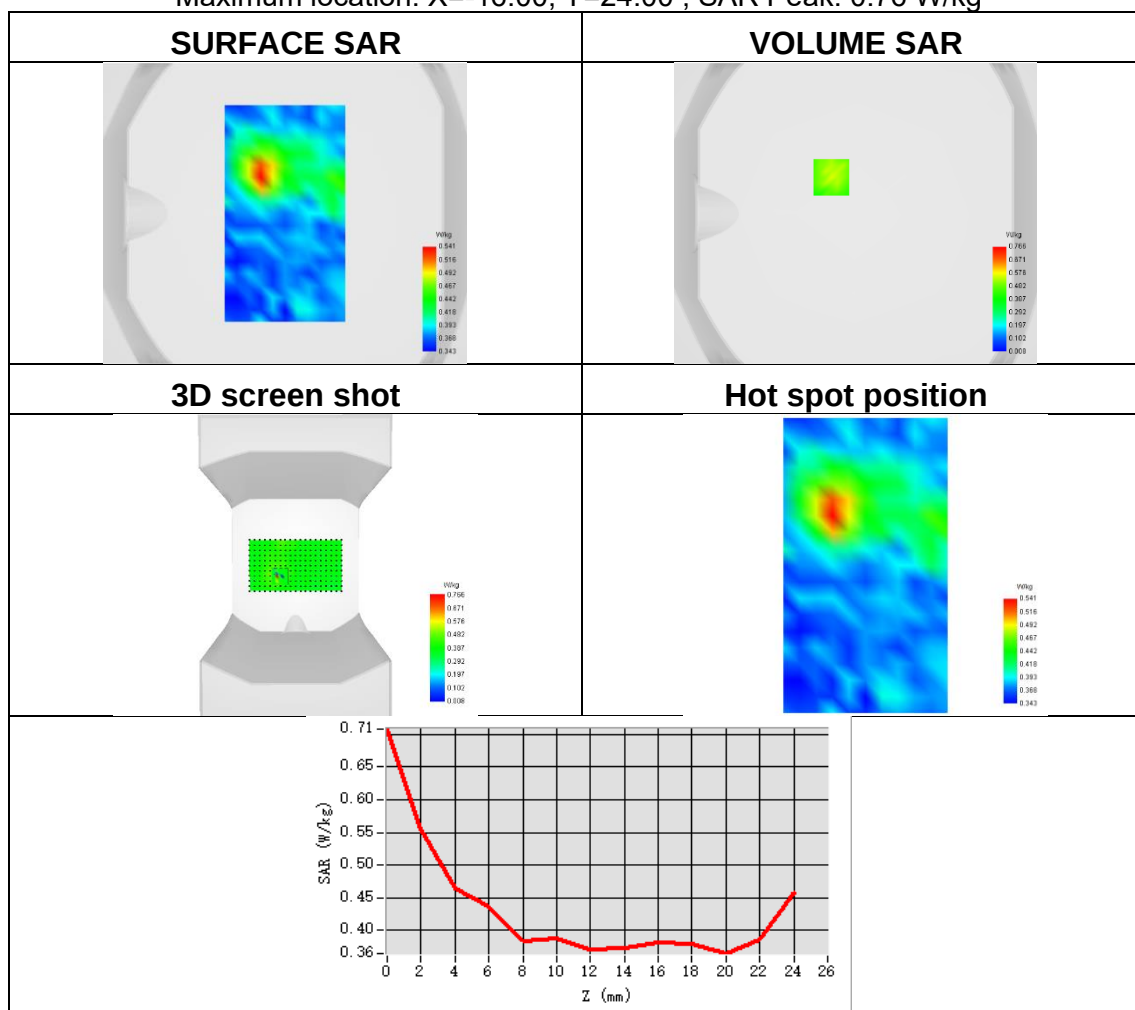




Plot 51:

Test Date	2026-04-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.238
SAR 1g (W/Kg)	0.442
ConvF	1.34
Relative permittivity	40.92
Conductivity (S/m)	1.38

Maximum location: X=20.00, Y=35.00 ; SAR Peak: 0.76 W/kg

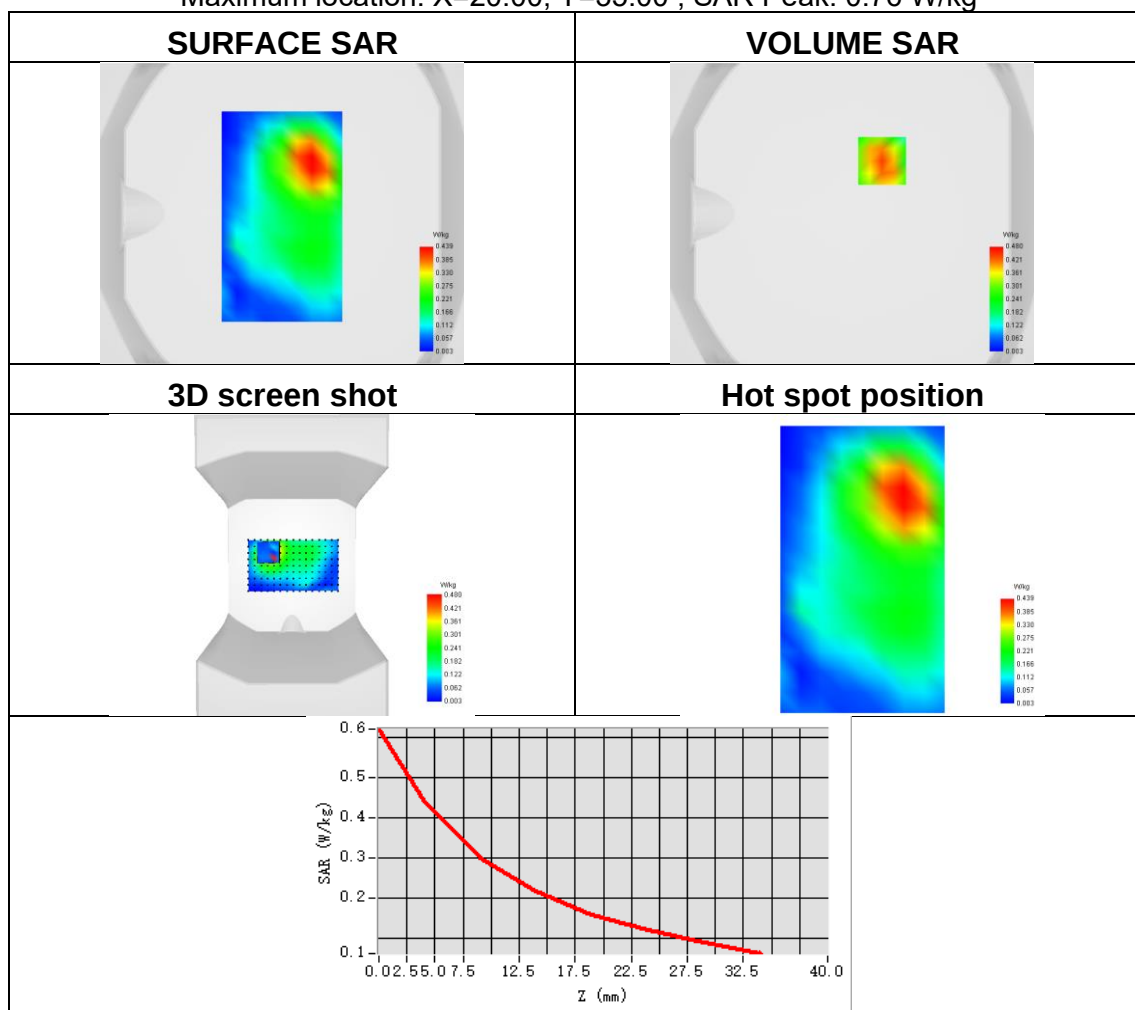




Plot 52:

Test Date	2026-04-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.218
SAR 1g (W/Kg)	0.343
ConvF	1.21
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=20.00, Y=35.00 ; SAR Peak: 0.52 W/kg

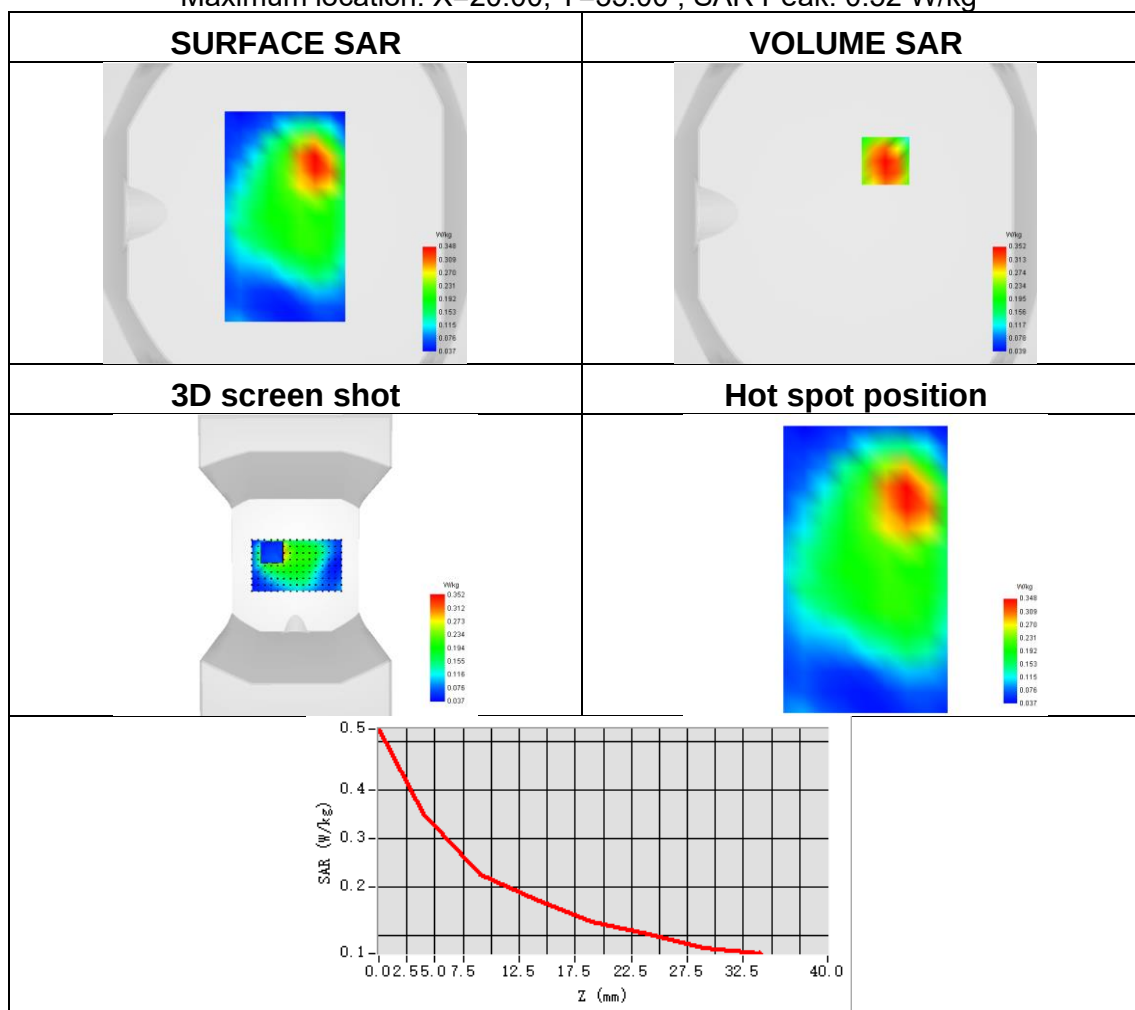




Plot 53:

Test Date	2026-04-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.197
ConvF	1.02
Relative permittivity	42.10
Conductivity (S/m)	0.91

Maximum location: X=20.00, Y=8.00 ; SAR Peak: 0.39 W/kg

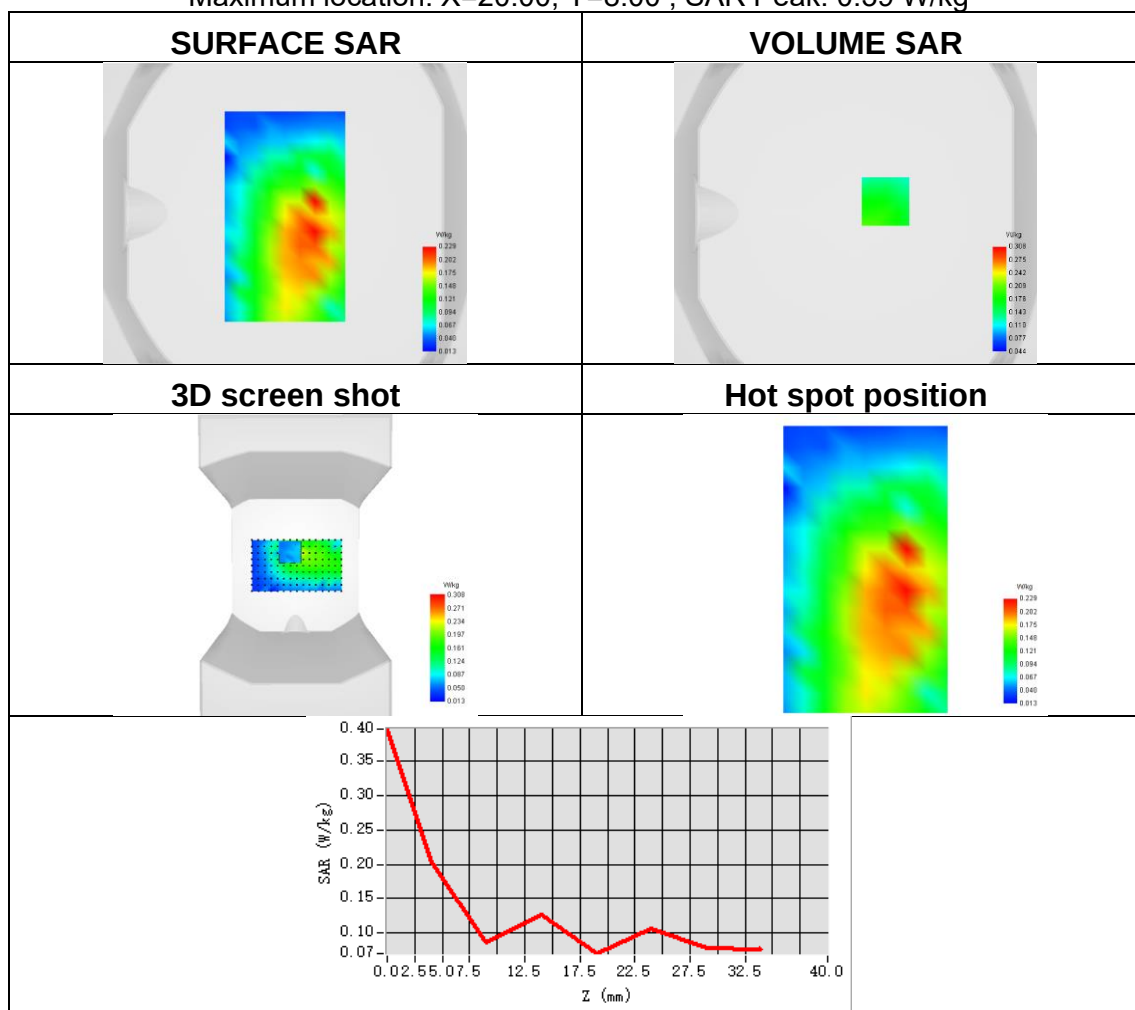




Plot 54:

Test Date	2026-04-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.146
SAR 1g (W/Kg)	0.278
ConvF	1.44
Relative permittivity	39.60
Conductivity (S/m)	1.95

Maximum location: X=-10.00, Y=38.00 ; SAR Peak: 0.45 W/kg

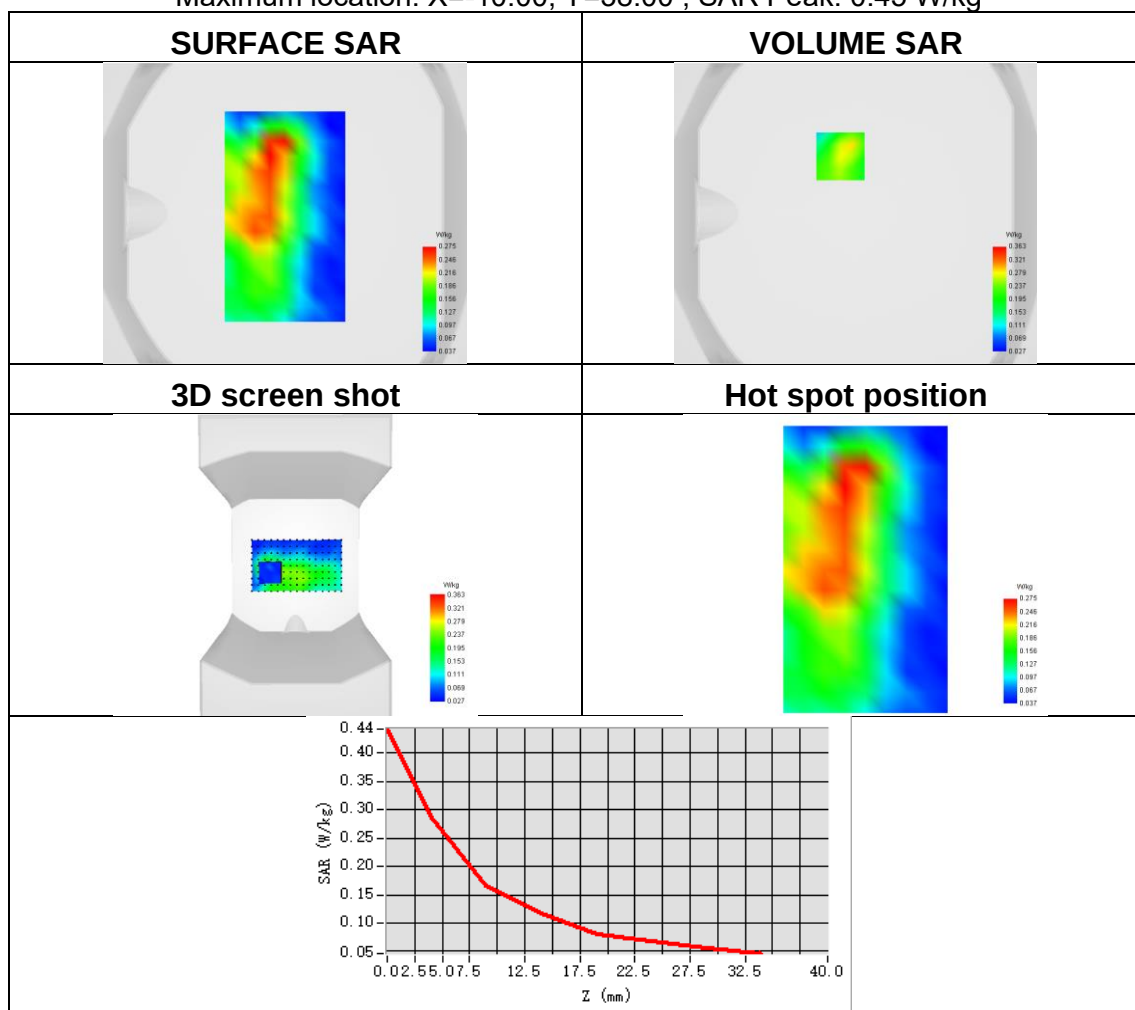




Plot 55:

Test Date	2026-04-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.162
SAR 1g (W/Kg)	0.210
ConvF	1.08
Relative permittivity	42.46
Conductivity (S/m)	0.85

Maximum location: X=0.00, Y=-12.00 ; SAR Peak: 0.26 W/kg

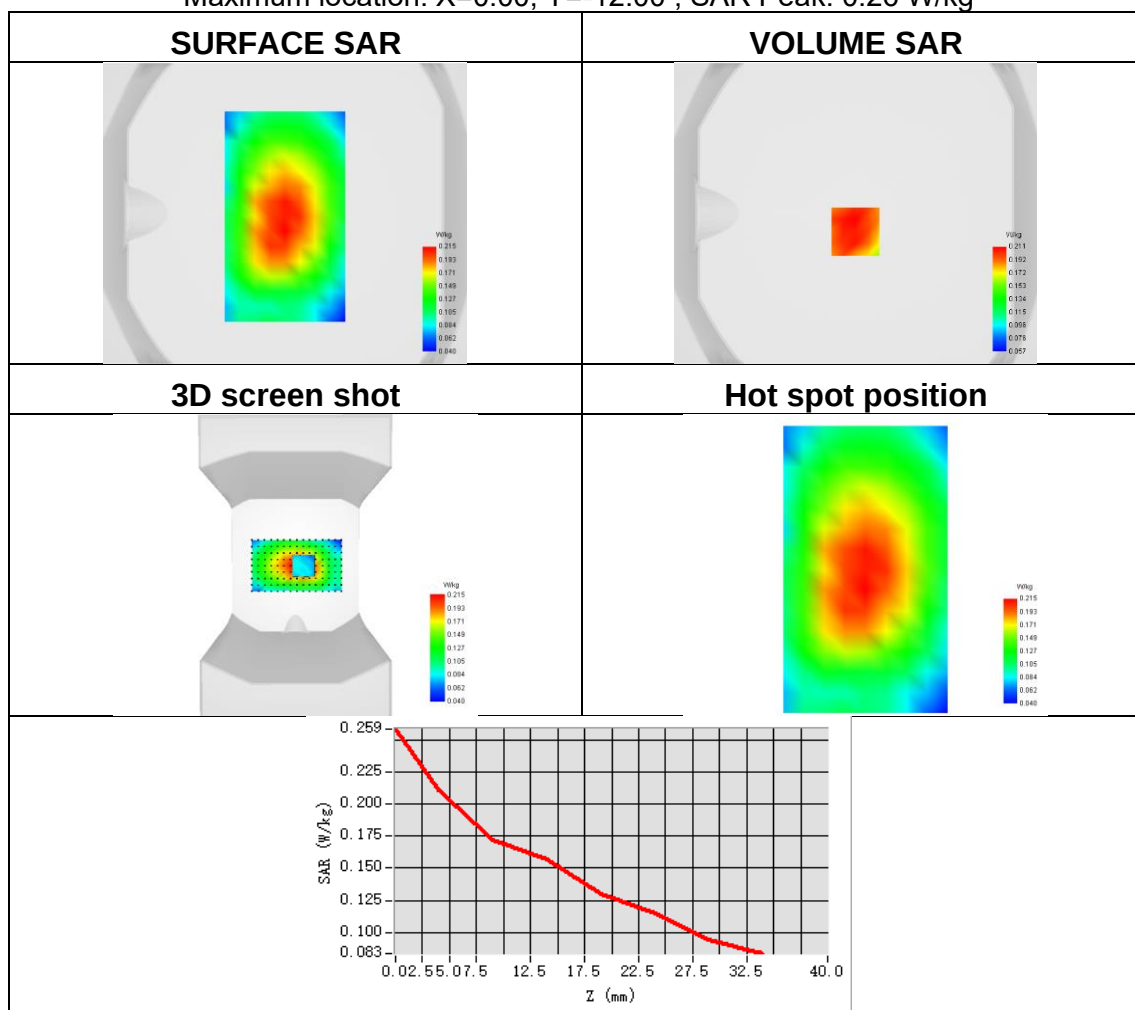




Plot 56:

Test Date	2026-04-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.073
SAR 1g (W/Kg)	0.106
ConvF	1.08
Relative permittivity	42.67
Conductivity (S/m)	0.91

Maximum location: X=-1.00, Y=16.00 ; SAR Peak: 0.14 W/kg

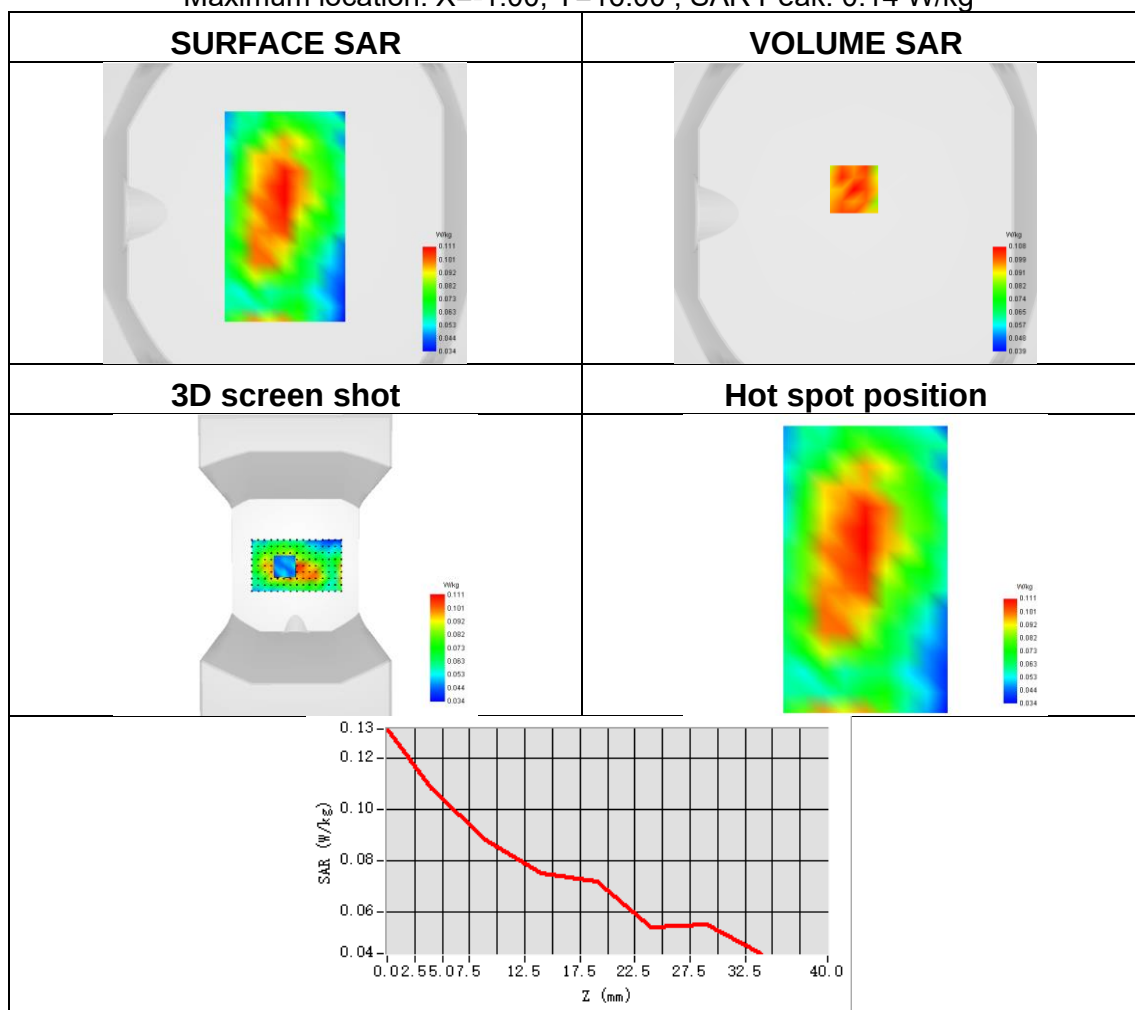




Plot 57:

Test Date	2026-04-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.171
SAR 1g (W/Kg)	0.218
ConvF	1.08
Relative permittivity	42.46
Conductivity (S/m)	0.85

Maximum location: X=-1.00, Y=-11.00 ; SAR Peak: 0.27 W/kg

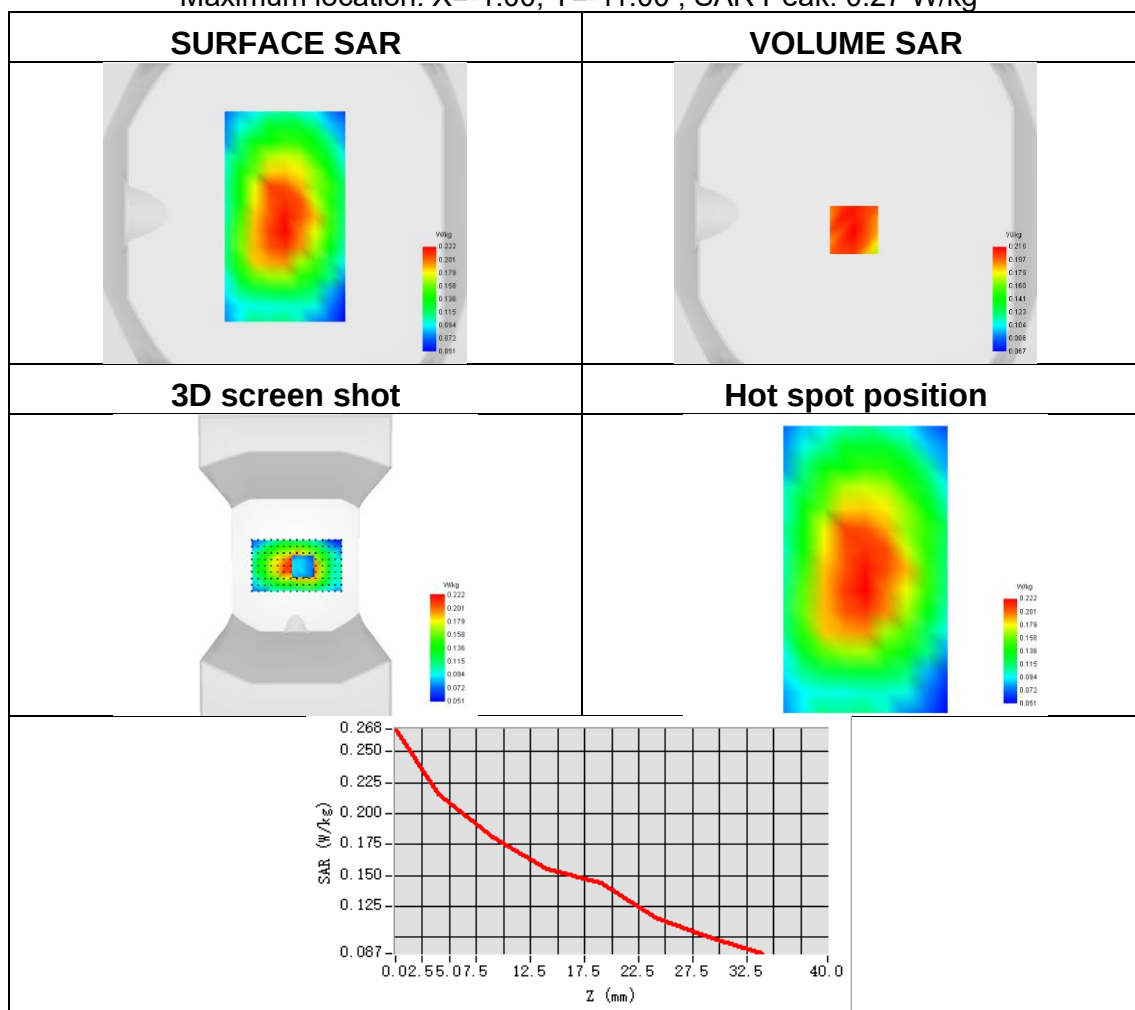




Plot 58:

Test Date	2026-04-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE FDD
Frequency	2580
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.159
ConvF	1.44
Relative permittivity	39.60
Conductivity (S/m)	1.95

Maximum location: X=19.00, Y=38.00 ; SAR Peak: 0.25 W/kg

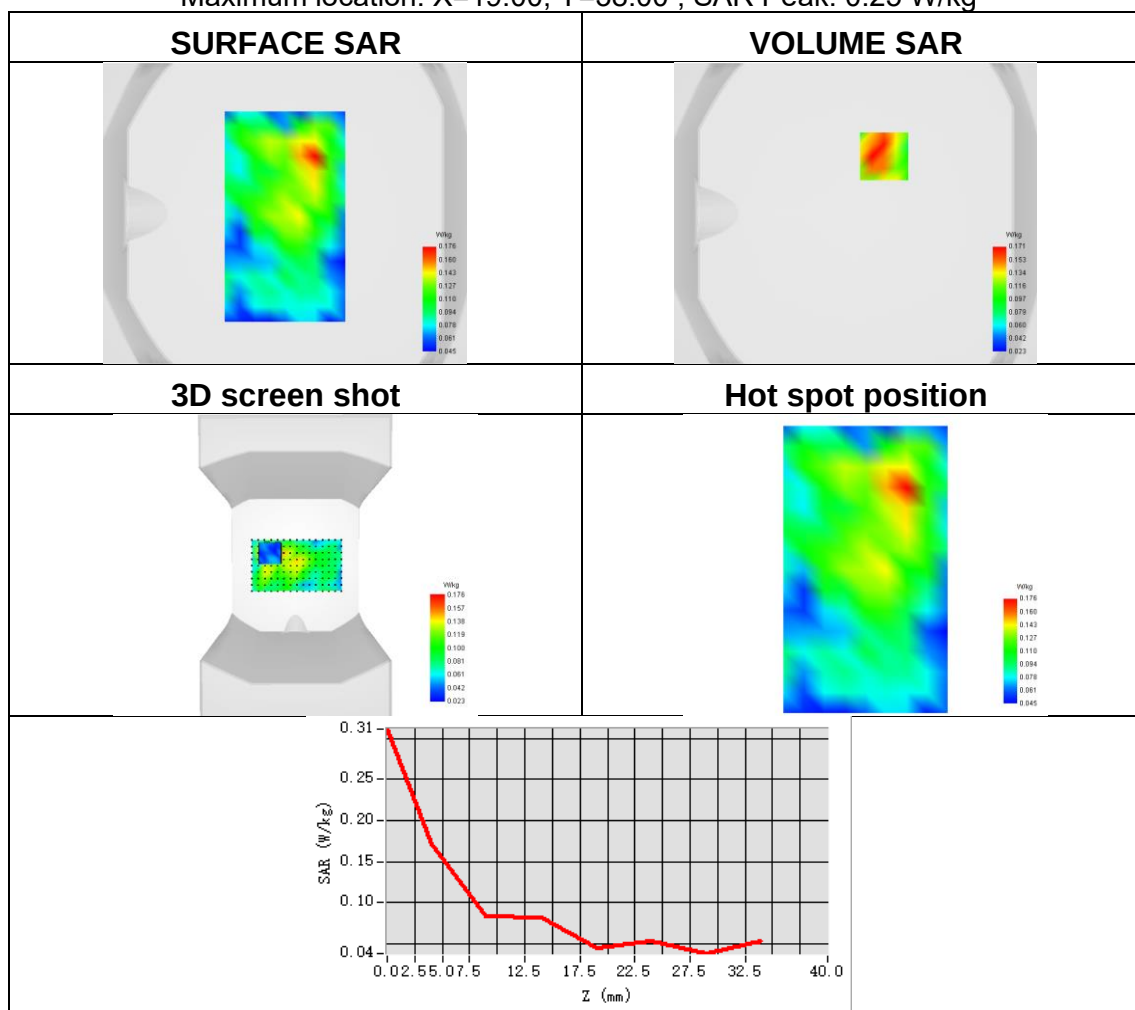




Plot 59:

Test Date	2026-04-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.133
SAR 1g (W/Kg)	0.235
ConvF	1.47
Relative permittivity	40.23
Conductivity (S/m)	1.68

Maximum location: X=20.00, Y=28.00 ; SAR Peak: 0.43 W/kg

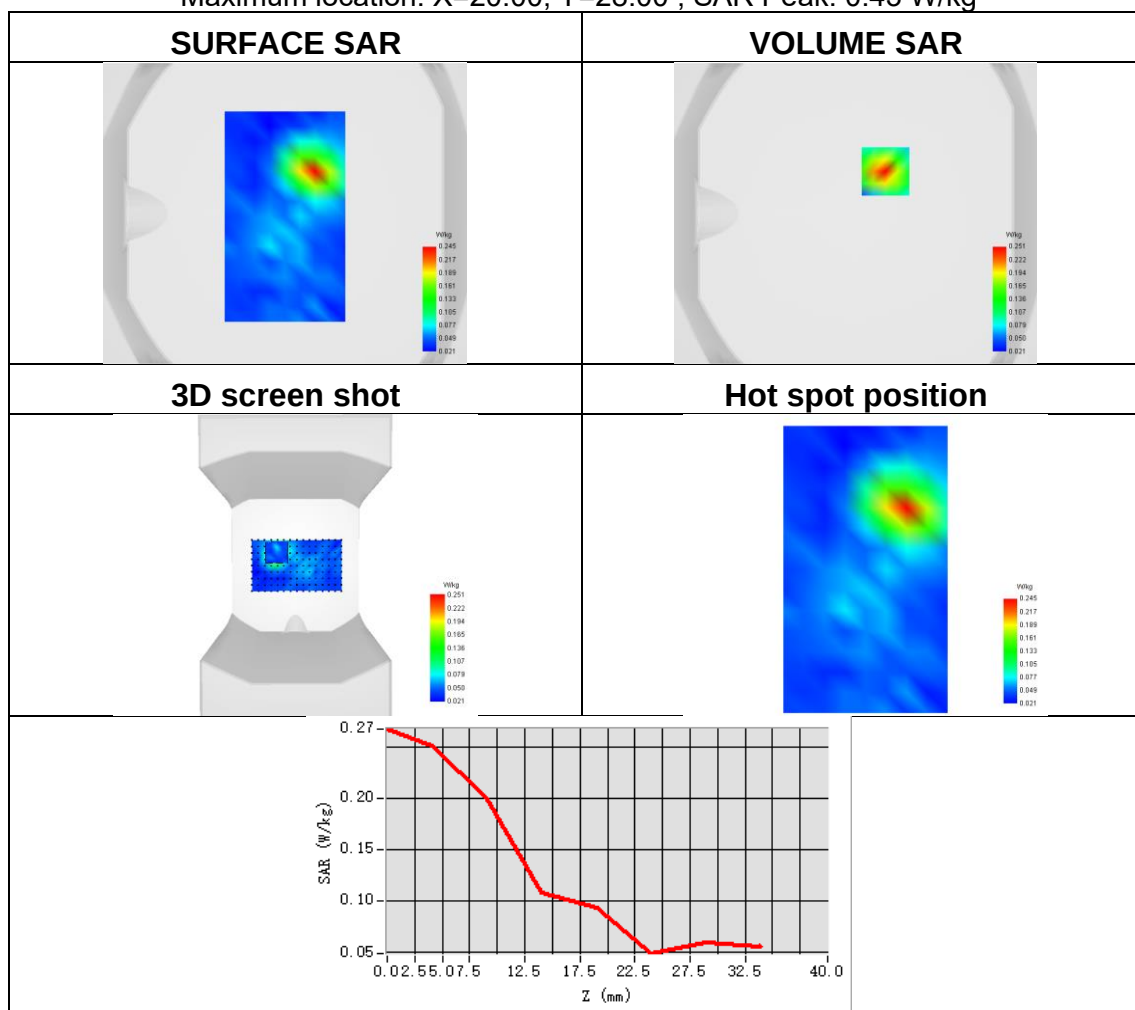




Plot 60:

Test Date	2026-04-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.239
SAR 1g (W/Kg)	0.371
ConvF	1.21
Relative permittivity	40.73
Conductivity (S/m)	1.39

Maximum location: X=10.00, Y=40.00 ; SAR Peak: 0.56 W/kg

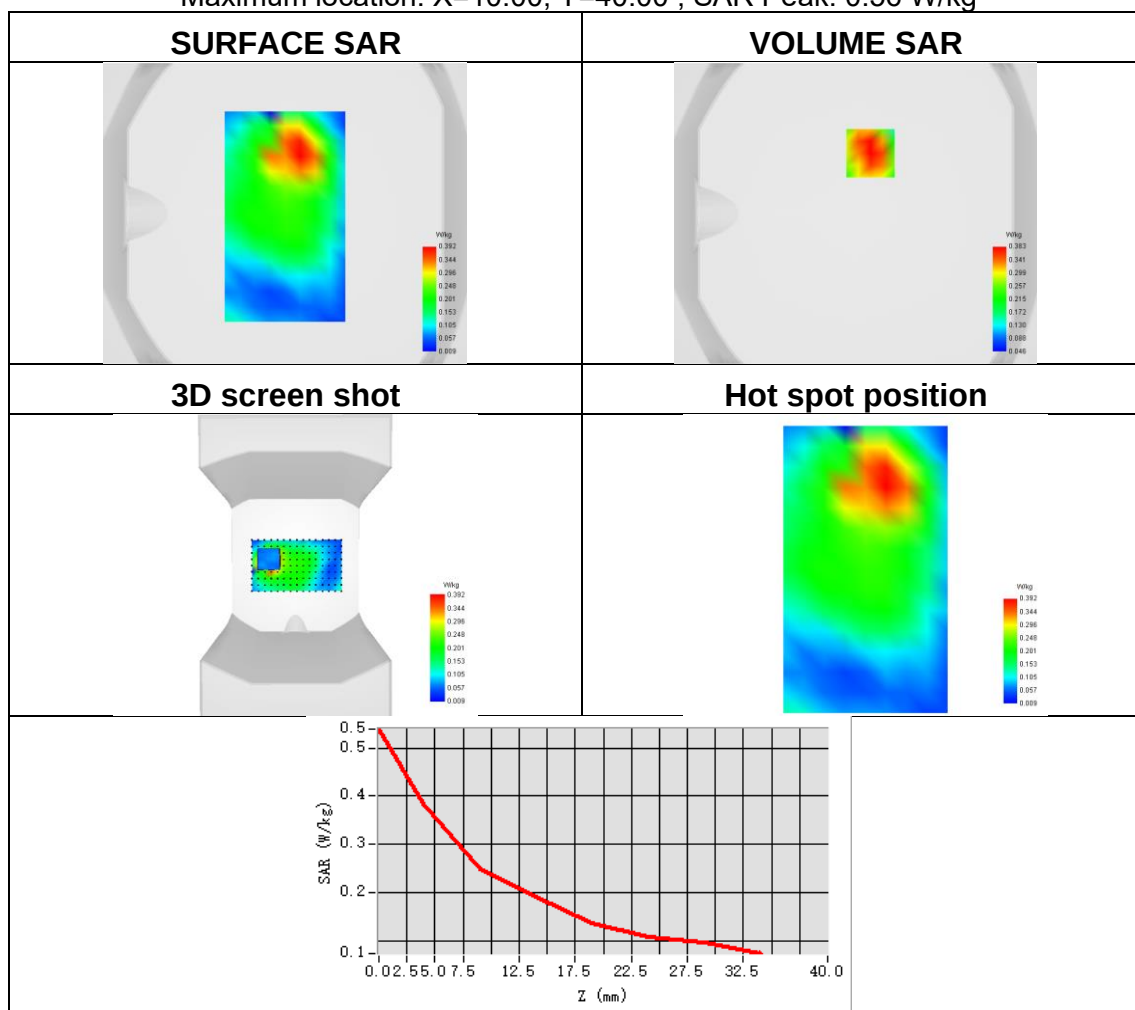



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※