

承 认 书

SPECIFICATION FOR APPROVAL

客 户:
CUSTOMER:

深圳市数联云商科技有限公司
Shenzhen Shulian Yunshang Technology Co., Ltd.

客 户 料 号:
CUST P/N:

COIL

煜 耀 料 号:
YUYAO P/N:

YY-10012

产 品 型 号:
D E S T:

Ø20.5*0.15*28P*10TS-6.4UH-60MM/50*0.8双槽

日 期:
DATE:

2026.05.12

版 本:
VERSION:

V1

制 定 PREPARED BY	审 核 CHECKED BY	批 准 APPROVED BY	客 户 承 认 CUSTOMER APPROVE
郑少东	姚振东	曹前程	



东莞市煜耀电子科技有限公司

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

工厂地址：东莞市塘厦镇莲湖南三横路13号钜鸿智能产业园3楼308

TEL: 13717089408

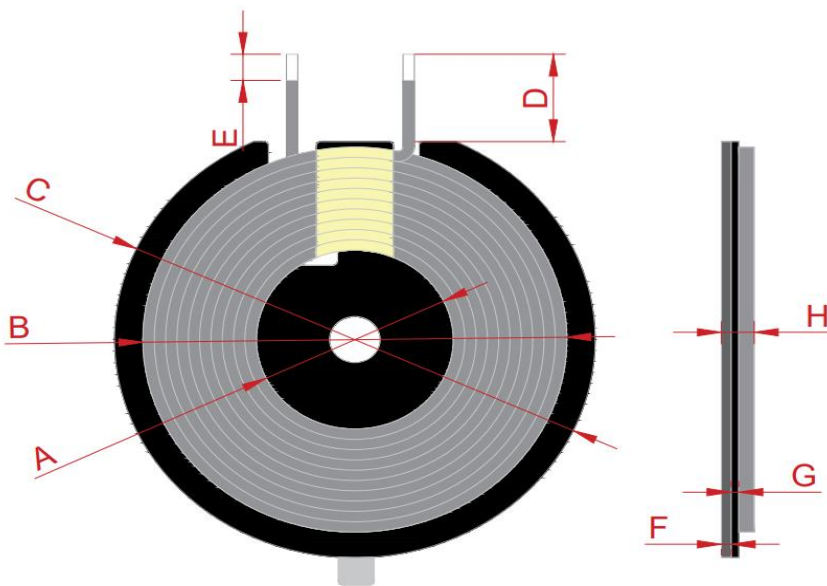
FAX: 0769-82866409

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409

ADD:Room 308, 3rd Floor, Juhong Intelligent Industrial Park, No. 13, Lianhu South Third Horizontal Road, Tangxia Town, Dongguan City

SPECIFICATION APPROVAL

产品型号: D E S T:	Ø20.5*0.15*28P*10TS-6.4UH- 60MM/50*0.8双槽	版 本: VERSION:	V0	客 户: CUSTOMER:	Shenzhen Shulian Yunshang Technology Co., Ltd.	
				客 户 料 号: CUST P/N:	COIL	
				煜 耀 料 号: YUYAO P/N:	YY-10012	
一、尺寸 DIMENSION:(mm) 					A	20.5±0.5
					B	42±1
					C	50±0/-1
					D	60+2.5/-1.5
					E	3±1.5
					F (Double-sided tape)	0.1±0.03
					G (Magnet (chip))	0.8±0.1
					H	2.5 MAX
					I	
					J	
					K	
					L	
Notes: 1. Two lead wires are connected; wrap 8mm high-temperature tape between the two wires. Apply 0.41mm double-sided tape to the back of the magnet piece. 2. The magnet piece is 50*5.3*0.8MMT thick with dual slots.						
制定/日期 PREPARED BY/DATE			审核/日期 CHECKED BY/DATE			
郑少东/2026.05.12			姚振东/2026.05.12			

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409