

TEST REPORT

Product : Rugged Tablet
Trade mark : Emdoor
Model/Type reference : See Clause 3.2
Serial Number : N/A
Report Number : EED32R81404505
FCC ID : 2BLU4-M10N
Date of Issue : Sep. 17, 2025
Test Standards : 47 CFR Part 15 Subpart E
Test result : PASS

Prepared for:

Emdoor Information Co.,Ltd.

**4th Floor, Block B, Haina Baichuan Headquarters Building, No. 6 Baoxing
Road, Haibin Community, Xin'an Street, Bao'an District, Shenzhen,
Guangdong China**


Prepared by:

Centre Testing International Group Co., Ltd.

**Hongwei Industrial Park,Zone 70,Bao'an
District,Shenzhen,Guangdong,China**

TEL: +86-755-3368 3668**FAX: +86-755-3368 3385**

Compiled by:



Shifeng Wei

Reviewed by:



Frazer Li

Approved by:



Aaron Ma

Date:

Sep. 17, 2025

Check No.:1518070825



1 Test Summary

Test Item	Clause in FCC rules	Result
DFS Detection Threshold	15.407/KDB 905462 5.2	PASS
U-NII Detection Bandwidth	15.407/KDB 905462 7.8.1	N/A
Channel Availability Check Time	15.407/KDB 905462 7.8.2	N/A
Channel Move Time	15.407/KDB 905462 7.8.3	PASS
Channel Closing Transmission Time	15.407/KDB 905462 7.8.3	PASS
Non-Occupancy Period	15.407/KDB 905462 7.8.3	PASS
Statistical Performance Check	15.407/KDB 905462 7.8.4	N/A

Remark:

Model No.:M10N, EM-I18N, DCU110, MAS1015, EM-I16N, EM-I20J, EM-I61N, EM-I88N, EM-IS19N, EM-I10N, EM-I20N, EM-Q19, EM-I22N, EM-I10A, EM-Q225M, EM-Q225MP, EM-Q885M, EM-T11X, EM-T81X, EM-T89, EM-T19, A14,A15, EM-A15, EM-A14, EM-A15-ASH, EM-A14-AHP, EM-A14-PTL, M105Q, M805Q, EM-I14A, EM-I14M, EM-I80A, N14A, N14M, N15A, N15M, V10J, V80J, P15A, P21A, P10J , P15J, P21J, M10J, M80A, M80N, M10A, M20A, M20J, M14A, M14M, M82A, EM-Q89, EM-P18A, EM-P18J, EM-P18R, EM-P17A, EM-P17J, EM-P17R, EM-P21A, EM-P21J, EM-P21R

Only the model M10N was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance, pack and model name.

2 Content

1 TEST SUMMARY	2
2 CONTENT	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 DESCRIPTION OF SUPPORT UNITS	7
3.4 TEST LOCATION	7
3.5 APPLIED STANDARDS	7
4 EQUIPMENT LIST	8
5 DFS TECHNICAL REQUIREMENTS AND RADAR TEST WAVEFORMS	9
5.1 DFS OVERVIEW	9
5.2 DFS DETECTION THRESHOLDS	10
5.3 RADAR TEST WAVEFORMS	11
5.3.1 <i>Short Pulse Radar Test Waveforms</i>	11
5.3.2 <i>Long Pulse Radar Test Waveforms</i>	13
6 TEST REQUIREMENT TEST SETUP	14
7 TEST CASE RESULTS	16
7.1 DFS DETECTION THRESHOLDS	16
7.2 IN-SERVICE MONITORING FOR CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON- OCCUPANCY PERIOD	17
DFS TEST SETUP	19
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	20

3 General Information

3.1 Client Information

Applicant:	Emdoor Information Co.,Ltd.
Address of Applicant:	4th Floor, Block B, Haina Baichuan Headquarters Building, No. 6 Baoxing Road, Haibin Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong China
Manufacturer:	Emdoor Information Co.,Ltd.
Address of Manufacturer:	4th Floor, Block B, Haina Baichuan Headquarters Building, No. 6 Baoxing Road, Haibin Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong China
Factory:	Emdoor Information Co.,Ltd.
Address of Factory:	6th to 9th floors, Building 1, Emdoor Building, No. 8 Guangke 1st Road, Laokeng Community, Longtian Street, Pingshan District, Shenzhen City

3.2 General Description of EUT

Product Name:	Rugged Tablet
Model No. (EUT):	M10N, EM-I18N, DCU110, MAS1015, EM-I16N, EM-I20J, EM-I61N, EM-I88N, EM-IS19N, EM-I10N, EM-I20N, EM-Q19, EM-I22N, EM-I10A, EM-Q225M, EM-Q225MP, EM-Q885M, EM-T11X, EM-T81X, EM-T89, EM-T19, A14,A15, EM-A15, EM-A14, EM-A15-ASH, EM-A14-AHP, EM-A14-PTL, M105Q, M805Q, EM-I14A, EM-I14M, EM-I80A, N14A, N14M, N15A, N15M, V10J, V80J, P15A, P21A, P10J, P15J, P21J, M10J, M80A, M80N, M10A, M20A, M20J, M14A, M14M, M82A, EM-Q89, EM-P18A, EM-P18J, EM-P18R, EM-P17A, EM-P17J, EM-P17R, EM-P21A, EM-P21J, EM-P21R
Test Model No.:	M10N
Trade Mark:	N/A
Type of Modulation:	IEEE 802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11n(HT20/HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11ac(VHT20/VHT40/VHT80): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) IEEE 802.11ax(HE20/HE40/HE80): OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM,1024QAM)
Operating Frequency	U-NII-2A: 5250-5350MHz U-NII-2C: 5470-5725MHz
Operating Temperature:	-20℃ to +60℃
Sample Type:	Portable production
Test Power Grade:	Default
Test Software of EUT:	DRTU APP
Antenna Type:	FPC Antenna
Antenna and Beamforming Gain:	Antenna gain: ANT1(AUX): U-NII-2A: 2.25dBi U-NII-2C: 3.49dBi ANT2(MAIN): U-NII-2A: 2.81dBi U-NII-2C:3.66dBi

Function	☒ SISO ☐ 2x2 MIMO ☐ 3x3 MIMO ☐ 4x4MIMO	
Operating Mode	☐ Master ☐ Client with radar detection ☒ Client without radar detection	
Power Supply:	Adapter:	Model: WTD48-1204000-G Input: 100 ~240V, 50/60Hz, 1.6A(max) Output: 12V, 4A
Test voltage:	DC 12V	
Sample Received Date:	Aug. 16, 2025	
Sample tested Date:	Aug. 16, 2025 to Sep. 02, 2025	

Operation Frequency each of channel

802.11a/802.11n/802.11ac/802.11ax(20MHz) Frequency/Channel Operations:

U-NII-2A		U-NII-2C	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
52	5260	100	5500
56	5280	104	5520
60	5300	108	5540
64	5320	112	5560
-	-	116	5580
-	-	132	5660
-	-	136	5680
-	-	140	5700

802.11n/802.11ac/802.11ax(40MHz) Frequency/Channel Operations:

U-NII-2A		U-NII-2C	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
54	5270	102	5510
62	5310	110	5550
-	-	134	5670
-	-	142	5710

802.11ac/802.11ax(80MHz) Frequency/Channel Operations:

U-NII-2A		U-NII-2C	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
58	5290	106	5530
-	-	138	5690

3.3 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Asus	FL8700JP1065-0D8GXYQ2X10	FCC&CE	CTI

3.4 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

Designation Number: CN1164

Test Firm Registration Number: 260439

3.5 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 15E Unlicensed National Information Infrastructure Devices

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

FCC KDB 905462 D03 Client Without DFS New Rules v01r02.

4 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-05-2024	12-04-2025
Signal Generator	Keysight	N5182B	MY53051549	11-30-2024	11-29-2025
DC Power	Keysight	E3642A	MY56376072	11-30-2024	11-29-2025
Communication test set	R&S	CMW500	169004	03-03-2025	03-02-2026
RF control unit(power unit)	JS Tonscend	JS0806-2	22G8060592	07-20-2025	07-19-2026
Wi-Fi 7GHz Band Extender	JS Tonscend	TS-WF7U2	2206200002	05-12-2025	05-11-2026
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-30-2024	11-29-2025
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-26-2025	05-25-2026
BT&Wi-Fi Automatic test software	JS Tonscend	JS1120-3	V3.3.20	---	---
Spectrum Analyzer	R&S	FSV3044	101509	02-14-2025	02-13-2026

5 DFS Technical Requirements and Radar Test Waveforms

5.1 DFS Overview

Table 1 Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client without Radar Detection	Client with Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2 Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not require
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

5.2 DFS Detection Thresholds

Table 3 DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value(See Notes 1, 2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4 DFS Response Requirement Values

Parameter	Value
Non- occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60milliseconds over remaining 10 second period. See Notes 1 and 2
U-NII Detection Bandwidth	Minimum 100% of the UNII99% transmission power bandwidth See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

5.3 Radar Test Waveforms

5.3.1 Short Pulse Radar Test Waveforms

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses

would be $\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Round up } \{17.2\} = 18.$

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

5.3.2 Long Pulse Radar Test Waveforms

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.


Table 7 – Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm: The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.


6 Test Requirement Test setup

Setup for Master with injection at the Master

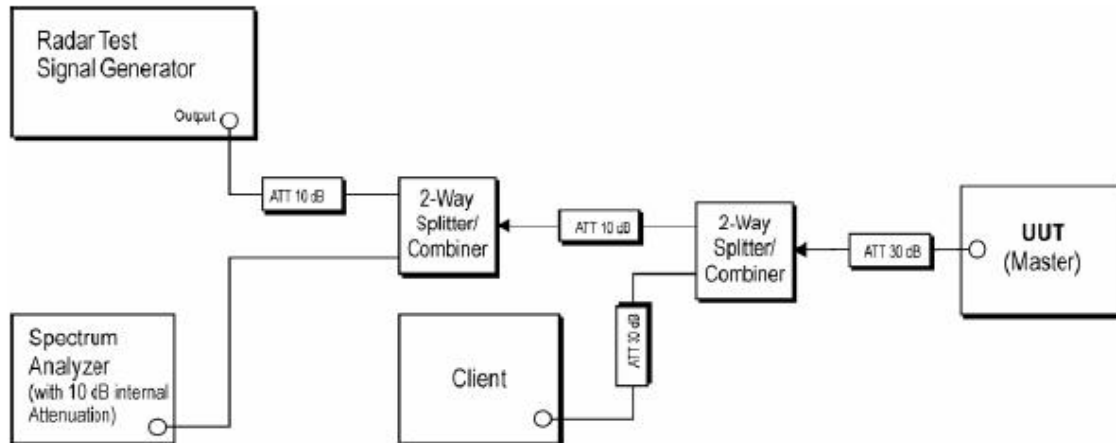


Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master.

Setup for Client with injection at the Master

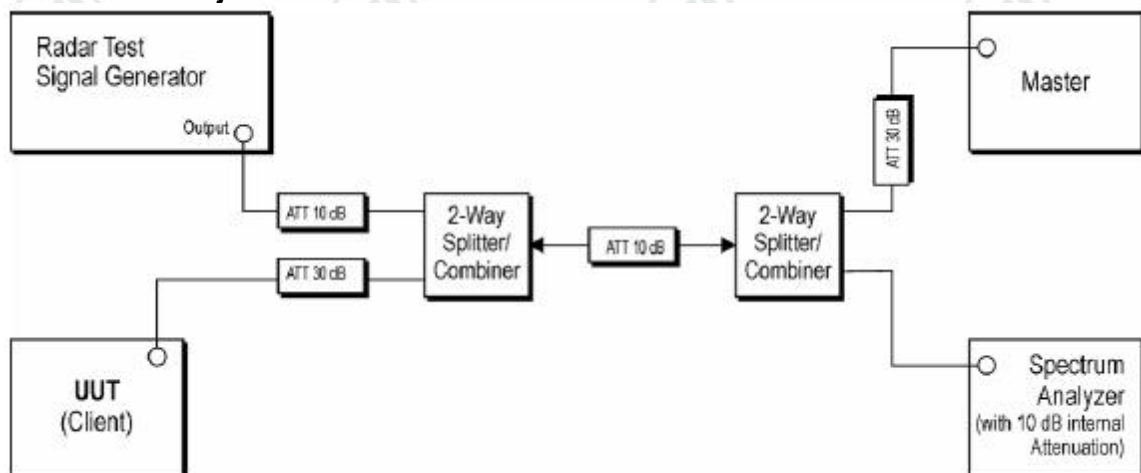

Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

Setup for Client with injection at the Client

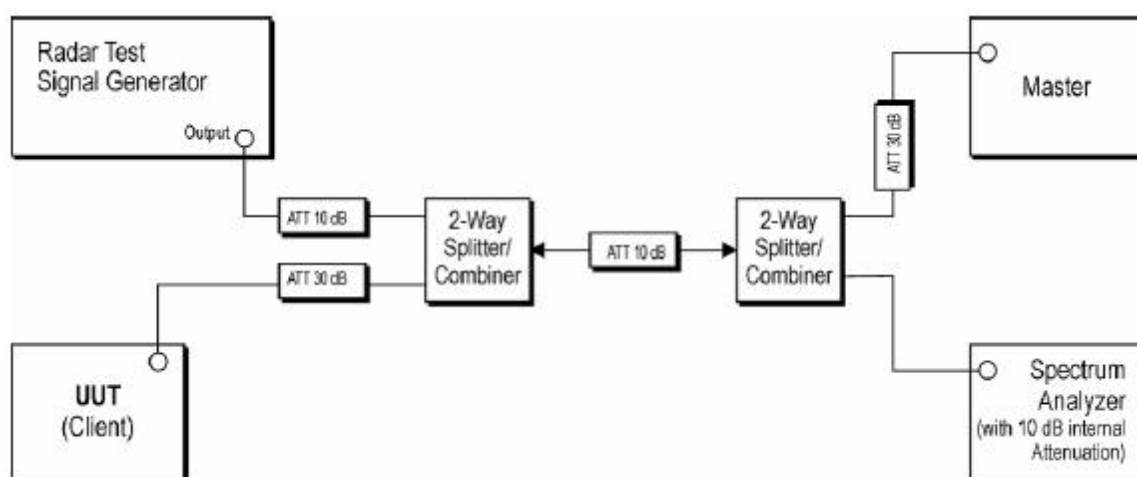

Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Client.

7 Test Case Results

7.1 DFS Detection Thresholds

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Client with injection at the Master.

For a detection threshold level of -64dBm, the required signal strength at EUT antenna location is -64dBm, the tested level is lower than required level hence it provides margin to the limit.

Calibration Result

Refer to Appendix DFS.

7.2 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

These tests define how the following DFS parameters are verified during In-Service Monitoring;


- Channel Closing Transmission Time
- Channel Move Time
- Non-Occupancy Period

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

1. One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
2. In case the EUT is a U-NII device operating as a Client Device (with or without DFS), a U-NII device operating as a Master Device will be used to allow the EUT (Client device) to Associate with the Master Device. In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will Associate with the EUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
3. Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
4. At time T0 the Radar Waveform generator sends a Burst of pulses for one of the Radar Type 0 in Table 5 at levels defined in Table 3, on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
5. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs. Figure 17 illustrates Channel Closing Transmission Time.

6. When operating as a Master Device, monitor the EUT for more than 30 minutes following instant T₂ to verify that the EUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.

7. In case the EUT is a U-NII device operating as a Client Device with In-Service Monitoring, perform steps 1 to 6.

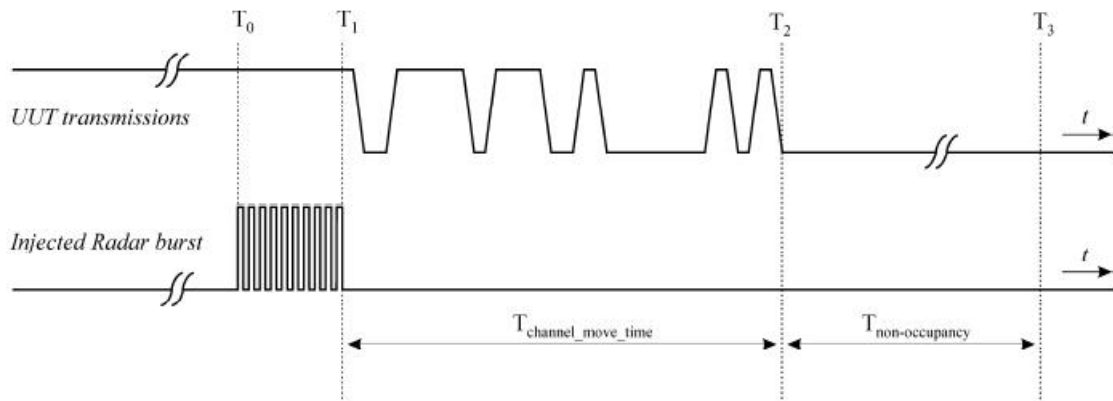

Example of Channel Closing Transmission Time & Channel Closing Time

Limit

Test Item	Limit
Channel Move Time	≤10s
Channel Closing Transmission Time	≤200ms + 60ms (over remaining 10s period)
Non-Occupancy Period	≥30min

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Test Result

Refer to Appendix DFS.

DFS TEST SETUP



PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No.EED32R81404501 for EUT external and internal photos.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***