


Test Mode:	AC20 5500Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

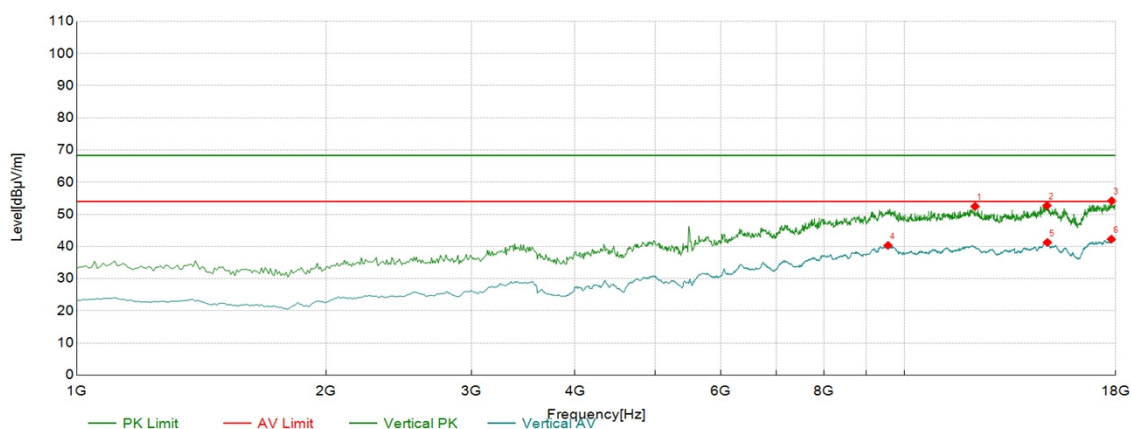

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12174.59	45.42	7.05	52.47	68.30	15.83	PK	Vertical	PASS
2	14870.44	43.84	8.88	52.72	68.30	15.58	PK	Vertical	PASS
3	17804.40	41.92	12.29	54.21	68.30	14.09	PK	Vertical	PASS
4	9555.28	36.00	4.33	40.33	54.00	13.67	AV	Vertical	PASS
5	14887.44	32.35	8.91	41.26	54.00	12.74	AV	Vertical	PASS
6	17787.39	30.14	12.14	42.28	54.00	11.72	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5580Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

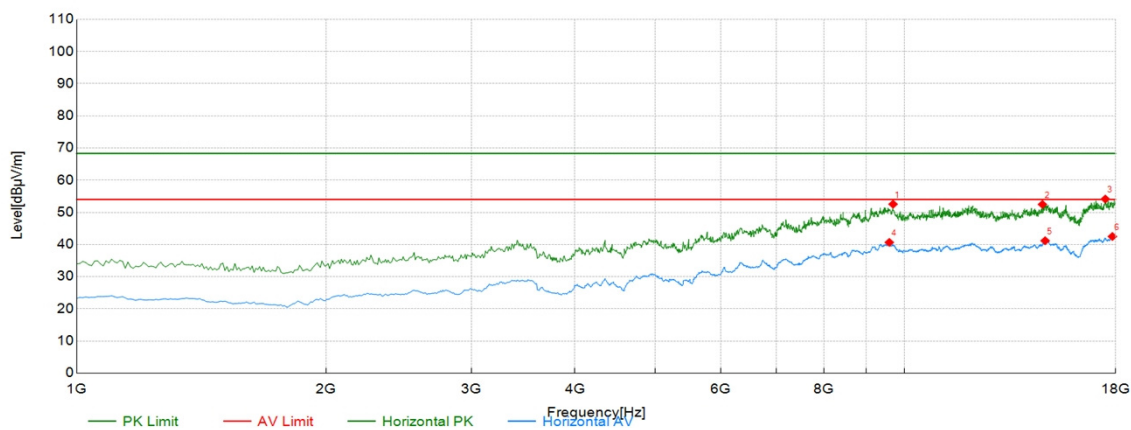

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9691.35	49.00	3.54	52.54	68.30	15.76	PK	Horizont	PASS
2	14683.34	44.60	7.87	52.47	68.30	15.83	PK	Horizont	PASS
3	17489.74	43.64	10.50	54.14	68.30	14.16	PK	Horizont	PASS
4	9589.29	36.14	4.51	40.65	54.00	13.35	AV	Horizont	PASS
5	14793.90	32.49	8.69	41.18	54.00	12.82	AV	Horizont	PASS
6	17838.42	30.29	12.20	42.49	54.00	11.51	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5580Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

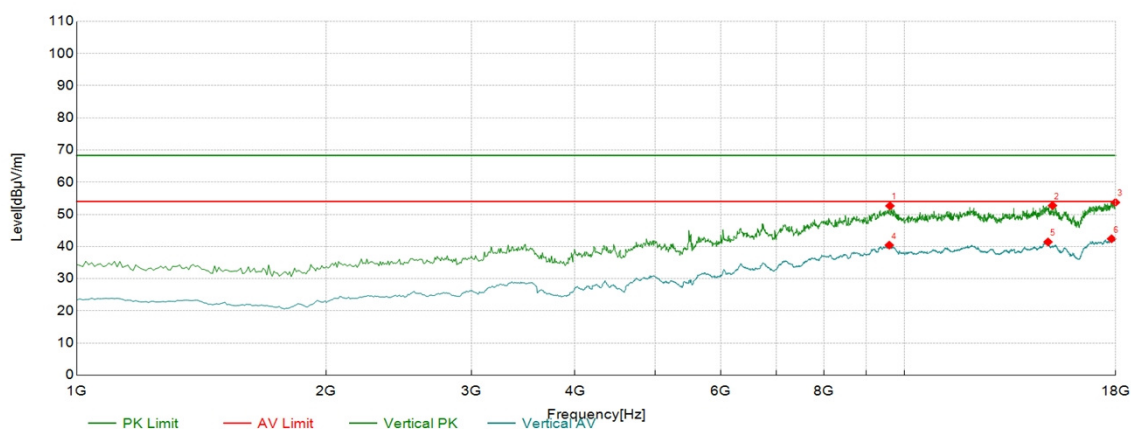

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9606.30	48.21	4.42	52.63	68.30	15.67	PK	Vertical	PASS
2	15100.05	44.27	8.46	52.73	68.30	15.57	PK	Vertical	PASS
3	17991.50	41.35	12.37	53.72	68.30	14.58	PK	Vertical	PASS
4	9589.29	35.91	4.51	40.42	54.00	13.58	AV	Vertical	PASS
5	14912.96	32.55	8.86	41.41	54.00	12.59	AV	Vertical	PASS
6	17795.90	30.14	12.25	42.39	54.00	11.61	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5700Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

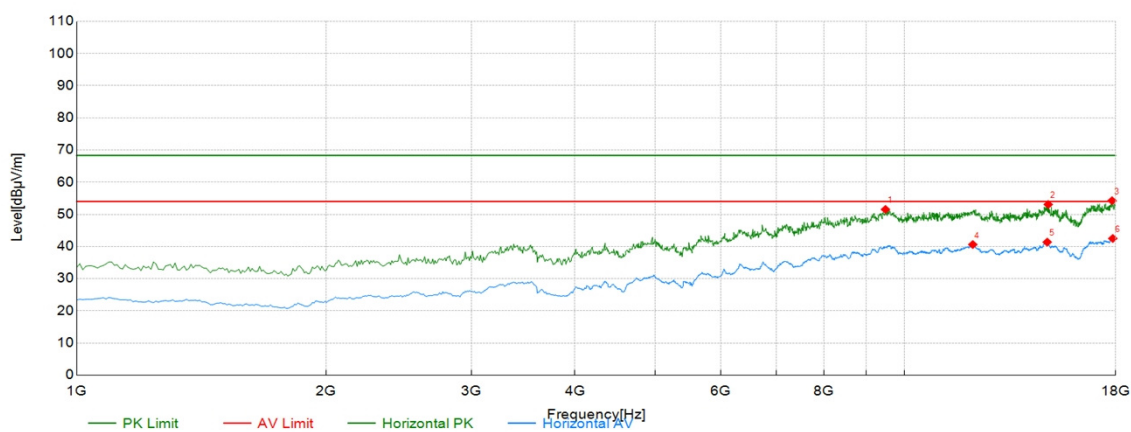

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9487.24	47.05	4.48	51.53	68.30	16.77	PK	Horizont	PASS
2	14921.46	44.27	8.80	53.07	68.30	15.23	PK	Horizont	PASS
3	17821.41	42.00	12.25	54.25	68.30	14.05	PK	Horizont	PASS
4	12098.05	33.35	7.26	40.61	54.00	13.39	AV	Horizont	PASS
5	14878.94	32.47	8.89	41.36	54.00	12.64	AV	Horizont	PASS
6	17855.43	30.34	12.15	42.49	54.00	11.51	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5700Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

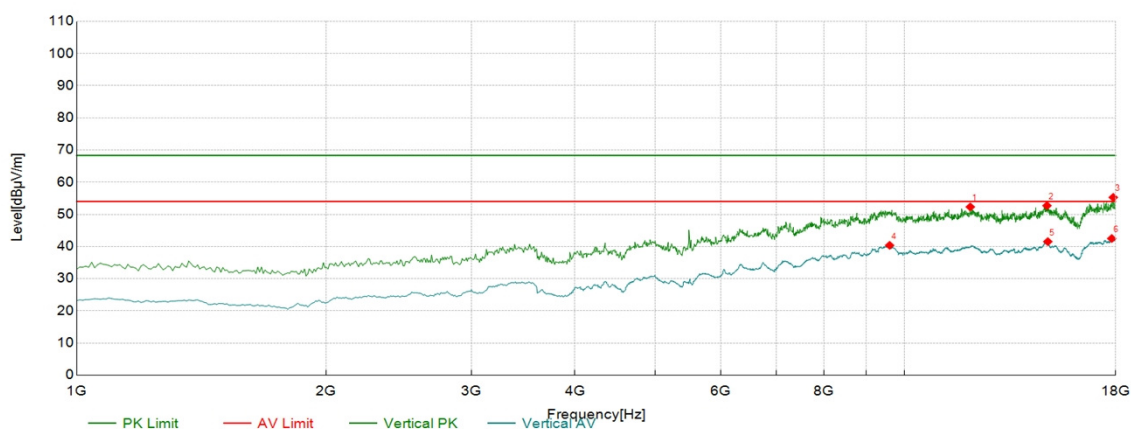

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12013.01	45.21	7.09	52.30	68.30	16.00	PK	Vertical	PASS
2	14870.44	43.83	8.88	52.71	68.30	15.59	PK	Vertical	PASS
3	17880.94	43.17	12.10	55.27	68.30	13.03	PK	Vertical	PASS
4	9597.80	35.80	4.56	40.36	54.00	13.64	AV	Vertical	PASS
5	14904.45	32.61	8.91	41.52	54.00	12.48	AV	Vertical	PASS
6	17804.40	30.19	12.29	42.48	54.00	11.52	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5745Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

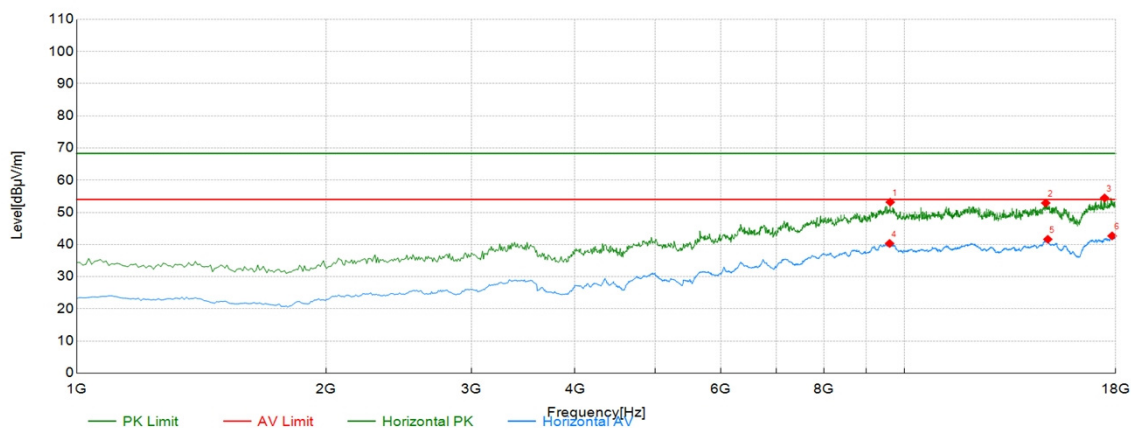

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9614.81	48.93	4.23	53.16	68.30	15.14	PK	Horizont	PASS
2	14819.41	44.13	8.78	52.91	68.30	15.39	PK	Horizont	PASS
3	17455.73	44.14	10.34	54.48	68.30	13.82	PK	Horizont	PASS
4	9597.80	35.76	4.56	40.32	54.00	13.68	AV	Horizont	PASS
5	14904.45	32.71	8.91	41.62	54.00	12.38	AV	Horizont	PASS
6	17821.41	30.42	12.25	42.67	54.00	11.33	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5745Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

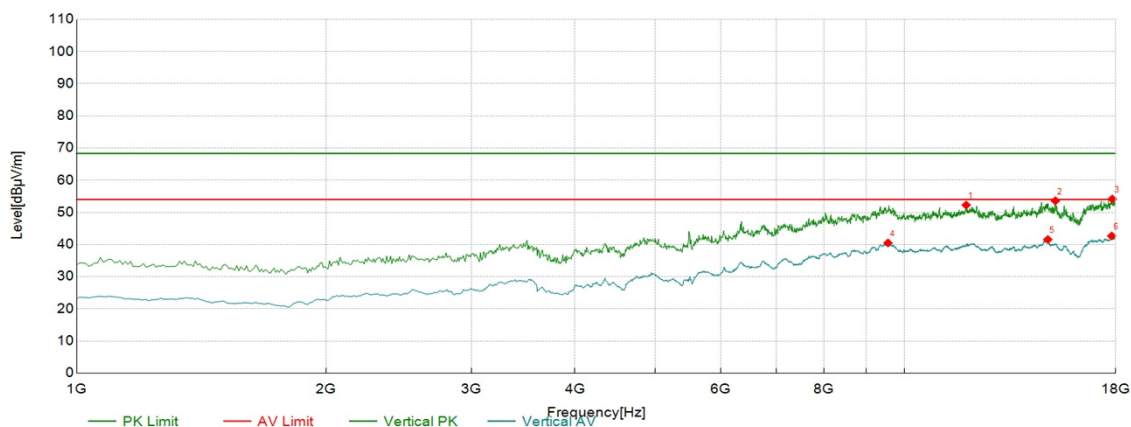

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11876.94	45.32	6.93	52.25	68.30	16.05	PK	Vertical	PASS
2	15219.11	45.00	8.59	53.59	68.30	14.71	PK	Vertical	PASS
3	17829.91	41.92	12.22	54.14	68.30	14.16	PK	Vertical	PASS
4	9555.28	36.15	4.33	40.48	54.00	13.52	AV	Vertical	PASS
5	14904.45	32.64	8.91	41.55	54.00	12.45	AV	Vertical	PASS
6	17804.40	30.36	12.29	42.65	54.00	11.35	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5785Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

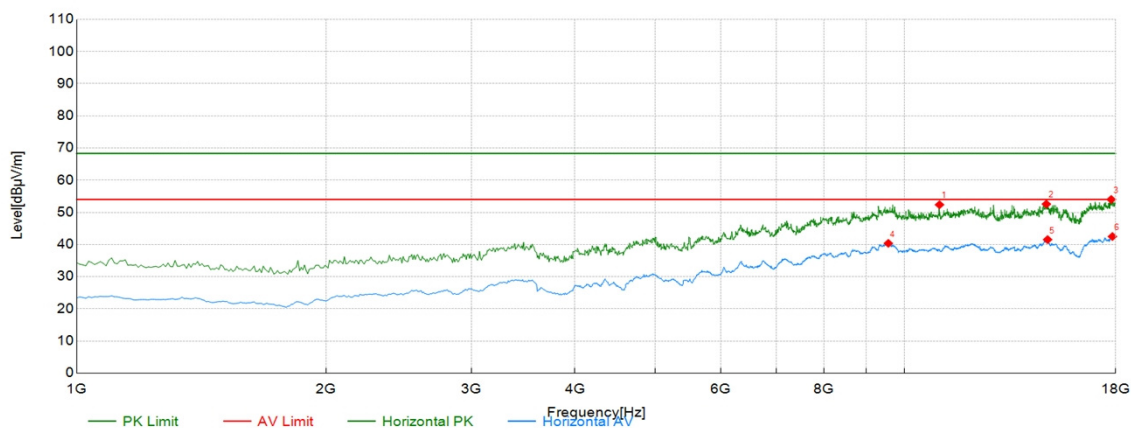

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11026.51	47.41	4.96	52.37	68.30	15.93	PK	Horizont	PASS
2	14844.92	43.76	8.82	52.58	68.30	15.72	PK	Horizont	PASS
3	17778.89	41.96	12.04	54.00	68.30	14.30	PK	Horizont	PASS
4	9563.78	35.99	4.37	40.36	54.00	13.64	AV	Horizont	PASS
5	14895.95	32.59	8.93	41.52	54.00	12.48	AV	Horizont	PASS
6	17838.42	30.28	12.20	42.48	54.00	11.52	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5785Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

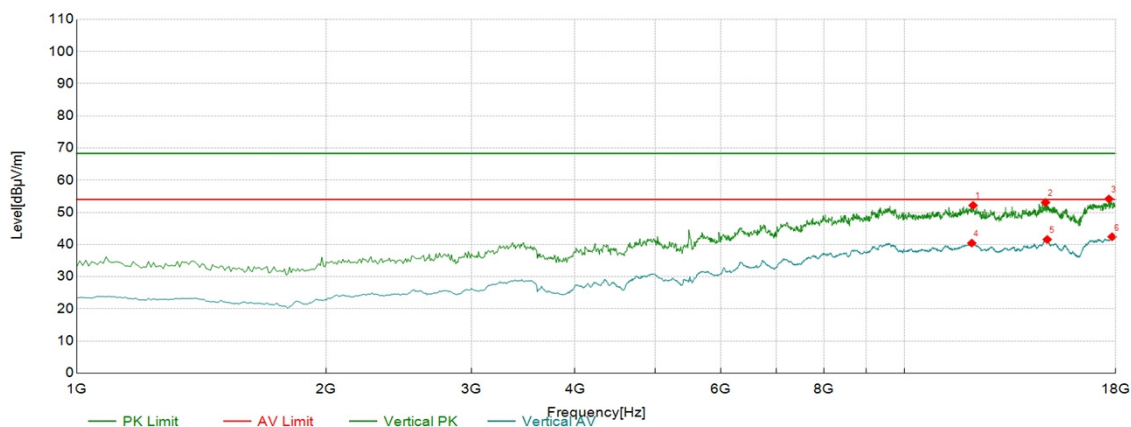

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12106.55	44.91	7.25	52.16	68.30	16.14	PK	Vertical	PASS
2	14810.91	44.32	8.76	53.08	68.30	15.22	PK	Vertical	PASS
3	17668.33	43.26	10.90	54.16	68.30	14.14	PK	Vertical	PASS
4	12064.03	33.23	7.20	40.43	54.00	13.57	AV	Vertical	PASS
5	14878.94	32.66	8.89	41.55	54.00	12.45	AV	Vertical	PASS
6	17821.41	30.15	12.25	42.40	54.00	11.60	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5825Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

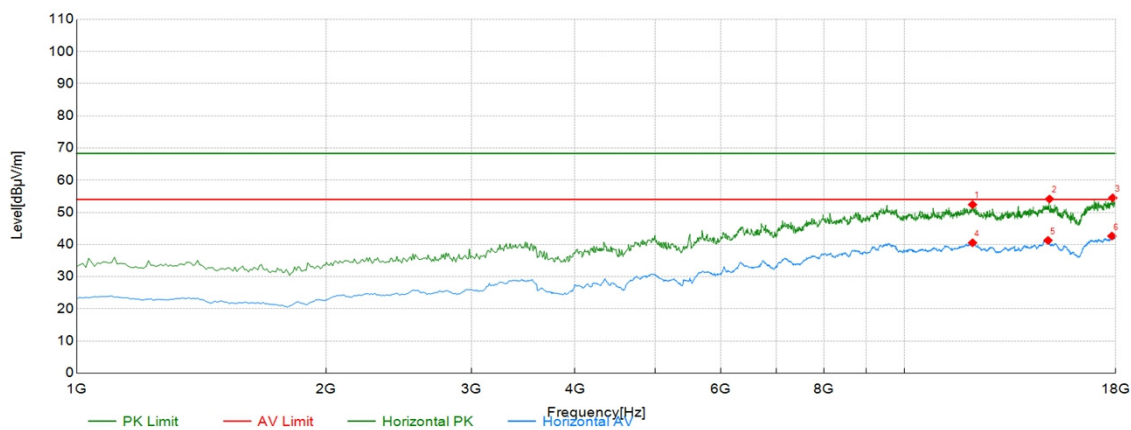

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12089.54	45.15	7.25	52.40	68.30	15.90	PK	Horizont	PASS
2	14972.49	45.65	8.50	54.15	68.30	14.15	PK	Horizont	PASS
3	17855.43	42.37	12.15	54.52	68.30	13.78	PK	Horizont	PASS
4	12089.54	33.29	7.25	40.54	54.00	13.46	AV	Horizont	PASS
5	14912.96	32.41	8.86	41.27	54.00	12.73	AV	Horizont	PASS
6	17812.91	30.36	12.27	42.63	54.00	11.37	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC20 5825Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

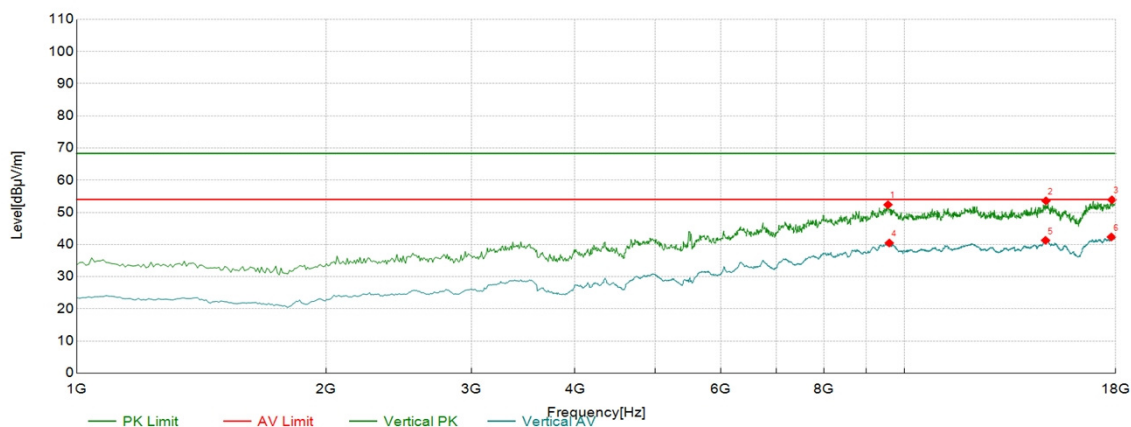

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9555.28	48.04	4.33	52.37	68.30	15.93	PK	Vertical	PASS
2	14827.91	44.79	8.79	53.58	68.30	14.72	PK	Vertical	PASS
3	17812.91	41.63	12.27	53.90	68.30	14.40	PK	Vertical	PASS
4	9589.29	35.96	4.51	40.47	54.00	13.53	AV	Vertical	PASS
5	14810.91	32.53	8.76	41.29	54.00	12.71	AV	Vertical	PASS
6	17787.39	30.20	12.14	42.34	54.00	11.66	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5180Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

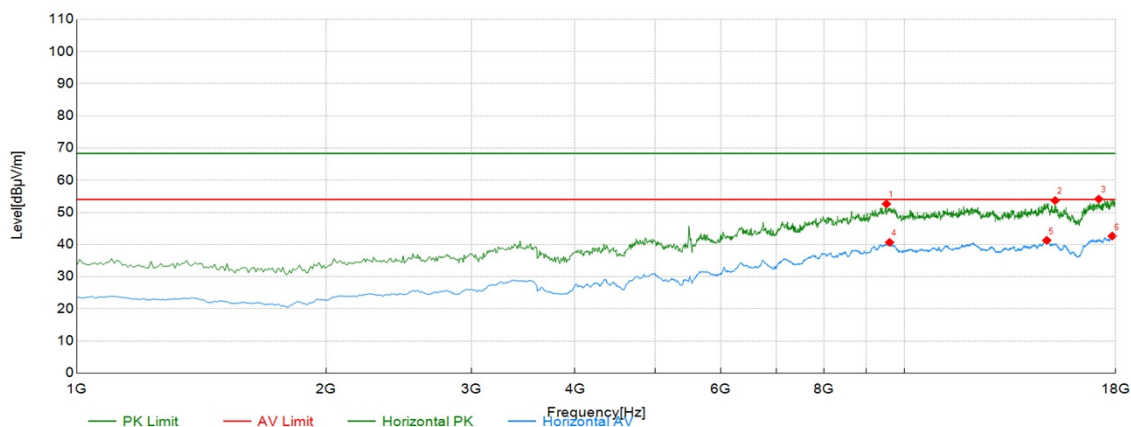

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9512.76	48.10	4.49	52.59	68.30	15.71	PK	Horizont	PASS
2	15210.61	45.05	8.63	53.68	68.30	14.62	PK	Horizont	PASS
3	17175.09	43.79	10.33	54.12	68.30	14.18	PK	Horizont	PASS
4	9597.80	36.11	4.56	40.67	54.00	13.33	AV	Horizont	PASS
5	14861.93	32.43	8.86	41.29	54.00	12.71	AV	Horizont	PASS
6	17829.91	30.40	12.22	42.62	54.00	11.38	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5180Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

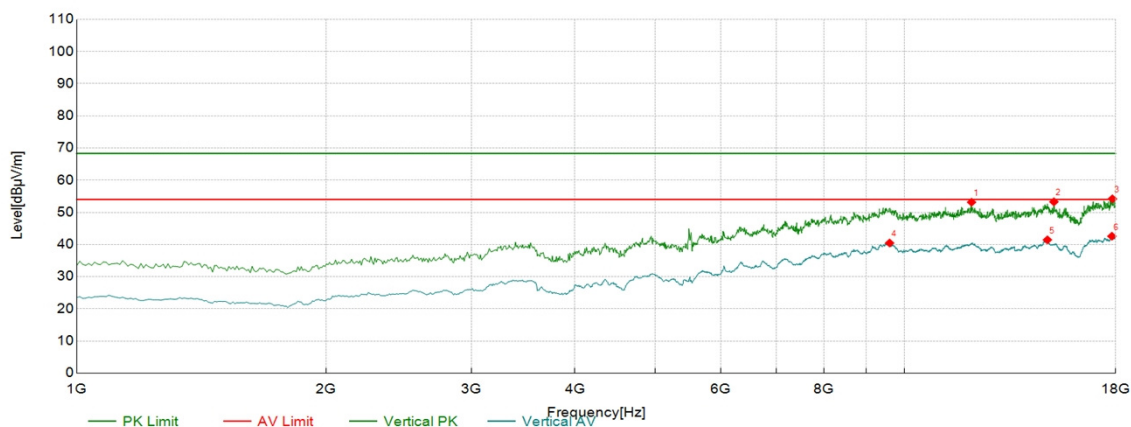

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12055.53	45.97	7.18	53.15	68.30	15.15	PK	Vertical	PASS
2	15159.58	44.68	8.59	53.27	68.30	15.03	PK	Vertical	PASS
3	17838.42	42.01	12.20	54.21	68.30	14.09	PK	Vertical	PASS
4	9597.80	35.91	4.56	40.47	54.00	13.53	AV	Vertical	PASS
5	14887.44	32.54	8.91	41.45	54.00	12.55	AV	Vertical	PASS
6	17812.91	30.31	12.27	42.58	54.00	11.42	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5200Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

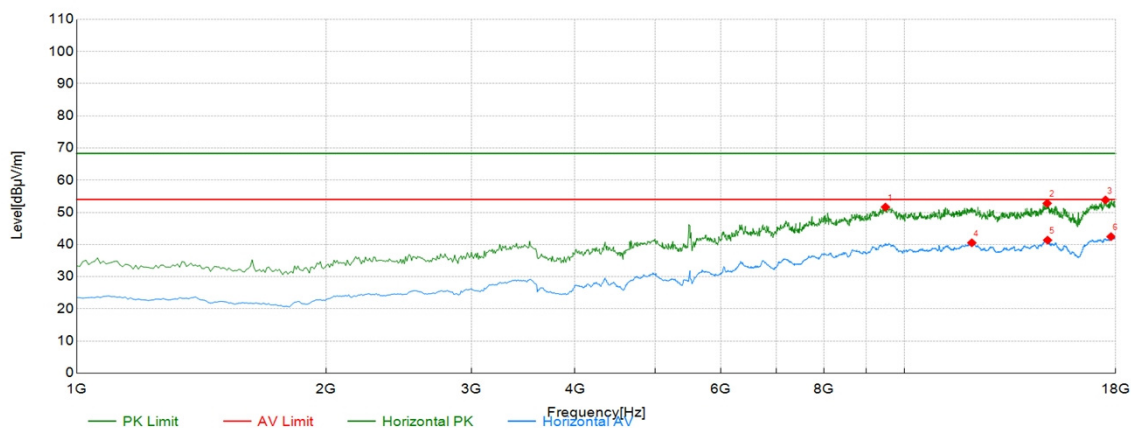

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9487.24	47.17	4.48	51.65	68.30	16.65	PK	Horizont	PASS
2	14878.94	43.91	8.89	52.80	68.30	15.50	PK	Horizont	PASS
3	17498.25	43.33	10.53	53.86	68.30	14.44	PK	Horizont	PASS
4	12064.03	33.33	7.20	40.53	54.00	13.47	AV	Horizont	PASS
5	14895.95	32.42	8.93	41.35	54.00	12.65	AV	Horizont	PASS
6	17770.39	30.51	11.92	42.43	54.00	11.57	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5200Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

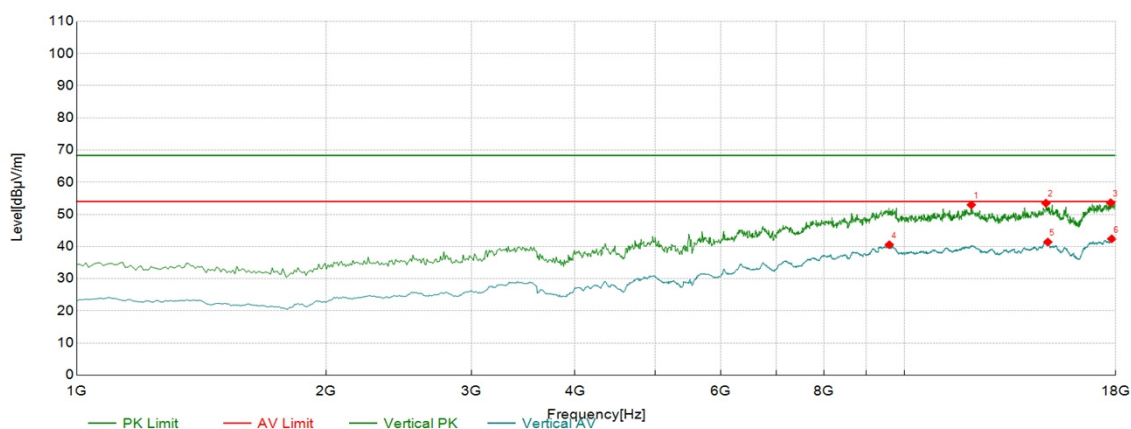

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12047.02	45.79	7.16	52.95	68.30	15.35	PK	Vertical	PASS
2	14827.91	44.69	8.79	53.48	68.30	14.82	PK	Vertical	PASS
3	17753.38	41.90	11.71	53.61	68.30	14.69	PK	Vertical	PASS
4	9589.29	36.04	4.51	40.55	54.00	13.45	AV	Vertical	PASS
5	14904.45	32.47	8.91	41.38	54.00	12.62	AV	Vertical	PASS
6	17804.40	30.09	12.29	42.38	54.00	11.62	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5240Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

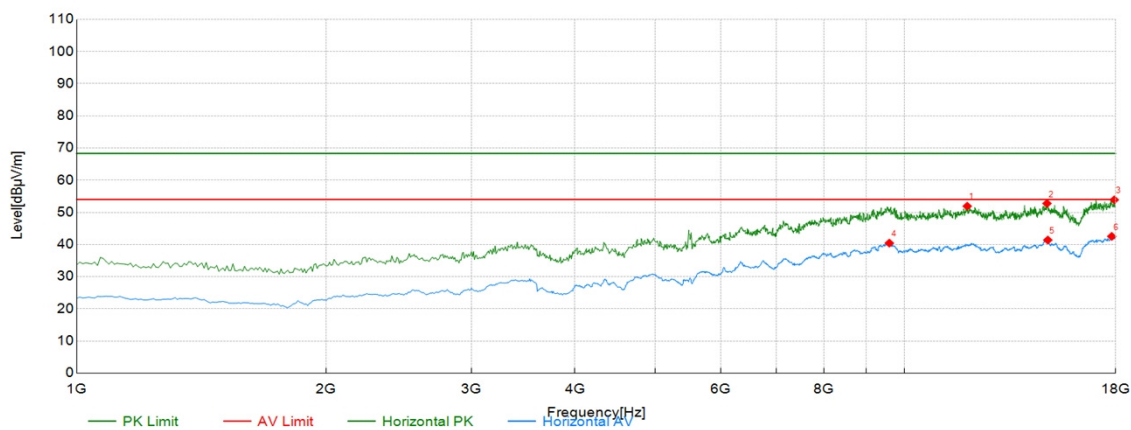

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11910.96	44.91	7.01	51.92	68.30	16.38	PK	Horizont	PASS
2	14870.44	43.88	8.88	52.76	68.30	15.54	PK	Horizont	PASS
3	17931.97	41.74	12.16	53.90	68.30	14.40	PK	Horizont	PASS
4	9589.29	35.92	4.51	40.43	54.00	13.57	AV	Horizont	PASS
5	14904.45	32.48	8.91	41.39	54.00	12.61	AV	Horizont	PASS
6	17804.40	30.23	12.29	42.52	54.00	11.48	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5240Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

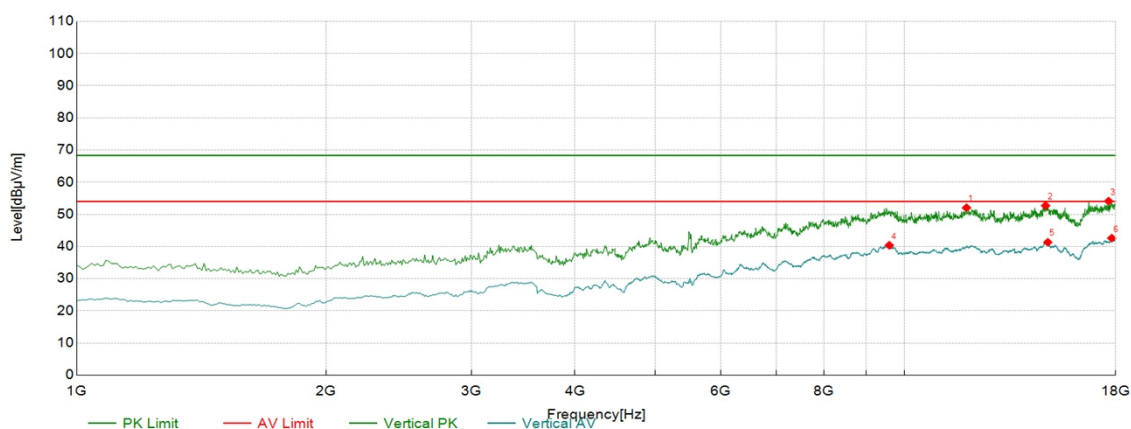

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11885.44	45.08	6.95	52.03	68.30	16.27	PK	Vertical	PASS
2	14810.91	43.95	8.76	52.71	68.30	15.59	PK	Vertical	PASS
3	17651.33	43.28	10.83	54.11	68.30	14.19	PK	Vertical	PASS
4	9589.29	35.87	4.51	40.38	54.00	13.62	AV	Vertical	PASS
5	14904.45	32.40	8.91	41.31	54.00	12.69	AV	Vertical	PASS
6	17804.40	30.30	12.29	42.59	54.00	11.41	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5260Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

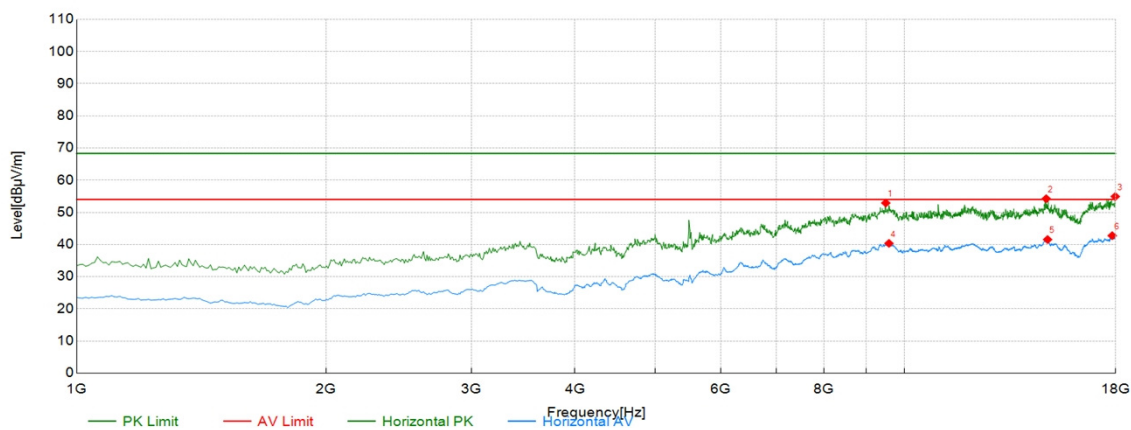

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9495.75	48.39	4.52	52.91	68.30	15.39	PK	Horizont	PASS
2	14836.42	45.43	8.81	54.24	68.30	14.06	PK	Horizont	PASS
3	17982.99	42.59	12.34	54.93	68.30	13.37	PK	Horizont	PASS
4	9580.79	35.88	4.47	40.35	54.00	13.65	AV	Horizont	PASS
5	14895.95	32.61	8.93	41.54	54.00	12.46	AV	Horizont	PASS
6	17829.91	30.52	12.22	42.74	54.00	11.26	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5260Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

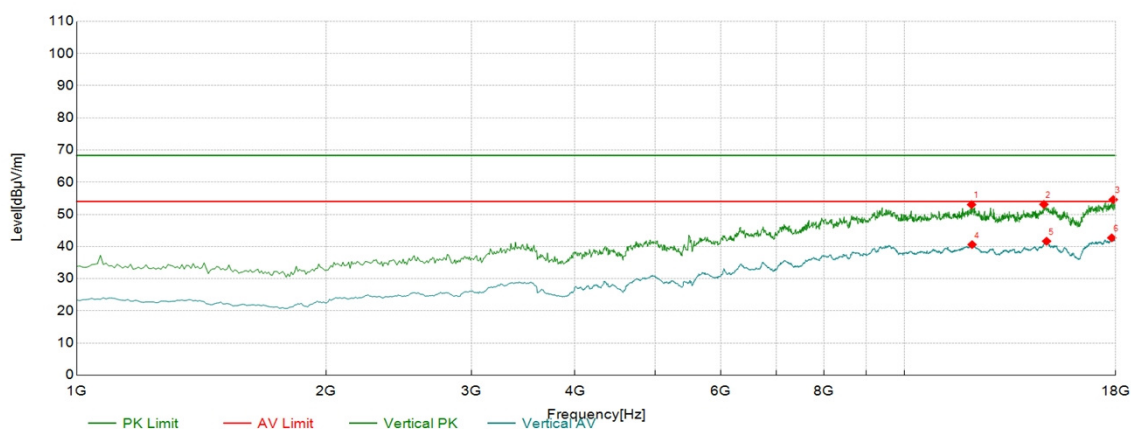

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12055.53	45.84	7.18	53.02	68.30	15.28	PK	Vertical	PASS
2	14742.87	44.82	8.28	53.10	68.30	15.20	PK	Vertical	PASS
3	17880.94	42.49	12.10	54.59	68.30	13.71	PK	Vertical	PASS
4	12072.54	33.38	7.21	40.59	54.00	13.41	AV	Vertical	PASS
5	14853.43	32.81	8.84	41.65	54.00	12.35	AV	Vertical	PASS
6	17804.40	30.40	12.29	42.69	54.00	11.31	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5280Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

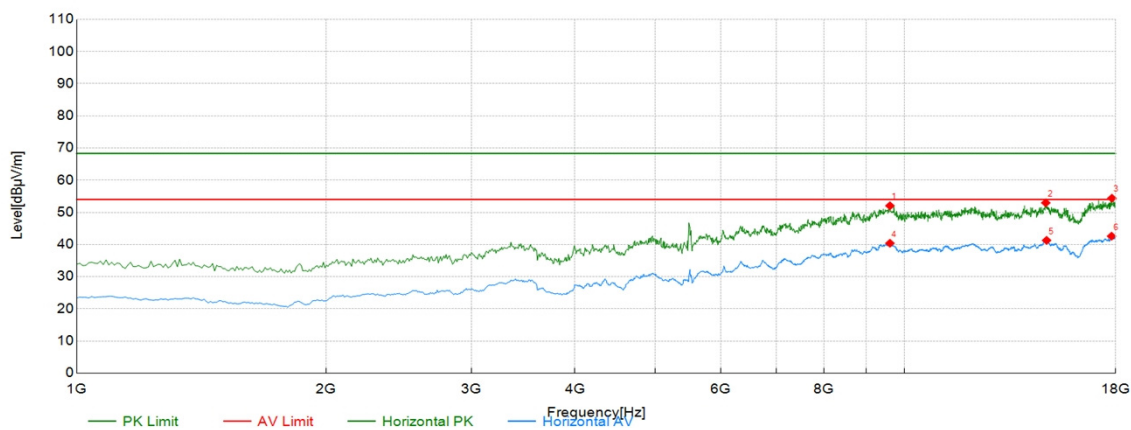

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9606.30	47.62	4.42	52.04	68.30	16.26	PK	Horizont	PASS
2	14819.41	44.18	8.78	52.96	68.30	15.34	PK	Horizont	PASS
3	17812.91	42.12	12.27	54.39	68.30	13.91	PK	Horizont	PASS
4	9606.30	35.98	4.42	40.40	54.00	13.60	AV	Horizont	PASS
5	14853.43	32.45	8.84	41.29	54.00	12.71	AV	Horizont	PASS
6	17795.90	30.33	12.25	42.58	54.00	11.42	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5280Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

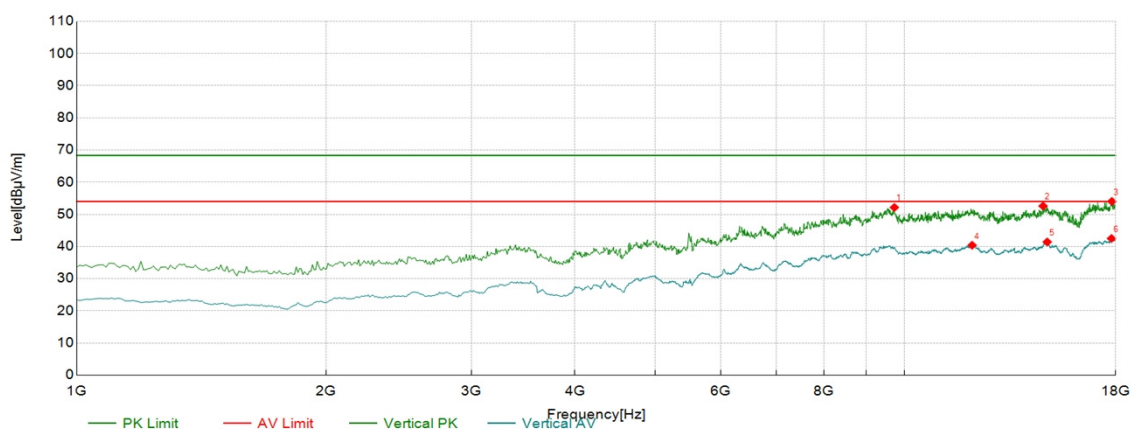

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9725.36	48.50	3.65	52.15	68.30	16.15	PK	Vertical	PASS
2	14708.85	44.58	8.00	52.58	68.30	15.72	PK	Vertical	PASS
3	17812.91	41.75	12.27	54.02	68.30	14.28	PK	Vertical	PASS
4	12072.54	33.18	7.21	40.39	54.00	13.61	AV	Vertical	PASS
5	14878.94	32.52	8.89	41.41	54.00	12.59	AV	Vertical	PASS
6	17795.90	30.24	12.25	42.49	54.00	11.51	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5320Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

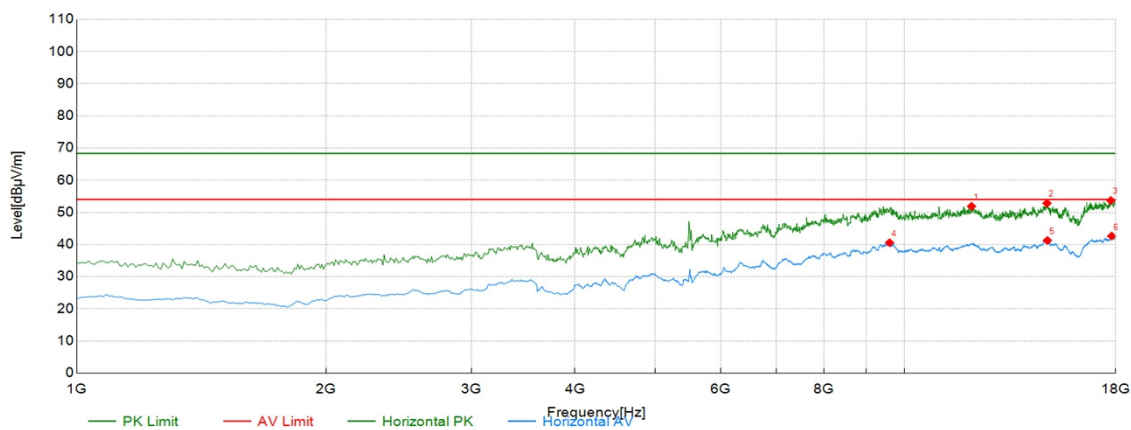

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12055.53	44.70	7.18	51.88	68.30	16.42	PK	Horizont	PASS
2	14870.44	43.94	8.88	52.82	68.30	15.48	PK	Horizont	PASS
3	17761.88	41.87	11.81	53.68	68.30	14.62	PK	Horizont	PASS
4	9597.80	36.00	4.56	40.56	54.00	13.44	AV	Horizont	PASS
5	14887.44	32.34	8.91	41.25	54.00	12.75	AV	Horizont	PASS
6	17804.40	30.33	12.29	42.62	54.00	11.38	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5320Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

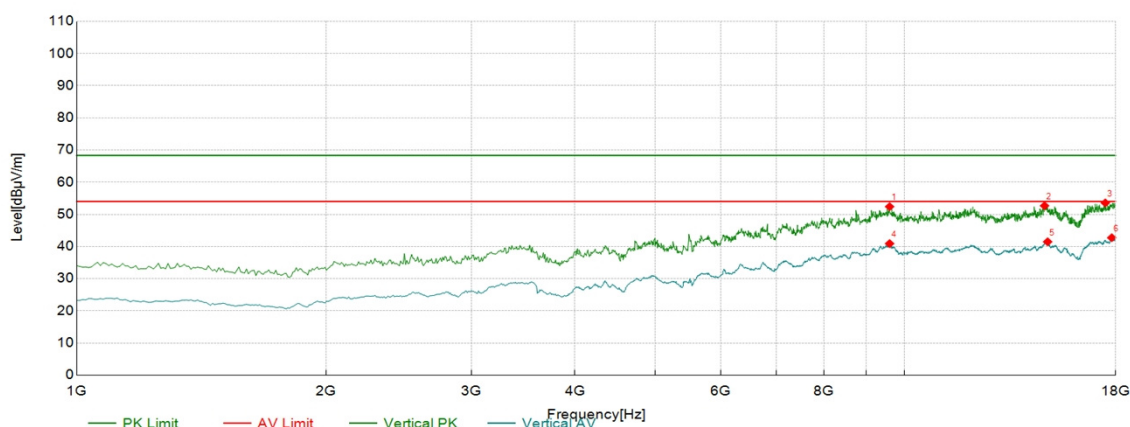

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9597.80	47.84	4.56	52.40	68.30	15.90	PK	Vertical	PASS
2	14768.38	44.19	8.48	52.67	68.30	15.63	PK	Vertical	PASS
3	17489.74	43.06	10.50	53.56	68.30	14.74	PK	Vertical	PASS
4	9597.80	36.34	4.56	40.90	54.00	13.10	AV	Vertical	PASS
5	14895.95	32.54	8.93	41.47	54.00	12.53	AV	Vertical	PASS
6	17804.40	30.44	12.29	42.73	54.00	11.27	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5500Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

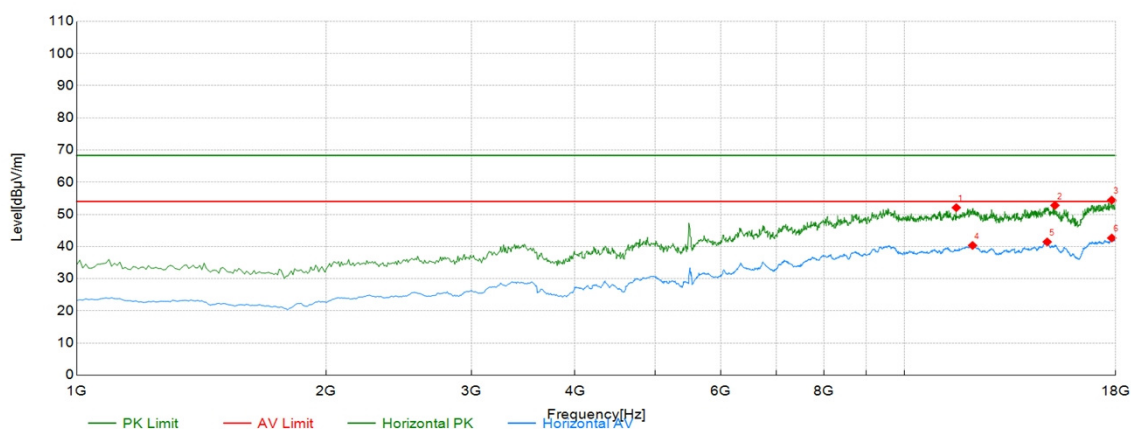

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11553.78	46.33	5.76	52.09	68.30	16.21	PK	Horizont	PASS
2	15202.10	44.12	8.67	52.79	68.30	15.51	PK	Horizont	PASS
3	17804.40	42.13	12.29	54.42	68.30	13.88	PK	Horizont	PASS
4	12089.54	33.08	7.25	40.33	54.00	13.67	AV	Horizont	PASS
5	14878.94	32.54	8.89	41.43	54.00	12.57	AV	Horizont	PASS
6	17804.40	30.35	12.29	42.64	54.00	11.36	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5500Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

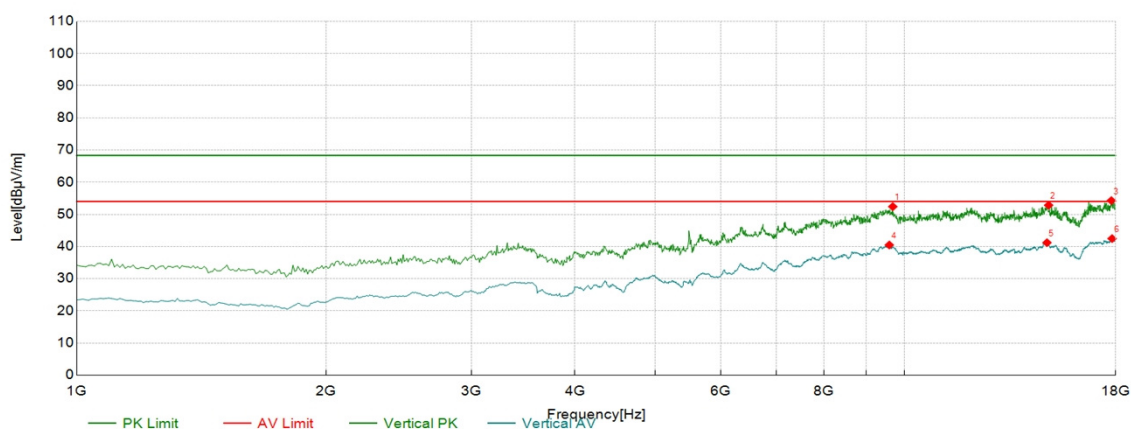

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9682.84	48.88	3.52	52.40	68.30	15.90	PK	Vertical	PASS
2	14938.47	44.14	8.70	52.84	68.30	15.46	PK	Vertical	PASS
3	17787.39	42.13	12.14	54.27	68.30	14.03	PK	Vertical	PASS
4	9589.29	35.96	4.51	40.47	54.00	13.53	AV	Vertical	PASS
5	14870.44	32.31	8.88	41.19	54.00	12.81	AV	Vertical	PASS
6	17821.41	30.20	12.25	42.45	54.00	11.55	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5580Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

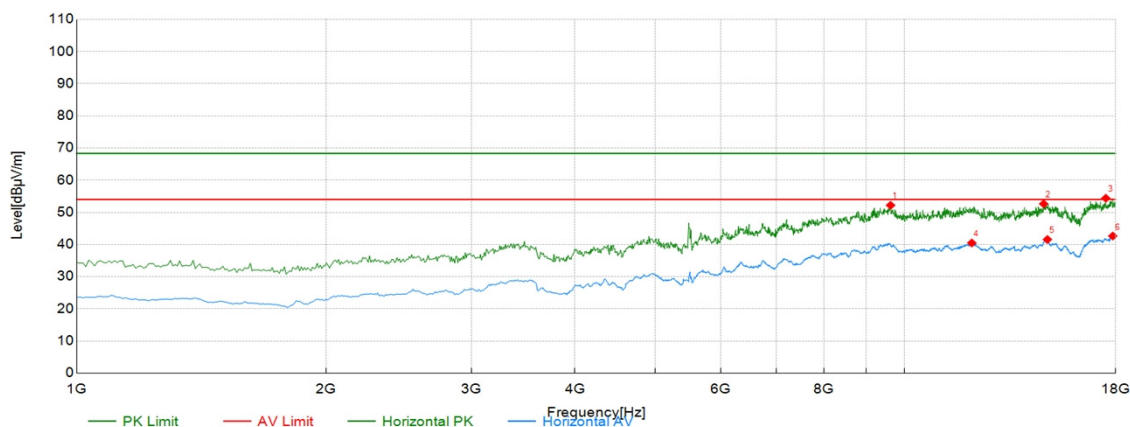

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9623.31	48.17	4.02	52.19	68.30	16.11	PK	Horizont	PASS
2	14734.37	44.42	8.22	52.64	68.30	15.66	PK	Horizont	PASS
3	17515.26	43.82	10.56	54.38	68.30	13.92	PK	Horizont	PASS
4	12064.03	33.27	7.20	40.47	54.00	13.53	AV	Horizont	PASS
5	14887.44	32.65	8.91	41.56	54.00	12.44	AV	Horizont	PASS
6	17855.43	30.48	12.15	42.63	54.00	11.37	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5580Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

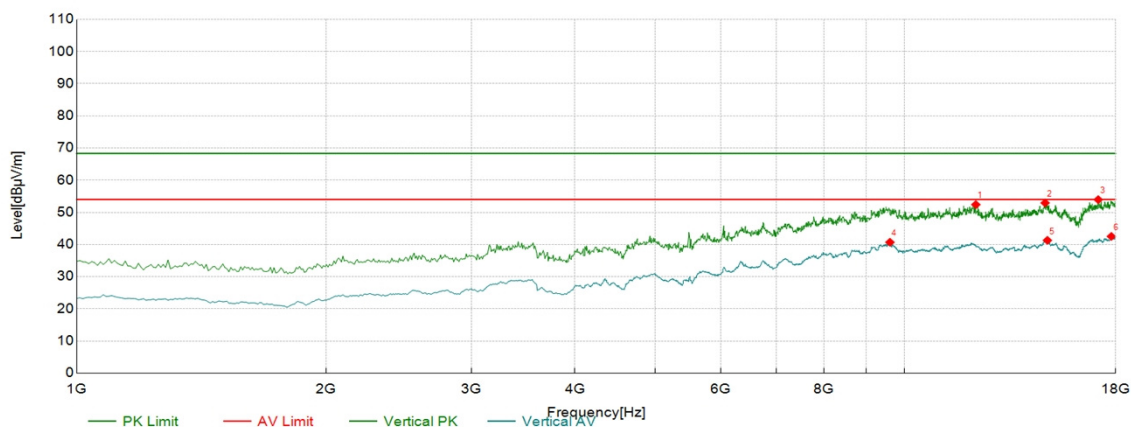

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12200.10	45.44	6.97	52.41	68.30	15.89	PK	Vertical	PASS
2	14793.90	44.24	8.69	52.93	68.30	15.37	PK	Vertical	PASS
3	17149.57	43.79	10.17	53.96	68.30	14.34	PK	Vertical	PASS
4	9606.30	36.28	4.42	40.70	54.00	13.30	AV	Vertical	PASS
5	14887.44	32.38	8.91	41.29	54.00	12.71	AV	Vertical	PASS
6	17787.39	30.37	12.14	42.51	54.00	11.49	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5700Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

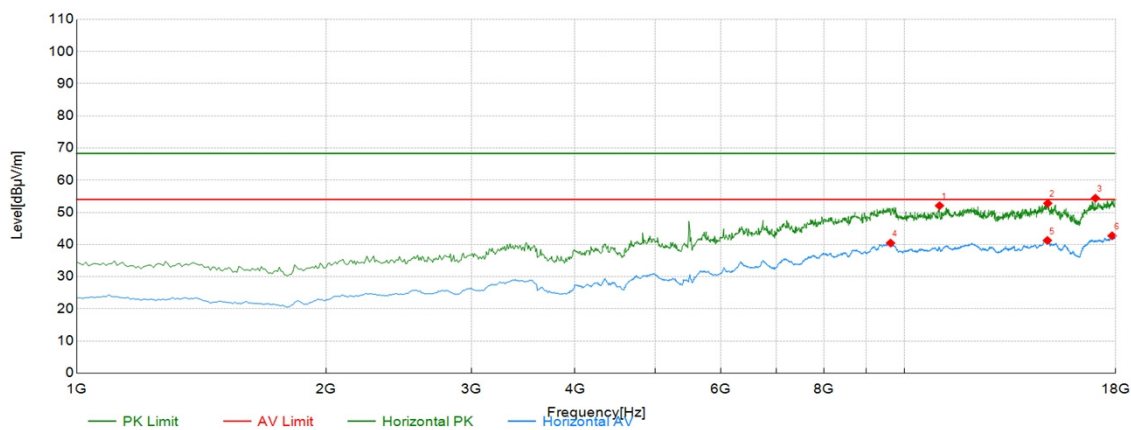

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11026.51	47.10	4.96	52.06	68.30	16.24	PK	Horizont	PASS
2	14904.45	43.90	8.91	52.81	68.30	15.49	PK	Horizont	PASS
3	17013.51	44.96	9.45	54.41	68.30	13.89	PK	Horizont	PASS
4	9623.31	36.43	4.02	40.45	54.00	13.55	AV	Horizont	PASS
5	14887.44	32.35	8.91	41.26	54.00	12.74	AV	Horizont	PASS
6	17821.41	30.45	12.25	42.70	54.00	11.30	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5700Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

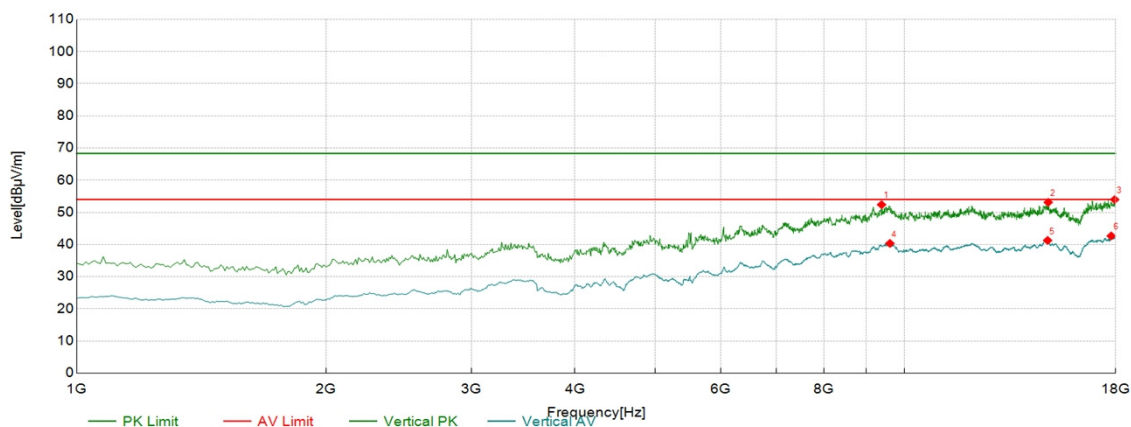

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9385.19	49.02	3.36	52.38	68.30	15.92	PK	Vertical	PASS
2	14921.46	44.31	8.80	53.11	68.30	15.19	PK	Vertical	PASS
3	17948.97	41.76	12.22	53.98	68.30	14.32	PK	Vertical	PASS
4	9606.30	35.93	4.42	40.35	54.00	13.65	AV	Vertical	PASS
5	14895.95	32.34	8.93	41.27	54.00	12.73	AV	Vertical	PASS
6	17778.89	30.61	12.04	42.65	54.00	11.35	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5745Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

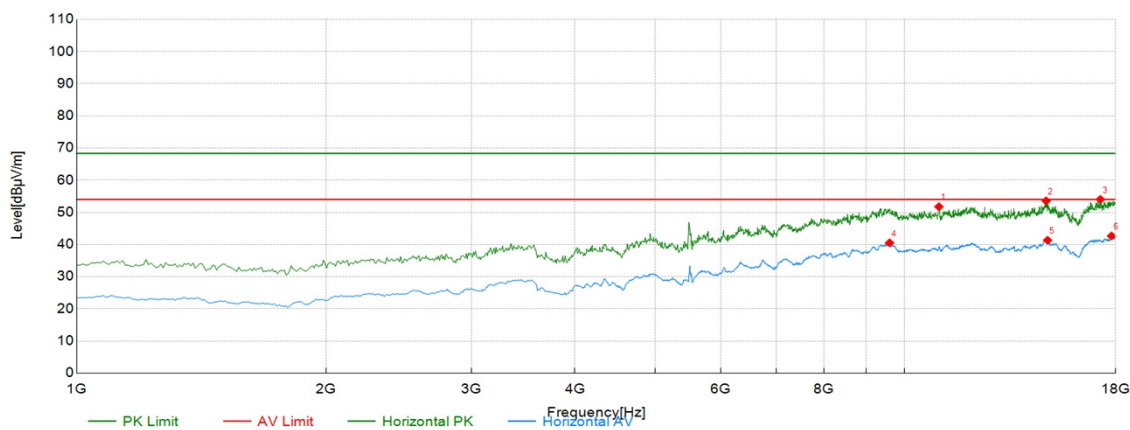

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11009.50	46.79	4.96	51.75	68.30	16.55	PK	Horizont	PASS
2	14836.42	44.77	8.81	53.58	68.30	14.72	PK	Horizont	PASS
3	17251.63	43.72	10.31	54.03	68.30	14.27	PK	Horizont	PASS
4	9597.80	35.95	4.56	40.51	54.00	13.49	AV	Horizont	PASS
5	14895.95	32.39	8.93	41.32	54.00	12.68	AV	Horizont	PASS
6	17795.90	30.40	12.25	42.65	54.00	11.35	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5745Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

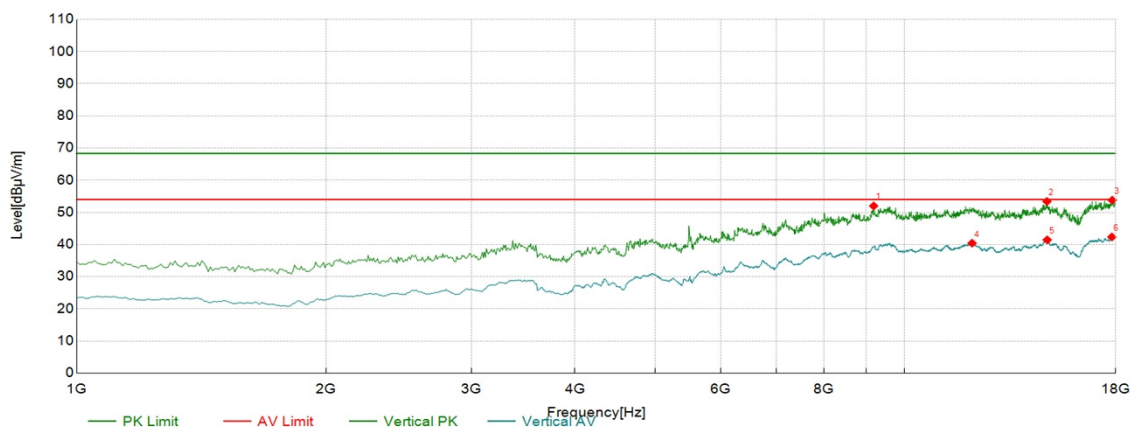

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9181.09	50.27	1.71	51.98	68.30	16.32	PK	Vertical	PASS
2	14870.44	44.52	8.88	53.40	68.30	14.90	PK	Vertical	PASS
3	17829.91	41.56	12.22	53.78	68.30	14.52	PK	Vertical	PASS
4	12072.54	33.20	7.21	40.41	54.00	13.59	AV	Vertical	PASS
5	14878.94	32.55	8.89	41.44	54.00	12.56	AV	Vertical	PASS
6	17812.91	30.07	12.27	42.34	54.00	11.66	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5785Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

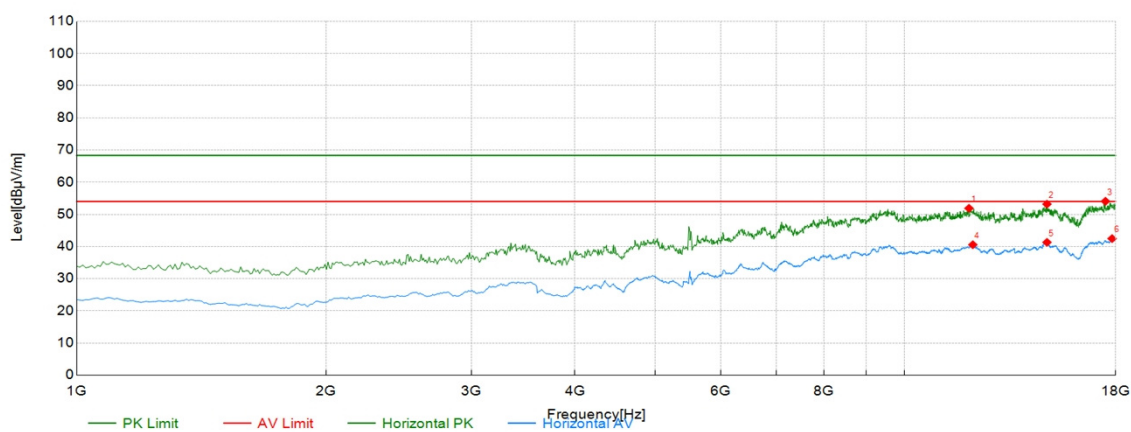

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11970.49	44.83	7.05	51.88	68.30	16.42	PK	Horizont	PASS
2	14870.44	44.30	8.88	53.18	68.30	15.12	PK	Horizont	PASS
3	17498.25	43.53	10.53	54.06	68.30	14.24	PK	Horizont	PASS
4	12098.05	33.29	7.26	40.55	54.00	13.45	AV	Horizont	PASS
5	14870.44	32.42	8.88	41.30	54.00	12.70	AV	Horizont	PASS
6	17821.41	30.20	12.25	42.45	54.00	11.55	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5785Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

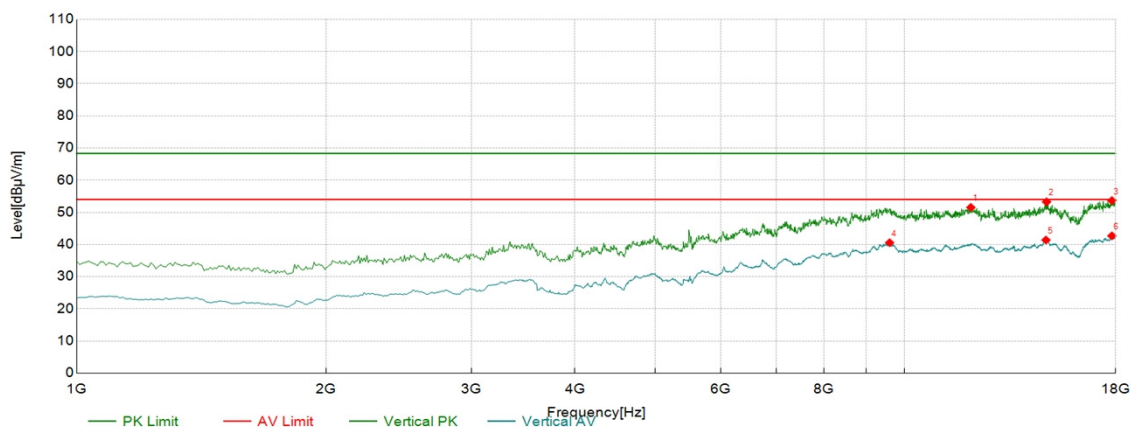

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12030.02	44.39	7.13	51.52	68.30	16.78	PK	Vertical	PASS
2	14853.43	44.42	8.84	53.26	68.30	15.04	PK	Vertical	PASS
3	17812.91	41.38	12.27	53.65	68.30	14.65	PK	Vertical	PASS
4	9597.80	35.99	4.56	40.55	54.00	13.45	AV	Vertical	PASS
5	14827.91	32.61	8.79	41.40	54.00	12.60	AV	Vertical	PASS
6	17812.91	30.41	12.27	42.68	54.00	11.32	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5825Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

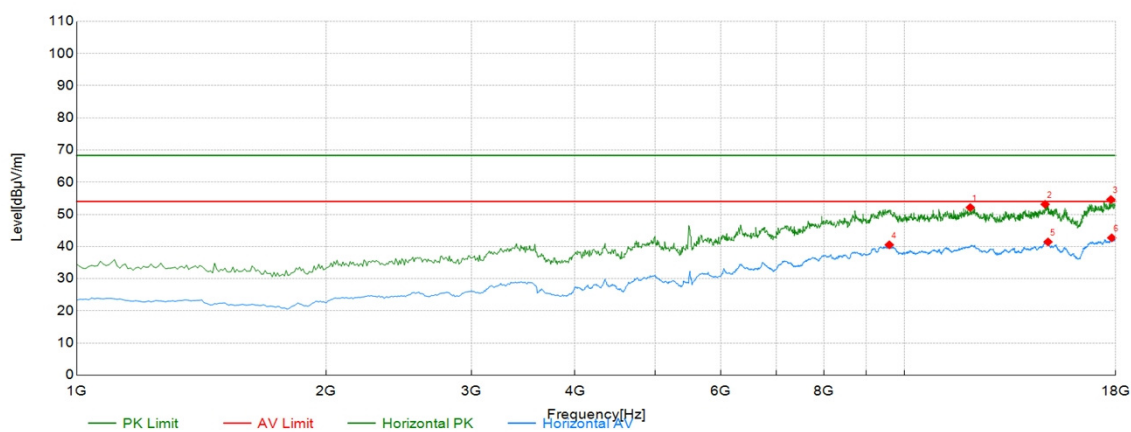

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12013.01	45.04	7.09	52.13	68.30	16.17	PK	Horizont	PASS
2	14793.90	44.43	8.69	53.12	68.30	15.18	PK	Horizont	PASS
3	17761.88	42.79	11.81	54.60	68.30	13.70	PK	Horizont	PASS
4	9589.29	36.01	4.51	40.52	54.00	13.48	AV	Horizont	PASS
5	14912.96	32.57	8.86	41.43	54.00	12.57	AV	Horizont	PASS
6	17804.40	30.40	12.29	42.69	54.00	11.31	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX20 5825Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

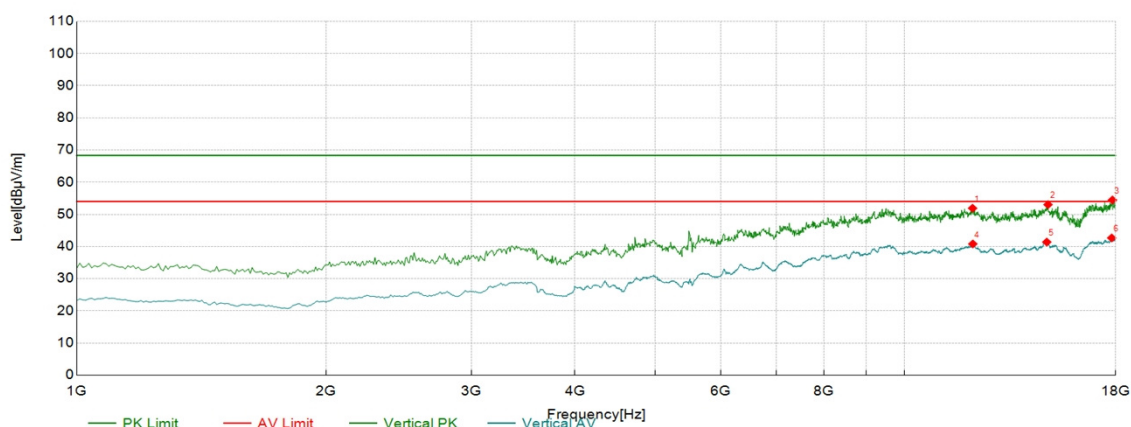

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12089.54	44.65	7.25	51.90	68.30	16.40	PK	Vertical	PASS
2	14912.96	44.17	8.86	53.03	68.30	15.27	PK	Vertical	PASS
3	17838.42	42.27	12.20	54.47	68.30	13.83	PK	Vertical	PASS
4	12098.05	33.54	7.26	40.80	54.00	13.20	AV	Vertical	PASS
5	14861.93	32.52	8.86	41.38	54.00	12.62	AV	Vertical	PASS
6	17804.40	30.37	12.29	42.66	54.00	11.34	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5190Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

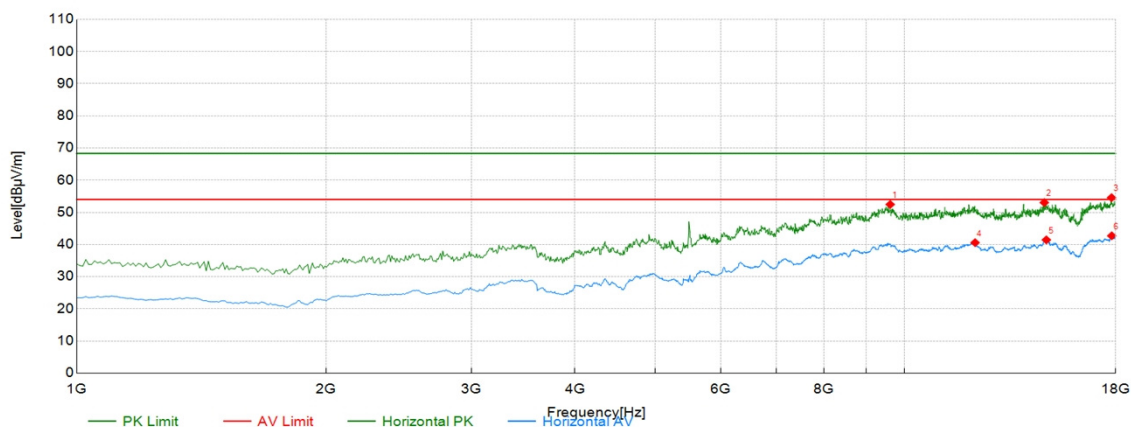

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9614.81	48.23	4.23	52.46	68.30	15.84	PK	Horizont	PASS
2	14759.88	44.62	8.42	53.04	68.30	15.26	PK	Horizont	PASS
3	17795.90	42.33	12.25	54.58	68.30	13.72	PK	Horizont	PASS
4	12174.59	33.53	7.05	40.58	54.00	13.42	AV	Horizont	PASS
5	14844.92	32.62	8.82	41.44	54.00	12.56	AV	Horizont	PASS
6	17804.40	30.41	12.29	42.70	54.00	11.30	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.

