


Test Mode:	N40 5190Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

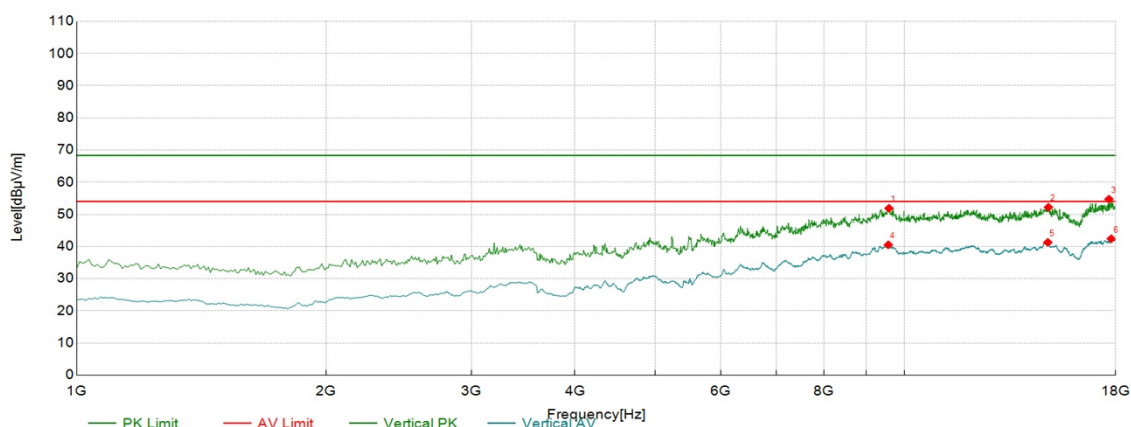

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9580.79	47.41	4.47	51.88	68.30	16.42	PK	Vertical	PASS
2	14929.96	43.45	8.75	52.20	68.30	16.10	PK	Vertical	PASS
3	17668.33	43.83	10.90	54.73	68.30	13.57	PK	Vertical	PASS
4	9563.78	36.15	4.37	40.52	54.00	13.48	AV	Vertical	PASS
5	14904.45	32.37	8.91	41.28	54.00	12.72	AV	Vertical	PASS
6	17778.89	30.36	12.04	42.40	54.00	11.60	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5230Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

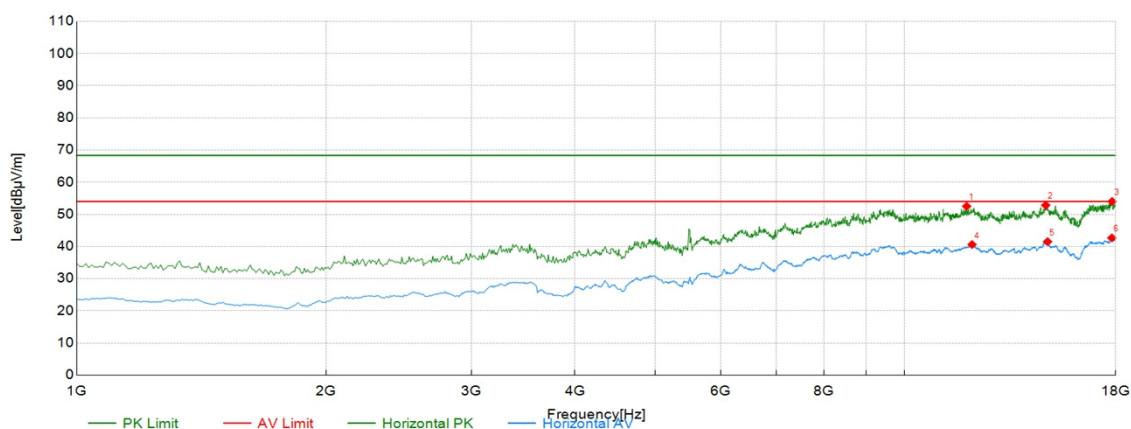

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11893.95	45.52	6.98	52.50	68.30	15.80	PK	Horizont	PASS
2	14819.41	44.05	8.78	52.83	68.30	15.47	PK	Horizont	PASS
3	17821.41	41.76	12.25	54.01	68.30	14.29	PK	Horizont	PASS
4	12072.54	33.39	7.21	40.60	54.00	13.40	AV	Horizont	PASS
5	14895.95	32.58	8.93	41.51	54.00	12.49	AV	Horizont	PASS
6	17812.91	30.40	12.27	42.67	54.00	11.33	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5230Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

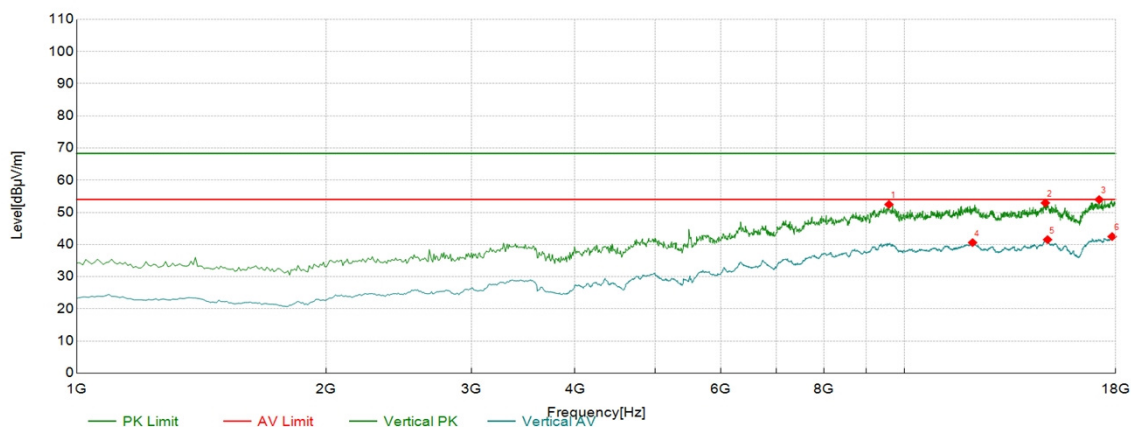

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9580.79	47.97	4.47	52.44	68.30	15.86	PK	Vertical	PASS
2	14802.40	44.19	8.74	52.93	68.30	15.37	PK	Vertical	PASS
3	17192.10	43.53	10.44	53.97	68.30	14.33	PK	Vertical	PASS
4	12089.54	33.34	7.25	40.59	54.00	13.41	AV	Vertical	PASS
5	14895.95	32.58	8.93	41.51	54.00	12.49	AV	Vertical	PASS
6	17821.41	30.21	12.25	42.46	54.00	11.54	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5270Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

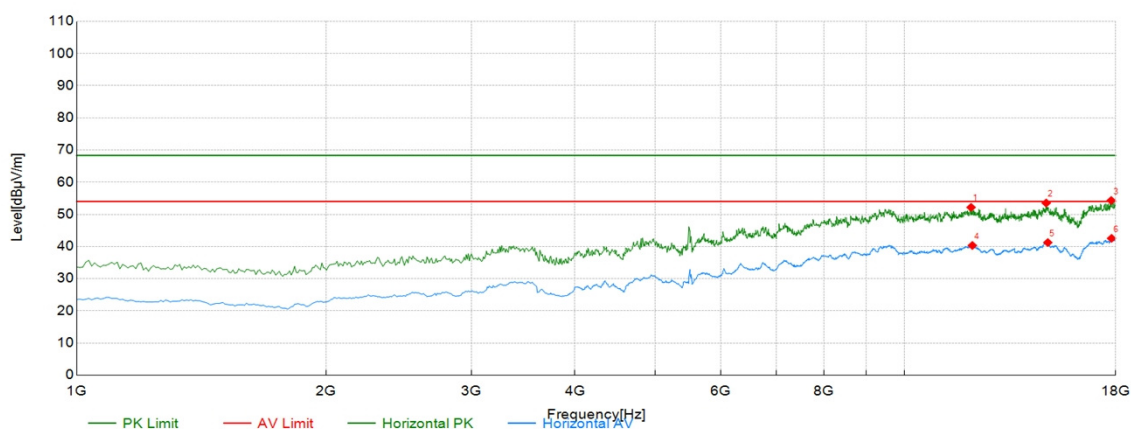

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12038.52	45.03	7.14	52.17	68.30	16.13	PK	Horizont	PASS
2	14836.42	44.71	8.81	53.52	68.30	14.78	PK	Horizont	PASS
3	17778.89	42.28	12.04	54.32	68.30	13.98	PK	Horizont	PASS
4	12081.04	33.09	7.23	40.32	54.00	13.68	AV	Horizont	PASS
5	14904.45	32.32	8.91	41.23	54.00	12.77	AV	Horizont	PASS
6	17795.90	30.29	12.25	42.54	54.00	11.46	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5270Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

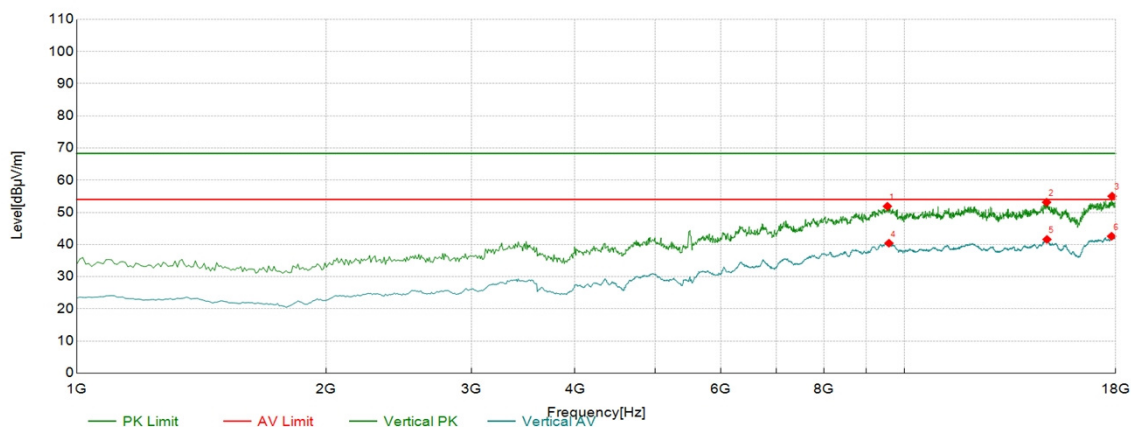

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9538.27	47.53	4.36	51.89	68.30	16.41	PK	Vertical	PASS
2	14853.43	44.30	8.84	53.14	68.30	15.16	PK	Vertical	PASS
3	17821.41	42.77	12.25	55.02	68.30	13.28	PK	Vertical	PASS
4	9580.79	35.93	4.47	40.40	54.00	13.60	AV	Vertical	PASS
5	14870.44	32.70	8.88	41.58	54.00	12.42	AV	Vertical	PASS
6	17795.90	30.31	12.25	42.56	54.00	11.44	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5310Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

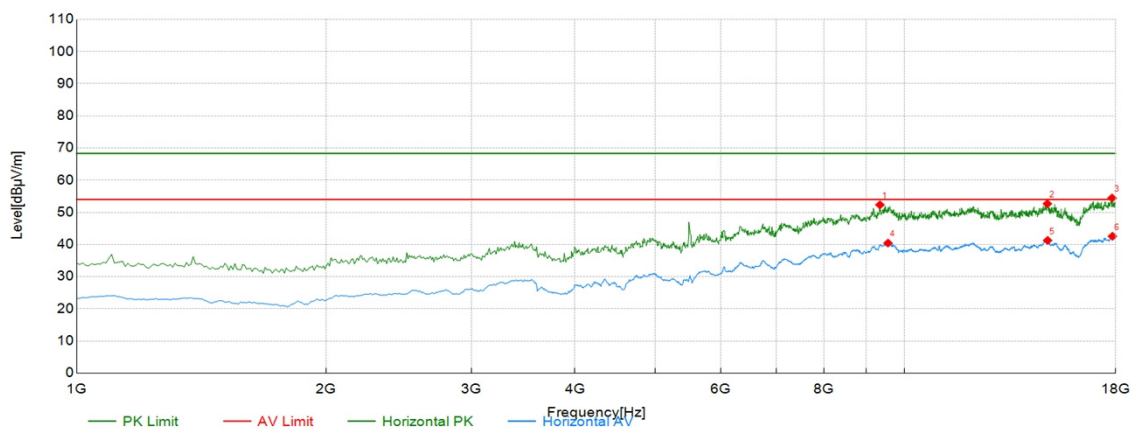

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9342.67	49.39	2.95	52.34	68.30	15.96	PK	Horizont	PASS
2	14887.44	43.76	8.91	52.67	68.30	15.63	PK	Horizont	PASS
3	17821.41	42.22	12.25	54.47	68.30	13.83	PK	Horizont	PASS
4	9555.28	36.11	4.33	40.44	54.00	13.56	AV	Horizont	PASS
5	14895.95	32.34	8.93	41.27	54.00	12.73	AV	Horizont	PASS
6	17838.42	30.37	12.20	42.57	54.00	11.43	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5310Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

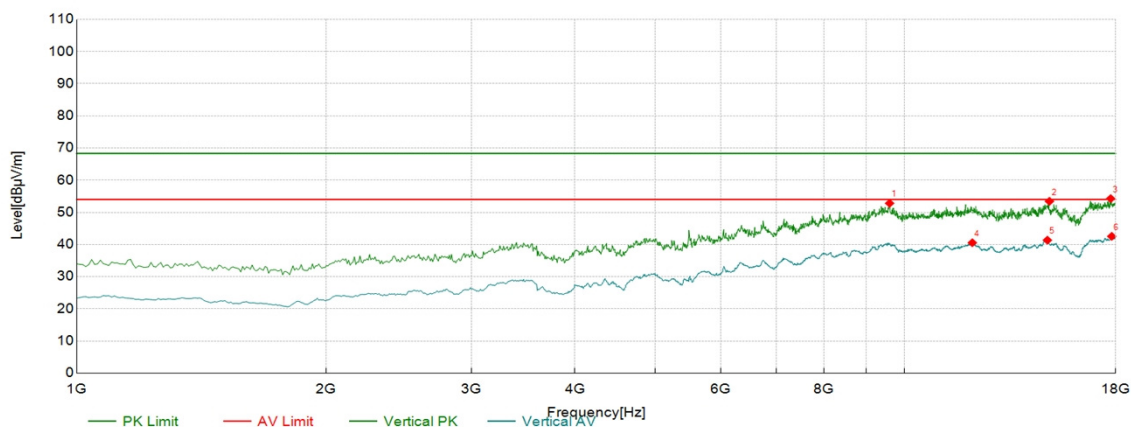

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9597.80	48.26	4.56	52.82	68.30	15.48	PK	Vertical	PASS
2	14972.49	44.94	8.50	53.44	68.30	14.86	PK	Vertical	PASS
3	17753.38	42.57	11.71	54.28	68.30	14.02	PK	Vertical	PASS
4	12081.04	33.32	7.23	40.55	54.00	13.45	AV	Vertical	PASS
5	14887.44	32.44	8.91	41.35	54.00	12.65	AV	Vertical	PASS
6	17804.40	30.25	12.29	42.54	54.00	11.46	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5510Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

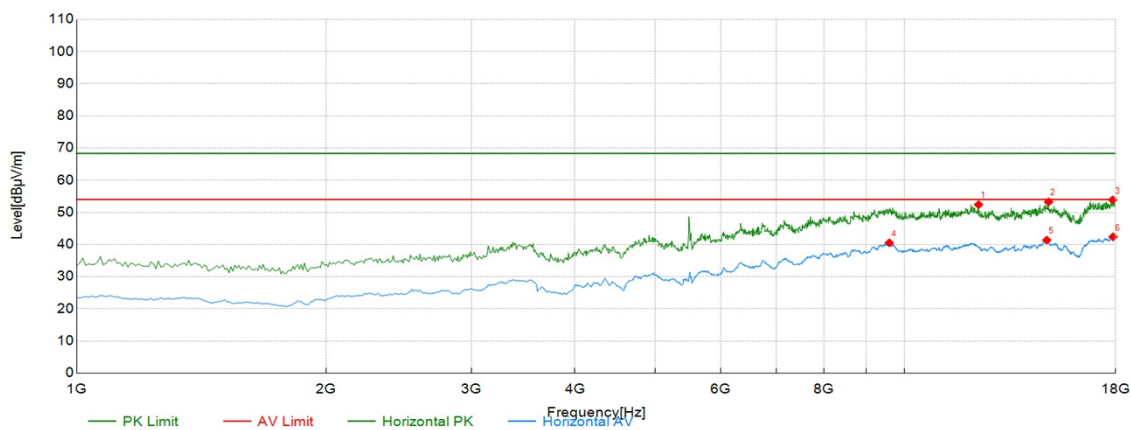

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12293.65	45.99	6.41	52.40	68.30	15.90	PK	Horizont	PASS
2	14938.47	44.55	8.70	53.25	68.30	15.05	PK	Horizont	PASS
3	17855.43	41.73	12.15	53.88	68.30	14.42	PK	Horizont	PASS
4	9589.29	36.00	4.51	40.51	54.00	13.49	AV	Horizont	PASS
5	14861.93	32.51	8.86	41.37	54.00	12.63	AV	Horizont	PASS
6	17872.44	30.26	12.12	42.38	54.00	11.62	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5510Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

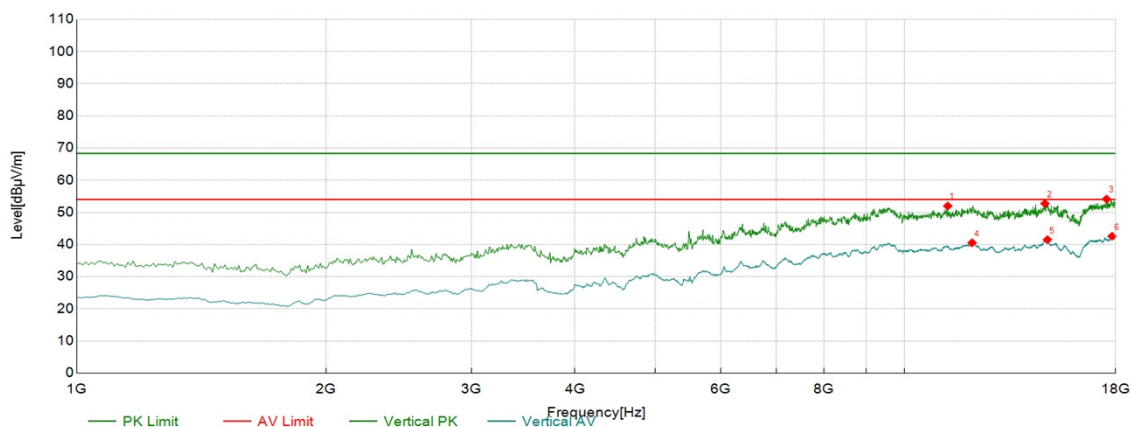

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11281.64	46.41	5.56	51.97	68.30	16.33	PK	Vertical	PASS
2	14785.39	44.11	8.62	52.73	68.30	15.57	PK	Vertical	PASS
3	17549.27	43.55	10.57	54.12	68.30	14.18	PK	Vertical	PASS
4	12072.54	33.32	7.21	40.53	54.00	13.47	AV	Vertical	PASS
5	14887.44	32.59	8.91	41.50	54.00	12.50	AV	Vertical	PASS
6	17821.41	30.32	12.25	42.57	54.00	11.43	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5550Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

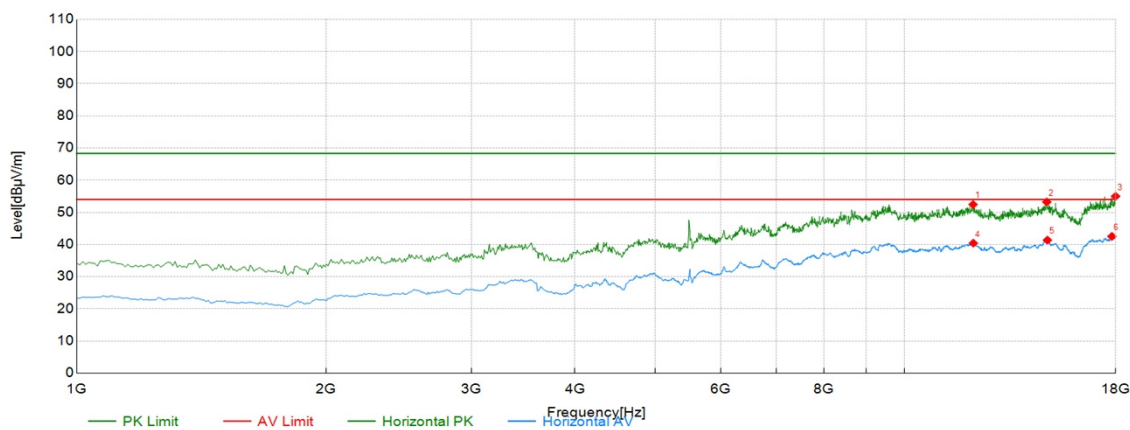

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12106.55	45.20	7.25	52.45	68.30	15.85	PK	Horizont	PASS
2	14861.93	44.36	8.86	53.22	68.30	15.08	PK	Horizont	PASS
3	18000.00	42.60	12.40	55.00	68.30	13.30	PK	Horizont	PASS
4	12115.06	33.21	7.21	40.42	54.00	13.58	AV	Horizont	PASS
5	14887.44	32.45	8.91	41.36	54.00	12.64	AV	Horizont	PASS
6	17812.91	30.25	12.27	42.52	54.00	11.48	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5550Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

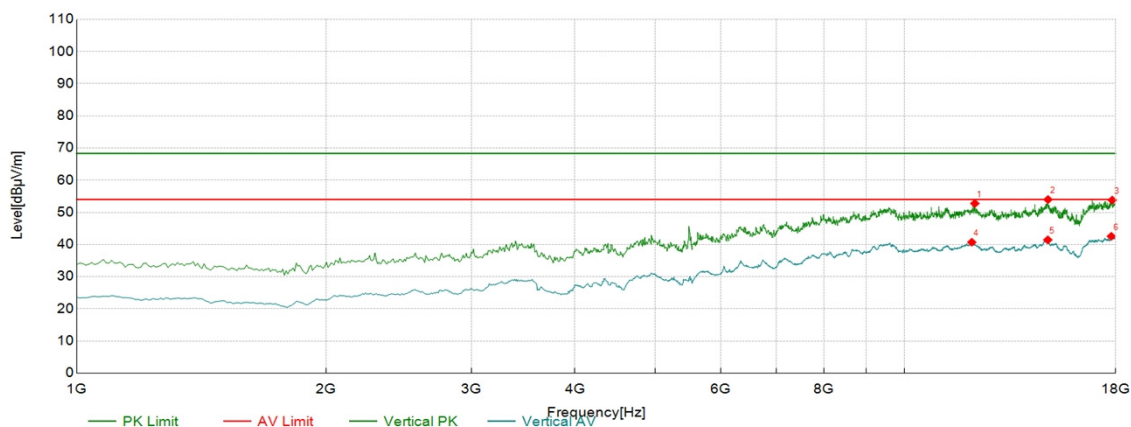

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12166.08	45.70	7.06	52.76	68.30	15.54	PK	Vertical	PASS
2	14912.96	45.12	8.86	53.98	68.30	14.32	PK	Vertical	PASS
3	17829.91	41.58	12.22	53.80	68.30	14.50	PK	Vertical	PASS
4	12064.03	33.51	7.20	40.71	54.00	13.29	AV	Vertical	PASS
5	14904.45	32.53	8.91	41.44	54.00	12.56	AV	Vertical	PASS
6	17787.39	30.41	12.14	42.55	54.00	11.45	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5670Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

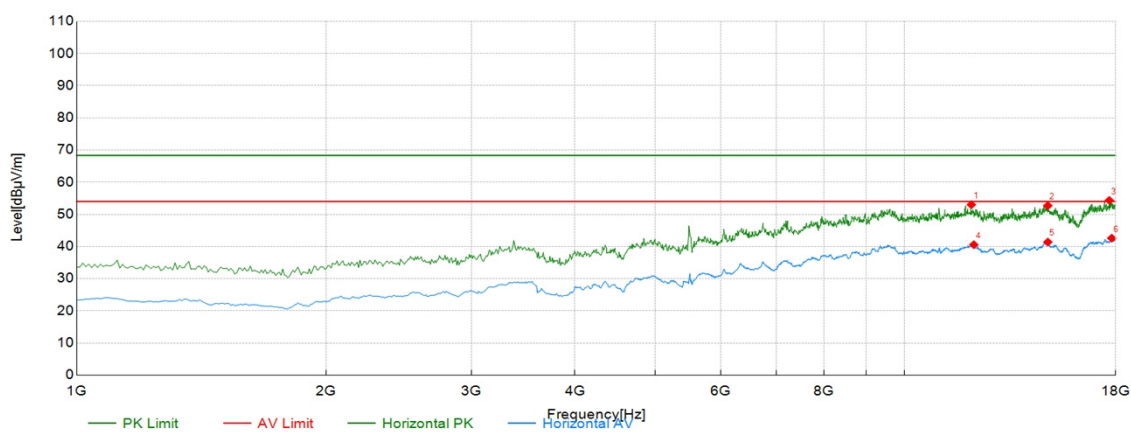

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12047.02	45.85	7.16	53.01	68.30	15.29	PK	Horizont	PASS
2	14904.45	43.80	8.91	52.71	68.30	15.59	PK	Horizont	PASS
3	17685.34	43.36	10.98	54.34	68.30	13.96	PK	Horizont	PASS
4	12132.07	33.37	7.18	40.55	54.00	13.45	AV	Horizont	PASS
5	14904.45	32.46	8.91	41.37	54.00	12.63	AV	Horizont	PASS
6	17804.40	30.30	12.29	42.59	54.00	11.41	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5670Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

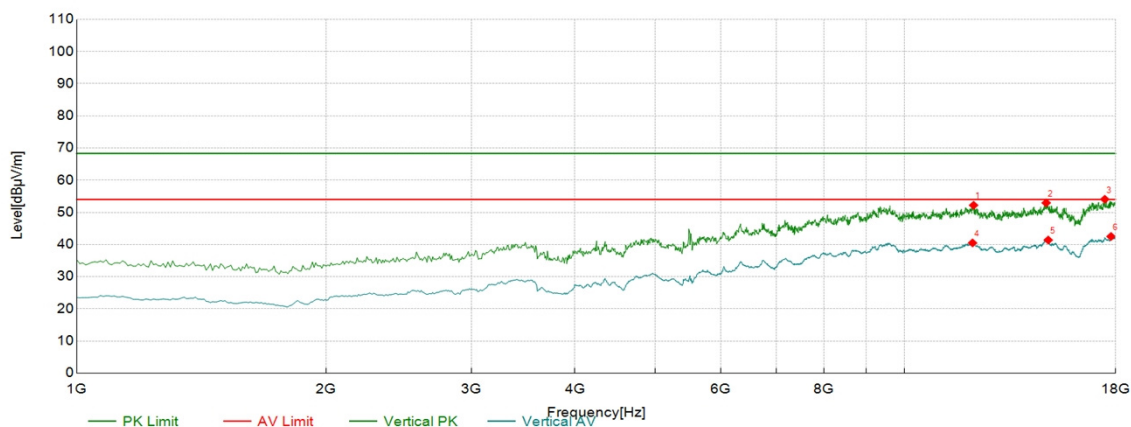

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12123.56	45.00	7.20	52.20	68.30	16.10	PK	Vertical	PASS
2	14836.42	44.14	8.81	52.95	68.30	15.35	PK	Vertical	PASS
3	17464.23	43.68	10.39	54.07	68.30	14.23	PK	Vertical	PASS
4	12089.54	33.24	7.25	40.49	54.00	13.51	AV	Vertical	PASS
5	14921.46	32.59	8.80	41.39	54.00	12.61	AV	Vertical	PASS
6	17770.39	30.57	11.92	42.49	54.00	11.51	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5755Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

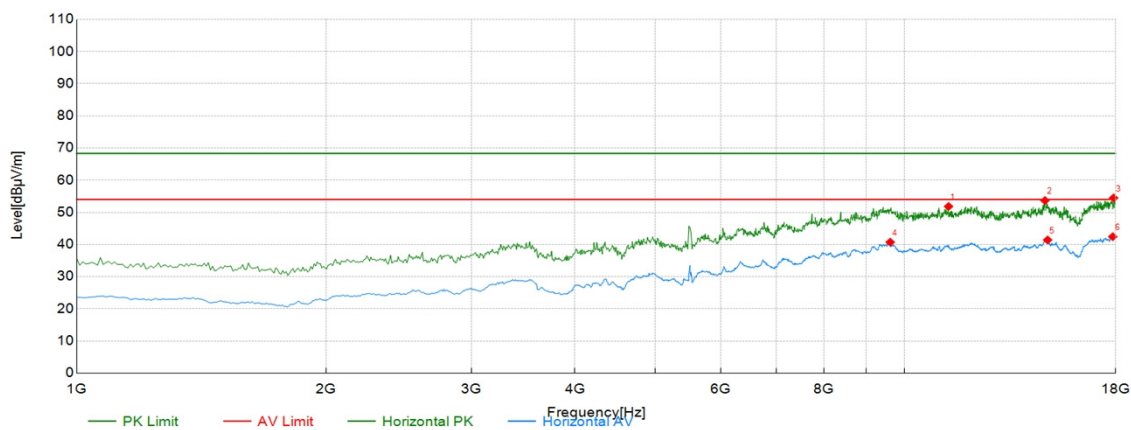

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11307.15	46.21	5.62	51.83	68.30	16.47	PK	Horizont	PASS
2	14785.39	45.06	8.62	53.68	68.30	14.62	PK	Horizont	PASS
3	17897.95	42.43	12.06	54.49	68.30	13.81	PK	Horizont	PASS
4	9614.81	36.49	4.23	40.72	54.00	13.28	AV	Horizont	PASS
5	14895.95	32.48	8.93	41.41	54.00	12.59	AV	Horizont	PASS
6	17855.43	30.28	12.15	42.43	54.00	11.57	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5755Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

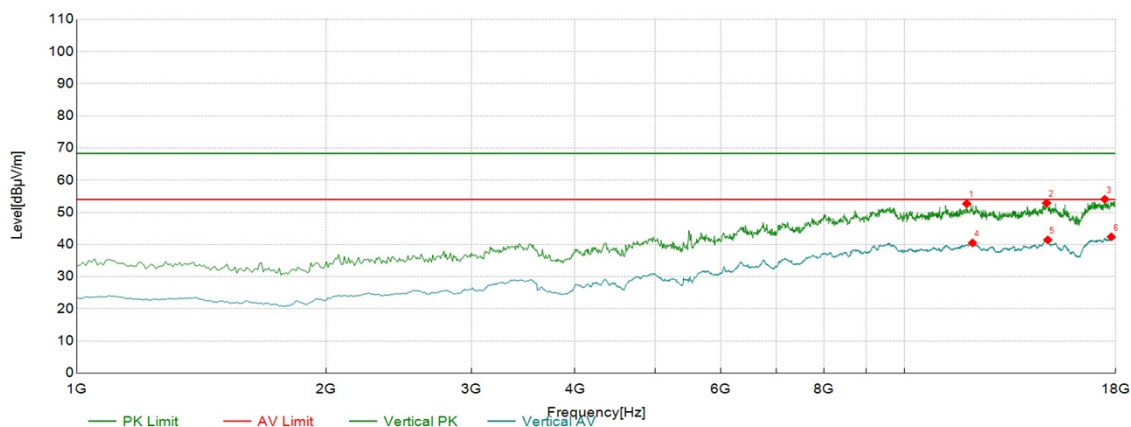

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11893.95	45.70	6.98	52.68	68.30	15.62	PK	Vertical	PASS
2	14853.43	44.05	8.84	52.89	68.30	15.41	PK	Vertical	PASS
3	17464.23	43.68	10.39	54.07	68.30	14.23	PK	Vertical	PASS
4	12089.54	33.23	7.25	40.48	54.00	13.52	AV	Vertical	PASS
5	14904.45	32.51	8.91	41.42	54.00	12.58	AV	Vertical	PASS
6	17787.39	30.24	12.14	42.38	54.00	11.62	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5795Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

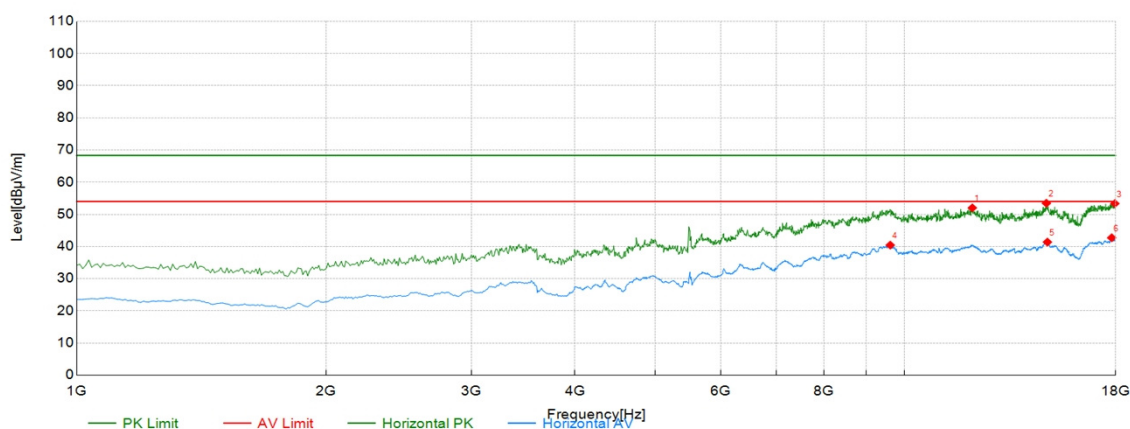

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12081.04	44.78	7.23	52.01	68.30	16.29	PK	Horizont	PASS
2	14844.92	44.64	8.82	53.46	68.30	14.84	PK	Horizont	PASS
3	17957.48	41.10	12.25	53.35	68.30	14.95	PK	Horizont	PASS
4	9614.81	36.20	4.23	40.43	54.00	13.57	AV	Horizont	PASS
5	14887.44	32.47	8.91	41.38	54.00	12.62	AV	Horizont	PASS
6	17804.40	30.42	12.29	42.71	54.00	11.29	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 5795Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

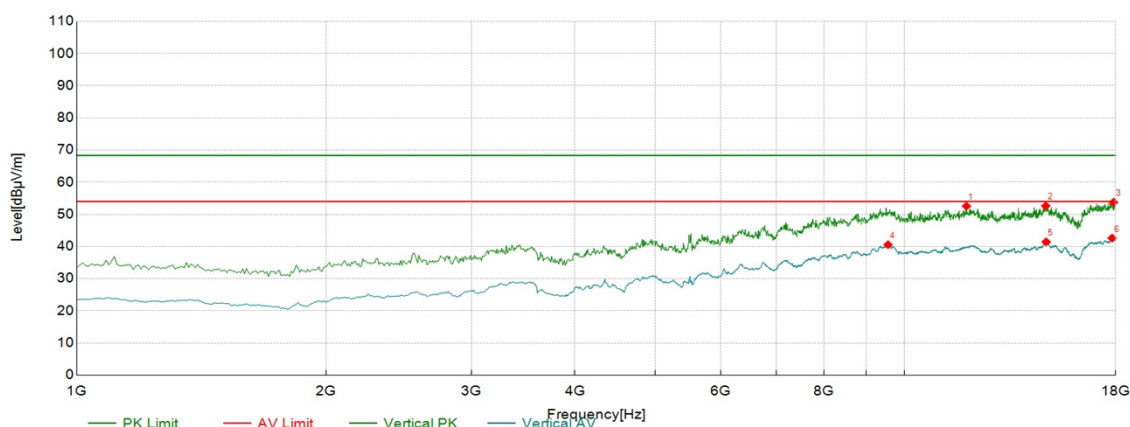

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11885.44	45.60	6.95	52.55	68.30	15.75	PK	Vertical	PASS
2	14819.41	43.84	8.78	52.62	68.30	15.68	PK	Vertical	PASS
3	17897.95	41.72	12.06	53.78	68.30	14.52	PK	Vertical	PASS
4	9555.28	36.22	4.33	40.55	54.00	13.45	AV	Vertical	PASS
5	14836.42	32.63	8.81	41.44	54.00	12.56	AV	Vertical	PASS
6	17821.41	30.36	12.25	42.61	54.00	11.39	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5190Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

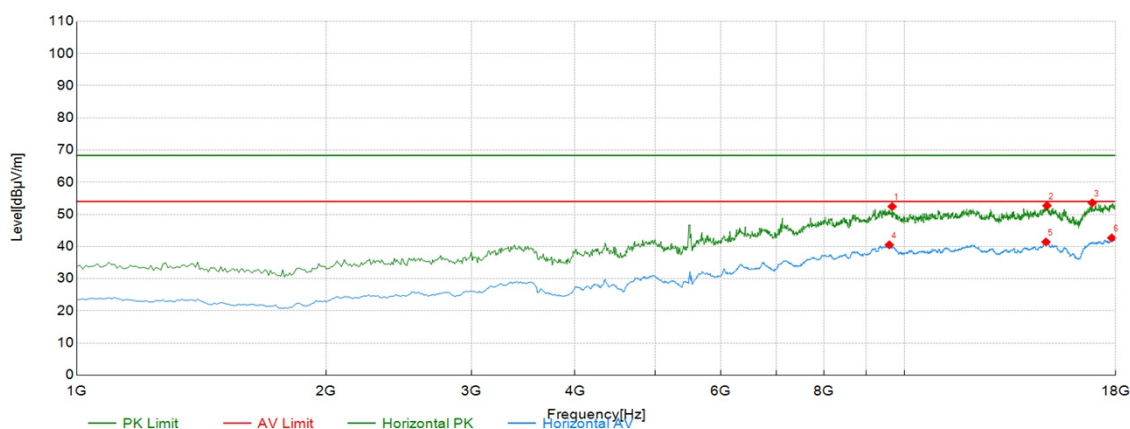

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9665.83	48.95	3.47	52.42	68.30	15.88	PK	Horizont	PASS
2	14870.44	43.81	8.88	52.69	68.30	15.61	PK	Horizont	PASS
3	16868.93	44.07	9.51	53.58	68.30	14.72	PK	Horizont	PASS
4	9589.29	36.01	4.51	40.52	54.00	13.48	AV	Horizont	PASS
5	14827.91	32.62	8.79	41.41	54.00	12.59	AV	Horizont	PASS
6	17804.40	30.38	12.29	42.67	54.00	11.33	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G), and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5190Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

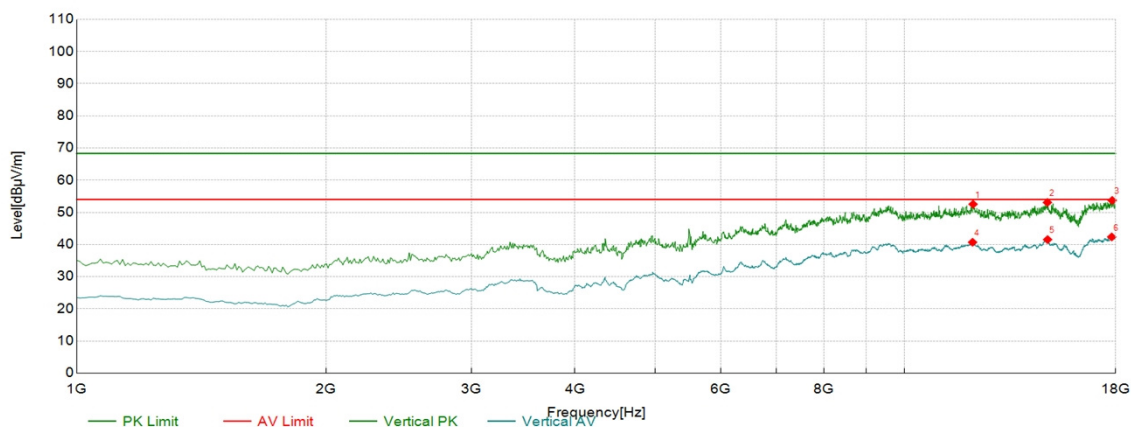

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12106.55	45.28	7.25	52.53	68.30	15.77	PK	Vertical	PASS
2	14887.44	44.16	8.91	53.07	68.30	15.23	PK	Vertical	PASS
3	17829.91	41.48	12.22	53.70	68.30	14.60	PK	Vertical	PASS
4	12089.54	33.45	7.25	40.70	54.00	13.30	AV	Vertical	PASS
5	14895.95	32.60	8.93	41.53	54.00	12.47	AV	Vertical	PASS
6	17804.40	30.07	12.29	42.36	54.00	11.64	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5230Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

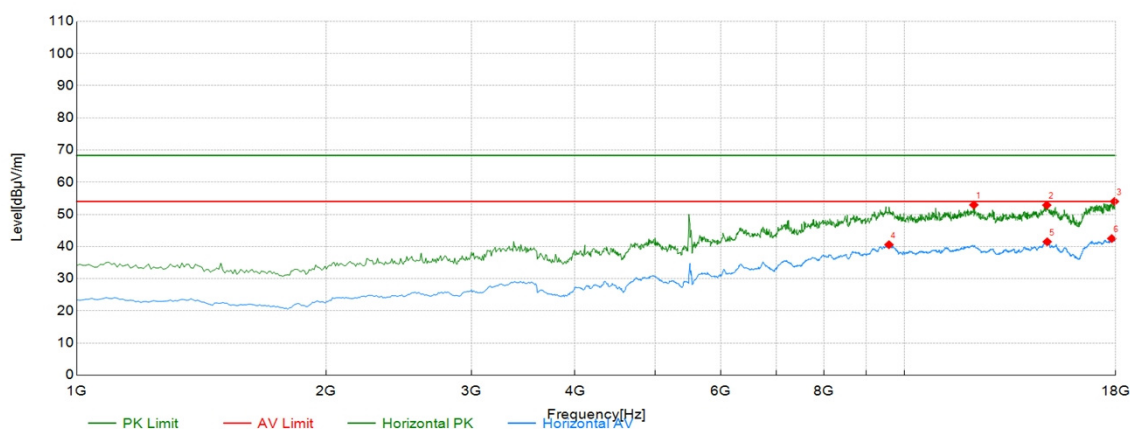

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12132.07	45.75	7.18	52.93	68.30	15.37	PK	Horizont	PASS
2	14861.93	44.01	8.86	52.87	68.30	15.43	PK	Horizont	PASS
3	17940.47	41.82	12.19	54.01	68.30	14.29	PK	Horizont	PASS
4	9580.79	36.08	4.47	40.55	54.00	13.45	AV	Horizont	PASS
5	14878.94	32.58	8.89	41.47	54.00	12.53	AV	Horizont	PASS
6	17804.40	30.18	12.29	42.47	54.00	11.53	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5230Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

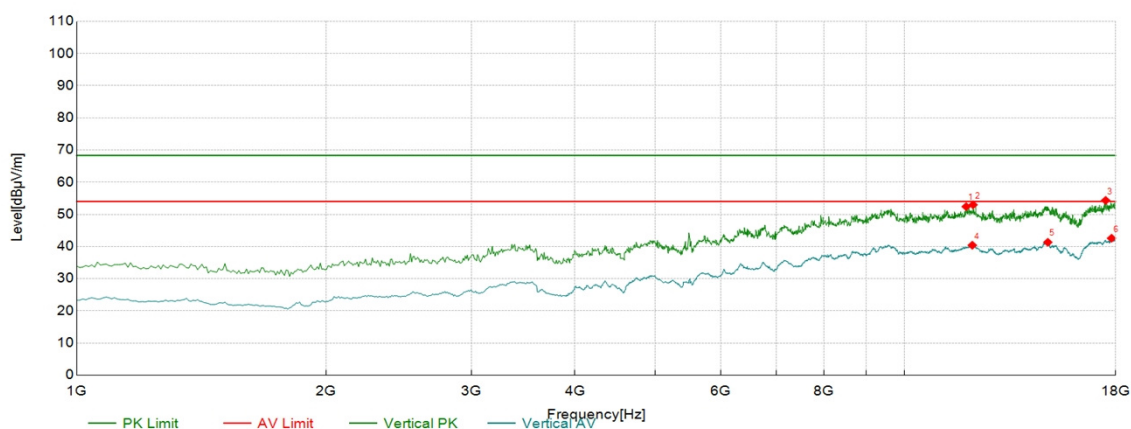

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11876.94	45.47	6.93	52.40	68.30	15.90	PK	Vertical	PASS
2	12106.55	45.72	7.25	52.97	68.30	15.33	PK	Vertical	PASS
3	17506.75	43.78	10.55	54.33	68.30	13.97	PK	Vertical	PASS
4	12081.04	33.16	7.23	40.39	54.00	13.61	AV	Vertical	PASS
5	14904.45	32.41	8.91	41.32	54.00	12.68	AV	Vertical	PASS
6	17795.90	30.32	12.25	42.57	54.00	11.43	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5270Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

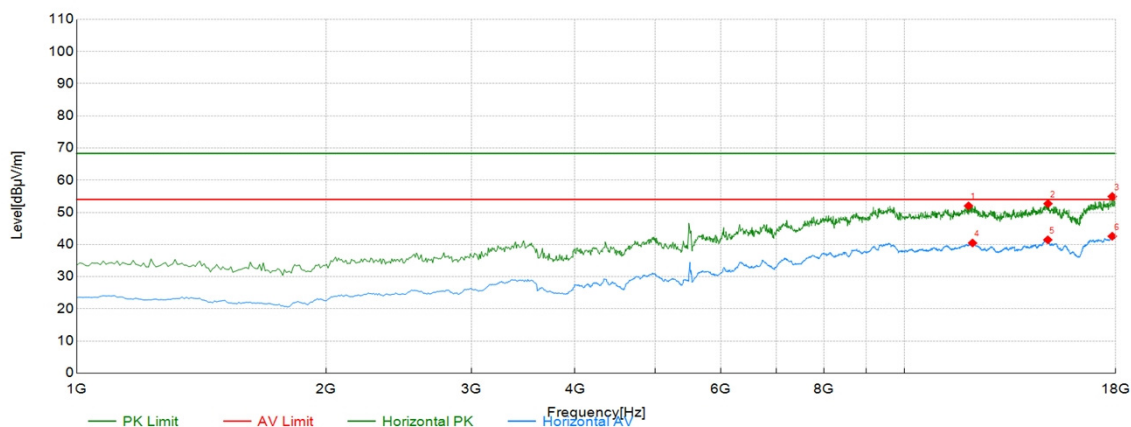

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11953.48	44.98	7.03	52.01	68.30	16.29	PK	Horizont	PASS
2	14912.96	43.83	8.86	52.69	68.30	15.61	PK	Horizont	PASS
3	17829.91	42.71	12.22	54.93	68.30	13.37	PK	Horizont	PASS
4	12089.54	33.22	7.25	40.47	54.00	13.53	AV	Horizont	PASS
5	14904.45	32.55	8.91	41.46	54.00	12.54	AV	Horizont	PASS
6	17829.91	30.35	12.22	42.57	54.00	11.43	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5270Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

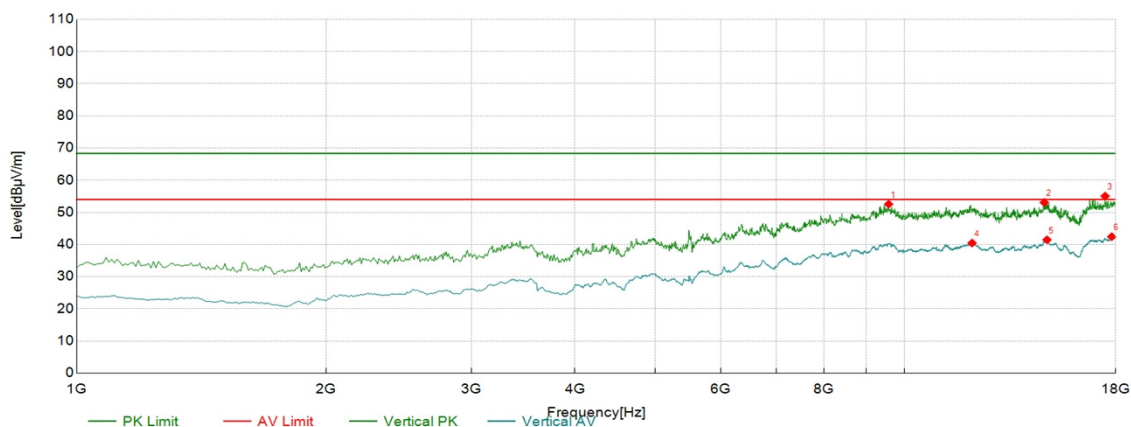

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9572.29	48.11	4.41	52.52	68.30	15.78	PK	Vertical	PASS
2	14759.88	44.64	8.42	53.06	68.30	15.24	PK	Vertical	PASS
3	17481.24	44.60	10.45	55.05	68.30	13.25	PK	Vertical	PASS
4	12072.54	33.24	7.21	40.45	54.00	13.55	AV	Vertical	PASS
5	14870.44	32.59	8.88	41.47	54.00	12.53	AV	Vertical	PASS
6	17804.40	30.14	12.29	42.43	54.00	11.57	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5310Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

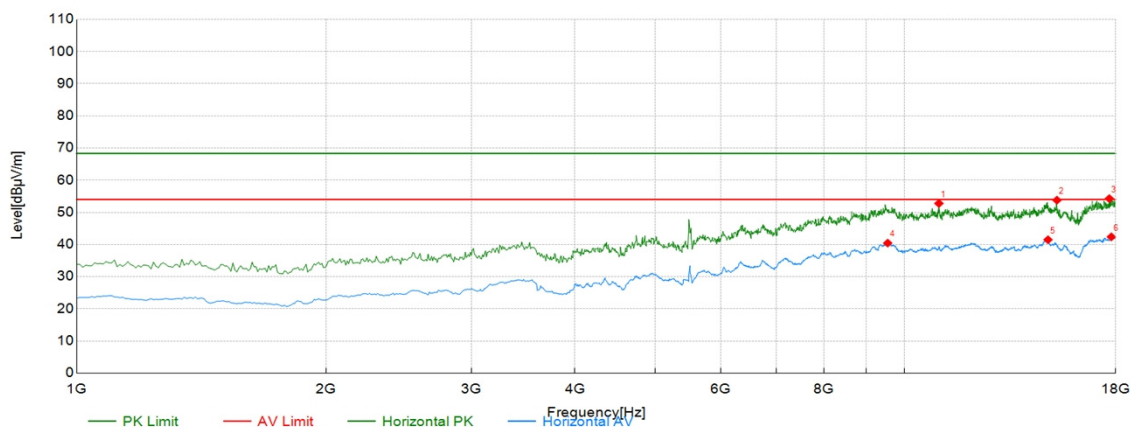

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11009.50	47.82	4.96	52.78	68.30	15.52	PK	Horizont	PASS
2	15287.14	45.52	8.27	53.79	68.30	14.51	PK	Horizont	PASS
3	17685.34	43.29	10.98	54.27	68.30	14.03	PK	Horizont	PASS
4	9546.77	36.11	4.32	40.43	54.00	13.57	AV	Horizont	PASS
5	14912.96	32.62	8.86	41.48	54.00	12.52	AV	Horizont	PASS
6	17787.39	30.24	12.14	42.38	54.00	11.62	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5310Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

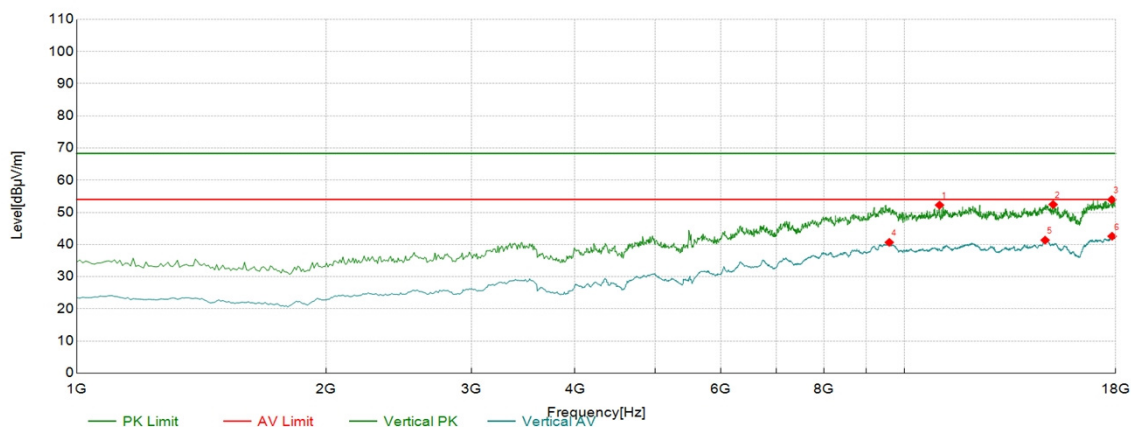

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11026.51	47.29	4.96	52.25	68.30	16.05	PK	Vertical	PASS
2	15125.56	43.92	8.52	52.44	68.30	15.86	PK	Vertical	PASS
3	17804.40	41.65	12.29	53.94	68.30	14.36	PK	Vertical	PASS
4	9589.29	36.15	4.51	40.66	54.00	13.34	AV	Vertical	PASS
5	14793.90	32.67	8.69	41.36	54.00	12.64	AV	Vertical	PASS
6	17821.41	30.31	12.25	42.56	54.00	11.44	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5510Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

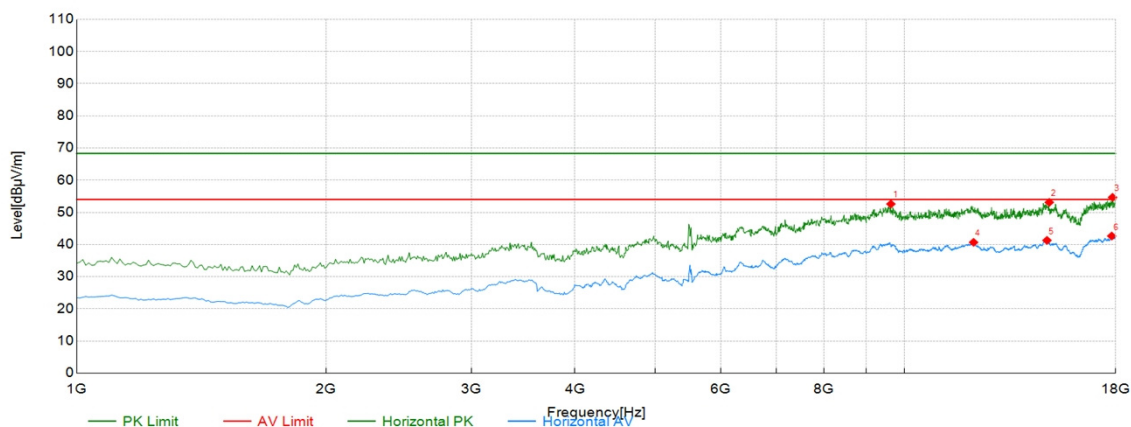

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9631.82	48.77	3.83	52.60	68.30	15.70	PK	Horizont	PASS
2	14963.98	44.56	8.54	53.10	68.30	15.20	PK	Horizont	PASS
3	17846.92	42.48	12.18	54.66	68.30	13.64	PK	Horizont	PASS
4	12123.56	33.47	7.20	40.67	54.00	13.33	AV	Horizont	PASS
5	14870.44	32.41	8.88	41.29	54.00	12.71	AV	Horizont	PASS
6	17804.40	30.34	12.29	42.63	54.00	11.37	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5510Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

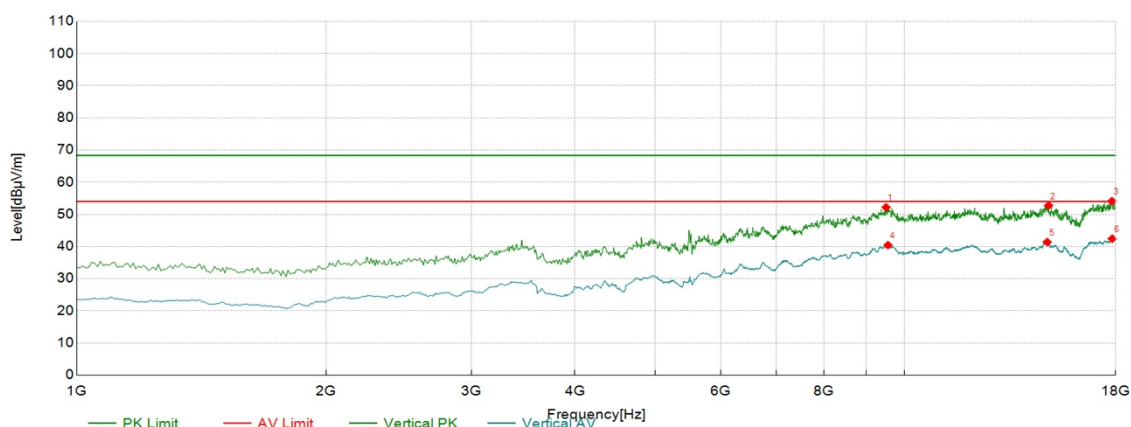

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9504.25	47.64	4.54	52.18	68.30	16.12	PK	Vertical	PASS
2	14938.47	44.05	8.70	52.75	68.30	15.55	PK	Vertical	PASS
3	17812.91	41.85	12.27	54.12	68.30	14.18	PK	Vertical	PASS
4	9555.28	36.10	4.33	40.43	54.00	13.57	AV	Vertical	PASS
5	14878.94	32.49	8.89	41.38	54.00	12.62	AV	Vertical	PASS
6	17829.91	30.21	12.22	42.43	54.00	11.57	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5550Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

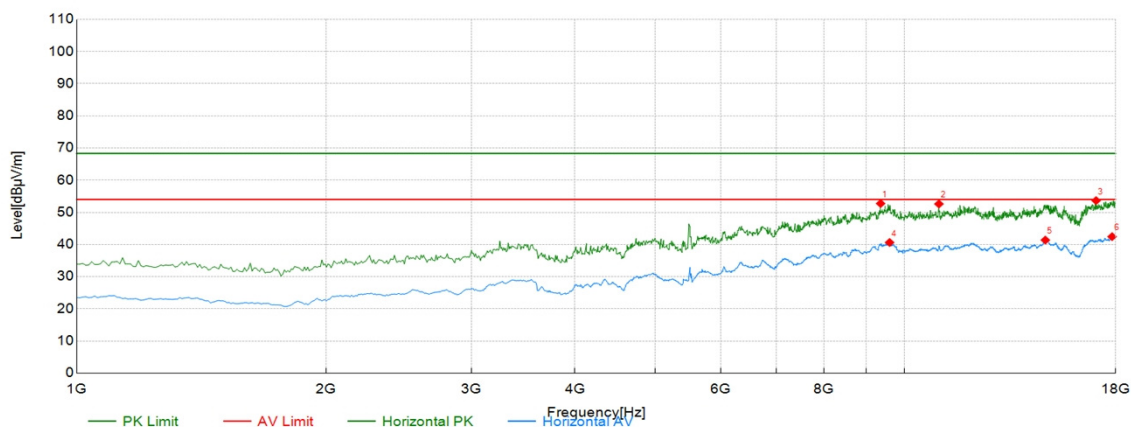

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9359.68	49.51	3.24	52.75	68.30	15.55	PK	Horizont	PASS
2	11009.50	47.65	4.96	52.61	68.30	15.69	PK	Horizont	PASS
3	17047.52	44.04	9.61	53.65	68.30	14.65	PK	Horizont	PASS
4	9597.80	36.07	4.56	40.63	54.00	13.37	AV	Horizont	PASS
5	14802.40	32.64	8.74	41.38	54.00	12.62	AV	Horizont	PASS
6	17821.41	30.19	12.25	42.44	54.00	11.56	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5550Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

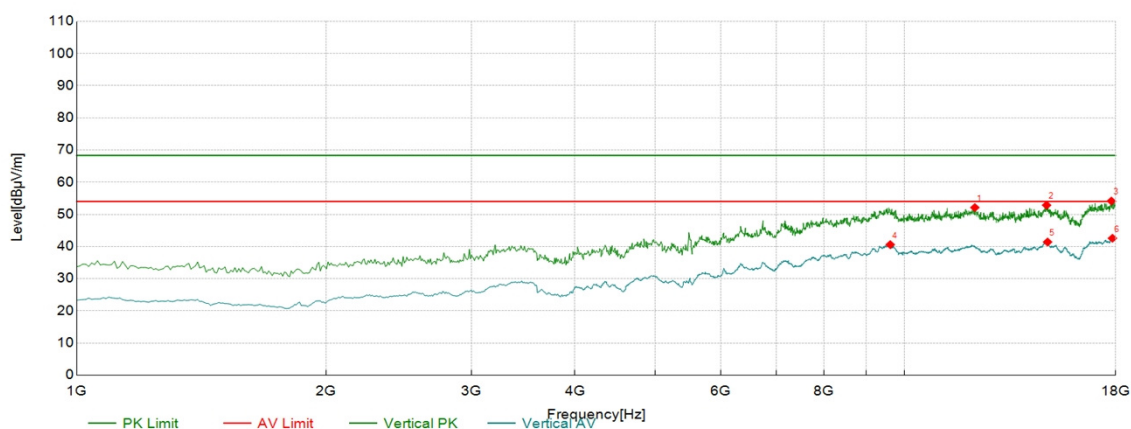

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12166.08	45.05	7.06	52.11	68.30	16.19	PK	Vertical	PASS
2	14853.43	44.01	8.84	52.85	68.30	15.45	PK	Vertical	PASS
3	17787.39	42.01	12.14	54.15	68.30	14.15	PK	Vertical	PASS
4	9614.81	36.35	4.23	40.58	54.00	13.42	AV	Vertical	PASS
5	14895.95	32.47	8.93	41.40	54.00	12.60	AV	Vertical	PASS
6	17838.42	30.36	12.20	42.56	54.00	11.44	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5670Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

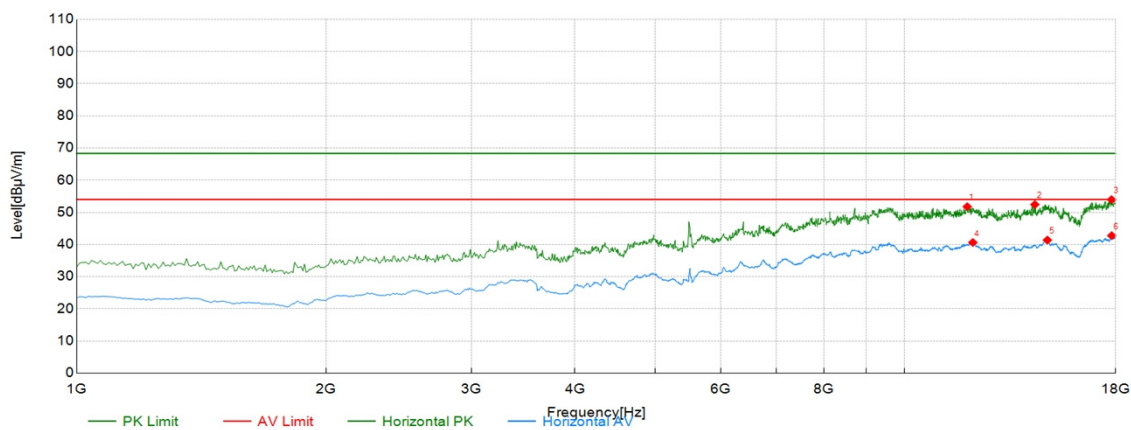

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11910.96	44.75	7.01	51.76	68.30	16.54	PK	Horizont	PASS
2	14377.19	45.47	6.96	52.43	68.30	15.87	PK	Horizont	PASS
3	17795.90	41.70	12.25	53.95	68.30	14.35	PK	Horizont	PASS
4	12098.05	33.37	7.26	40.63	54.00	13.37	AV	Horizont	PASS
5	14887.44	32.46	8.91	41.37	54.00	12.63	AV	Horizont	PASS
6	17804.40	30.45	12.29	42.74	54.00	11.26	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5670Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

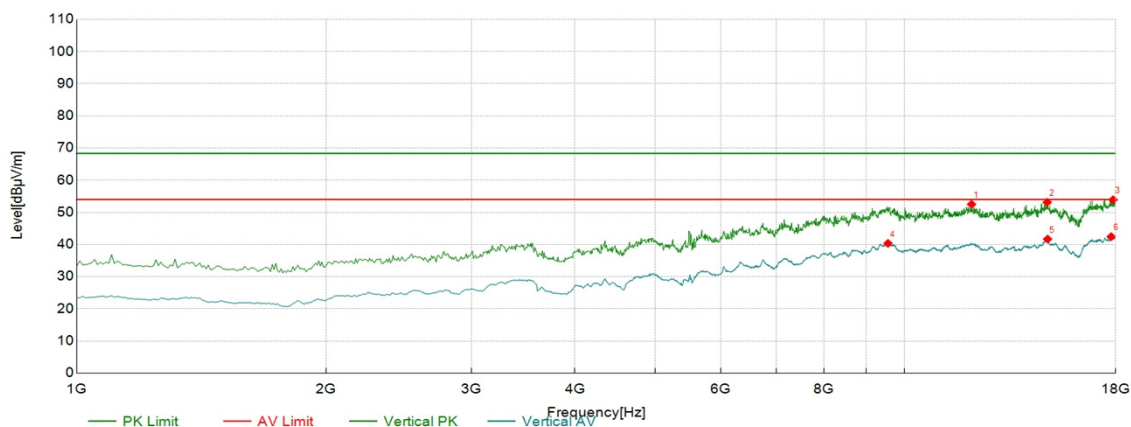

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	12055.53	45.32	7.18	52.50	68.30	15.80	PK	Vertical	PASS
2	14878.94	44.24	8.89	53.13	68.30	15.17	PK	Vertical	PASS
3	17872.44	41.79	12.12	53.91	68.30	14.39	PK	Vertical	PASS
4	9555.28	36.01	4.33	40.34	54.00	13.66	AV	Vertical	PASS
5	14895.95	32.76	8.93	41.69	54.00	12.31	AV	Vertical	PASS
6	17778.89	30.40	12.04	42.44	54.00	11.56	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5755Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

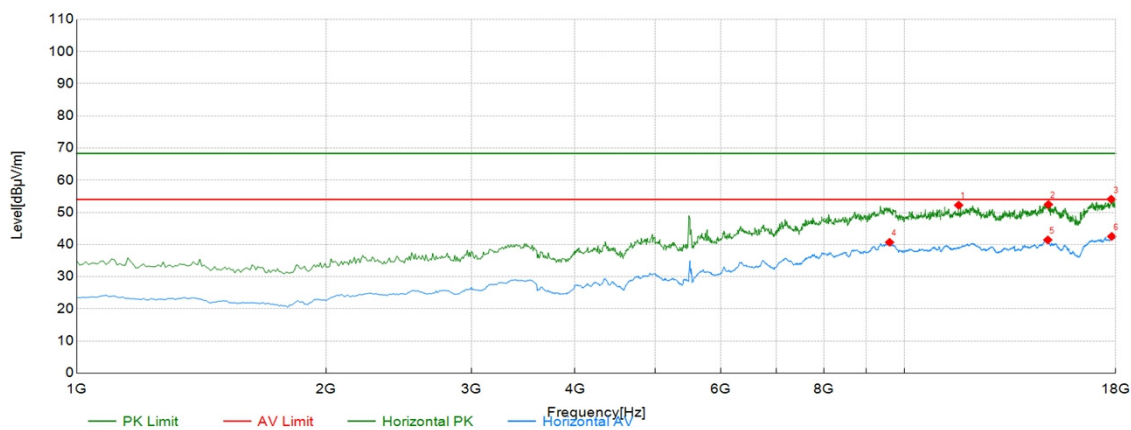

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11630.32	46.38	5.84	52.22	68.30	16.08	PK	Horizont	PASS
2	14929.96	43.68	8.75	52.43	68.30	15.87	PK	Horizont	PASS
3	17778.89	42.04	12.04	54.08	68.30	14.22	PK	Horizont	PASS
4	9597.80	36.13	4.56	40.69	54.00	13.31	AV	Horizont	PASS
5	14904.45	32.51	8.91	41.42	54.00	12.58	AV	Horizont	PASS
6	17804.40	30.22	12.29	42.51	54.00	11.49	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5755Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

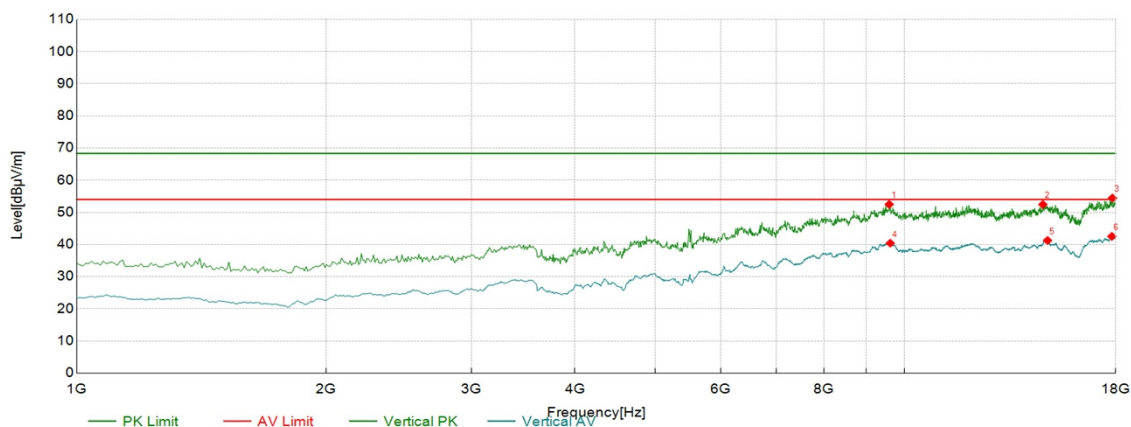

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9589.29	47.97	4.51	52.48	68.30	15.82	PK	Vertical	PASS
2	14700.35	44.51	7.94	52.45	68.30	15.85	PK	Vertical	PASS
3	17838.42	42.26	12.20	54.46	68.30	13.84	PK	Vertical	PASS
4	9614.81	36.17	4.23	40.40	54.00	13.60	AV	Vertical	PASS
5	14895.95	32.33	8.93	41.26	54.00	12.74	AV	Vertical	PASS
6	17812.91	30.26	12.27	42.53	54.00	11.47	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5795Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

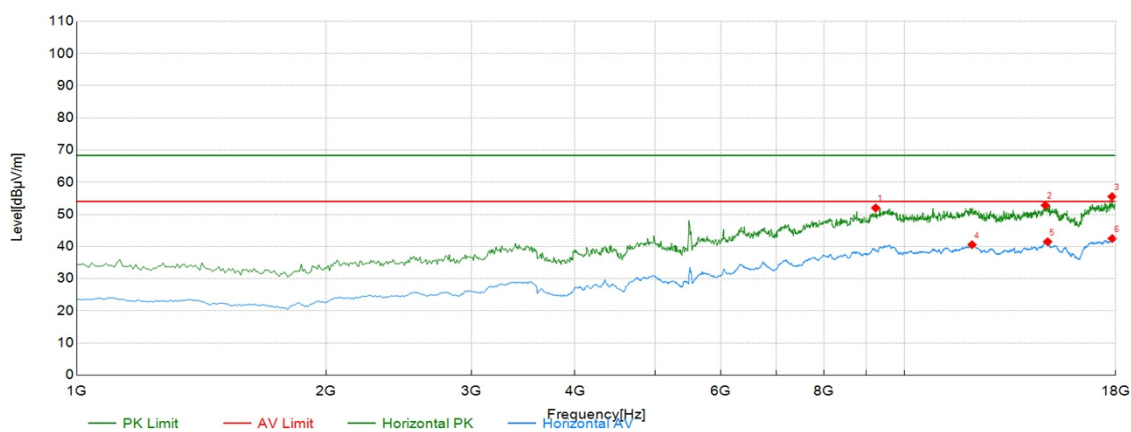

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9232.12	50.49	1.50	51.99	68.30	16.31	PK	Horizont	PASS
2	14802.40	44.07	8.74	52.81	68.30	15.49	PK	Horizont	PASS
3	17821.41	43.28	12.25	55.53	68.30	12.77	PK	Horizont	PASS
4	12072.54	33.34	7.21	40.55	54.00	13.45	AV	Horizont	PASS
5	14895.95	32.56	8.93	41.49	54.00	12.51	AV	Horizont	PASS
6	17829.91	30.25	12.22	42.47	54.00	11.53	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AC40 5795Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

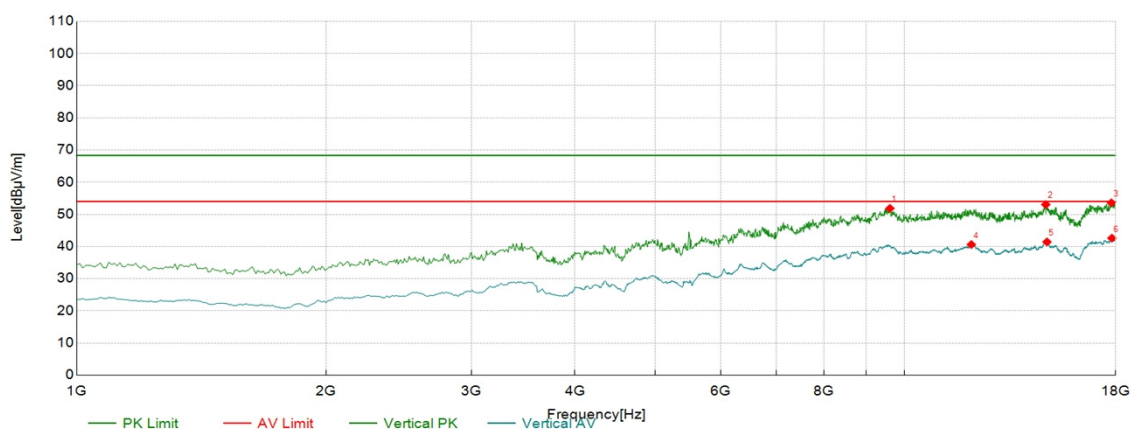

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9606.30	47.43	4.42	51.85	68.30	16.45	PK	Vertical	PASS
2	14819.41	44.26	8.78	53.04	68.30	15.26	PK	Vertical	PASS
3	17787.39	41.45	12.14	53.59	68.30	14.71	PK	Vertical	PASS
4	12047.02	33.45	7.16	40.61	54.00	13.39	AV	Vertical	PASS
5	14870.44	32.55	8.88	41.43	54.00	12.57	AV	Vertical	PASS
6	17812.91	30.33	12.27	42.60	54.00	11.40	AV	Vertical	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	AX40 5190Tx Mode	Test Voltage:	DC 5V
Temperature: (°C):	23.4	Humidity (%):	53
Atm. press. (Mpa):	0.102		
Remark:	Only show the worst data.		

Test Graph

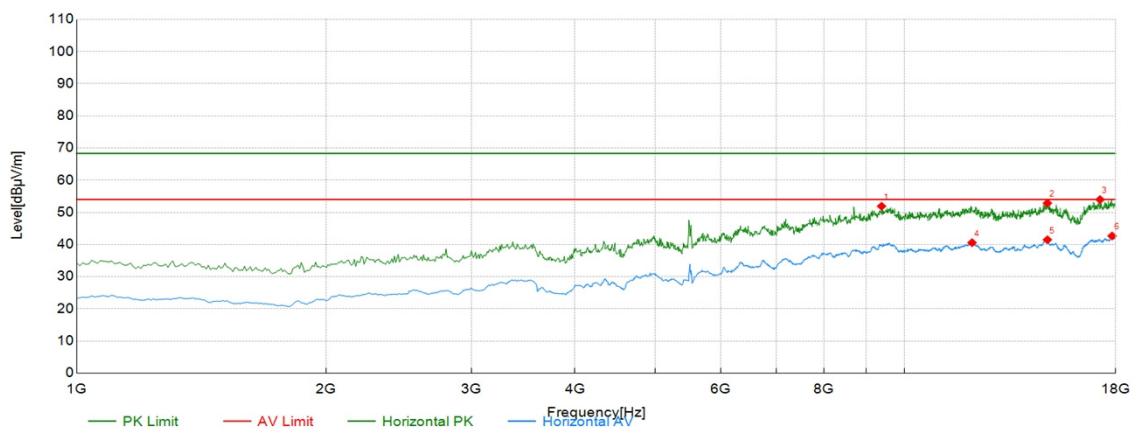

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	9385.19	48.54	3.36	51.90	68.30	16.40	PK	Horizont	PASS
2	14887.44	43.94	8.91	52.85	68.30	15.45	PK	Horizont	PASS
3	17234.62	43.60	10.37	53.97	68.30	14.33	PK	Horizont	PASS
4	12072.54	33.36	7.21	40.57	54.00	13.43	AV	Horizont	PASS
5	14887.44	32.56	8.91	41.47	54.00	12.53	AV	Horizont	PASS
6	17821.41	30.40	12.25	42.65	54.00	11.35	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)

3. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G)., and 18GHz-40GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.

