

承認書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:

德立华

客 戶 料 號:
CUST P/N:

74-8736-0000-44

音 澤 料 號:
FINE P/N:

G43.5*0.5-20.5-0.08*24*2P-10TS-6.8UH-L8MM+BJ

產 品 型 號:
DESC:

Φ43.5MMX0.5MM

日 期:
DATE:

2025/07/17

版 本:
Version:

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	马莉	但可清	

Dongguan Yinze Electronic Technology Co., Ltd.

Factory Address: Building 2, No. 901, Xinghan Road (Chuangfu Central City), Chaishan Town, Dongguan City


TEL: 18617251159

Version Change History


[illegible]

SPECIFICATION

产 品 型 号: DESC	G43.5*0.5-20.5-0.08*24*2P-10 TS-6.8UH-L8MM+BJ	版本 Rev: A.0	客 户 CUST:	Deliwa	
			客户料号 CUST P/N:		

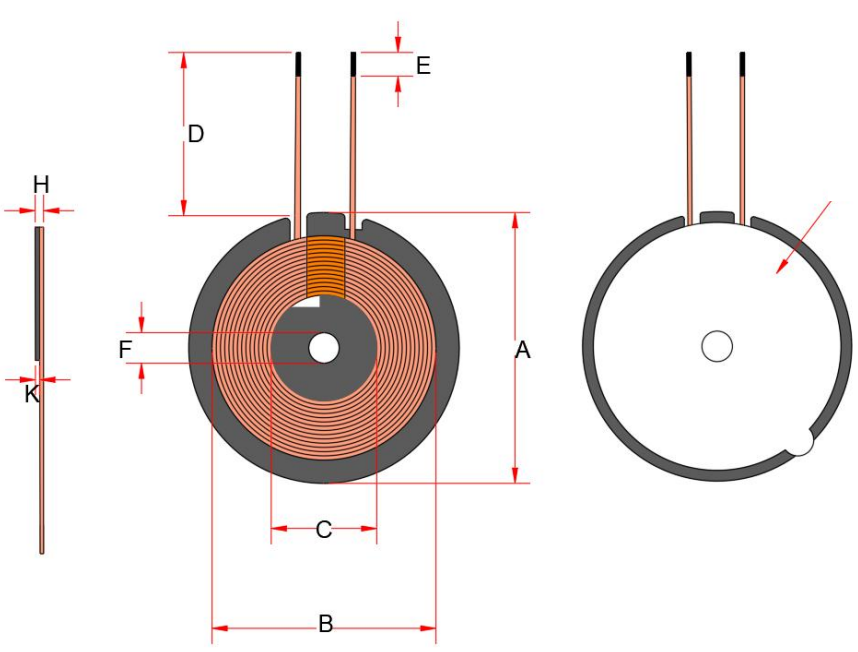一、尺寸 DIMENSION:(mm) 	A	43.5±0.5mm	
	B	38.5±0.5mm	
	C	20.5±0.5mm	
	D	8 ±2mm	
	E	3±2mm	
	F	5.3±0.2mm	
	K	0.5±0.05mm	
	H	1.4±0.1mm	
	I		

二、原理图 SCHEMATIC DIAGRAM:

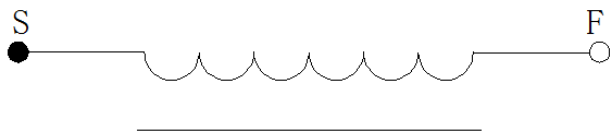

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风铜线 0.08*24*2P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8uH ±10%	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100mΩ	100KHz/1.0V	LCZ METER 1062B