



FCC Part 15C Test Report

FCC ID: 2BOLI-HP6000

Applicant: Shenzhen Wei Peng Shiji Technology Co., Ltd.
Address: 3F, #2 Dayang Electrical Plant, #4 Gongye Avenue, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, China
Manufacturer: Guangdong Weipeng Shiji New Energy Technology Co., Ltd.
Address: Floor 8, Building 2, Junkai Road No. 5, Changxing Industrial Area Phase 3, Junan Community, Junan Town, Shunde District, Foshan City.
EUT: Portable Power Supply
Trade Mark: N/A
Model Number: HP6000
Date of Receipt: Jan. 03, 2026
Test Date: Jan. 03, 2026 to Jan. 14, 2026
Date of Report: Jan. 14, 2026
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Result: Pass
Report Number: DLE-260109019R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents

	Page
1. VERSION	4
2. SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. EMC EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.1.6 TEST RESULT	13
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS	17
5.1 TEST REQUIREMENT:	28
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM TEST STANDARD	29
5.4 TEST SETUP	29
5.5 EUT OPERATING CONDITIONS	29
5.6 TEST RESULT	30
6.1 APPLIED PROCEDURES / LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULT	33
7. 6DB OCCUPIED BANDWIDTH	41
7.1 APPLIED PROCEDURES / LIMIT	41
7.2 TEST PROCEDURE	41
7.3 DEVIATION FROM STANDARD	41
7.4 TEST SETUP	41
7.5 EUT OPERATION CONDITIONS	41
7.6 TEST RESULT	42
8.PEAK OUTPUT POWER TEST	45
8.1 APPLIED PROCEDURES/LIMIT	45
8.2 TEST PROCEDURE	45



8.3 DEVIATION FROM STANDARD	45
8.4 TEST SETUP	45
8.5 EUT OPERATION CONDITIONS	45
8.6 TEST RESULT	46
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	47
9.1 APPLICABLE STANDARD	47
9.2 TEST PROCEDURE	47
9.3 DEVIATION FROM STANDARD	47
9.4 TEST SETUP	48
9.5 EUT OPERATION CONDITIONS	48
9.6 TEST RESULTS	48
10. DUTY CYCLE	56
10.1 APPLIED PROCEDURES / LIMIT	56
10.2 DEVIATION FROM STANDARD	56
10.3 TEST SETUP	56
11. ANTENNA REQUIREMENT	60
12. TEST SETUP PHOTO	61
13. EUT CONSTRUCTIONAL DETAILS	61



Shenzhen DL Testing Technology Co., Ltd.

Report No.: DLE-260109019R

1. VERSION

Report No.	Version	Description	Approved
DLE-260109019R	Rev.01	Initial issue of report	Jan. 14, 2026



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	6dB Occupied Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209 FCC part 15.247(d)	Spurious Emission	PASS	
ANSI C63.10:2020	Duty cycle	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Portable Power Supply
Model No.:	HP6000
Serial No.:	N/A
Model Different:	N/A
Hardware Version:	N/A
Software Version:	N/A
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(HT20/HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	PCB antenna
Antenna gain:	3.96dBi
Power Supply:	AC Input:90V-140V 50Hz/60Hz 20A Max 1800W Max 200V-240V 50Hz/60Hz 20A Max 3600W Max Solar Input :12V-140V MPPT: 18V-130V 15A Max 2100W Max Cigarette Lighter Input :12V-15V 8.5A Max AC Output: 120V/3600W & 240V/6000W 50Hz/60Hz Boost Mode: 7200W; Surge: 9000W Bypass Mode: 2400W Cigarette Lighter Output :DC12V 10A 120W USB-A Output :DC5V3A; DC9V2A; DC12V1.5A 18W Max USB-C Output :DC5V3A; DC9V3A; DC12V3A; DC15V3A; DC20V5A; DC28V5A 140W Max XT90 Output :DC12V30A/DC24V20A Battery:DC 51.2V



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and for battery operated equipment, the equipment tests shall be performed using a new battery.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

Test Software	SecureCRT
Power level setup	Default



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted emissions



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Portable Power Supply	N/A	HP6000	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 25, 2025	Oct. 24, 2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Power meter	KEYSIGHT	N1912AP	926431	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
3	LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2020
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

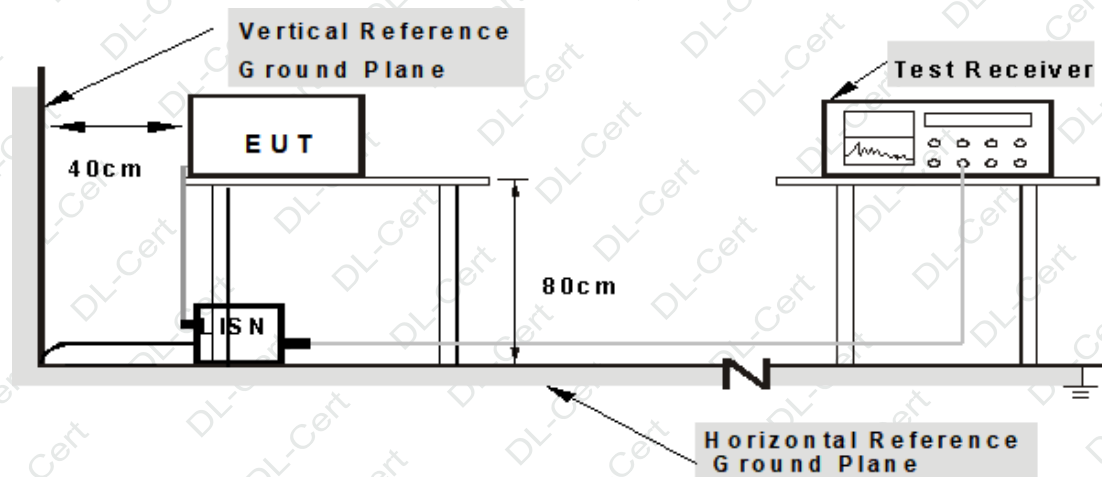

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Charging + TX 802.11n20 - 2412MHz

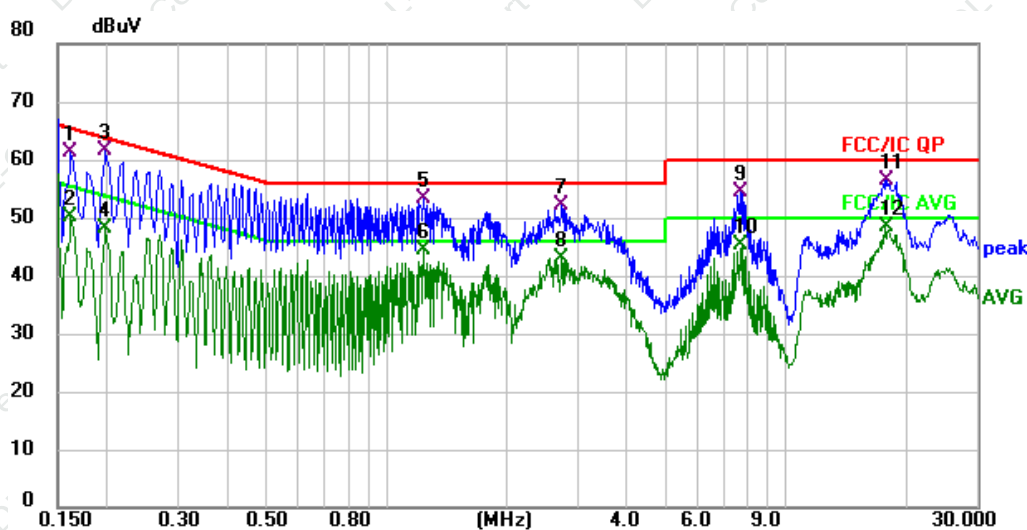


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1620	51.66	9.65	61.31	65.36	-4.05	QP	P
2	0.1620	40.43	9.65	50.08	55.36	-5.28	AVG	P
3	0.1980	51.81	9.64	61.45	63.69	-2.24	QP	P
4	0.1980	38.42	9.64	48.06	53.69	-5.63	AVG	P
5	1.2420	43.62	9.67	53.29	56.00	-2.71	QP	P
6	1.2420	34.80	9.67	44.47	46.00	-1.53	AVG	P
7	2.7380	42.36	9.71	52.07	56.00	-3.93	QP	P
8	2.7380	33.32	9.71	43.03	46.00	-2.97	AVG	P
9	7.6860	44.63	9.79	54.42	60.00	-5.58	QP	P
10	7.6860	35.43	9.79	45.22	50.00	-4.78	AVG	P
11	17.8940	46.47	9.89	56.36	60.00	-3.64	QP	P
12 *	17.8940	38.67	9.89	48.56	50.00	-1.44	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case Charging +TX GFSK - 2402MHz.



Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Charging + TX 802.11n20 - 2412MHz

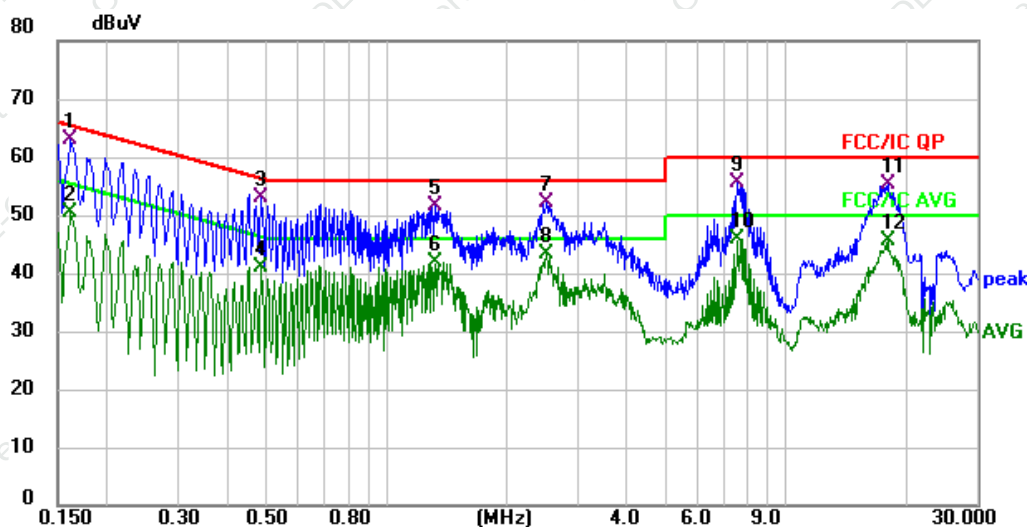

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1620	53.36	9.68	63.04	65.36	-2.32	QP	P
2	0.1620	40.68	9.68	50.36	55.36	-5.00	AVG	P
3	0.4860	43.38	9.69	53.07	56.24	-3.17	QP	P
4	0.4860	31.34	9.69	41.03	46.24	-5.21	AVG	P
5	1.3300	41.81	9.71	51.52	56.00	-4.48	QP	P
6	1.3300	32.24	9.71	41.95	46.00	-4.05	AVG	P
7	2.5220	42.28	9.75	52.03	56.00	-3.97	QP	P
8	2.5220	33.58	9.75	43.33	46.00	-2.67	AVG	P
9	7.5620	45.81	9.83	55.64	60.00	-4.36	QP	P
10	7.5620	36.11	9.83	45.94	50.00	-4.06	AVG	P
11	18.0180	45.30	9.97	55.27	60.00	-4.73	QP	P
12	18.0180	35.52	9.97	45.49	50.00	-4.51	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case Charging +TX GFSK - 2402MHz.



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

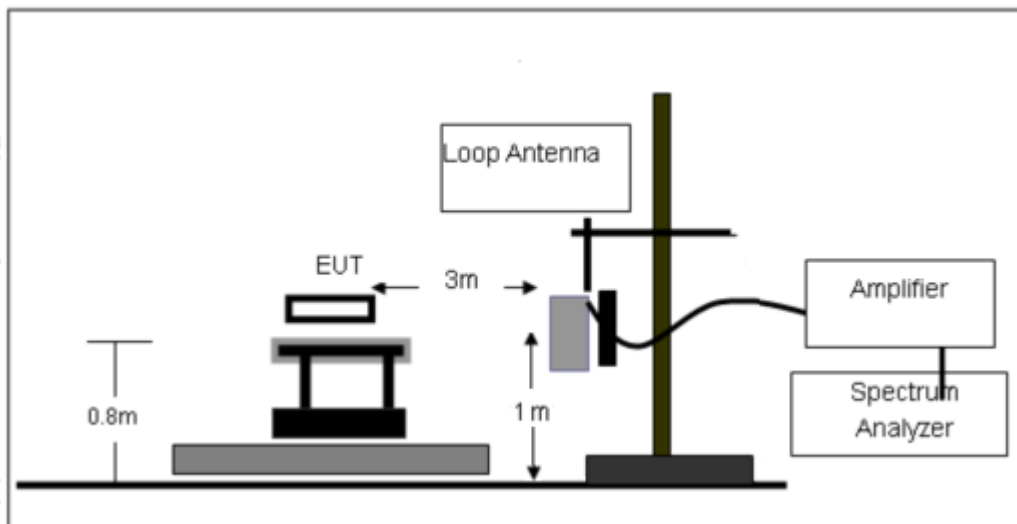




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

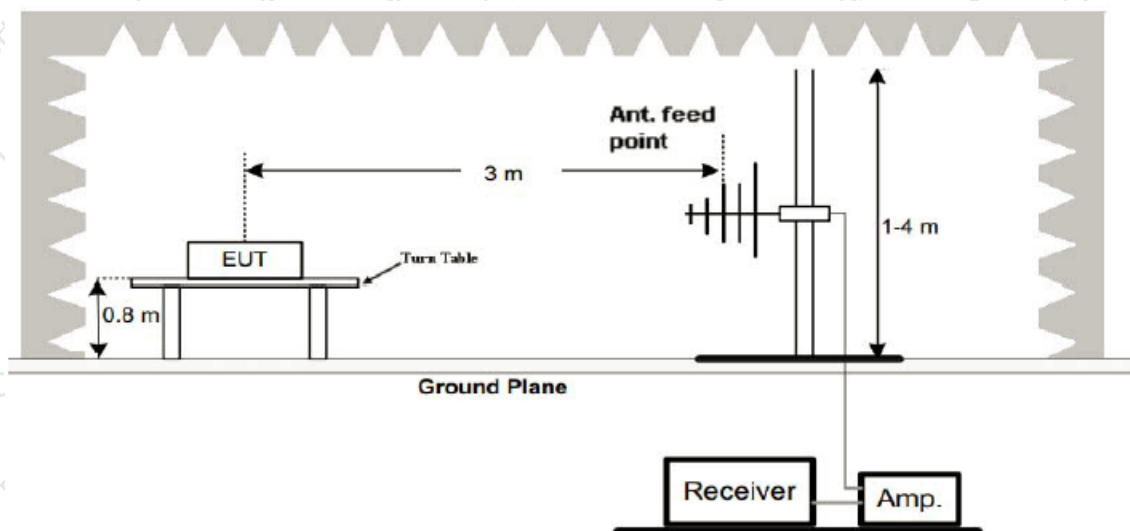

(C) Radiated Emission Test-Up Frequency Above 1GHz

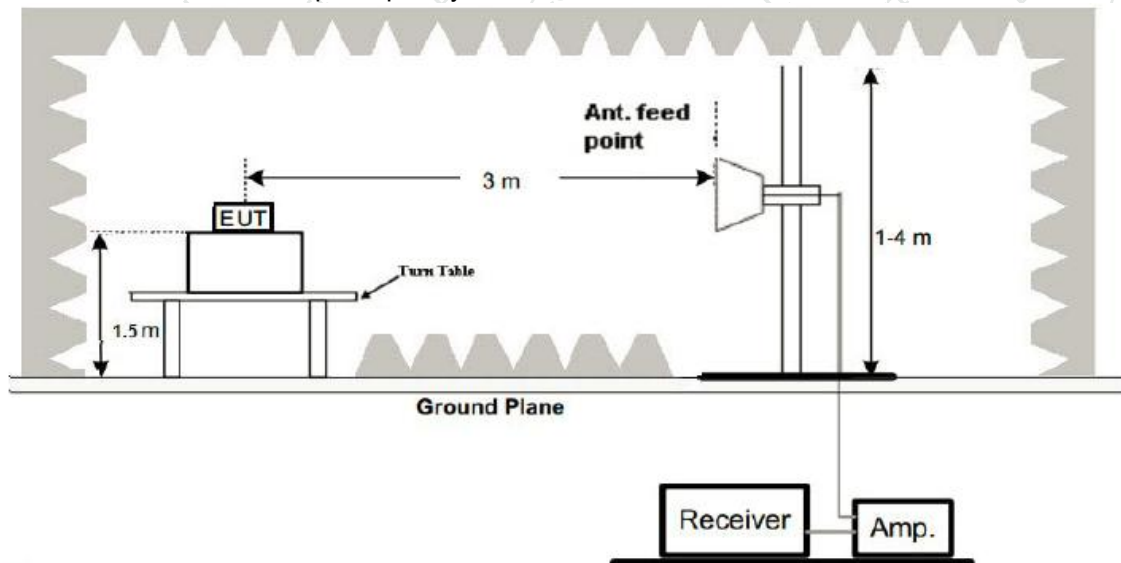

4.2.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Charging + TX 802.11n20 - 2412MHz

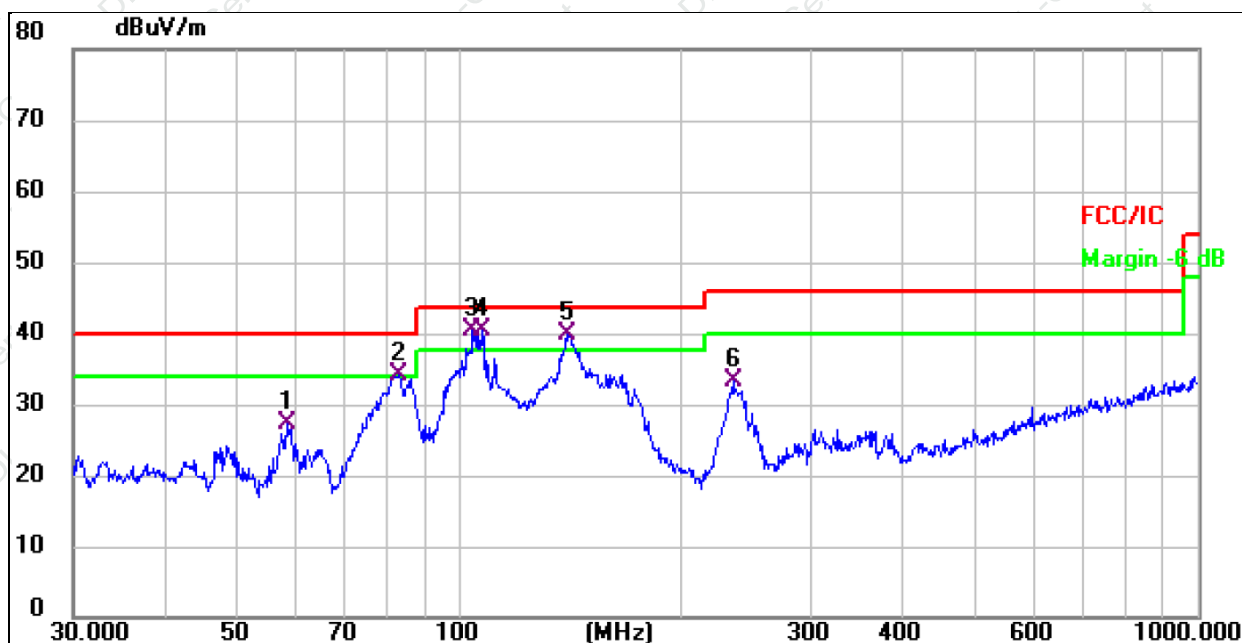

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	58.4074	39.11	-11.93	27.18	40.00	-12.82	QP
2 !	82.9384	48.27	-13.99	34.28	40.00	-5.72	QP
3 *	104.1701	53.20	-12.74	40.46	43.50	-3.04	QP
4 !	107.5100	53.08	-12.64	40.44	43.50	-3.06	QP
5 !	140.3420	49.21	-9.35	39.86	43.50	-3.64	QP
6	234.9910	43.02	-9.86	33.16	46.00	-12.84	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Charging + TX 802.11n20 - 2412MHz

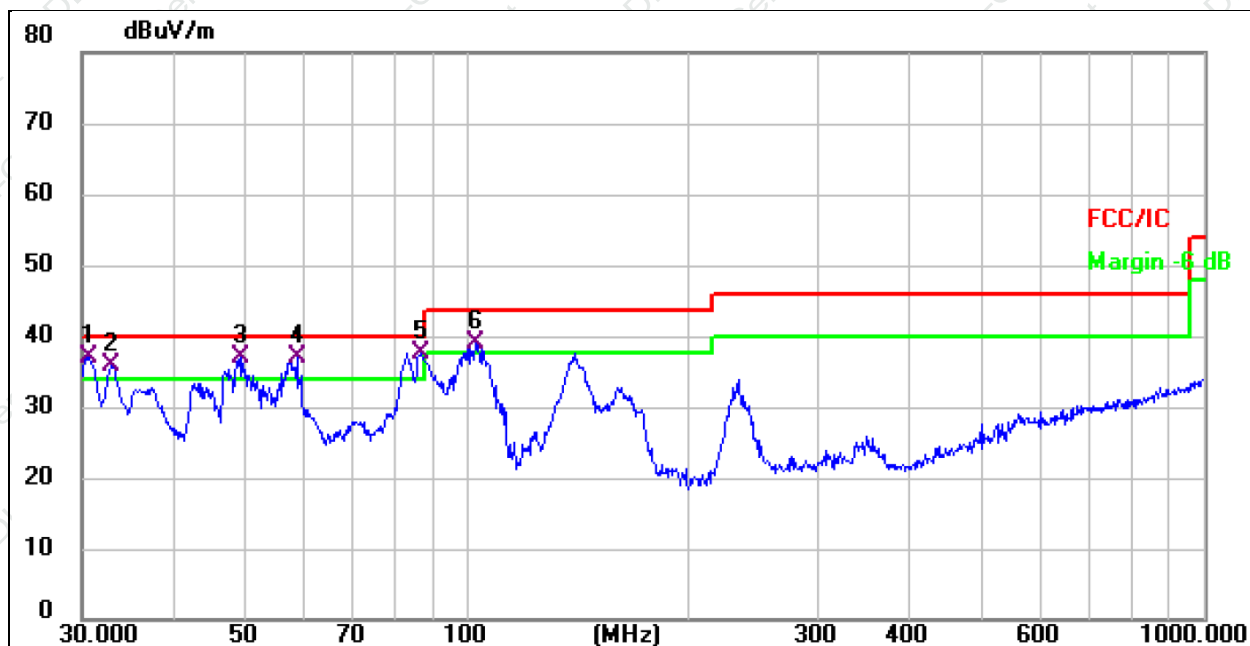

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	30.6374	48.54	-11.42	37.12	40.00	-2.88	QP
2 !	32.9791	47.12	-11.26	35.86	40.00	-4.14	QP
3 !	49.1865	48.34	-11.39	36.95	40.00	-3.05	QP
4 !	58.8185	48.86	-11.96	36.90	40.00	-3.10	QP
5 *	86.8067	51.47	-13.99	37.48	40.00	-2.52	QP
6 !	102.7192	51.65	-12.78	38.87	43.50	-4.63	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case TX 802.11n20 - 2412MHz.



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.70	30.55	5.77	24.66	54.58	74.00	-19.42	Pk
V	4824.00	43.89	30.55	5.77	24.66	43.77	54.00	-10.23	AV
V	7236.00	53.14	30.33	6.32	24.55	53.68	74.00	-20.32	Pk
V	7236.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
V	9648.00	51.84	30.85	7.45	24.69	53.13	74.00	-20.87	Pk
V	9648.00	43.93	30.85	7.45	24.69	45.22	54.00	-8.78	AV
V	12060.00	53.50	31.02	8.99	25.57	57.04	74.00	-16.96	Pk
V	12060.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV
H	4824.00	52.82	30.55	5.77	24.66	52.70	74.00	-21.30	Pk
H	4824.00	43.97	30.55	5.77	24.66	43.85	54.00	-10.15	AV
H	7236.00	54.50	30.33	6.32	24.55	55.04	74.00	-18.96	Pk
H	7236.00	43.86	30.33	6.32	24.55	44.40	54.00	-9.60	AV
H	9648.00	51.50	30.85	7.45	24.69	52.79	74.00	-21.21	Pk
H	9648.00	43.06	30.85	7.45	24.69	44.35	54.00	-9.65	AV
H	12060.00	52.59	31.02	8.99	25.57	56.13	74.00	-17.87	Pk
H	12060.00	43.86	31.02	8.99	25.57	47.40	54.00	-6.60	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	54.69	30.55	5.77	24.66	54.57	74.00	-19.43	Pk
V	4874.00	43.70	30.55	5.77	24.66	43.58	54.00	-10.42	AV
V	7311.00	50.73	30.33	6.32	24.55	51.27	74.00	-22.73	Pk
V	7311.00	43.69	30.33	6.32	24.55	44.23	54.00	-9.77	AV
V	9748.00	52.19	30.85	7.45	24.69	53.48	74.00	-20.52	Pk
V	9748.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
V	12185.00	51.20	31.02	8.99	25.57	54.74	74.00	-19.26	Pk
V	12185.00	43.60	31.02	8.99	25.57	47.14	54.00	-6.86	AV
H	4874.00	53.43	30.55	5.77	24.66	53.31	74.00	-20.69	Pk
H	4874.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
H	7311.00	52.51	30.33	6.32	24.55	53.05	74.00	-20.95	Pk
H	7311.00	43.42	30.33	6.32	24.55	43.96	54.00	-10.04	AV
H	9748.00	50.02	30.85	7.45	24.69	51.31	74.00	-22.69	Pk
H	9748.00	43.98	30.85	7.45	24.69	45.27	54.00	-8.73	AV
H	12185.00	51.58	31.02	8.99	25.57	55.12	74.00	-18.88	Pk
H	12185.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	54.31	30.55	5.77	24.66	54.19	74.00	-19.81	PK
V	4924.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
V	7386.00	54.41	30.33	6.32	24.55	54.95	74.00	-19.05	PK
V	7386.00	43.86	30.33	6.32	24.55	44.40	54.00	-9.60	AV
V	9848.00	54.04	30.85	7.45	24.69	55.33	74.00	-18.67	PK
V	9848.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
V	12310.00	53.09	31.02	8.99	25.57	56.63	74.00	-17.37	PK
V	12310.00	43.89	31.02	8.99	25.57	47.43	54.00	-6.57	AV
H	4924.00	53.58	30.55	5.77	24.66	53.46	74.00	-20.54	PK
H	4924.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
H	7386.00	53.41	30.33	6.32	24.55	53.95	74.00	-20.05	PK
H	7386.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	9848.00	50.58	30.85	7.45	24.69	51.87	74.00	-22.13	PK
H	9848.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
H	12310.00	53.29	31.02	8.99	25.57	56.83	74.00	-17.17	PK
H	12310.00	43.58	31.02	8.99	25.57	47.12	54.00	-6.88	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	51.55	30.55	5.77	24.66	51.43	74.00	-22.57	Pk
V	4824.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
V	7236.00	52.74	30.33	6.32	24.55	53.28	74.00	-20.72	Pk
V	7236.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
V	9648.00	54.70	30.85	7.45	24.69	55.99	74.00	-18.01	Pk
V	9648.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
V	12060.00	54.67	31.02	8.99	25.57	58.21	74.00	-15.79	Pk
V	12060.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV
H	4824.00	50.25	30.55	5.77	24.66	50.13	74.00	-23.87	Pk
H	4824.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
H	7236.00	52.02	30.33	6.32	24.55	52.56	74.00	-21.44	Pk
H	7236.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
H	9648.00	52.62	30.85	7.45	24.69	53.91	74.00	-20.09	Pk
H	9648.00	43.65	30.85	7.45	24.69	44.94	54.00	-9.06	AV
H	12060.00	52.14	31.02	8.99	25.57	55.68	74.00	-18.32	Pk
H	12060.00	43.71	31.02	8.99	25.57	47.25	54.00	-6.75	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	53.38	30.55	5.77	24.66	53.26	74.00	-20.74	Pk
V	4874.00	43.79	30.55	5.77	24.66	43.67	54.00	-10.33	AV
V	7311.00	53.86	30.33	6.32	24.55	54.40	74.00	-19.60	Pk
V	7311.00	43.99	30.33	6.32	24.55	44.53	54.00	-9.47	AV
V	9748.00	53.78	30.85	7.45	24.69	55.07	74.00	-18.93	Pk
V	9748.00	43.98	30.85	7.45	24.69	45.27	54.00	-8.73	AV
V	12185.00	53.74	31.02	8.99	25.57	57.28	74.00	-16.72	Pk
V	12185.00	43.13	31.02	8.99	25.57	46.67	54.00	-7.33	AV
H	4874.00	50.13	30.55	5.77	24.66	50.01	74.00	-23.99	Pk
H	4874.00	43.48	30.55	5.77	24.66	43.36	54.00	-10.64	AV
H	7311.00	54.02	30.33	6.32	24.55	54.56	74.00	-19.44	Pk
H	7311.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
H	9748.00	53.07	30.85	7.45	24.69	54.36	74.00	-19.64	Pk
H	9748.00	43.40	30.85	7.45	24.69	44.69	54.00	-9.31	AV
H	12185.00	53.67	31.02	8.99	25.57	57.21	74.00	-16.79	Pk
H	12185.00	43.74	31.02	8.99	25.57	47.28	54.00	-6.72	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	54.22	30.55	5.77	24.66	54.10	74.00	-19.90	PK
V	4924.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
V	7386.00	51.57	30.33	6.32	24.55	52.11	74.00	-21.89	PK
V	7386.00	43.02	30.33	6.32	24.55	43.56	54.00	-10.44	AV
V	9848.00	51.66	30.85	7.45	24.69	52.95	74.00	-21.05	PK
V	9848.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
V	12310.00	51.95	31.02	8.99	25.57	55.49	74.00	-18.51	PK
V	12310.00	43.53	31.02	8.99	25.57	47.07	54.00	-6.93	AV
H	4924.00	52.20	30.55	5.77	24.66	52.08	74.00	-21.92	PK
H	4924.00	43.70	30.55	5.77	24.66	43.58	54.00	-10.42	AV
H	7386.00	53.07	30.33	6.32	24.55	53.61	74.00	-20.39	PK
H	7386.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
H	9848.00	53.04	30.85	7.45	24.69	54.33	74.00	-19.67	PK
H	9848.00	43.94	30.85	7.45	24.69	45.23	54.00	-8.77	AV
H	12310.00	52.21	31.02	8.99	25.57	55.75	74.00	-18.25	PK
H	12310.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	54.95	30.55	5.77	24.66	54.83	74.00	-19.17	PK
V	4824.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
V	7236.00	52.81	30.33	6.32	24.55	53.35	74.00	-20.65	PK
V	7236.00	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV
V	9648.00	51.46	30.85	7.45	24.69	52.75	74.00	-21.25	PK
V	9648.00	43.02	30.85	7.45	24.69	44.31	54.00	-9.69	AV
V	12060.00	52.34	31.02	8.99	25.57	55.88	74.00	-18.12	PK
V	12060.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV
H	4824.00	51.99	30.55	5.77	24.66	51.87	74.00	-22.13	PK
H	4824.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
H	7236.00	54.93	30.33	6.32	24.55	55.47	74.00	-18.53	PK
H	7236.00	43.26	30.33	6.32	24.55	43.80	54.00	-10.20	AV
H	9648.00	52.17	30.85	7.45	24.69	53.46	74.00	-20.54	PK
H	9648.00	43.73	30.85	7.45	24.69	45.02	54.00	-8.98	AV
H	12060.00	54.93	31.02	8.99	25.57	58.47	74.00	-15.53	PK
H	12060.00	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	51.48	30.55	5.77	24.66	51.36	74.00	-22.64	PK
V	4874.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
V	7311.00	53.62	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7311.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	9748.00	52.61	30.85	7.45	24.69	53.90	74.00	-20.10	PK
V	9748.00	43.08	30.85	7.45	24.69	44.37	54.00	-9.63	AV
V	12185.00	52.00	31.02	8.99	25.57	55.54	74.00	-18.46	PK
V	12185.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV
H	4874.00	50.14	30.55	5.77	24.66	50.02	74.00	-23.98	PK
H	4874.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
H	7311.00	53.58	30.33	6.32	24.55	54.12	74.00	-19.88	PK
H	7311.00	43.44	30.33	6.32	24.55	43.98	54.00	-10.02	AV
H	9748.00	53.18	30.85	7.45	24.69	54.47	74.00	-19.53	PK
H	9748.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
H	12185.00	53.68	31.02	8.99	25.57	57.22	74.00	-16.78	PK
H	12185.00	43.66	31.02	8.99	25.57	47.20	54.00	-6.80	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	51.39	30.55	5.77	24.66	51.27	74.00	-22.73	PK
V	4924.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	7386.00	53.42	30.33	6.32	24.55	53.96	74.00	-20.04	PK
V	7386.00	43.85	30.33	6.32	24.55	44.39	54.00	-9.61	AV
V	9848.00	52.69	30.85	7.45	24.69	53.98	74.00	-20.02	PK
V	9848.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
V	12310.00	50.76	31.02	8.99	25.57	54.30	74.00	-19.70	PK
V	12310.00	43.34	31.02	8.99	25.57	46.88	54.00	-7.12	AV
H	4924.00	53.05	30.55	5.77	24.66	52.93	74.00	-21.07	PK
H	4924.00	43.93	30.55	5.77	24.66	43.81	54.00	-10.19	AV
H	7386.00	50.05	30.33	6.32	24.55	50.59	74.00	-23.41	PK
H	7386.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
H	9848.00	50.76	30.85	7.45	24.69	52.05	74.00	-21.95	PK
H	9848.00	43.89	30.85	7.45	24.69	45.18	54.00	-8.82	AV
H	12310.00	54.97	31.02	8.99	25.57	58.51	74.00	-15.49	PK
H	12310.00	43.49	31.02	8.99	25.57	47.03	54.00	-6.97	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844.00	54.13	30.55	5.77	24.66	54.01	74.00	-19.99	PK
V	4844.00	43.66	30.55	5.77	24.66	43.54	54.00	-10.46	AV
V	7266.00	54.18	30.33	6.32	24.55	54.72	74.00	-19.28	PK
V	7266.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
V	9688.00	50.34	30.85	7.45	24.69	51.63	74.00	-22.37	PK
V	9688.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12110.00	54.89	31.02	8.99	25.57	58.43	74.00	-15.57	PK
V	12110.00	43.25	31.02	8.99	25.57	46.79	54.00	-7.21	AV
H	4844.00	51.31	30.55	5.77	24.66	51.19	74.00	-22.81	PK
H	4844.00	43.81	30.55	5.77	24.66	43.69	54.00	-10.31	AV
H	7266.00	50.30	30.33	6.32	24.55	50.84	74.00	-23.16	PK
H	7266.00	43.43	30.33	6.32	24.55	43.97	54.00	-10.03	AV
H	9688.00	51.02	30.85	7.45	24.69	52.31	74.00	-21.69	PK
H	9688.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
H	12110.00	50.71	31.02	8.99	25.57	54.25	74.00	-19.75	PK
H	12110.00	43.11	31.02	8.99	25.57	46.65	54.00	-7.35	AV

Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	52.10	30.55	5.77	24.66	51.98	74.00	-22.02	PK
V	4874.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
V	7311.00	51.53	30.33	6.32	24.55	52.07	74.00	-21.93	PK
V	7311.00	43.37	30.33	6.32	24.55	43.91	54.00	-10.09	AV
V	9748.00	53.84	30.85	7.45	24.69	55.13	74.00	-18.87	PK
V	9748.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
V	12185.00	51.15	31.02	8.99	25.57	54.69	74.00	-19.31	PK
V	12185.00	43.70	31.02	8.99	25.57	47.24	54.00	-6.76	AV
H	4874.00	53.26	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	4874.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
H	7311.00	54.39	30.33	6.32	24.55	54.93	74.00	-19.07	PK
H	7311.00	43.70	30.33	6.32	24.55	44.24	54.00	-9.76	AV
H	9748.00	50.48	30.85	7.45	24.69	51.77	74.00	-22.23	PK
H	9748.00	43.04	30.85	7.45	24.69	44.33	54.00	-9.67	AV
H	12185.00	50.17	31.02	8.99	25.57	53.71	74.00	-20.29	PK
H	12185.00	43.85	31.02	8.99	25.57	47.39	54.00	-6.61	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	54.63	30.55	5.77	24.66	54.51	74.00	-19.49	PK
V	4904.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
V	7356.00	53.28	30.33	6.32	24.55	53.82	74.00	-20.18	PK
V	7356.00	43.44	30.33	6.32	24.55	43.98	54.00	-10.02	AV
V	9808.00	52.89	30.85	7.45	24.69	54.18	74.00	-19.82	PK
V	9808.00	43.42	30.85	7.45	24.69	44.71	54.00	-9.29	AV
V	12260.00	54.72	31.02	8.99	25.57	58.26	74.00	-15.74	PK
V	12260.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV
H	4904.00	53.98	30.55	5.77	24.66	53.86	74.00	-20.14	PK
H	4904.00	43.62	30.55	5.77	24.66	43.50	54.00	-10.50	AV
H	7356.00	52.46	30.33	6.32	24.55	53.00	74.00	-21.00	PK
H	7356.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
H	9808.00	51.57	30.85	7.45	24.69	52.86	74.00	-21.14	PK
H	9808.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
H	12260.00	53.53	31.02	8.99	25.57	57.07	74.00	-16.93	PK
H	12260.00	43.08	31.02	8.99	25.57	46.62	54.00	-7.38	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED Band EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- The limit for radiated test was performed according to FCC PART 15C.
- The tighter limit applies at the band edges.
- Emission level (dBuV/m)=20log Emission level (uV/m).

5.65 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

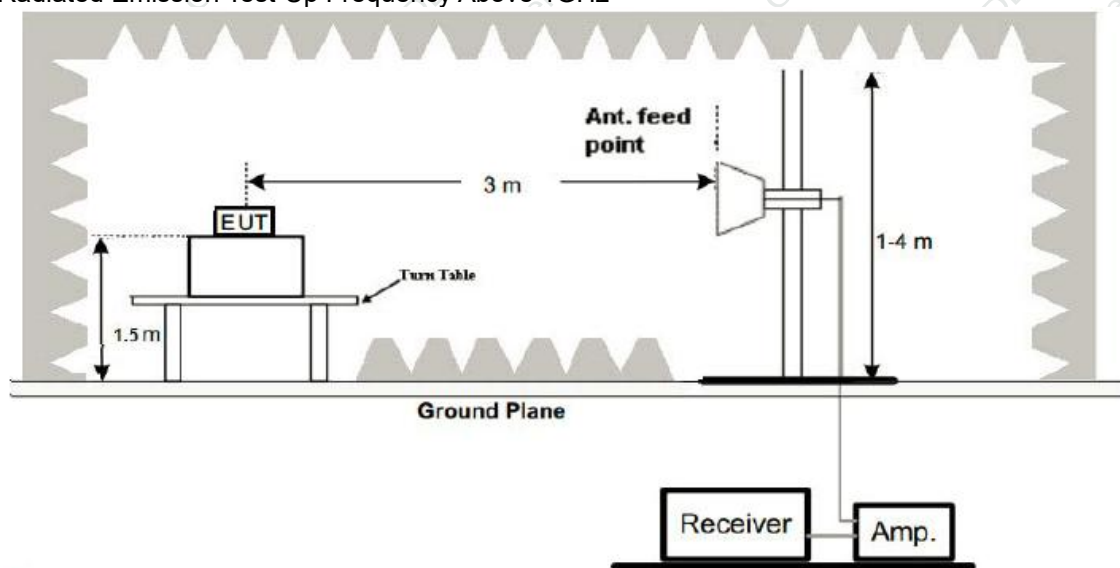

5.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Detect or Type	Result
802.11 b	Low Channel: 2412MHz										
	H	2390.00	54.34	30.22	4.85	23.98	52.95	74.00	-21.05	PK	PASS
	H	2390.00	44.17	30.22	4.85	23.98	42.78	54.00	-11.22	AV	PASS
	H	2400.00	54.14	30.22	4.85	23.98	52.75	74.00	-21.25	PK	PASS
	H	2400.00	44.89	30.22	4.85	23.98	43.50	54.00	-10.50	AV	PASS
	V	2390.00	53.62	30.22	4.85	23.98	52.23	74.00	-21.77	PK	PASS
	V	2390.00	44.50	30.22	4.85	23.98	43.11	54.00	-10.89	AV	PASS
	V	2400.00	54.25	30.22	4.85	23.98	52.86	74.00	-21.14	PK	PASS
	V	2400.00	44.65	30.22	4.85	23.98	43.26	54.00	-10.74	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	54.29	30.22	4.85	23.98	52.90	74.00	-21.10	PK	PASS
	H	2483.50	44.26	30.22	4.85	23.98	42.87	54.00	-11.13	AV	PASS
	H	2500.00	53.80	30.22	4.85	23.98	52.41	74.00	-21.59	PK	PASS
	H	2500.00	44.65	30.22	4.85	23.98	43.26	54.00	-10.74	AV	PASS
	V	2483.50	53.34	30.22	4.85	23.98	51.95	74.00	-22.05	PK	PASS
	V	2483.50	44.59	30.22	4.85	23.98	43.20	54.00	-10.80	AV	PASS
	V	2500.00	54.80	30.22	4.85	23.98	53.41	74.00	-20.59	PK	PASS
	V	2500.00	44.90	30.22	4.85	23.98	43.51	54.00	-10.49	AV	PASS
802.11 g	Low Channel: 2412MHz										
	H	2390.00	54.89	30.22	4.85	23.98	53.50	74.00	-20.50	PK	PASS
	H	2390.00	44.64	30.22	4.85	23.98	43.25	54.00	-10.75	AV	PASS
	H	2400.00	53.54	30.22	4.85	23.98	52.15	74.00	-21.85	PK	PASS
	H	2400.00	44.27	30.22	4.85	23.98	42.88	54.00	-11.12	AV	PASS
	V	2390.00	53.42	30.22	4.85	23.98	52.03	74.00	-21.97	PK	PASS
	V	2390.00	44.81	30.22	4.85	23.98	43.42	54.00	-10.58	AV	PASS
	V	2400.00	54.83	30.22	4.85	23.98	53.44	74.00	-20.56	PK	PASS
	V	2400.00	44.77	30.22	4.85	23.98	43.38	54.00	-10.62	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.43	30.22	4.85	23.98	52.04	74.00	-21.96	PK	PASS
	H	2483.50	44.32	30.22	4.85	23.98	42.93	54.00	-11.07	AV	PASS
	H	2500.00	53.12	30.22	4.85	23.98	51.73	74.00	-22.27	PK	PASS
	H	2500.00	44.46	30.22	4.85	23.98	43.07	54.00	-10.93	AV	PASS
	V	2483.50	53.21	30.22	4.85	23.98	51.82	74.00	-22.18	PK	PASS
	V	2483.50	44.35	30.22	4.85	23.98	42.96	54.00	-11.04	AV	PASS
	V	2500.00	54.78	30.22	4.85	23.98	53.39	74.00	-20.61	PK	PASS
	V	2500.00	44.68	30.22	4.85	23.98	43.29	54.00	-10.71	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Detect or Type	Result
802.11 N20	Low Channel: 2412MHz										
	H	2390.00	54.49	30.22	4.85	23.98	53.10	74.00	-20.90	PK	PASS
	H	2390.00	44.86	30.22	4.85	23.98	43.47	54.00	-10.53	AV	PASS
	H	2400.00	54.68	30.22	4.85	23.98	53.29	74.00	-20.71	PK	PASS
	H	2400.00	44.43	30.22	4.85	23.98	43.04	54.00	-10.96	AV	PASS
	V	2390.00	54.23	30.22	4.85	23.98	52.84	74.00	-21.16	PK	PASS
	V	2390.00	44.18	30.22	4.85	23.98	42.79	54.00	-11.21	AV	PASS
	V	2400.00	54.17	30.22	4.85	23.98	52.78	74.00	-21.22	PK	PASS
	V	2400.00	44.50	30.22	4.85	23.98	43.11	54.00	-10.89	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.17	30.22	4.85	23.98	51.78	74.00	-22.22	PK	PASS
	H	2483.50	44.65	30.22	4.85	23.98	43.26	54.00	-10.74	AV	PASS
	H	2500.00	53.24	30.22	4.85	23.98	51.85	74.00	-22.15	PK	PASS
	H	2500.00	44.04	30.22	4.85	23.98	42.65	54.00	-11.35	AV	PASS
	V	2483.50	53.72	30.22	4.85	23.98	52.33	74.00	-21.67	PK	PASS
	V	2483.50	44.62	30.22	4.85	23.98	43.23	54.00	-10.77	AV	PASS
802.11 N40	V	2500.00	53.74	30.22	4.85	23.98	52.35	74.00	-21.65	PK	PASS
	V	2500.00	44.28	30.22	4.85	23.98	42.89	54.00	-11.11	AV	PASS
	Low Channel: 2412MHz										
	H	2390.00	53.62	30.22	4.85	23.98	52.23	74.00	-21.77	PK	PASS
	H	2390.00	44.29	30.22	4.85	23.98	42.90	54.00	-11.10	AV	PASS
	H	2400.00	54.85	30.22	4.85	23.98	53.46	74.00	-20.54	PK	PASS
	H	2400.00	44.94	30.22	4.85	23.98	43.55	54.00	-10.45	AV	PASS
	V	2390.00	54.16	30.22	4.85	23.98	52.77	74.00	-21.23	PK	PASS
	V	2390.00	44.07	30.22	4.85	23.98	42.68	54.00	-11.32	AV	PASS
	V	2400.00	53.97	30.22	4.85	23.98	52.58	74.00	-21.42	PK	PASS
	V	2400.00	44.67	30.22	4.85	23.98	43.28	54.00	-10.72	AV	PASS
	High Channel: 2462MHz										
	H	2483.50	53.90	30.22	4.85	23.98	52.51	74.00	-21.49	PK	PASS
	H	2483.50	44.61	30.22	4.85	23.98	43.22	54.00	-10.78	AV	PASS
	H	2500.00	54.42	30.22	4.85	23.98	53.03	74.00	-20.97	PK	PASS
	H	2500.00	44.96	30.22	4.85	23.98	43.57	54.00	-10.43	AV	PASS
	V	2483.50	53.17	30.22	4.85	23.98	51.78	74.00	-22.22	PK	PASS
	V	2483.50	44.31	30.22	4.85	23.98	42.92	54.00	-11.08	AV	PASS
	V	2500.00	54.99	30.22	4.85	23.98	53.60	74.00	-20.40	PK	PASS
	V	2500.00	44.60	30.22	4.85	23.98	43.21	54.00	-10.79	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

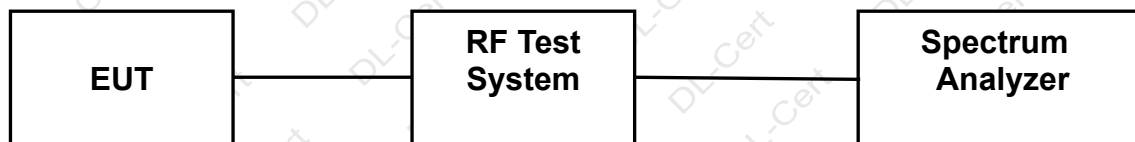

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX b Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-24.41	8	PASS
2437 MHz	-24.4	8	PASS
2462 MHz	-24.31	8	PASS



TX CH01



TX CH06

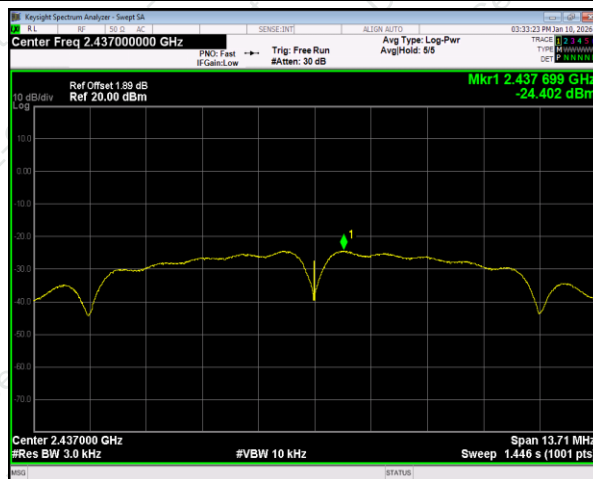

TX CH11





Shenzhen DL Testing Technology Co., Ltd.


Report No.: DLE-260109019R

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 51.2V
Test Mode :	TX g Mode		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-26.76	8	PASS
2437 MHz	-26.75	8	PASS
2462 MHz	-26.77	8	PASS




TX CH01

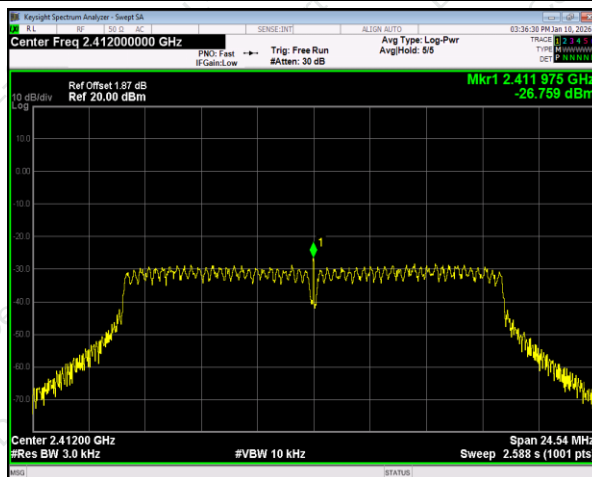

TX CH06

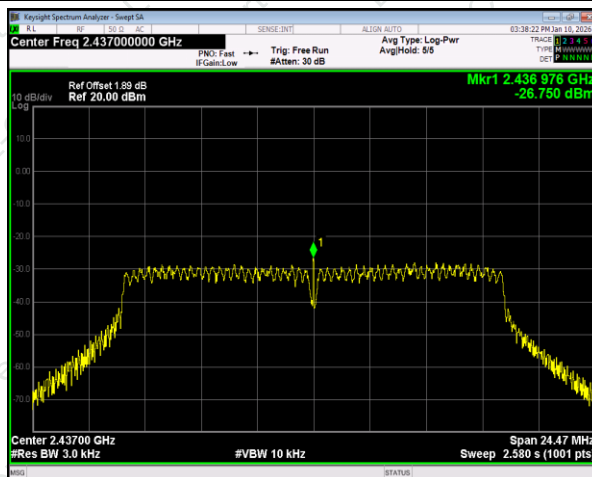

TX CH11

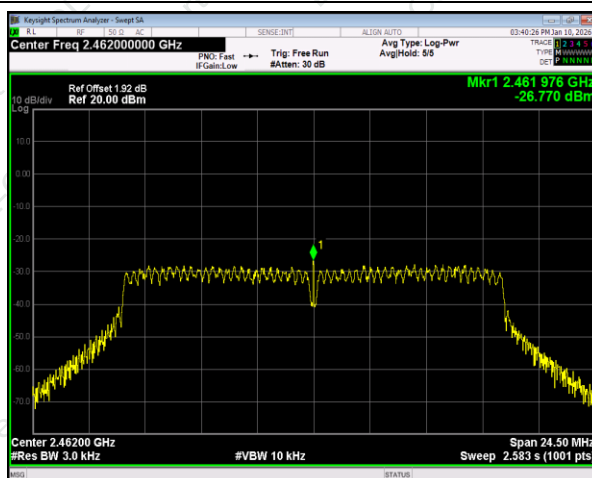



Shenzhen DL Testing Technology Co., Ltd.


Report No.: DLE-260109019R

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 51.2V
Test Mode :	TX n Mode(20M)		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-26.42	8	PASS
2437 MHz	-26.56	8	PASS
2462 MHz	-26.13	8	PASS




TX CH01

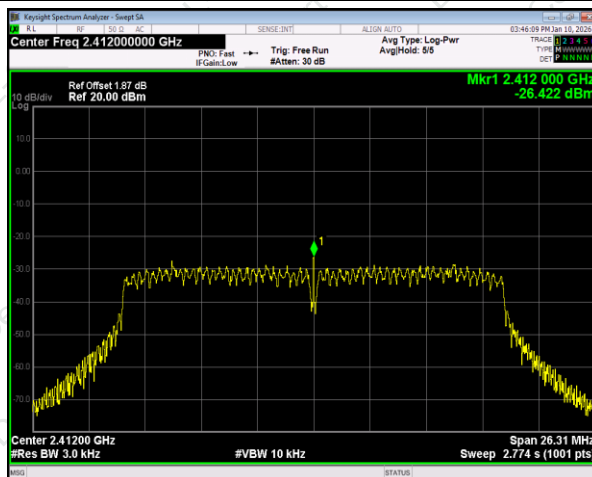

TX CH06

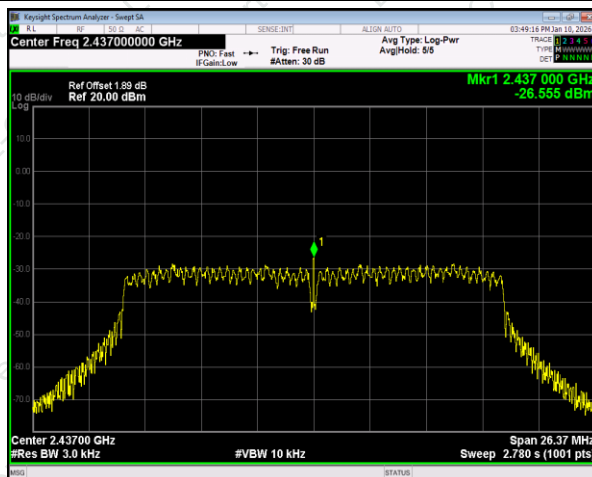

TX CH11

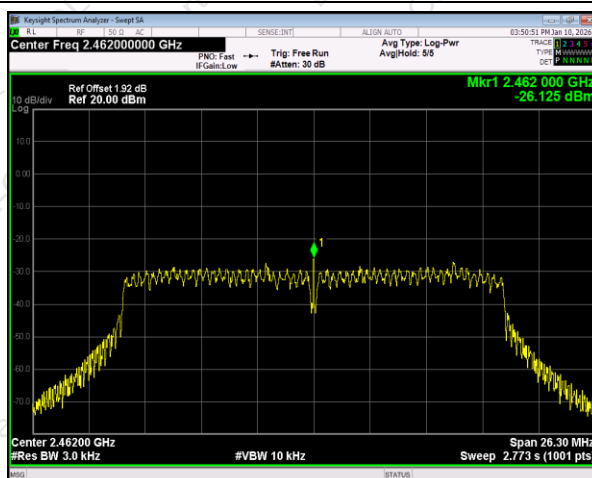



Shenzhen DL Testing Technology Co., Ltd.


Report No.: DLE-260109019R

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 51.2V
Test Mode :	TX n Mode(40M)		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-26.45	8	PASS
2437 MHz	-26.27	8	PASS
2452 MHz	-25.97	8	PASS




TX CH03

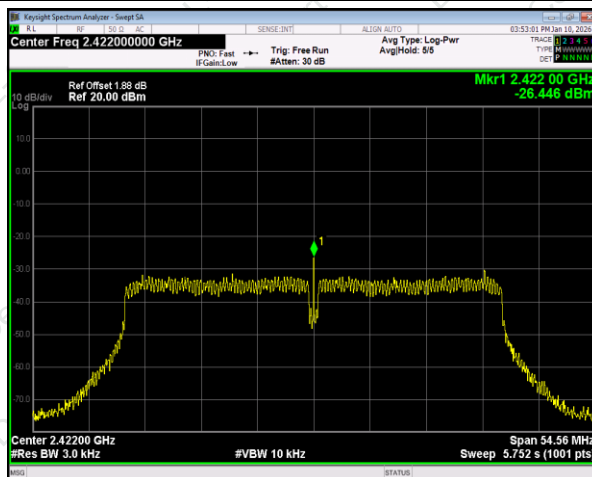

TX CH06

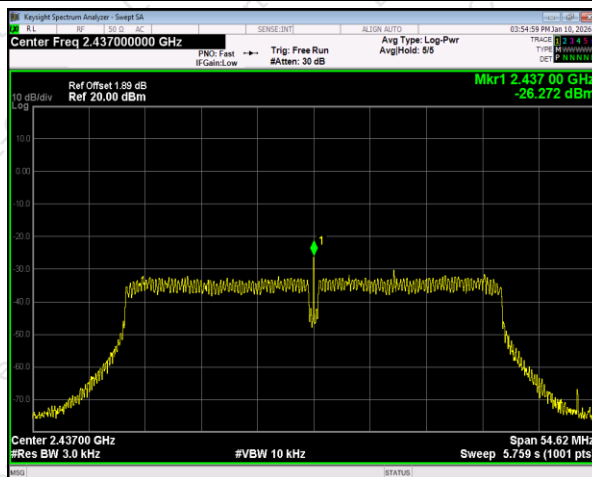

TX CH09

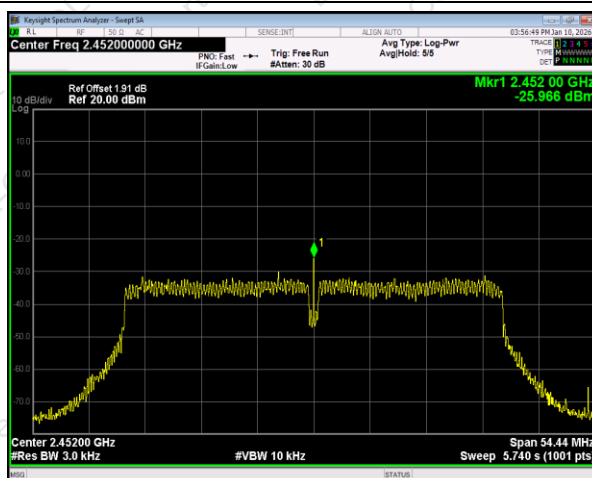



7. 6DB OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB Occupied Bandwidth)	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
2. Set the VBW $\geq [3 \times \text{RBW}]$.
3. Detector = peak.
4. Trace mode = max-hold.
5. Sweep = No faster than coupled (auto) time.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

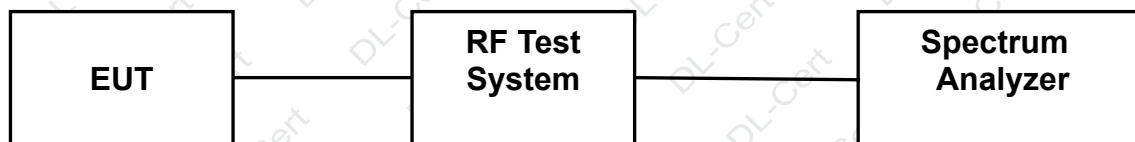

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 51.2V
Test Mode :	TX		

Test CH	6dB Occupied Bandwidth (MHz)					Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Limit(KHz)	
Lowest	9.131	16.36	17.54	36.37	>500	Pass
Middle	9.141	16.31	17.58	36.41		
Highest	9.138	16.33	17.53	36.29		





Test plot as follows:



802.11b

802.11g



Lowest channel

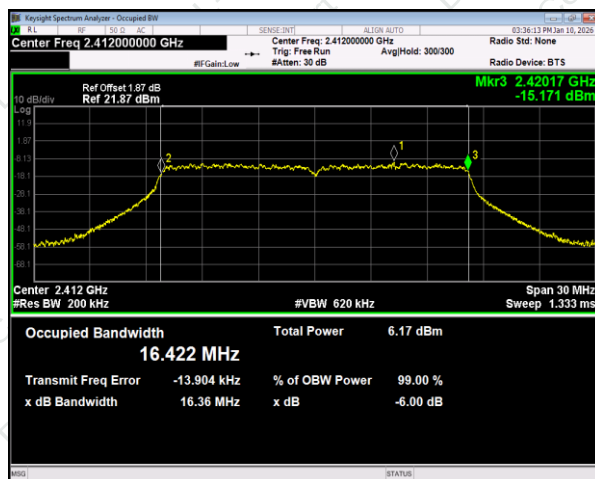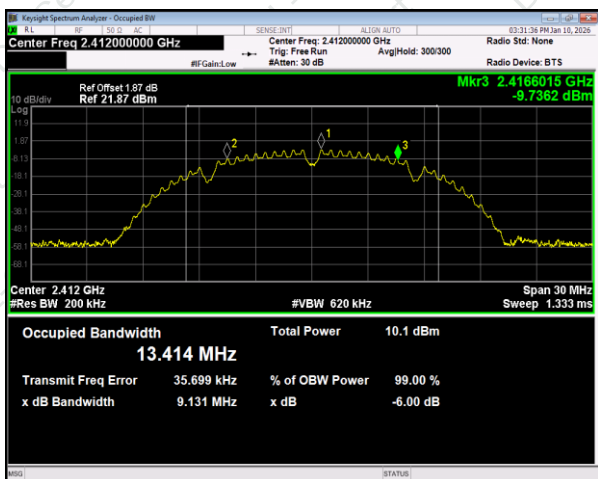

Middle channel

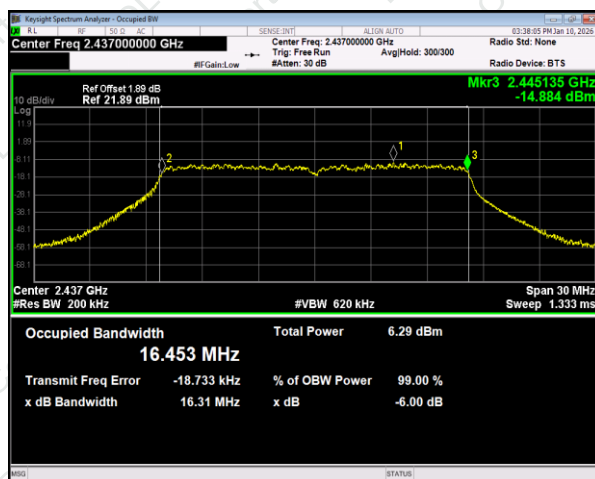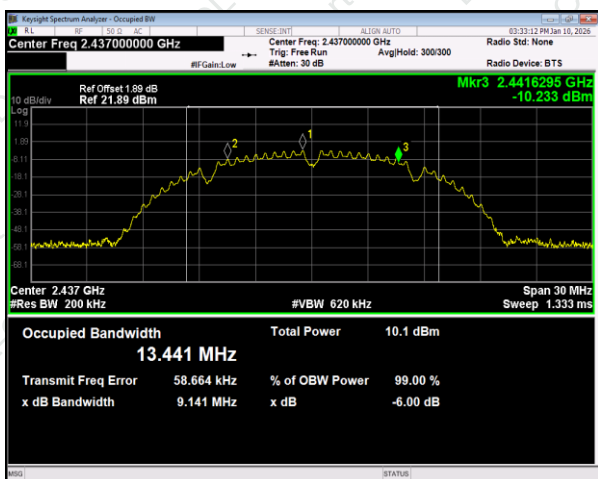

Highest channel

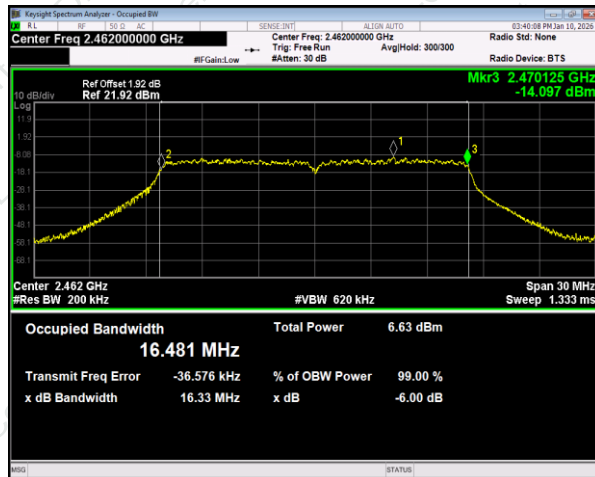
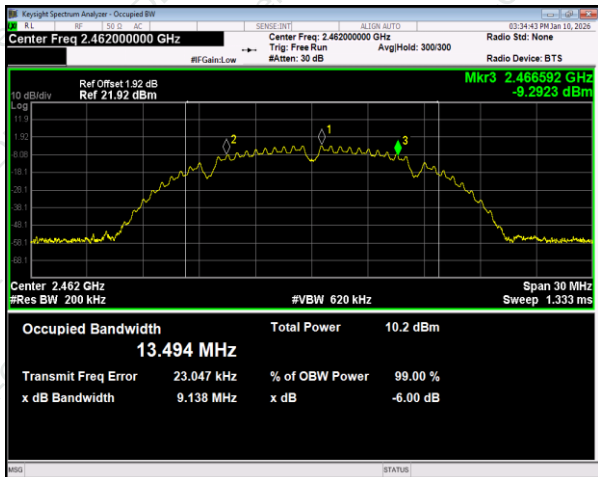






802.11n20

802.11n40



Lowest channel

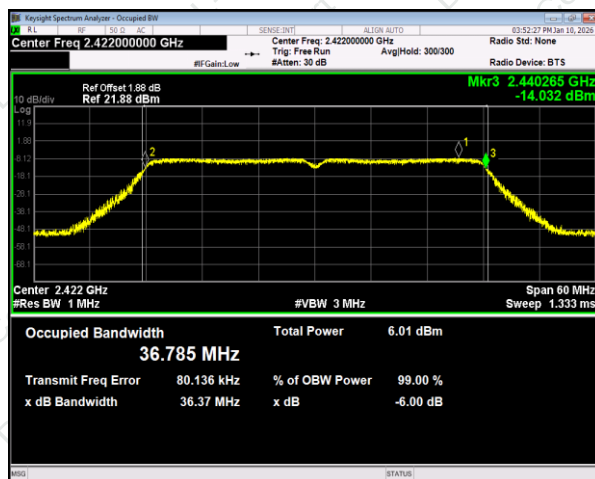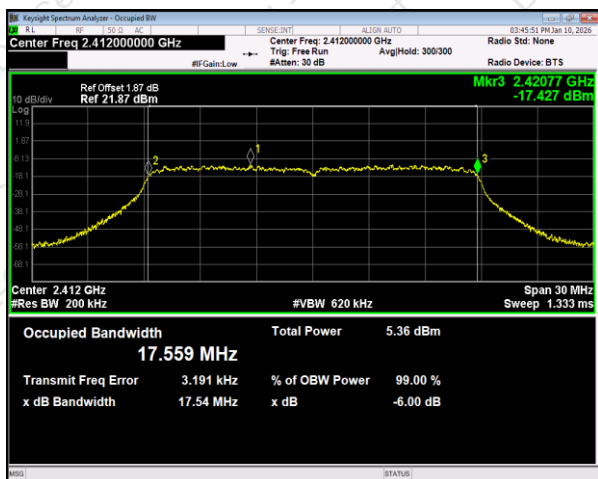

Middle channel

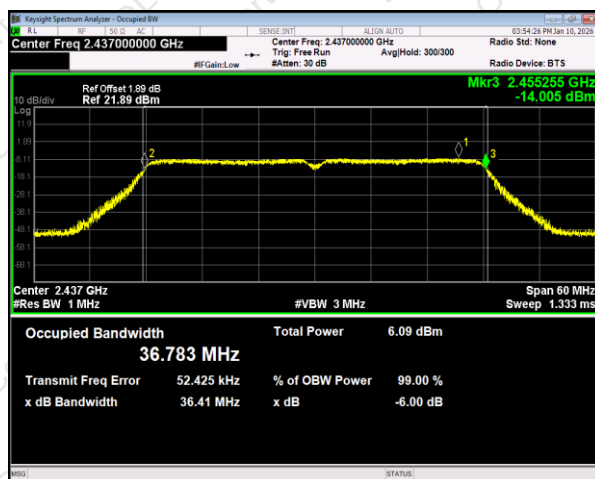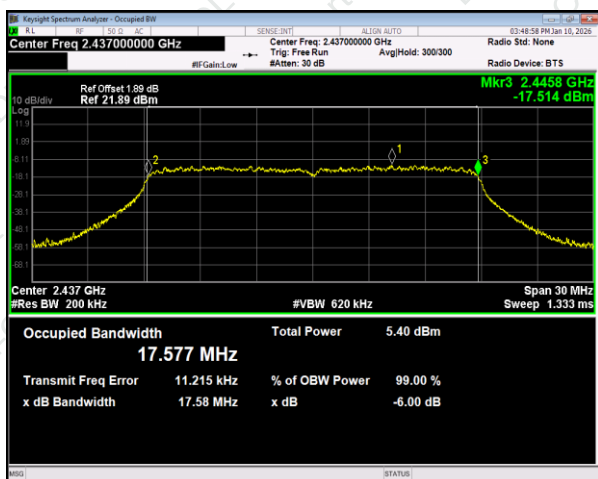

Highest channel

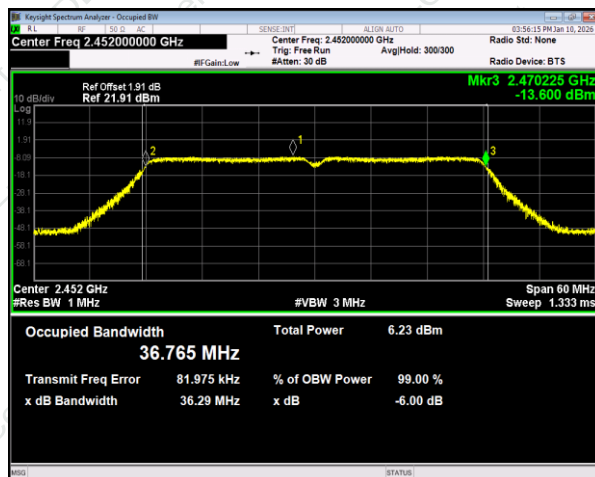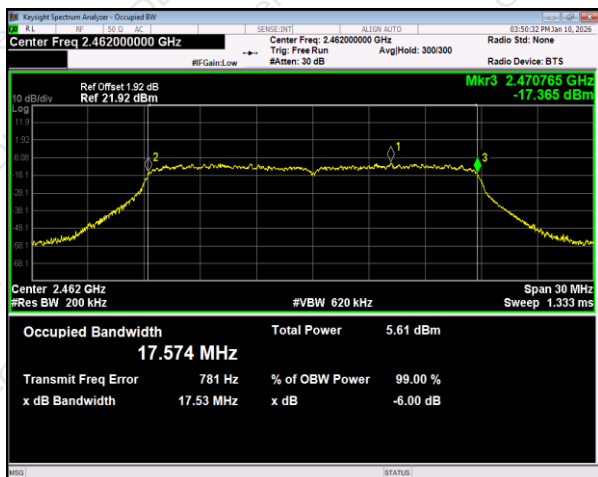



8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 51.2V

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	7.99	7.65	7.4	6.56	30.00	Pass
Middle	8.09	7.81	7.43	6.66		
Highest	8.11	8.21	7.72	6.85		



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

A. Reference level measurement, establish a reference level by using the following procedure:

- Set instrument center frequency to FHSS channel center frequency.
- Set the span to ≥ 1.5 times the 20dB bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

B. Emission level measurement, establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 TEST SETUP

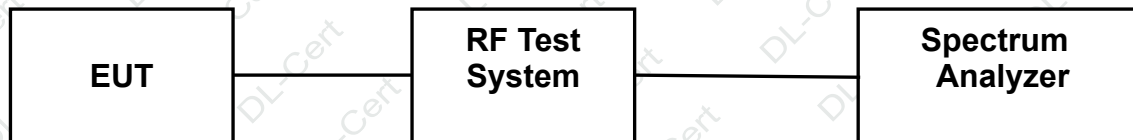


9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 9.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS


Test mode: 802.11b

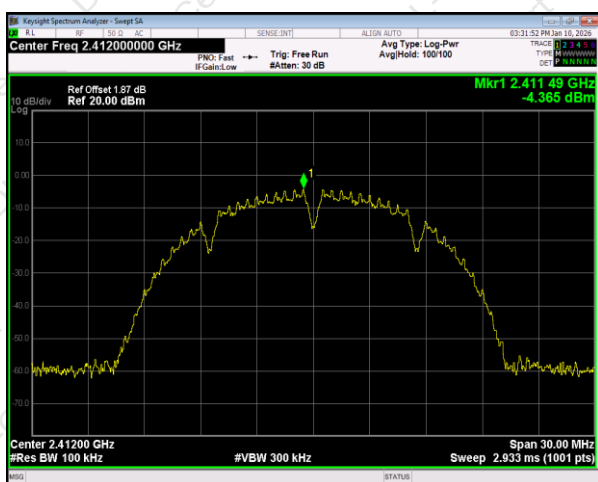


Lowest Ref

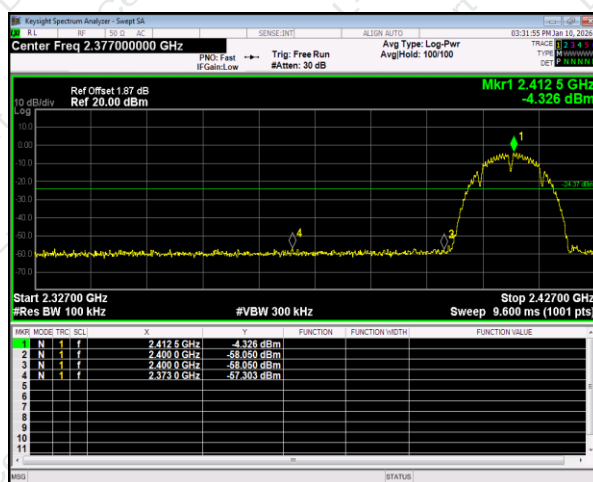

Lowest Emission

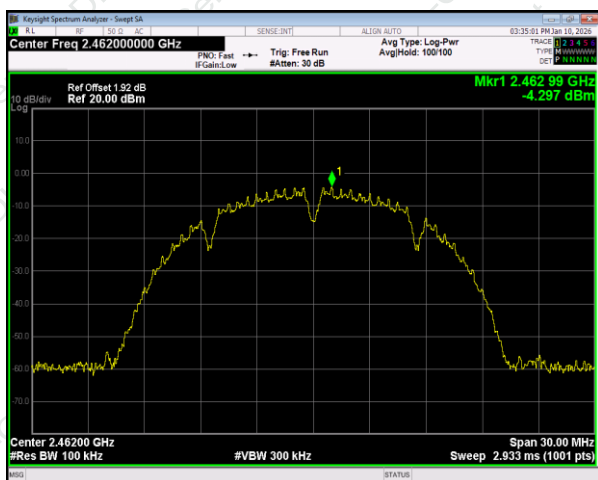


Highest Ref

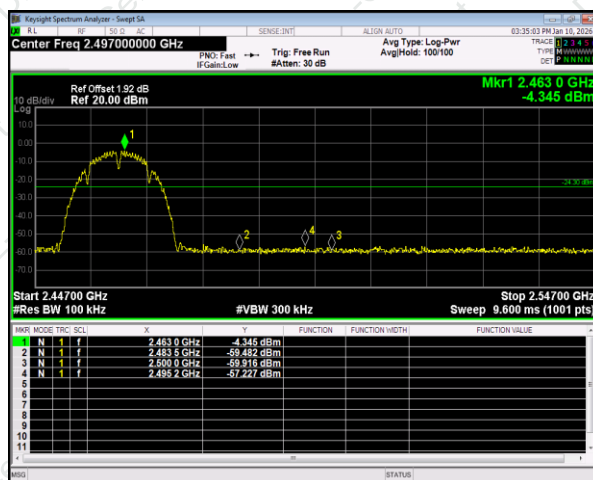


Highest Emission




Test mode: 802.11g

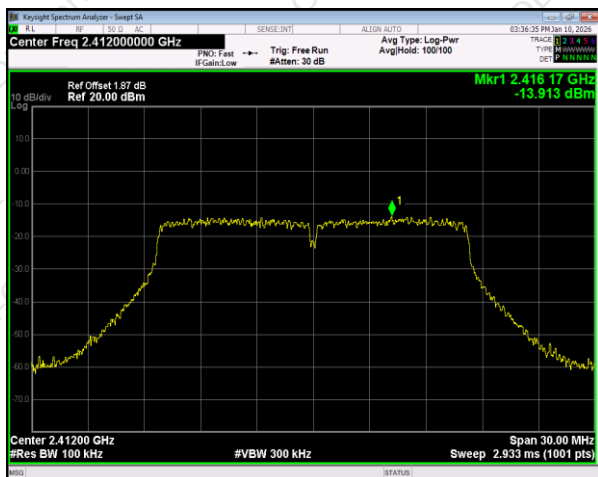


Lowest Ref

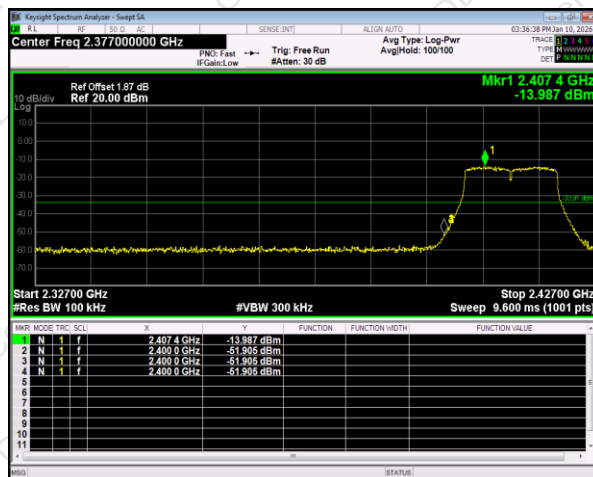

Lowest Emission

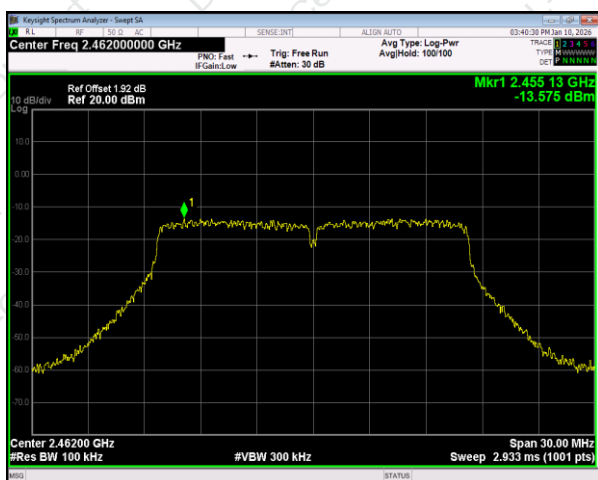


Highest Ref

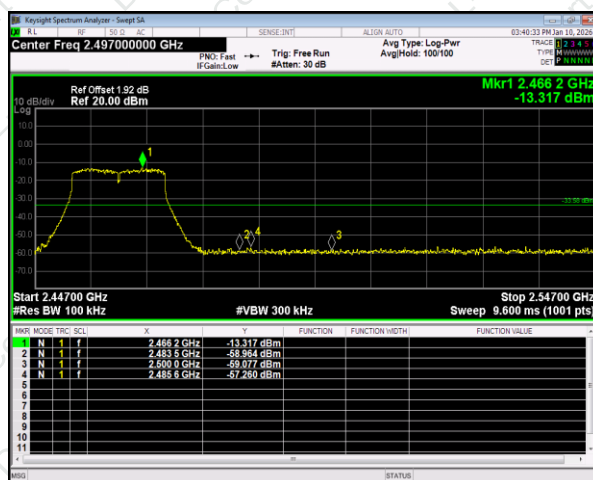


Highest Emission




Test mode: 802.11n20

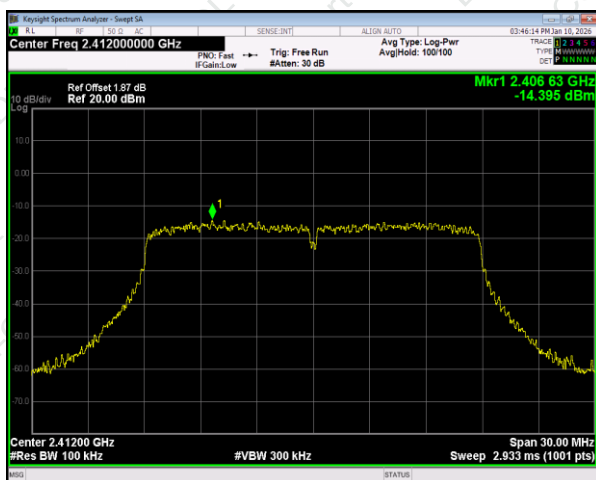


Lowest Ref

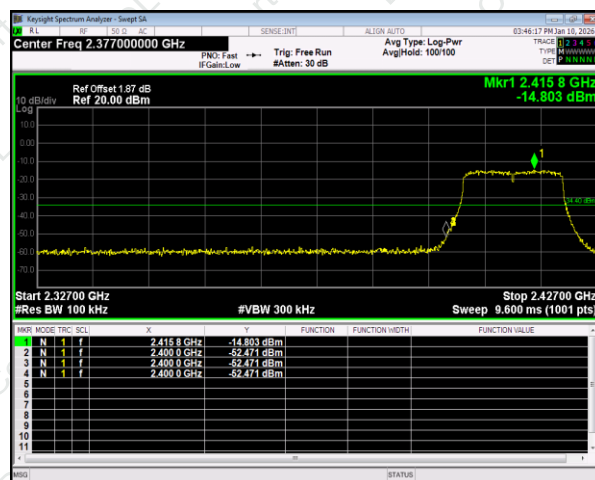

Lowest Emission

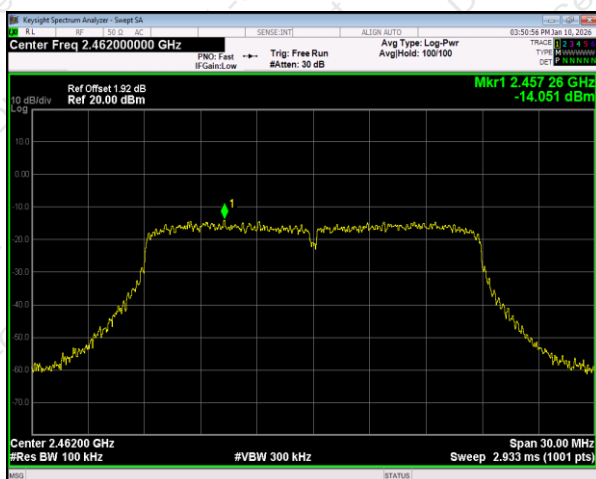


Highest Ref

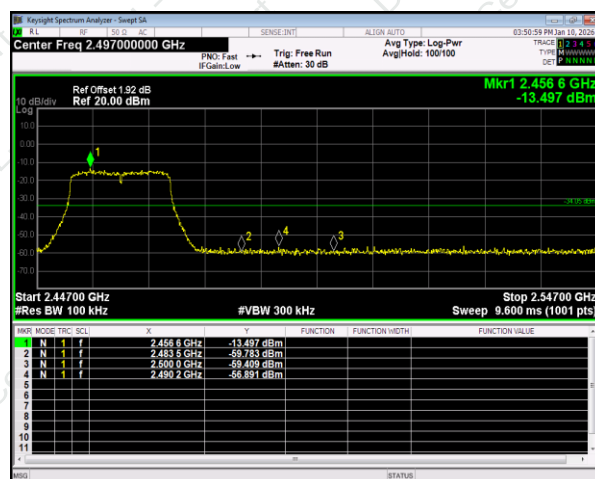


Highest Emission




Test mode: 802.11n40

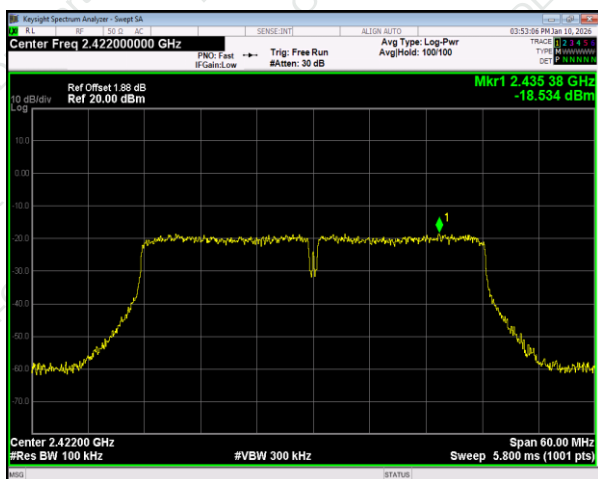


Lowest Ref

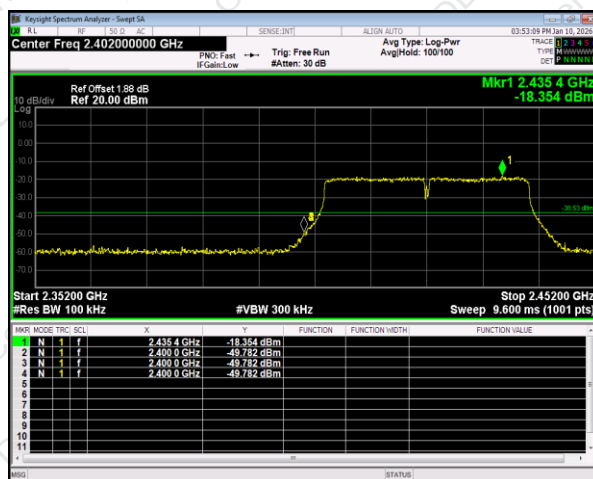

Lowest Emission

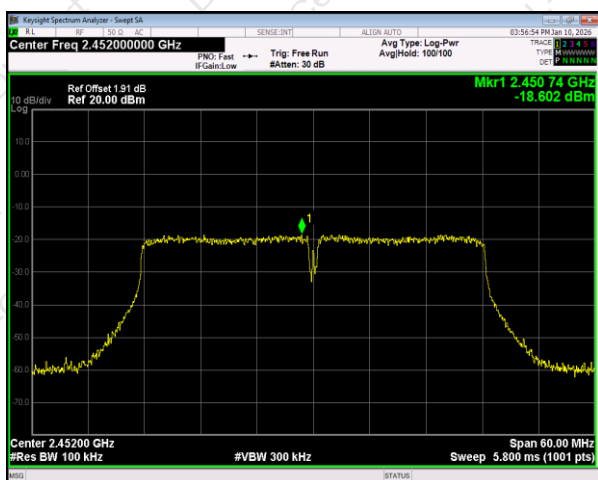

Highest Ref

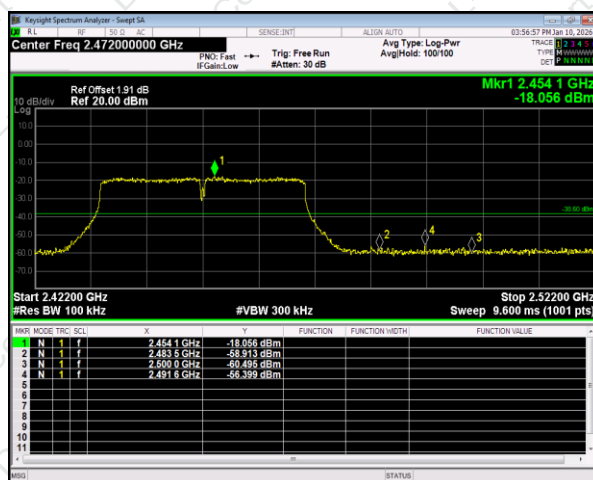



Highest Emission




Test plot as follows:

802.11b



Lowest channel

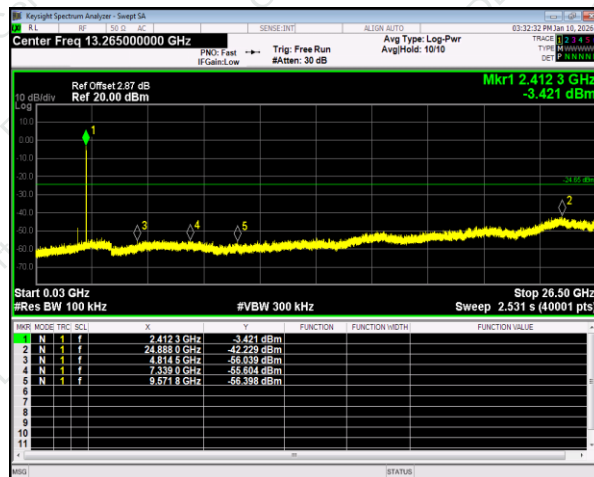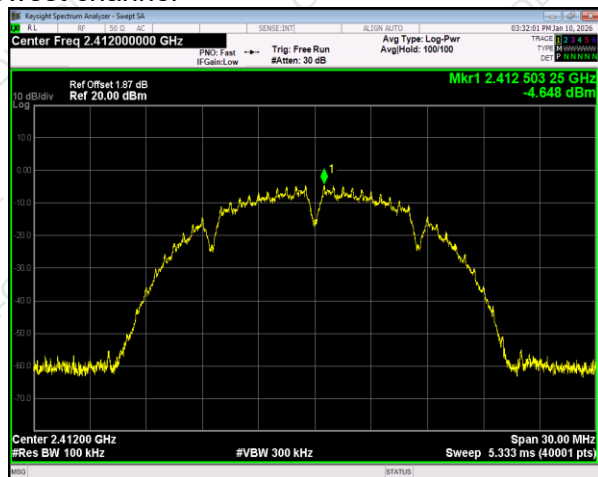

Middle channel

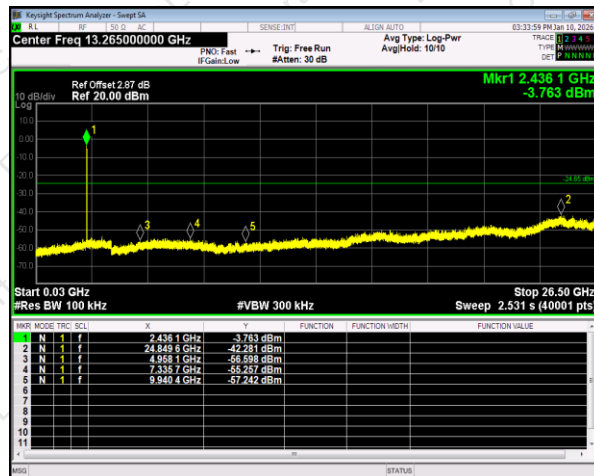



Highest channel

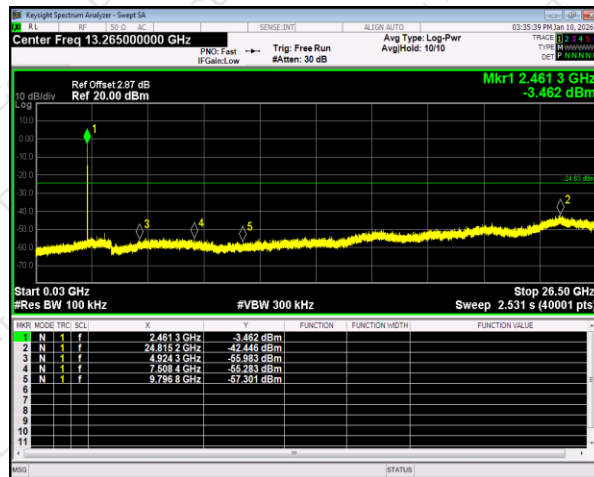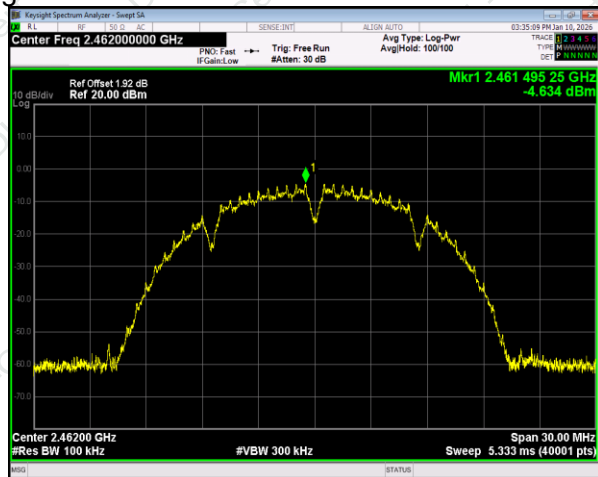





802.11g



Lowest channel

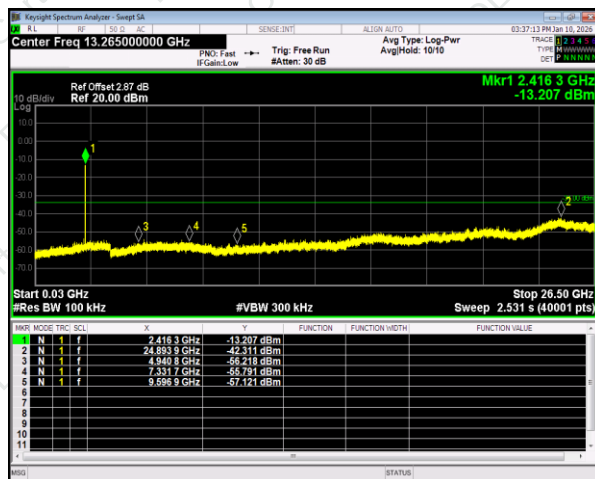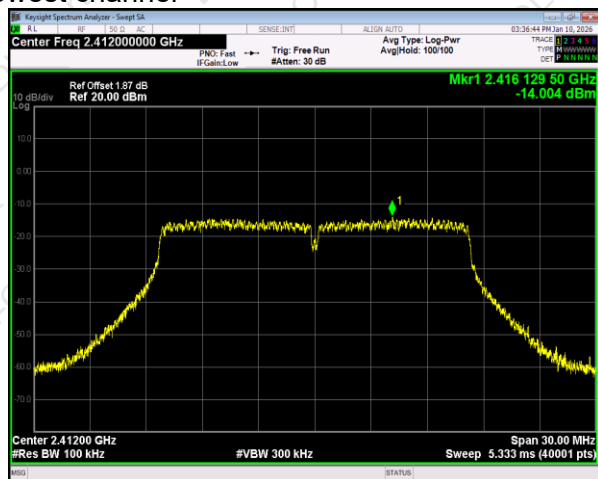

Middle channel

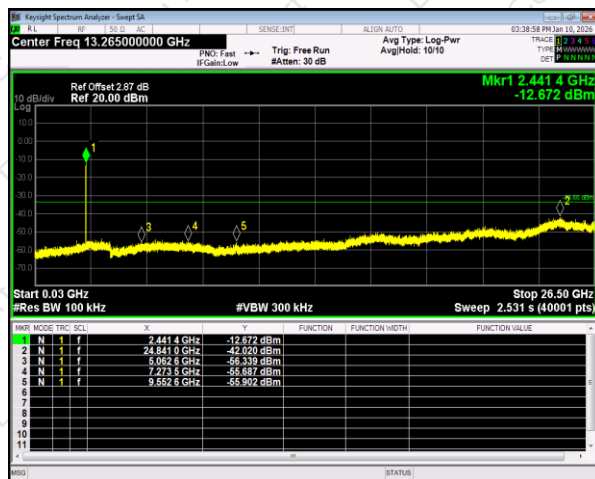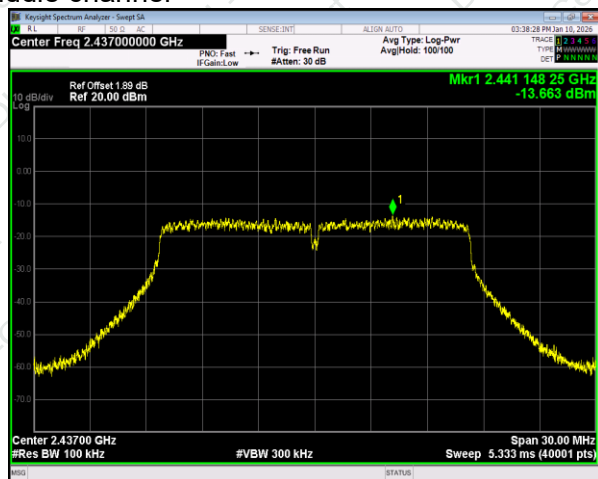



Highest channel

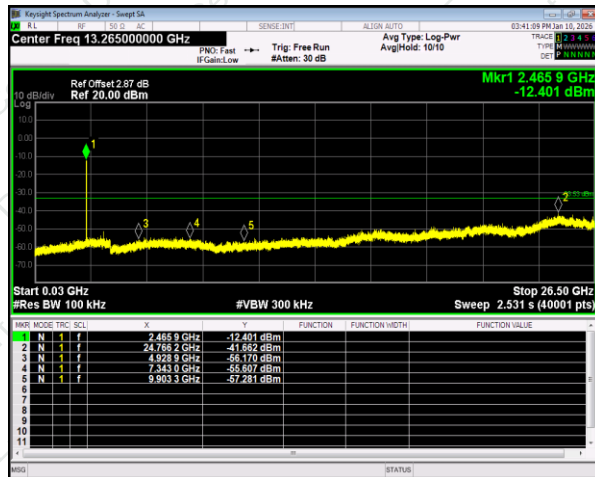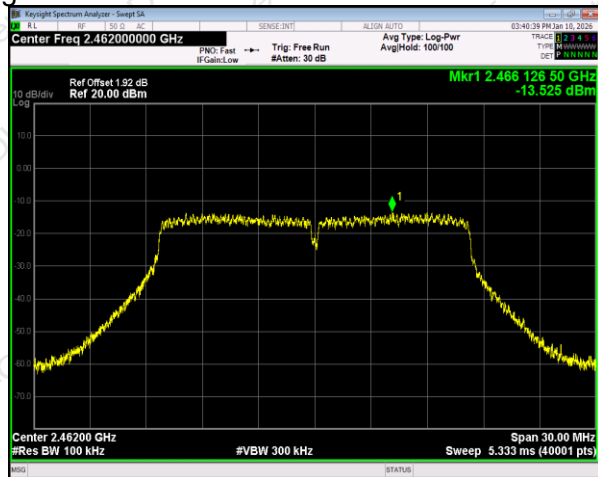





802.11n(HT20)



Lowest channel

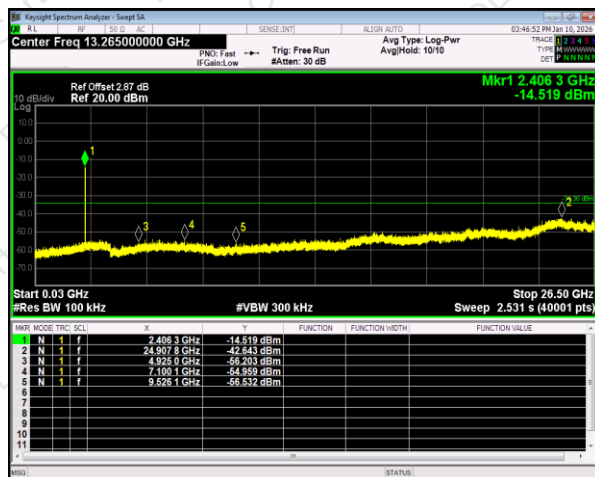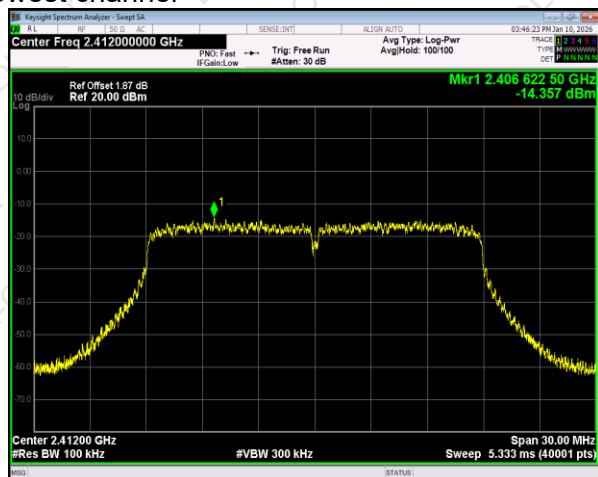

Middle channel

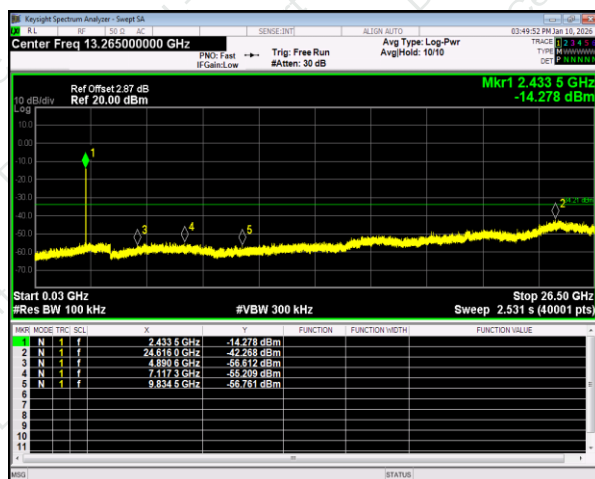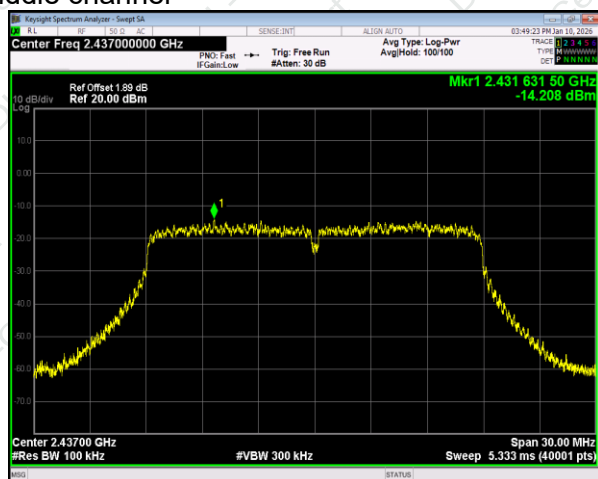



Highest channel

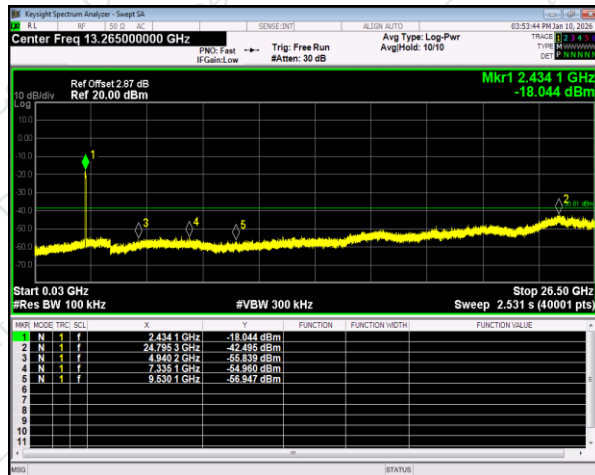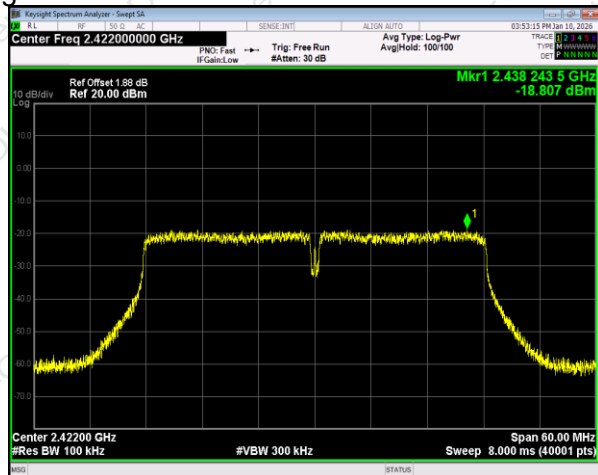





802.11n(HT40)



Lowest channel

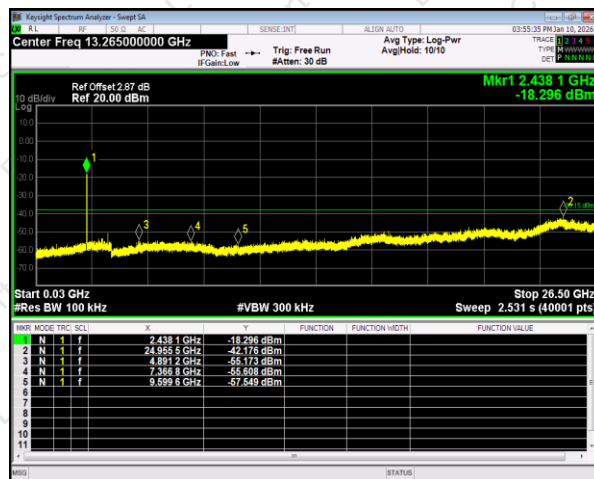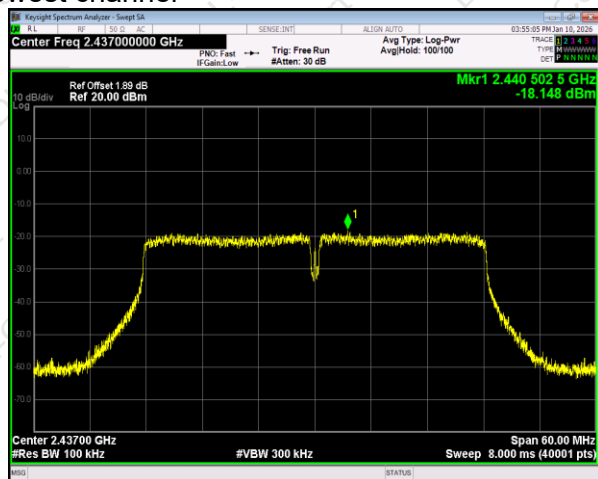

Middle channel

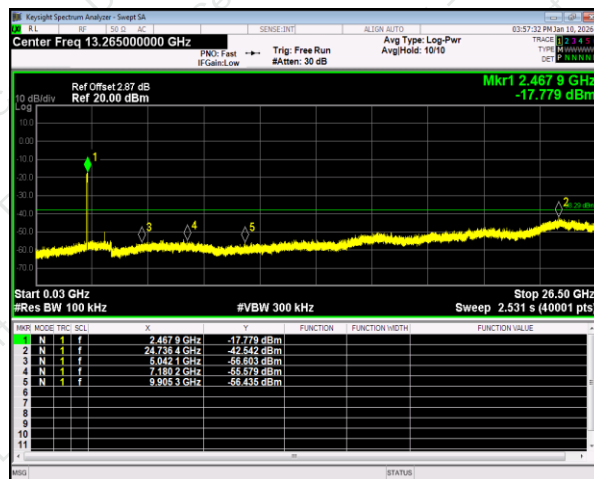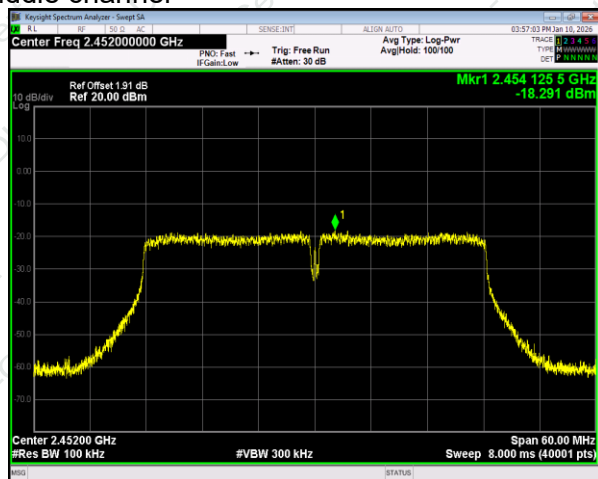

Highest channel

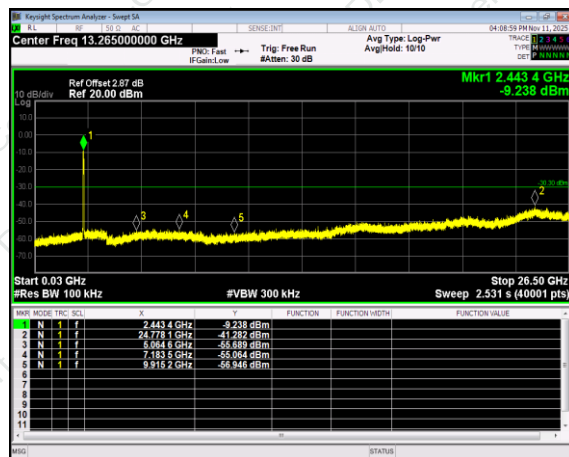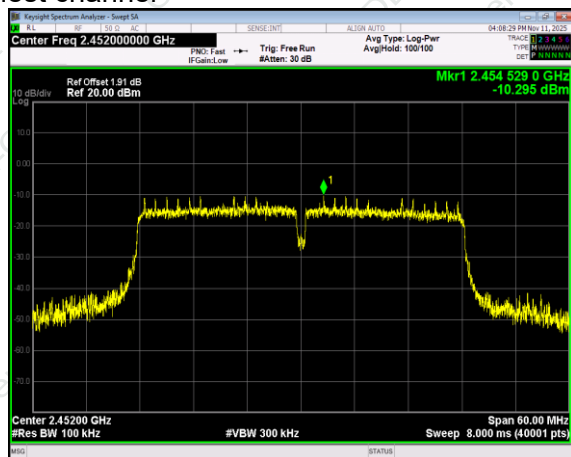



10. DUTY CYCLE

Test Method:	ANSI C63.10:2020
--------------	------------------

10.1 APPLIED PROCEDURES / LIMIT


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

10.2 DEVIATION FROM STANDARD

No deviation.


10.3 TEST SETUP

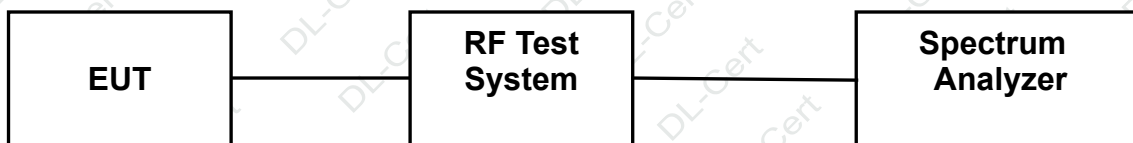




10.4 TEST RESULTS

Mode	Frequency (MHz)	Duty Cycle (%)
802.11b	2412	100
802.11g	2412	100
802.11n20	2412	100
802.11n40	2422	100

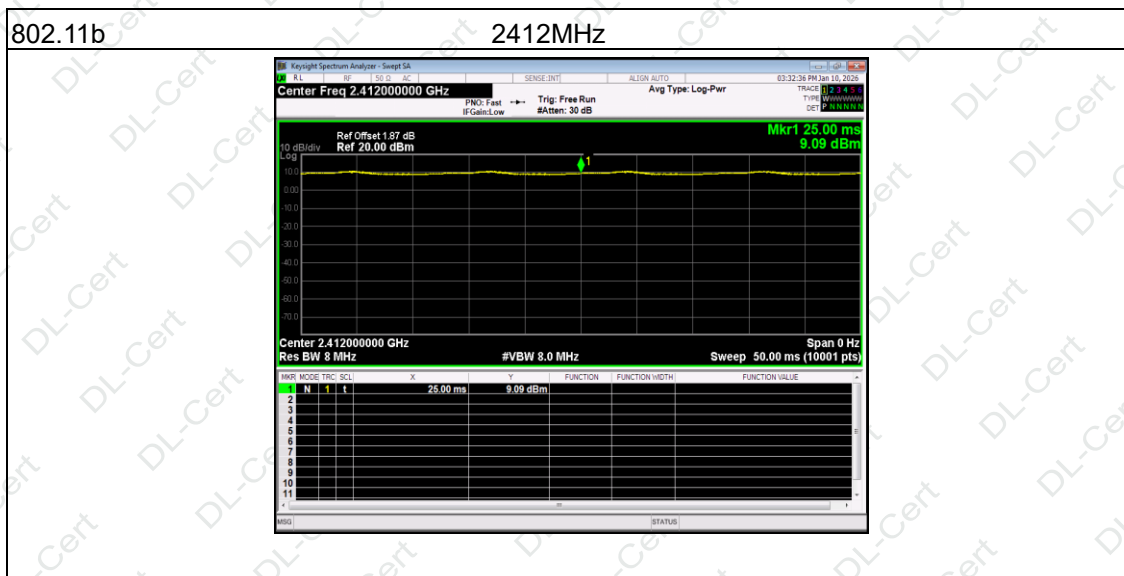



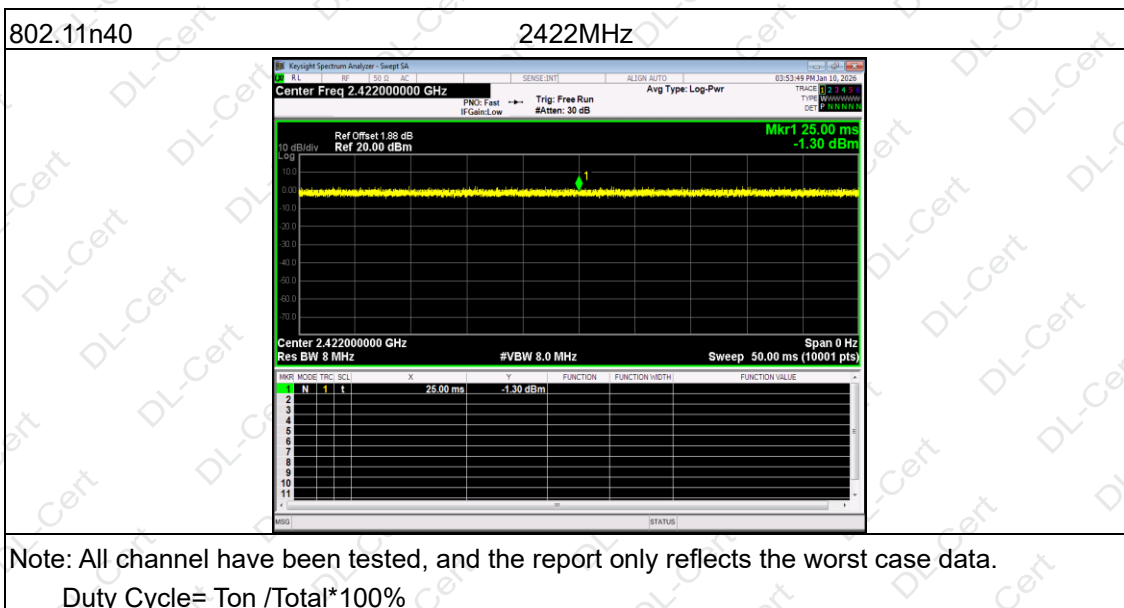



11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antenna is 3.96dBi, reference to the appendix II for details	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****