



FCC Part 15C Test Report

FCC ID:2BQ6C-TW23

Applicant: Shenzhen Transtyle Electronics Co., Ltd
Address: Room 801, Building 3, Hongzhi Technology Building No. 386 Huanguan Middle Road.Guanhu Street, Longhua District, Shenzhen City, China.
Manufacturer: Shenzhen Transtyle Electronics Co., Ltd
Address: Room 801, Building 3, Hongzhi Technology Building No. 386 Huanguan Middle Road.Guanhu Street, Longhua District, Shenzhen City, China.
EUT: Wireless Magnetic Power Bank with Earbuds
Trade Mark: N/A
Model Number: TW23, Power Bank Buds, pbudbl, pbudwh, pbudgm, pbudrg, pbudbu, pbudte, pbudpu, CW20, CW24, CW25, CW26
Date of Receipt: Dec. 11, 2025
Test Date: Dec. 11, 2025 to Feb. 10, 2026
Date of Report: Feb. 10, 2026
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Result: Pass
Report Number: DLE-251216005R

Prepared (Test Engineer):

Dimon Tan

Reviewer (Supervisor):

Jack Bu

Approved (Manager):

Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

**Table of Contents**

	Page
TABLE OF CONTENTS	2
1. VERSION	4
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 Test Setup Configuration	9
3.3 Support Equipment	9
3.4 Test Mode	9
4. EMC EMISSION TEST	11
4.1 Conducted emissions	11
4.1.1 POWER LINE CONDUCTED EMISSION Limits	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.1.6 Test Result	13
4.2 Radiated emissions	15
4.2.1 Radiated Emission Limits	15
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS	17
5. RADIATED BAND EMISSION MEASUREMENT	34
5.1 Test Requirement:	34
5.2 TEST PROCEDURE	34
5.3 DEVIATION FROM TEST STANDARD	35
5.4 TEST SETUP	35
5.5 EUT OPERATING CONDITIONS	35
5.6 TEST RESULT	36
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	38
6.1 Limit	38
6.2 Test Setup	38
6.3 Test procedure	38
6.4 DEVIATION FROM STANDARD	38
6.5 Test Result	39
7. 20DB OCCUPIED BANDWIDTH	46
7.1 Test Setup	46



7.2 Limit	46
7.3 Test procedure	46
7.4 DEVIATION FROM STANDARD	46
7.5 Test Result	47
8. MAXIMUM PEAK OUTPUT POWER	51
8.1 Block Diagram Of Test Setup	51
8.2 Limit	51
8.3 Test procedure	51
8.4 DEVIATION FROM STANDARD	51
8.5 Test Result	52
9. HOPPING CHANNEL SEPARATION	56
9.1 Test Setup	56
9.2 Test procedure	56
9.3 DEVIATION FROM STANDARD	56
9.4 Test Result	57
10. NUMBER OF HOPPING FREQUENCY	61
10.1 Test Setup	61
10.2 Test procedure	61
10.3 DEVIATION FROM STANDARD	61
10.4 Test Result	62
11. DWELL TIME	64
11.1 Test Setup	64
11.2 Test procedure	64
11.3 DEVIATION FROM STANDARD	64
11.4 Test Result	65
12. ANTENNA REQUIREMENT	66
13. TEST SETUP PHOTO	73
14. EUT CONSTRUCTIONAL DETAILS	73



1. VERSION

Report No.	Version	Description	Approved
DLE-251216005R	Rev.01	Initial issue of report	Feb. 10, 2026



2. TEST SUMMARY

Test procedures according to the technical standards:


FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:


(1)" N/A" denotes test is not applicable in this Test Report

Remark: The SCH same and layout different change, not affect RF part, and test Spurious emissions in report show its no effect.

Left Earbud

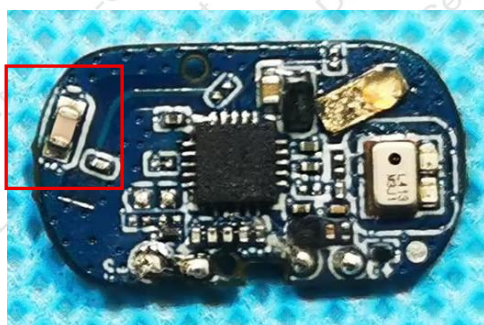

Right Earbud

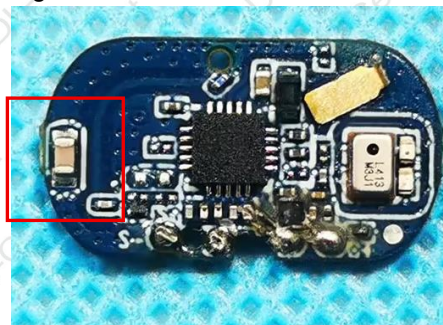



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add.: 101-201, Building C, Shuanghuan, No.8, Baoqing Road Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China.

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless Magnetic Power Bank with Earbuds
Model No.:	TW23
Serial No.:	Power Bank Buds, pbudbl, pbudwh, pbudgm, pbudrg, pbudbu, pbudte, pbudpu, CW20, CW24, CW25, CW26
Model Different.:	All the model are the same circuit and RF module, except model names and appearance color.
Hardware Version:	N/A
Software Version:	N/A
Sample(s) Status:	Engineer sample
Channel Numbers:	79
Channel Spacing:	1MHz
Operation Frequency:	2402MHz~2480MHz
Modulation Technology:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Chip antenna
Antenna Gain:	2.7dBi
Power Supply:	Input: 5V--- Battery: 3.7V---



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz




3.2 Test Setup Configuration


Conducted emissions



Radiated Emission



Conducted Spurious



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Magnetic Power Bank with Earbuds	N/A	TW23	N/A	EUT
A-1	AC Adapter	UGREEN	X569	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Charging Mode:	Keep the EUT in Charging mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. For battery operated equipment, the equipment tests shall be performed using a new battery.	

Test Software	bt_tool_v1.1.2
Power level setup	<4dBm



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 25, 2025	Oct. 24, 2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
6	Amplifier (9kHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
9	Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Oct. 25, 2025	Oct. 24, 2026
16	D.C. Power Supply	LongWei	PS-305D	010964729	Oct. 25, 2025	Oct. 24, 2026
17	Power meter	KEYSIGHT	N1912AP	926431	Oct. 25, 2025	Oct. 24, 2026

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
3	LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2020
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

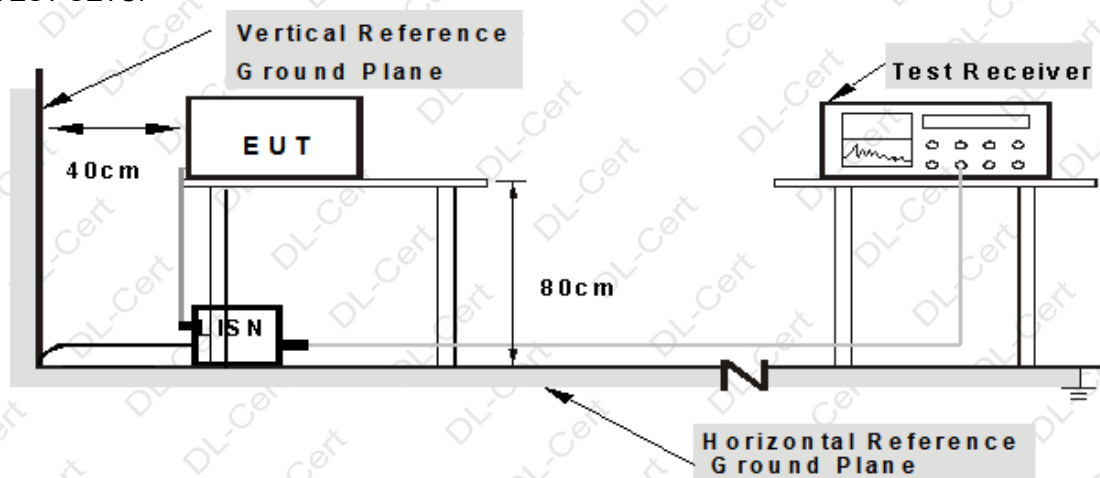

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Charging +TX 8-DPSK - 2441MHz

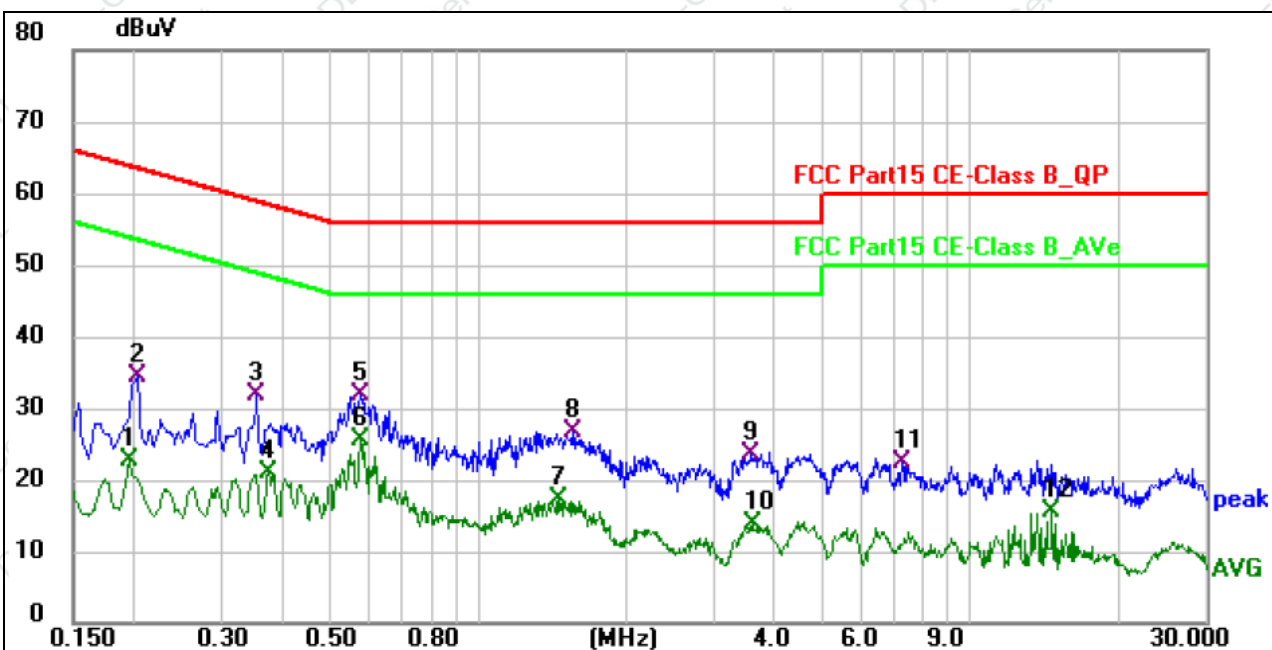


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1940	12.90	9.72	22.62	53.86	-31.24	AVG	P
2	0.2020	24.64	9.72	34.36	63.53	-29.17	QP	P
3	0.3540	22.09	9.72	31.81	58.87	-27.06	QP	P
4	0.3731	11.36	9.72	21.08	48.43	-27.35	AVG	P
5	0.5780	22.27	9.72	31.99	56.00	-24.01	QP	P
6 *	0.5780	15.92	9.72	25.64	46.00	-20.36	AVG	P
7	1.4500	7.68	9.73	17.41	46.00	-28.59	AVG	P
8	1.5620	16.91	9.73	26.64	56.00	-29.36	QP	P
9	3.5860	13.94	9.74	23.68	56.00	-32.32	QP	P
10	3.6100	4.02	9.74	13.76	46.00	-32.24	AVG	P
11	7.2740	12.64	9.78	22.42	60.00	-37.58	QP	P
12	14.6380	5.64	9.85	15.49	50.00	-34.51	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case Charging +TX 8-DPSK - 2441MHz.



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Charging +TX 8-DPSK - 2441MHz

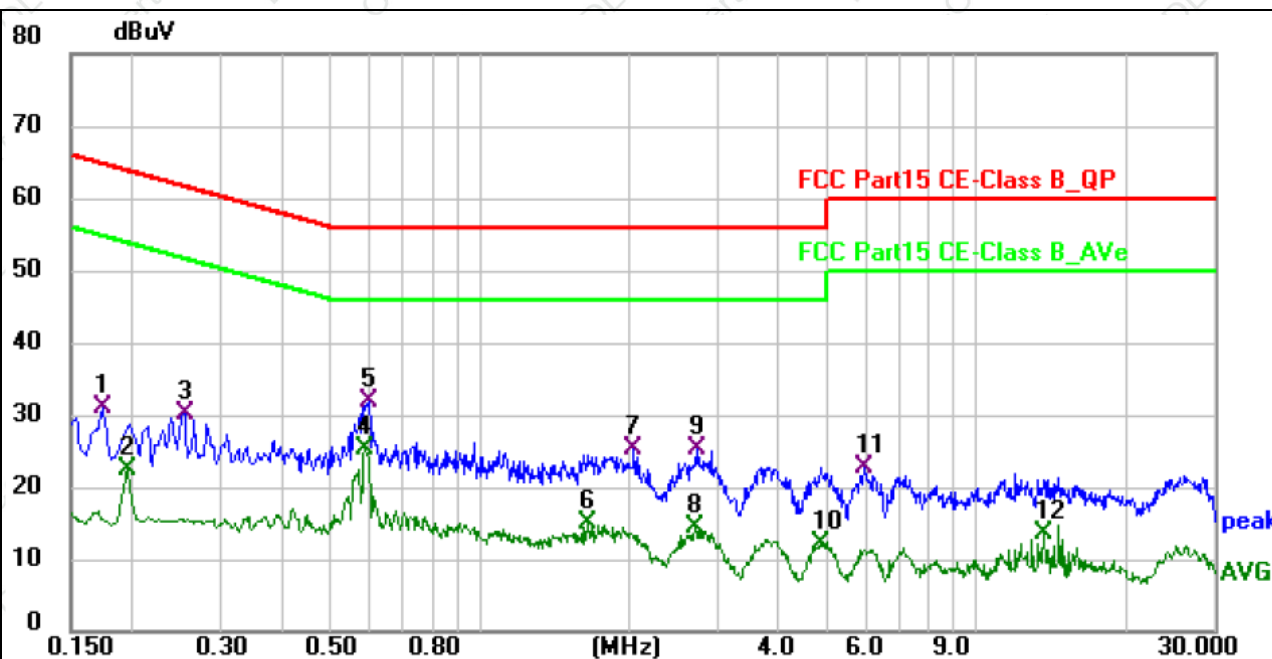

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1740	21.21	9.70	30.91	64.77	-33.86	QP	P
2	0.1940	12.68	9.70	22.38	53.86	-31.48	AVG	P
3	0.2540	20.48	9.70	30.18	61.63	-31.45	QP	P
4 *	0.5899	15.46	9.71	25.17	46.00	-20.83	AVG	P
5	0.5940	22.15	9.71	31.86	56.00	-24.14	QP	P
6	1.6580	5.15	9.73	14.88	46.00	-31.12	AVG	P
7	2.0340	15.60	9.73	25.33	56.00	-30.67	QP	P
8	2.7180	4.73	9.73	14.46	46.00	-31.54	AVG	P
9	2.7340	15.61	9.73	25.34	56.00	-30.66	QP	P
10	4.8859	2.45	9.75	12.20	46.00	-33.80	AVG	P
11	5.9460	12.95	9.76	22.71	60.00	-37.29	QP	P
12	13.6420	3.67	9.83	13.50	50.00	-36.50	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case Charging +TX 8-DPSK - 2441MHz.



4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	MX5Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

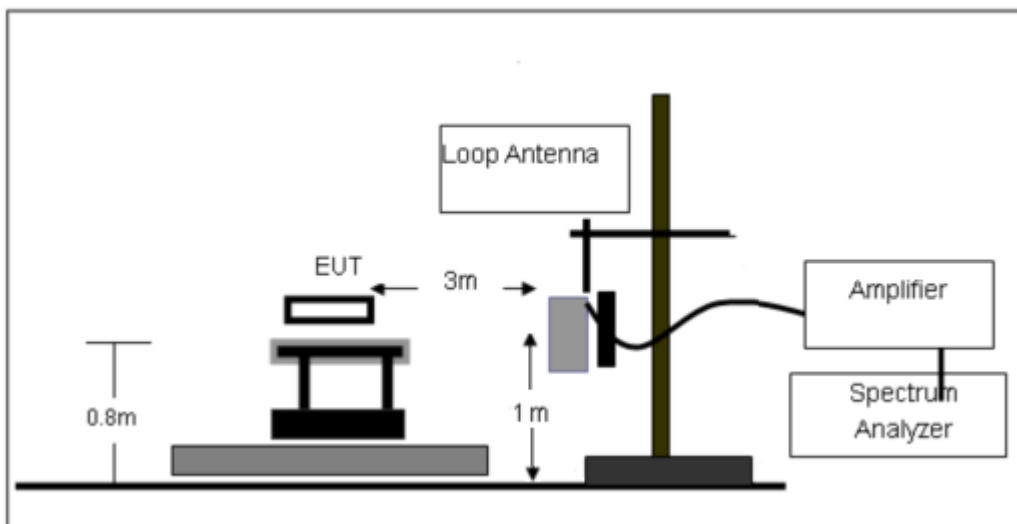

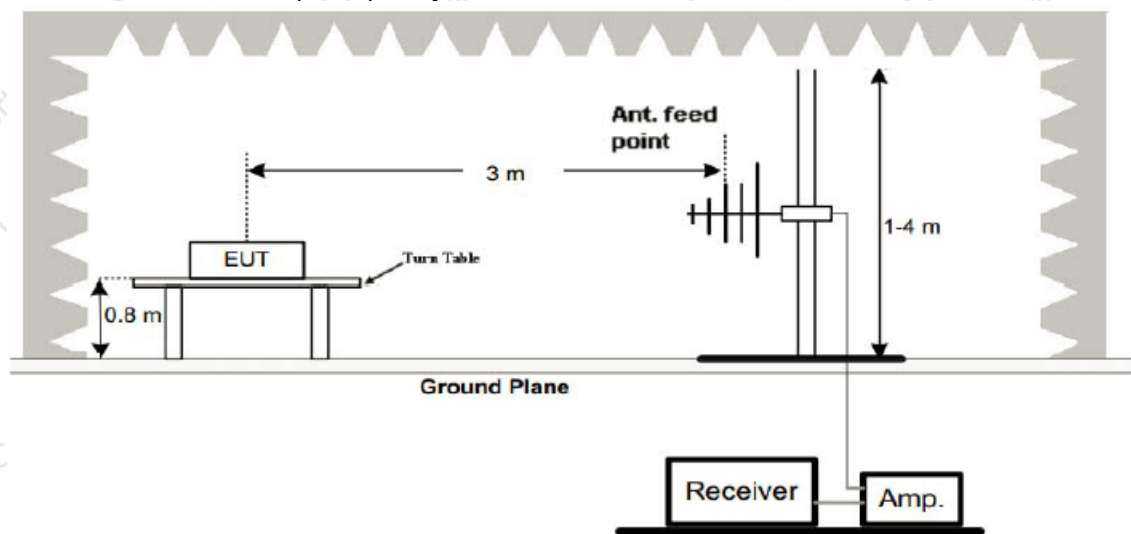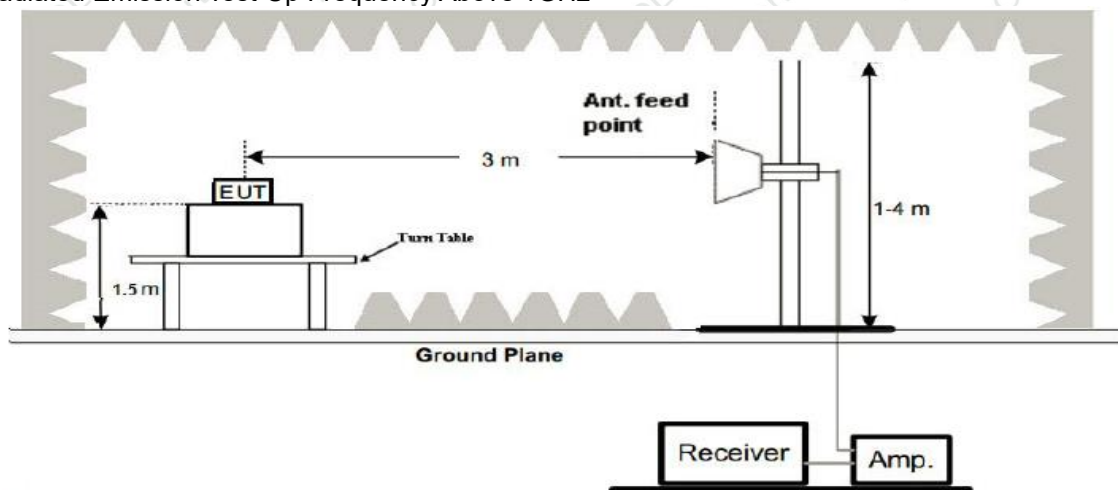**(B) Radiated Emission Test-Up Frequency 30MHz~1GHz****(C) Radiated Emission Test-Up Frequency Above 1GHz****4.2.5 EUT OPERATING CONDITIONS**

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

Left Earbud

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V	Test Mode :	TX 8-DPSK - 2441MHz

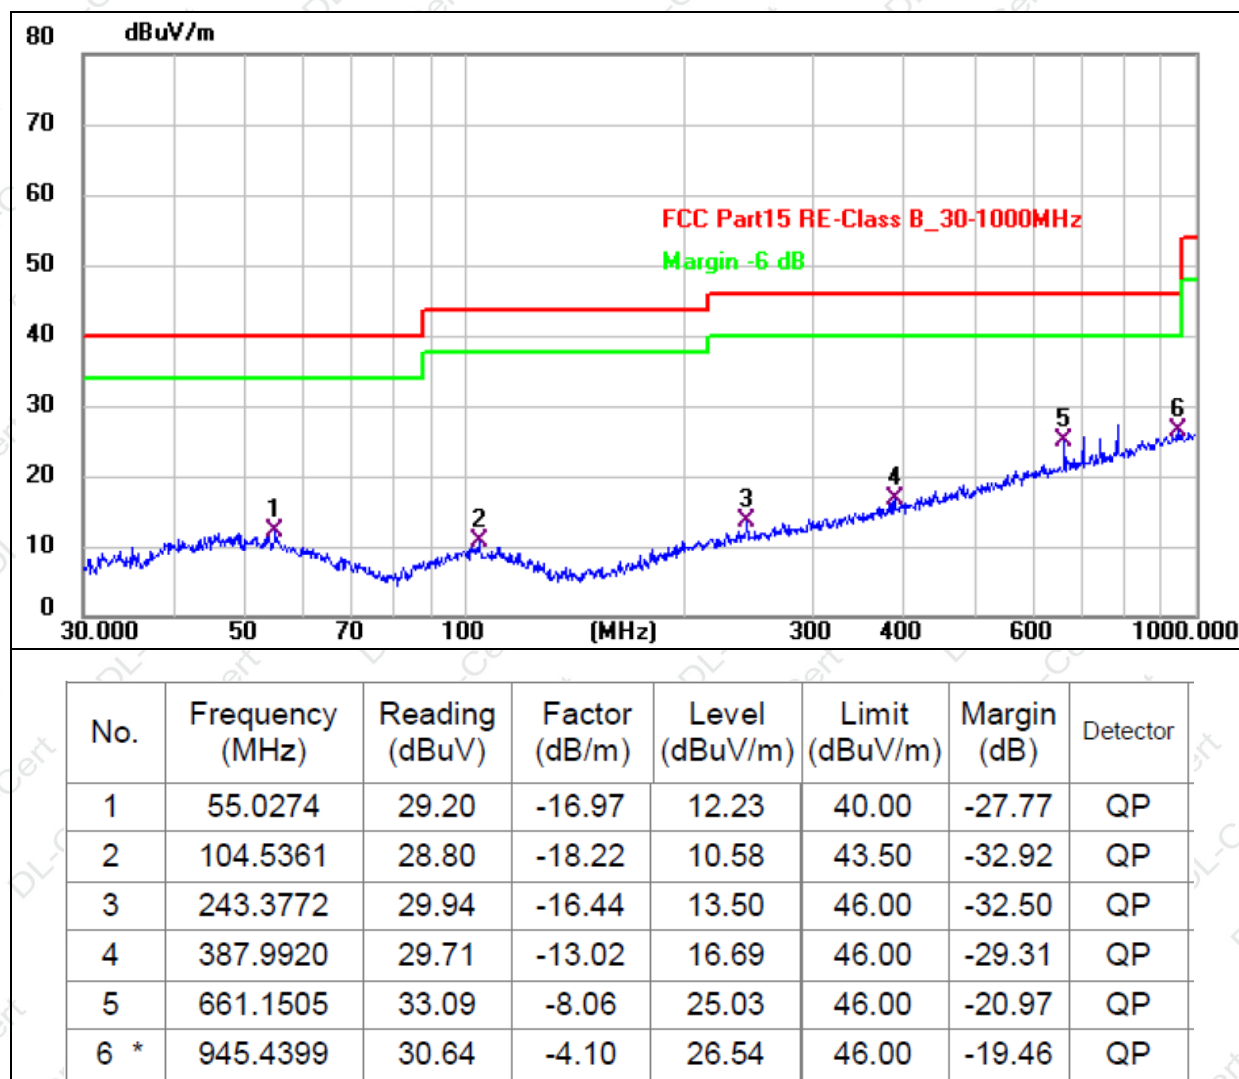


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor 6.Margin= Measurement Level-Limit.
6. The test data shows only the worst case TX 8-DPSK - 2441MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 7.4V	Test Mode :	TX 8-DPSK - 2441MHz

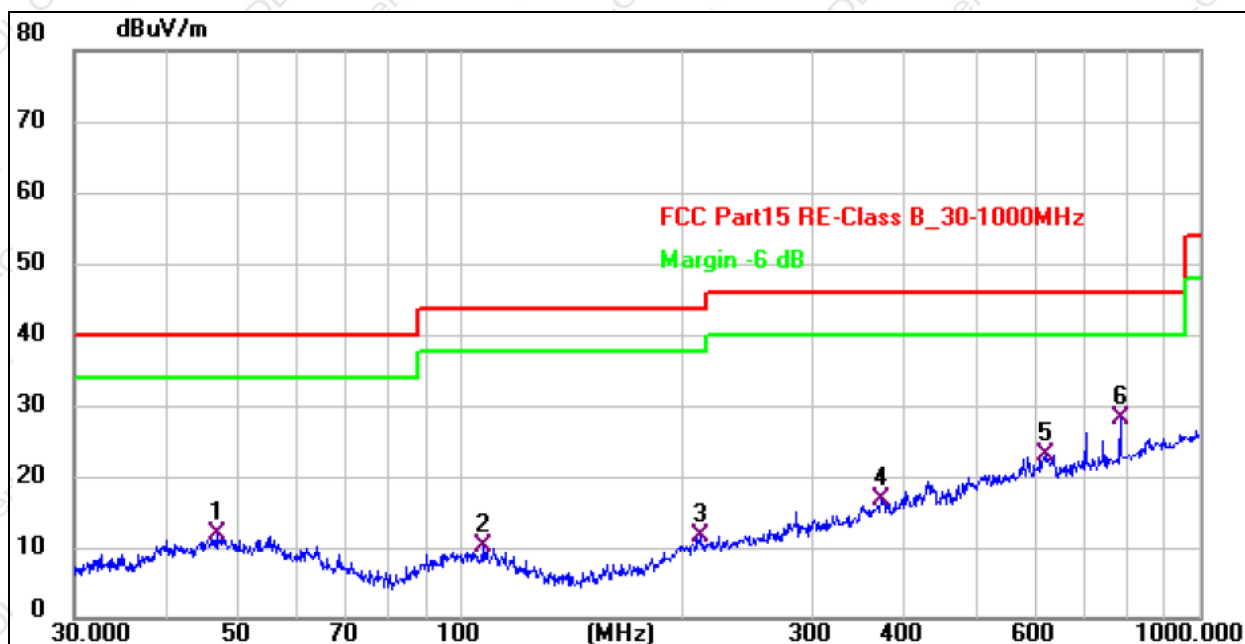

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	46.9948	28.08	-16.20	11.88	40.00	-28.12	QP
2	107.1337	28.33	-18.23	10.10	43.50	-33.40	QP
3	210.7860	28.95	-17.43	11.52	43.50	-31.98	QP
4	370.7023	30.22	-13.42	16.80	46.00	-29.20	QP
5	618.5369	31.42	-8.50	22.92	46.00	-23.08	QP
6 *	782.3453	34.61	-6.56	28.05	46.00	-17.95	QP


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor 6.Margin= Measurement Level-Limit.
6. The test data shows only the worst case TX 8-DPSK - 2441MHz.



Right Earbud

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V	Test Mode :	TX 8-DPSK - 2441MHz

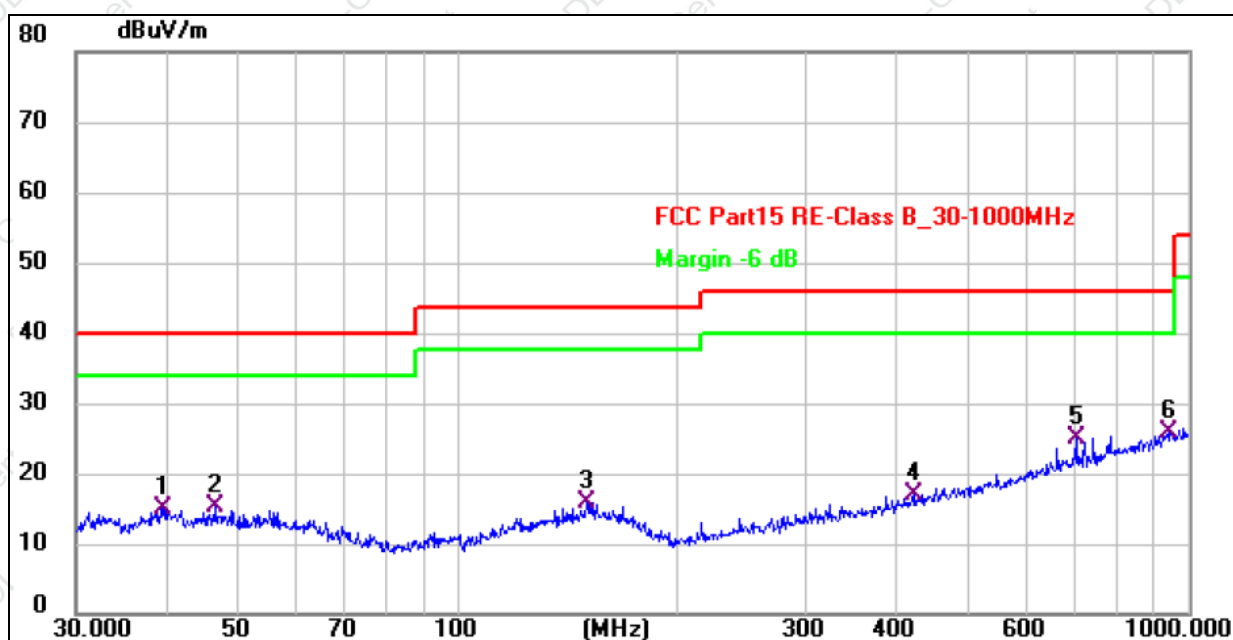


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.5757	28.16	-13.21	14.95	40.00	-25.05	QP
2	46.5030	28.85	-13.59	15.26	40.00	-24.74	QP
3	150.5378	29.14	-13.17	15.97	43.50	-27.53	QP
4	420.5803	29.62	-12.60	17.02	46.00	-28.98	QP
5	701.7610	32.73	-7.80	24.93	46.00	-21.07	QP
6 *	942.1304	30.25	-4.39	25.86	46.00	-20.14	QP

Remarks:

7. An initial pre-scan was performed on the peak detector.
8. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
9. The emission levels of other frequencies are very lower than the limit and not show in test report.
10. Final Level = Reading level + Correct Factor.
11. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor 6. Margin= Measurement Level-Limit.
12. The test data shows only the worst case TX 8-DPSK - 2441MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 7.4V	Test Mode :	TX 8-DPSK - 2441MHz

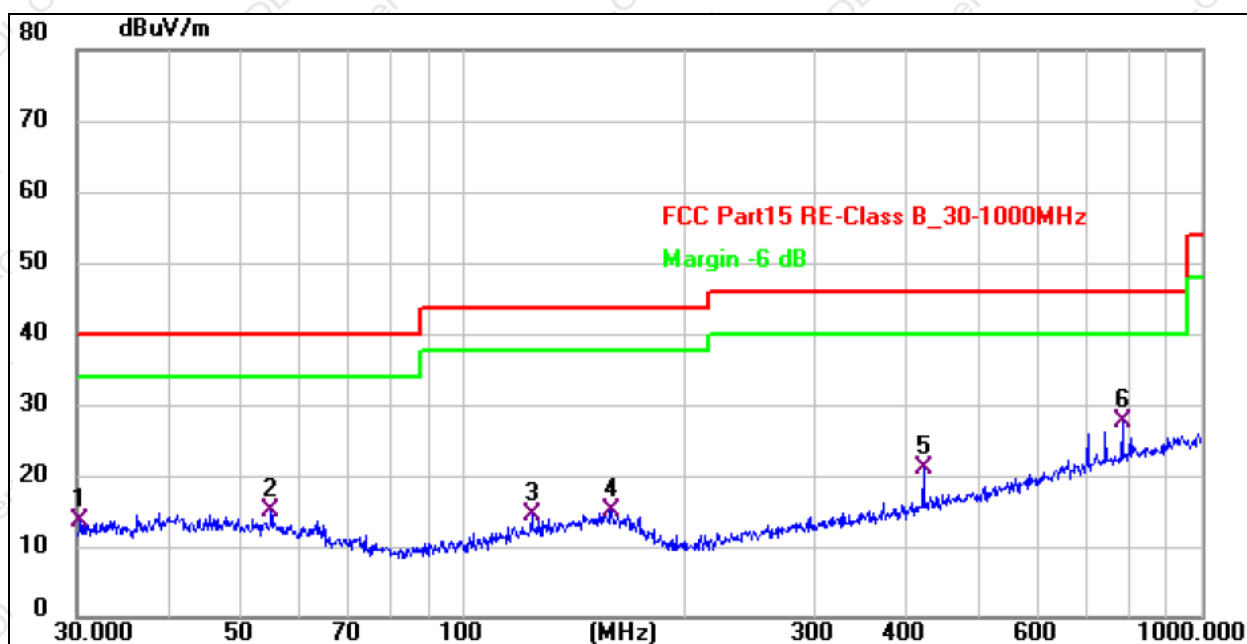

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.3172	27.45	-13.99	13.46	40.00	-26.54	QP
2	55.0274	29.01	-14.09	14.92	40.00	-25.08	QP
3	124.1330	29.29	-14.83	14.46	43.50	-29.04	QP
4	159.2251	28.33	-13.20	15.13	43.50	-28.37	QP
5	420.5803	33.70	-12.60	21.10	46.00	-24.90	QP
6 *	782.3453	34.28	-6.68	27.60	46.00	-18.40	QP

Remarks:

7. An initial pre-scan was performed on the peak detector.
8. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
9. The emission levels of other frequencies are very lower than the limit and not show in test report.
10. Final Level = Reading level + Correct Factor.
11. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor 6.Margin= Measurement Level-Limit.
12. The test data shows only the worst case TX 8-DPSK - 2441MHz.



1GHz~25GHz (Left Earbud)

GFSK - 1-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.49	30.55	5.77	24.66	50.37	74.00	-23.63	PK
V	4804.00	43.16	30.55	5.77	24.66	43.04	54.00	-10.96	AV
V	7206.00	51.42	30.33	6.32	24.55	51.96	74.00	-22.04	PK
V	7206.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
V	9608.00	52.43	30.85	7.45	24.69	53.72	74.00	-20.28	PK
V	9608.00	43.43	30.85	7.45	24.69	44.72	54.00	-9.28	AV
V	12010.00	50.11	31.02	8.99	25.57	53.65	74.00	-20.35	PK
V	12010.00	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV
H	4804.00	51.95	30.55	5.77	24.66	51.83	74.00	-22.17	PK
H	4804.00	43.16	30.55	5.77	24.66	43.04	54.00	-10.96	AV
H	7206.00	54.40	30.33	6.32	24.55	54.94	74.00	-19.06	PK
H	7206.00	43.41	30.33	6.32	24.55	43.95	54.00	-10.05	AV
H	9608.00	54.69	30.85	7.45	24.69	55.98	74.00	-18.02	PK
H	9608.00	43.72	30.85	7.45	24.69	45.01	54.00	-8.99	AV
H	12010.00	50.81	31.02	8.99	25.57	54.35	74.00	-19.65	PK
H	12010.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	52.65	30.55	5.77	24.66	52.53	74.00	-21.47	PK
V	4882.00	43.72	30.55	5.77	24.66	43.60	54.00	-10.40	AV
V	7323.00	51.99	30.33	6.32	24.55	52.53	74.00	-21.47	PK
V	7323.00	43.59	30.33	6.32	24.55	44.13	54.00	-9.87	AV
V	9764.00	52.70	30.85	7.45	24.69	53.99	74.00	-20.01	PK
V	9764.00	43.76	30.85	7.45	24.69	45.05	54.00	-8.95	AV
V	12205.00	50.81	31.02	8.99	25.57	54.35	74.00	-19.65	PK
V	12205.00	43.60	31.02	8.99	25.57	47.14	54.00	-6.86	AV
H	4882.00	54.97	30.55	5.77	24.66	54.85	74.00	-19.15	PK
H	4882.00	43.45	30.55	5.77	24.66	43.33	54.00	-10.67	AV
H	7323.00	53.17	30.33	6.32	24.55	53.71	74.00	-20.29	PK
H	7323.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
H	9764.00	52.20	30.85	7.45	24.69	53.49	74.00	-20.51	PK
H	9764.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
H	12205.00	53.42	31.02	8.99	25.57	56.96	74.00	-17.04	PK
H	12205.00	43.49	31.02	8.99	25.57	47.03	54.00	-6.97	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	54.81	30.55	5.77	24.66	54.69	74.00	-19.31	PK
V	4960.00	43.23	30.55	5.77	24.66	43.11	54.00	-10.89	AV
V	7440.00	54.32	30.33	6.32	24.55	54.86	74.00	-19.14	PK
V	7440.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
V	9920.00	51.19	30.85	7.45	24.69	52.48	74.00	-21.52	PK
V	9920.00	43.96	30.85	7.45	24.69	45.25	54.00	-8.75	AV
V	12400.00	54.72	31.02	8.99	25.57	58.26	74.00	-15.74	PK
V	12400.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV
H	4960.00	53.21	30.55	5.77	24.66	53.09	74.00	-20.91	PK
H	4960.00	43.34	30.55	5.77	24.66	43.22	54.00	-10.78	AV
H	7440.00	52.07	30.33	6.32	24.55	52.61	74.00	-21.39	PK
H	7440.00	43.40	30.33	6.32	24.55	43.94	54.00	-10.06	AV
H	9920.00	54.29	30.85	7.45	24.69	55.58	74.00	-18.42	PK
H	9920.00	43.68	30.85	7.45	24.69	44.97	54.00	-9.03	AV
H	12400.00	50.64	31.02	8.99	25.57	54.18	74.00	-19.82	PK
H	12400.00	43.24	31.02	8.99	25.57	46.78	54.00	-7.22	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$ -DQPSK - 2-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.10	30.55	5.77	24.66	51.98	74.00	-22.02	PK
V	4804.00	43.34	30.55	5.77	24.66	43.22	54.00	-10.78	AV
V	7206.00	53.90	30.33	6.32	24.55	54.44	74.00	-19.56	PK
V	7206.00	43.76	30.33	6.32	24.55	44.30	54.00	-9.70	AV
V	9608.00	53.02	30.85	7.45	24.69	54.31	74.00	-19.69	PK
V	9608.00	43.64	30.85	7.45	24.69	44.93	54.00	-9.07	AV
V	12010.00	54.42	31.02	8.99	25.57	57.96	74.00	-16.04	PK
V	12010.00	43.62	31.02	8.99	25.57	47.16	54.00	-6.84	AV
H	4804.00	50.84	30.55	5.77	24.66	50.72	74.00	-23.28	PK
H	4804.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
H	7206.00	53.68	30.33	6.32	24.55	54.22	74.00	-19.78	PK
H	7206.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	9608.00	50.29	30.85	7.45	24.69	51.58	74.00	-22.42	PK
H	9608.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
H	12010.00	54.70	31.02	8.99	25.57	58.24	74.00	-15.76	PK
H	12010.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	53.44	30.55	5.77	24.66	53.32	74.00	-20.68	PK
V	4882.00	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
V	7323.00	54.25	30.33	6.32	24.55	54.79	74.00	-19.21	PK
V	7323.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
V	9764.00	51.19	30.85	7.45	24.69	52.48	74.00	-21.52	PK
V	9764.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
V	12205.00	51.76	31.02	8.99	25.57	55.30	74.00	-18.70	PK
V	12205.00	43.73	31.02	8.99	25.57	47.27	54.00	-6.73	AV
H	4882.00	51.21	30.55	5.77	24.66	51.09	74.00	-22.91	PK
H	4882.00	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
H	7323.00	51.54	30.33	6.32	24.55	52.08	74.00	-21.92	PK
H	7323.00	43.83	30.33	6.32	24.55	44.37	54.00	-9.63	AV
H	9764.00	51.69	30.85	7.45	24.69	52.98	74.00	-21.02	PK
H	9764.00	43.31	30.85	7.45	24.69	44.60	54.00	-9.40	AV
H	12205.00	51.15	31.02	8.99	25.57	54.69	74.00	-19.31	PK
H	12205.00	43.37	31.02	8.99	25.57	46.91	54.00	-7.09	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	52.14	30.55	5.77	24.66	52.02	74.00	-21.98	PK
V	4960.00	43.41	30.55	5.77	24.66	43.29	54.00	-10.71	AV
V	7440.00	52.85	30.33	6.32	24.55	53.39	74.00	-20.61	PK
V	7440.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	9920.00	51.26	30.85	7.45	24.69	52.55	74.00	-21.45	PK
V	9920.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
V	12400.00	53.40	31.02	8.99	25.57	56.94	74.00	-17.06	PK
V	12400.00	43.85	31.02	8.99	25.57	47.39	54.00	-6.61	AV
H	4960.00	53.46	30.55	5.77	24.66	53.34	74.00	-20.66	PK
H	4960.00	43.33	30.55	5.77	24.66	43.21	54.00	-10.79	AV
H	7440.00	51.44	30.33	6.32	24.55	51.98	74.00	-22.02	PK
H	7440.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	9920.00	50.21	30.85	7.45	24.69	51.50	74.00	-22.50	PK
H	9920.00	43.48	30.85	7.45	24.69	44.77	54.00	-9.23	AV
H	12400.00	52.97	31.02	8.99	25.57	56.51	74.00	-17.49	PK
H	12400.00	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8-DPSK - 3-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.66	30.55	5.77	24.66	52.54	74.00	-21.46	PK
V	4804.00	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
V	7206.00	51.39	30.33	6.32	24.55	51.93	74.00	-22.07	PK
V	7206.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
V	9608.00	54.79	30.85	7.45	24.69	56.08	74.00	-17.92	PK
V	9608.00	43.23	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	12010.00	50.54	31.02	8.99	25.57	54.08	74.00	-19.92	PK
V	12010.00	43.27	31.02	8.99	25.57	46.81	54.00	-7.19	AV
H	4804.00	50.38	30.55	5.77	24.66	50.26	74.00	-23.74	PK
H	4804.00	43.41	30.55	5.77	24.66	43.29	54.00	-10.71	AV
H	7206.00	50.40	30.33	6.32	24.55	50.94	74.00	-23.06	PK
H	7206.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	9608.00	52.98	30.85	7.45	24.69	54.27	74.00	-19.73	PK
H	9608.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
H	12010.00	52.63	31.02	8.99	25.57	56.17	74.00	-17.83	PK
H	12010.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	52.50	30.55	5.77	24.66	52.38	74.00	-21.62	PK
V	4882.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
V	7323.00	53.23	30.33	6.32	24.55	53.77	74.00	-20.23	PK
V	7323.00	43.11	30.33	6.32	24.55	43.65	54.00	-10.35	AV
V	9764.00	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	PK
V	9764.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
V	12205.00	53.36	31.02	8.99	25.57	56.90	74.00	-17.10	PK
V	12205.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV
H	4882.00	50.64	30.55	5.77	24.66	50.52	74.00	-23.48	PK
H	4882.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
H	7323.00	52.15	30.33	6.32	24.55	52.69	74.00	-21.31	PK
H	7323.00	43.10	30.33	6.32	24.55	43.64	54.00	-10.36	AV
H	9764.00	51.81	30.85	7.45	24.69	53.10	74.00	-20.90	PK
H	9764.00	43.84	30.85	7.45	24.69	45.13	54.00	-8.87	AV
H	12205.00	50.98	31.02	8.99	25.57	54.52	74.00	-19.48	PK
H	12205.00	43.20	31.02	8.99	25.57	46.74	54.00	-7.26	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	54.99	30.55	5.77	24.66	54.87	74.00	-19.13	PK
V	4960.00	43.84	30.55	5.77	24.66	43.72	54.00	-10.28	AV
V	7440.00	54.94	30.33	6.32	24.55	55.48	74.00	-18.52	PK
V	7440.00	43.83	30.33	6.32	24.55	44.37	54.00	-9.63	AV
V	9920.00	51.71	30.85	7.45	24.69	53.00	74.00	-21.00	PK
V	9920.00	43.95	30.85	7.45	24.69	45.24	54.00	-8.76	AV
V	12400.00	53.08	31.02	8.99	25.57	56.62	74.00	-17.38	PK
V	12400.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV
H	4960.00	52.50	30.55	5.77	24.66	52.38	74.00	-21.62	PK
H	4960.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
H	7440.00	50.05	30.33	6.32	24.55	50.59	74.00	-23.41	PK
H	7440.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
H	9920.00	51.70	30.85	7.45	24.69	52.99	74.00	-21.01	PK
H	9920.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
H	12400.00	50.91	31.02	8.99	25.57	54.45	74.00	-19.55	PK
H	12400.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



1GHz~25GHz (Right Earbud)

GFSK - 1-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.54	30.55	5.77	24.66	50.42	74.00	-23.58	PK
V	4804.00	43.34	30.55	5.77	24.66	43.22	54.00	-10.78	AV
V	7206.00	52.76	30.33	6.32	24.55	53.30	74.00	-20.70	PK
V	7206.00	43.71	30.33	6.32	24.55	44.25	54.00	-9.75	AV
V	9608.00	50.21	30.85	7.45	24.69	51.50	74.00	-22.50	PK
V	9608.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
V	12010.00	51.45	31.02	8.99	25.57	54.99	74.00	-19.01	PK
V	12010.00	43.65	31.02	8.99	25.57	47.19	54.00	-6.81	AV
H	4804.00	50.08	30.55	5.77	24.66	49.96	74.00	-24.04	PK
H	4804.00	43.57	30.55	5.77	24.66	43.45	54.00	-10.55	AV
H	7206.00	50.76	30.33	6.32	24.55	51.30	74.00	-22.70	PK
H	7206.00	43.57	30.33	6.32	24.55	44.11	54.00	-9.89	AV
H	9608.00	50.38	30.85	7.45	24.69	51.67	74.00	-22.33	PK
H	9608.00	43.37	30.85	7.45	24.69	44.66	54.00	-9.34	AV
H	12010.00	53.23	31.02	8.99	25.57	56.77	74.00	-17.23	PK
H	12010.00	44.00	31.02	8.99	25.57	47.54	54.00	-6.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	50.94	30.55	5.77	24.66	50.82	74.00	-23.18	PK
V	4882.00	43.51	30.55	5.77	24.66	43.39	54.00	-10.61	AV
V	7323.00	54.57	30.33	6.32	24.55	55.11	74.00	-18.89	PK
V	7323.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	9764.00	53.26	30.85	7.45	24.69	54.55	74.00	-19.45	PK
V	9764.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
V	12205.00	53.09	31.02	8.99	25.57	56.63	74.00	-17.37	PK
V	12205.00	43.38	31.02	8.99	25.57	46.92	54.00	-7.08	AV
H	4882.00	54.31	30.55	5.77	24.66	54.19	74.00	-19.81	PK
H	4882.00	43.63	30.55	5.77	24.66	43.51	54.00	-10.49	AV
H	7323.00	52.89	30.33	6.32	24.55	53.43	74.00	-20.57	PK
H	7323.00	43.97	30.33	6.32	24.55	44.51	54.00	-9.49	AV
H	9764.00	50.89	30.85	7.45	24.69	52.18	74.00	-21.82	PK
H	9764.00	43.89	30.85	7.45	24.69	45.18	54.00	-8.82	AV
H	12205.00	50.61	31.02	8.99	25.57	54.15	74.00	-19.85	PK
H	12205.00	43.61	31.02	8.99	25.57	47.15	54.00	-6.85	AV



Shenzhen DL Testing Technology Co., Ltd.

Report No.: DLE-251216005R

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	53.05	30.55	5.77	24.66	52.93	74.00	-21.07	PK
V	4960.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
V	7440.00	54.48	30.33	6.32	24.55	55.02	74.00	-18.98	PK
V	7440.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
V	9920.00	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	PK
V	9920.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	12400.00	53.26	31.02	8.99	25.57	56.80	74.00	-17.20	PK
V	12400.00	43.55	31.02	8.99	25.57	47.09	54.00	-6.91	AV
H	4960.00	50.59	30.55	5.77	24.66	50.47	74.00	-23.53	PK
H	4960.00	43.09	30.55	5.77	24.66	42.97	54.00	-11.03	AV
H	7440.00	53.28	30.33	6.32	24.55	53.82	74.00	-20.18	PK
H	7440.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
H	9920.00	54.17	30.85	7.45	24.69	55.46	74.00	-18.54	PK
H	9920.00	43.80	30.85	7.45	24.69	45.09	54.00	-8.91	AV
H	12400.00	50.53	31.02	8.99	25.57	54.07	74.00	-19.93	PK
H	12400.00	43.89	31.02	8.99	25.57	47.43	54.00	-6.57	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$ -DQPSK - 2-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	54.47	30.55	5.77	24.66	54.35	74.00	-19.65	PK
V	4804.00	43.89	30.55	5.77	24.66	43.77	54.00	-10.23	AV
V	7206.00	53.15	30.33	6.32	24.55	53.69	74.00	-20.31	PK
V	7206.00	43.77	30.33	6.32	24.55	44.31	54.00	-9.69	AV
V	9608.00	50.55	30.85	7.45	24.69	51.84	74.00	-22.16	PK
V	9608.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	12010.00	53.49	31.02	8.99	25.57	57.03	74.00	-16.97	PK
V	12010.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV
H	4804.00	54.11	30.55	5.77	24.66	53.99	74.00	-20.01	PK
H	4804.00	43.90	30.55	5.77	24.66	43.78	54.00	-10.22	AV
H	7206.00	54.78	30.33	6.32	24.55	55.32	74.00	-18.68	PK
H	7206.00	43.46	30.33	6.32	24.55	44.00	54.00	-10.00	AV
H	9608.00	50.64	30.85	7.45	24.69	51.93	74.00	-22.07	PK
H	9608.00	43.38	30.85	7.45	24.69	44.67	54.00	-9.33	AV
H	12010.00	52.35	31.02	8.99	25.57	55.89	74.00	-18.11	PK
H	12010.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	51.69	30.55	5.77	24.66	51.57	74.00	-22.43	PK
V	4882.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	7323.00	53.51	30.33	6.32	24.55	54.05	74.00	-19.95	PK
V	7323.00	43.83	30.33	6.32	24.55	44.37	54.00	-9.63	AV
V	9764.00	51.73	30.85	7.45	24.69	53.02	74.00	-20.98	PK
V	9764.00	43.99	30.85	7.45	24.69	45.28	54.00	-8.72	AV
V	12205.00	53.60	31.02	8.99	25.57	57.14	74.00	-16.86	PK
V	12205.00	43.87	31.02	8.99	25.57	47.41	54.00	-6.59	AV
H	4882.00	52.86	30.55	5.77	24.66	52.74	74.00	-21.26	PK
H	4882.00	43.54	30.55	5.77	24.66	43.42	54.00	-10.58	AV
H	7323.00	53.76	30.33	6.32	24.55	54.30	74.00	-19.70	PK
H	7323.00	43.09	30.33	6.32	24.55	43.63	54.00	-10.37	AV
H	9764.00	52.52	30.85	7.45	24.69	53.81	74.00	-20.19	PK
H	9764.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
H	12205.00	53.13	31.02	8.99	25.57	56.67	74.00	-17.33	PK
H	12205.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	52.75	30.55	5.77	24.66	52.63	74.00	-21.37	PK
V	4960.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
V	7440.00	54.34	30.33	6.32	24.55	54.88	74.00	-19.12	PK
V	7440.00	43.30	30.33	6.32	24.55	43.84	54.00	-10.16	AV
V	9920.00	51.87	30.85	7.45	24.69	53.16	74.00	-20.84	PK
V	9920.00	43.41	30.85	7.45	24.69	44.70	54.00	-9.30	AV
V	12400.00	52.21	31.02	8.99	25.57	55.75	74.00	-18.25	PK
V	12400.00	43.17	31.02	8.99	25.57	46.71	54.00	-7.29	AV
H	4960.00	53.35	30.55	5.77	24.66	53.23	74.00	-20.77	PK
H	4960.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
H	7440.00	53.19	30.33	6.32	24.55	53.73	74.00	-20.27	PK
H	7440.00	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV
H	9920.00	53.54	30.85	7.45	24.69	54.83	74.00	-19.17	PK
H	9920.00	43.17	30.85	7.45	24.69	44.46	54.00	-9.54	AV
H	12400.00	50.51	31.02	8.99	25.57	54.05	74.00	-19.95	PK
H	12400.00	43.26	31.02	8.99	25.57	46.80	54.00	-7.20	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8-DPSK - 3-DH1

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	53.29	30.55	5.77	24.66	53.17	74.00	-20.83	PK
V	4804.00	43.71	30.55	5.77	24.66	43.59	54.00	-10.41	AV
V	7206.00	51.18	30.33	6.32	24.55	51.72	74.00	-22.28	PK
V	7206.00	43.43	30.33	6.32	24.55	43.97	54.00	-10.03	AV
V	9608.00	51.86	30.85	7.45	24.69	53.15	74.00	-20.85	PK
V	9608.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
V	12010.00	54.93	31.02	8.99	25.57	58.47	74.00	-15.53	PK
V	12010.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV
H	4804.00	51.92	30.55	5.77	24.66	51.80	74.00	-22.20	PK
H	4804.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
H	7206.00	51.94	30.33	6.32	24.55	52.48	74.00	-21.52	PK
H	7206.00	43.28	30.33	6.32	24.55	43.82	54.00	-10.18	AV
H	9608.00	51.56	30.85	7.45	24.69	52.85	74.00	-21.15	PK
H	9608.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	12010.00	52.88	31.02	8.99	25.57	56.42	74.00	-17.58	PK
H	12010.00	43.20	31.02	8.99	25.57	46.74	54.00	-7.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	50.91	30.55	5.77	24.66	50.79	74.00	-23.21	PK
V	4882.00	43.51	30.55	5.77	24.66	43.39	54.00	-10.61	AV
V	7323.00	54.01	30.33	6.32	24.55	54.55	74.00	-19.45	PK
V	7323.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
V	9764.00	53.16	30.85	7.45	24.69	54.45	74.00	-19.55	PK
V	9764.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
V	12205.00	54.98	31.02	8.99	25.57	58.52	74.00	-15.48	PK
V	12205.00	43.87	31.02	8.99	25.57	47.41	54.00	-6.59	AV
H	4882.00	53.59	30.55	5.77	24.66	53.47	74.00	-20.53	PK
H	4882.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
H	7323.00	53.80	30.33	6.32	24.55	54.34	74.00	-19.66	PK
H	7323.00	43.85	30.33	6.32	24.55	44.39	54.00	-9.61	AV
H	9764.00	50.47	30.85	7.45	24.69	51.76	74.00	-22.24	PK
H	9764.00	43.57	30.85	7.45	24.69	44.86	54.00	-9.14	AV
H	12205.00	52.90	31.02	8.99	25.57	56.44	74.00	-17.56	PK
H	12205.00	43.51	31.02	8.99	25.57	47.05	54.00	-6.95	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	54.28	30.55	5.77	24.66	54.16	74.00	-19.84	PK
V	4960.00	43.51	30.55	5.77	24.66	43.39	54.00	-10.61	AV
V	7440.00	52.73	30.33	6.32	24.55	53.27	74.00	-20.73	PK
V	7440.00	43.52	30.33	6.32	24.55	44.06	54.00	-9.94	AV
V	9920.00	50.86	30.85	7.45	24.69	52.15	74.00	-21.85	PK
V	9920.00	43.17	30.85	7.45	24.69	44.46	54.00	-9.54	AV
V	12400.00	52.52	31.02	8.99	25.57	56.06	74.00	-17.94	PK
V	12400.00	43.82	31.02	8.99	25.57	47.36	54.00	-6.64	AV
H	4960.00	54.16	30.55	5.77	24.66	54.04	74.00	-19.96	PK
H	4960.00	43.42	30.55	5.77	24.66	43.30	54.00	-10.70	AV
H	7440.00	53.65	30.33	6.32	24.55	54.19	74.00	-19.81	PK
H	7440.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
H	9920.00	54.23	30.85	7.45	24.69	55.52	74.00	-18.48	PK
H	9920.00	43.36	30.85	7.45	24.69	44.65	54.00	-9.35	AV
H	12400.00	51.12	31.02	8.99	25.57	54.66	74.00	-19.34	PK
H	12400.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2390MHz
Stop Frequency	2500MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 3MHz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 0.8meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.



g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

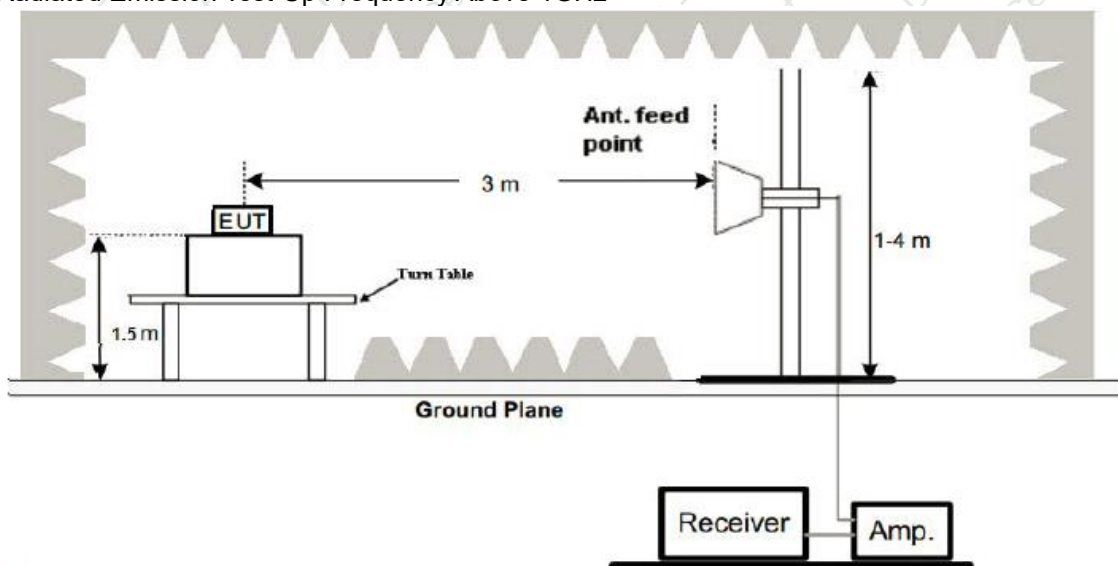

5.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Detect or Type	Result
GFSK 1-DH1	Low Channel: 2402MHz										
	H	2390.00	54.21	30.22	4.85	23.98	52.82	74.00	-21.18	PK	PASS
	H	2390.00	44.30	30.22	4.85	23.98	42.91	54.00	-11.09	AV	PASS
	H	2400.00	54.88	30.22	4.85	23.98	53.49	74.00	-20.51	PK	PASS
	H	2400.00	44.13	30.22	4.85	23.98	42.74	54.00	-11.26	AV	PASS
	V	2390.00	54.12	30.22	4.85	23.98	52.73	74.00	-21.27	PK	PASS
	V	2390.00	44.31	30.22	4.85	23.98	42.92	54.00	-11.08	AV	PASS
	V	2400.00	53.59	30.22	4.85	23.98	52.20	74.00	-21.80	PK	PASS
	V	2400.00	44.10	30.22	4.85	23.98	42.71	54.00	-11.29	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	54.67	30.22	4.85	23.98	53.28	74.00	-20.72	Pk	PASS
	H	2483.50	44.21	30.22	4.85	23.98	42.82	54.00	-11.18	AV	PASS
	H	2500.00	53.30	30.22	4.85	23.98	51.91	74.00	-22.09	Pk	PASS
	H	2500.00	44.96	30.22	4.85	23.98	43.57	54.00	-10.43	AV	PASS
	V	2483.50	53.27	30.22	4.85	23.98	51.88	74.00	-22.12	Pk	PASS
	V	2483.50	44.31	30.22	4.85	23.98	42.92	54.00	-11.08	AV	PASS
	V	2500.00	54.22	30.22	4.85	23.98	52.83	74.00	-21.17	Pk	PASS
	V	2500.00	44.06	30.22	4.85	23.98	42.67	54.00	-11.33	AV	PASS
π/4-DQ PSK 2-DH1	Low Channel: 2402MHz										
	H	2390.00	53.60	30.22	4.85	23.98	52.21	74.00	-21.79	PK	PASS
	H	2390.00	44.84	30.22	4.85	23.98	43.45	54.00	-10.55	AV	PASS
	H	2400.00	53.86	30.22	4.85	23.98	52.47	74.00	-21.53	PK	PASS
	H	2400.00	44.70	30.22	4.85	23.98	43.31	54.00	-10.69	AV	PASS
	V	2390.00	54.42	30.22	4.85	23.98	53.03	74.00	-20.97	PK	PASS
	V	2390.00	44.32	30.22	4.85	23.98	42.93	54.00	-11.07	AV	PASS
	V	2400.00	54.23	30.22	4.85	23.98	52.84	74.00	-21.16	PK	PASS
	V	2400.00	44.25	30.22	4.85	23.98	42.86	54.00	-11.14	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	53.89	30.22	4.85	23.98	52.50	74.00	-21.50	PK	PASS
	H	2483.50	44.21	30.22	4.85	23.98	42.82	54.00	-11.18	AV	PASS
	H	2500.00	54.77	30.22	4.85	23.98	53.38	74.00	-20.62	PK	PASS
	H	2500.00	44.42	30.22	4.85	23.98	43.03	54.00	-10.97	AV	PASS
	V	2483.50	54.33	30.22	4.85	23.98	52.94	74.00	-21.06	PK	PASS
	V	2483.50	44.47	30.22	4.85	23.98	43.08	54.00	-10.92	AV	PASS
	V	2500.00	54.89	30.22	4.85	23.98	53.50	74.00	-20.50	PK	PASS
	V	2500.00	44.14	30.22	4.85	23.98	42.75	54.00	-11.25	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Detect or Type	Result
8-DPSK 3-DH1	Low Channel: 2402MHz										
	H	2390.00	54.18	30.22	4.85	23.98	52.79	74.00	-21.21	PK	PASS
	H	2390.00	44.21	30.22	4.85	23.98	42.82	54.00	-11.18	AV	PASS
	H	2400.00	54.21	30.22	4.85	23.98	52.82	74.00	-21.18	PK	PASS
	H	2400.00	44.93	30.22	4.85	23.98	43.54	54.00	-10.46	AV	PASS
	V	2390.00	53.69	30.22	4.85	23.98	52.30	74.00	-21.70	PK	PASS
	V	2390.00	44.30	30.22	4.85	23.98	42.91	54.00	-11.09	AV	PASS
	V	2400.00	54.87	30.22	4.85	23.98	53.48	74.00	-20.52	PK	PASS
	V	2400.00	44.50	30.22	4.85	23.98	43.11	54.00	-10.89	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	53.68	30.22	4.85	23.98	52.29	74.00	-21.71	Pk	PASS
	H	2483.50	44.56	30.22	4.85	23.98	43.17	54.00	-10.83	AV	PASS
	H	2500.00	53.10	30.22	4.85	23.98	51.71	74.00	-22.29	Pk	PASS
	H	2500.00	44.67	30.22	4.85	23.98	43.28	54.00	-10.72	AV	PASS
	V	2483.50	54.63	30.22	4.85	23.98	53.24	74.00	-20.76	Pk	PASS
	V	2483.50	44.96	30.22	4.85	23.98	43.57	54.00	-10.43	AV	PASS
	V	2500.00	53.23	30.22	4.85	23.98	51.84	74.00	-22.16	Pk	PASS
	V	2500.00	44.83	30.22	4.85	23.98	43.44	54.00	-10.56	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											




6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup

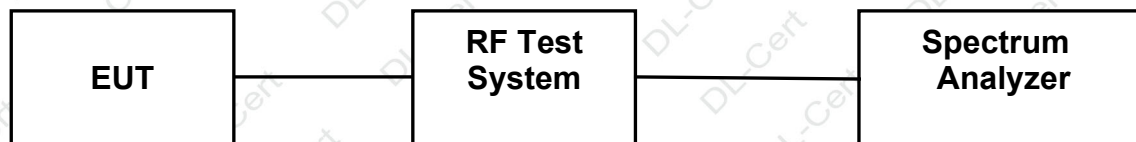

6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD



No deviation.





6.5 Test Result

GFSK - 1-DH1



Lowest channel

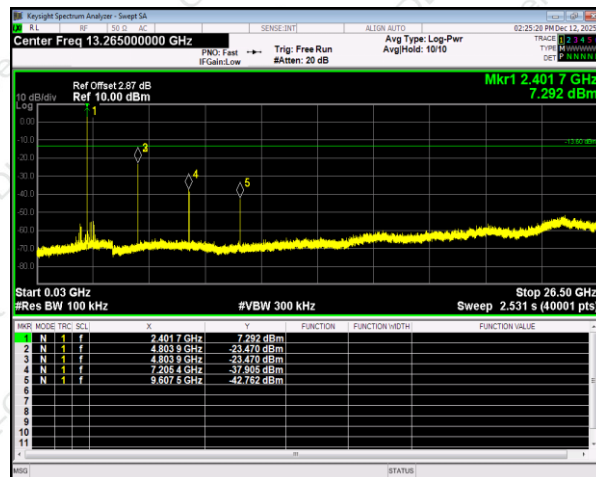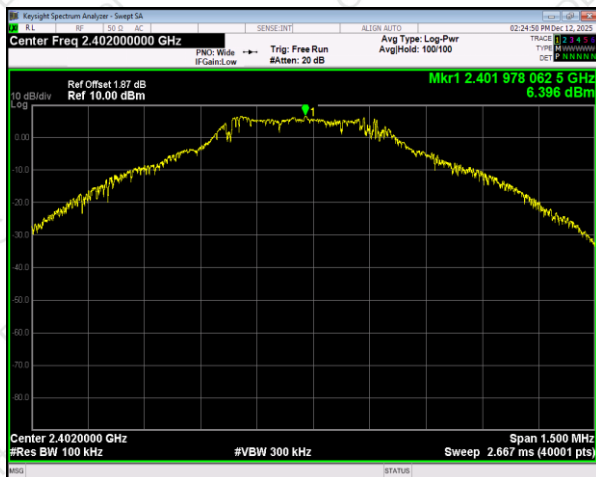

Middle channel

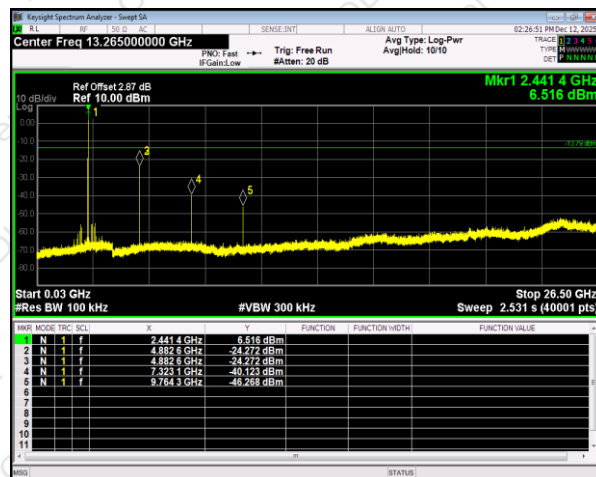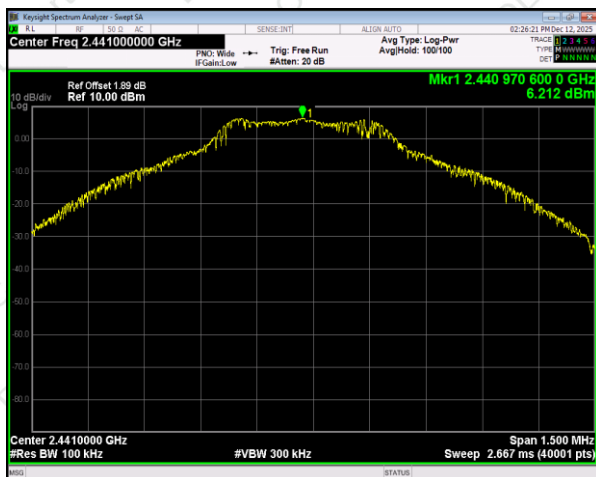



Highest channel

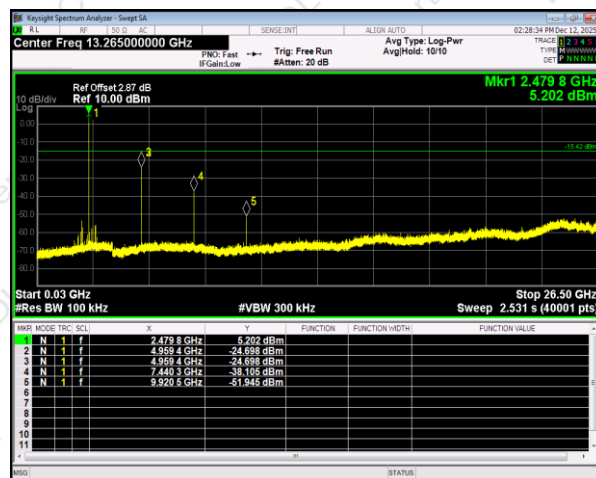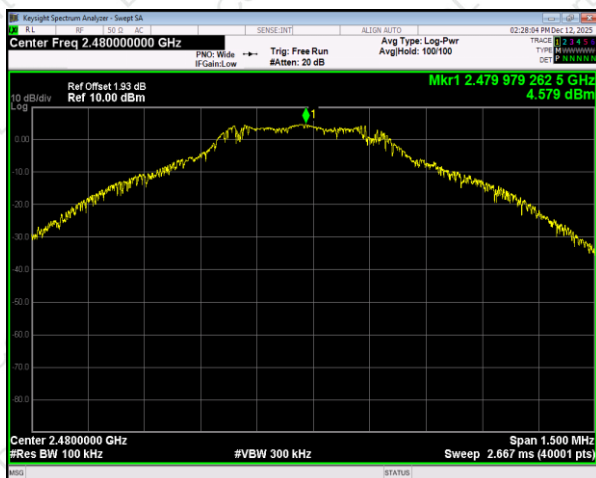



30MHz~26.5GHz

 $\pi/4$ -DQPSK - 2-DH1



Lowest channel

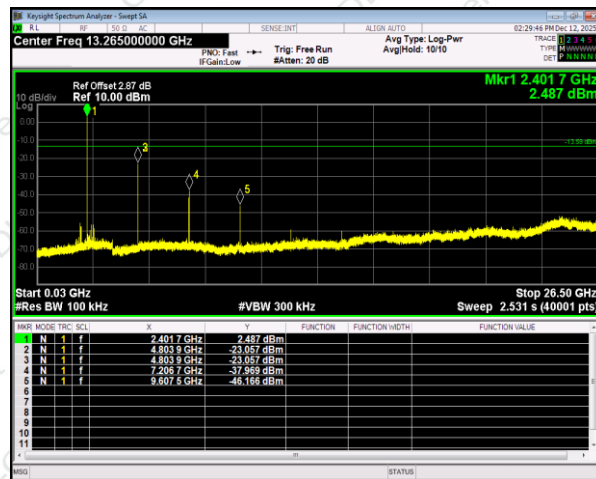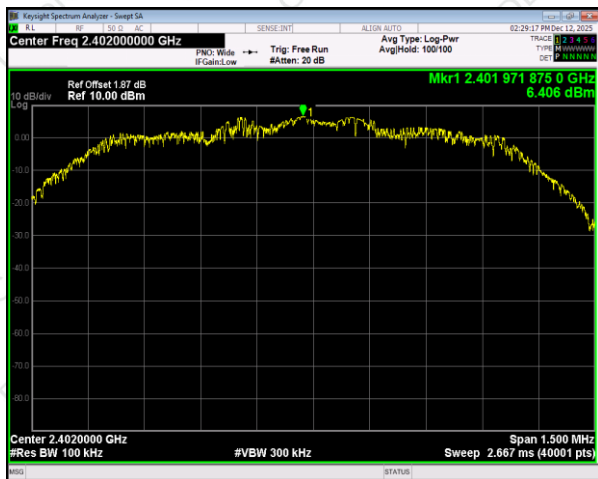

Middle channel

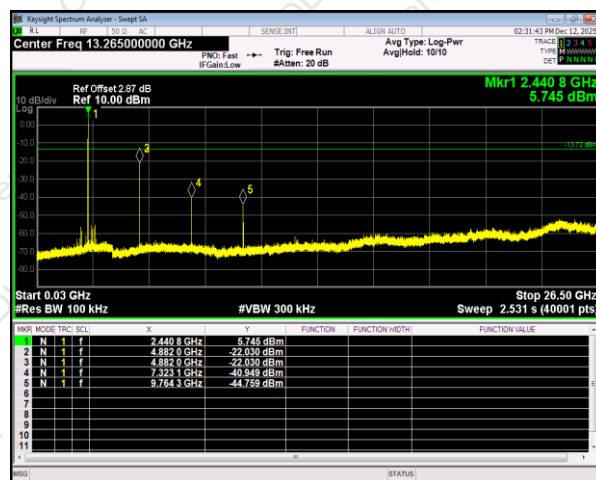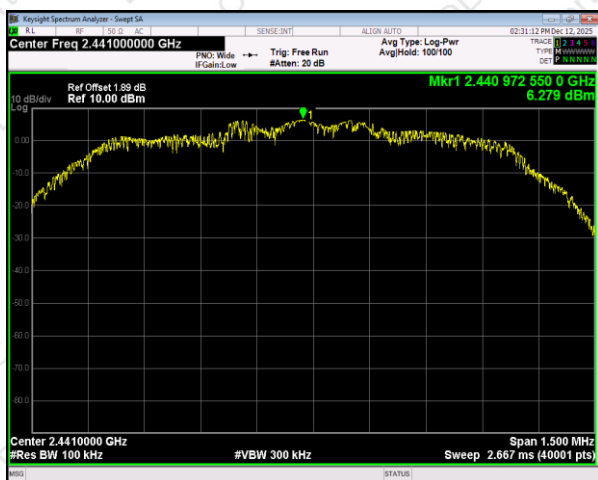

Highest channel

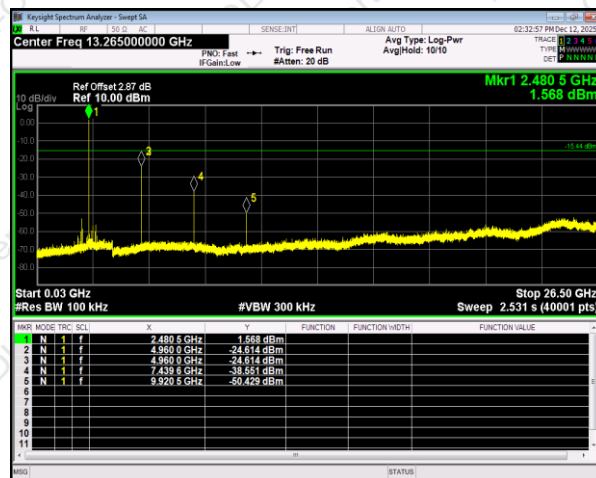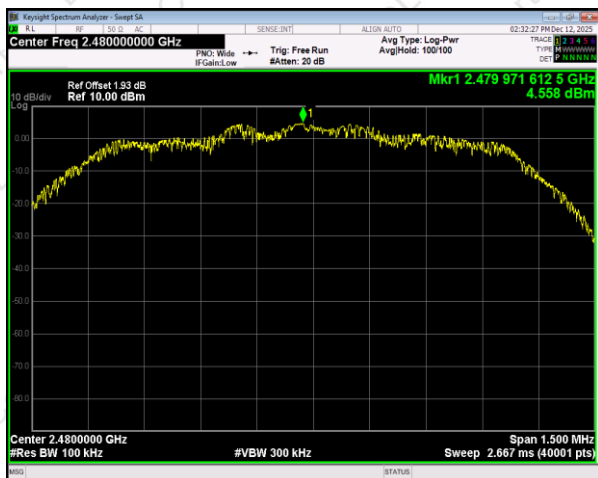


30MHz~26.5GHz





8-DPSK - 3-DH1



Lowest channel

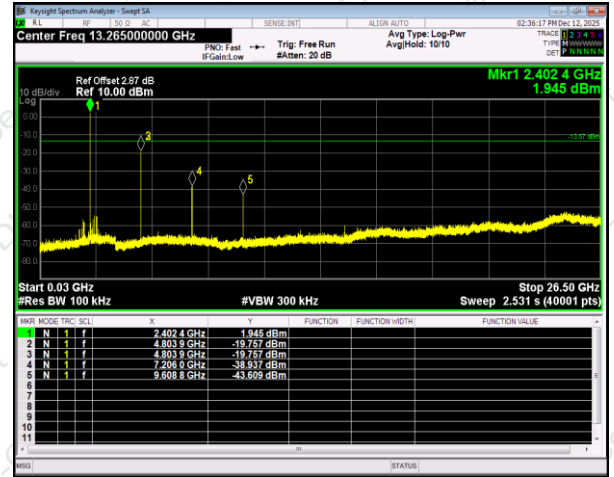

Middle channel

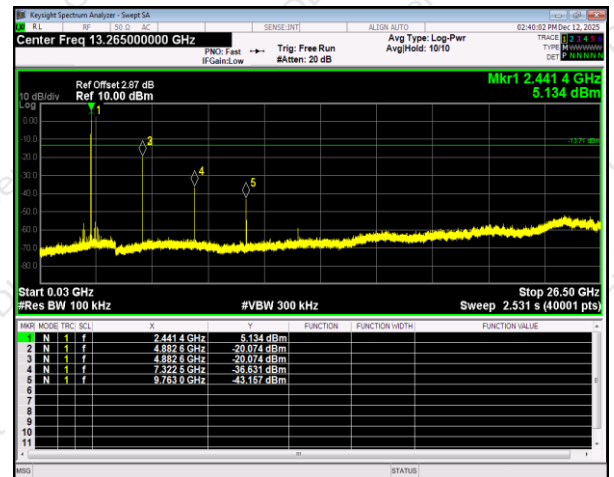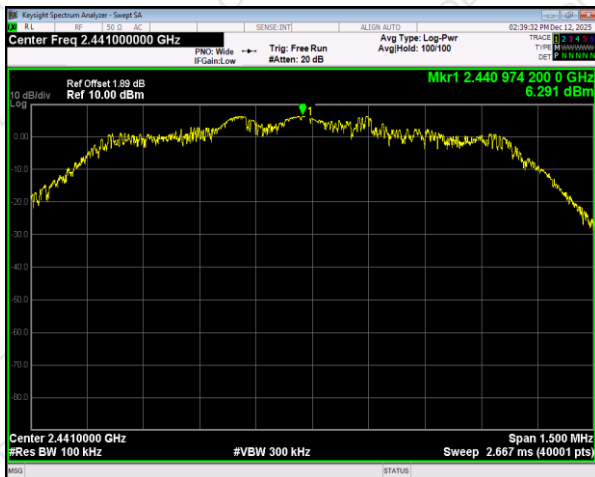



Highest channel

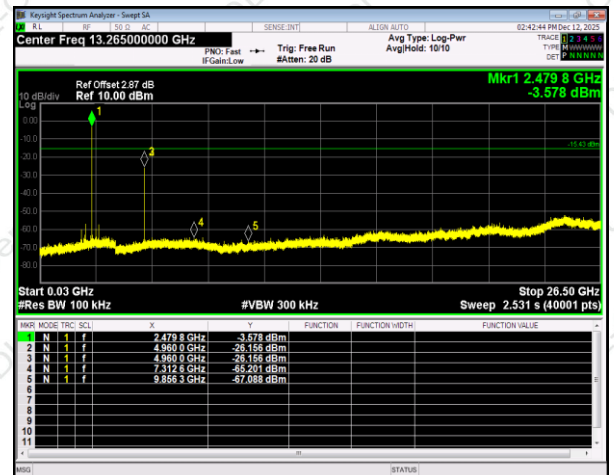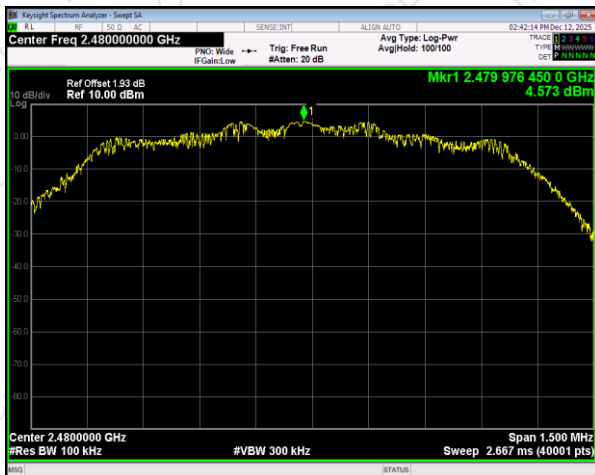





30MHz~26.5GHz





GFSK -1-DH1 No-hopping Band edge-left side

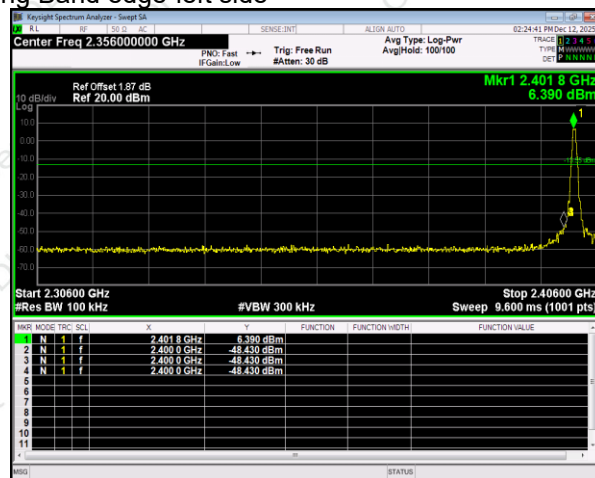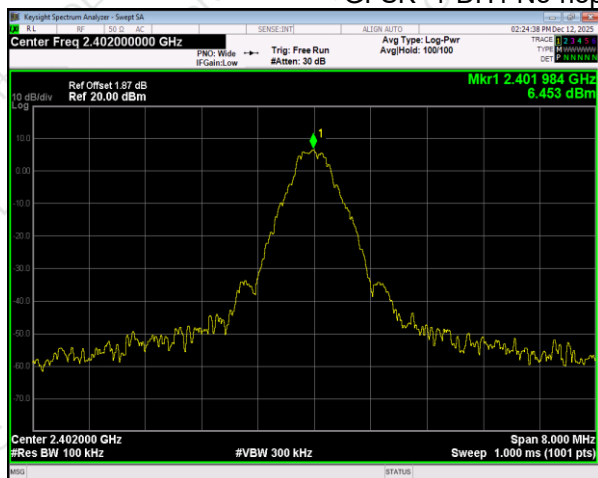


GFSK -1-DH1 No-hopping Band edge-right side

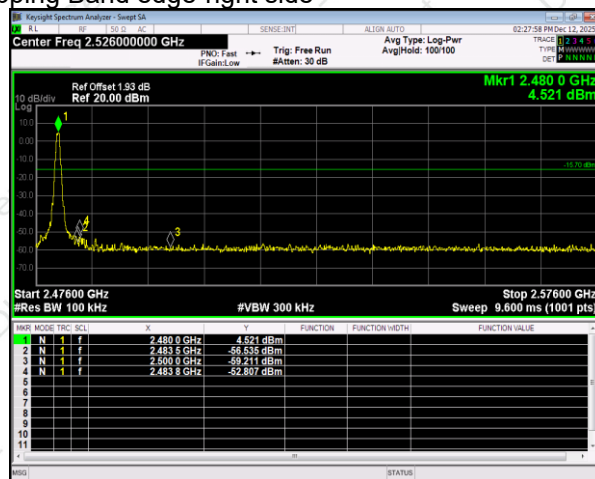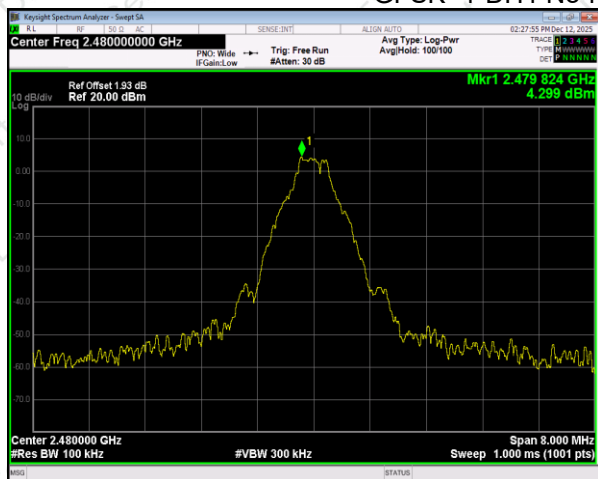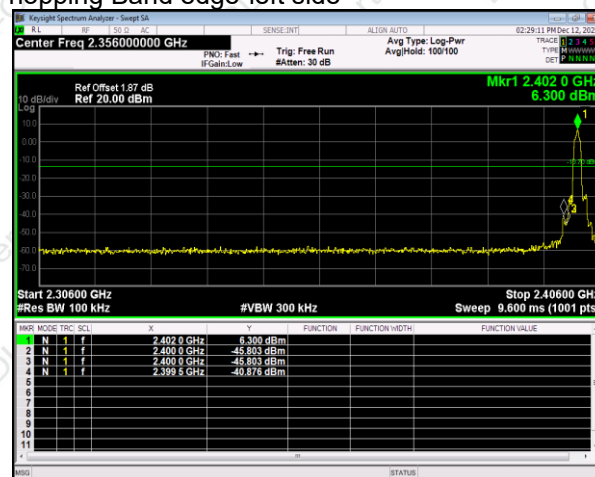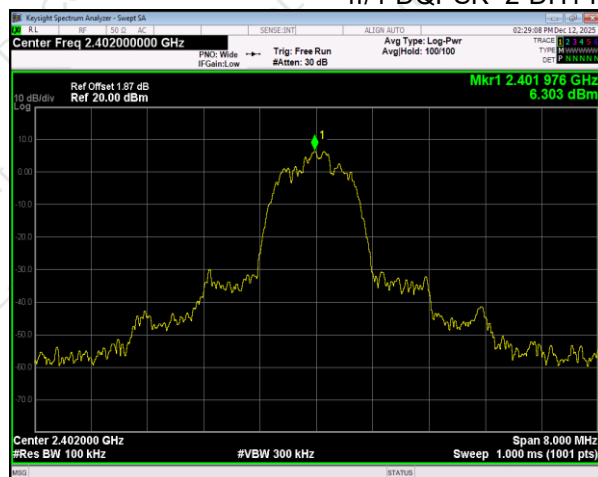
 $\pi/4$ -DQPSK -2-DH1 No-hopping Band edge-left side

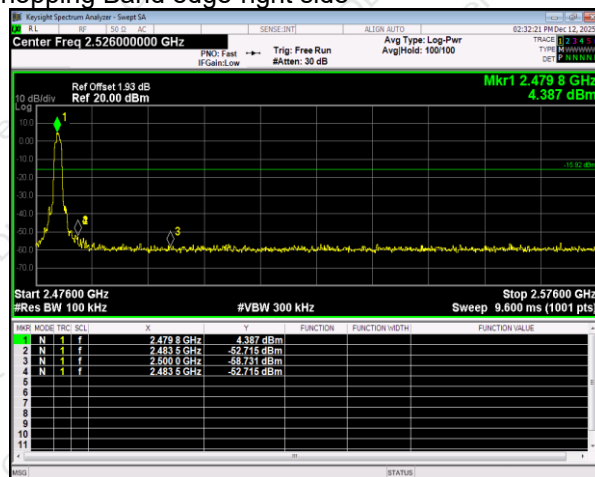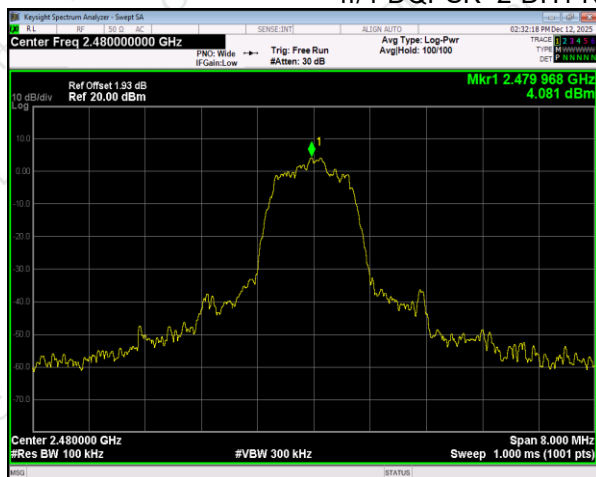 $\pi/4$ -DQPSK -2-DH1 No-hopping Band edge-right side

8-DPSK-2-DH1 No-hopping Band edge-left side

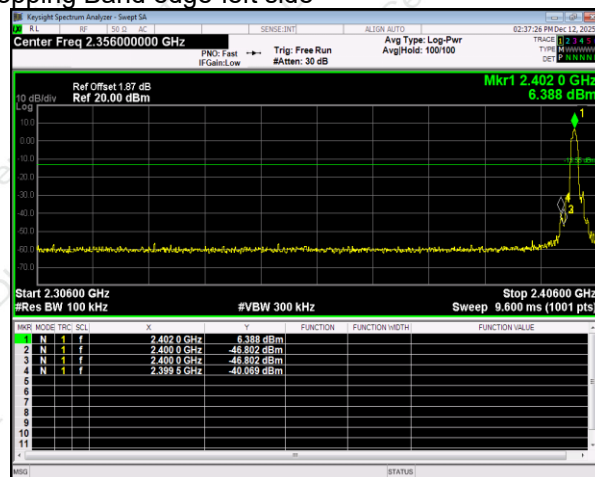


8-DPSK-3-DH1 No-hopping Band edge-left side



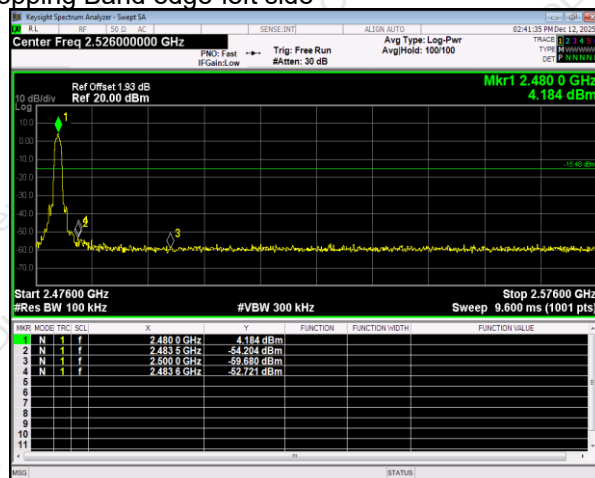





GFSK -1-DH1 Hopping Band edge-left side

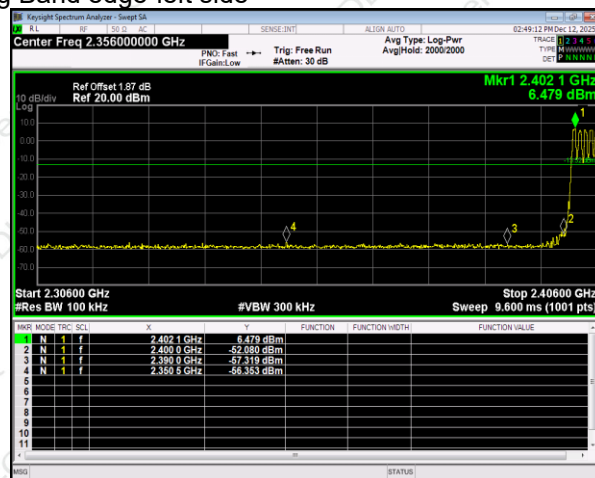


GFSK -1-DH1 Hopping Band Band edge-right side

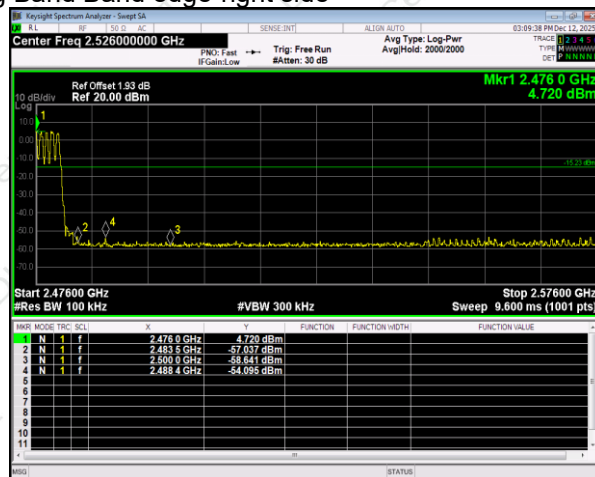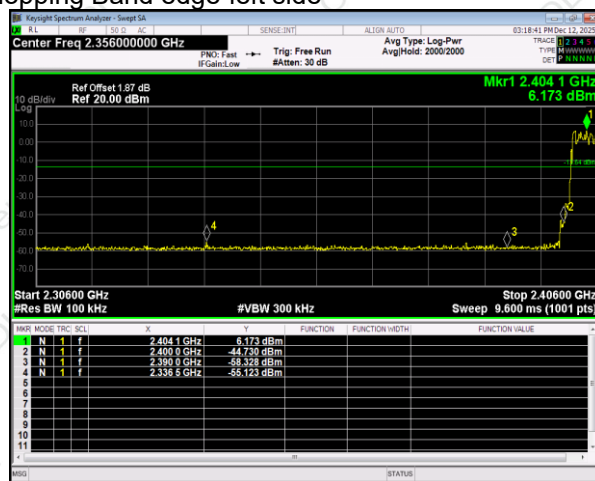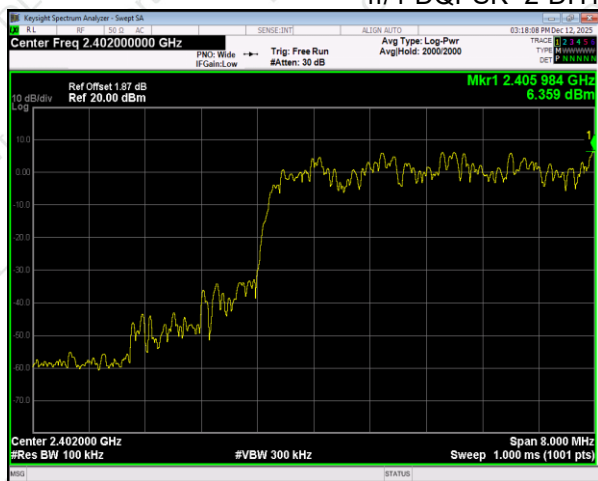
 $\pi/4$ -DQPSK -2-DH1 Hopping Band edge-left side

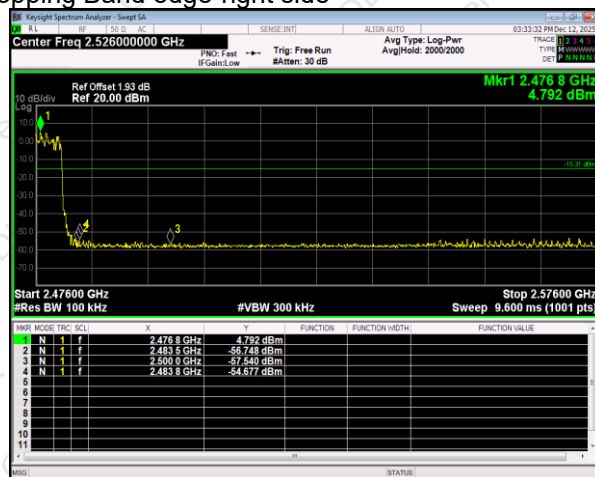 $\pi/4$ -DQPSK -2-DH1 Hopping Band edge-right side

8-DPSK -3-DH1 Hopping Band edge-left side

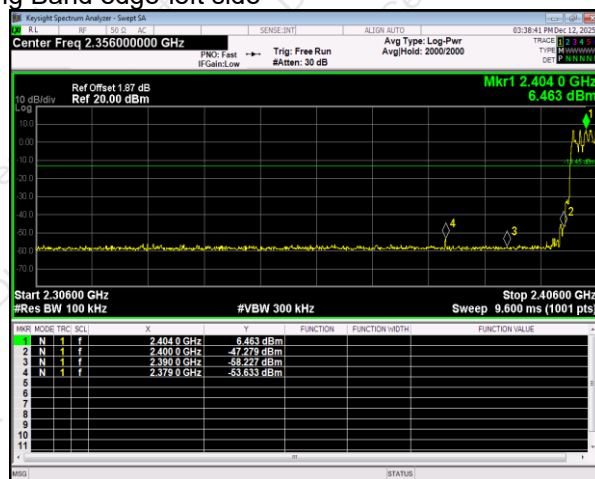

8-DPSK -3-DH1 Hopping Band edge-right side

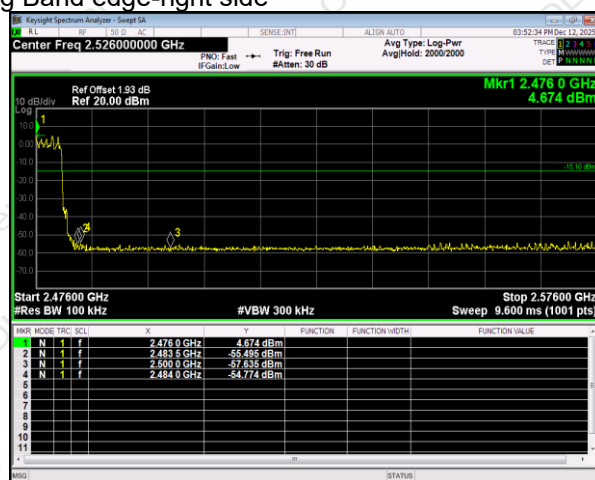




7. 20DB OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020

7.1 Test Setup

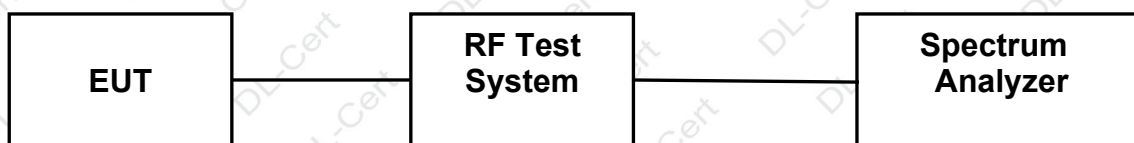

7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.



7.5 Test Result

Modulation	Packet	Test Channel	20dB Occupied Bandwidth (MHz)	Result
GFSK	1-DH1	Lowest	0.8753	Pass
		Middle	0.901	
		Highest	0.8997	
$\pi/4$ -DQPSK	2-DH1	Lowest	1.288	Pass
		Middle	1.286	
		Highest	1.252	
8-DPSK	3-DH1	Lowest	1.221	Pass
		Middle	1.221	
		Highest	1.223	