

TEST REPORT

Product : MNQ1525 WiFi 7 Dual Band
Mesh Router
Trade mark : MOTOROLA
Model/Type reference : MNQ1525
Serial Number : N/A
Report Number : EED32R81531902
FCC ID : 2BQLJMNQ1525
Date of Issue : Sep. 29, 2025
Test Standards : 47 CFR Part 15 Subpart E
Test result : PASS


Prepared for:

Boundless Devices Inc
343 S Highway 101 Ste 200 Solana Beach CA 92075,USA

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Park, Zone 70, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:



Keven Tan

Reviewed by:



Frazer Li

Approved by:



Aaron Ma

Date:

Sep. 29, 2025



Check No.:4316250825

1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
TEST CONFIGURATION	6
3.3 TEST ENVIRONMENT	7
3.4 DESCRIPTION OF SUPPORT UNITS	7
3.5 TEST LOCATION	8
3.6 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
4 EQUIPMENT LIST	9
5 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
5.1 ANTENNA REQUIREMENT	13
AC POWER LINE CONDUCTED EMISSIONS	14
5.2 MAXIMUM CONDUCTED OUTPUT POWER	18
5.3 EMISSION BANDWIDTH	20
5.4 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	21
5.5 MAXIMUM POWER SPECTRAL DENSITY	22
5.6 FREQUENCY STABILITY	23
5.7 RADIATED EMISSION	24
5.8 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BANDS	33
6 APPENDIX A	162
PHOTOGRAPHS OF TEST SETUP	163
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	165

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	PASS
Duty Cycle	47 CFR Part 15 Subpart E Section 15.407	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
26dB Emission Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
99% Occupied Bandwidth	\	PASS
6dB Emission Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (e)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	PASS
Radiated Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS
Radiated Emissions which fall in the restricted bands	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS

3 General Information

3.1 Client Information

Applicant:	Boundless Devices Inc
Address of Applicant:	343 S Highway 101 Ste 200 Solana Beach CA 92075,USA
Manufacturer:	Boundless Devices Inc
Address of Manufacturer:	343 S Highway 101 Ste 200 Solana Beach CA 92075,USA
Factory:	HuaZhuang Electronics (VietNam) Co.,Ltd.
Address of Factory:	Part of lot J, Dong Van II Industrial Zone, Dong Van Ward, Ninh Binh Provice, Viet Nam

3.2 General Description of EUT

Product Name:	MNQ1525 WiFi 7 Dual Band Mesh Router
Model No.:	MNQ1525
Test Model No.:	MNQ1525
Trade mark:	MOTOROLA
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location
Type of Modulation:	IEEE 802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11n(HT20/HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11ac(VHT20/VHT40/VHT80/VHT160): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) IEEE 802.11ax(HE20/HE40/HE80/HE160): OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM,1024QAM) IEEE 802.11be(EHT20/EHT40/EHT80/EHT160): OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM,1024QAM,4096QAM)
Operating Frequency	U-NII-1: 5150-5250MHz U-NII-2A: 5250-5350MHz U-NII-2C:5500-5700MHz U-NII-3:5745-5825MHz
Antenna Type:	PCB Antenna
Antenna Gain:	ANT1: 2.94 dBi, ANT2: 2.99 dBi
Function	☒ SISO ☒ 2x2 MIMO ☐ 3x3 MIMO ☐ 4x4MIMO
Power Supply:	Adapter: DC 12V
Test voltage:	DC 12V
Sample Received Date:	Aug. 25, 2025
Sample tested Date:	Sep. 10, 2025 to Sep. 23, 2025

Operation Frequency each of channel

802.11a/802.11n/802.11ac/802.11ax(20MHz)/802.11be(20MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
-	-	-	-	116	5580	165	5825
-	-	-	-	132	5660	-	-
-	-	-	-	136	5680	-	-
-	-	-	-	140	5700	-	-

802.11n/802.11ac/802.11ax(40MHz)/802.11be(40MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
-	-	-	-	134	5670	-	-
-	-	-	-	142	5710	-	-

802.11ac/802.11ax(80MHz)/802.11be(80MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	58	5290	106	5530	155	5775
-	-	-	-	138	5690	-	-

802.11ac/802.11ax(160MHz)/802.11be(160MHz) Frequency/Channel Operations:

U-NII-1&U-NII-2A		U-NII-2C	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
50	5250	114	5570

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test Configuration

EUT Test Software Settings:

Software: QPST.exe

EUT Power Grade: Default

Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

Test Mode:

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(VHT20)	MCS0
802.11ac(VHT40)	MCS0
802.11ac(VHT80)	MCS0
802.11ac(VHT160)	MCS0
802.11ax(VHT20)	MCS0
802.11ax(VHT40)	MCS0
802.11ax(VHT80)	MCS0
802.11ax(VHT160)	MCS0
802.11be(EHT20)	MCS0
802.11be(EHT40)	MCS0
802.11be(EHT80)	MCS0
802.11be(EHT160)	MCS0

3.3 Test Environment

Operating Environment:		
Radiated Spurious Emissions:		
Temperature:	22~25.0 °C	
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
Conducted Emissions:		
Temperature:	22~25.0 °C	
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
RF Conducted:		
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
Temperature:	NT (Normal Temperature)	22~25.0 °C
	LT (Low Temperature)	0 °C
	HT (High Temperature)	55.0 °C
Working Voltage of the EUT:	NV (Normal Voltage)	12 V
	LV (Low Voltage)	10.8 V
	HV (High Voltage)	13.2 V

3.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Dell	P77F	FCC&CE	CTI

3.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164, Test Firm Registration No.: 260439

3.6 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-05-2024	12-04-2025
Signal Generator	Keysight	N5182B	MY53051549	11-30-2024	11-29-2025
DC Power	Keysight	E3642A	MY56376072	11-30-2024	11-29-2025
Communication test set	R&S	CMW500	169004	03-03-2025	03-02-2026
RF control unit(power unit)	JS Tonscend	JS0806-2	24I80620925	07-21-2025	07-20-2026
Wi-Fi 7GHz Band Extender	JS Tonscend	TS-WF7U2	2206200002	05-12-2025	05-11-2026
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-30-2024	11-29-2025
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-26-2025	05-25-2026
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	V3.3.20	---	---
Spectrum Analyzer	R&S	FSV3044	101509	02-14-2025	02-13-2026

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-08-2025	04-07-2026
Temperature/ Humidity Indicator	Defu	TH128	/	03-31-2025	03-30-2026
LISN	R&S	ENV216	100098	09-19-2024 09-13-2025	09-18-2025 09-12-2026
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-07-2025	06-06-2026
ISN	TESEQ	ISN T800	30297	12-05-2024	12-04-2025

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESC17	100938-003	09/07/2024 09/03/2025	09/06/2025 09/02/2026
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/14/2025	05/13/2026
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/07/2025	04/06/2026
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/05/2024	12/04/2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/07/2025	04/06/2026
Preamplifier	Agilent	11909A	12-1	03/03/2025	03/02/2026
Preamplifier	CD	PAP-1840-60	6041.6042	05/26/2025	05/25/2026
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	01/13/2024	01/12/2027
Cable line	Fulai(6M)	SF106	5220/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5216/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5217/6A	01/13/2024	01/12/2027


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-04-2025	01-03-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-14-2025	01-13-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-14-2025	01-13-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-12-2025	04-11-2026
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-12-2025	04-11-2026
Horn Antenna	ETS-LINDGREN	3117	57407	06-29-2025	06-28-2026
Preamplifier	EMCI	EMC001330	980563	03-03-2025	03-02-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-07-2025	07-06-2026
Preamplifier	Tonscend	EMC051845SE	980380	12-05-2024	12-04-2025
Communication test set	R&S	CMW500	102898	01-04-2025	01-03-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-31-2025	03-30-2026
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2024	01-08-2027
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2024	01-08-2027
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2024	01-08-2027

5 Radio Technical Requirements Specification

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203																				
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.																					
EUT Antenna:	Please see Internal photos																				
The antenna is PCB antenna. The best case gain of the antenna1 is 2.94dBi, The best case gain of the antenna2 is 2.99dBi. FCC KDB 662911 D01 Multiple Transmitter Output v02r01 Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi ☐ (1) If transmit signals are correlated, then Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.] ☒ (2) If all transmit signals are completely uncorrelated, then Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi <table border="1"> <thead> <tr> <th></th> <th>Ant.1</th> <th>Ant.1</th> <th>DG</th> </tr> </thead> <tbody> <tr> <td>U-NII-1</td> <td>2.94</td> <td>2.99</td> <td>2.97</td> </tr> <tr> <td>U-NII-2A</td> <td>2.94</td> <td>2.99</td> <td>2.97</td> </tr> <tr> <td>U-NII-2C</td> <td>2.94</td> <td>2.99</td> <td>2.97</td> </tr> <tr> <td>U-NII-3</td> <td>2.94</td> <td>2.99</td> <td>2.97</td> </tr> </tbody> </table>			Ant.1	Ant.1	DG	U-NII-1	2.94	2.99	2.97	U-NII-2A	2.94	2.99	2.97	U-NII-2C	2.94	2.99	2.97	U-NII-3	2.94	2.99	2.97
	Ant.1	Ant.1	DG																		
U-NII-1	2.94	2.99	2.97																		
U-NII-2A	2.94	2.99	2.97																		
U-NII-2C	2.94	2.99	2.97																		
U-NII-3	2.94	2.99	2.97																		


AC Power Line Conducted Emissions

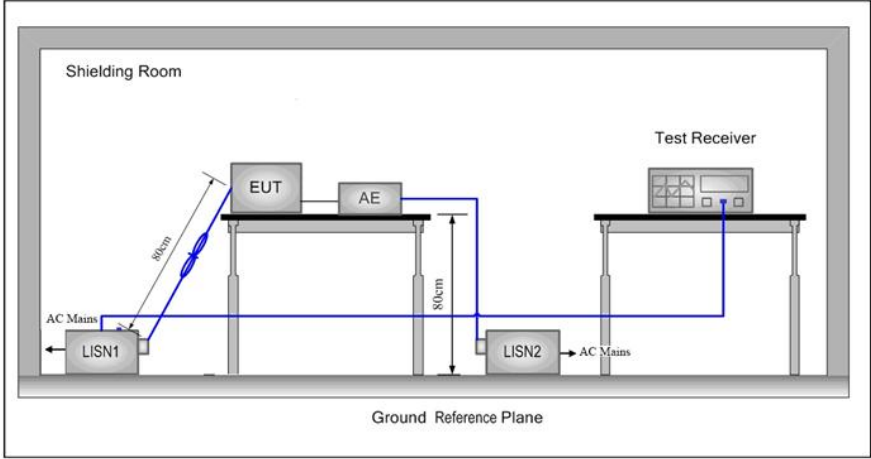Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2020		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.		

Test Mode:	All modes were tested, only the worst case was recorded in the report.
Test Results:	Pass

Measurement Data

Live line:

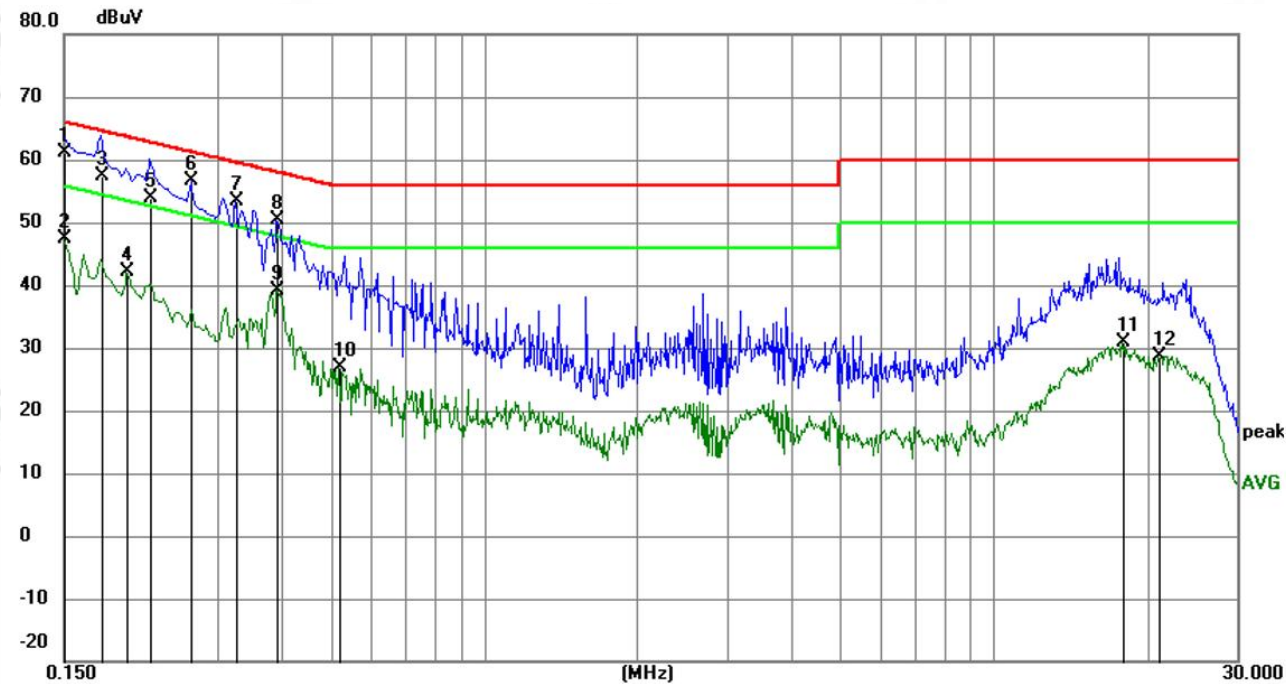


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	50.92	10.28	61.20	66.00	-4.80	QP	
2		0.1500	37.12	10.28	47.40	56.00	-8.60	AVG	
3		0.1770	47.16	10.24	57.40	64.63	-7.23	QP	
4		0.1995	31.81	10.21	42.02	53.63	-11.61	AVG	
5		0.2220	43.81	10.19	54.00	62.74	-8.74	QP	
6	*	0.2670	46.47	10.16	56.63	61.21	-4.58	QP	
7		0.3255	43.35	10.12	53.47	59.57	-6.10	QP	
8		0.3930	40.35	10.09	50.44	58.00	-7.56	QP	
9		0.3930	29.03	10.09	39.12	48.00	-8.88	AVG	
10		0.5190	16.72	10.08	26.80	46.00	-19.20	AVG	
11		17.8890	20.97	9.83	30.80	50.00	-19.20	AVG	
12		21.0615	18.89	9.80	28.69	50.00	-21.31	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

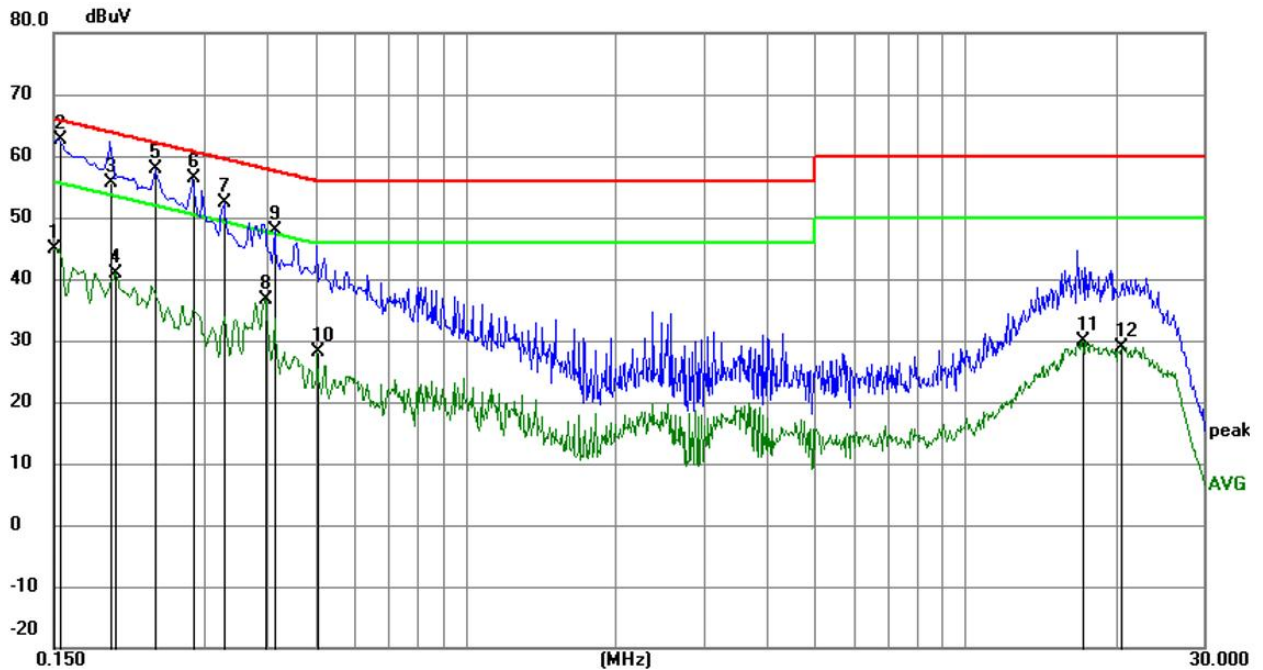


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	34.68	10.28	44.96	56.00	-11.04	AVG	
2	*	0.1545	52.40	10.28	62.68	65.75	-3.07	QP	
3		0.1949	45.48	10.22	55.70	63.83	-8.13	QP	
4		0.1995	30.65	10.21	40.86	53.63	-12.77	AVG	
5		0.2400	47.62	10.18	57.80	62.10	-4.30	QP	
6		0.2850	46.14	10.14	56.28	60.67	-4.39	QP	
7		0.3300	42.33	10.12	52.45	59.45	-7.00	QP	
8		0.3975	26.62	10.09	36.71	47.91	-11.20	AVG	
9		0.4155	37.88	10.09	47.97	57.54	-9.57	QP	
10		0.5055	18.02	10.08	28.10	46.00	-17.90	AVG	
11		17.1915	20.03	9.83	29.86	50.00	-20.14	AVG	
12		20.5170	19.08	9.80	28.88	50.00	-21.12	AVG	

Remark:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.2 Maximum Conducted Output Power

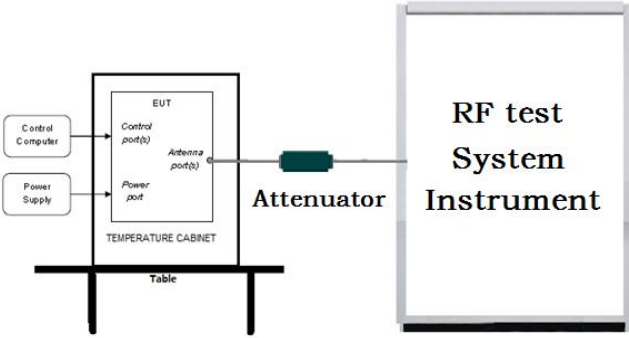
Test Requirement:	47 CFR Part 15C Section 15.407 (a)													
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E													
Test Setup:														
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report. 5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01. Method (a): Measure and sum the spectra across the outputs. The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.													
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th><th>Limit</th></tr> </thead> <tbody> <tr> <td rowspan="2">5150-5250</td><td>≤1W(30dBm) for master device</td></tr> <tr> <td>≤250mW(24dBm) for client device</td></tr> <tr> <td>5250-5350</td><td>≤250mW(24dBm) for client device or 11dBm+10logB*</td></tr> <tr> <td>5470-5725</td><td>≤250mW(24dBm) for client device or 11dBm+10logB*</td></tr> <tr> <td>5725-5850</td><td>≤1W(30dBm)</td></tr> <tr> <td>Remark:</td><td>* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</td></tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	≤1W(30dBm) for master device	≤250mW(24dBm) for client device	5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*	5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*	5725-5850	≤1W(30dBm)	Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.
Frequency band (MHz)	Limit													
5150-5250	≤1W(30dBm) for master device													
	≤250mW(24dBm) for client device													
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*													
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*													
5725-5850	≤1W(30dBm)													
Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.													
Test Mode:	Transmitting mode with modulation													

Test Results:	Refer to Appendix A
---------------	---------------------


5.3 Emission Bandwidth

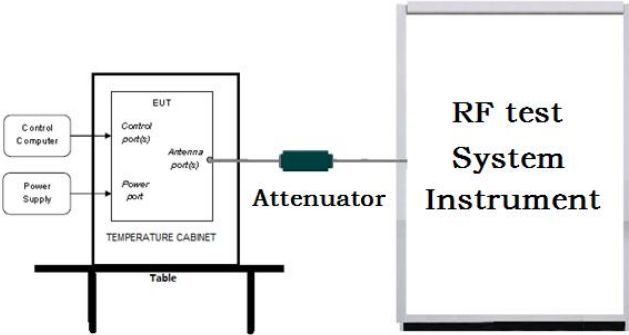Test Requirement:	47 CFR Part 15C Section 15.407 (e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW. 4. Measure and record the results in the test report.
Limit:	≥ 500 kHz
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A


5.4 26dB Emission Bandwidth and 99% Occupied Bandwidth

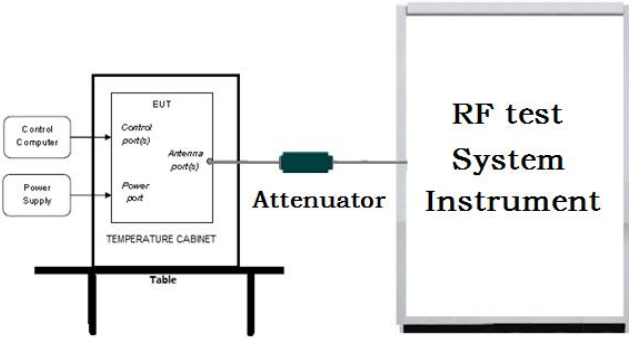Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Limit:	No restriction limits
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

5.5 Maximum Power Spectral Density

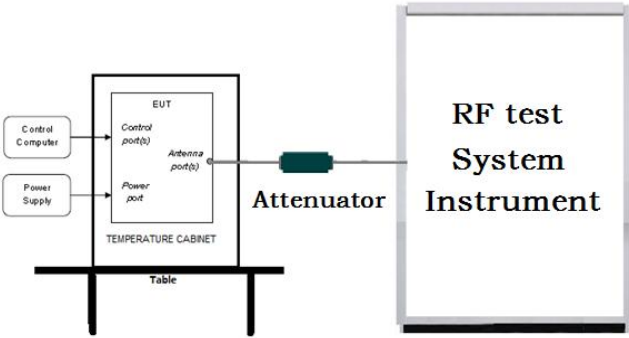Test Requirement:	47 CFR Part 15C Section 15.407 (a)													
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F													
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.													
Test Procedure:	- Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. - Allow the sweeps to continue until the trace stabilizes. - Use the peak marker function to determine the maximum amplitude level. - For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01. Method (a): Measure and sum the spectra across the outputs. The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.													
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th><th>Limit</th></tr> </thead> <tbody> <tr> <td rowspan="2">5150-5250</td><td>$\leq 17\text{dBm}$ in 1MHz for master device</td></tr> <tr> <td>$\leq 11\text{dBm}$ in 1MHz for client device</td></tr> <tr> <td>5250-5350</td><td>$\leq 11\text{dBm}$ in 1MHz for client device</td></tr> <tr> <td>5470-5725</td><td>$\leq 11\text{dBm}$ in 1MHz for client device</td></tr> <tr> <td>5725-5850</td><td>$\leq 30\text{dBm}$ in 500kHz</td></tr> <tr> <td>Remark:</td><td>The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.</td></tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device	$\leq 11\text{dBm}$ in 1MHz for client device	5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device	5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device	5725-5850	$\leq 30\text{dBm}$ in 500kHz	Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.
Frequency band (MHz)	Limit													
5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device													
	$\leq 11\text{dBm}$ in 1MHz for client device													
5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device													
5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device													
5725-5850	$\leq 30\text{dBm}$ in 500kHz													
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.													
Test Mode:	Transmitting mode with modulation													
Test Results:	Refer to Appendix A													

5.6 Frequency Stability

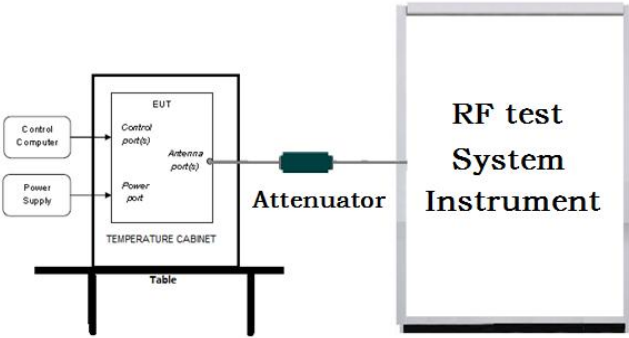Test Requirement:	47 CFR Part 15C Section 15.407 (g)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	1.The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. 2. Turn the EUT on and couple its output to a spectrum analyzer. 3. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. 4. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. 5. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

5.7 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed				

	the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. Note: (i) $EIRP = ((E*d)^2) / 30$ where: • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts. (ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$ (iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$
Test Setup:	

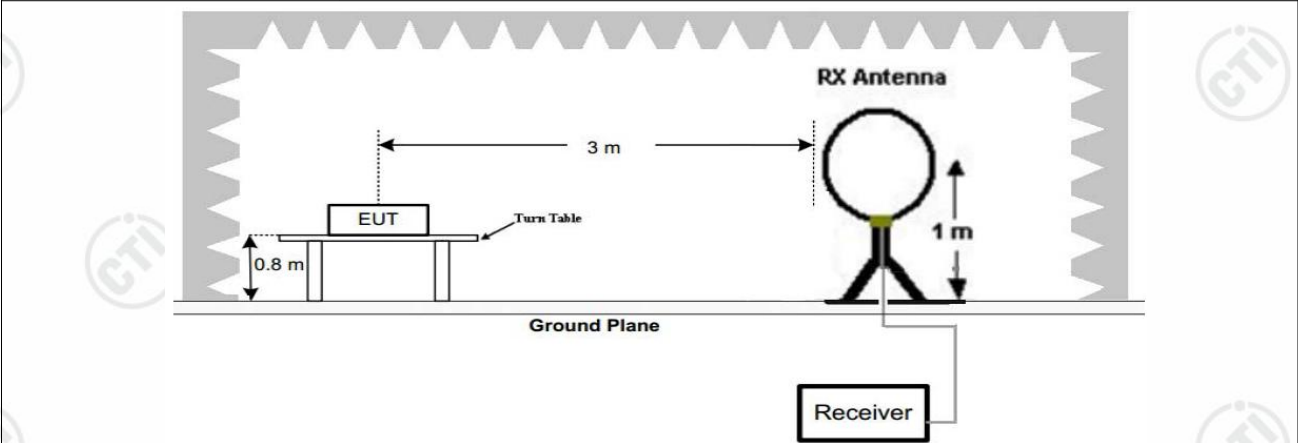


Figure 1. Below 30MHz

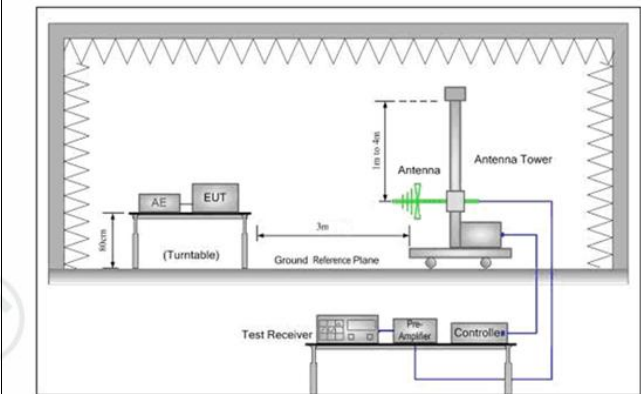


Figure 2. 30MHz to 1GHz

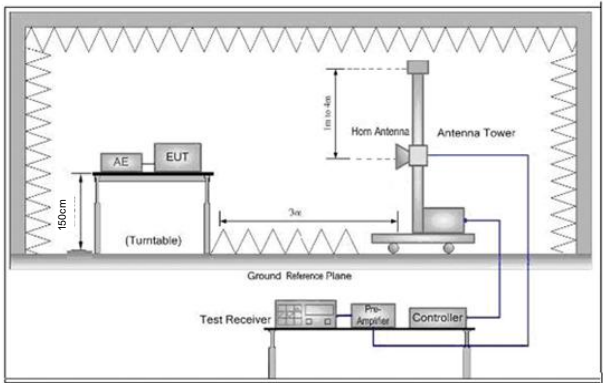


Figure 3. Above 1 GHz

Test Procedure:	a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz:
-----------------	--


	Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel and the highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case (Band1) middle channel of 6Mbps for 802.11a was recorded in the report.


Test Graph

Horizontal:

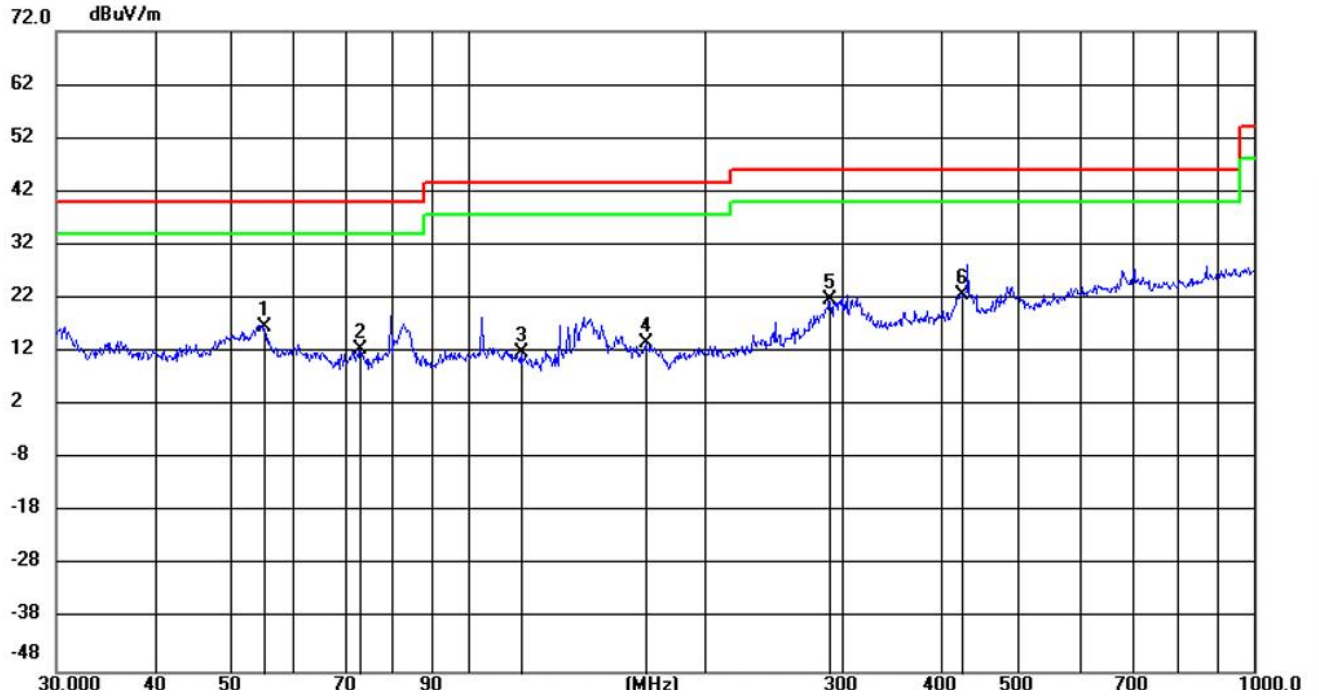

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	55.1143	2.59	14.07	16.66	40.00	-23.34	QP	100	47	
2		73.0256	1.75	10.65	12.40	40.00	-27.60	QP	100	65	
3		117.2779	-0.29	12.23	11.94	43.50	-31.56	QP	199	243	
4		168.4433	2.80	10.98	13.78	43.50	-29.72	QP	199	157	
5		288.9007	5.90	15.86	21.76	46.00	-24.24	QP	100	124	
6		425.5500	2.85	19.71	22.56	46.00	-23.44	QP	199	353	

Vertical:

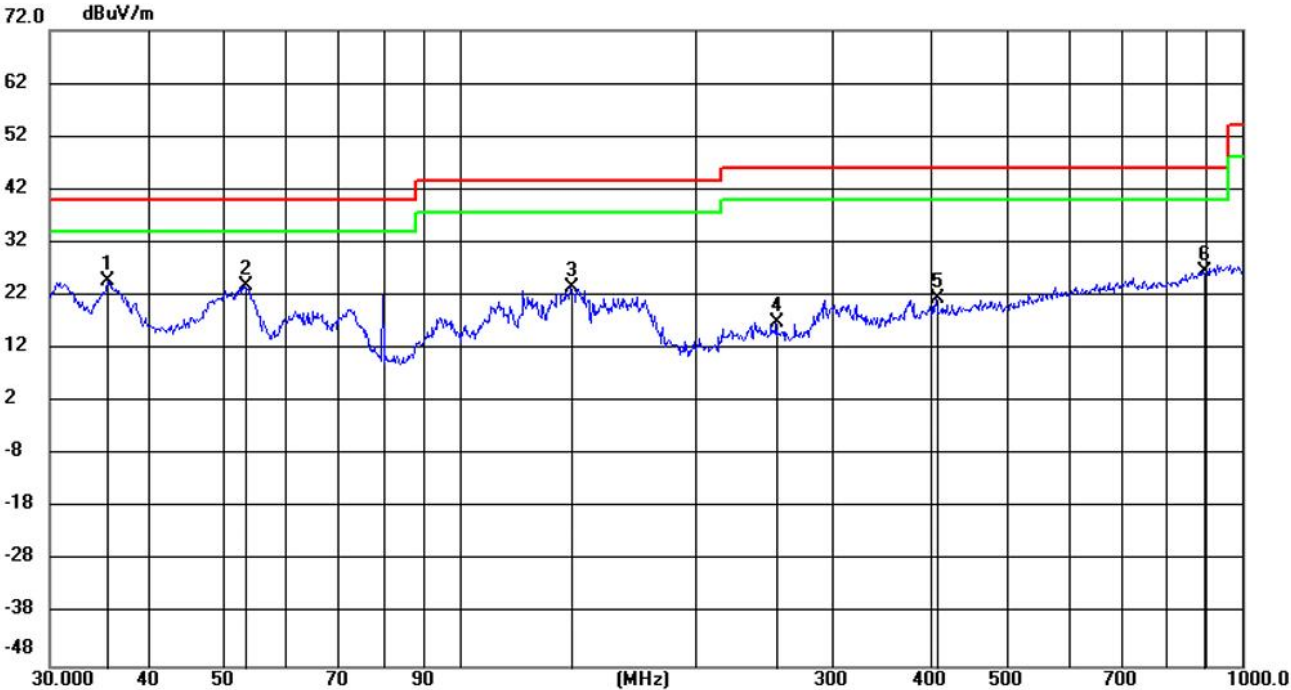

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	35.5678	11.75	12.88	24.63	40.00	-15.37	peak	100	153
2		53.1686	9.53	14.29	23.82	40.00	-16.18	peak	100	31
3		138.9222	13.27	10.42	23.69	43.50	-19.81	peak	100	135
4		254.6837	2.27	14.78	17.05	46.00	-28.95	peak	200	258
5		406.9433	1.91	19.56	21.47	46.00	-24.53	peak	100	83
6		893.8567	-0.25	26.81	26.56	46.00	-19.44	peak	100	353

Transmitter Emission above 1GHz

Remark: During the test, the Radiates Emission from 1GHz to 40GHz was performed in all modes,,
for 20MHz Occupied Bandwidth, 802.11 n(HT20) mode was the worst case;
for 40MHz Occupied Bandwidth, 802.11 n(HT40) mode was the worst case;
for 80MHz Occupied Bandwidth, 802.11 ac(VHT80) mode was the worst case;
for 160MHz Occupied Bandwidth, 802.11 be(HE160) mode was the worst case;
only the worst case (Band1 MIMO) was in the report.

Mode:			802.11 n(HT20) Transmitting			Channel:		5180MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1594.4638	13.88	35.10	48.98	74.00	25.02	PASS	Horizontal	PK
2	2478.6791	16.67	35.55	52.22	74.00	21.78	PASS	Horizontal	PK
3	3601.3841	19.79	33.73	53.52	74.00	20.48	PASS	Horizontal	PK
4	6969.2235	-3.02	48.77	45.75	74.00	28.25	PASS	Horizontal	PK
5	10632.1566	2.40	45.28	47.68	74.00	26.32	PASS	Horizontal	PK
6	15442.8471	9.86	42.82	52.68	74.00	21.32	PASS	Horizontal	PK
7	1484.0194	13.36	34.95	48.31	74.00	25.69	PASS	Vertical	PK
8	2334.1334	15.93	35.11	51.04	74.00	22.96	PASS	Vertical	PK
9	3597.8639	19.81	33.07	52.88	74.00	21.12	PASS	Vertical	PK
10	6974.3987	-3.09	49.12	46.03	74.00	27.97	PASS	Vertical	PK
11	9555.1278	0.84	50.73	51.57	74.00	22.43	PASS	Vertical	PK
12	15410.0705	10.19	41.35	51.54	74.00	22.46	PASS	Vertical	PK

Above 18GHz:

Mode:			802.11 n(HT20) Transmitting			Channel:		5180MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20059.9624	-24.89	61.08	36.19	74.00	37.81	PASS	Horizontal	PK
2	24354.6942	-21.90	57.60	35.70	74.00	38.30	PASS	Horizontal	PK
3	27869.2348	-21.11	57.53	36.42	74.00	37.58	PASS	Horizontal	PK
4	31467.4987	-19.69	55.11	35.42	74.00	38.58	PASS	Horizontal	PK
5	35337.1735	-16.03	52.07	36.04	74.00	37.96	PASS	Horizontal	PK
6	38497.4999	-13.76	48.60	34.84	74.00	39.16	PASS	Horizontal	PK
7	20129.8852	-25.20	61.06	35.86	74.00	38.14	PASS	Vertical	PK
8	21811.7125	-25.55	61.00	35.45	74.00	38.55	PASS	Vertical	PK
9	24592.9837	-21.86	57.08	35.22	74.00	38.78	PASS	Vertical	PK
10	27860.0344	-21.10	58.38	37.28	74.00	36.72	PASS	Vertical	PK
11	31828.1531	-19.99	55.93	35.94	74.00	38.06	PASS	Vertical	PK
12	36507.4603	-16.20	51.49	35.29	74.00	38.71	PASS	Vertical	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		5230MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1523.6209	13.52	34.56	48.08	74.00	25.92	PASS	Horizontal	PK
2	2183.6473	15.54	34.44	49.98	74.00	24.02	PASS	Horizontal	PK
3	3599.184	19.81	33.11	52.92	74.00	21.08	PASS	Horizontal	PK
4	6901.3701	-3.37	49.38	46.01	74.00	27.99	PASS	Horizontal	PK
5	9664.3832	1.16	47.30	48.46	74.00	25.54	PASS	Horizontal	PK
6	14866.6683	9.66	41.61	51.27	74.00	22.73	PASS	Horizontal	PK
7	1553.1021	13.64	34.84	48.48	74.00	25.52	PASS	Vertical	PK
8	2504.8602	16.70	34.48	51.18	74.00	22.82	PASS	Vertical	PK
9	3699.068	20.16	33.02	53.18	74.00	20.82	PASS	Vertical	PK
10	6762.2131	-3.42	49.01	45.59	74.00	28.41	PASS	Vertical	PK
11	10246.8873	1.92	45.87	47.79	74.00	26.21	PASS	Vertical	PK
12	15401.4451	10.27	42.05	52.32	74.00	21.68	PASS	Vertical	PK

Above 18GHz:

Mode:			802.11 n(HT40) Transmitting			Channel:		5230MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19909.0764	-24.90	61.53	36.63	74.00	37.37	PASS	Horizontal	PK
2	23514.7006	-23.27	60.02	36.75	74.00	37.25	PASS	Horizontal	PK
3	27388.0555	-21.65	58.80	37.15	74.00	36.85	PASS	Horizontal	PK
4	31129.8452	-19.78	55.67	35.89	74.00	38.11	PASS	Horizontal	PK
5	34544.1018	-16.40	51.88	35.48	74.00	38.52	PASS	Horizontal	PK
6	38073.3629	-14.69	48.81	34.12	74.00	39.88	PASS	Horizontal	PK
7	20120.6848	-25.16	61.28	36.12	74.00	37.88	PASS	Vertical	PK
8	22610.3044	-25.00	60.82	35.82	74.00	38.18	PASS	Vertical	PK
9	25281.1712	-21.20	57.17	35.97	74.00	38.03	PASS	Vertical	PK
10	28897.8359	-21.40	57.70	36.30	74.00	37.70	PASS	Vertical	PK
11	33490.6596	-17.77	53.95	36.18	74.00	37.82	PASS	Vertical	PK
12	37145.0458	-16.51	50.40	33.89	74.00	40.11	PASS	Vertical	PK

Mode:			802.11 ac(VHT80) Transmitting			Channel:		5210MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1625.045	13.87	34.51	48.38	74.00	25.62	PASS	Horizontal	PK
2	2439.2976	16.45	34.68	51.13	74.00	22.87	PASS	Horizontal	PK
3	3599.844	19.81	33.50	53.31	74.00	20.69	PASS	Horizontal	PK
4	6965.7733	-2.98	48.78	45.80	74.00	28.20	PASS	Horizontal	PK
5	10674.1337	2.59	44.86	47.45	74.00	26.55	PASS	Horizontal	PK
6	15889.0695	10.04	42.61	52.65	74.00	21.35	PASS	Horizontal	PK
7	1694.7878	14.13	34.53	48.66	74.00	25.34	PASS	Vertical	PK
8	2538.3015	16.71	35.12	51.83	74.00	22.17	PASS	Vertical	PK
9	3771.0108	20.79	32.20	52.99	74.00	21.01	PASS	Vertical	PK
10	7141.1571	-3.05	47.84	44.79	74.00	29.21	PASS	Vertical	PK
11	10139.357	1.77	45.97	47.74	74.00	26.26	PASS	Vertical	PK
12	14378.4689	9.09	42.64	51.73	74.00	22.27	PASS	Vertical	PK

Above 18GHz:

Mode:			802.11 ac(VHT80) Transmitting			Channel:		5210MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20095.8438	-25.05	61.09	36.04	74.00	37.96	PASS	Horizontal	PK
2	22851.3541	-25.21	60.26	35.05	74.00	38.95	PASS	Horizontal	PK
3	24888.3155	-22.04	57.40	35.36	74.00	38.64	PASS	Horizontal	PK
4	27882.1153	-21.12	58.83	37.71	74.00	36.29	PASS	Horizontal	PK
5	30870.3948	-19.53	56.04	36.51	74.00	37.49	PASS	Horizontal	PK
6	34562.5025	-16.30	51.55	35.25	74.00	38.75	PASS	Horizontal	PK
7	20099.524	-25.06	60.97	35.91	74.00	38.09	PASS	Vertical	PK
8	23324.253	-23.83	58.89	35.06	74.00	38.94	PASS	Vertical	PK
9	27059.6024	-21.85	59.44	37.59	74.00	36.41	PASS	Vertical	PK
10	29971.5189	-21.06	57.85	36.79	74.00	37.21	PASS	Vertical	PK
11	32937.7175	-18.76	54.25	35.49	74.00	38.51	PASS	Vertical	PK
12	37677.7471	-15.02	49.05	34.03	74.00	39.97	PASS	Vertical	PK

Mode:			802.11 be(EHT160) Transmitting			Channel:		5250MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1433.6373	13.00	34.89	47.89	74.00	26.11	PASS	Horizontal	PK
2	2230.5092	15.68	35.27	50.95	74.00	23.05	PASS	Horizontal	PK
3	3774.091	20.78	32.62	53.40	74.00	20.60	PASS	Horizontal	PK
4	7333.7917	-2.71	48.05	45.34	74.00	28.66	PASS	Horizontal	PK
5	11145.6573	2.24	46.35	48.59	74.00	25.41	PASS	Horizontal	PK
6	15861.4681	9.80	42.48	52.28	74.00	21.72	PASS	Horizontal	PK
7	1440.4576	13.14	36.04	49.18	74.00	24.82	PASS	Vertical	PK
8	2157.2463	15.39	34.96	50.35	74.00	23.65	PASS	Vertical	PK
9	3436.5975	19.42	33.71	53.13	74.00	20.87	PASS	Vertical	PK
10	6938.1719	-2.93	48.40	45.47	74.00	28.53	PASS	Vertical	PK
11	11169.2335	2.44	46.03	48.47	74.00	25.53	PASS	Vertical	PK
12	15894.8197	10.08	42.48	52.56	74.00	21.44	PASS	Vertical	PK

Above 18GHz:

Mode:			802.11 be(EHT160) Transmitting			Channel:		5250MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20067.3227	-24.92	61.60	36.68	74.00	37.32	PASS	Horizontal	PK
2	22852.2741	-25.22	60.07	34.85	74.00	39.15	PASS	Horizontal	PK
3	25300.492	-21.24	57.12	35.88	74.00	38.12	PASS	Horizontal	PK
4	27619.9048	-21.51	58.63	37.12	74.00	36.88	PASS	Horizontal	PK
5	31385.6154	-19.74	54.79	35.05	74.00	38.95	PASS	Horizontal	PK
6	34546.8619	-16.39	51.85	35.46	74.00	38.54	PASS	Horizontal	PK
7	20035.1214	-24.78	61.70	36.92	74.00	37.08	PASS	Vertical	PK
8	23945.2778	-22.04	58.30	36.26	74.00	37.74	PASS	Vertical	PK
9	27193.0077	-21.91	58.23	36.32	74.00	37.68	PASS	Vertical	PK
10	30491.3397	-20.45	56.73	36.28	74.00	37.72	PASS	Vertical	PK
11	34361.0144	-17.24	52.89	35.65	74.00	38.35	PASS	Vertical	PK
12	38045.7618	-14.82	48.94	34.12	74.00	39.88	PASS	Vertical	PK

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.8 Radiated Emission which fall in the restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)				
Test Method:	ANSI C63.10 2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed				

	the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. Note: (i) $EIRP = ((E*d)^2) / 30$ where: • E is the field strength in V/m; • d is the measurement distance in meters; • EIRP is the equivalent isotropically radiated power in watts. (ii) Working in dB units, the above equation is equivalent to: $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$ (iii) Or, if d is 3 meters: $EIRP[dBm] = E[dB\mu V/m] - 95.2$
Test Setup:	

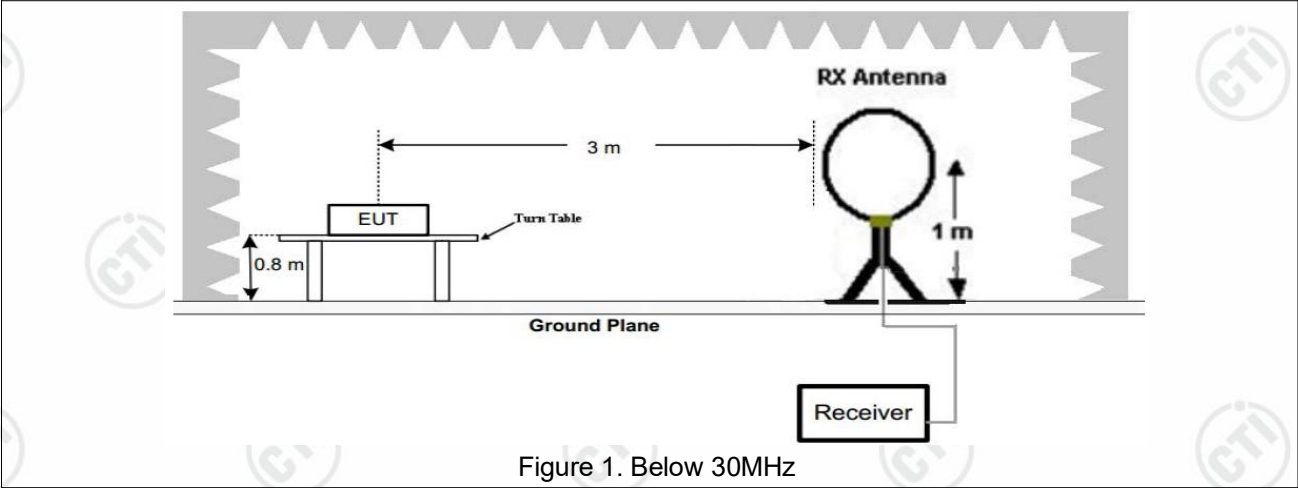


Figure 1. Below 30MHz

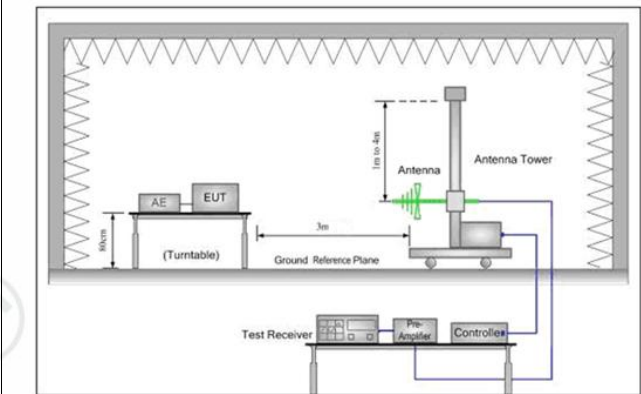


Figure 2. 30MHz to 1GHz

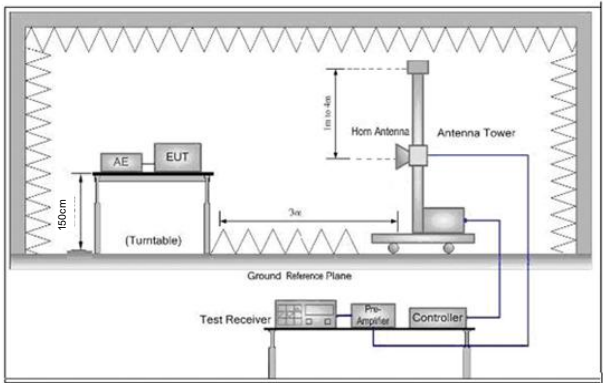


Figure 3. Above 1 GHz


Test Procedure:	j. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz:
-----------------	--

	Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. k. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. l. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. m. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. n. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. o. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. p. Test the EUT in the lowest channel, the Highest channel q. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. r. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Test Data:

Test_Mode	802.11 a Transmitting	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

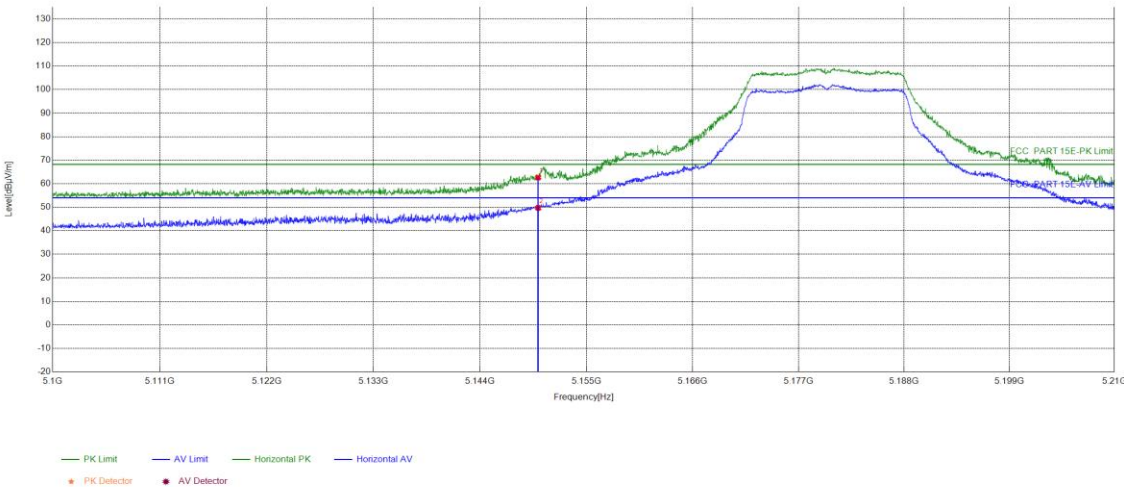

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	38.67	62.65	68.20	5.55	PASS	Horizontal	PK
2	5150	23.98	25.74	49.72	54.00	4.28	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

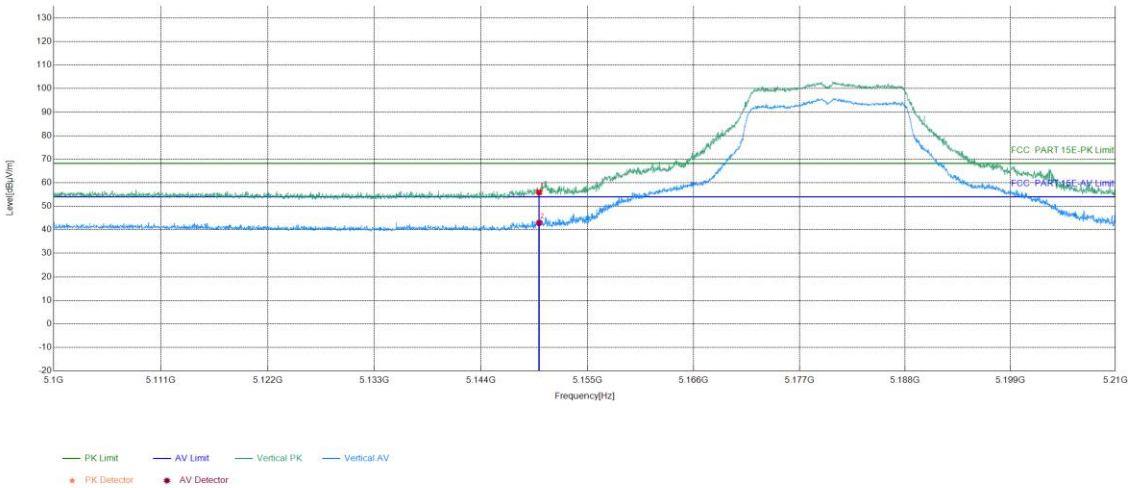

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	31.97	55.95	68.20	12.25	PASS	Vertical	PK
2	5150	23.98	18.94	42.92	54.00	11.08	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

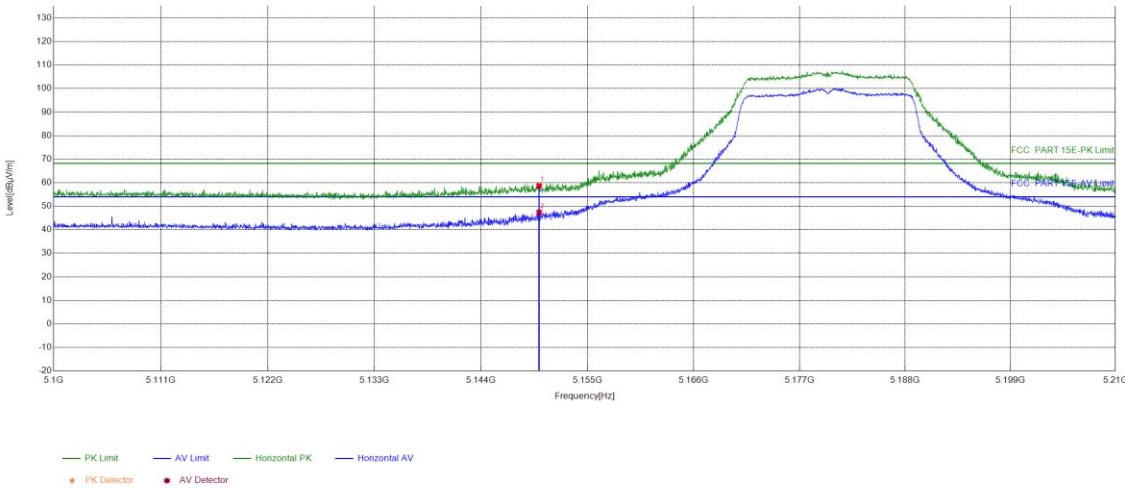

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	34.65	58.63	68.20	9.57	PASS	Horizontal	PK
2	5150	23.98	23.39	47.37	54.00	6.63	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

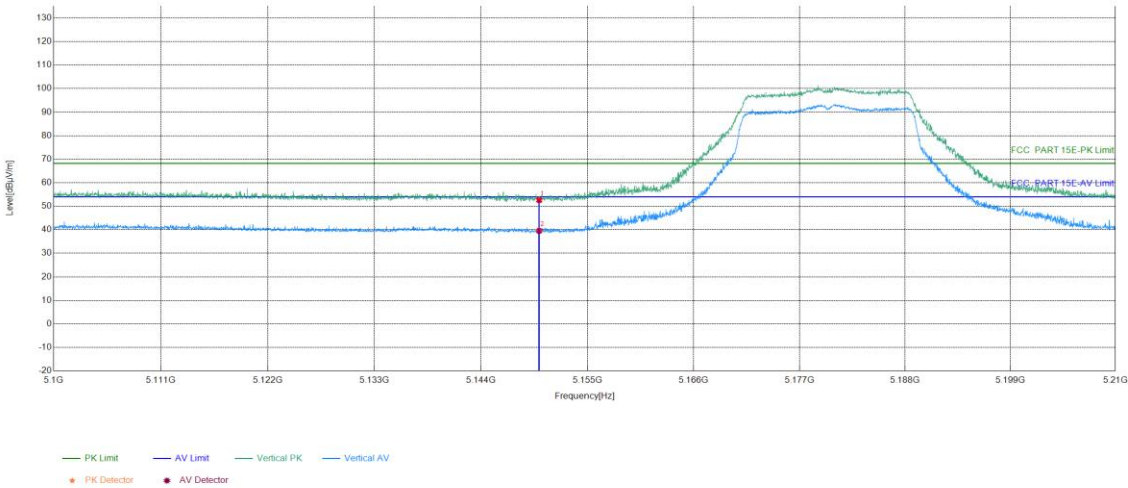

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	28.60	52.58	68.20	15.62	PASS	Vertical	PK
2	5150	23.98	15.54	39.52	54.00	14.48	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

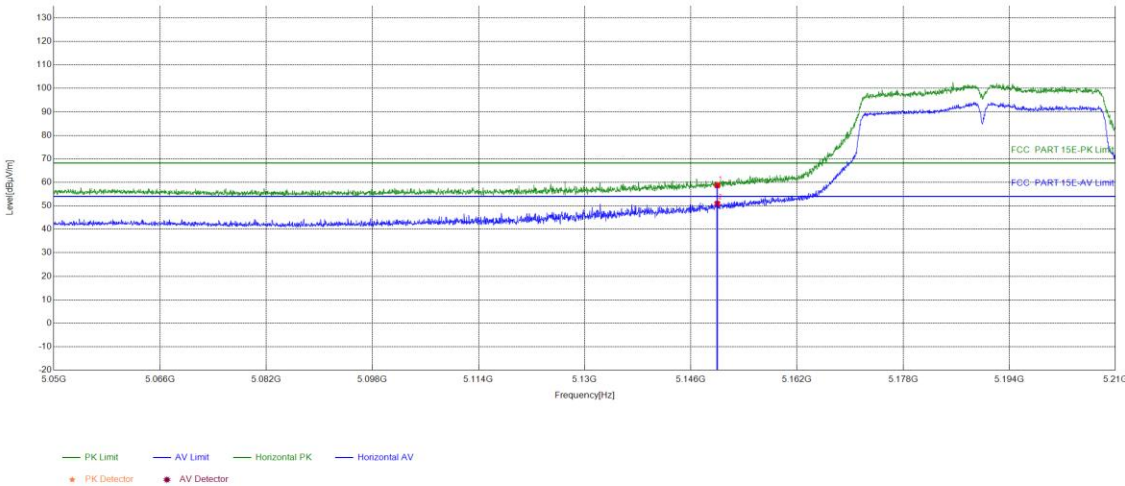

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	34.58	58.66	68.20	9.54	PASS	Horizontal	PK
2	5150	24.08	26.81	50.89	54.00	3.11	PASS	Horizontal	AV

Test Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

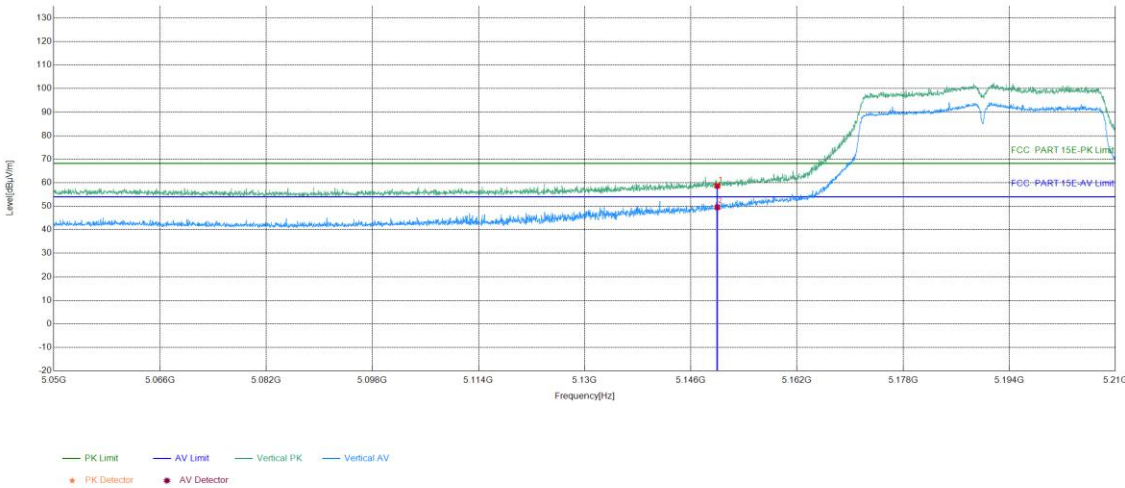

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	34.56	58.64	68.20	9.56	PASS	Vertical	PK
2	5150	24.08	25.46	49.54	54.00	4.46	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT20) Transmitting	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

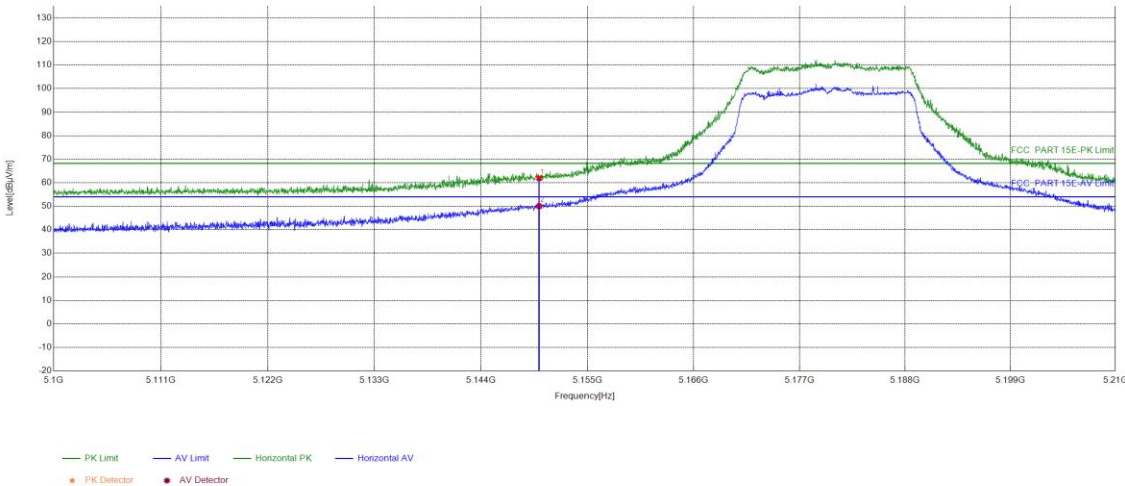

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	37.92	61.90	68.20	6.30	PASS	Horizontal	PK
2	5150	23.98	26.02	50.00	54.00	4.00	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT20) Transmitting	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

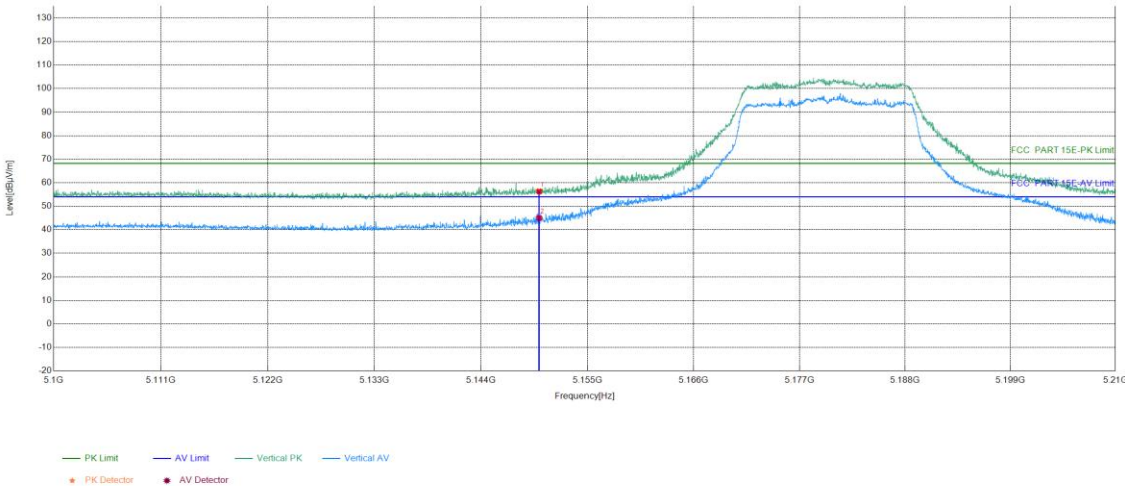

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	32.31	56.29	68.20	11.91	PASS	Vertical	PK
2	5150	23.98	21.00	44.98	54.00	9.02	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT40) Transmitting	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

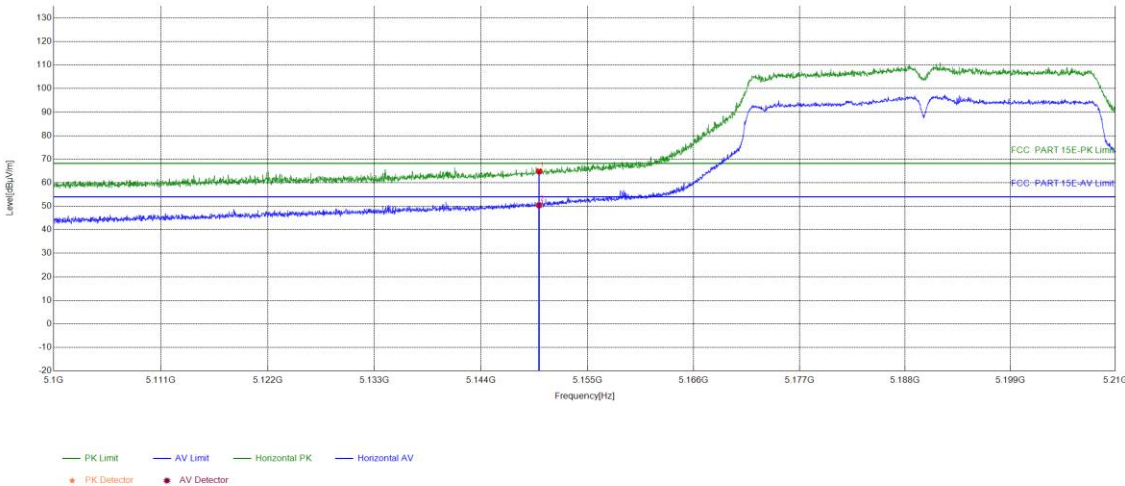

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	40.86	64.84	68.20	3.36	PASS	Horizontal	PK
2	5150	23.98	26.43	50.41	54.00	3.59	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT40) Transmitting	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

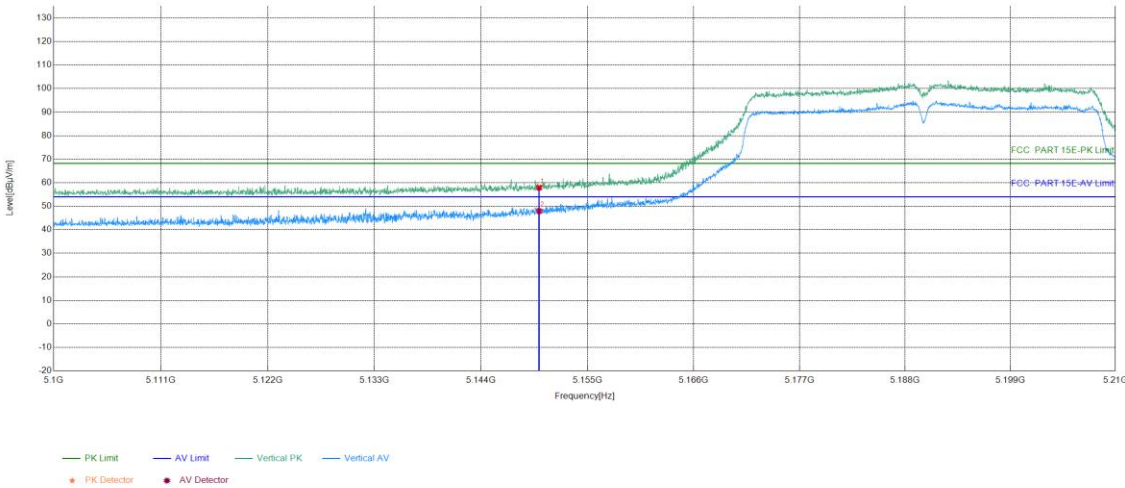

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	33.87	57.85	68.20	10.35	PASS	Vertical	PK
2	5150	23.98	23.93	47.91	54.00	6.09	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

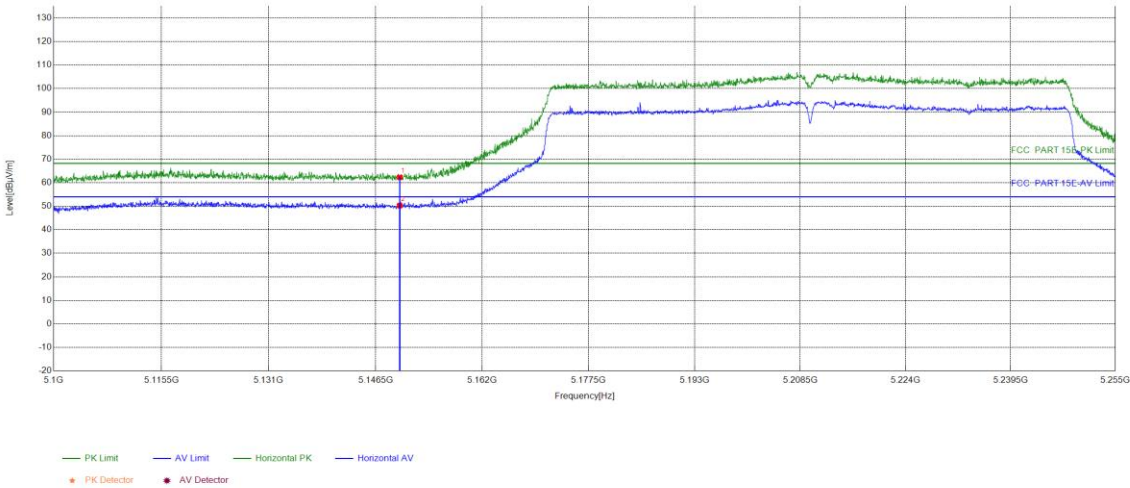

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	38.23	62.31	68.20	5.89	PASS	Horizontal	PK
2	5150	24.08	26.20	50.28	54.00	3.72	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5210Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

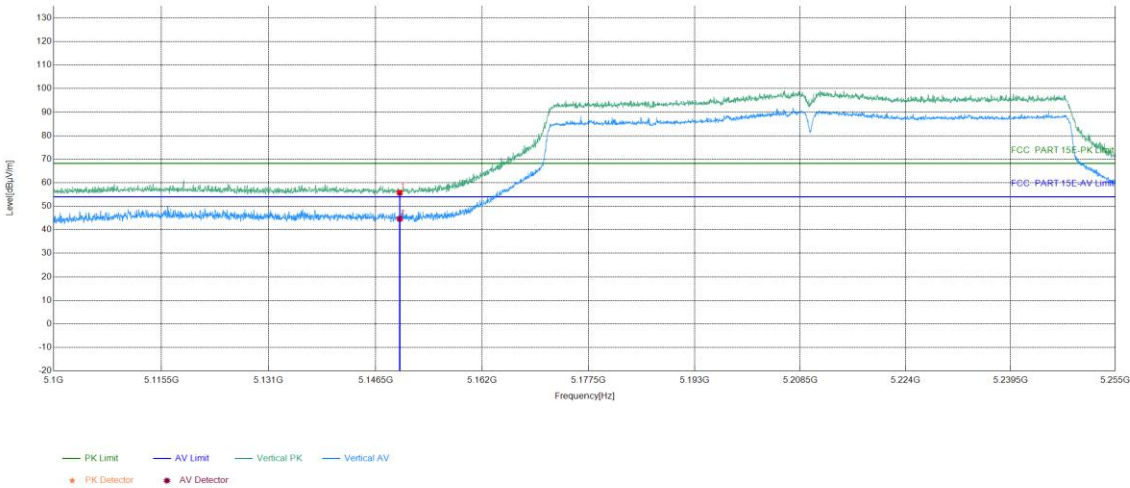

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	31.69	55.77	68.20	12.43	PASS	Vertical	PK
2	5150	24.08	20.59	44.67	54.00	9.33	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT160) Transmitting	Test_Frequency	5250Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

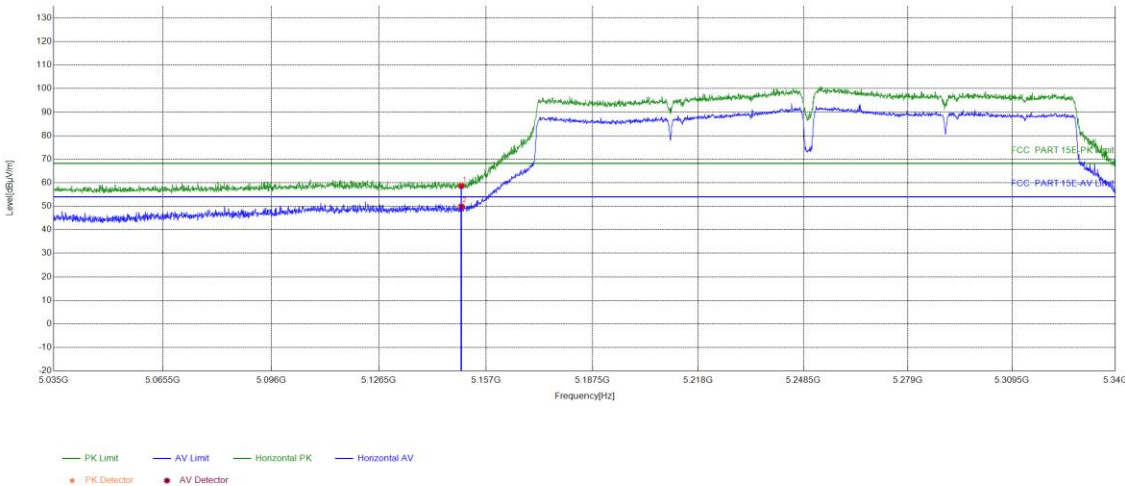

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	34.55	58.63	68.20	9.57	PASS	Horizontal	PK
2	5150	24.08	25.72	49.80	54.00	4.20	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT160) Transmitting	Test_Frequency	5250Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

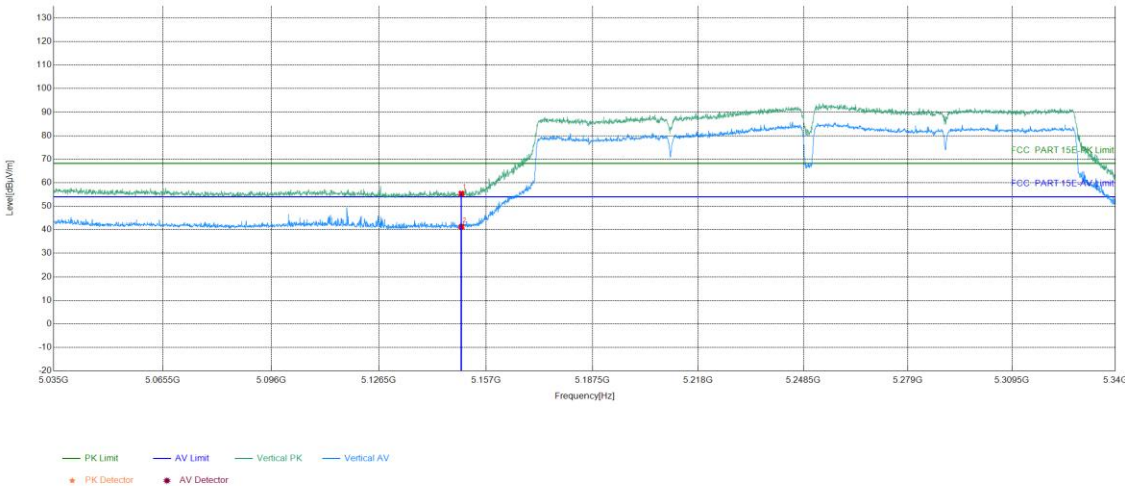

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	31.31	55.39	68.20	12.81	PASS	Vertical	PK
2	5150	24.08	17.16	41.24	54.00	12.76	PASS	Vertical	AV

Test_Mode	802.11ax(HE20)Transmittin	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

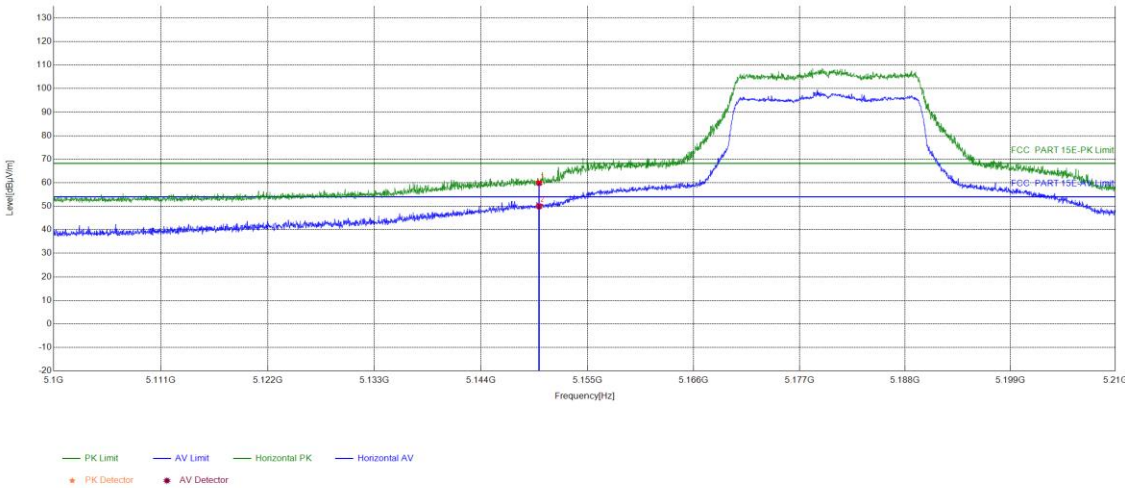

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	35.90	59.88	68.20	8.32	PASS	Horizontal	PK
2	5150	23.98	25.97	49.95	54.00	4.05	PASS	Horizontal	AV

Test_Mode	802.11ax(HE20)Transmittin	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

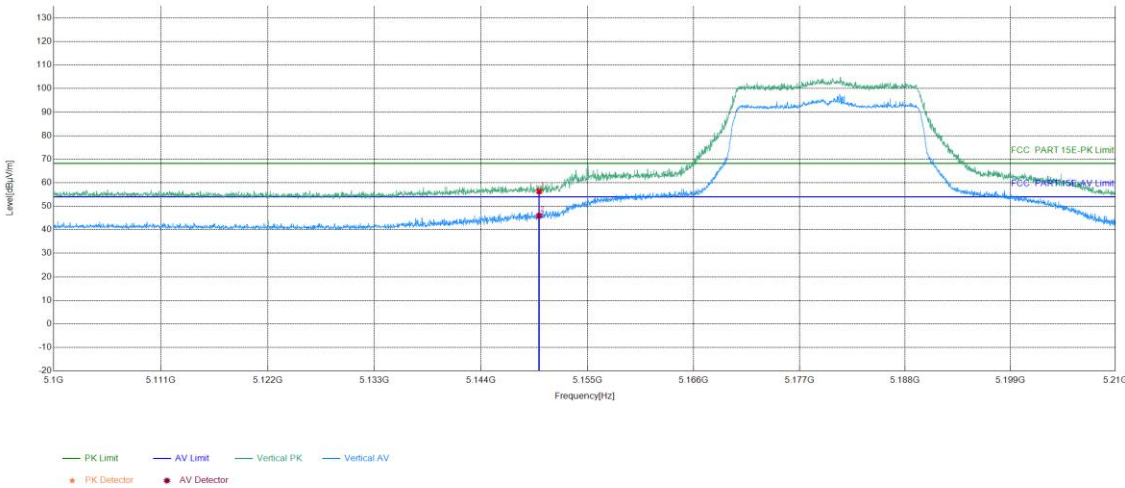

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	32.34	56.32	68.20	11.88	PASS	Vertical	PK
2	5150	23.98	21.97	45.95	54.00	8.05	PASS	Vertical	AV

Test_Mode	802.11ax(HE40)Transmittin	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

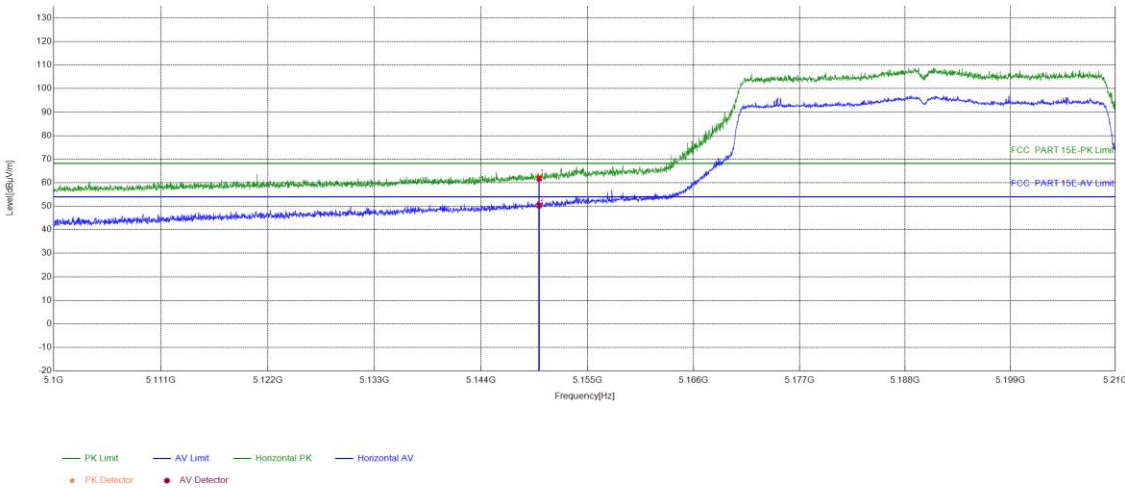

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	37.79	61.77	68.20	6.43	PASS	Horizontal	PK
2	5150	23.98	26.32	50.30	54.00	3.70	PASS	Horizontal	AV

Test_Mode	802.11ax(HE40)Transmittin	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

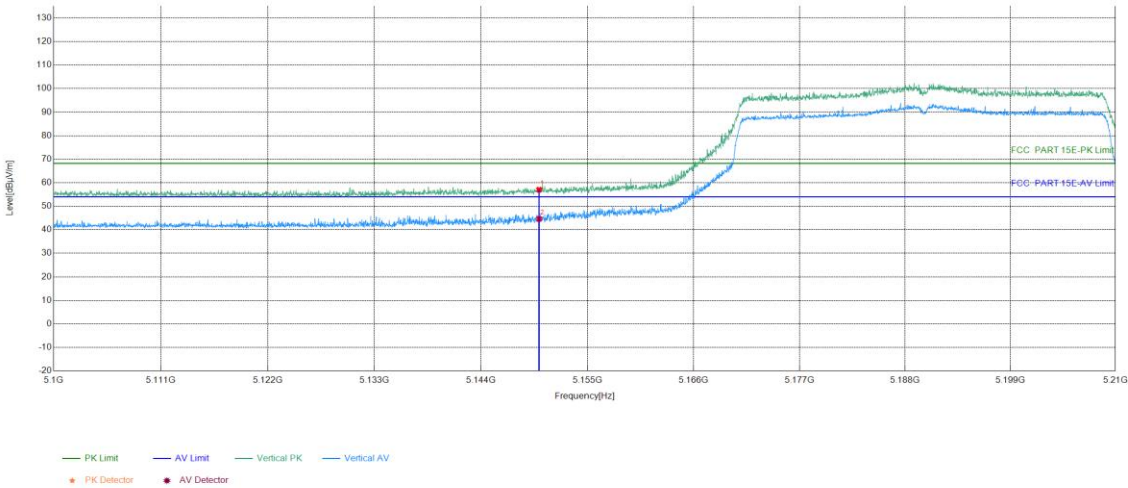

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	33.02	57.00	68.20	11.20	PASS	Vertical	PK
2	5150	23.98	20.63	44.61	54.00	9.39	PASS	Vertical	AV

Test_Mode	802.11ax(HE80)Transmittin	Test_Frequency	5210Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

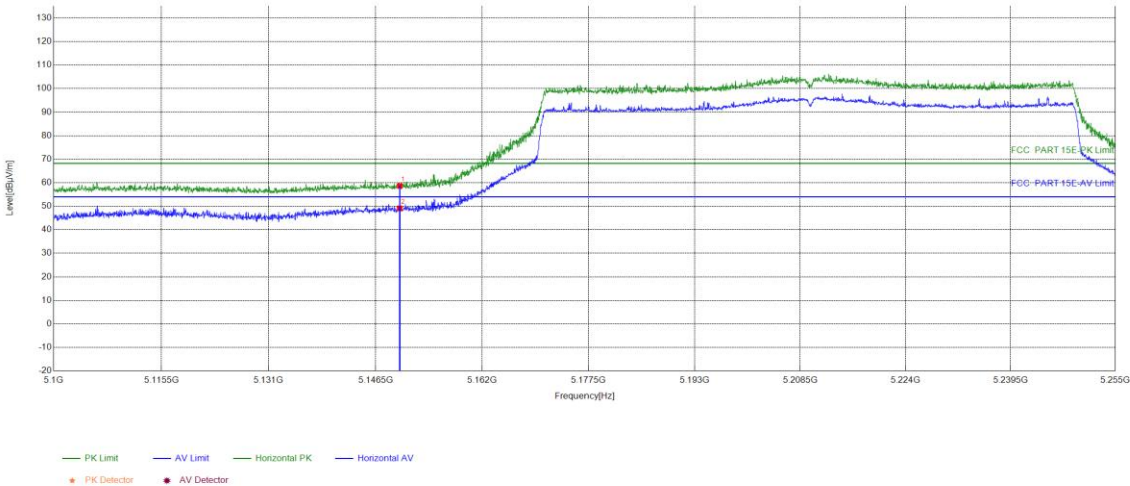

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	34.56	58.64	68.20	9.56	PASS	Horizontal	PK
2	5150	24.08	25.05	49.13	54.00	4.87	PASS	Horizontal	AV

Test_Mode	802.11ax(HE80)Transmittin	Test_Frequency	5210Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

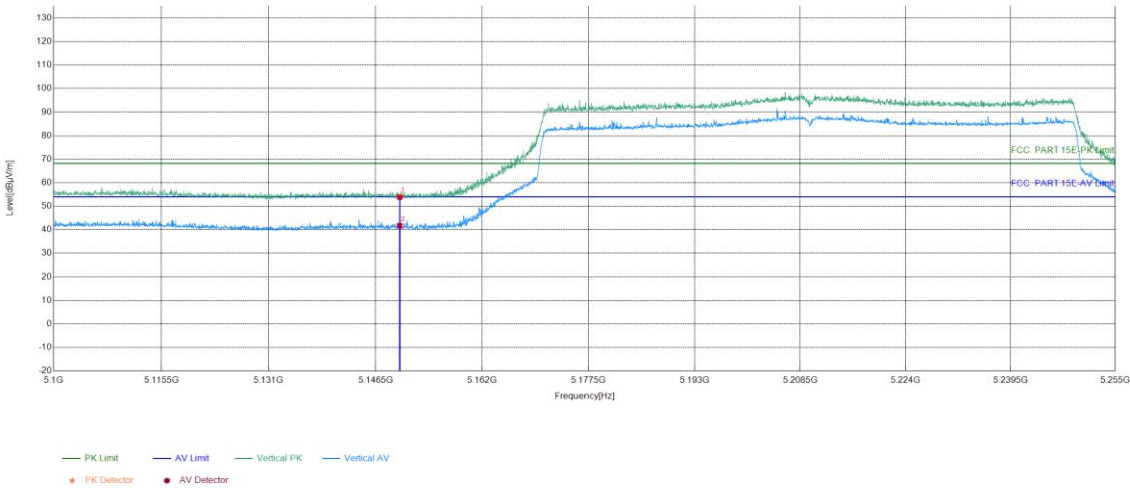

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	29.80	53.88	68.20	14.32	PASS	Vertical	PK
2	5150	24.08	17.62	41.70	54.00	12.30	PASS	Vertical	AV

Test_Mode	802.11ax(HE160)Transmitti	Test_Frequency	5250Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

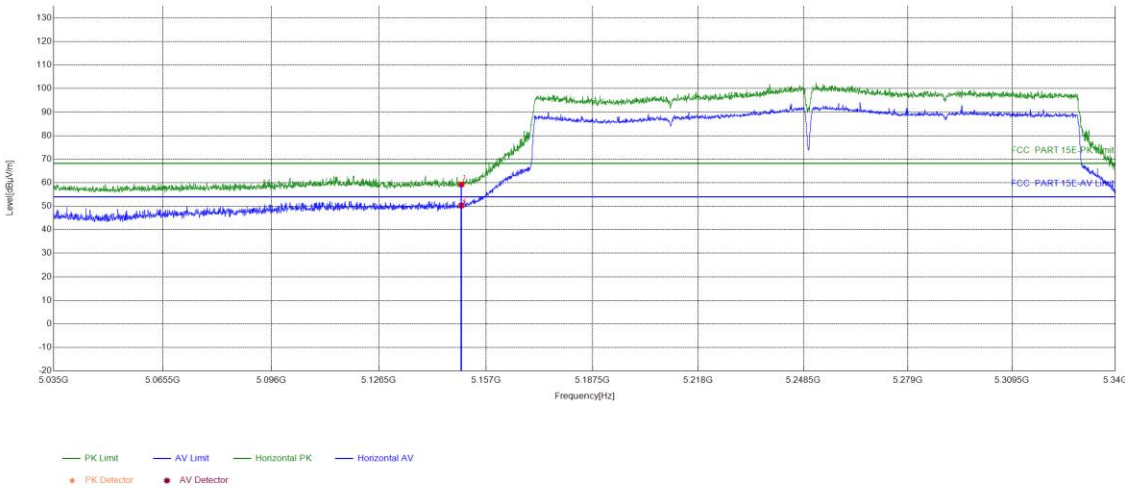

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	35.20	59.28	68.20	8.92	PASS	Horizontal	PK
2	5150	24.08	26.25	50.33	54.00	3.67	PASS	Horizontal	AV

Test_Mode	802.11ax(HE160)Transmitti	Test_Frequency	5250Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

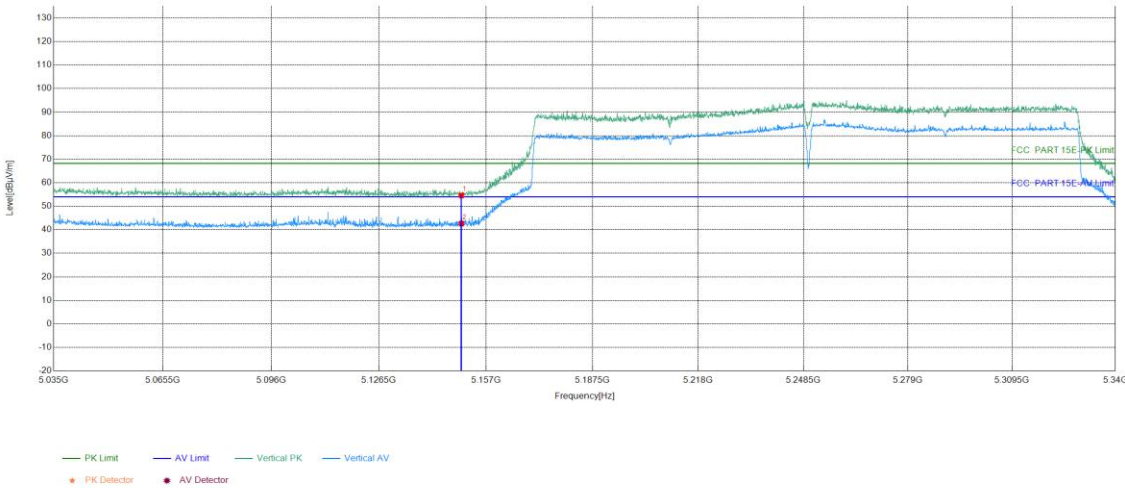

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	30.49	54.57	68.20	13.63	PASS	Vertical	PK
2	5150	24.08	18.58	42.66	54.00	11.34	PASS	Vertical	AV

Test_Mode	802.11 be(EHT20)Transmitti	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

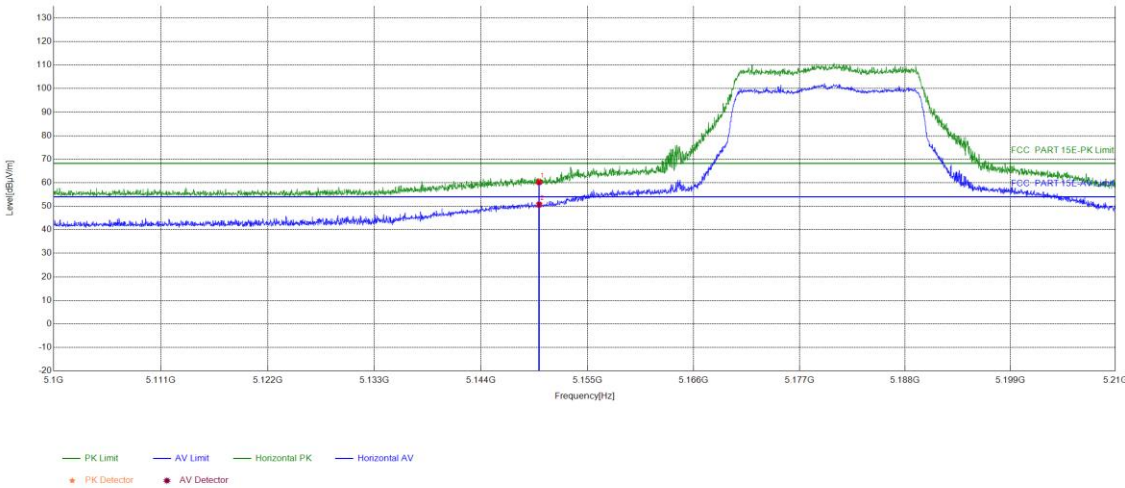

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	36.24	60.22	68.20	7.98	PASS	Horizontal	PK
2	5150	23.98	26.69	50.67	54.00	3.33	PASS	Horizontal	AV

Test_Mode	802.11 be(EHT20)Transmitti	Test_Frequency	5180Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

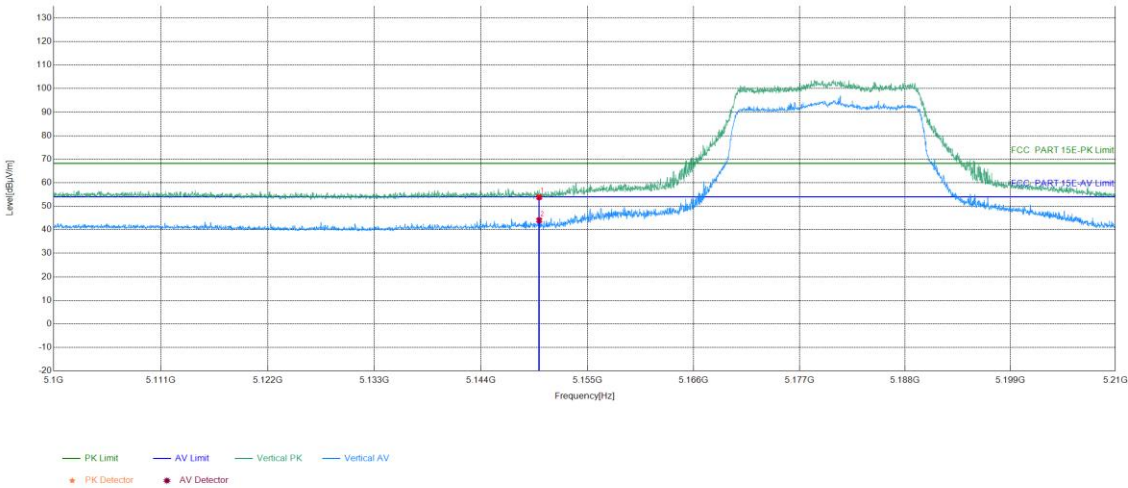

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	29.84	53.82	68.20	14.38	PASS	Vertical	PK
2	5150	23.98	20.06	44.04	54.00	9.96	PASS	Vertical	AV

Test_Mode	802.11 be(EHT40)Transmitti	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

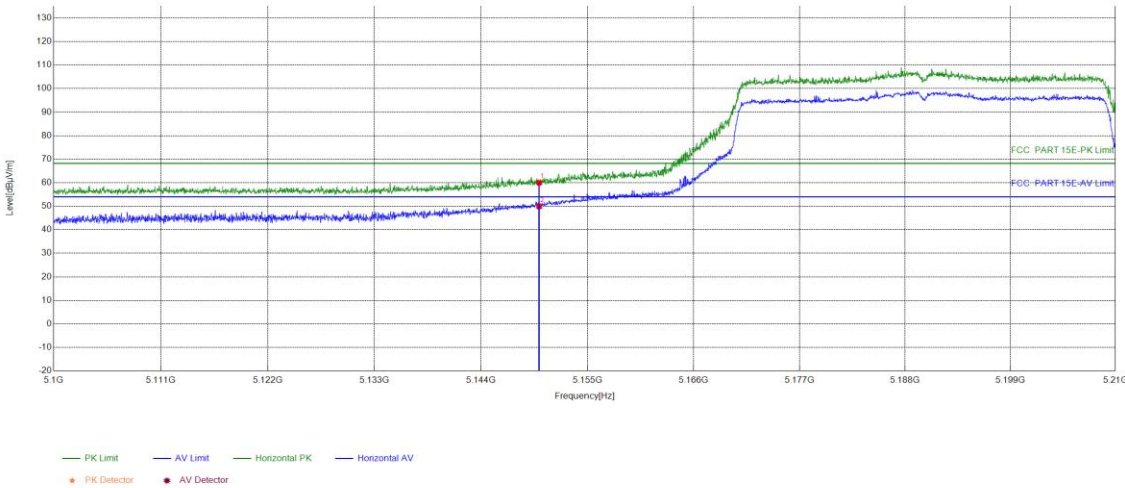

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	36.03	60.01	68.20	8.19	PASS	Horizontal	PK
2	5150	23.98	25.95	49.93	54.00	4.07	PASS	Horizontal	AV

Test_Mode	802.11 be(EHT40)Transmitti	Test_Frequency	5190Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

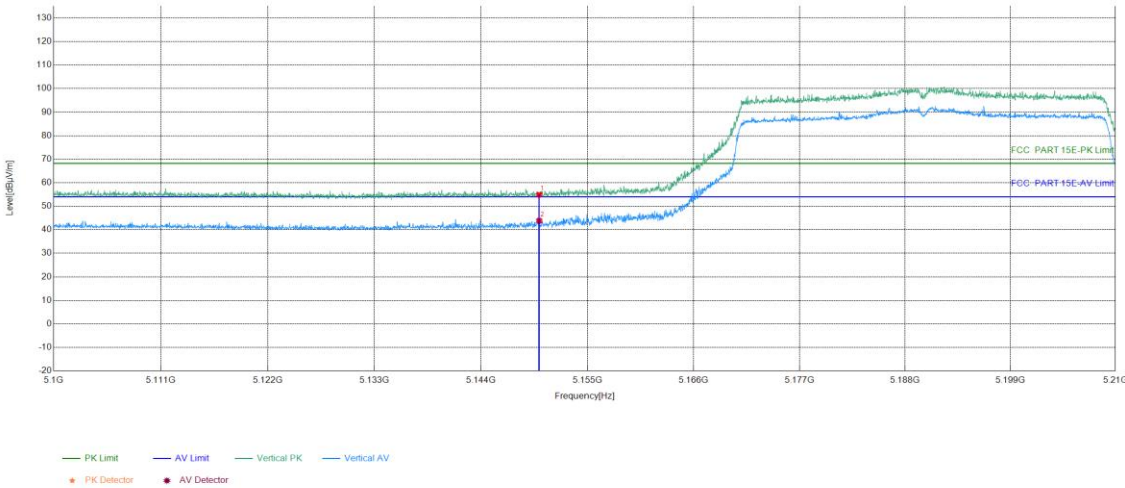

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	23.98	30.91	54.89	68.20	13.31	PASS	Vertical	PK
2	5150	23.98	19.83	43.81	54.00	10.19	PASS	Vertical	AV

Test_Mode	802.11 be(EHT80)Transmitti	Test_Frequency	5210Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

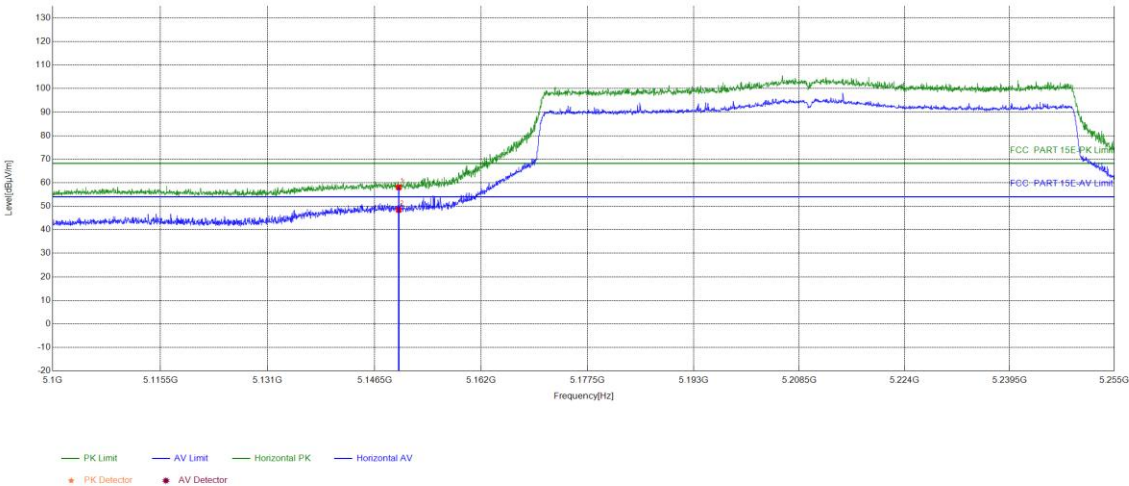

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	33.91	57.99	68.20	10.21	PASS	Horizontal	PK
2	5150	24.08	24.33	48.41	54.00	5.59	PASS	Horizontal	AV

Test_Mode	802.11 be(EHT80)Transmitti	Test_Frequency	5210Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

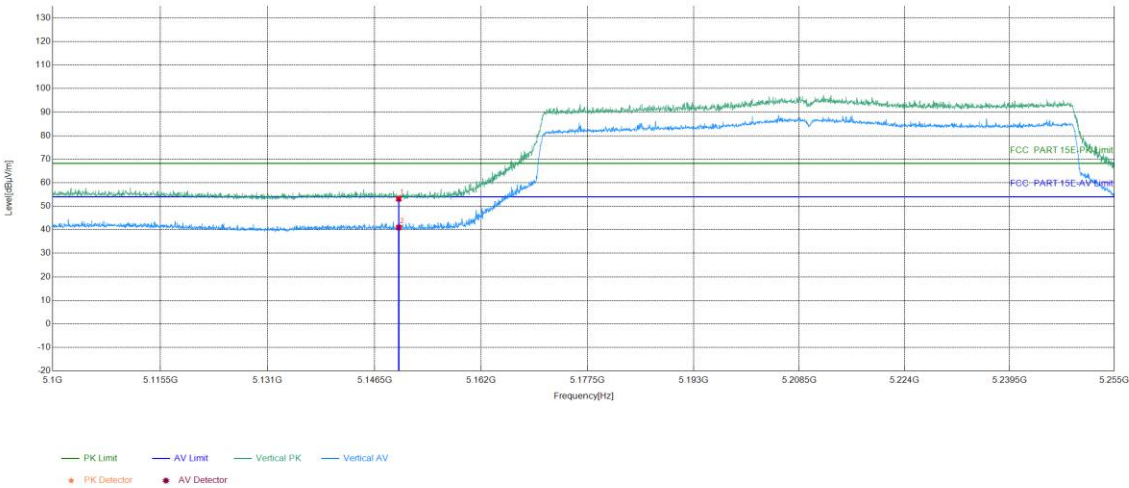

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	29.07	53.15	68.20	15.05	PASS	Vertical	PK
2	5150	24.08	16.89	40.97	54.00	13.03	PASS	Vertical	AV

Test_Mode	802.11 be(EHT160)Transmit	Test_Frequency	5250Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

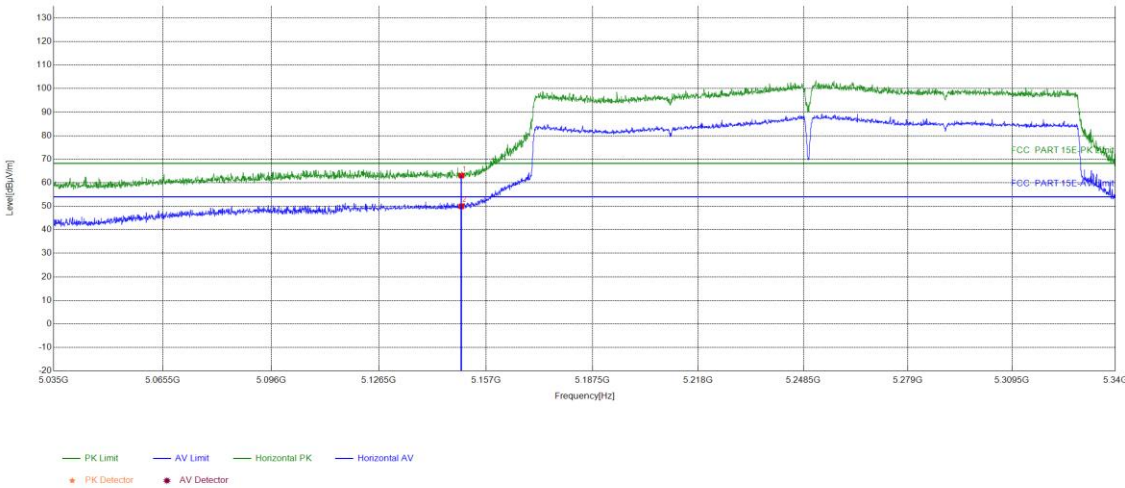

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	38.92	63.00	68.20	5.20	PASS	Horizontal	PK
2	5150	24.08	25.86	49.94	54.00	4.06	PASS	Horizontal	AV

Test_Mode	802.11 be(EHT160)Transmit	Test_Frequency	5250Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

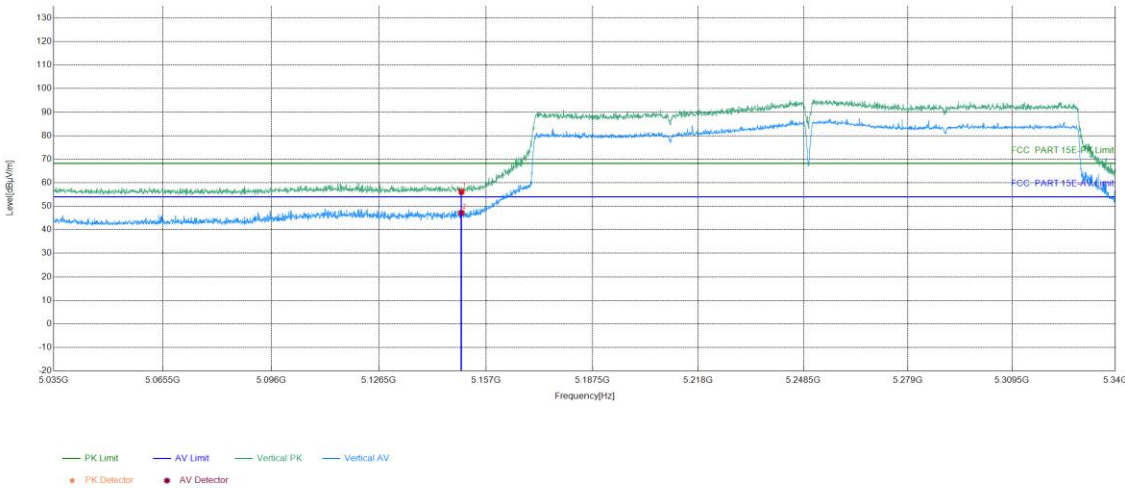

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5150	24.08	32.01	56.09	68.20	12.11	PASS	Vertical	PK
2	5150	24.08	23.07	47.15	54.00	6.85	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

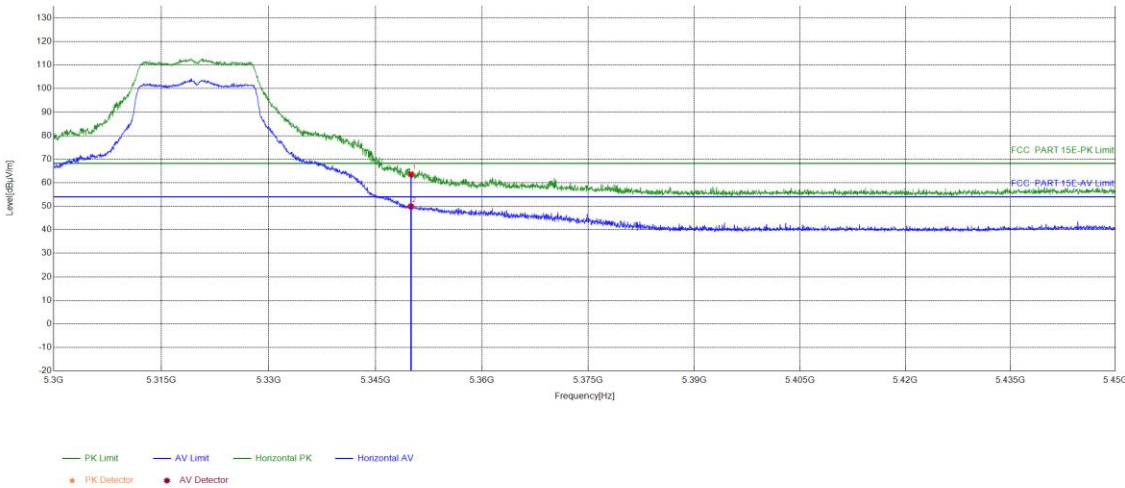

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	39.25	63.62	68.20	4.58	PASS	Horizontal	PK
2	5350	24.37	25.51	49.88	54.00	4.12	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

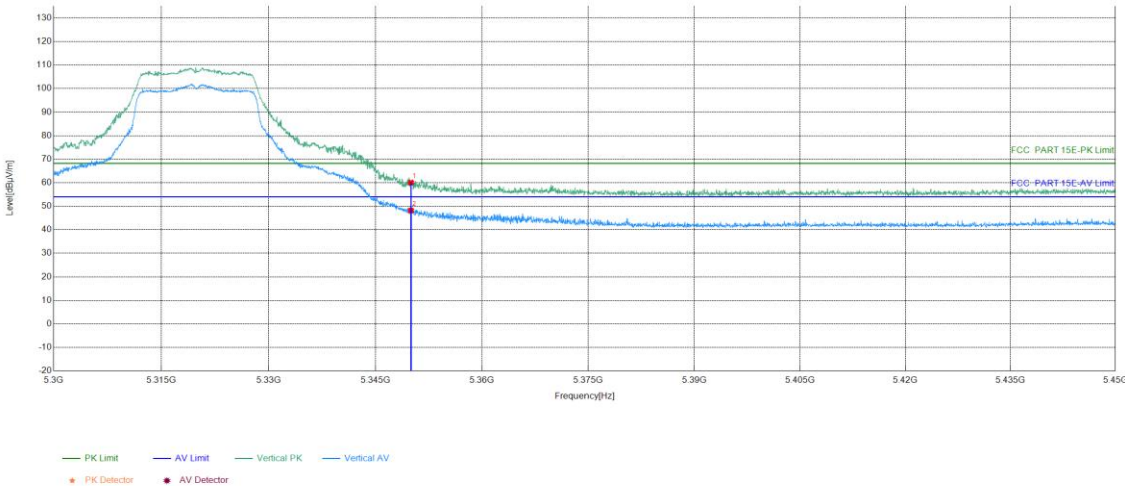

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	35.70	60.07	68.20	8.13	PASS	Vertical	PK
2	5350	24.37	23.81	48.18	54.00	5.82	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

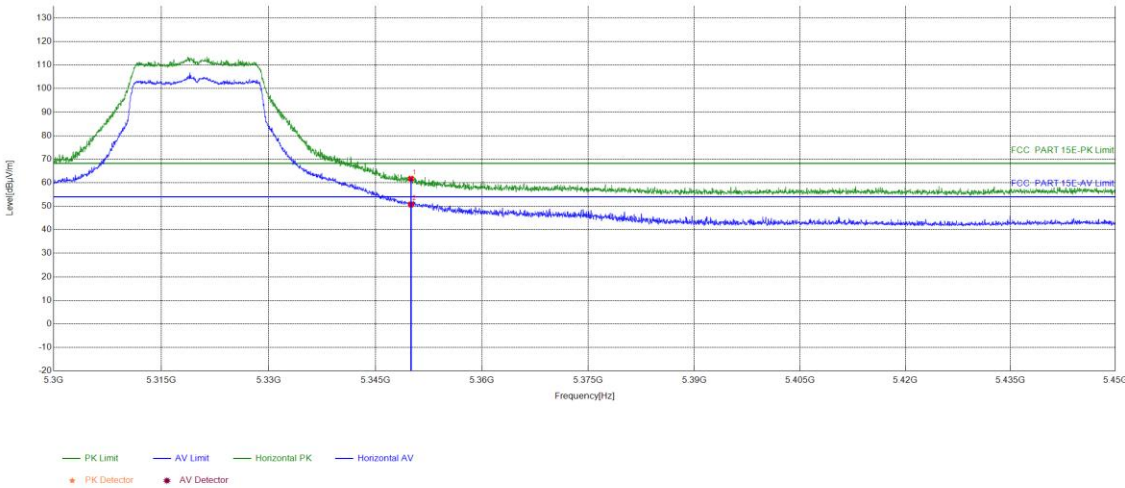

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	37.32	61.69	68.20	6.51	PASS	Horizontal	PK
2	5350	24.37	26.35	50.72	54.00	3.28	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

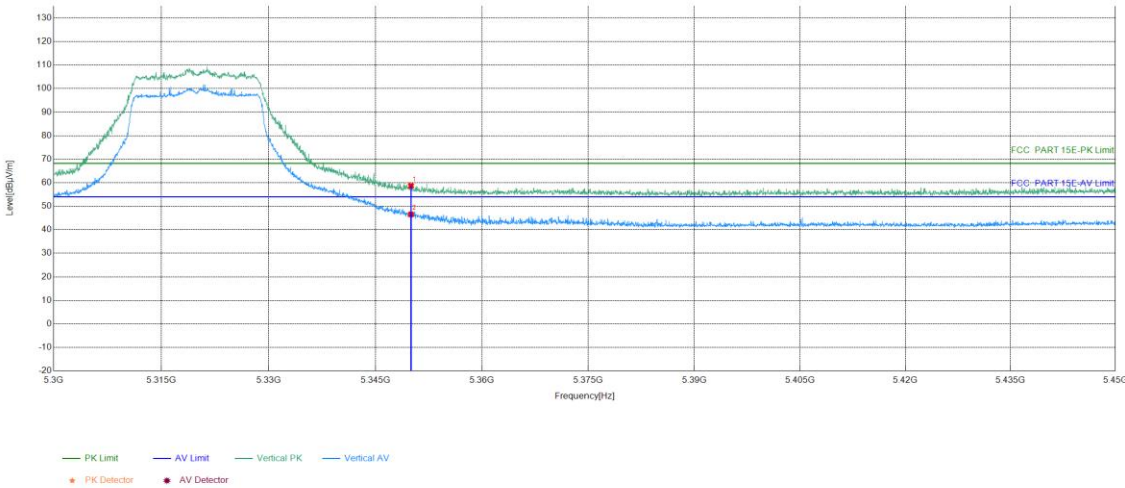

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	34.32	58.69	68.20	9.51	PASS	Vertical	PK
2	5350	24.37	22.17	46.54	54.00	7.46	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

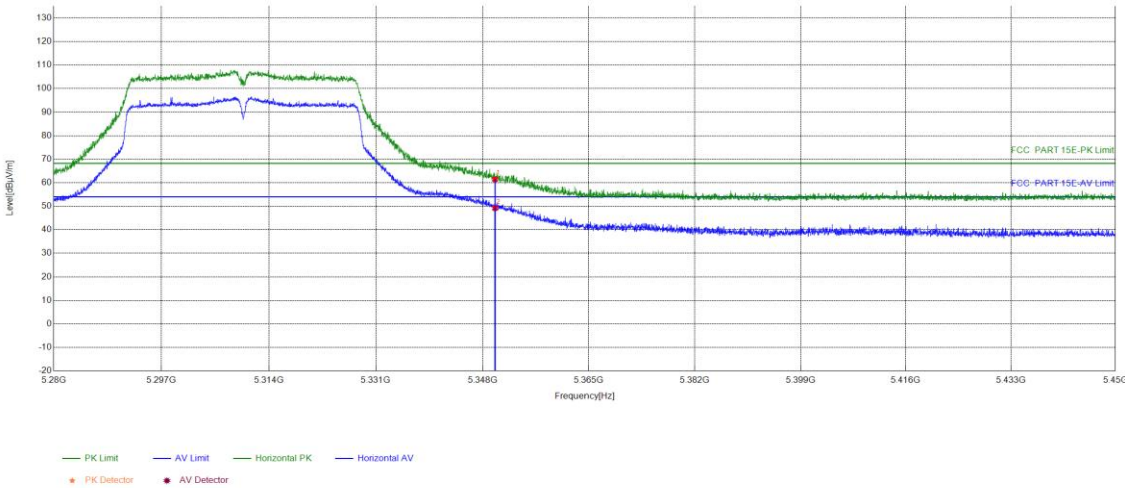

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	37.10	61.47	68.20	6.73	PASS	Horizontal	PK
2	5350	24.37	24.82	49.19	54.00	4.81	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

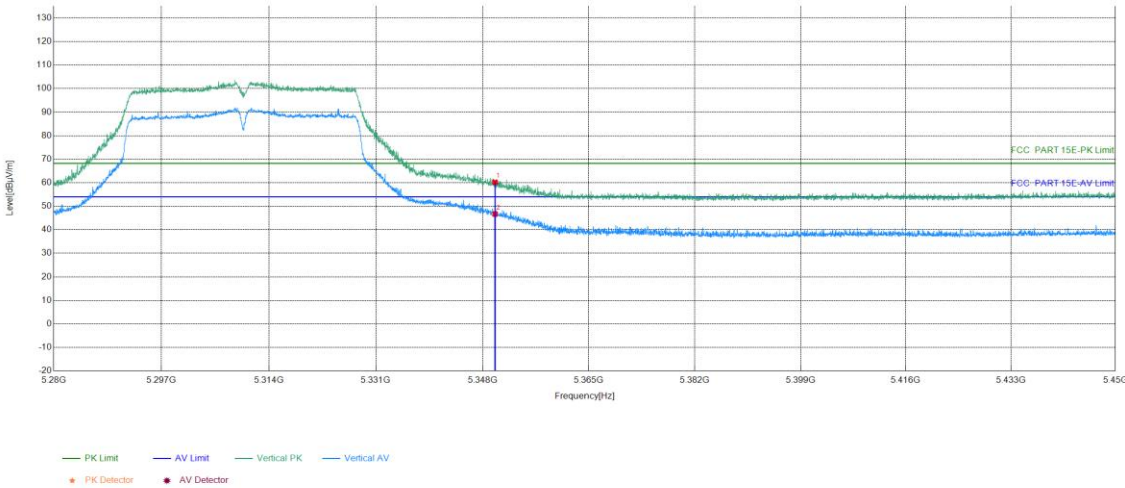

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	35.81	60.18	68.20	8.02	PASS	Vertical	PK
2	5350	24.37	22.30	46.67	54.00	7.33	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT20) Transmitting	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

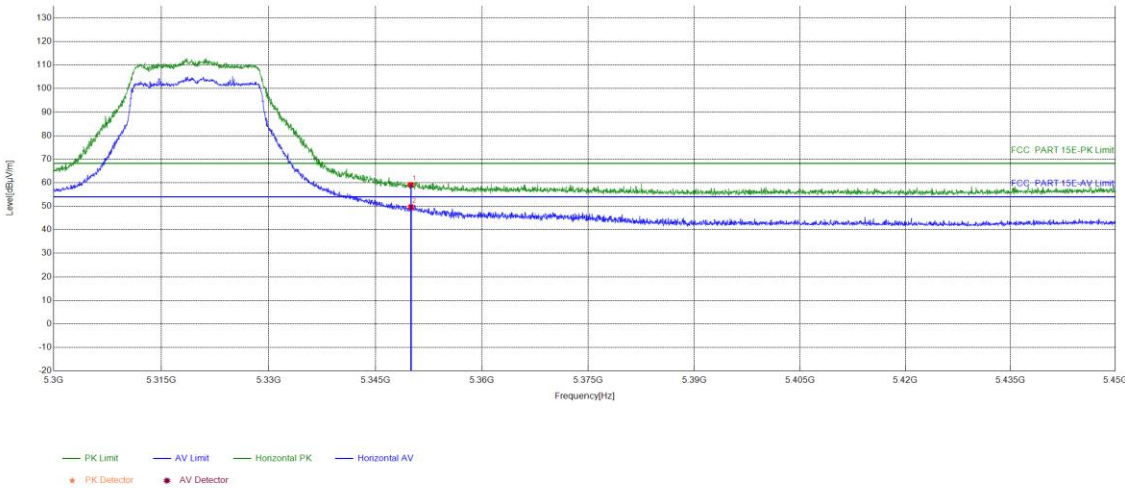

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	34.69	59.06	68.20	9.14	PASS	Horizontal	PK
2	5350	24.37	25.21	49.58	54.00	4.42	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT20) Transmitting	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

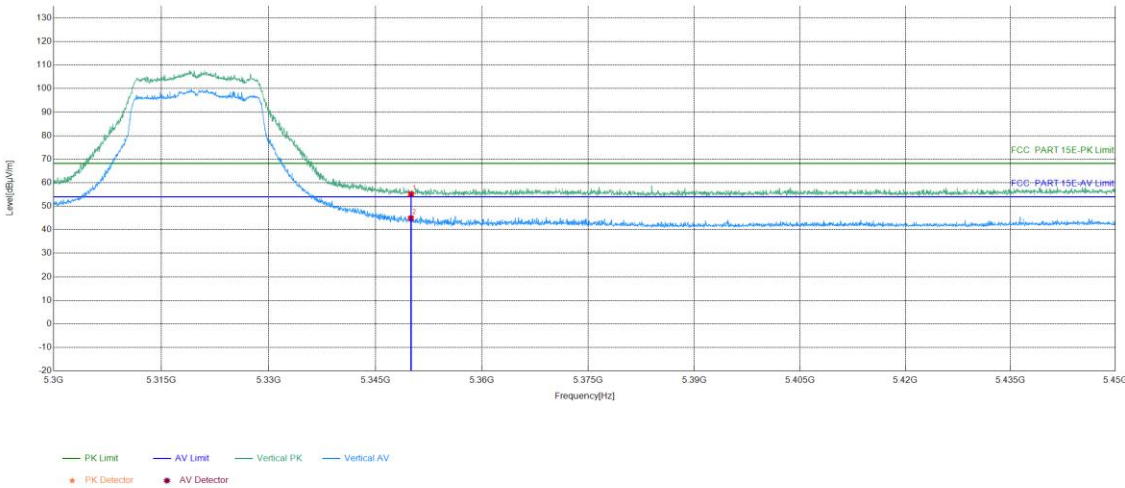

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	30.74	55.11	68.20	13.09	PASS	Vertical	PK
2	5350	24.37	20.50	44.87	54.00	9.13	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT40) Transmitting	Test_Frequency	5310Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

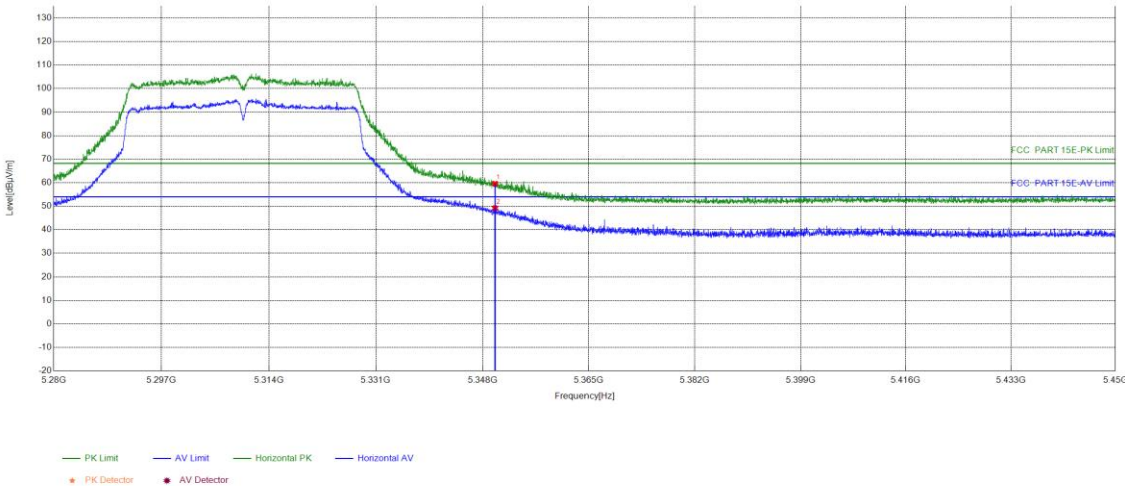

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	35.15	59.52	68.20	8.68	PASS	Horizontal	PK
2	5350	24.37	24.79	49.16	54.00	4.84	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT40) Transmitting	Test_Frequency	5310Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

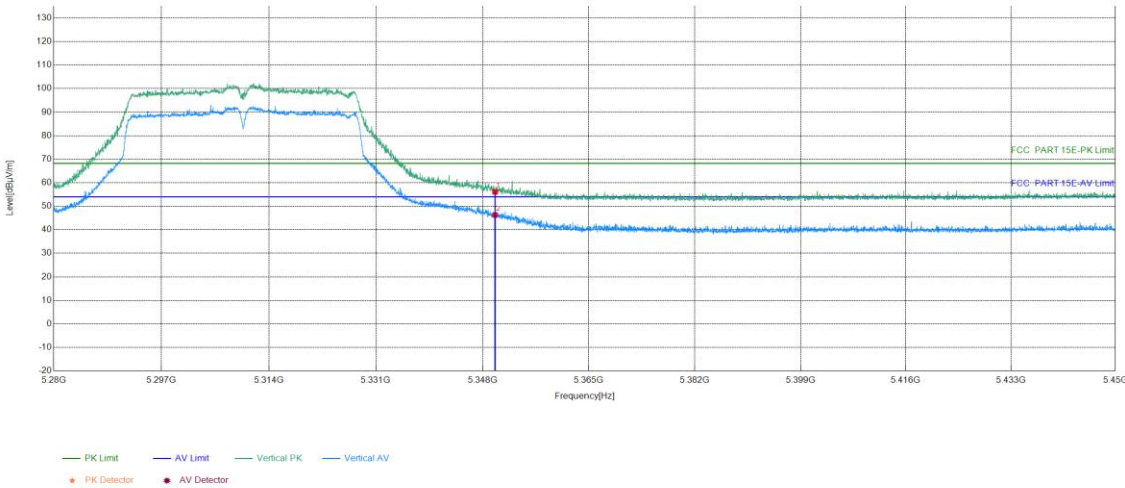

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	31.73	56.10	68.20	12.10	PASS	Vertical	PK
2	5350	24.37	21.90	46.27	54.00	7.73	PASS	Vertical	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5290Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

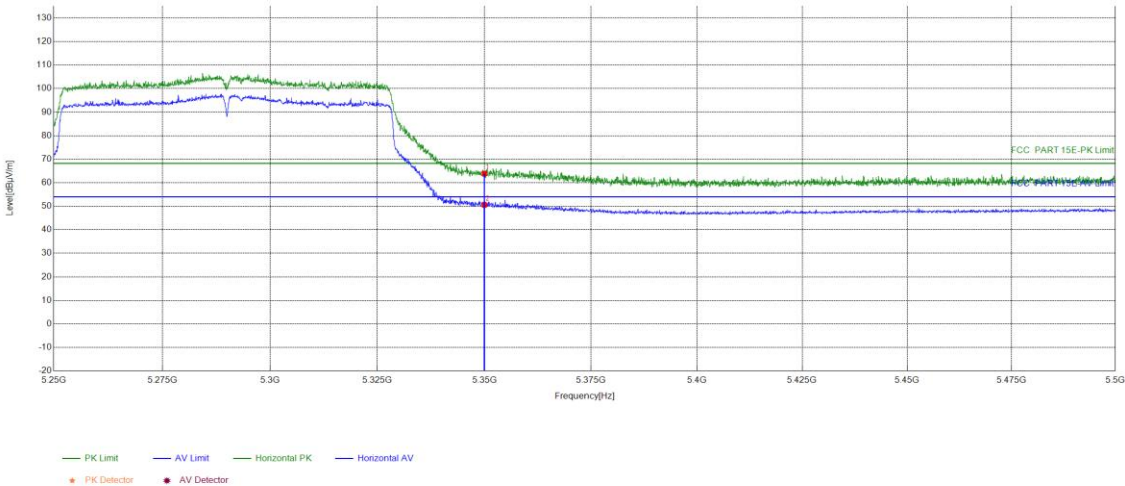

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	39.49	63.86	68.20	4.34	PASS	Horizontal	PK
2	5350	24.37	26.17	50.54	54.00	3.46	PASS	Horizontal	AV

Test_Mode	802.11 ac(VHT80) Transmitting	Test_Frequency	5290Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

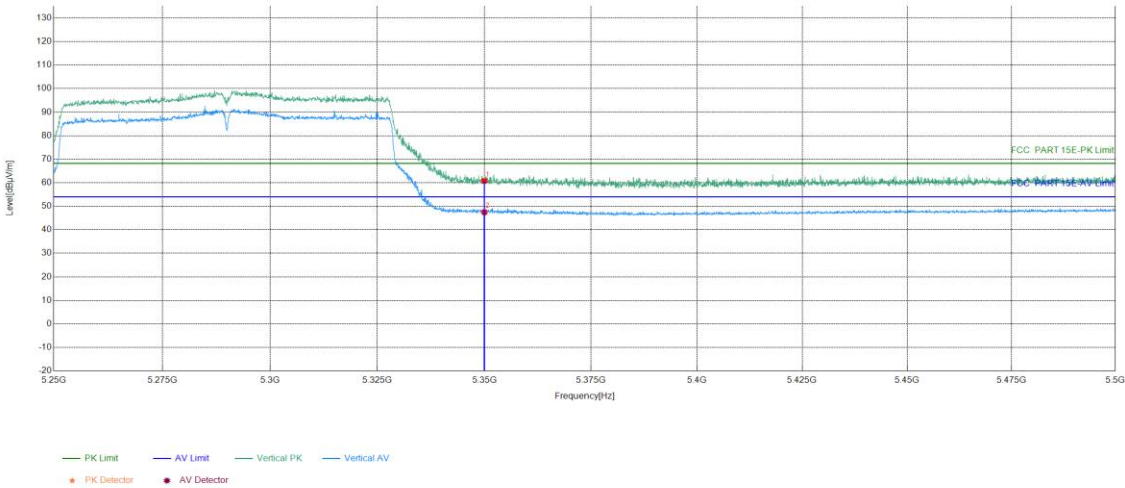

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	36.40	60.77	68.20	7.43	PASS	Vertical	PK
2	5350	24.37	23.09	47.46	54.00	6.54	PASS	Vertical	AV

Test_Mode	802.11ax(HE20)Transmittin	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		


Test Graph

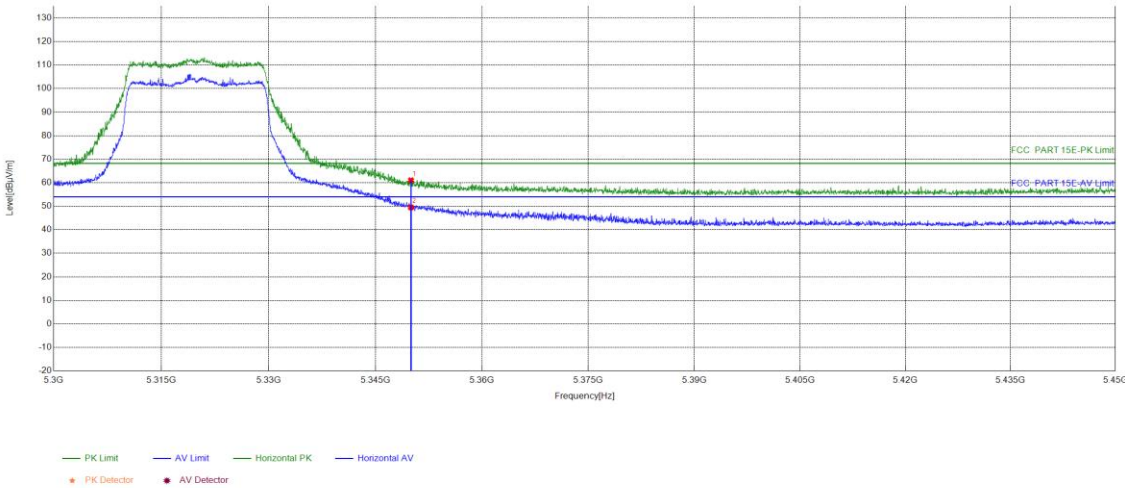

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	36.66	61.03	68.20	7.17	PASS	Horizontal	PK
2	5350	24.37	25.14	49.51	54.00	4.49	PASS	Horizontal	AV

Test_Mode	802.11ax(HE20)Transmittin	Test_Frequency	5320Mhz
Tset_Engineer	chenjun	Test_Date	2025/09/22
Remark	22.1°C50.8%\		

Test Graph

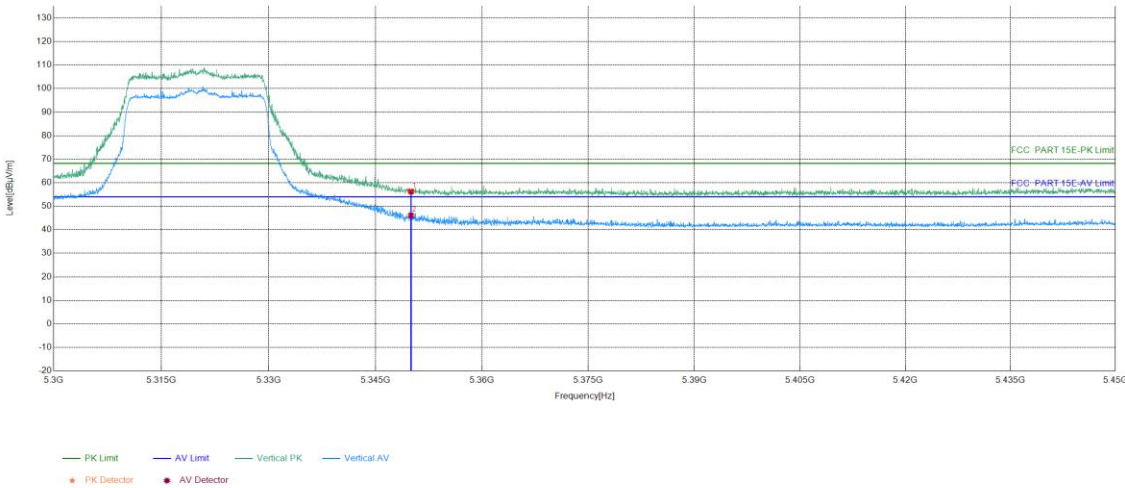

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5350	24.37	31.86	56.23	68.20	11.97	PASS	Vertical	PK
2	5350	24.37	21.70	46.07	54.00	7.93	PASS	Vertical	AV