

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称 : 深圳市景华创兴科技有限公司
CUSTOMER`S NAME : Shenzhen Jinghua Chuangxing Technology Co., Ltd.

客 户 料 号 :
CUSTOMER`S P/N :

产 品 规 格 : Y. A11. 506
PRODUCT SPEC :

制 作 日 期 : 2026年1月17日
ISSUE DATE :

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
李蓓 Li Bei	程杰 Cheng Jie	李博文 Li Bowen	



东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

ADD: 东莞市大朗镇富民中路533号

ADD: No. 533, Fumin Middle Road, Dalang Town, Dongguan City

TEL: 0769-82866410

FAX: 0769-82866409

本承认书请在首批下单生产此机种前回签，否则视为贵方默认此承认书内所有内容
This Acknowledgement Letter should be returned before the first batch of orders for the production of this model is placed. Otherwise, it will be regarded as your default acceptance of all the contents within this Acknowledgement Letter.

SPECIFICATION FOR APPROVAL

[illegible]


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	景华创兴Jinghua Chuangxing	CUSTOMER'S P/N	0
ISSUE DATE	2026.1.17	PRODUCT SPEC	Y. A11. 506

2.DIMENSION: unit:mm

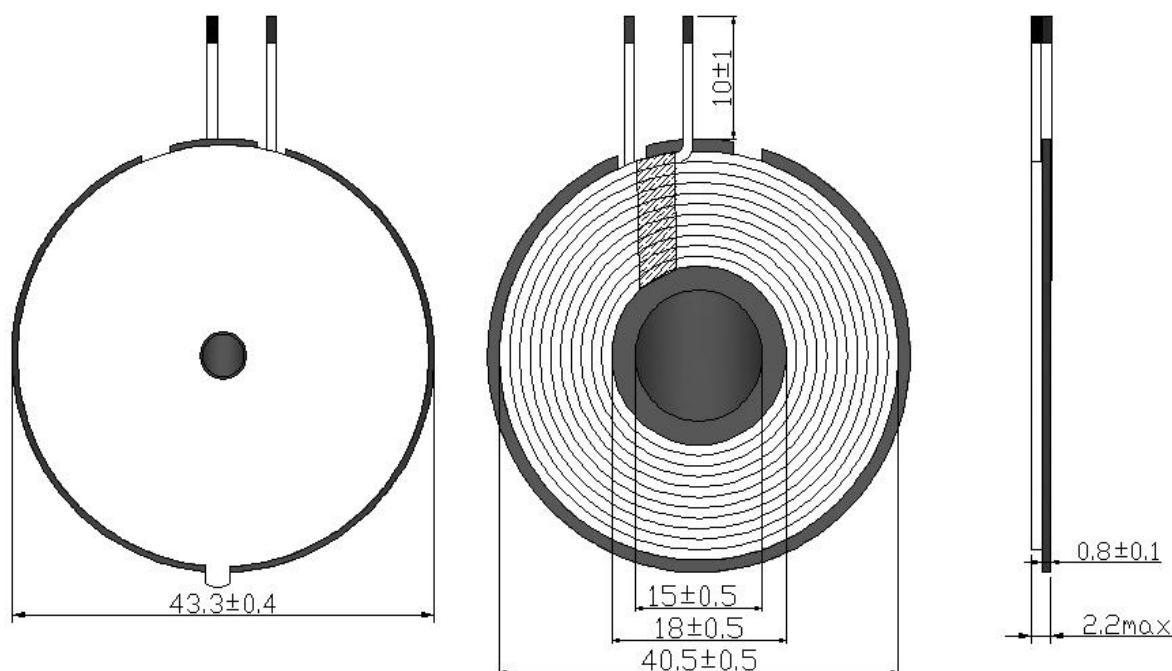

注:

1. 线圈贴紧磁片，不可翘起；
1. The coil should be tightly attached to the magnetic sheet and must not be lifted up.
2. 线圈表面整洁，无脏污；
2. The surface of the coil is clean and free of dirt.
3. 背贴白色双面胶，带拉手；
3. Back attached with white double-sided adhesive tape, with a handle.
4. 单线圈额定电流2.4A，线圈温度155℃；5. 线圈中间贴15圆磁片；
4. Single coil rated current is 2.4A, and the coil temperature is 155℃； 5 . A 15-round magnetic sheet is placed in the middle of the coil.

ISSUE BY	李蓓Li Bei	CHECK BY	程杰Cheng Jie	APPROVAL BY	李博文Li Bowen
----------	----------	----------	-------------	-------------	-------------


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	景华创兴Jinghua Chuangxing	CUSTOMER'S P/N	0
ISSUE DATE	2026.1.17	PRODUCT SPEC	Y. A11. 506

4.CIRCUIT DIAGRAM

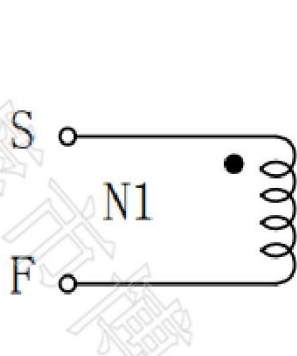

" • " : POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.08*80C	11	/	CCW

6.CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	7uH±5%	LCR1062 100KHz/1V AT 25℃±2℃
Q	S-F	60 Min	LCR1062 100KHz/1V AT 25℃±2℃
DCR	S-F	58mΩ Max	LCR1062 1KHz/0.3V AT 25℃±2℃


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	景华创兴Jinghua Chuangxing	CUSTOMER'S P/N	0
ISSUE DATE	2026.1.17	PRODUCT SPEC	Y. A11. 506

7.THE PACKING WAY

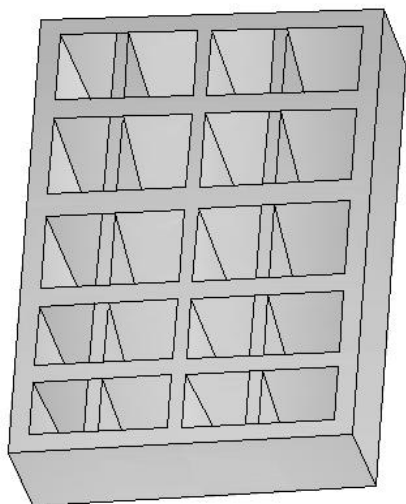

1. 珍珠棉规格: 355*235*65mm*20格;

Pearl foam specification: 355*235*65mm, 20 layers.

2. 每格装16pcs, 每盘320pcs;


Each box contains 16 pieces, and each tray contains 320 pieces.

3. 每箱装5盘;

Each box contains 5 plates.

4. 每箱合计: 1600pcs;

Total for each box: 1600 pieces;

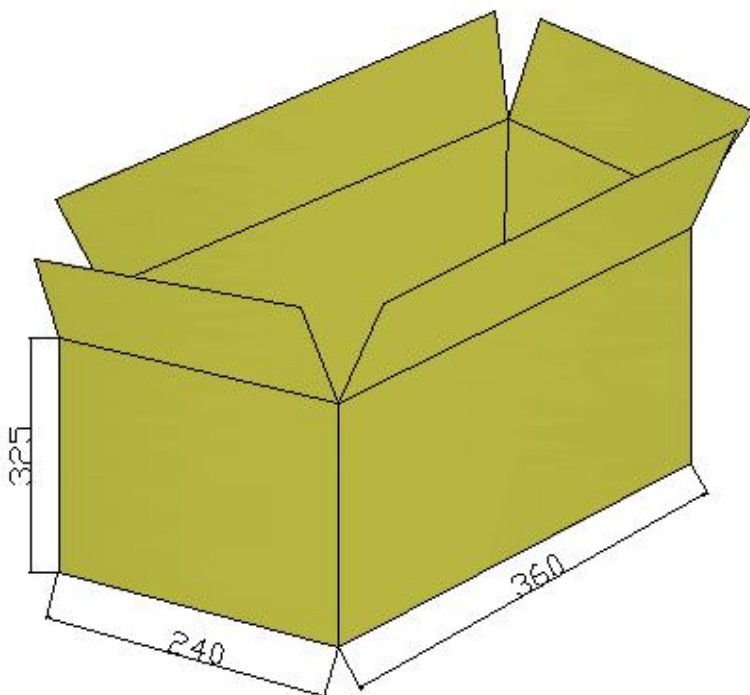

东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	景华创兴Jinghua Chuangxing	CUSTOMER'S P/N	0	
ISSUE DATE	2026.1.17	PRODUCT SPEC	Y. A11. 506	
m e m o				
序号	CONTENT	handling method	signature	date
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				