

SPECIFICATION FOR APPROVAL

CUSTOMER:

Haixin

CUST P/N:

FINE P/N:

G43.5*0.75-20.5-0.08*48P-10TS-6.5UH-L170MM+BJ

DESC:

Φ 43.5MMX0.75MM

DATE:

2024/05/24

Version:

A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
He Licheng	mary	But it can be cleared	

Dongguan Yinze Electronic Technology Co.,
Ltd

Factory Address: No. 901, Building 2, Xinghan Road (Chuangfu Center City),
Chashan Town, Dongguan City

But it can be cleared: TEL: 18617251159


Version Change History

[illegible]

SPECIFICATION

DESC	G43.5*0.75-20.5-0.08*48P-10 TS-6.5UH-L170MM+BJ	Rev: A.0	CUST:	Haixin
			CUST P/N:	

一、Size DIMENSION:(mm)

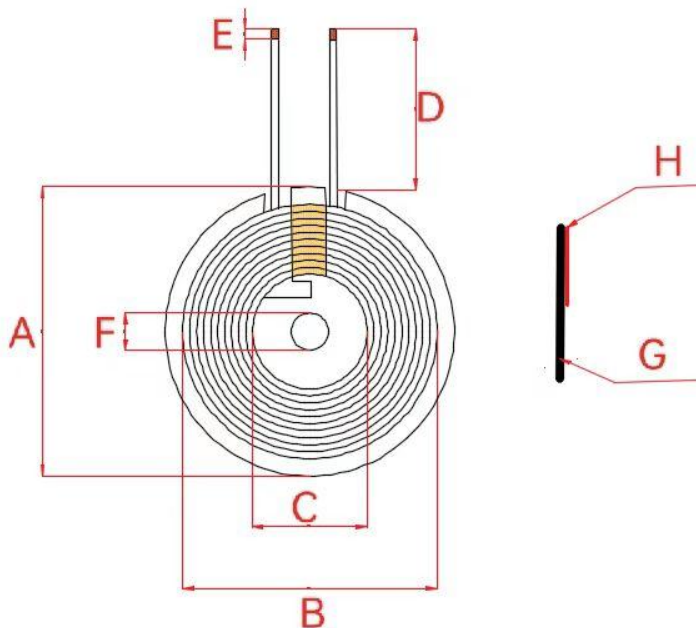

A	43.5 ± 0.5
B	38.3 ± 0.5
C	20.5 ± 0.5
D	170 ± 2
E	3 ± 2
F	5.3 ± 0.2
G	0.75 ± 0.05
H	1.65 ± 0.1
I	
K	

pour:

1. Cross over outgoing line;
2. Coil mounted dual slot disk, disk size $43.5 \pm 0.5\text{mm}$, thickness is $0.75 \pm 0.05\text{mm}$.
3. Stick adhesive on the back of the disk

二、SCHEMATIC DIAGRAM:

三、Winding Specification:

NO.	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	Hot air line:0.08*48P	10Ts	CCW

四、ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%Individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%Add disk	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100m Ω		LCZ METER 502B

PREPARED BY/DATE	CHECKED BY/DATE
He Licheng2024.05.24	