

RF TEST REPORT

For

Nanjing Jiahao Technology Co., Ltd

Product Name: WIFI+BT Module

Test Model(s): WKCT16R2501

Report Reference No. : DACE250916003RF003

FCC ID : 2BS3W-WKCT16

Applicant's Name : Nanjing Jiahao Technology Co., Ltd

Address : 120 Su Yuan Avenue, Jiangning District, Nanjing City, Jiangsu Province

Testing Laboratory : Shenzhen DACE Testing Technology Co., Ltd.

Address : 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park,
Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen,
Guangdong, China

Test Specification Standard : 47 CFR Part 15.247

Date of Receipt : September 16, 2025

Date of Test : September 16, 2025 to October 16, 2025

Data of Issue : October 16, 2025

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Apply for company information

Applicant's Name	:	Nanjing Jiahao Technology Co., Ltd
Address	:	120 Su Yuan Avenue, Jiangning District, Nanjing City, Jiangsu Province
Product Name	:	WIFI+BT Module
Test Model(s)	:	WKCT16R2501
Series Model(s)	:	N/A
Test Specification Standard(s)	:	47 CFR Part 15.247

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

Keren Huang

Keren Huang / Test Engineer

October 16, 2025

Supervised by:

Ben Tang

Ben Tang / Project Engineer

October 16, 2025

Approved by:

Machael Mo

Machael Mo / Manager

October 16, 2025

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE250916003RF003	October 16, 2025

CONTENTS

1 TEST SUMMARY	6
1.1 TEST STANDARDS	6
1.2 SUMMARY OF TEST RESULT	6
2 GENERAL INFORMATION	7
2.1 CLIENT INFORMATION	7
2.2 DESCRIPTION OF DEVICE (EUT)	7
2.3 DESCRIPTION OF TEST MODES	8
2.4 DESCRIPTION OF SUPPORT UNITS	8
2.5 EQUIPMENTS USED DURING THE TEST	9
2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	11
2.7 IDENTIFICATION OF TESTING LABORATORY	11
2.8 ANNOUNCEMENT	11
3 EVALUATION RESULTS (EVALUATION)	12
3.1 ANTENNA REQUIREMENT	12
3.1.1 Conclusion:	12
4 RADIO SPECTRUM MATTER TEST RESULTS (RF)	13
4.1 6dB BANDWIDTH	13
4.1.1 E.U.T. Operation:	13
4.1.2 Test Setup Diagram:	13
4.1.3 Test Data:	14
4.2 MAXIMUM CONDUCTED OUTPUT POWER	15
4.2.1 E.U.T. Operation:	15
4.2.2 Test Setup Diagram:	15
4.2.3 Test Data:	16
4.3 POWER SPECTRAL DENSITY	17
4.3.1 E.U.T. Operation:	17
4.3.2 Test Setup Diagram:	17
4.3.3 Test Data:	17
4.4 EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	18
4.4.1 E.U.T. Operation:	18
4.4.2 Test Setup Diagram:	18
4.4.3 Test Data:	18
4.5 BAND EDGE EMISSIONS (RADIATED)	19
4.5.1 E.U.T. Operation:	19
4.5.2 Test Setup Diagram:	19
4.5.3 Test Data:	20
4.6 EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz)	25
4.6.1 E.U.T. Operation:	26
4.6.2 Test Data:	26
4.7 EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz)	28
4.7.1 E.U.T. Operation:	29
4.7.2 Test Data:	29
5 TEST SETUP PHOTOS	40
6 PHOTOS OF THE EUT	41
APPENDIX	43
1. -6dB BANDWIDTH	44

2. 99% OCCUPIED BANDWIDTH	57
3. DUTY CYCLE	70
4. MAX. OUTPUT POWER	83
5. POWER SPECTRAL DENSITY	84
6. BANEDGE	100
7. SPURIOUS EMISSION	121

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Antenna requirement	47 CFR Part 15.247		47 CFR 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	ANSI C63.10-2020 section 6.2	47 CFR 15.207(a)	Pass
6dB Bandwidth	47 CFR Part 15.247	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.247	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	47 CFR Part 15.247	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : Nanjing Jiahao Technology Co., Ltd
Address : 120 Su Yuan Avenue, Jiangning District, Nanjing City, Jiangsu Province

Manufacturer : Nanjing Jiahao Technology Co., Ltd
Address : 120 Su Yuan Avenue, Jiangning District, Nanjing City, Jiangsu Province

2.2 Description of Device (EUT)

Product Name:	WIFI+BT Module
Model/Type reference:	WKCT16R2501
Series Model:	N/A
Trade Mark:	N/A
Power Supply:	VCC:3.3V
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz; 802.11n(HT40): 2422MHz to 2452MHz
Number of Channels:	802.11b/g/n(HT20): 11 Channels; 802.11n(HT40): 7 Channels
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type:	PCB
Antenna Gain:	Antenna1:3.35dBi; Antenna2:0.44dBi
Hardware Version:	V1.0
Software Version:	V1.0

Remark:The Antenna Gain is supplied by the customer.DACE is not responsible for this data and the related calculations associated with it

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz
Test channel	802.11n(HT40)

Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

2.3 Description of Test Modes

No	Title	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode.
Remark: Only the data of the worst mode would be recorded in this report.		

2.4 Description of Support Units

Title	Manufacturer	Model No.	Serial No.
PC	HP	TPC-W032-SF	N/A

2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
loop antenna	EVERFINE	LLA-2	80900L-C	2024-12-19	2025-12-18
Power absorbing clamp	SCHWARZ BECK	MESS-ELEKTRONIK	/	2025-04-23	2026-04-22
Electric Network	SCHWARZ BECK	CAT5 8158	CAT5 8158#207	2025-04-18	2026-04-17
Cable	SCHWARZ BECK	/	/	2025-04-18	2026-04-17
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Attenuation	561-G071	2024-12-06	2025-12-05
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	1164.6607K03 -102109-MH	2025-04-25	2026-04-24
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2025-04-18	2026-04-17
L.I.S.N	SCHWARZ BECK	NSLK 8126	05055	2025-04-18	2026-04-17
Pulse Limiter	CYBERTEK	EM5010A	/	2024-09-27	2025-09-26
EMI test software	EZ -EMC	EZ	V1.1.42	/	/
Power meter	Agilent	E4416	MY48200166	2024-12-06	2025-12-05

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	Tachoy Information Technology(she nzhn) Co.,Ltd.	RTS-01	V1.0.0	/	/
Power divider	MIDEWEST	PWD-2533	SMA-79	2025-04-18	2026-05-10
RF Sensor Unit	Tachoy Information Technology(she nzhn) Co.,Ltd.	TR1029-2	000001	/	/
Wideband radio communication tester	R&S	CMW500	113410	2025-04-25	2026-04-24
Vector Signal Generator	Keysight	N5181A	MY50143455	2024-12-06	2025-12-05
Signal Generator	Keysight	N5182A	MY48180415	2024-12-06	2025-12-05
Spectrum Analyzer	Keysight	N9020A	MY53420323	2024-12-06	2025-12-05
Spectrum Analyzer	Keysight	N9020A	MY55338111	2025-09-16	2026-09-15

Band edge emissions (Radiated)**Emissions in frequency bands (below 1GHz)****Emissions in frequency bands (above 1GHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	V1.1.42	/	/
Positioning Controller	MF	MF-7802	/	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2024-04-26	2027-04-25
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2024-04-26	2027-04-25
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2025-04-28	2026-04-27
Cable(LF)#2	Schwarzbeck	/	/	2024-12-19	2025-12-18
Cable(LF)#1	Schwarzbeck	/	/	2024-12-19	2025-12-18
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2025-04-25	2026-04-24
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2025-04-25	2026-04-24
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2025-04-29	2026-04-28
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2025-04-29	2026-04-28
Wideband radio communication tester	R&S	CMW500	113410	2025-04-25	2026-04-24
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2025-04-18	2026-04-17
Test Receiver	R&S	ESCI 3	1166.5950K03-101431-Jq	2025-04-18	2026-04-17
Horn Antenna	Sunol Sciences	DRH-118	A091114	2025-04-21	2026-04-20
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2024-09-28	2026-09-27

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	±3.41dB
Occupied Bandwidth	±3.63%
RF conducted power	±0.733dB
RF power density	±0.234%
Conducted Spurious emissions	±1.98dB
Radiated Emission (Above 1GHz)	±5.46dB
Radiated Emission (Below 1GHz)	±5.79dB
Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

2.7 Identification of Testing Laboratory

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyao, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

Identification of the Responsible Testing Location

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyao, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
Designation Number:	CN1342
Test Firm Registration Number:	778666
A2LA Certificate Number:	6270.01

2.8 Announcement


- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by DACE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

3.1.1 Conclusion:

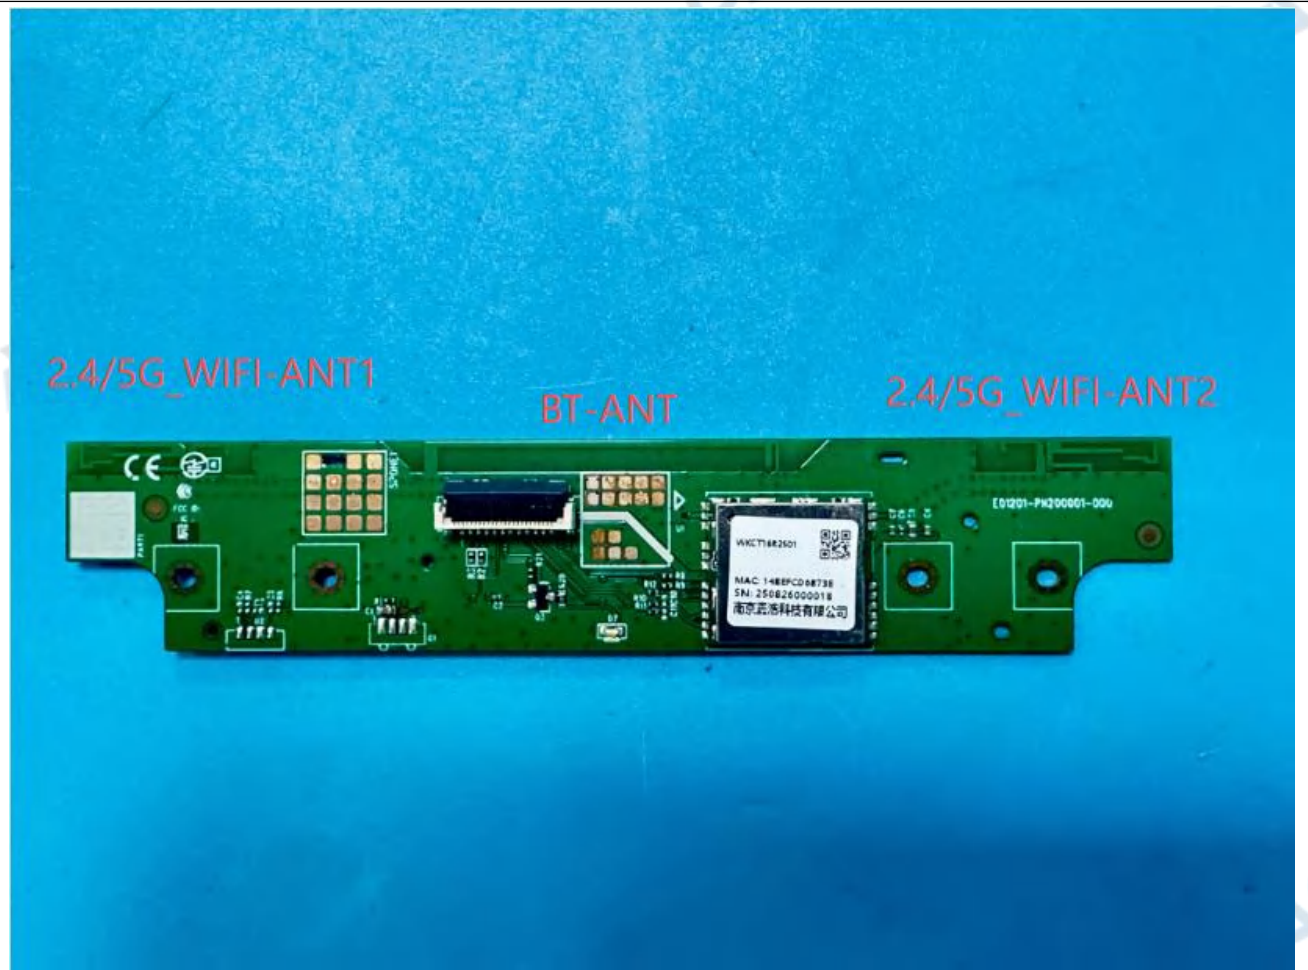

4 Radio Spectrum Matter Test Results (RF)

4.1 6dB Bandwidth


Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

4.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.2 °C	Humidity:	47 %	Atmospheric Pressure:	101.3 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.1.2 Test Setup Diagram:

--

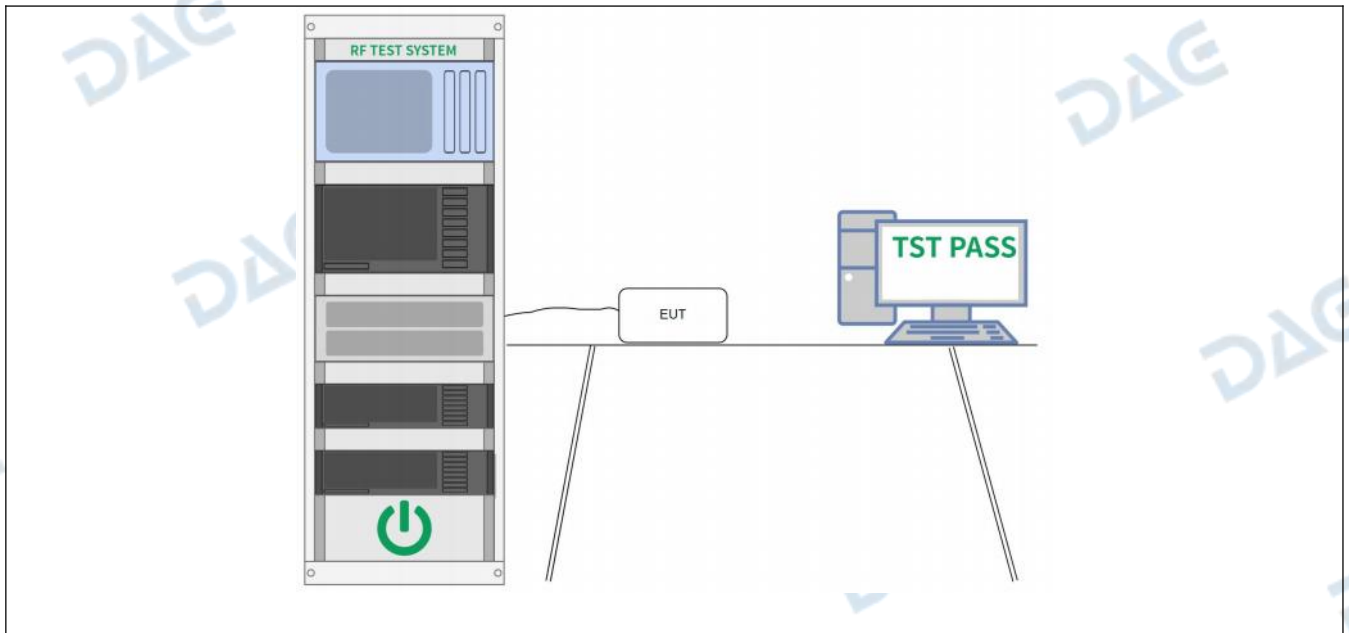

4.1.3 Test Data:

Please Refer to Appendix for Details.

4.2 Maximum Conducted Output Power


Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power Note: Per ANSI C63.10-2020, if there are two or more antennas, the conducted powers at Core 0, Core 1, ..., Core i were first measured separately, as shown in the section above (this product only have one antenna). The measured values were then summed in linear power units then converted back to dBm. Per ANSI C63.10-2013 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used. For correlated unequal antenna gain Directional gain = $10 \cdot \log[(10G_1/20 + 10G_2/20 + \dots + 10G_N/20)^2 / NANT]$ dBi For completely uncorrelated unequal antenna gain Directional gain = $10 \cdot \log[(10G_1/10 + 10G_2/10 + \dots + 10G_N/10) / NANT]$ dBi Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i. = MIMO/CDD (i is the number of antennas) (#VALUE! mW + mW) = #VALUE! mW = dBm Sample e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted Power (dBm) + Ant gain (dBi)

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	48 %	Atmospheric Pressure:	101.3 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.2.2 Test Setup Diagram:

--

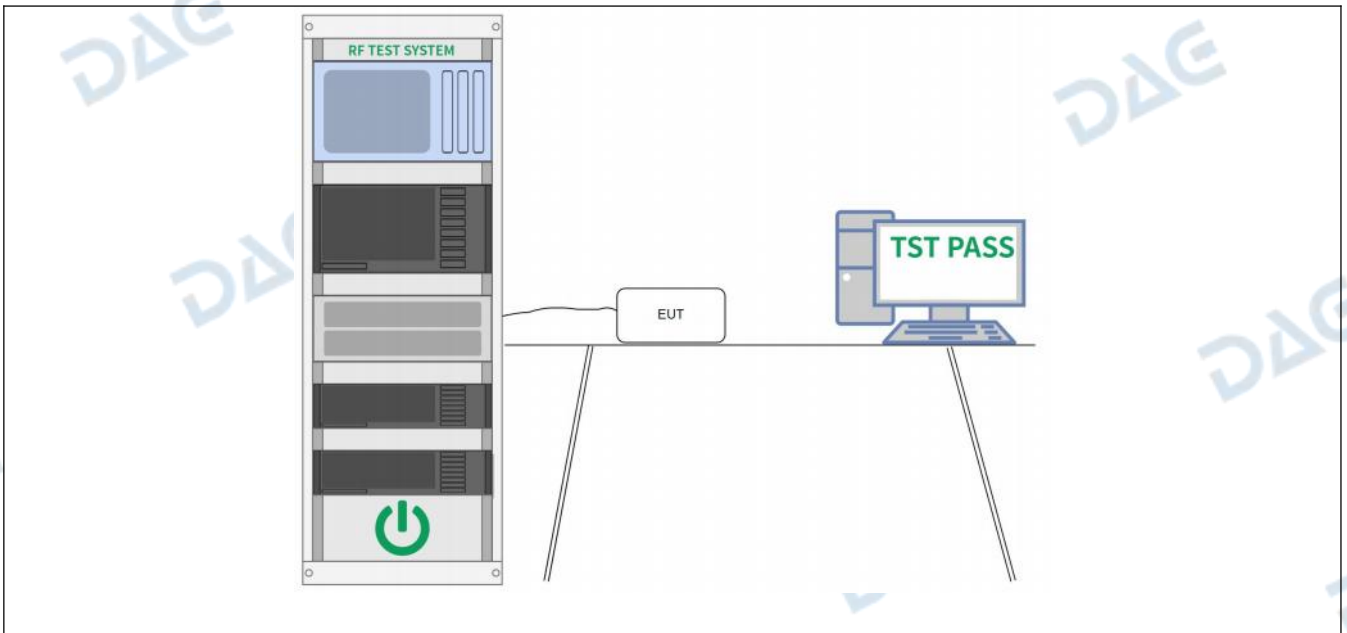

4.2.3 Test Data:

Please Refer to Appendix for Details.


4.3 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020, section 11.10, Maximum power spectral density level in the fundamental emission

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.4 °C	Humidity:	52 %	Atmospheric Pressure:	101.3 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.3.2 Test Setup Diagram:

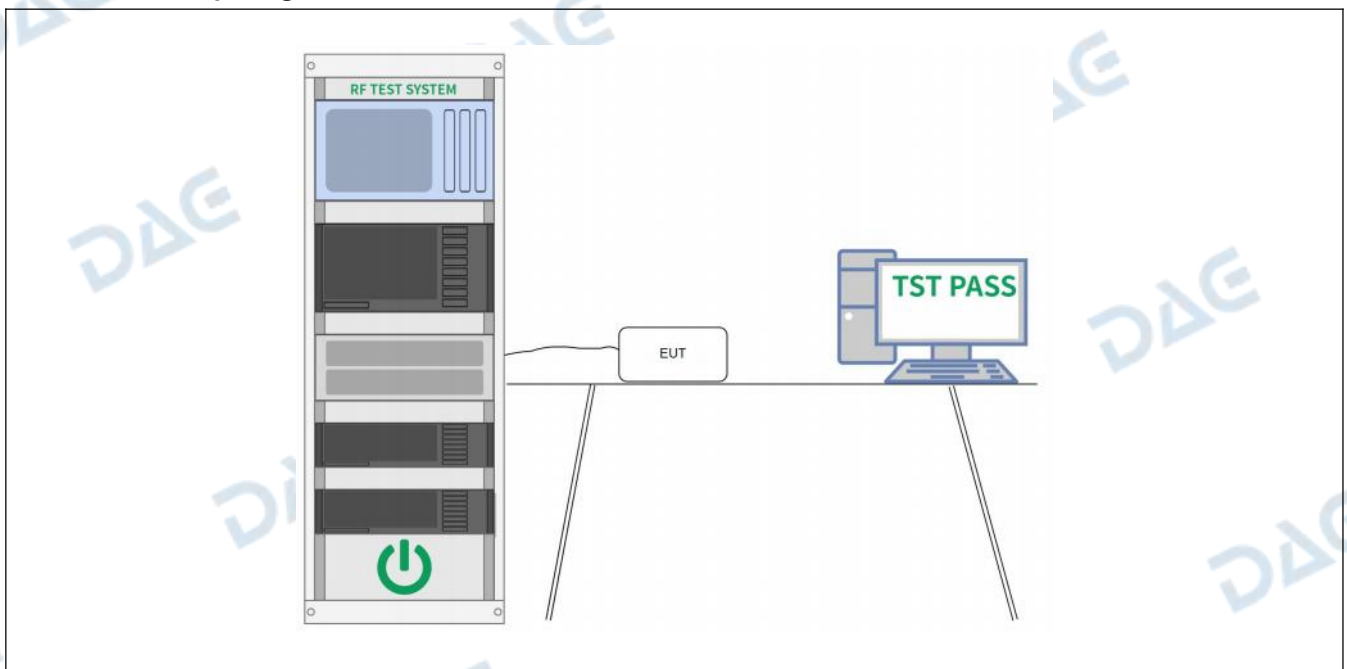

4.3.3 Test Data:

Please Refer to Appendix for Details.


4.4 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.7 °C	Humidity:	54 %	Atmospheric Pressure:	101.3 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.4.2 Test Setup Diagram:

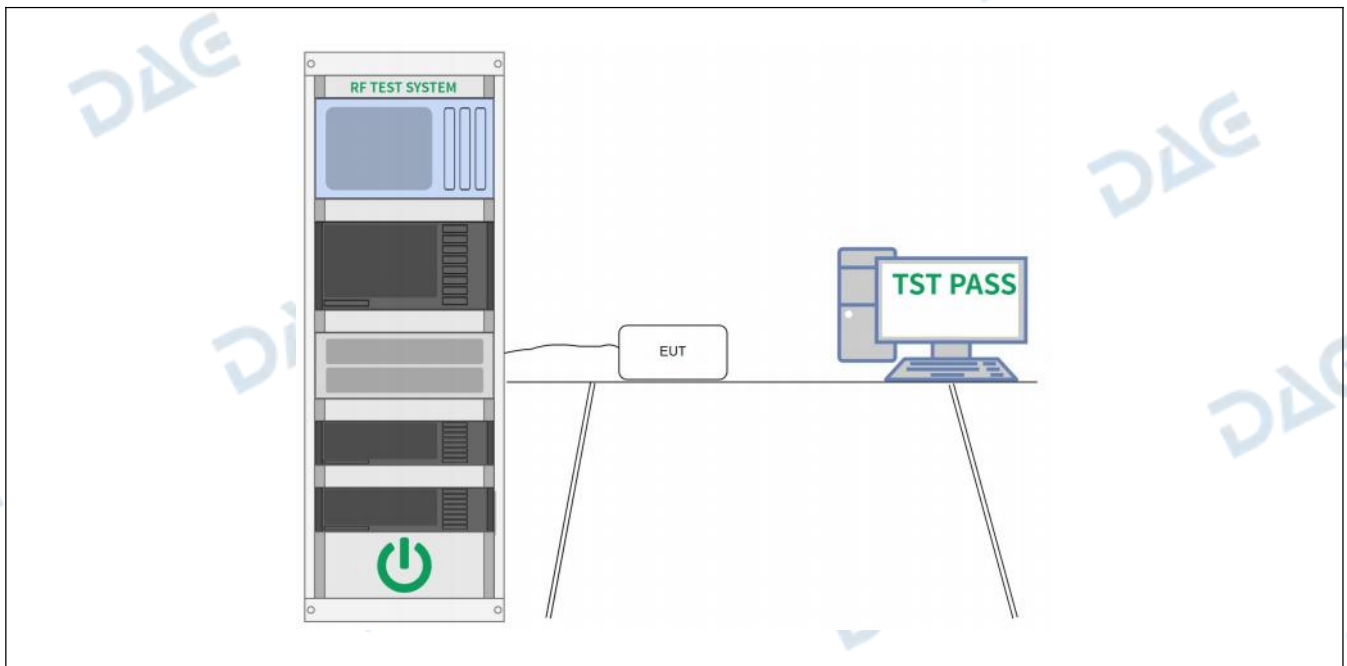

4.4.3 Test Data:

Please Refer to Appendix for Details.


4.5 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020 section 6.10.5.2		

4.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	55 %	Atmospheric Pressure:	101.3 kPa
Pretest mode:		TM1, TM2, TM3, TM4			
Final test mode:		TM1, TM2, TM3, TM4			

4.5.2 Test Setup Diagram:

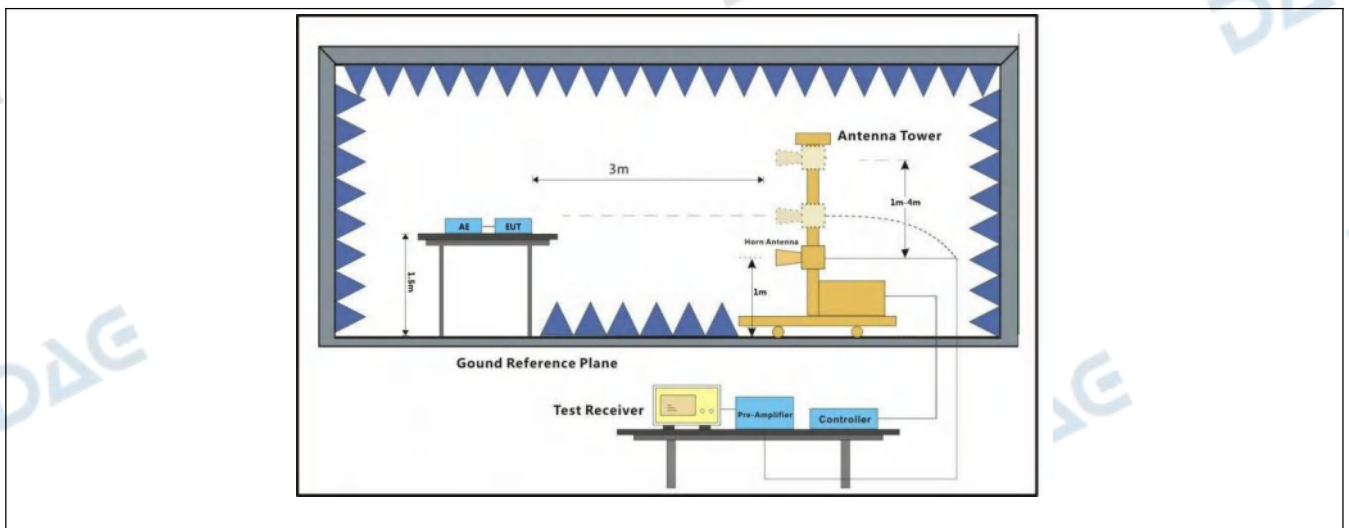

4.5.3 Test Data:

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11b-ant1_Low Channel: 2412MHz								
H	2390	48.99	-6.62	42.37	74	-31.63	PK	Pass
H	2390	37.27	-6.62	30.65	54	-23.35	AV	Pass
H	2400	48.33	-6.43	41.90	74	-32.10	PK	Pass
H	2400	38.82	-6.43	32.39	54	-21.61	AV	Pass
V	2390	48.06	-6.62	41.44	74	-32.56	PK	Pass
V	2390	39.55	-6.62	32.93	54	-21.07	AV	Pass
V	2400	48.06	-6.43	41.63	74	-32.37	PK	Pass
V	2400	39.39	-6.43	32.96	54	-21.04	AV	Pass
802.11b-ant1_High Channel: 2462MHz								
H	2483.5	58.37	-6.17	52.20	74	-21.80	PK	Pass
H	2483.5	44.47	-6.17	38.30	54	-15.70	AV	Pass
H	2500	57.18	-6.13	51.05	74	-22.95	PK	Pass
H	2500	43.14	-6.13	37.01	54	-16.99	AV	Pass
V	2483.5	57.78	-6.17	51.61	74	-22.39	PK	Pass
V	2483.5	45.38	-6.17	39.21	54	-14.79	AV	Pass
V	2500	56.21	-6.13	50.08	74	-23.92	PK	Pass
V	2500	45.52	-6.13	39.39	54	-14.61	AV	Pass
802.11b-ant2_Low Channel: 2412MHz								
H	2390	49.48	-6.62	42.86	74	-31.14	PK	Pass
H	2390	39.31	-6.62	32.69	54	-21.31	AV	Pass
H	2400	47.99	-6.43	41.56	74	-32.44	PK	Pass
H	2400	37.39	-6.43	30.96	54	-23.04	AV	Pass
V	2390	48.91	-6.62	42.29	74	-31.71	PK	Pass
V	2390	38.00	-6.62	31.38	54	-22.62	AV	Pass
V	2400	47.32	-6.43	40.89	74	-33.11	PK	Pass
V	2400	37.38	-6.43	30.95	54	-23.05	AV	Pass
802.11b-ant2_High Channel: 2462MHz								
H	2483.5	58.18	-6.17	52.01	74	-21.99	PK	Pass
H	2483.5	44.37	-6.17	38.20	54	-15.80	AV	Pass
H	2500	58.03	-6.13	51.90	74	-22.10	PK	Pass
H	2500	45.20	-6.13	39.07	54	-14.93	AV	Pass
V	2483.5	57.65	-6.17	51.48	74	-22.52	PK	Pass
V	2483.5	45.31	-6.17	39.14	54	-14.86	AV	Pass
V	2500	57.54	-6.13	51.41	74	-22.59	PK	Pass
V	2500	45.25	-6.13	39.12	54	-14.88	AV	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11g-ant1_Low Channel: 2412MHz								
H	2390	49.17	-6.62	42.55	74	-31.45	PK	Pass
H	2390	38.93	-6.62	32.31	54	-21.69	AV	Pass
H	2400	49.41	-6.43	42.98	74	-31.02	PK	Pass
H	2400	37.03	-6.43	30.60	54	-23.40	AV	Pass
V	2390	47.48	-6.62	40.86	74	-33.14	PK	Pass
V	2390	39.35	-6.62	32.73	54	-21.27	AV	Pass
V	2400	47.06	-6.43	40.63	74	-33.37	PK	Pass
V	2400	37.35	-6.43	30.92	54	-23.08	AV	Pass
802.11g-ant1_High Channel: 2462MHz								
H	2483.5	56.08	-6.17	49.91	74	-24.09	PK	Pass
H	2483.5	45.13	-6.17	38.96	54	-15.04	AV	Pass
H	2500	57.67	-6.13	51.54	74	-22.46	PK	Pass
H	2500	45.35	-6.13	39.22	54	-14.78	AV	Pass
V	2483.5	56.21	-6.17	50.04	74	-23.96	PK	Pass
V	2483.5	43.48	-6.17	37.31	54	-16.69	AV	Pass
V	2500	57.50	-6.13	51.37	74	-22.63	PK	Pass
V	2500	44.33	-6.13	38.20	54	-15.80	AV	Pass
802.11g-ant2_Low Channel: 2412MHz								
H	2390	47.43	-6.62	40.81	74	-33.19	PK	Pass
H	2390	38.20	-6.62	31.58	54	-22.42	AV	Pass
H	2400	48.95	-6.43	42.52	74	-31.48	PK	Pass
H	2400	39.21	-6.43	32.78	54	-21.22	AV	Pass
V	2390	48.20	-6.62	41.58	74	-32.42	PK	Pass
V	2390	37.49	-6.62	30.87	54	-23.13	AV	Pass
V	2400	47.28	-6.43	40.85	74	-33.15	PK	Pass
V	2400	38.37	-6.43	31.94	54	-22.06	AV	Pass
802.11g-ant2_High Channel: 2462MHz								
H	2483.5	56.57	-6.17	50.40	74	-23.60	PK	Pass
H	2483.5	45.54	-6.17	39.37	54	-14.63	AV	Pass
H	2500	56.88	-6.13	50.75	74	-23.25	PK	Pass
H	2500	43.45	-6.13	37.32	54	-16.68	AV	Pass
V	2483.5	56.69	-6.17	50.52	74	-23.48	PK	Pass
V	2483.5	43.37	-6.17	37.20	54	-16.80	AV	Pass
V	2500	56.10	-6.13	49.97	74	-24.03	PK	Pass
V	2500	45.47	-6.13	39.34	54	-14.66	AV	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11n20-ant1_Low Channel: 2412MHz								
H	2390	49.24	-6.62	42.62	74	-31.38	PK	Pass
H	2390	38.04	-6.62	31.42	54	-22.58	AV	Pass
H	2400	47.27	-6.43	40.84	74	-33.16	PK	Pass
H	2400	38.56	-6.43	32.13	54	-21.87	AV	Pass
V	2390	48.10	-6.62	41.48	74	-32.52	PK	Pass
V	2390	37.76	-6.62	31.14	54	-22.86	AV	Pass
V	2400	47.28	-6.43	40.85	74	-33.15	PK	Pass
V	2400	38.74	-6.43	32.31	54	-21.69	AV	Pass
802.11n20-ant1_High Channel: 2462MHz								
H	2483.5	56.46	-6.17	50.29	74	-23.71	PK	Pass
H	2483.5	43.08	-6.17	36.91	54	-17.09	AV	Pass
H	2500	56.55	-6.13	50.42	74	-23.58	PK	Pass
H	2500	43.07	-6.13	36.94	54	-17.06	AV	Pass
V	2483.5	58.06	-6.17	51.89	74	-22.11	PK	Pass
V	2483.5	45.57	-6.17	39.40	54	-14.60	AV	Pass
V	2500	56.90	-6.13	50.77	74	-23.23	PK	Pass
V	2500	45.24	-6.13	39.11	54	-14.89	AV	Pass
802.11n20-an2_Low Channel: 2412MHz								
H	2390	48.92	-6.62	42.30	74	-31.70	PK	Pass
H	2390	37.64	-6.62	31.02	54	-22.98	AV	Pass
H	2400	48.66	-6.43	42.23	74	-31.77	PK	Pass
H	2400	37.39	-6.43	30.96	54	-23.04	AV	Pass
V	2390	49.34	-6.62	42.72	74	-31.28	PK	Pass
V	2390	37.89	-6.62	31.27	54	-22.73	AV	Pass
V	2400	48.09	-6.43	41.66	74	-32.34	PK	Pass
V	2400	37.30	-6.43	30.87	54	-23.13	AV	Pass
802.11n20-ant2_High Channel: 2462MHz								
H	2483.5	57.79	-6.17	51.62	74	-22.38	PK	Pass
H	2483.5	43.28	-6.17	37.11	54	-16.89	AV	Pass
H	2500	58.41	-6.13	52.28	74	-21.72	PK	Pass
H	2500	43.79	-6.13	37.66	54	-16.34	AV	Pass
V	2483.5	57.59	-6.17	51.42	74	-22.58	PK	Pass
V	2483.5	43.51	-6.17	37.34	54	-16.66	AV	Pass
V	2500	57.63	-6.13	51.50	74	-22.50	PK	Pass
V	2500	43.75	-6.13	37.62	54	-16.38	AV	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11n40-ant1_Low Channel: 2412MHz								
H	2390	47.40	-6.62	40.78	74	-33.22	PK	Pass
H	2390	37.59	-6.62	30.97	54	-23.03	AV	Pass
H	2400	49.10	-6.43	42.67	74	-31.33	PK	Pass
H	2400	38.29	-6.43	31.86	54	-22.14	AV	Pass
V	2390	48.95	-6.62	42.33	74	-31.67	PK	Pass
V	2390	37.93	-6.62	31.31	54	-22.69	AV	Pass
V	2400	48.04	-6.43	41.61	74	-32.39	PK	Pass
V	2400	38.54	-6.43	32.11	54	-21.89	AV	Pass
802.11n40-ant1_High Channel: 2462MHz								
H	2483.5	56.32	-6.17	50.15	74	-23.85	PK	Pass
H	2483.5	44.40	-6.17	38.23	54	-15.77	AV	Pass
H	2500	58.28	-6.13	52.15	74	-21.85	PK	Pass
H	2500	43.10	-6.13	36.97	54	-17.03	AV	Pass
V	2483.5	58.50	-6.17	52.33	74	-21.67	PK	Pass
V	2483.5	45.34	-6.17	39.17	54	-14.83	AV	Pass
V	2500	58.46	-6.13	52.33	74	-21.67	PK	Pass
V	2500	44.92	-6.13	38.79	54	-15.21	AV	Pass
802.11n40-an2_Low Channel: 2412MHz								
H	2390	47.34	-6.62	40.72	74	-33.28	PK	Pass
H	2390	38.75	-6.62	32.13	54	-21.87	AV	Pass
H	2400	47.73	-6.43	41.30	74	-32.70	PK	Pass
H	2400	38.52	-6.43	32.09	54	-21.91	AV	Pass
V	2390	47.02	-6.62	40.40	74	-33.60	PK	Pass
V	2390	38.87	-6.62	32.25	54	-21.75	AV	Pass
V	2400	47.92	-6.43	41.49	74	-32.51	PK	Pass
V	2400	38.42	-6.43	31.99	54	-22.01	AV	Pass
802.11n40-ant2_High Channel: 2462MHz								
H	2483.5	58.21	-6.17	52.04	74	-21.96	PK	Pass
H	2483.5	43.17	-6.17	37.00	54	-17.00	AV	Pass
H	2500	56.85	-6.13	50.72	74	-23.28	PK	Pass
H	2500	43.66	-6.13	37.53	54	-16.47	AV	Pass
V	2483.5	56.41	-6.17	50.24	74	-23.76	PK	Pass
V	2483.5	45.53	-6.17	39.36	54	-14.64	AV	Pass
V	2500	57.72	-6.13	51.59	74	-22.41	PK	Pass
V	2500	43.57	-6.13	37.44	54	-16.56	AV	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11n20-antMIMO_Low Channel: 2412MHz								
H	2390	48.55	-6.62	41.93	74	-32.07	PK	Pass
H	2390	38.71	-6.62	32.09	54	-21.91	AV	Pass
H	2400	48.29	-6.43	41.86	74	-32.14	PK	Pass
H	2400	38.00	-6.43	31.57	54	-22.43	AV	Pass
V	2390	49.49	-6.62	42.87	74	-31.13	PK	Pass
V	2390	37.68	-6.62	31.06	54	-22.94	AV	Pass
V	2400	49.33	-6.43	42.90	74	-31.10	PK	Pass
V	2400	39.29	-6.43	32.86	54	-21.14	AV	Pass
802.11n20-antMIMO_High Channel: 2462MHz								
H	2483.5	56.05	-6.17	49.88	74	-24.12	PK	Pass
H	2483.5	44.15	-6.17	37.98	54	-16.02	AV	Pass
H	2500	56.36	-6.13	50.23	74	-23.77	PK	Pass
H	2500	45.11	-6.13	38.98	54	-15.02	AV	Pass
V	2483.5	58.19	-6.17	52.02	74	-21.98	PK	Pass
V	2483.5	45.09	-6.17	38.92	54	-15.08	AV	Pass
V	2500	58.49	-6.13	52.36	74	-21.64	PK	Pass
V	2500	44.20	-6.13	38.07	54	-15.93	AV	Pass
802.11n40-antMIMO_Low Channel: 2412MHz								
H	2390	48.33	-6.62	41.71	74	-32.29	PK	Pass
H	2390	39.15	-6.62	32.53	54	-21.47	AV	Pass
H	2400	48.02	-6.43	41.59	74	-32.41	PK	Pass
H	2400	37.45	-6.43	31.02	54	-22.98	AV	Pass
V	2390	49.23	-6.62	42.61	74	-31.39	PK	Pass
V	2390	37.21	-6.62	30.59	54	-23.41	AV	Pass
V	2400	48.33	-6.43	41.90	74	-32.10	PK	Pass
V	2400	37.71	-6.43	31.28	54	-22.72	AV	Pass
802.11n40-antMIMO_High Channel: 2462MHz								
H	2483.5	57.07	-6.17	50.90	74	-23.10	PK	Pass
H	2483.5	43.77	-6.17	37.60	54	-16.40	AV	Pass
H	2500	56.01	-6.13	49.88	74	-24.12	PK	Pass
H	2500	44.07	-6.13	37.94	54	-16.06	AV	Pass
V	2483.5	58.58	-6.17	52.41	74	-21.59	PK	Pass
V	2483.5	44.60	-6.17	38.43	54	-15.57	AV	Pass
V	2500	57.21	-6.13	51.08	74	-22.92	PK	Pass
V	2500	43.08	-6.13	36.95	54	-17.05	AV	Pass

4.6 Emissions in frequency bands (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. Remark: 1) For emission below 1GHz, through pre-scan found the worst case is the lowest		

channel. Only the worst case is recorded in the report.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor
3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.


4.6.1 E.U.T. Operation:

Operating Environment:


Temperature:	23.7 °C	Humidity:	50 %	Atmospheric Pressure:	101.3 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.6.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

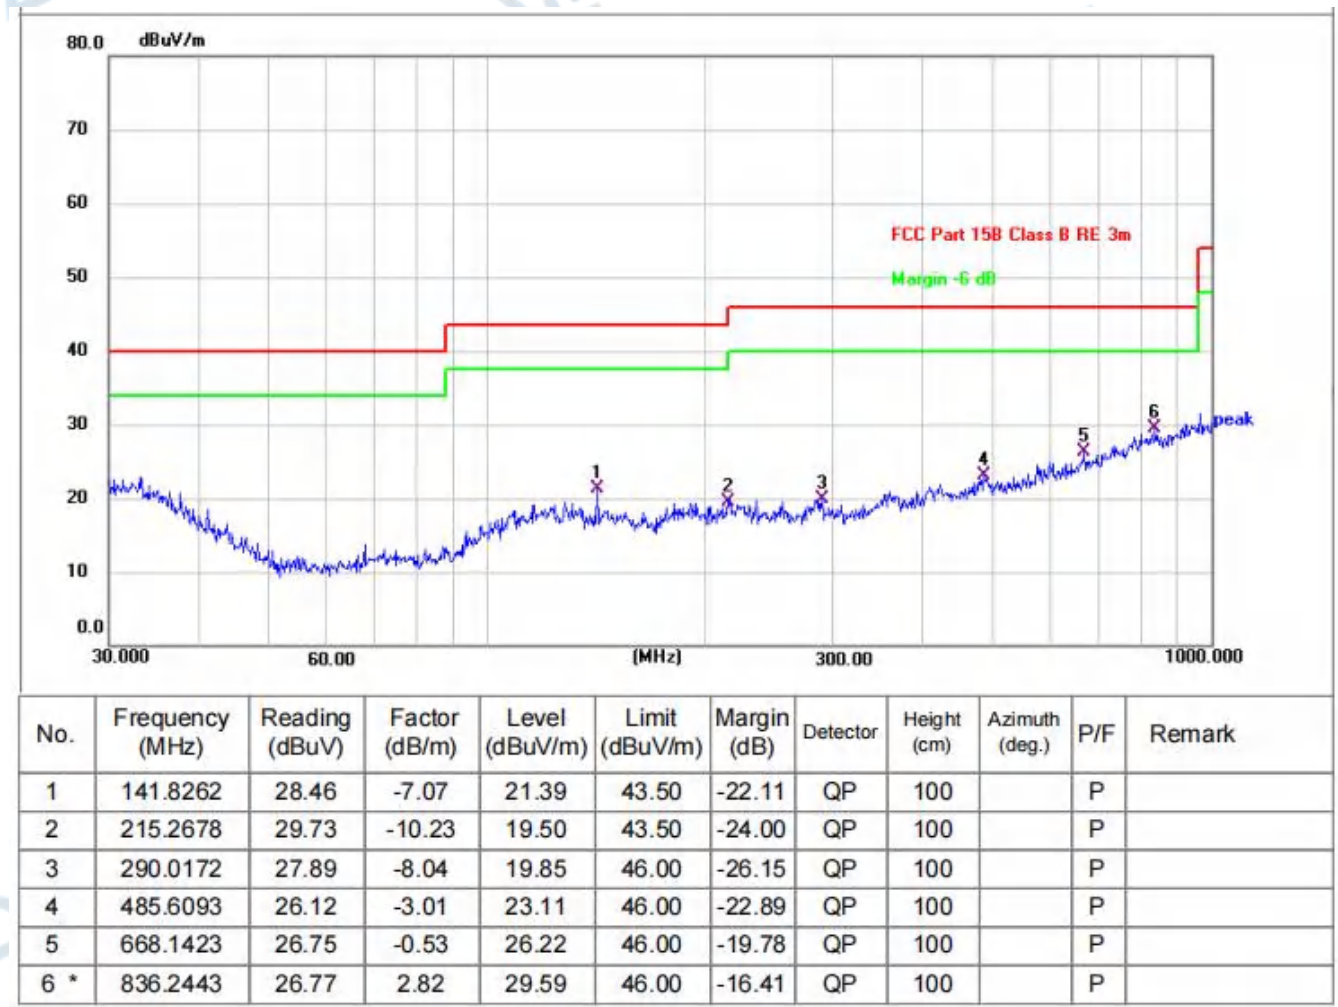

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

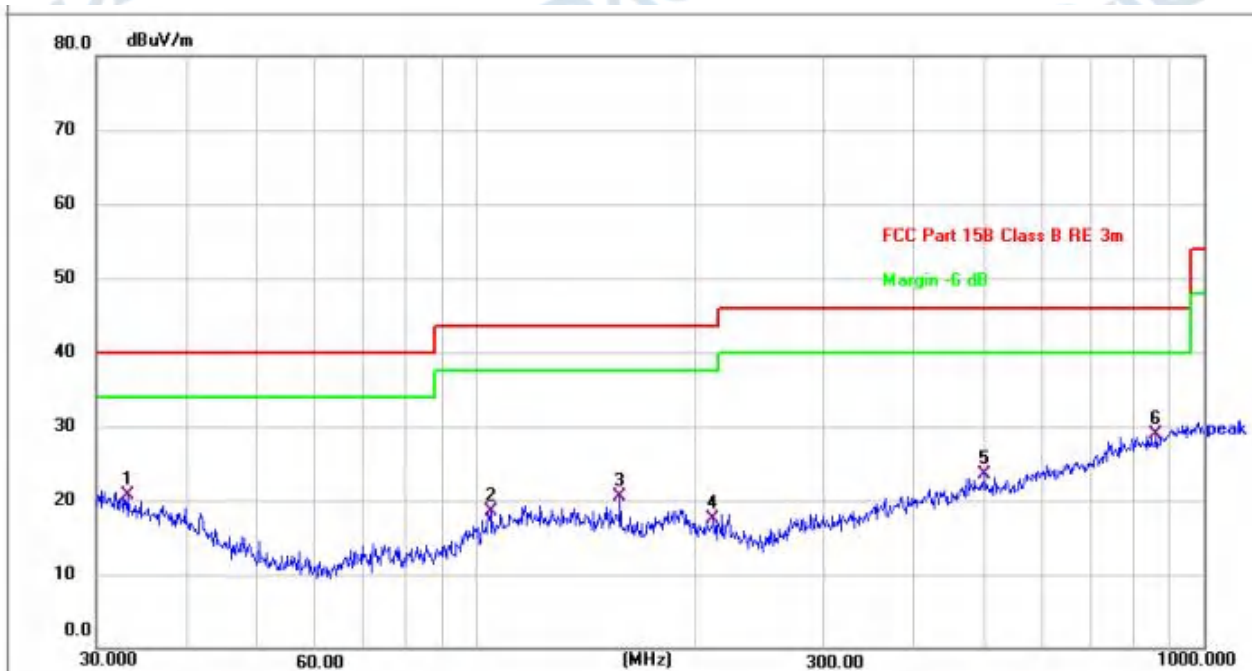

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	33.2112	25.97	-5.31	20.66	40.00	-19.34	QP	100		P	
2	104.5361	26.52	-7.94	18.58	43.50	-24.92	QP	100		P	
3	157.5588	28.84	-8.34	20.50	43.50	-23.00	QP	100		P	
4	211.5265	27.18	-9.69	17.49	43.50	-26.01	QP	100		P	
5	499.4247	26.80	-3.33	23.47	46.00	-22.53	QP	100		P	
6 *	860.0352	26.08	2.81	28.89	46.00	-17.11	QP	100		P	

4.7 Emissions in frequency bands (above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2020 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. Remark:		

1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report. 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
--

4.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	48 %	Atmospheric Pressure:	101.3 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.7.2 Test Data:

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11b-ant1_Low Channel: 2412MHz								
V	4824	54.18	-0.17	54.01	74	-19.99	PK	Pass
V	4824	33.02	-0.17	32.85	54	-21.15	AV	Pass
V	7236	57.39	4.78	62.17	74	-11.83	PK	Pass
V	7236	36.30	4.78	41.08	54	-12.92	AV	Pass
V	9648	58.45	8.08	66.53	74	-7.47	PK	Pass
V	9648	36.99	8.08	45.07	54	-8.93	AV	Pass
H	4824	53.84	-0.17	53.67	74	-20.33	PK	Pass
H	4824	33.89	-0.17	33.72	54	-20.28	AV	Pass
H	7236	56.66	4.78	61.44	74	-12.56	PK	Pass
H	7236	36.02	4.78	40.80	54	-13.20	AV	Pass
H	9648	56.48	8.08	64.56	74	-9.44	PK	Pass
H	9648	37.33	8.08	45.41	54	-8.59	AV	Pass
802.11b-ant1_Middle Channel: 2437MHz								
V	4874	53.47	-0.17	53.30	74	-20.70	PK	Pass
V	4874	34.58	-0.17	34.41	54	-19.59	AV	Pass
V	7311	56.90	4.78	61.68	74	-12.32	PK	Pass
V	7311	37.17	4.78	41.95	54	-12.05	AV	Pass
V	9748	57.86	8.08	65.94	74	-8.06	PK	Pass
V	9748	36.42	8.08	44.50	54	-9.50	AV	Pass
H	4874	55.28	-0.17	55.11	74	-18.89	PK	Pass
H	4874	33.21	-0.17	33.04	54	-20.96	AV	Pass
H	7311	55.33	4.78	60.11	74	-13.89	PK	Pass
H	7311	36.83	4.78	41.61	54	-12.39	AV	Pass

H	9748	57.30	8.08	65.38	74	-8.62	PK	Pass
H	9748	38.58	8.08	46.66	54	-7.34	AV	Pass
802.11b-ant1_High Channel:2462MHz								
V	4924	53.00	-0.17	52.83	74	-21.17	PK	Pass
V	4924	33.01	-0.17	32.84	54	-21.16	AV	Pass
V	7386	55.33	4.78	60.11	74	-13.89	PK	Pass
V	7386	35.62	4.78	40.40	54	-13.60	AV	Pass
V	9848	57.25	8.08	65.33	74	-8.67	PK	Pass
V	9848	36.39	8.08	44.47	54	-9.53	AV	Pass
H	4924	54.62	-0.17	54.45	74	-19.55	PK	Pass
H	4924	34.65	-0.17	34.48	54	-19.52	AV	Pass
H	7386	57.49	4.78	62.27	74	-11.73	PK	Pass
H	7386	36.55	4.78	41.33	54	-12.67	AV	Pass
H	9848	57.59	8.08	65.67	74	-8.33	PK	Pass
H	9848	38.47	8.08	46.55	54	-7.45	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11b-ant2_Low Channel: 2412MHz								
V	4824	54.62	-0.17	54.45	74	-19.55	PK	Pass
V	4824	33.13	-0.17	32.96	54	-21.04	AV	Pass
V	7236	56.10	4.78	60.88	74	-13.12	PK	Pass
V	7236	36.52	4.78	41.30	54	-12.70	AV	Pass
V	9648	57.35	8.08	65.43	74	-8.57	PK	Pass
V	9648	36.19	8.08	44.27	54	-9.73	AV	Pass
H	4824	55.32	-0.17	55.15	74	-18.85	PK	Pass
H	4824	34.41	-0.17	34.24	54	-19.76	AV	Pass
H	7236	56.25	4.78	61.03	74	-12.97	PK	Pass
H	7236	35.38	4.78	40.16	54	-13.84	AV	Pass
H	9648	57.23	8.08	65.31	74	-8.69	PK	Pass
H	9648	36.48	8.08	44.56	54	-9.44	AV	Pass
802.11b-ant2_Middle Channel:2437MHz								
V	4874	53.42	-0.17	53.25	74	-20.75	PK	Pass
V	4874	34.17	-0.17	34.00	54	-20.00	AV	Pass
V	7311	56.41	4.78	61.19	74	-12.81	PK	Pass
V	7311	35.03	4.78	39.81	54	-14.19	AV	Pass
V	9748	57.58	8.08	65.66	74	-8.34	PK	Pass
V	9748	36.98	8.08	45.06	54	-8.94	AV	Pass
H	4874	53.96	-0.17	53.79	74	-20.21	PK	Pass
H	4874	35.05	-0.17	34.88	54	-19.12	AV	Pass
H	7311	56.55	4.78	61.33	74	-12.67	PK	Pass
H	7311	36.84	4.78	41.62	54	-12.38	AV	Pass

H	9748	58.51	8.08	66.59	74	-7.41	PK	Pass
H	9748	37.06	8.08	45.14	54	-8.86	AV	Pass
802.11b-ant2_High Channel:2462MHz								
V	4924	55.54	-0.17	55.37	74	-18.63	PK	Pass
V	4924	33.95	-0.17	33.78	54	-20.22	AV	Pass
V	7386	56.75	4.78	61.53	74	-12.47	PK	Pass
V	7386	35.70	4.78	40.48	54	-13.52	AV	Pass
V	9848	56.66	8.08	64.74	74	-9.26	PK	Pass
V	9848	37.64	8.08	45.72	54	-8.28	AV	Pass
H	4924	53.31	-0.17	53.14	74	-20.86	PK	Pass
H	4924	35.48	-0.17	35.31	54	-18.69	AV	Pass
H	7386	57.10	4.78	61.88	74	-12.12	PK	Pass
H	7386	36.69	4.78	41.47	54	-12.53	AV	Pass
H	9848	57.75	8.08	65.83	74	-8.17	PK	Pass
H	9848	36.26	8.08	44.34	54	-9.66	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11g-ant1_Low Channel: 2412MHz								
V	4824	53.45	-0.17	53.28	74	-20.72	PK	Pass
V	4824	34.94	-0.17	34.77	54	-19.23	AV	Pass
V	7236	55.10	4.78	59.88	74	-14.12	PK	Pass
V	7236	35.74	4.78	40.52	54	-13.48	AV	Pass
V	9648	58.49	8.08	66.57	74	-7.43	PK	Pass
V	9648	37.03	8.08	45.11	54	-8.89	AV	Pass
H	4824	53.20	-0.17	53.03	74	-20.97	PK	Pass
H	4824	33.75	-0.17	33.58	54	-20.42	AV	Pass
H	7236	55.30	4.78	60.08	74	-13.92	PK	Pass
H	7236	35.61	4.78	40.39	54	-13.61	AV	Pass
H	9648	56.27	8.08	64.35	74	-9.65	PK	Pass
H	9648	36.37	8.08	44.45	54	-9.55	AV	Pass
802.11g-ant1_Middle Channel:2437MHz								
V	4874	53.10	-0.17	52.93	74	-21.07	PK	Pass
V	4874	33.53	-0.17	33.36	54	-20.64	AV	Pass
V	7311	55.96	4.78	60.74	74	-13.26	PK	Pass
V	7311	36.98	4.78	41.76	54	-12.24	AV	Pass
V	9748	58.06	8.08	66.14	74	-7.86	PK	Pass
V	9748	38.52	8.08	46.60	54	-7.40	AV	Pass
H	4874	54.17	-0.17	54.00	74	-20.00	PK	Pass
H	4874	33.44	-0.17	33.27	54	-20.73	AV	Pass
H	7311	56.14	4.78	60.92	74	-13.08	PK	Pass
H	7311	36.08	4.78	40.86	54	-13.14	AV	Pass

H	9748	56.29	8.08	64.37	74	-9.63	PK	Pass
H	9748	38.39	8.08	46.47	54	-7.53	AV	Pass
802.11g-ant1_High Channel:2462MHz								
V	4924	54.92	-0.17	54.75	74	-19.25	PK	Pass
V	4924	34.78	-0.17	34.61	54	-19.39	AV	Pass
V	7386	56.64	4.78	61.42	74	-12.58	PK	Pass
V	7386	36.13	4.78	40.91	54	-13.09	AV	Pass
V	9848	58.34	8.08	66.42	74	-7.58	PK	Pass
V	9848	37.46	8.08	45.54	54	-8.46	AV	Pass
H	4924	53.41	-0.17	53.24	74	-20.76	PK	Pass
H	4924	34.77	-0.17	34.60	54	-19.40	AV	Pass
H	7386	56.18	4.78	60.96	74	-13.04	PK	Pass
H	7386	36.14	4.78	40.92	54	-13.08	AV	Pass
H	9848	56.09	8.08	64.17	74	-9.83	PK	Pass
H	9848	36.97	8.08	45.05	54	-8.95	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11g-ant2_Low Channel: 2412MHz								
V	4824	55.33	-0.17	55.16	74	-18.84	PK	Pass
V	4824	33.20	-0.17	33.03	54	-20.97	AV	Pass
V	7236	56.88	4.78	61.66	74	-12.34	PK	Pass
V	7236	36.65	4.78	41.43	54	-12.57	AV	Pass
V	9648	57.19	8.08	65.27	74	-8.73	PK	Pass
V	9648	37.92	8.08	46.00	54	-8.00	AV	Pass
H	4824	55.35	-0.17	55.18	74	-18.82	PK	Pass
H	4824	34.08	-0.17	33.91	54	-20.09	AV	Pass
H	7236	56.78	4.78	61.56	74	-12.44	PK	Pass
H	7236	37.51	4.78	42.29	54	-11.71	AV	Pass
H	9648	57.90	8.08	65.98	74	-8.02	PK	Pass
H	9648	36.90	8.08	44.98	54	-9.02	AV	Pass
802.11g-ant2_Middle Channel:2437MHz								
V	4874	54.79	-0.17	54.62	74	-19.38	PK	Pass
V	4874	33.91	-0.17	33.74	54	-20.26	AV	Pass
V	7311	56.79	4.78	61.57	74	-12.43	PK	Pass
V	7311	36.94	4.78	41.72	54	-12.28	AV	Pass
V	9748	56.89	8.08	64.97	74	-9.03	PK	Pass
V	9748	36.22	8.08	44.30	54	-9.70	AV	Pass
H	4874	54.08	-0.17	53.91	74	-20.09	PK	Pass
H	4874	33.46	-0.17	33.29	54	-20.71	AV	Pass
H	7311	56.21	4.78	60.99	74	-13.01	PK	Pass
H	7311	35.49	4.78	40.27	54	-13.73	AV	Pass

H	9748	57.52	8.08	65.60	74	-8.40	PK	Pass
H	9748	37.46	8.08	45.54	54	-8.46	AV	Pass
802.11g-ant2_High Channel:2462MHz								
V	4924	53.73	-0.17	53.56	74	-20.44	PK	Pass
V	4924	33.50	-0.17	33.33	54	-20.67	AV	Pass
V	7386	57.46	4.78	62.24	74	-11.76	PK	Pass
V	7386	35.03	4.78	39.81	54	-14.19	AV	Pass
V	9848	57.60	8.08	65.68	74	-8.32	PK	Pass
V	9848	38.21	8.08	46.29	54	-7.71	AV	Pass
H	4924	53.03	-0.17	52.86	74	-21.14	PK	Pass
H	4924	33.24	-0.17	33.07	54	-20.93	AV	Pass
H	7386	56.67	4.78	61.45	74	-12.55	PK	Pass
H	7386	36.50	4.78	41.28	54	-12.72	AV	Pass
H	9848	57.99	8.08	66.07	74	-7.93	PK	Pass
H	9848	36.68	8.08	44.76	54	-9.24	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11n20-ant1_Low Channel: 2412MHz								
V	4824	54.24	-0.17	54.07	74	-19.93	PK	Pass
V	4824	34.64	-0.17	34.47	54	-19.53	AV	Pass
V	7236	56.89	4.78	61.67	74	-12.33	PK	Pass
V	7236	36.02	4.78	40.80	54	-13.20	AV	Pass
V	9648	58.58	8.08	66.66	74	-7.34	PK	Pass
V	9648	37.22	8.08	45.30	54	-8.70	AV	Pass
H	4824	54.89	-0.17	54.72	74	-19.28	PK	Pass
H	4824	33.57	-0.17	33.40	54	-20.60	AV	Pass
H	7236	57.29	4.78	62.07	74	-11.93	PK	Pass
H	7236	35.05	4.78	39.83	54	-14.17	AV	Pass
H	9648	57.65	8.08	65.73	74	-8.27	PK	Pass
H	9648	38.16	8.08	46.24	54	-7.76	AV	Pass
802.11n20-ant1_Middle Channel:2437MHz								
V	4874	55.13	-0.17	54.96	74	-19.04	PK	Pass
V	4874	34.33	-0.17	34.16	54	-19.84	AV	Pass
V	7311	55.03	4.78	59.81	74	-14.19	PK	Pass
V	7311	36.49	4.78	41.27	54	-12.73	AV	Pass
V	9748	57.17	8.08	65.25	74	-8.75	PK	Pass
V	9748	38.35	8.08	46.43	54	-7.57	AV	Pass
H	4874	55.41	-0.17	55.24	74	-18.76	PK	Pass
H	4874	33.15	-0.17	32.98	54	-21.02	AV	Pass
H	7311	56.44	4.78	61.22	74	-12.78	PK	Pass
H	7311	36.57	4.78	41.35	54	-12.65	AV	Pass

H	9748	57.91	8.08	65.99	74	-8.01	PK	Pass
H	9748	38.17	8.08	46.25	54	-7.75	AV	Pass
802.11n20-ant1_High Channel:2462MHz								
V	4924	55.00	-0.17	54.83	74	-19.17	PK	Pass
V	4924	34.23	-0.17	34.06	54	-19.94	AV	Pass
V	7386	56.85	4.78	61.63	74	-12.37	PK	Pass
V	7386	35.86	4.78	40.64	54	-13.36	AV	Pass
V	9848	57.83	8.08	65.91	74	-8.09	PK	Pass
V	9848	37.84	8.08	45.92	54	-8.08	AV	Pass
H	4924	55.56	-0.17	55.39	74	-18.61	PK	Pass
H	4924	34.63	-0.17	34.46	54	-19.54	AV	Pass
H	7386	55.26	4.78	60.04	74	-13.96	PK	Pass
H	7386	36.71	4.78	41.49	54	-12.51	AV	Pass
H	9848	57.36	8.08	65.44	74	-8.56	PK	Pass
H	9848	37.39	8.08	45.47	54	-8.53	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11n20-ant2_Low Channel: 2412MHz								
V	4824	54.07	-0.17	53.90	74	-20.10	PK	Pass
V	4824	34.31	-0.17	34.14	54	-19.86	AV	Pass
V	7236	55.05	4.78	59.83	74	-14.17	PK	Pass
V	7236	37.21	4.78	41.99	54	-12.01	AV	Pass
V	9648	57.94	8.08	66.02	74	-7.98	PK	Pass
V	9648	37.39	8.08	45.47	54	-8.53	AV	Pass
H	4824	53.61	-0.17	53.44	74	-20.56	PK	Pass
H	4824	33.46	-0.17	33.29	54	-20.71	AV	Pass
H	7236	56.65	4.78	61.43	74	-12.57	PK	Pass
H	7236	35.36	4.78	40.14	54	-13.86	AV	Pass
H	9648	56.94	8.08	65.02	74	-8.98	PK	Pass
H	9648	38.36	8.08	46.44	54	-7.56	AV	Pass
802.11n20-ant2_Middle Channel:2437MHz								
V	4874	54.21	-0.17	54.04	74	-19.96	PK	Pass
V	4874	33.08	-0.17	32.91	54	-21.09	AV	Pass
V	7311	56.34	4.78	61.12	74	-12.88	PK	Pass
V	7311	36.85	4.78	41.63	54	-12.37	AV	Pass
V	9748	57.93	8.08	66.01	74	-7.99	PK	Pass
V	9748	37.31	8.08	45.39	54	-8.61	AV	Pass
H	4874	55.43	-0.17	55.26	74	-18.74	PK	Pass
H	4874	33.54	-0.17	33.37	54	-20.63	AV	Pass
H	7311	56.64	4.78	61.42	74	-12.58	PK	Pass
H	7311	35.45	4.78	40.23	54	-13.77	AV	Pass

H	9748	57.56	8.08	65.64	74	-8.36	PK	Pass
H	9748	38.22	8.08	46.30	54	-7.70	AV	Pass
802.11n20-ant2_High Channel:2462MHz								
V	4924	54.37	-0.17	54.20	74	-19.80	PK	Pass
V	4924	33.76	-0.17	33.59	54	-20.41	AV	Pass
V	7386	57.44	4.78	62.22	74	-11.78	PK	Pass
V	7386	37.29	4.78	42.07	54	-11.93	AV	Pass
V	9848	58.21	8.08	66.29	74	-7.71	PK	Pass
V	9848	36.22	8.08	44.30	54	-9.70	AV	Pass
H	4924	54.06	-0.17	53.89	74	-20.11	PK	Pass
H	4924	35.01	-0.17	34.84	54	-19.16	AV	Pass
H	7386	57.28	4.78	62.06	74	-11.94	PK	Pass
H	7386	36.57	4.78	41.35	54	-12.65	AV	Pass
H	9848	57.04	8.08	65.12	74	-8.88	PK	Pass
H	9848	38.43	8.08	46.51	54	-7.49	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11n40-ant1_Low Channel: 2422MHz								
V	4824	53.99	-0.17	53.82	74	-20.18	PK	Pass
V	4824	33.76	-0.17	33.59	54	-20.41	AV	Pass
V	7236	56.36	4.78	61.14	74	-12.86	PK	Pass
V	7236	36.45	4.78	41.23	54	-12.77	AV	Pass
V	9648	57.05	8.08	65.13	74	-8.87	PK	Pass
V	9648	38.28	8.08	46.36	54	-7.64	AV	Pass
H	4824	54.79	-0.17	54.62	74	-19.38	PK	Pass
H	4824	34.39	-0.17	34.22	54	-19.78	AV	Pass
H	7236	56.44	4.78	61.22	74	-12.78	PK	Pass
H	7236	37.01	4.78	41.79	54	-12.21	AV	Pass
H	9648	56.33	8.08	64.41	74	-9.59	PK	Pass
H	9648	36.03	8.08	44.11	54	-9.89	AV	Pass
802.11n40-ant1_Middle Channel:2437MHz								
V	4874	55.48	-0.17	55.31	74	-18.69	PK	Pass
V	4874	35.08	-0.17	34.91	54	-19.09	AV	Pass
V	7311	56.76	4.78	61.54	74	-12.46	PK	Pass
V	7311	36.19	4.78	40.97	54	-13.03	AV	Pass
V	9748	57.84	8.08	65.92	74	-8.08	PK	Pass
V	9748	38.54	8.08	46.62	54	-7.38	AV	Pass
H	4874	53.37	-0.17	53.20	74	-20.80	PK	Pass
H	4874	34.81	-0.17	34.64	54	-19.36	AV	Pass
H	7311	55.46	4.78	60.24	74	-13.76	PK	Pass
H	7311	37.55	4.78	42.33	54	-11.67	AV	Pass

H	9748	58.20	8.08	66.28	74	-7.72	PK	Pass
H	9748	38.10	8.08	46.18	54	-7.82	AV	Pass
802.11n40-ant1_High Channel:2462MHz								
V	4924	54.51	-0.17	54.34	74	-19.66	PK	Pass
V	4924	34.99	-0.17	34.82	54	-19.18	AV	Pass
V	7386	57.28	4.78	62.06	74	-11.94	PK	Pass
V	7386	37.21	4.78	41.99	54	-12.01	AV	Pass
V	9848	58.35	8.08	66.43	74	-7.57	PK	Pass
V	9848	36.74	8.08	44.82	54	-9.18	AV	Pass
H	4924	53.26	-0.17	53.09	74	-20.91	PK	Pass
H	4924	34.97	-0.17	34.80	54	-19.20	AV	Pass
H	7386	55.71	4.78	60.49	74	-13.51	PK	Pass
H	7386	37.01	4.78	41.79	54	-12.21	AV	Pass
H	9848	58.49	8.08	66.57	74	-7.43	PK	Pass
H	9848	36.91	8.08	44.99	54	-9.01	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit	Margin	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
802.11n40-ant2_Low Channel: 2422MHz								
V	4824	54.53	-0.17	54.36	74	-19.64	PK	Pass
V	4824	34.55	-0.17	34.38	54	-19.62	AV	Pass
V	7236	56.76	4.78	61.54	74	-12.46	PK	Pass
V	7236	36.67	4.78	41.45	54	-12.55	AV	Pass
V	9648	57.69	8.08	65.77	74	-8.23	PK	Pass
V	9648	36.76	8.08	44.84	54	-9.16	AV	Pass
H	4824	54.20	-0.17	54.03	74	-19.97	PK	Pass
H	4824	34.88	-0.17	34.71	54	-19.29	AV	Pass
H	7236	57.09	4.78	61.87	74	-12.13	PK	Pass
H	7236	35.24	4.78	40.02	54	-13.98	AV	Pass
H	9648	56.62	8.08	64.70	74	-9.30	PK	Pass
H	9648	36.14	8.08	44.22	54	-9.78	AV	Pass
802.11n40-ant2_Middle Channel:2437MHz								
V	4874	55.34	-0.17	55.17	74	-18.83	PK	Pass
V	4874	34.18	-0.17	34.01	54	-19.99	AV	Pass
V	7311	55.62	4.78	60.40	74	-13.60	PK	Pass
V	7311	35.02	4.78	39.80	54	-14.20	AV	Pass
V	9748	57.09	8.08	65.17	74	-8.83	PK	Pass
V	9748	37.85	8.08	45.93	54	-8.07	AV	Pass
H	4874	55.05	-0.17	54.88	74	-19.12	PK	Pass
H	4874	33.35	-0.17	33.18	54	-20.82	AV	Pass
H	7311	55.15	4.78	59.93	74	-14.07	PK	Pass
H	7311	35.65	4.78	40.43	54	-13.57	AV	Pass

H	9748	56.47	8.08	64.55	74	-9.45	PK	Pass
H	9748	37.75	8.08	45.83	54	-8.17	AV	Pass
802.11n40-ant2_High Channel:2462MHz								
V	4924	54.06	-0.17	53.89	74	-20.11	PK	Pass
V	4924	33.32	-0.17	33.15	54	-20.85	AV	Pass
V	7386	57.15	4.78	61.93	74	-12.07	PK	Pass
V	7386	36.52	4.78	41.30	54	-12.70	AV	Pass
V	9848	58.45	8.08	66.53	74	-7.47	PK	Pass
V	9848	38.05	8.08	46.13	54	-7.87	AV	Pass
H	4924	54.75	-0.17	54.58	74	-19.42	PK	Pass
H	4924	33.96	-0.17	33.79	54	-20.21	AV	Pass
H	7386	57.33	4.78	62.11	74	-11.89	PK	Pass
H	7386	35.56	4.78	40.34	54	-13.66	AV	Pass
H	9848	56.24	8.08	64.32	74	-9.68	PK	Pass
H	9848	38.55	8.08	46.63	54	-7.37	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit (dBuV/m)	Margin (dBuV/m)	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)				
802.11n20-antMIMO_Low Channel: 2412MHz								
V	4824	54.85	-0.17	54.68	74	-19.32	PK	Pass
V	4824	33.94	-0.17	33.77	54	-20.23	AV	Pass
V	7236	57.48	4.78	62.26	74	-11.74	PK	Pass
V	7236	35.84	4.78	40.62	54	-13.38	AV	Pass
V	9648	56.03	8.08	64.11	74	-9.89	PK	Pass
V	9648	37.22	8.08	45.30	54	-8.70	AV	Pass
H	4824	55.52	-0.17	55.35	74	-18.65	PK	Pass
H	4824	33.24	-0.17	33.07	54	-20.93	AV	Pass
H	7236	56.08	4.78	60.86	74	-13.14	PK	Pass
H	7236	36.51	4.78	41.29	54	-12.71	AV	Pass
H	9648	57.28	8.08	65.36	74	-8.64	PK	Pass
H	9648	37.20	8.08	45.28	54	-8.72	AV	Pass
802.11n20-antMIMO_Middle Channel:2437MHz								
V	4874	53.60	-0.17	53.43	74	-20.57	PK	Pass
V	4874	34.73	-0.17	34.56	54	-19.44	AV	Pass
V	7311	57.25	4.78	62.03	74	-11.97	PK	Pass
V	7311	35.14	4.78	39.92	54	-14.08	AV	Pass
V	9748	57.02	8.08	65.10	74	-8.90	PK	Pass
V	9748	37.04	8.08	45.12	54	-8.88	AV	Pass
H	4874	55.31	-0.17	55.14	74	-18.86	PK	Pass
H	4874	34.77	-0.17	34.60	54	-19.40	AV	Pass
H	7311	56.49	4.78	61.27	74	-12.73	PK	Pass
H	7311	36.15	4.78	40.93	54	-13.07	AV	Pass


H	9748	56.80	8.08	64.88	74	-9.12	PK	Pass
H	9748	38.50	8.08	46.58	54	-7.42	AV	Pass
802.11n20-antMIMO_High Channel:2462MHz								
V	4924	54.48	-0.17	54.31	74	-19.69	PK	Pass
V	4924	34.04	-0.17	33.87	54	-20.13	AV	Pass
V	7386	57.43	4.78	62.21	74	-11.79	PK	Pass
V	7386	36.07	4.78	40.85	54	-13.15	AV	Pass
V	9848	56.77	8.08	64.85	74	-9.15	PK	Pass
V	9848	38.15	8.08	46.23	54	-7.77	AV	Pass
H	4924	53.27	-0.17	53.10	74	-20.90	PK	Pass
H	4924	35.54	-0.17	35.37	54	-18.63	AV	Pass
H	7386	57.02	4.78	61.80	74	-12.20	PK	Pass
H	7386	37.54	4.78	42.32	54	-11.68	AV	Pass
H	9848	58.28	8.08	66.36	74	-7.64	PK	Pass
H	9848	38.44	8.08	46.52	54	-7.48	PK	Pass

Polar	Frequency	Meter Reading	Cable Loss	Level	Limit (dBuV/m)	Margin (dBuV/m)	Detector Type	Result
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)				
802.11n40-antMIMO_Low Channel: 2422MHz								
V	4824	55.37	-0.17	55.20	74	-18.80	PK	Pass
V	4824	35.41	-0.17	35.24	54	-18.76	AV	Pass
V	7236	56.84	4.78	61.62	74	-12.38	PK	Pass
V	7236	36.02	4.78	40.80	54	-13.20	AV	Pass
V	9648	58.44	8.08	66.52	74	-7.48	PK	Pass
V	9648	36.48	8.08	44.56	54	-9.44	AV	Pass
H	4824	54.04	-0.17	53.87	74	-20.13	PK	Pass
H	4824	33.27	-0.17	33.10	54	-20.90	AV	Pass
H	7236	57.07	4.78	61.85	74	-12.15	PK	Pass
H	7236	35.05	4.78	39.83	54	-14.17	AV	Pass
H	9648	56.20	8.08	64.28	74	-9.72	PK	Pass
H	9648	36.22	8.08	44.30	54	-9.70	AV	Pass
802.11n40-antMIMO_Middle Channel:2437MHz								
V	4874	53.38	-0.17	53.21	74	-20.79	PK	Pass
V	4874	34.68	-0.17	34.51	54	-19.49	AV	Pass
V	7311	55.28	4.78	60.06	74	-13.94	PK	Pass
V	7311	36.42	4.78	41.20	54	-12.80	AV	Pass
V	9748	58.03	8.08	66.11	74	-7.89	PK	Pass
V	9748	37.65	8.08	45.73	54	-8.27	AV	Pass
H	4874	54.81	-0.17	54.64	74	-19.36	PK	Pass
H	4874	34.02	-0.17	33.85	54	-20.15	AV	Pass
H	7311	55.82	4.78	60.60	74	-13.40	PK	Pass
H	7311	35.23	4.78	40.01	54	-13.99	AV	Pass


H	9748	56.85	8.08	64.93	74	-9.07	PK	Pass
H	9748	38.19	8.08	46.27	54	-7.73	AV	Pass
802.11n40-antMIMO_High Channel:2462MHz								
V	4924	55.04	-0.17	54.87	74	-19.13	PK	Pass
V	4924	33.95	-0.17	33.78	54	-20.22	AV	Pass
V	7386	55.38	4.78	60.16	74	-13.84	PK	Pass
V	7386	35.38	4.78	40.16	54	-13.84	AV	Pass
V	9848	57.07	8.08	65.15	74	-8.85	PK	Pass
V	9848	37.79	8.08	45.87	54	-8.13	AV	Pass
H	4924	54.74	-0.17	54.57	74	-19.43	PK	Pass
H	4924	35.31	-0.17	35.14	54	-18.86	AV	Pass
H	7386	56.19	4.78	60.97	74	-13.03	PK	Pass
H	7386	37.21	4.78	41.99	54	-12.01	AV	Pass
H	9848	57.63	8.08	65.71	74	-8.29	PK	Pass
H	9848	36.44	8.08	44.52	54	-9.48	PK	Pass

5 TEST SETUP PHOTOS

Emissions in frequency bands (below 1GHz)

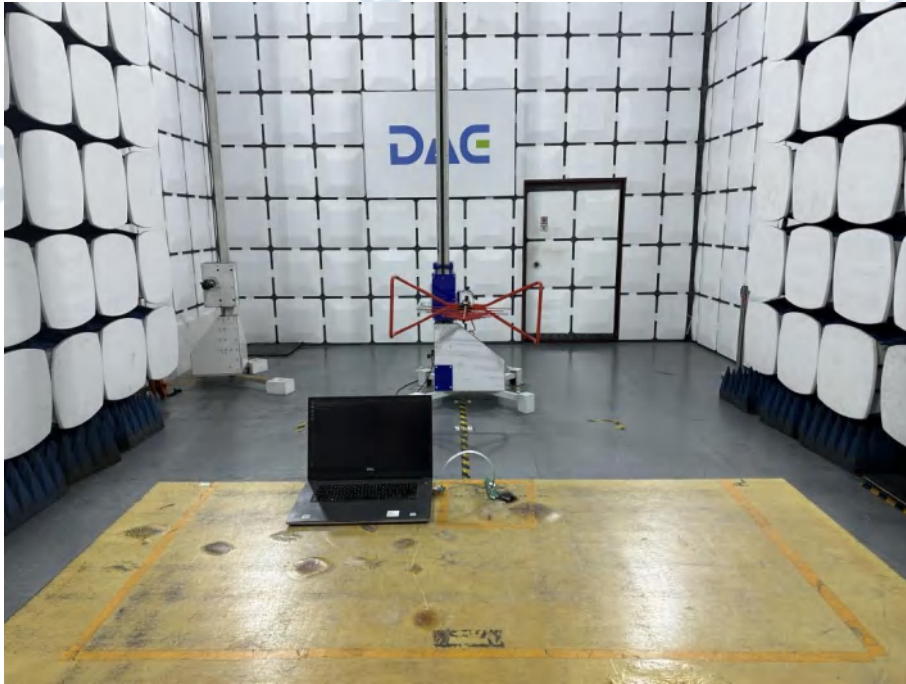



Emissions in frequency bands (above 1GHz)

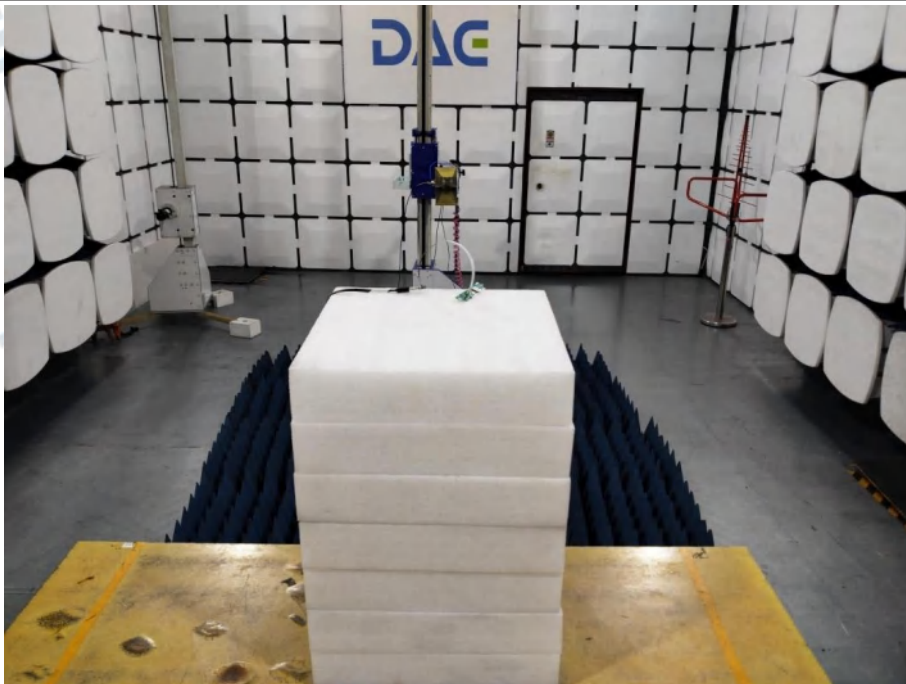

6 PHOTOS OF THE EUT

Internal

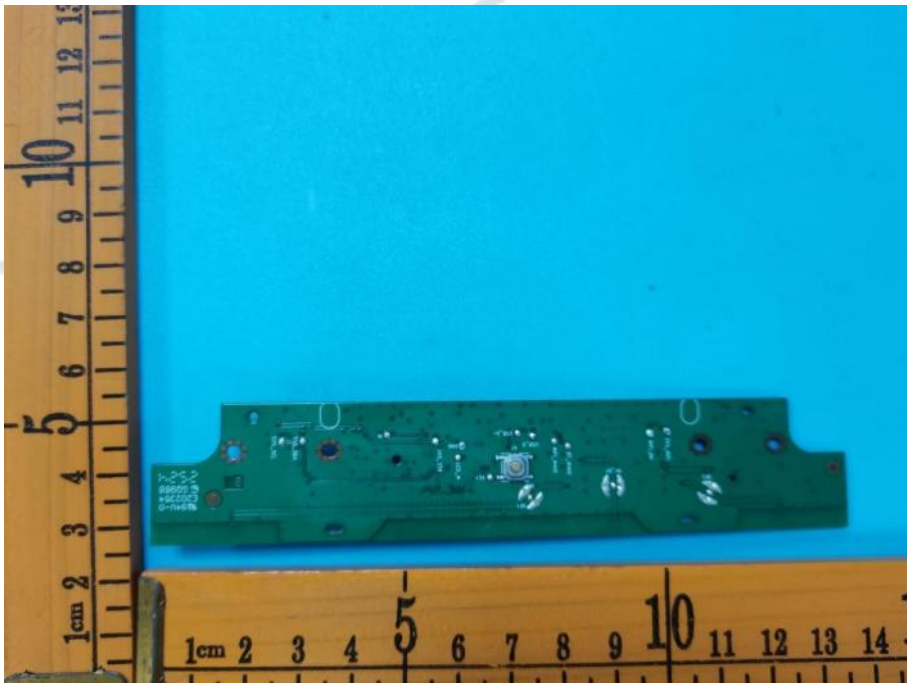

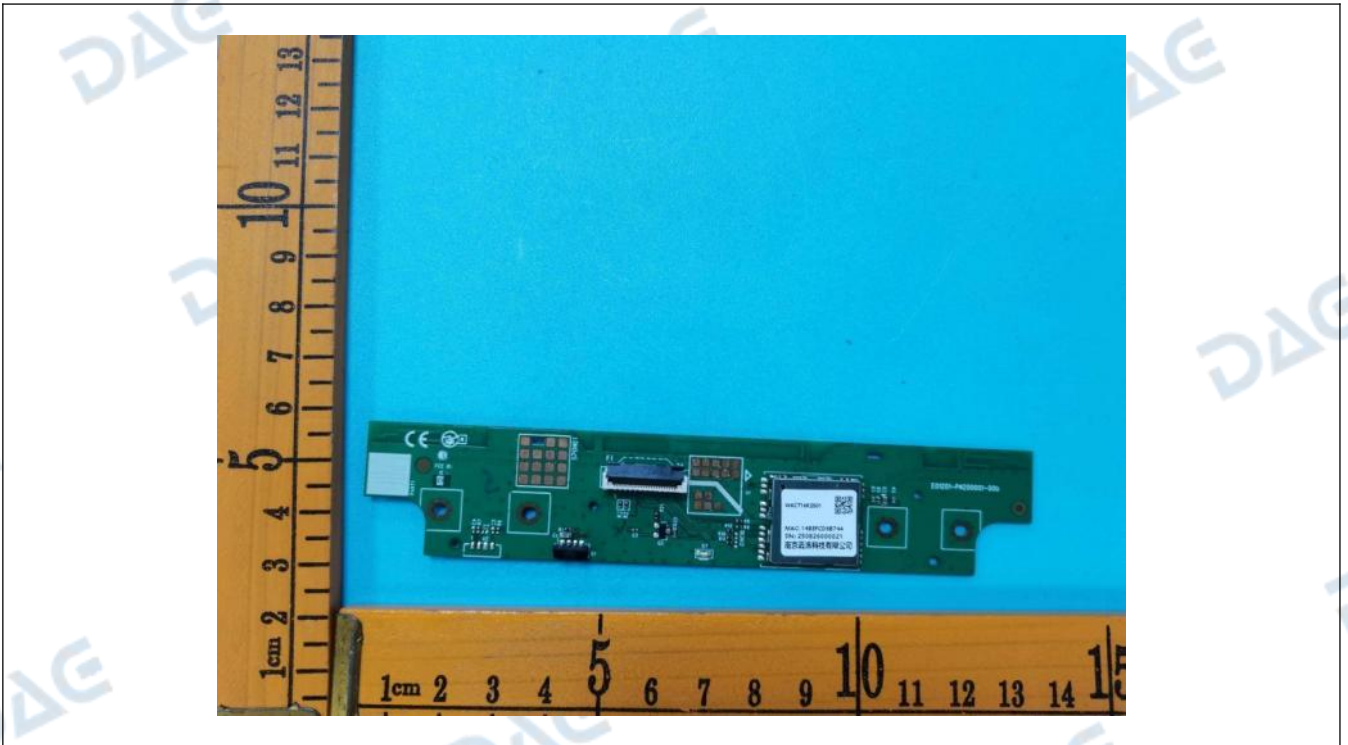


Appendix

HT250916013--WiFi--WKCT16R2501--FCC ID FCC_2.4G_WIFI (Part15.247) Test Data

1. -6dB Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	10.31	500	Pass
NVNT	ANT2	802.11b	2412.00	10.33	500	Pass
NVNT	ANT1	802.11b	2437.00	10.32	500	Pass
NVNT	ANT2	802.11b	2437.00	10.33	500	Pass
NVNT	ANT1	802.11b	2462.00	10.32	500	Pass
NVNT	ANT2	802.11b	2462.00	10.33	500	Pass
NVNT	ANT1	802.11g	2412.00	15.82	500	Pass
NVNT	ANT2	802.11g	2412.00	15.86	500	Pass
NVNT	ANT1	802.11g	2437.00	15.48	500	Pass
NVNT	ANT2	802.11g	2437.00	15.87	500	Pass
NVNT	ANT1	802.11g	2462.00	15.82	500	Pass
NVNT	ANT2	802.11g	2462.00	15.90	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	16.56	500	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	16.55	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	16.50	500	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	16.53	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	16.57	500	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	16.52	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	35.58	500	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	35.60	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	35.43	500	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	35.39	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	35.40	500	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	35.57	500	Pass


-6dB_Bandwidth_NVNT_ANT1_802_11b_2412

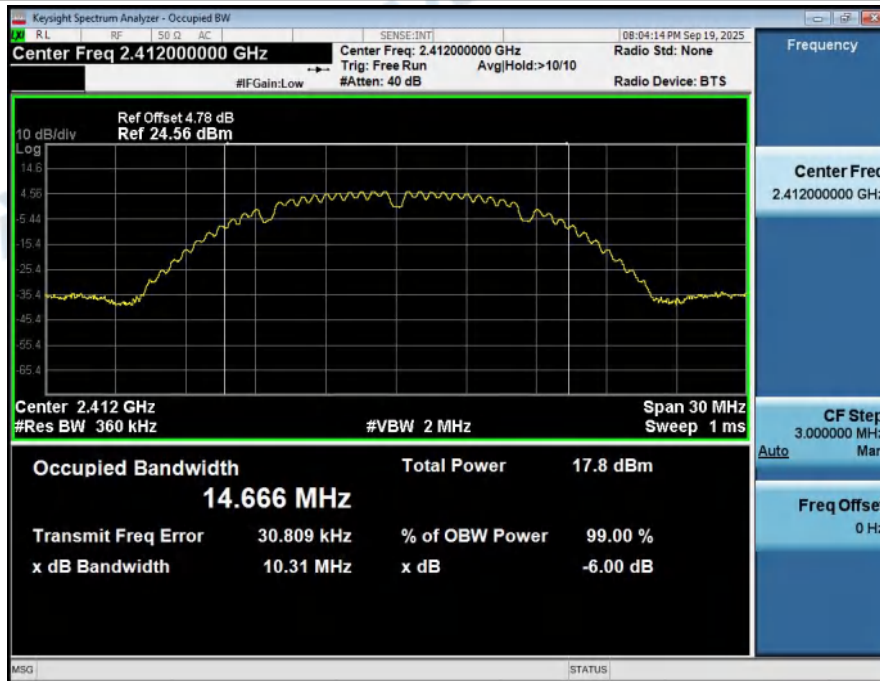

-6dB_Bandwidth_NVNT_ANT2_802_11b_2412




-6dB_Bandwidth_NVNT_ANT1_802_11b_2437

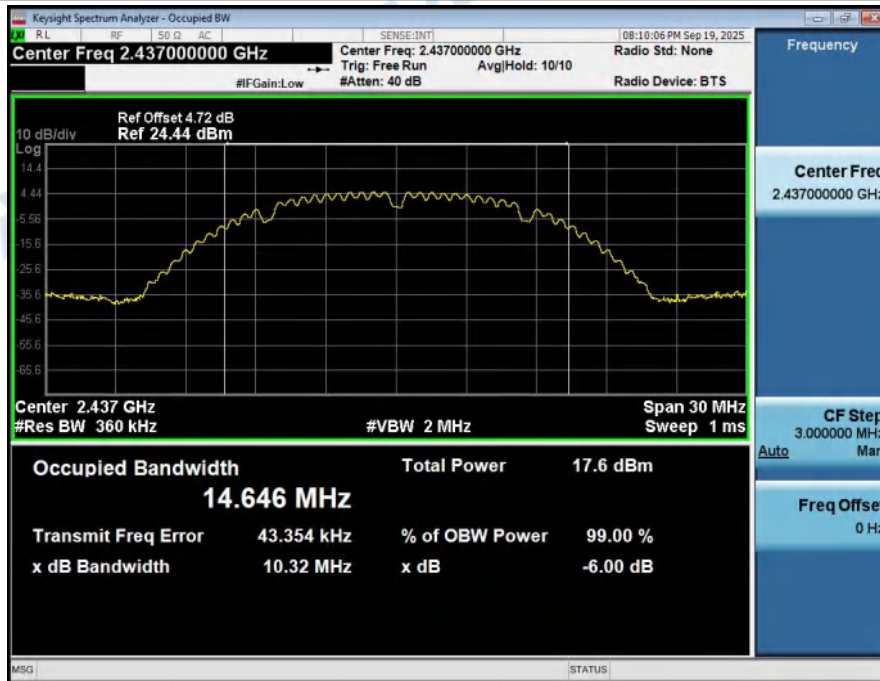

-6dB_Bandwidth_NVNT_ANT2_802_11b_2437




-6dB_Bandwidth_NVNT_ANT1_802_11b_2462

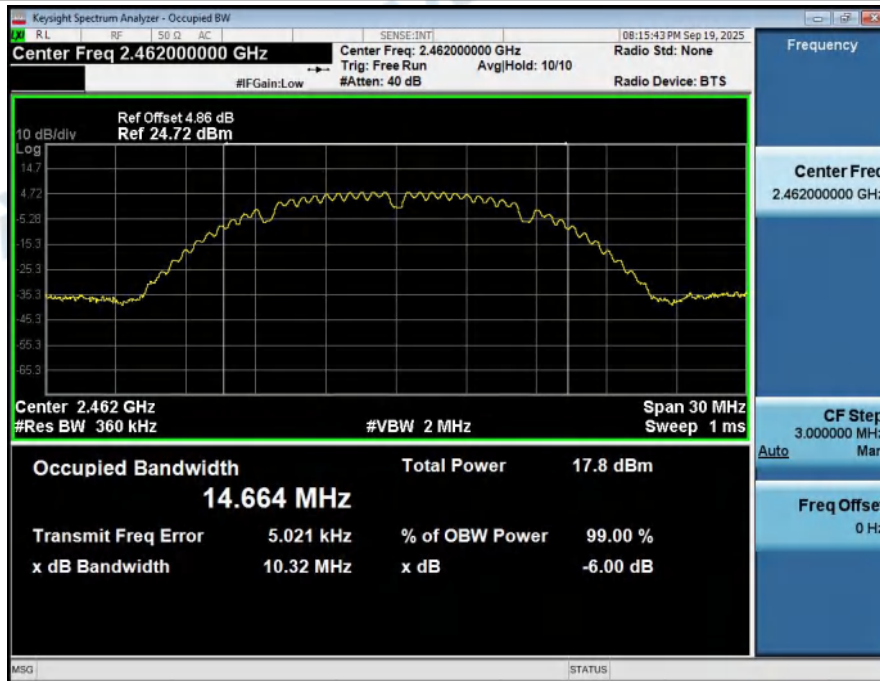

-6dB_Bandwidth_NVNT_ANT2_802_11b_2462



-6dB_Bandwidth_NVNT_ANT1_802_11g_2412

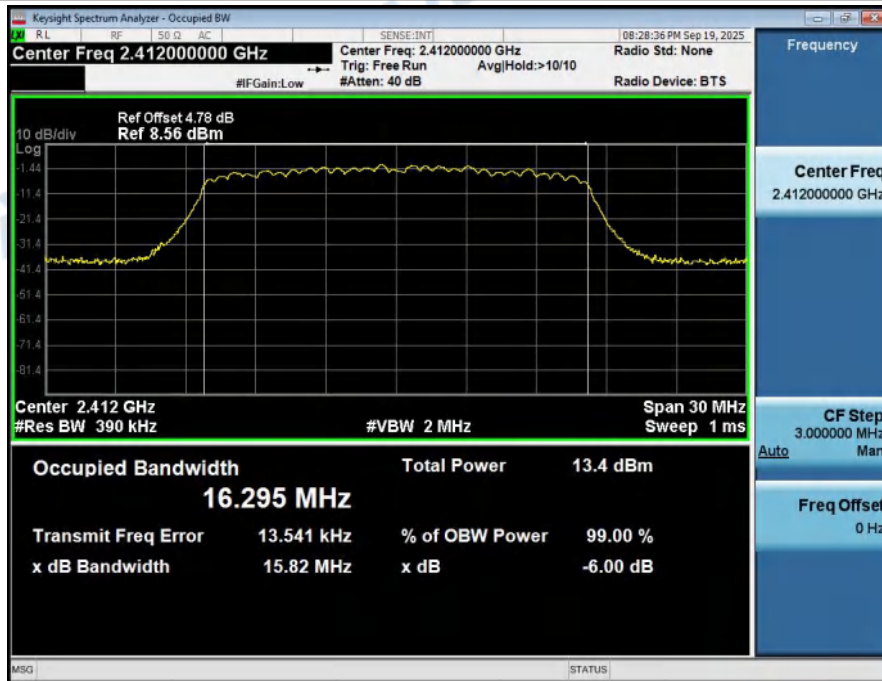

-6dB_Bandwidth_NVNT_ANT2_802_11g_2412



-6dB_Bandwidth_NVNT_ANT1_802_11g_2437



-6dB_Bandwidth_NVNT_ANT2_802_11g_2437




-6dB_Bandwidth_NVNT_ANT1_802_11g_2462



-6dB_Bandwidth_NVNT_ANT2_802_11g_2462




-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2412

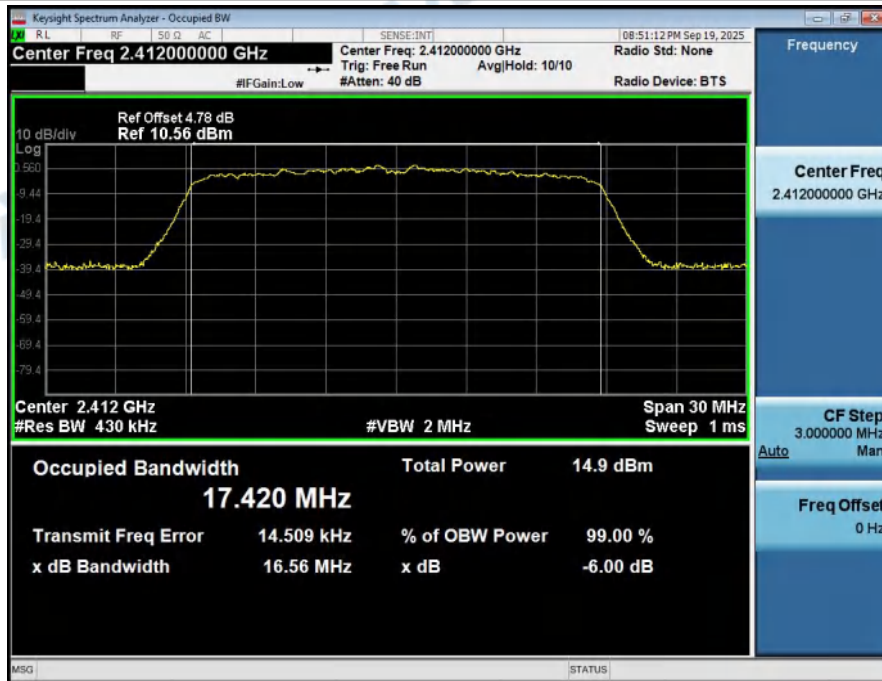

-6dB_Bandwidth_NVNT_ANT2_802_11n(HT20)_2412




-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437

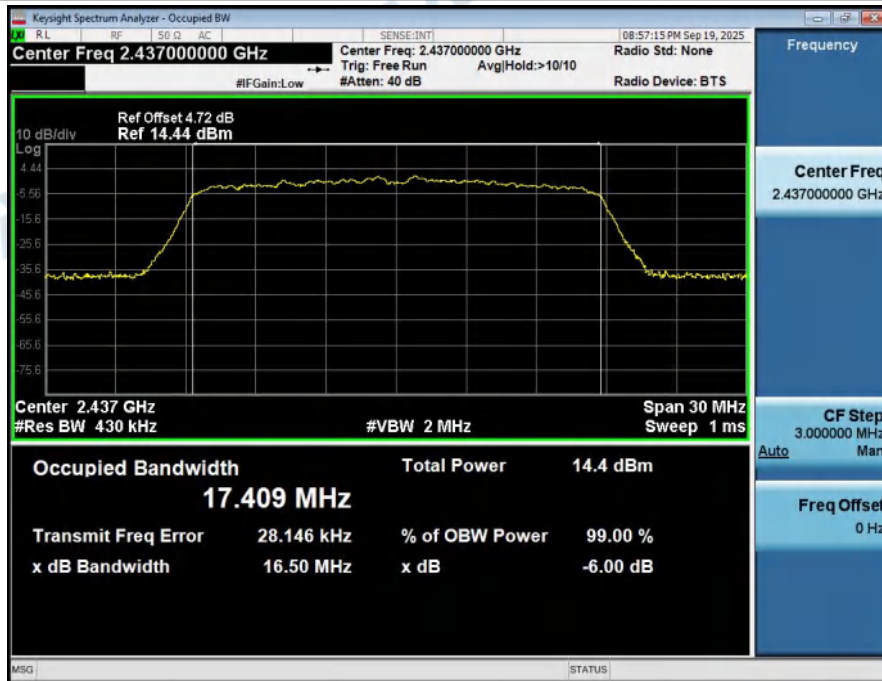

-6dB_Bandwidth_NVNT_ANT2_802_11n(HT20)_2437




-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2462

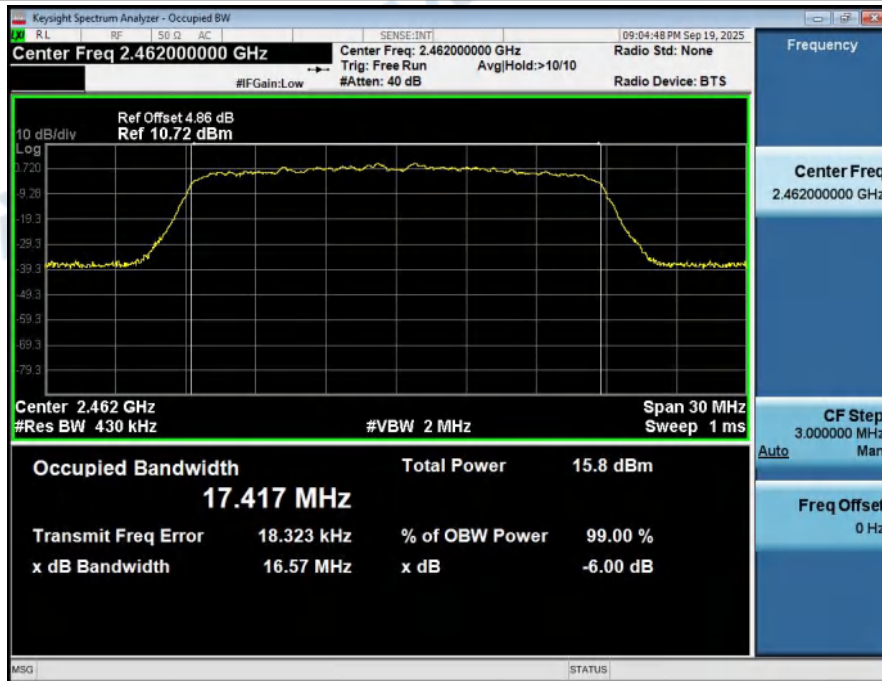

-6dB_Bandwidth_NVNT_ANT2_802_11n(HT20)_2462



-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2422

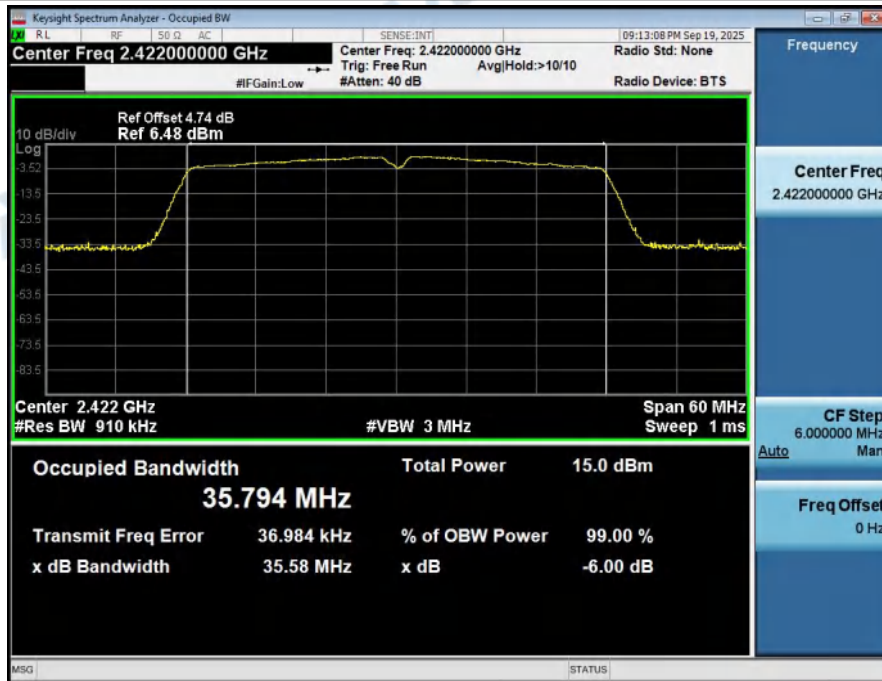

-6dB_Bandwidth_NVNT_ANT2_802_11n(HT40)_2422




-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2437



-6dB_Bandwidth_NVNT_ANT2_802_11n(HT40)_2437



-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2452

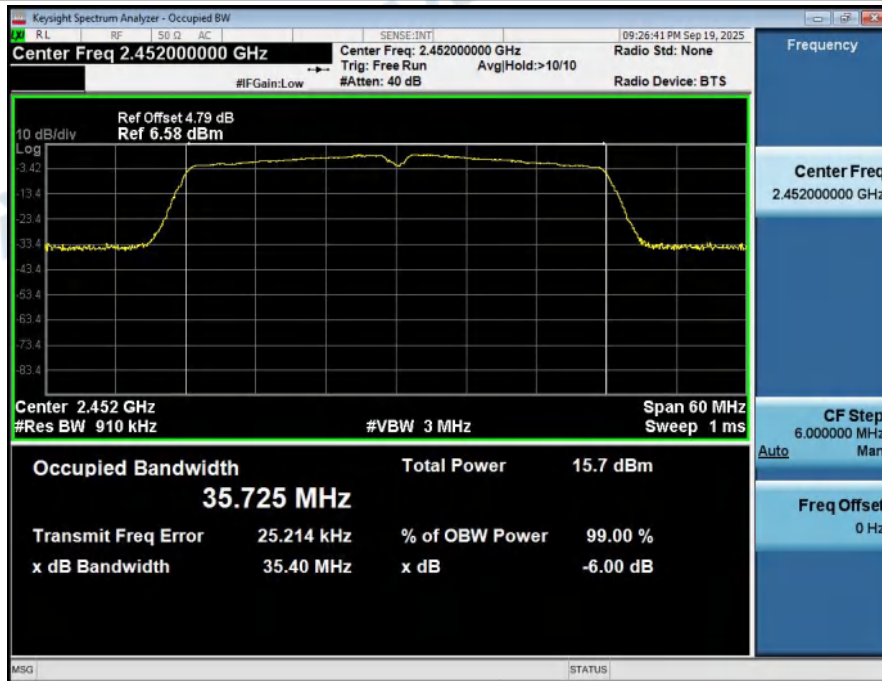

-6dB_Bandwidth_NVNT_ANT2_802_11n(HT40)_2452




2. 99% Occupied Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	802.11b	2412.00	14.668
NVNT	ANT2	802.11b	2412.00	14.665
NVNT	ANT1	802.11b	2437.00	14.655
NVNT	ANT2	802.11b	2437.00	14.673
NVNT	ANT1	802.11b	2462.00	14.667
NVNT	ANT2	802.11b	2462.00	14.661
NVNT	ANT1	802.11g	2412.00	16.347
NVNT	ANT2	802.11g	2412.00	16.359
NVNT	ANT1	802.11g	2437.00	16.305
NVNT	ANT2	802.11g	2437.00	16.354
NVNT	ANT1	802.11g	2462.00	16.307
NVNT	ANT2	802.11g	2462.00	16.363
NVNT	ANT1	802.11n(HT20)	2412.00	17.443
NVNT	ANT2	802.11n(HT20)	2412.00	17.438
NVNT	ANT1	802.11n(HT20)	2437.00	17.432
NVNT	ANT2	802.11n(HT20)	2437.00	17.443
NVNT	ANT1	802.11n(HT20)	2462.00	17.435
NVNT	ANT2	802.11n(HT20)	2462.00	17.444
NVNT	ANT1	802.11n(HT40)	2422.00	35.787
NVNT	ANT2	802.11n(HT40)	2422.00	35.800
NVNT	ANT1	802.11n(HT40)	2437.00	35.733
NVNT	ANT2	802.11n(HT40)	2437.00	35.761
NVNT	ANT1	802.11n(HT40)	2452.00	35.728
NVNT	ANT2	802.11n(HT40)	2452.00	35.769

99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2412




99%_Occupied_Bandwidth_NVNT_ANT2_802_11b_2412

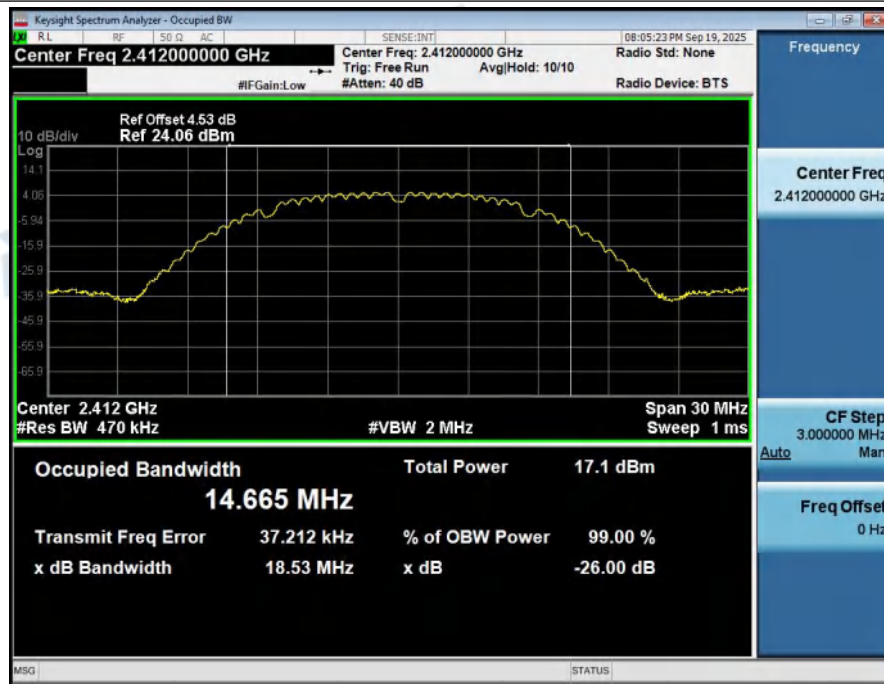

99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2437



99%_Occupied_Bandwidth_NVNT_ANT2_802_11b_2437

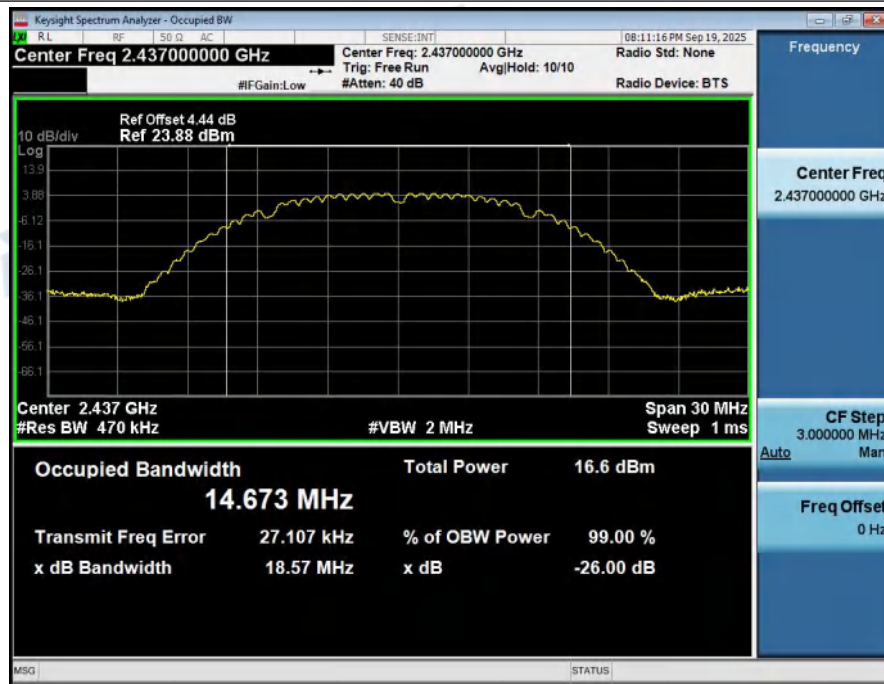

99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2462




99%_Occupied_Bandwidth_NVNT_ANT2_802_11b_2462



99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2412




99%_Occupied_Bandwidth_NVNT_ANT2_802_11g_2412

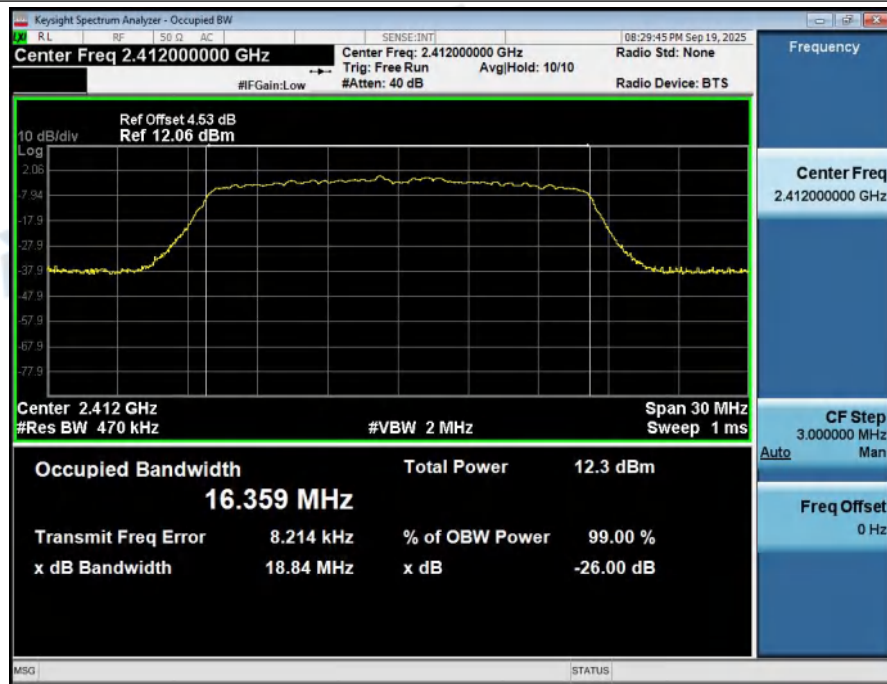

99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2437




99%_Occupied_Bandwidth_NVNT_ANT2_802_11g_2437

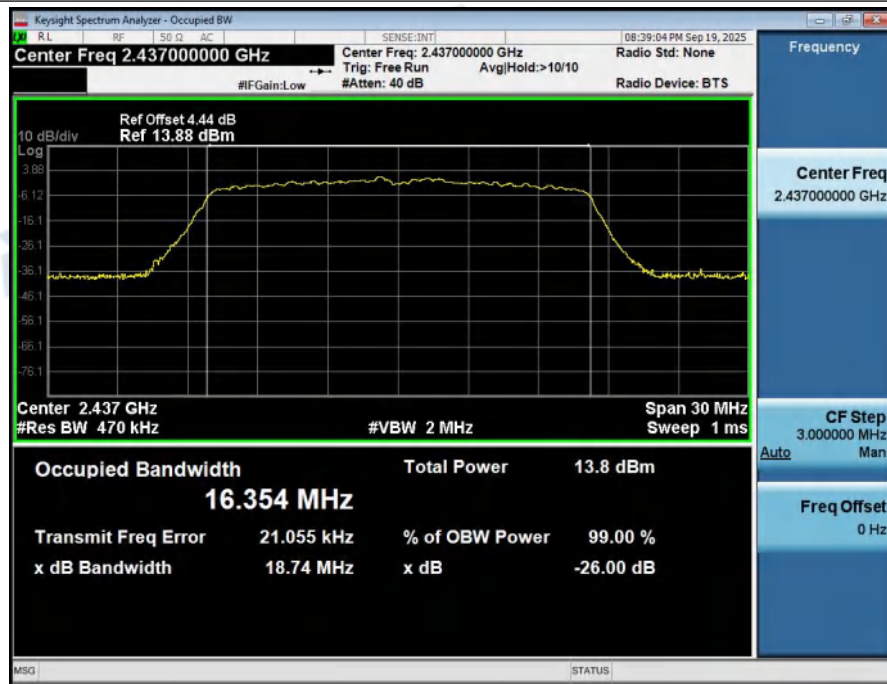


99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2462




99%_Occupied_Bandwidth_NVNT_ANT2_802_11g_2462

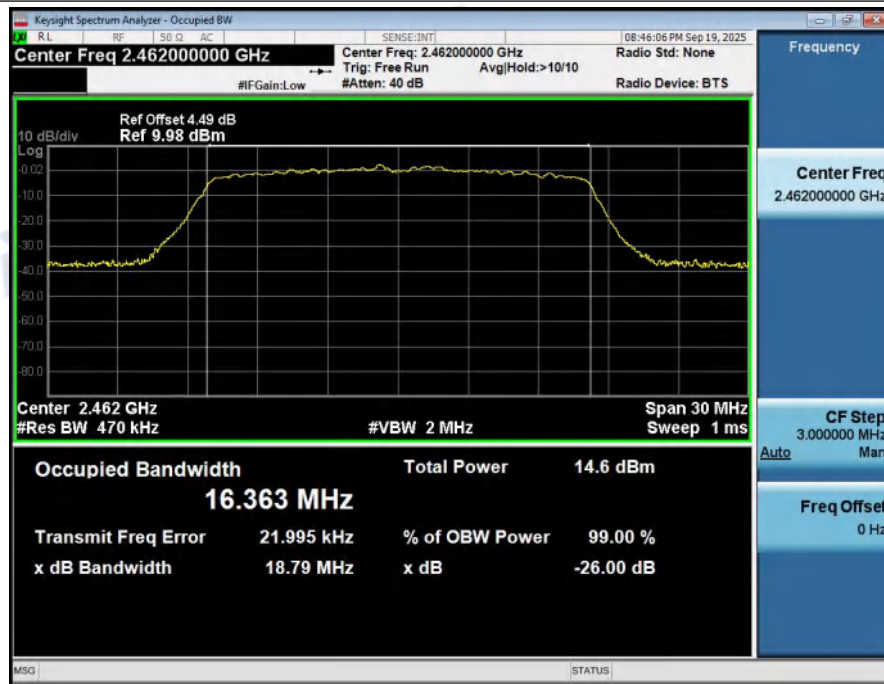

99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2412

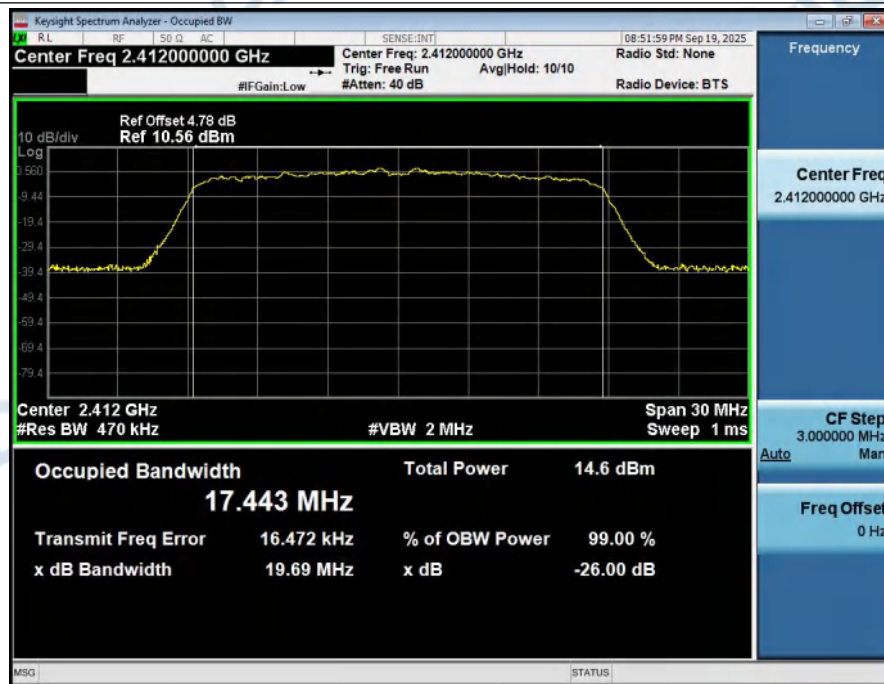

99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT20)_2412

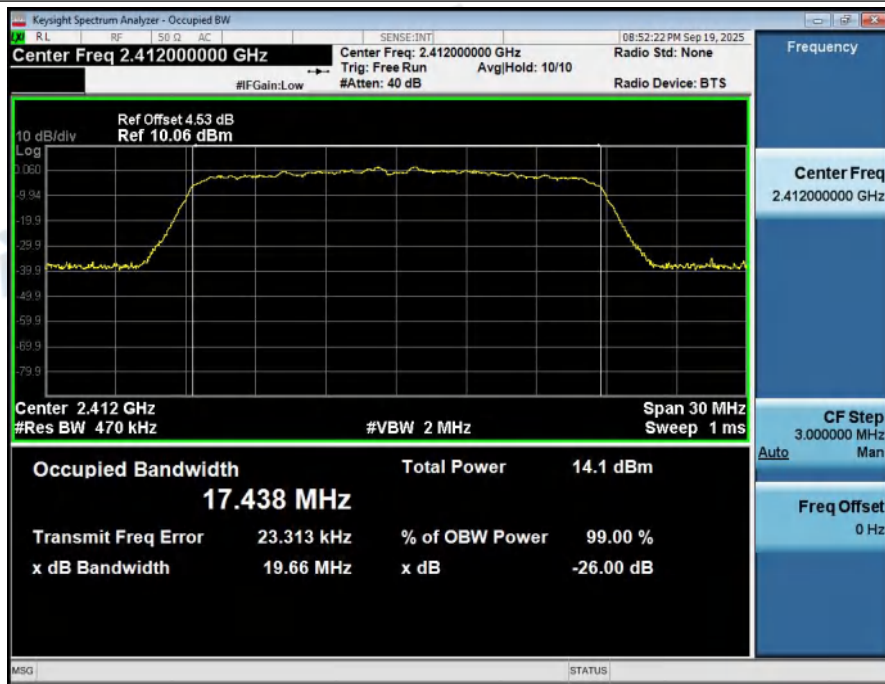


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437



99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT20)_2437




99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2462

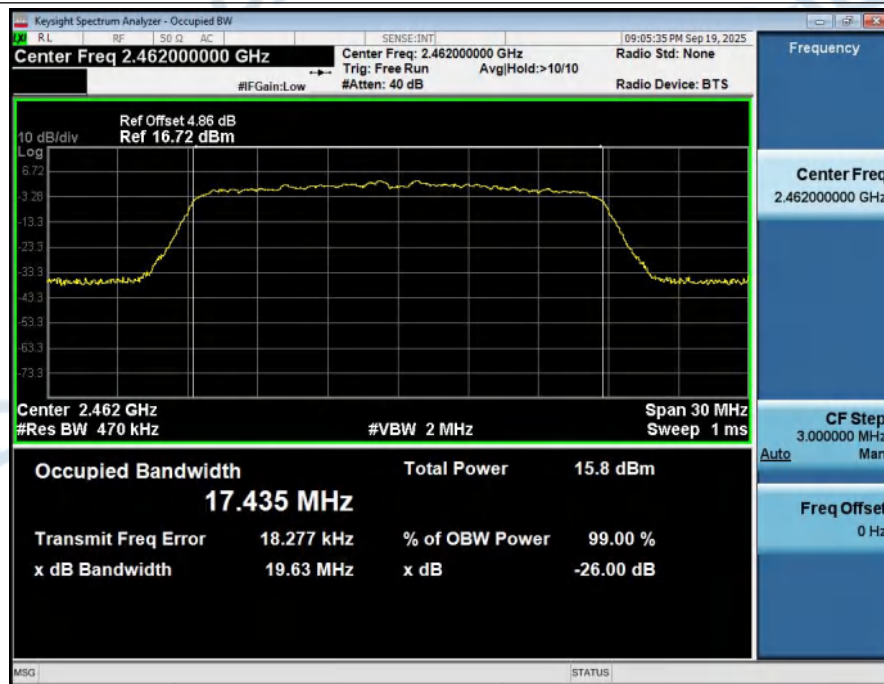


99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT20)_2462



99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT40)_2422

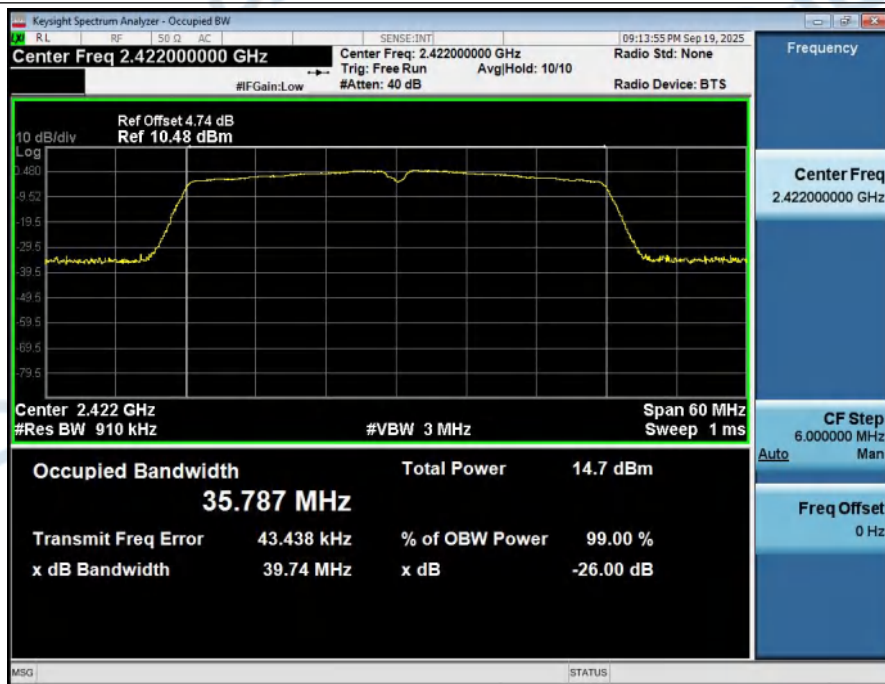


99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT40)_2422

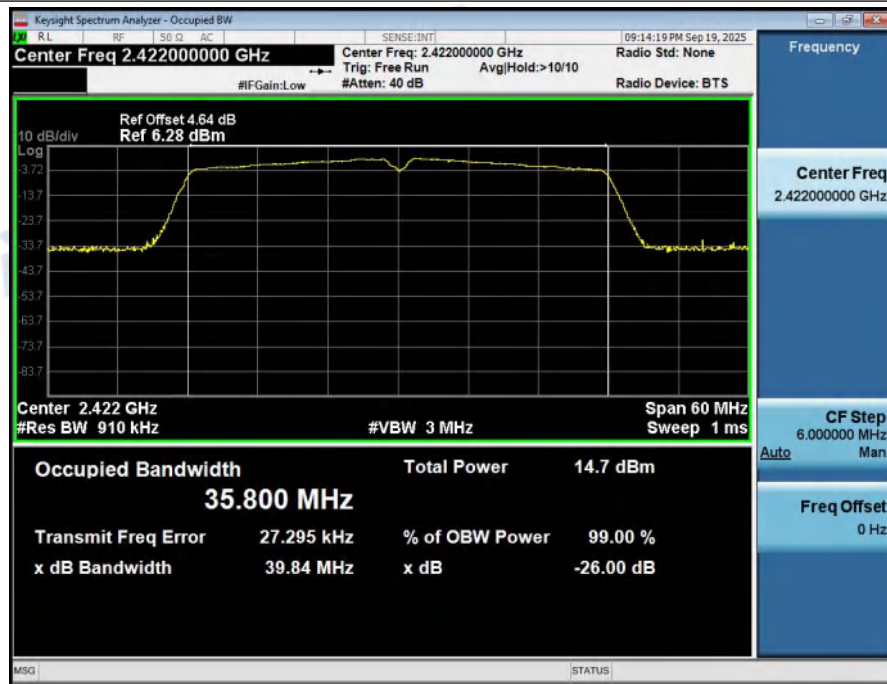

99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT40)_2437



99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT40)_2437

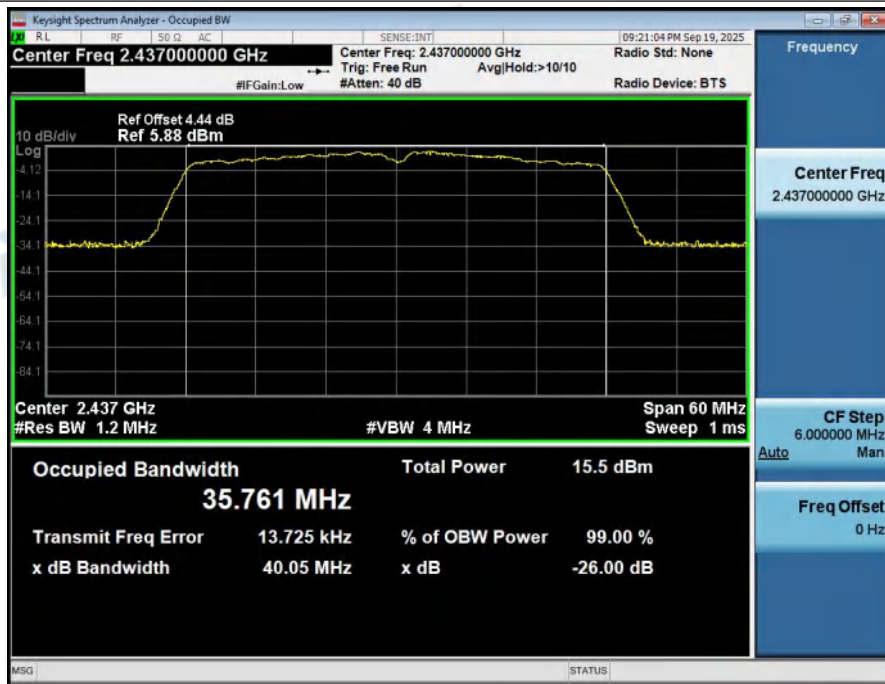

99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT40)_2452




99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT40)_2452



3. Duty Cycle

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty factor(dB)
NVNT	ANT1	802.11b	2412.00	100	0.00
NVNT	ANT2	802.11b	2412.00	100	0.00
NVNT	ANT1	802.11b	2437.00	100	0.00
NVNT	ANT2	802.11b	2437.00	100	0.00
NVNT	ANT1	802.11b	2462.00	100	0.00
NVNT	ANT2	802.11b	2462.00	100	0.00
NVNT	ANT1	802.11g	2412.00	100	0.00
NVNT	ANT2	802.11g	2412.00	100	0.00
NVNT	ANT1	802.11g	2437.00	100	0.00
NVNT	ANT2	802.11g	2437.00	100	0.00
NVNT	ANT1	802.11g	2462.00	100	0.00
NVNT	ANT2	802.11g	2462.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2412.00	100	0.00
NVNT	ANT2	802.11n(HT20)	2412.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2437.00	100	0.00
NVNT	ANT2	802.11n(HT20)	2437.00	100	0.00
NVNT	ANT1	802.11n(HT20)	2462.00	100	0.00
NVNT	ANT2	802.11n(HT20)	2462.00	100	0.00
NVNT	ANT1	802.11n(HT40)	2422.00	100	0.00
NVNT	ANT2	802.11n(HT40)	2422.00	100	0.00
NVNT	ANT1	802.11n(HT40)	2437.00	100	0.00
NVNT	ANT2	802.11n(HT40)	2437.00	100	0.00
NVNT	ANT1	802.11n(HT40)	2452.00	100	0.00
NVNT	ANT2	802.11n(HT40)	2452.00	100	0.00

Duty_Cycle_NVNT_ANT1_802_11b_2412

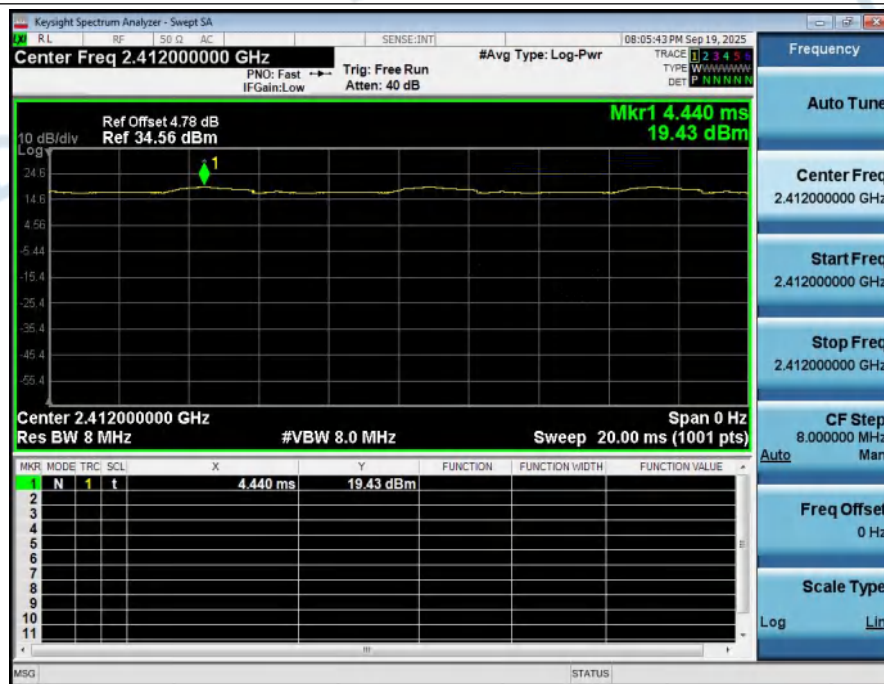

Duty_Cycle_NVNT_ANT2_802_11b_2412