

Test Report

Applicant : Heilongjiang Tianyouwei Electronic Co., Ltd
No. 9 Kunshan Road, Economic And
Address : Technological Development Zone, Suihua City,
Heilongjiang Province
Product Name : MMI2.0 5HYV
Brand Mark : CFMOTO
Model : 5HYV-DMR-00
Series model : N/A
Report Number : BLA-EMC-202511-A3706
FCC ID : 2BS5K-5HYV
Date of Receipt : Nov. 14, 2025
Date of Test : Nov. 14, 2025 to Dec. 17, 2025
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Compiled by: *charlie*Review by: *Xavier*Approved by: *Isaac Zheng*

Issued Date: Dec. 17, 2025



BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

Address: Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	6
3 Test Configuration	7
3.1 Test mode	7
3.2 Operation Frequency each of channel	8
3.3 Auxiliary equipment	8
3.4 Test environment	8
4 Laboratory information	9
4.1 Laboratory and accreditations	9
4.2 Measurement uncertainty	9
5 Test equipment	10
6 Test result	12
6.1 Antenna requirement	12
6.2 Conducted Peak output Power	13
6.3 Minimum 6dB bandwidth	14
6.4 Power spectrum density	15
6.5 Conducted Band Edges Measurement	16
6.6 Conducted spurious emissions	18
6.7 Radiated spurious emissions	20
6.8 Radiated emissions which fall in the restricted bands	31
7 Appendix A	50
7.1 Maximum Peak Conducted Output Power	50
7.2 -6dB Bandwidth	57
7.3 Occupied Channel Bandwidth	64
7.4 Maximum Power Spectral Density Level	71
7.5 Band Edge	78
7.6 Conducted RF Spurious Emission	87

Appendix B: photographs of test setup 100

Appendix C: photographs of EUT 102

BlueAsia

Revise Record

Version No.	Date	Description
01	Dec. 17,2025	Original

1 General information

1.1 General information

Applicant	Heilongjiang Tianyouwei Electronic Co., Ltd
Address	No. 9 Kunshan Road, Economic And Technological Development Zone, Suihua City, Heilongjiang Province
Manufacturer	TYW MANUFACTURING MEXICO, S DE RL DE CV
Address	Zaraiche 652, Centro Industrial de Guanajuato, Cp 36835, Irapuato, guanajuato, Mexico
Factory	TYW MANUFACTURING MEXICO, S DE RL DE CV
Address	Zaraiche 652, Centro Industrial de Guanajuato, Cp 36835, Irapuato, guanajuato, Mexico

1.2 General description of EUT

Product name	MMI2.0 5HYV
Model no.	5HYV-DMR-00
Series model	N/A
Differences of Series model	N/A
Operation Frequency	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Nominal Bandwidth	20MHz&40MHz
Channel Spacing	5MHz
Number of Channels	802.11b/g/n(HT20): 11 802.11n(HT40):7
Antenna Type	FPC antenna
Antenna Gain	2.94dBi(Provided by customer)
Function	☒ SISO ☐ 2x2 MIMO ☐ TPC
Power supply or adapter information	DC12V
Hardware version	HW.0.01.00
Software version	SW.0.00.05
Engineer sample no.	BLA-EMC-202511-A37

Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2 Test summary

No.	Test item	FCC standard	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2020+Cor.1-2023 Clause 6.2	N/A
3	Conducted Peak Output Power	§15.247 (b)(3)	ANSI C63.10-2020+Cor.1-2023 Clause 11.9.1	Pass
4	Minimum 6dB Bandwidth	§15.247 (a)(2)	ANSI C63.10-2020+Cor.1-2023 Clause 11.8.1	Pass
5	Power Spectrum Density	§15.247 (e)	ANSI C63.10-2020+Cor.1-2023 Clause 11.10.2	Pass
6	Conducted Band Edges Measurement	§15.247(d)	ANSI C63.10-2020+Cor.1-2023 Clause 11.13.3.2	Pass
7	Conducted Spurious Emissions	§15.247(d)	ANSI C63.10-2020+Cor.1-2023 Clause 11.11	Pass
8	Radiated Spurious Emissions	§15.247 (d) §15.209	ANSI C63.10-2020+Cor.1-2023 Clause 6.4&6.5&6.6	Pass
9	Radiated Emissions which fall in the restricted bands	§15.247 (d) §15.205	ANSI C63.10-2020+Cor.1-2023 Clause 6.10.5	Pass

N/A: Not Applicable

3 Test Configuration

3.1 Test mode

Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting mode with modulation.(Duty cycle>98%)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use

3.2 Operation Frequency each of channel

Operation Frequency each of channel(802.11b/g/n HT20/n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz
2	2417MHz	6	2437MHz	10	2457MHz
3	2422MHz	7	2442MHz	11	2462MHz
4	2427MHz	8	2447MHz	--	--

(802.11b/g/n HT20)		(802.11n HT40)	
Channel	Frequency	Channel	Frequency
The lowest channel	2412MHz	The lowest channel	2422MHz
The middle channel	2437MHz	The middle channel	2437MHz
The Highest channel	2462MHz	The Highest channel	2452MHz

3.3 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
Rechargeable battery	OUTDO	UTX7L-BS	N/A	From lab (No.BLA-ZC-PJ-2023005)
Note: “--” mean no any auxiliary device during testing.				

3.4 Test environment

Environment	Temperature	Voltage
Normal	25℃	DC 12V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

FCC	Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
	Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
	A2LA Cert. No.:	5071.01
	FCC Designation No.:	CN1252
	Test Firm Registration Number:	923526
Telephone:		+86-755-28682673
FAX:		+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
Radiated Emission(18GHz-40GHz)	$\pm 4.78\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2025/08/05	2026/08/04
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2025/08/05	2026/08/04
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA2018043003	2025/08/05	2026/08/04
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2025/06/09	2026/06/08
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2025/06/09	2026/06/08
BLA-EMC-066	Amplifier	LNPA_30M01G-30	SKET	SK2021060801	2025/06/09	2026/06/08
BLA-EMC-086	Amplifier	LNPA_18G40G-50dB	SKET	SK2022071301	2025/06/09	2026/06/08
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2025/06/09	2026/06/08
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2025/08/05	2026/08/04
BLA-EMC-042	Power sensor	RPR3006 W	DARE	14I00889SN042	2025/08/05	2026/08/04
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2025/08/05	2026/08/04
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2025/06/09	2026/06/08
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2025/08/05	2026/08/04
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2025/06/09	2026/06/08
BLA-EMC-100	Digital Radio Tester	RWC2010	Redwoodcomm	RWC20102490304	2025/06/09	2026/06/08

Test Software Record

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is FPC Antenna The best case gain of the antenna is 2.94dBi


6.2 Conducted Peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10-2020+Cor.1-2023 Clause 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.2.2 Test setup

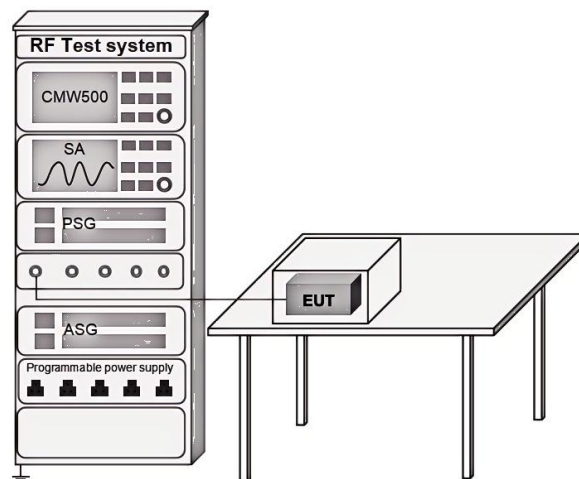

6.2.3 Test data

Note: PK power sensor is used to read PK Conducted power power directly

Pass: Please refer to appendix A for details

BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.2


6.3 Minimum 6dB bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10-2020+Cor.1-2023 Clause 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

≥500 kHz

6.3.2 Test setup

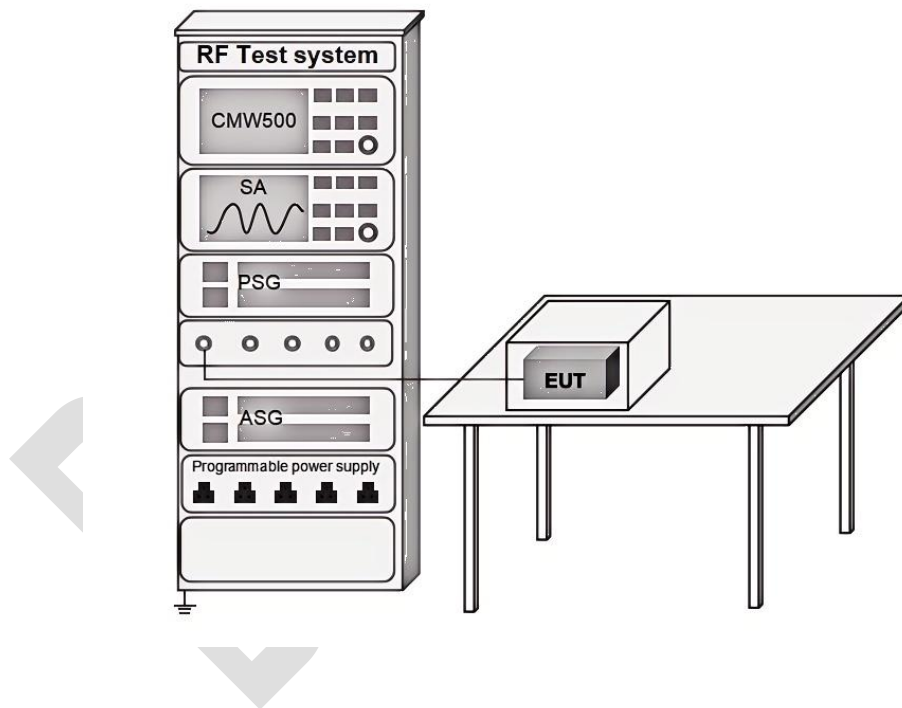

6.3.3 Test data

Pass: Please refer to appendix A for details


6.4 Power spectrum density

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10-2020+Cor.1-2023 Clause 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Limit

≤8dBm in any 3 kHz band during any time interval of continuous transmission

6.4.2 Test setup

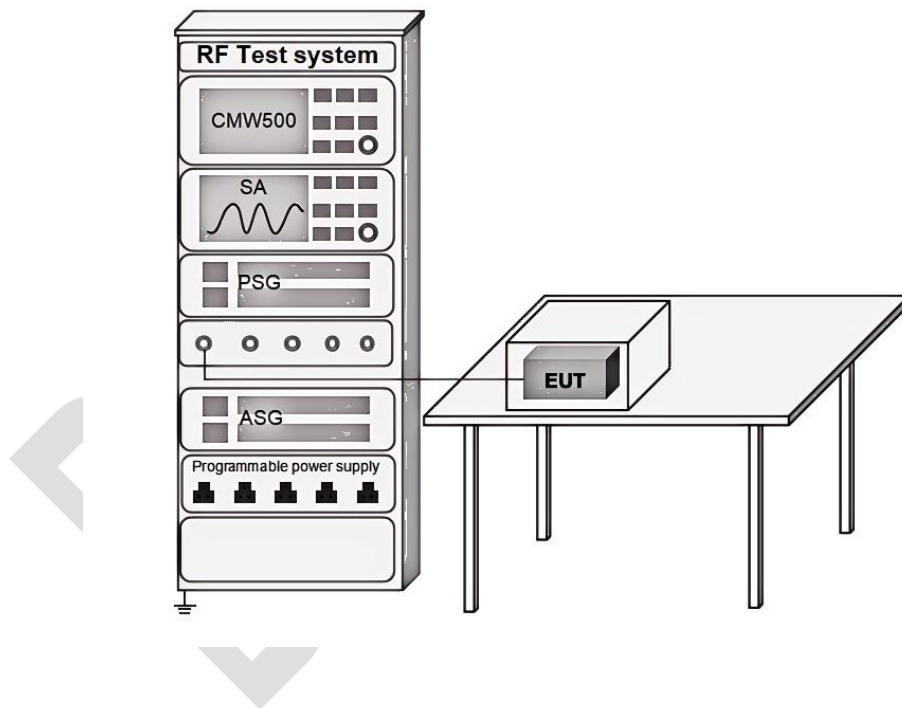

6.4.3 Test data

Pass: Please refer to appendix A for details

6.5 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10-2020+Cor.1-2023 Clause 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.5.2 Test setup

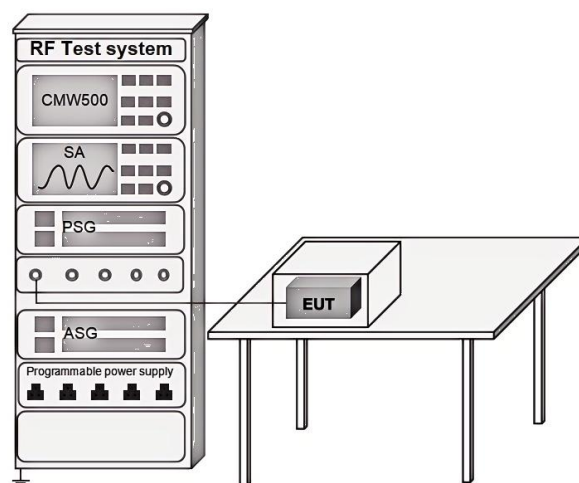

6.5.3 Test data

Pass: Please refer to appendix A for details

BlueAsia

6.6 Conducted spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10-2020+Cor.1-2023 Clause 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.6.2 Test setup

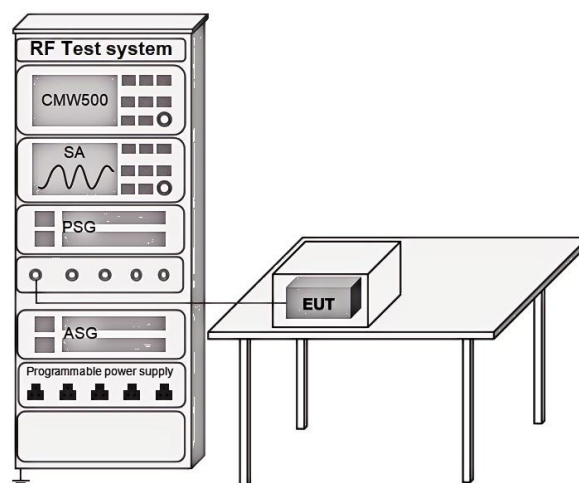

6.6.3 Test data

Pass: Please refer to appendix A for details

BlueAsia

6.7 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10-2020+Cor.1-2023 Clause 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.7.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.