


Mode:	LTE-BAND5-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

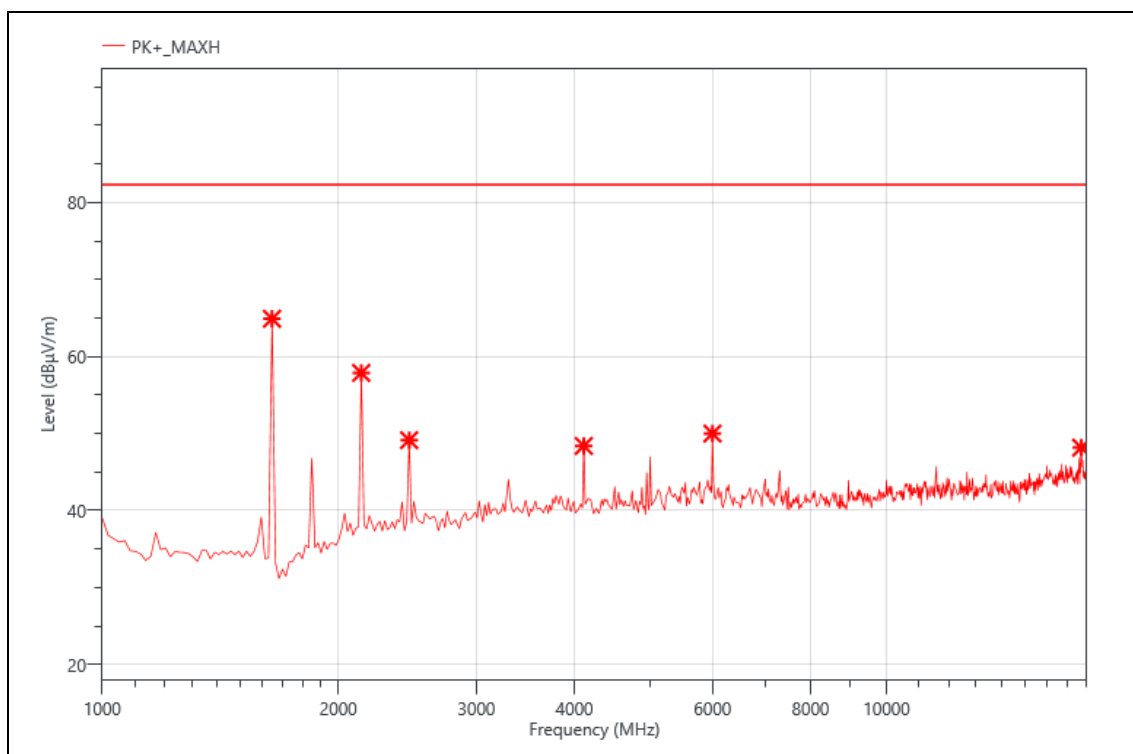


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1646.000	86.22	-21.32	64.90	82.30	17.40	PK+	V
2	2139.000	75.87	-18.01	57.86	82.30	24.44	PK+	V
3	2462.000	66.41	-17.28	49.13	82.30	33.17	PK+	V
4	4111.000	61.22	-12.84	48.38	82.30	33.92	PK+	V
5	5998.000	58.98	-8.99	49.99	82.30	32.31	PK+	V
6	17711.000	47.91	0.25	48.16	82.30	34.14	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

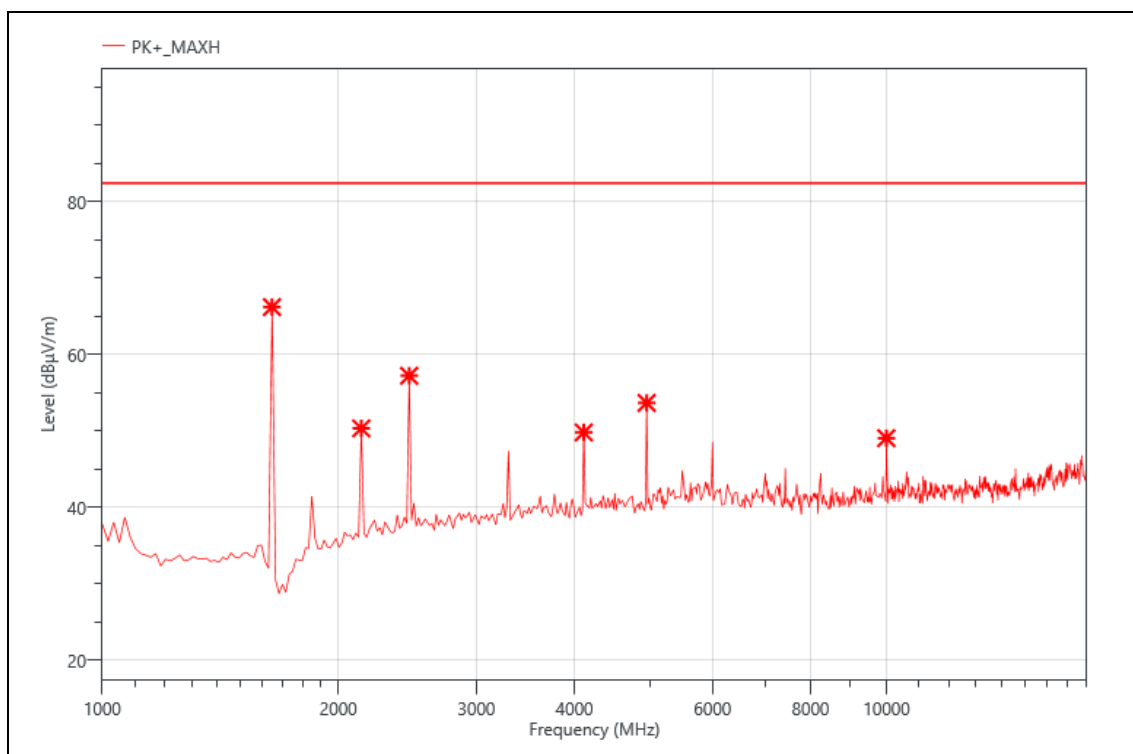


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1646.000	87.50	-21.32	66.18	82.30	16.12	PK+	H
2	2139.000	68.32	-18.01	50.31	82.30	31.99	PK+	H
3	2462.000	74.48	-17.28	57.20	82.30	25.10	PK+	H
4	4111.000	62.63	-12.84	49.79	82.30	32.51	PK+	H
5	4944.000	64.96	-11.32	53.64	82.30	28.66	PK+	H
6	9993.000	55.13	-6.1	49.03	82.30	33.27	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

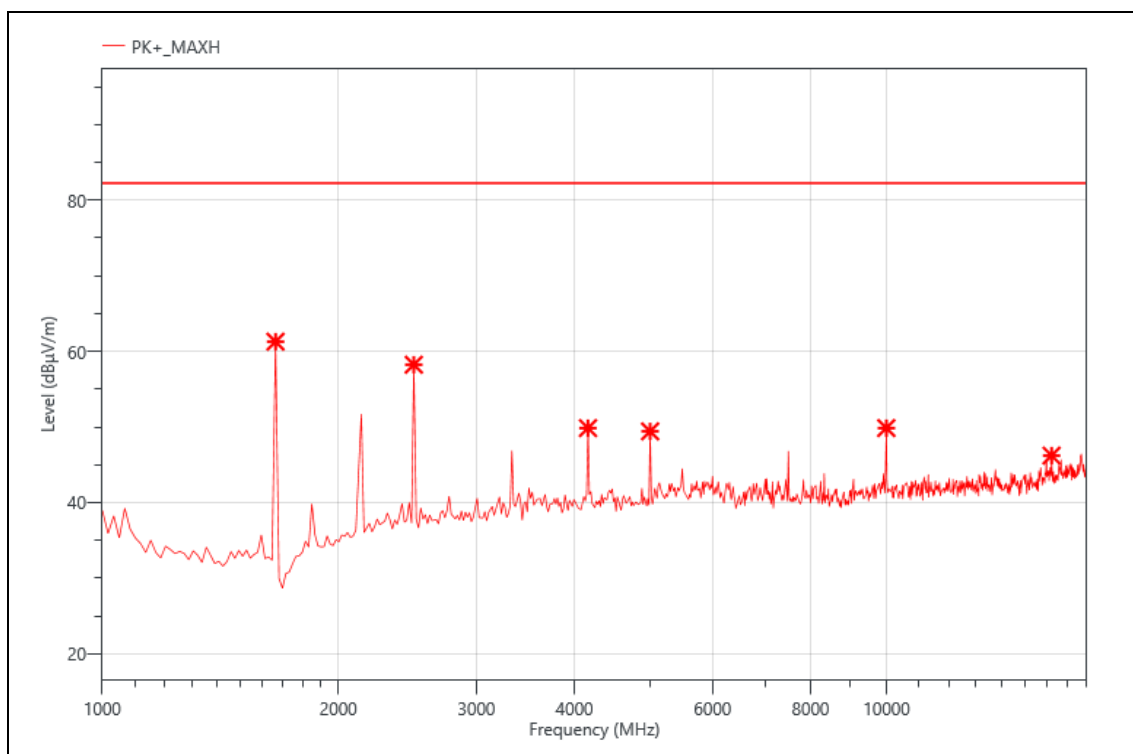


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1663.000	82.43	-21.15	61.28	82.30	21.02	PK+	H
2	2496.000	75.37	-17.14	58.23	82.30	24.07	PK+	H
3	4162.000	62.41	-12.56	49.85	82.30	32.45	PK+	H
4	4995.000	60.52	-11.1	49.42	82.30	32.88	PK+	H
5	9993.000	55.95	-6.1	49.85	82.30	32.45	PK+	H
6	16232.000	46.90	-0.68	46.22	82.30	36.08	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

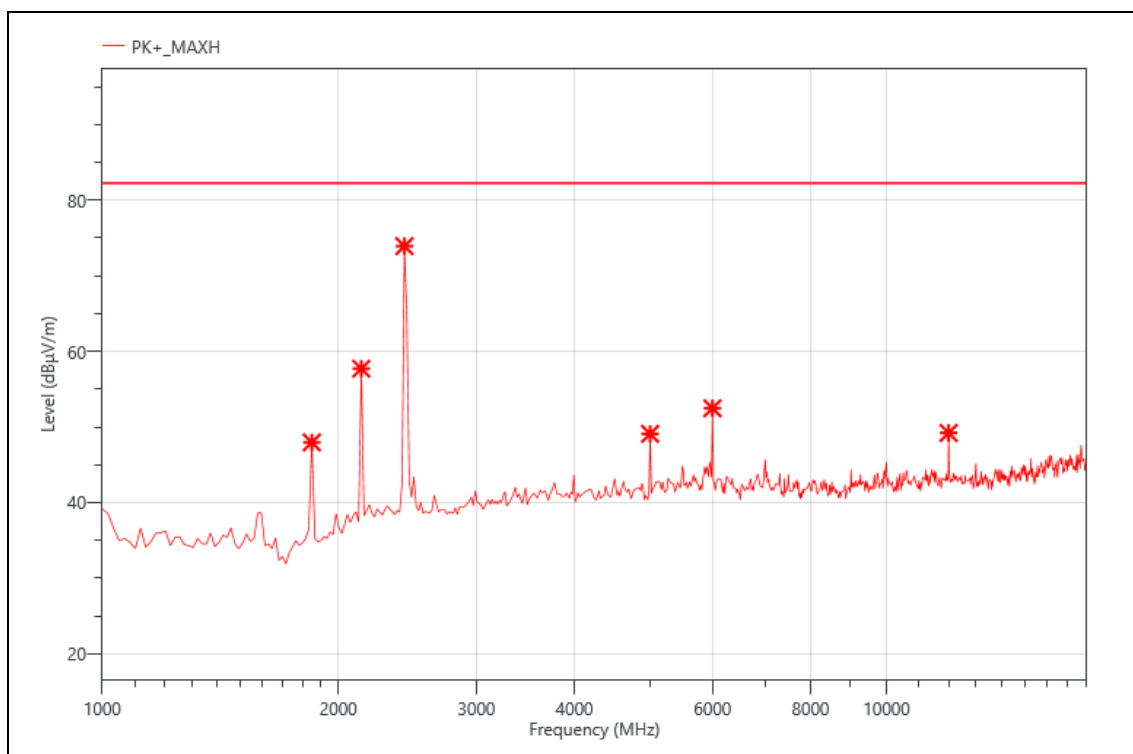


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1850.000	67.64	-19.68	47.96	82.30	34.34	PK+	V
2	2139.000	75.71	-18.01	57.70	82.30	24.60	PK+	V
3	2428.000	91.12	-17.21	73.91	82.30	8.39	PK+	V
4	4995.000	60.19	-11.1	49.09	82.30	33.21	PK+	V
5	5998.000	61.45	-8.99	52.46	82.30	29.84	PK+	V
6	11999.000	53.30	-4.09	49.21	82.30	33.09	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

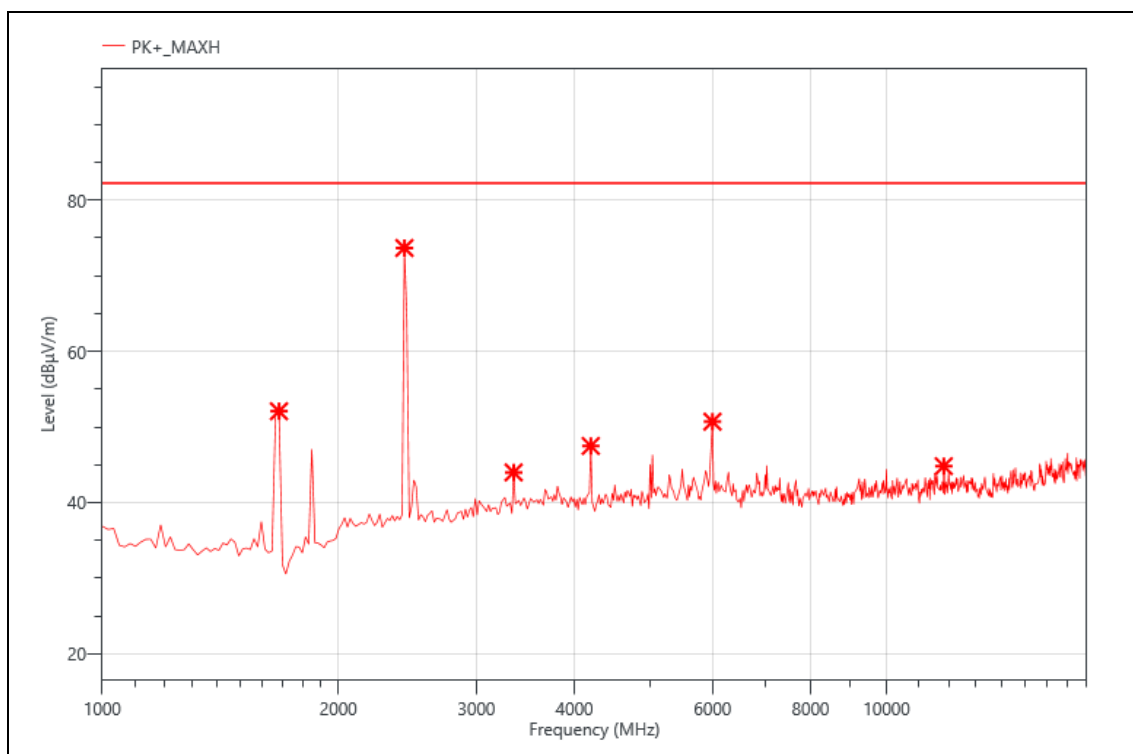


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1680.000	73.10	-21.02	52.08	82.30	30.22	PK+	V
2	2428.000	90.87	-17.21	73.66	82.30	8.64	PK+	V
3	3346.000	58.69	-14.7	43.99	82.30	38.31	PK+	V
4	4196.000	59.73	-12.24	47.49	82.30	34.81	PK+	V
5	5998.000	59.69	-8.99	50.70	82.30	31.60	PK+	V
6	11829.000	48.99	-4.17	44.82	82.30	37.48	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND5-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

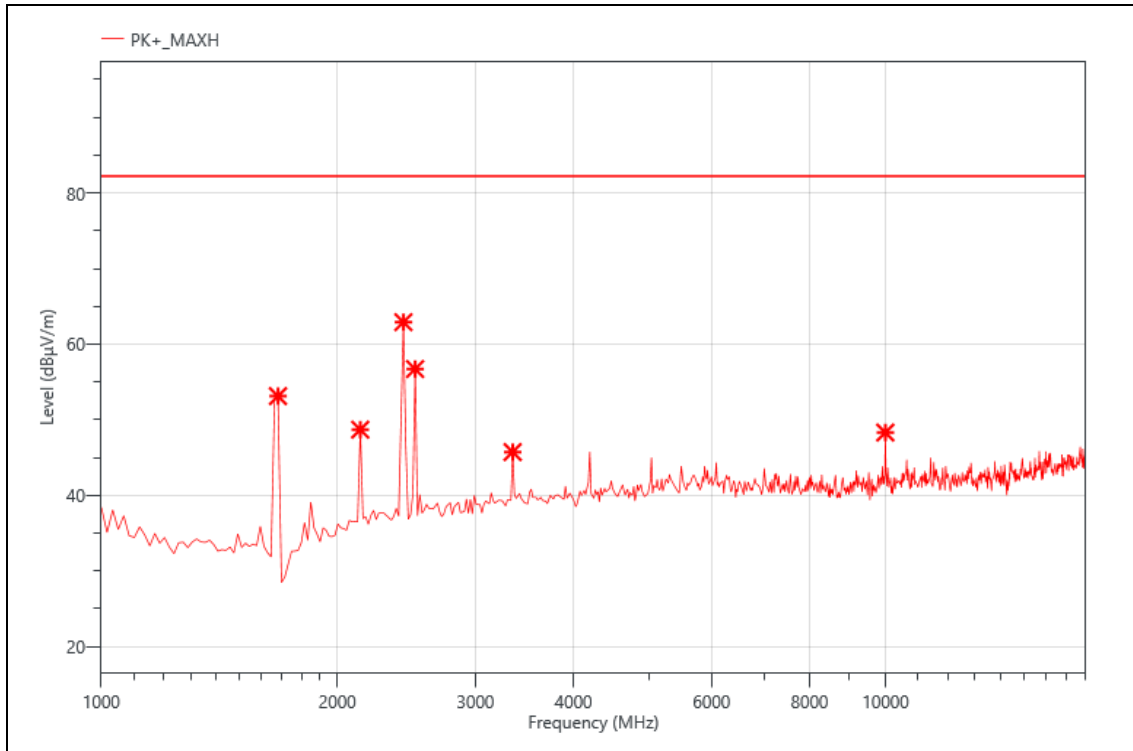


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1680.000	74.15	-21.02	53.13	82.30	29.17	PK+	H
2	2139.000	66.70	-18.01	48.69	82.30	33.61	PK+	H
3	2428.000	80.12	-17.21	62.91	82.30	19.39	PK+	H
4	2513.000	73.83	-17.12	56.71	82.30	25.59	PK+	H
5	3346.000	60.42	-14.7	45.72	82.30	36.58	PK+	H
6	9993.000	54.41	-6.1	48.31	82.30	33.99	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

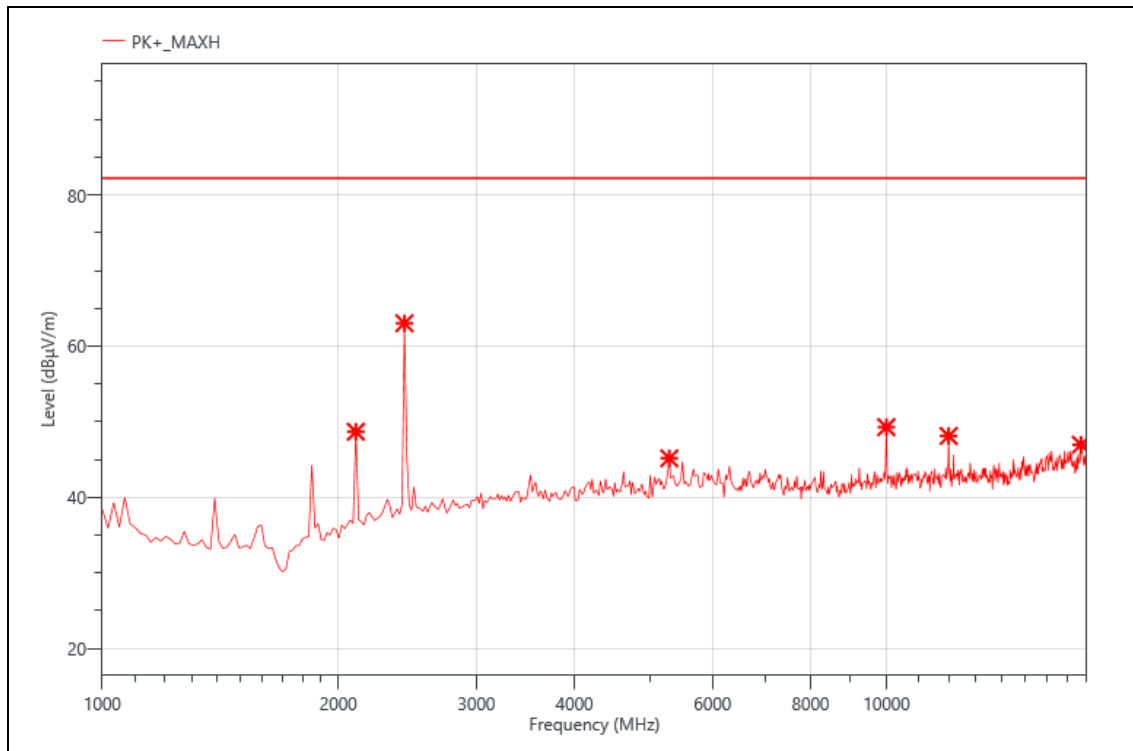


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2105.000	66.92	-18.24	48.68	82.30	33.62	PK+	H
2	2428.000	80.24	-17.21	63.03	82.30	19.27	PK+	H
3	5284.000	54.59	-9.43	45.16	82.30	37.14	PK+	H
4	9993.000	55.39	-6.1	49.29	82.30	33.01	PK+	H
5	11999.000	52.21	-4.09	48.12	82.30	34.18	PK+	H
6	17694.000	47.03	-0.07	46.96	82.30	35.34	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-M
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

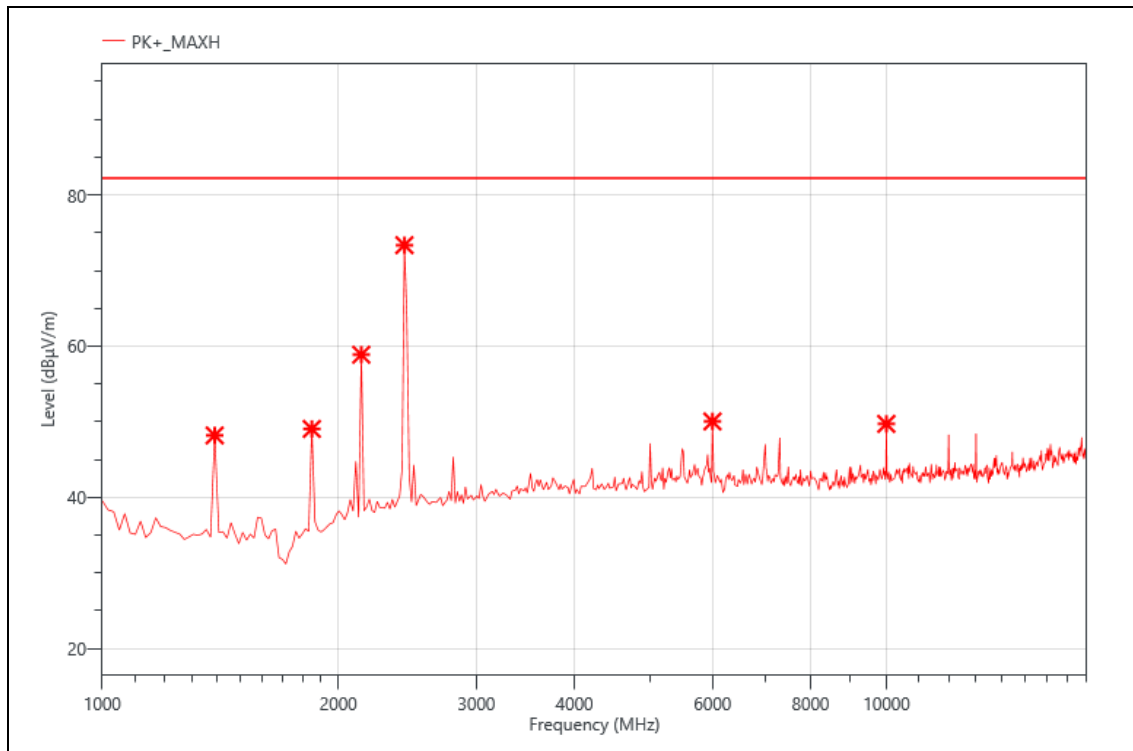


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1391.000	70.81	-22.62	48.19	82.30	34.11	PK+	V
2	1850.000	68.73	-19.68	49.05	82.30	33.25	PK+	V
3	2139.000	76.88	-18.01	58.87	82.30	23.43	PK+	V
4	2428.000	90.57	-17.21	73.36	82.30	8.94	PK+	V
5	5998.000	59.03	-8.99	50.04	82.30	32.26	PK+	V
6	9993.000	55.82	-6.1	49.72	82.30	32.58	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

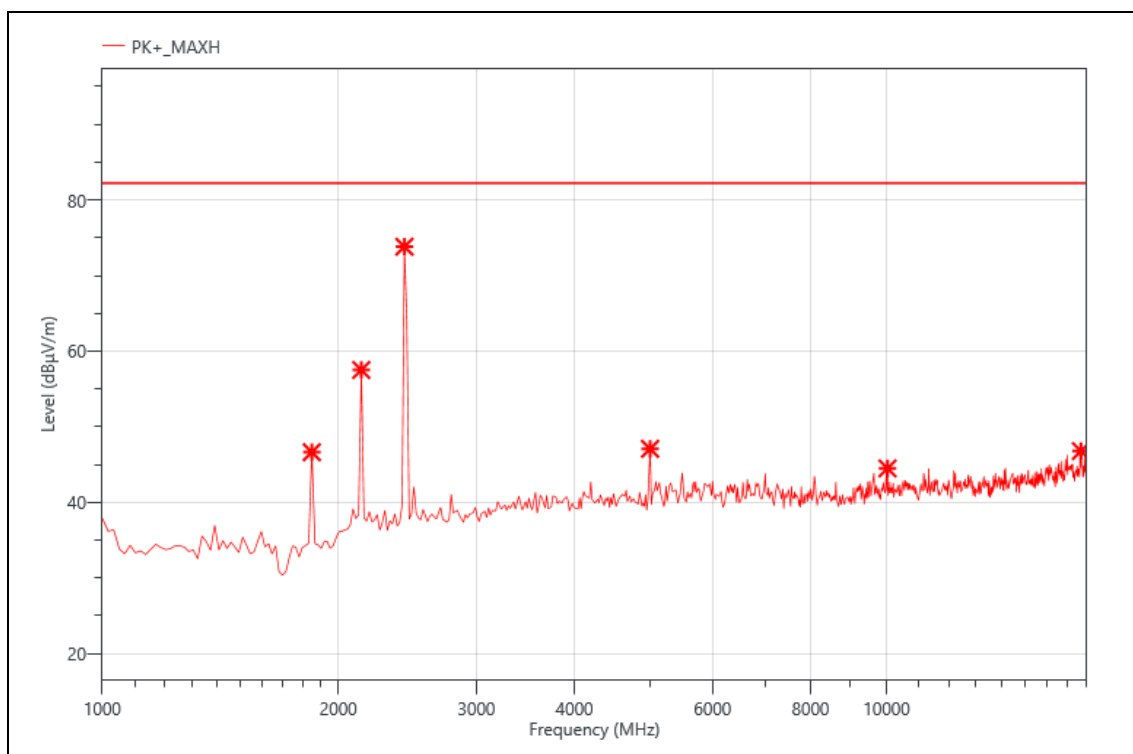


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1850.000	66.31	-19.68	46.63	82.30	35.67	PK+	V
2	2139.000	75.52	-18.01	57.51	82.30	24.79	PK+	V
3	2428.000	91.03	-17.21	73.82	82.30	8.48	PK+	V
4	4995.000	58.18	-11.1	47.08	82.30	35.22	PK+	V
5	10027.000	50.62	-6.13	44.49	82.30	37.81	PK+	V
6	17694.000	46.85	-0.07	46.78	82.30	35.52	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

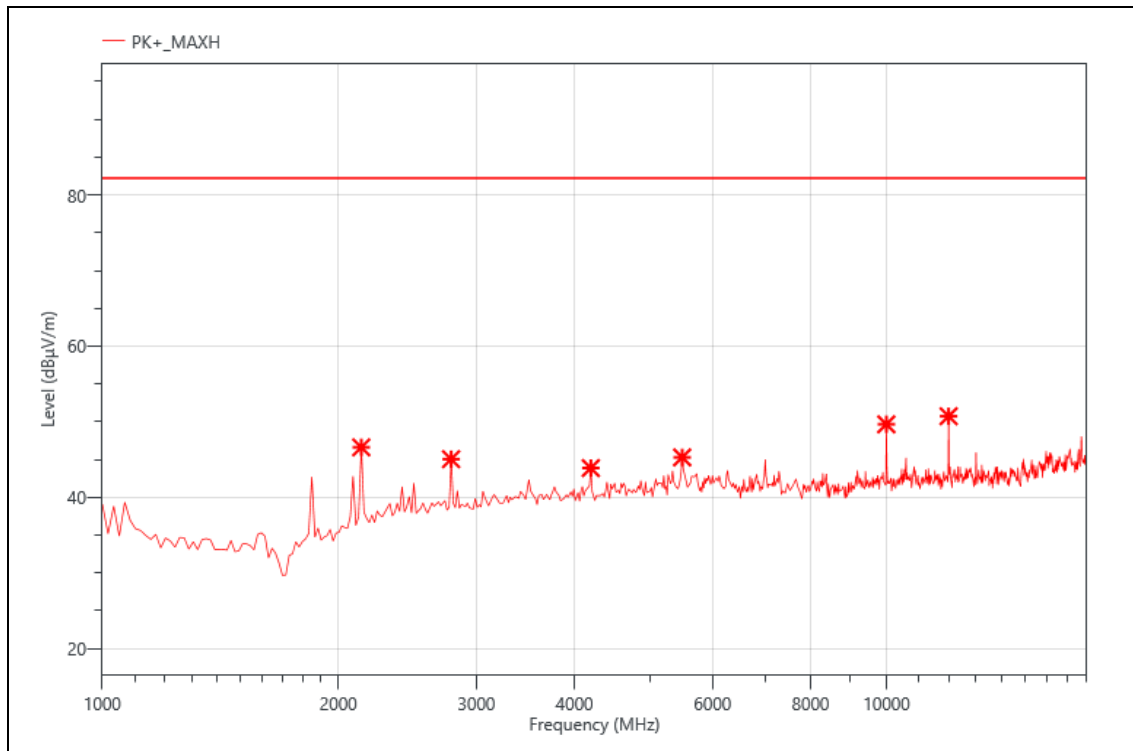


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2139.000	64.62	-18.01	46.61	82.30	35.69	PK+	H
2	2785.000	61.82	-16.77	45.05	82.30	37.25	PK+	H
3	4196.000	56.11	-12.24	43.87	82.30	38.43	PK+	H
4	5488.000	54.60	-9.32	45.28	82.30	37.02	PK+	H
5	9993.000	55.76	-6.1	49.66	82.30	32.64	PK+	H
6	11999.000	54.82	-4.09	50.73	82.30	31.57	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

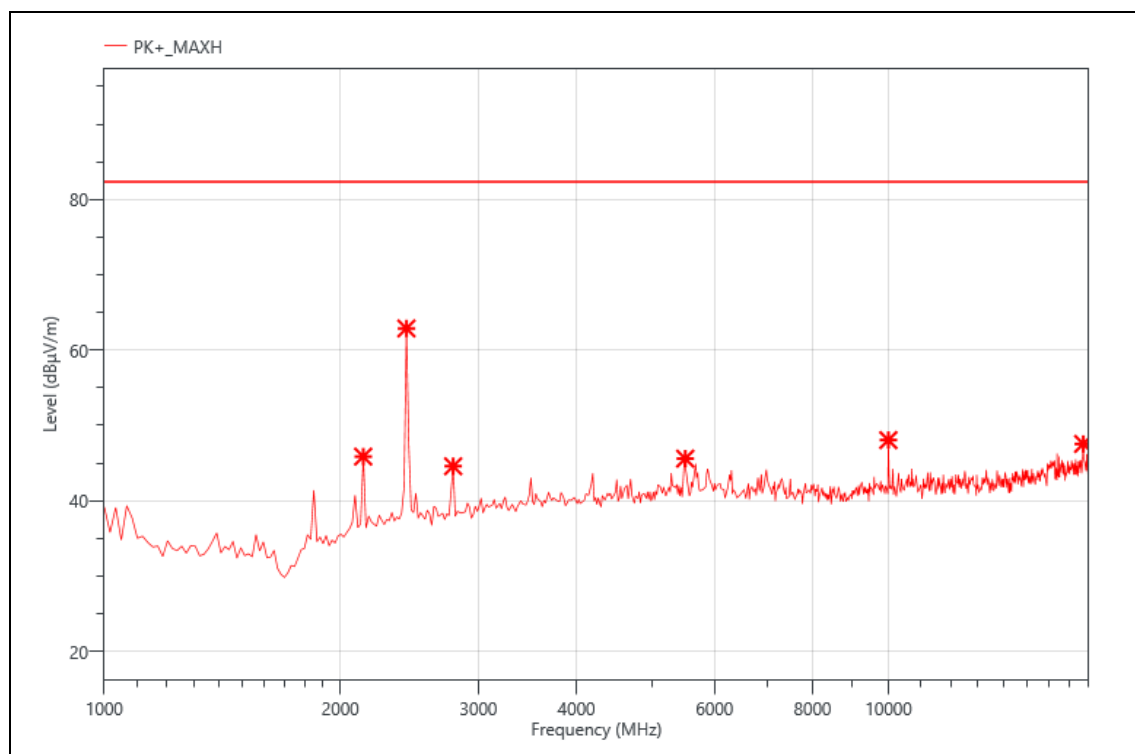


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2139.000	63.87	-18.01	45.86	82.30	36.44	PK+	H
2	2428.000	80.09	-17.21	62.88	82.30	19.42	PK+	H
3	2785.000	61.35	-16.77	44.58	82.30	37.72	PK+	H
4	5505.000	54.91	-9.32	45.59	82.30	36.71	PK+	H
5	9993.000	54.15	-6.1	48.05	82.30	34.25	PK+	H
6	17711.000	47.29	0.25	47.54	82.30	34.76	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND12-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

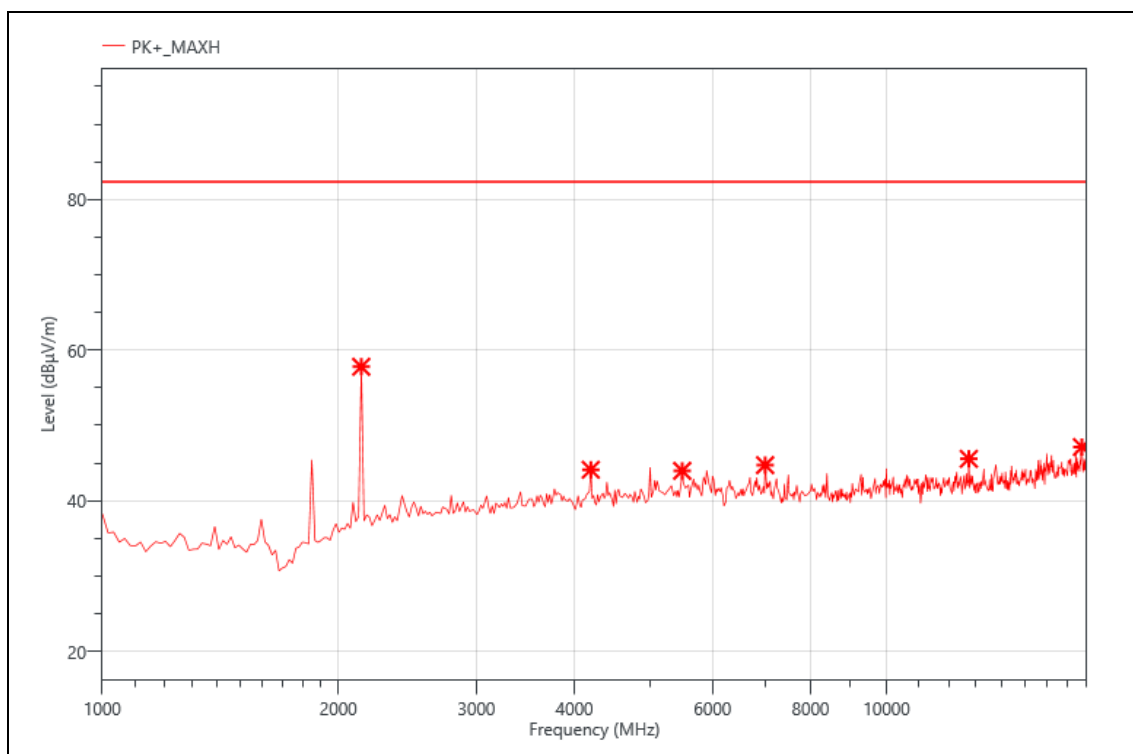


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2139.000	75.80	-18.01	57.79	82.30	24.51	PK+	V
2	4196.000	56.35	-12.24	44.11	82.30	38.19	PK+	V
3	5488.000	53.29	-9.32	43.97	82.30	38.33	PK+	V
4	7001.000	52.33	-7.6	44.73	82.30	37.57	PK+	V
5	12730.000	50.05	-4.49	45.56	82.30	36.74	PK+	V
6	17745.000	46.59	0.54	47.13	82.30	35.17	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

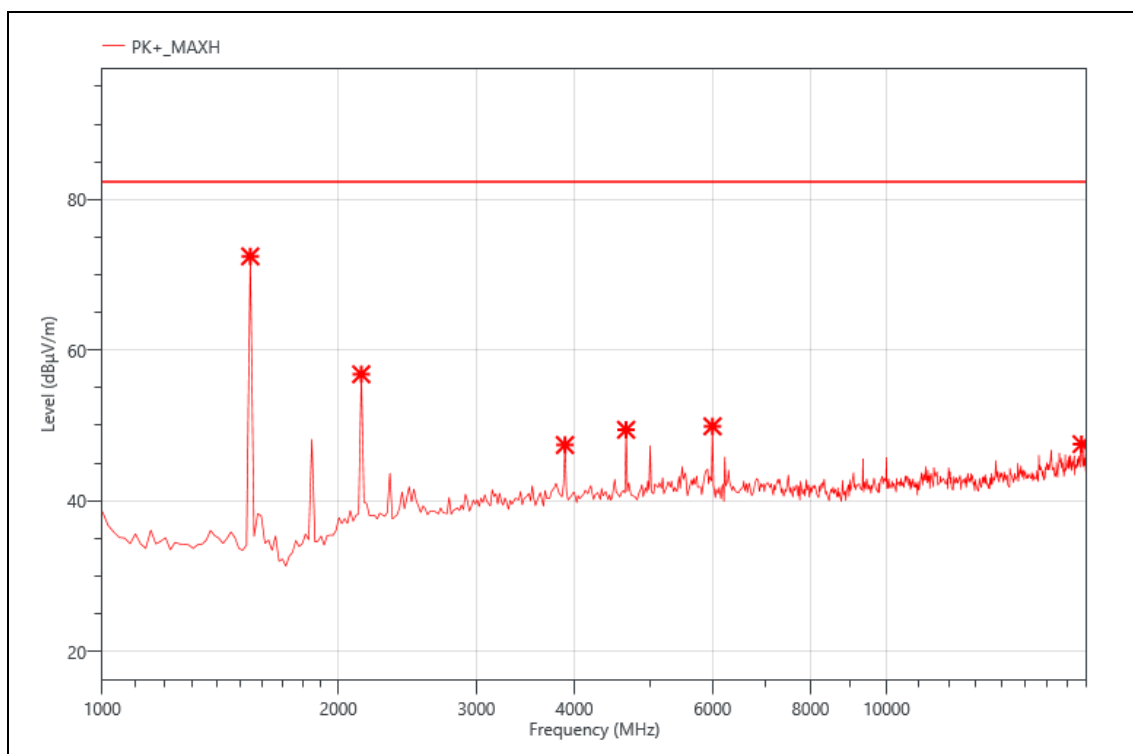


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1544.000	94.58	-22.13	72.45	82.30	9.85	PK+	V
2	2139.000	74.80	-18.01	56.79	82.30	25.51	PK+	V
3	3890.000	60.81	-13.41	47.40	82.30	34.90	PK+	V
4	4655.000	61.05	-11.63	49.42	82.30	32.88	PK+	V
5	5998.000	58.87	-8.99	49.88	82.30	32.42	PK+	V
6	17728.000	46.99	0.52	47.51	82.30	34.79	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

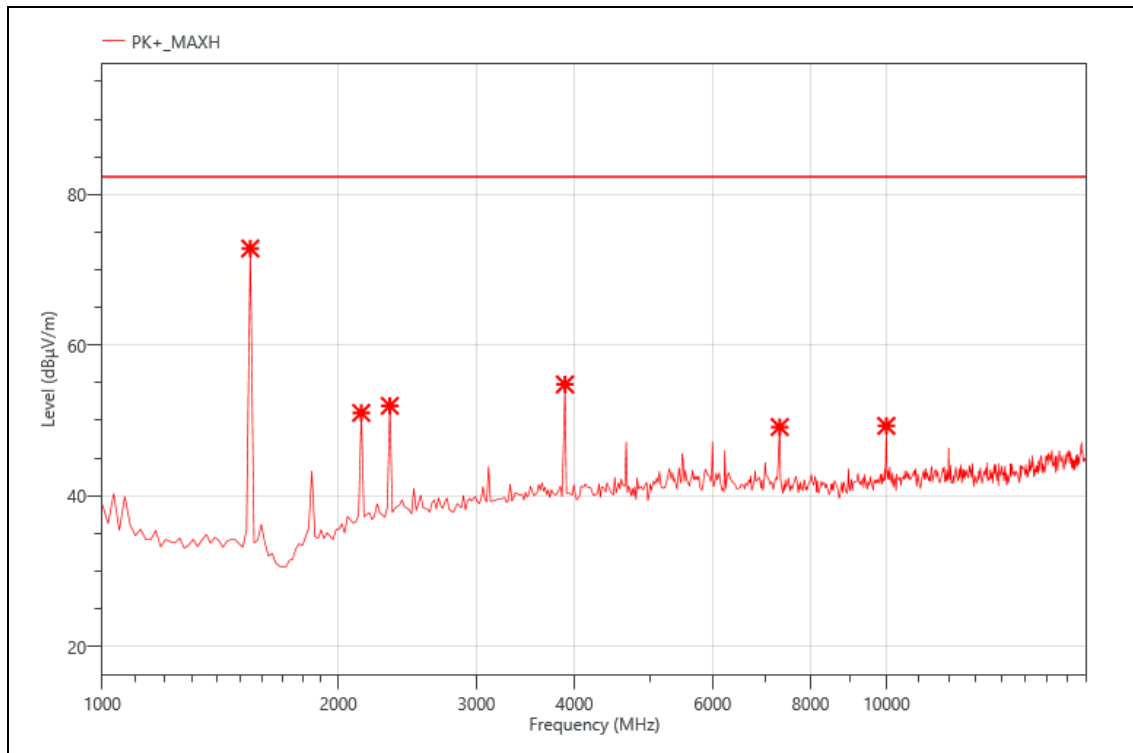


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1544.000	94.96	-22.13	72.83	82.30	9.47	PK+	H
2	2139.000	69.01	-18.01	51.00	82.30	31.30	PK+	H
3	2326.000	69.63	-17.69	51.94	82.30	30.36	PK+	H
4	3890.000	68.19	-13.41	54.78	82.30	27.52	PK+	H
5	7307.000	56.93	-7.81	49.12	82.30	33.18	PK+	H
6	9993.000	55.38	-6.1	49.28	82.30	33.02	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

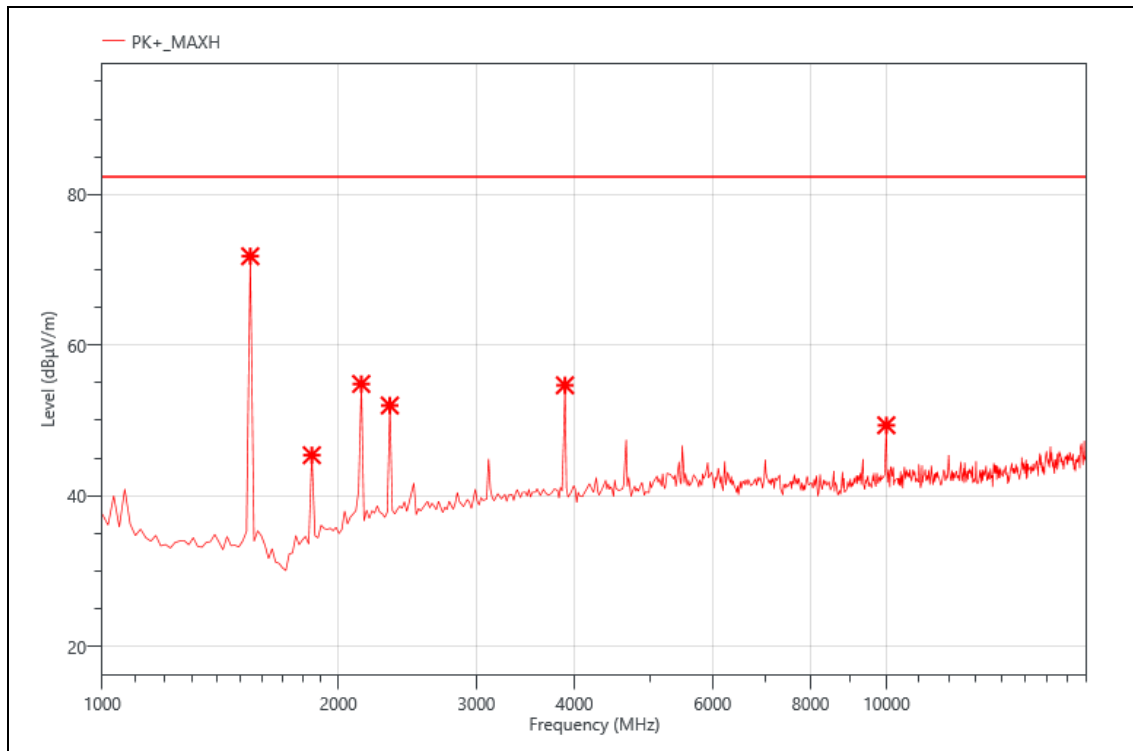


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1544.000	93.93	-22.13	71.80	82.30	10.50	PK+	H
2	1850.000	65.06	-19.68	45.38	82.30	36.92	PK+	H
3	2139.000	72.85	-18.01	54.84	82.30	27.46	PK+	H
4	2326.000	69.67	-17.69	51.98	82.30	30.32	PK+	H
5	3890.000	68.07	-13.41	54.66	82.30	27.64	PK+	H
6	9993.000	55.46	-6.1	49.36	82.30	32.94	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

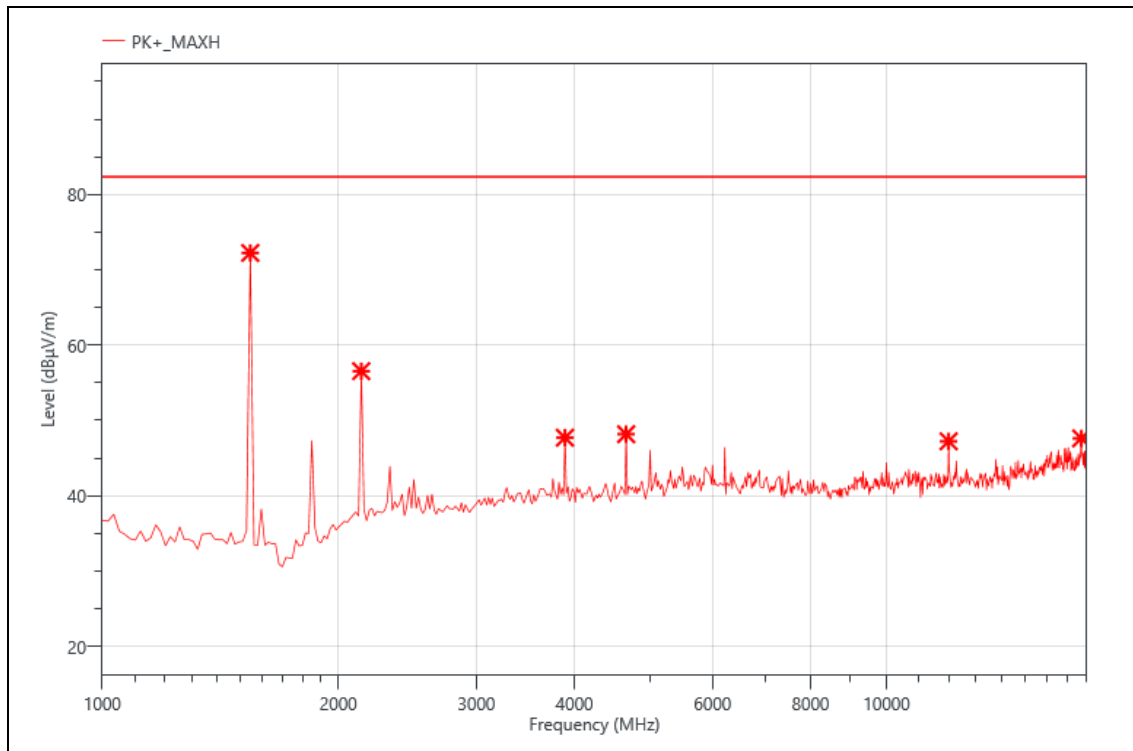


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1544.000	94.37	-22.13	72.24	82.30	10.06	PK+	V
2	2139.000	74.55	-18.01	56.54	82.30	25.76	PK+	V
3	3890.000	61.12	-13.41	47.71	82.30	34.59	PK+	V
4	4655.000	59.80	-11.63	48.17	82.30	34.13	PK+	V
5	11999.000	51.32	-4.09	47.23	82.30	35.07	PK+	V
6	17711.000	47.36	0.25	47.61	82.30	34.69	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

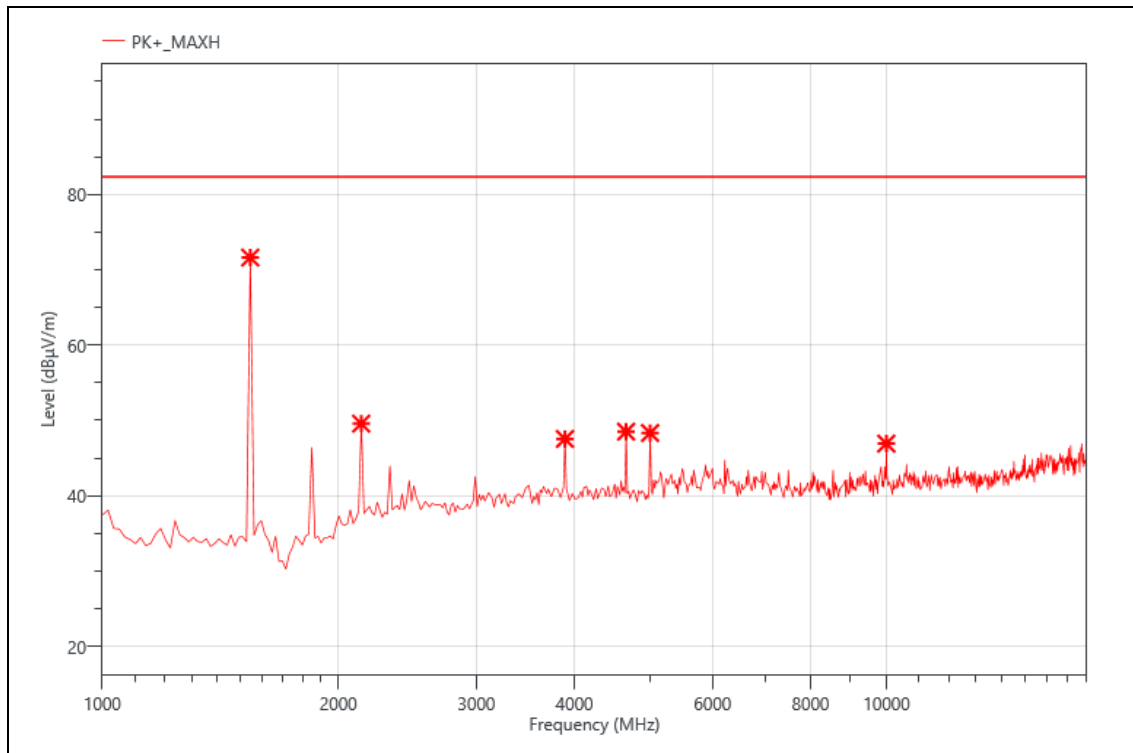


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1544.000	93.76	-22.13	71.63	82.30	10.67	PK+	V
2	2139.000	67.58	-18.01	49.57	82.30	32.73	PK+	V
3	3890.000	60.95	-13.41	47.54	82.30	34.76	PK+	V
4	4655.000	60.14	-11.63	48.51	82.30	33.79	PK+	V
5	4995.000	59.43	-11.1	48.33	82.30	33.97	PK+	V
6	9993.000	53.02	-6.1	46.92	82.30	35.38	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND13-H
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

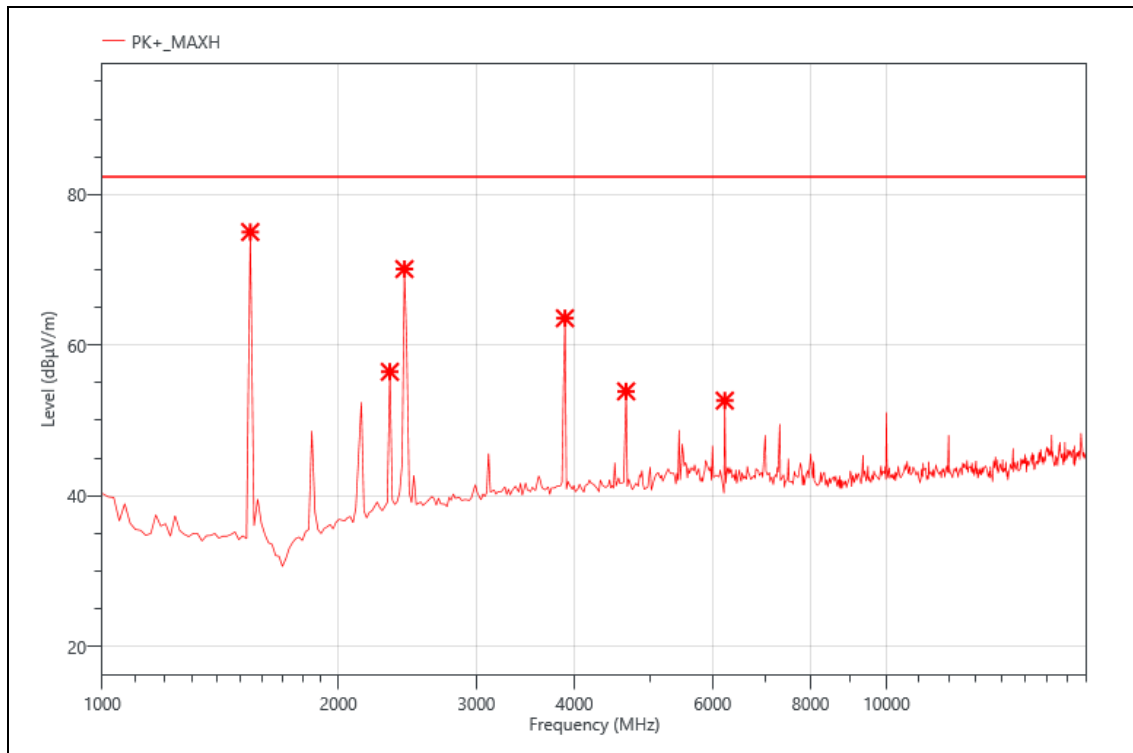


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1544.000	97.15	-22.13	75.02	82.30	7.28	PK+	H
2	2326.000	74.14	-17.69	56.45	82.30	25.85	PK+	H
3	2428.000	87.31	-17.21	70.10	82.30	12.20	PK+	H
4	3890.000	76.98	-13.41	63.57	82.30	18.73	PK+	H
5	4655.000	65.49	-11.63	53.86	82.30	28.44	PK+	H
6	6219.000	61.36	-8.73	52.63	82.30	29.67	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

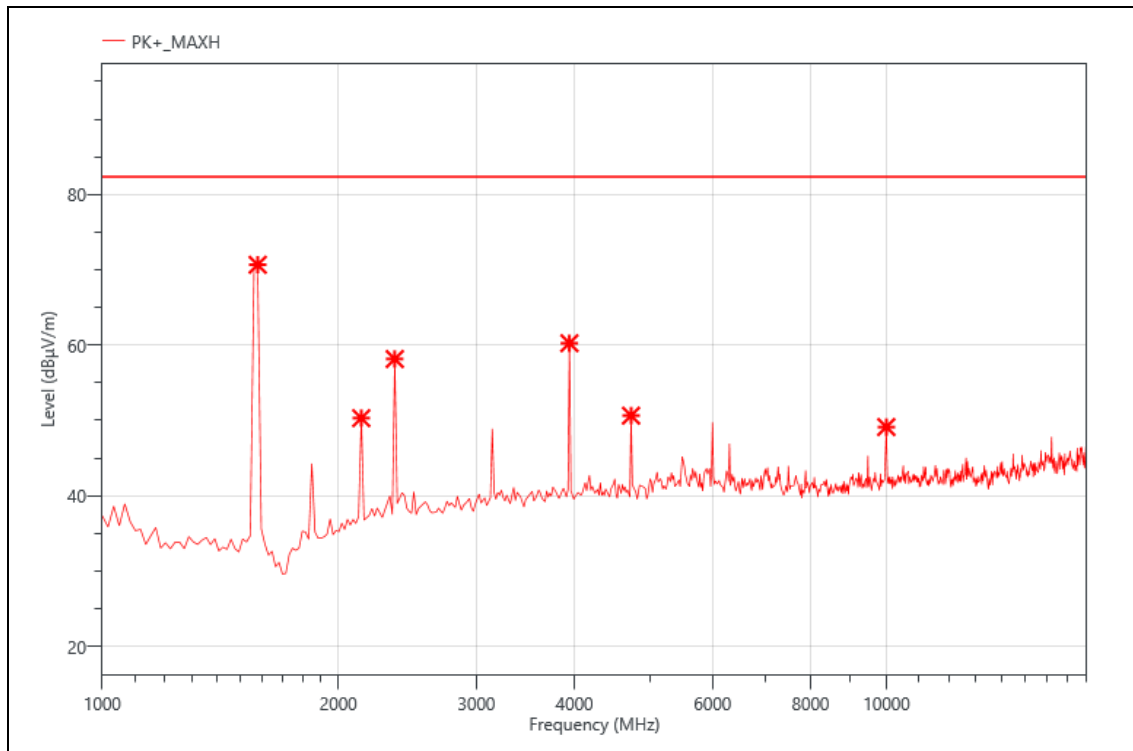


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1578.000	92.53	-21.86	70.67	82.30	11.63	PK+	H
2	2139.000	68.31	-18.01	50.30	82.30	32.00	PK+	H
3	2360.000	75.58	-17.43	58.15	82.30	24.15	PK+	H
4	3941.000	73.64	-13.39	60.25	82.30	22.05	PK+	H
5	4723.000	62.21	-11.58	50.63	82.30	31.67	PK+	H
6	9993.000	55.22	-6.1	49.12	82.30	33.18	PK+	H

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]

Mode:	LTE-BAND14-L
Power:	DC 12V
TE:	Berny
Date	2026/4/2
T/A/P	22.3°C/51%/101Kpa

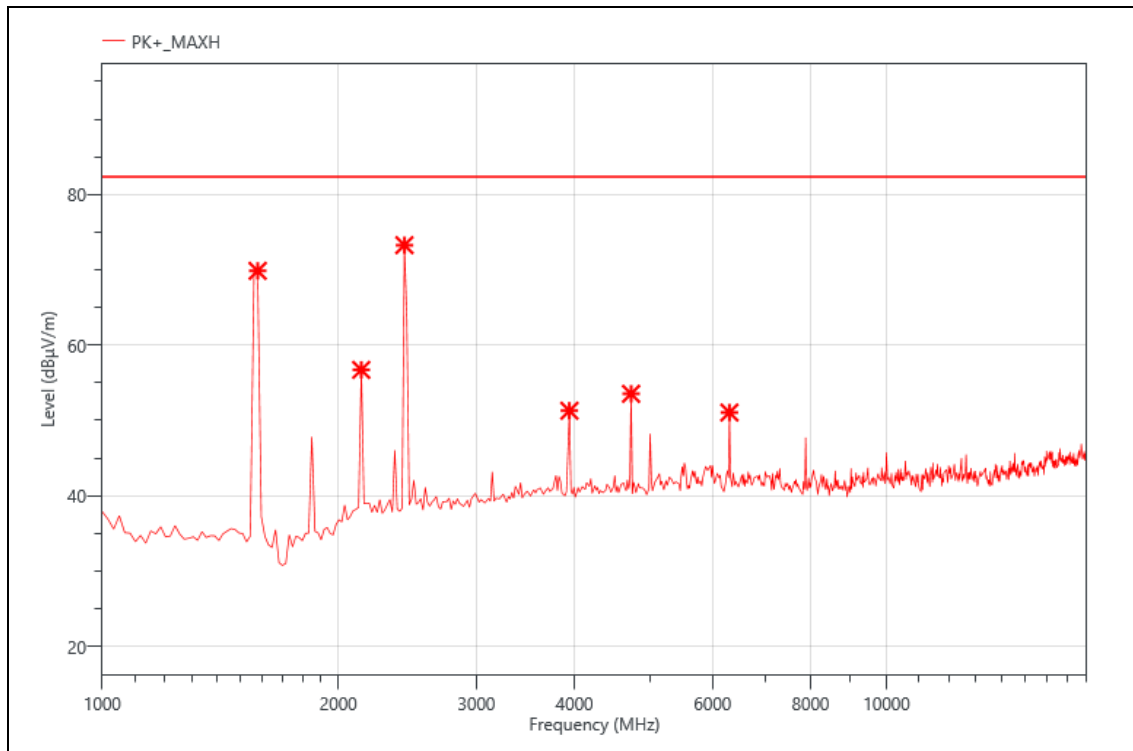

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1578.000	91.72	-21.86	69.86	82.30	12.44	PK+	V
2	2139.000	74.72	-18.01	56.71	82.30	25.59	PK+	V
3	2428.000	90.48	-17.21	73.27	82.30	9.03	PK+	V
4	3941.000	64.68	-13.39	51.29	82.30	31.01	PK+	V
5	4723.000	65.11	-11.58	53.53	82.30	28.77	PK+	V
6	6304.000	58.42	-7.37	51.05	82.30	31.25	PK+	V

Note: [Margin=Limit-Meas.]; [Meas.=Reading+Corr.]