



Radio Test Report

Report No.: STS2603308W10

Issued for

HONG KONG LELEGAO TECHNOLOGY CO., LIMITED

19H Maxgrand Plaza, No.3 Tai Yau Street, San Po Kong,
Kowloon, HongKong, China

Product Name: 4G Smart phone

Brand Name: Blackview

Model Name: WAVE 10C

Series Model(s): N/A

FCC ID: 2BSW8-WAVE10C

Test Standards: FCC Part15.407

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: HONG KONG LELEGAO TECHNOLOGY CO.,LIMITED
Address: 19H Maxgrand Plaza, No.3 Tai Yau Street, San Po Kong, Kowloon, HongKong, China
Manufacturer's Name: Shenzhen Doke Electronic Co., LTD
Address: 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China

Product Description

Product Name: 4G Smart phone
Brand Name: Blackview
Model Name: WAVE 10C
Series Model(s): N/A

Test Standards: FCC Part15.407

Test Procedure ANSI C63.10-2020+Cor 1-2023

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 04 Mar. 2026
Date (s) of performance of tests: 04 Mar. 2026 ~ 31 Mar. 2026
Date of Issue: 31 Mar. 2026
Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.6 EQUIPMENTS LIST	14
3. EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION AND MEASUREMENT	19
4. POWER SPECTRAL DENSITY TEST	65
4.1 LIMIT	65
4.2 TEST PROCEDURE	65
4.3 DEVIATION FROM STANDARD	66
4.4 TEST SETUP	66
4.5 EUT OPERATION CONDITIONS	66
4.6 TEST RESULTS	66
5. DUTY CYCLE	67
5.1 TEST STANDARD	67
5.2 TEST PROCEDURE	67
5.3 DEVIATION FROM STANDARD	67
5.4 TEST SETUP	67
5.5 EUT OPERATION CONDITIONS	67
5.6 TEST RESULTS	67
6. BANDWIDTH MEASUREMENT	68
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	68
6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	69
6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	70
7. MAXIMUM OUTPUT POWER	71
7.1 LIMIT	71
7.2 TEST PROCEDURE	71
7.3 DEVIATION FROM STANDARD	71



Table of Contents	Page
7.4 TEST SETUP	71
7.5 EUT OPERATION CONDITIONS	71
7.6 TEST RESULTS	71
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	72
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	72
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	72
9. ANTENNA REQUIREMENT	73
9.1 STANDARD REQUIREMENT	73
9.2 EUT ANTENNA	73
10. FREQUENCY STABILITY	74
10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	74
10.2 TEST PROCEDURE	74
10.3 TEST STEUP	74
10.4 TEST RESULT	75
APPENDIX - PHOTOS OF TEST SETUP	77

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	31 Mar. 2026	STS2603308W10	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203	Antenna Requirement	PASS

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020+Cor 1-2023.

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add.: 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	4G Smart phone	
Brand Name	Blackview	
Model Name	WAVE 10C	
Series Model(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is 4G Smart phone	
	Operation Frequency:	IEEE 802.11a/n/ac(20M): 5.180GHz-5.240GHz IEEE 802.11n/ac(40M): 5.190GHz-5.230GHz IEEE 802.11 ac(80M): 5.210GHz
		IEEE 802.11 a/n/ac(20M): 5.745GHz-5.825GHz IEEE 802.11n/ac(40M): 5.755GHz-5.795GHz IEEE 802.11 ac(80M): 5.775GHz
	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM
	Antenna Type:	FPC
	Antenna Gain:	1.43dBi
More details of EUT technical specification, please refer to the User Manual.		
Test Channel	Please refer to the Note 3.	
Power Rating	N/A	
Adapter	Model: QZ-01004AA00 Input: 100-240V~50/60Hz 0.3A Output: 5V2A	
Battery	Model: FHPV466495PNJ Rated Voltage: 3.85V Charge Limit Voltage: 4.4V Capacity: 5000mAh	
Hardware version number	J567F_610_310_D4EF_V1.0	
Software version number	WAVE10C_NEU_j567f_V1.0_A16	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note

- For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- The antenna details in this report are based on the manufacturer provided antenna specification documents and apply only to the tested sample identified herein.
Any discrepancies in the antenna information may affect the accuracy of the test results, and the customer assumes responsibility for any related issues.

3.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5775
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20)/ac(VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 3	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 4	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 6	TX IEEE 802.11ac VHT20 CH149&CH157&CH165	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 8	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 10	TX IEEE 802.11ac VHT40 CH151&CH159	NSS1 MCS0
Mode 11	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 12	TX IEEE 802.11ac VHT80 CH155	NSS1 MCS0

Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 13: Keeping WLAN TX


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(5G)	U-NII-1 (5150MHz-5250MHz)	802.11a	1.43	11	Engineering mode
		802.11n(HT20)		12	
		802.11n(HT40)		11	
		802.11ac(VHT20)		11	
		802.11ac(VHT40)		11	
		802.11ac(VHT80)		11	
RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(5G)	U-NII-3 (5725MHz-5850MHz)	802.11a	1.43	11	Engineering mode
		802.11n(HT20)		12	
		802.11n(HT40)		11	
		802.11ac(VHT20)		11	
		802.11ac(VHT40)		11	
		802.11ac(VHT80)		11	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test

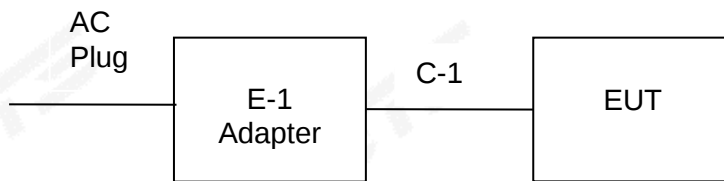

RF Conducted Test



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Adapter	N/A	QZ-01004AA0	N/A
C-1	USB Cable	N/A	QZ-01004AA0	N/A

Item	Equipment	Mfr/Brand	Length	Note
C-1	Shielded	NO	100cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
966 chamber	CHENYU	966 Room	966	2025.08.13	2028.08.12
Temperature & Humidity	TORIE	TP502V4-P	6700000124280	2025.10.13	2026.10.12
Pre-Amplifier(0.1M-3G Hz)	EM	EM330	060665	2026.02.05	2027.02.04
Pre-Amplifier(1G-18G Hz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40 GHz)	SKET	LNPA_1840-50	SK2018101801	2026.03.04	2027.03.03
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	SKET	SU319E	51409043	2025.09.25	2026.09.24
Band 5.1G-5.8G Filter	HX MICROWAVE	HXLBQ-DZA62	5410059	2025.09.23	2026.09.22
Antenna Mast	MF	MFA-440H	1308023	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENG FENG	DPS-305AF	17064939	2025.09.22	2026.09.21
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	2025.09.26	2026.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.26	2026.09.25
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
CE Cable	EASTSHEEP	C01	10057	2025.09.25	2026.09.24
Temperature & Humidity	TORIE	TP502V4-P	6700000422137	2025.08.26	2026.08.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2026.02.04	2027.02.03
Switch control box	MW	MW100-RFCB	52206001	2025.09.23	2026.09.22
RF Coaxial Cable	XINQY	CT40PE	DC-40G	2026.02.04	2027.02.03
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2026.02.04	2027.02.03
Temperature & Humidity	TORIE	TP502V4-P	6700000124211	2025.10.09	2026.10.08
Test SW	MW	MTS 8310 2.0.0.0			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

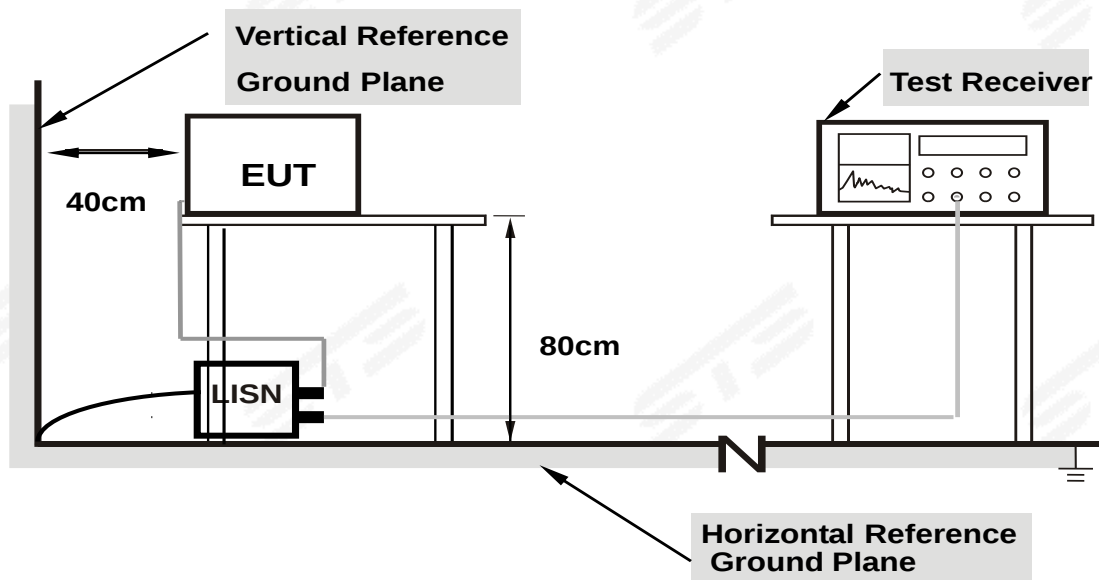

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS


Temperature:	25.1°C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5980	24.49	19.38	43.87	56.00	-12.13	QP
2	0.5980	13.01	19.38	32.39	46.00	-13.61	AVG
3	0.8220	25.56	19.36	44.92	56.00	-11.08	QP
4	0.8220	15.27	19.36	34.63	46.00	-11.37	AVG
5	1.1580	26.31	19.35	45.66	56.00	-10.34	QP
6	1.1580	15.84	19.35	35.19	46.00	-10.81	AVG
7	1.5620	29.44	19.35	48.79	56.00	-7.21	QP
8	1.5620	20.07	19.35	39.42	46.00	-6.58	AVG
9	1.9020	31.29	19.35	50.64	56.00	-5.36	QP
10	1.9020	19.56	19.35	38.91	46.00	-7.09	AVG
11	3.6500	25.55	19.41	44.96	56.00	-11.04	QP
12	3.6500	14.40	19.41	33.81	46.00	-12.19	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

100.0 dBuV

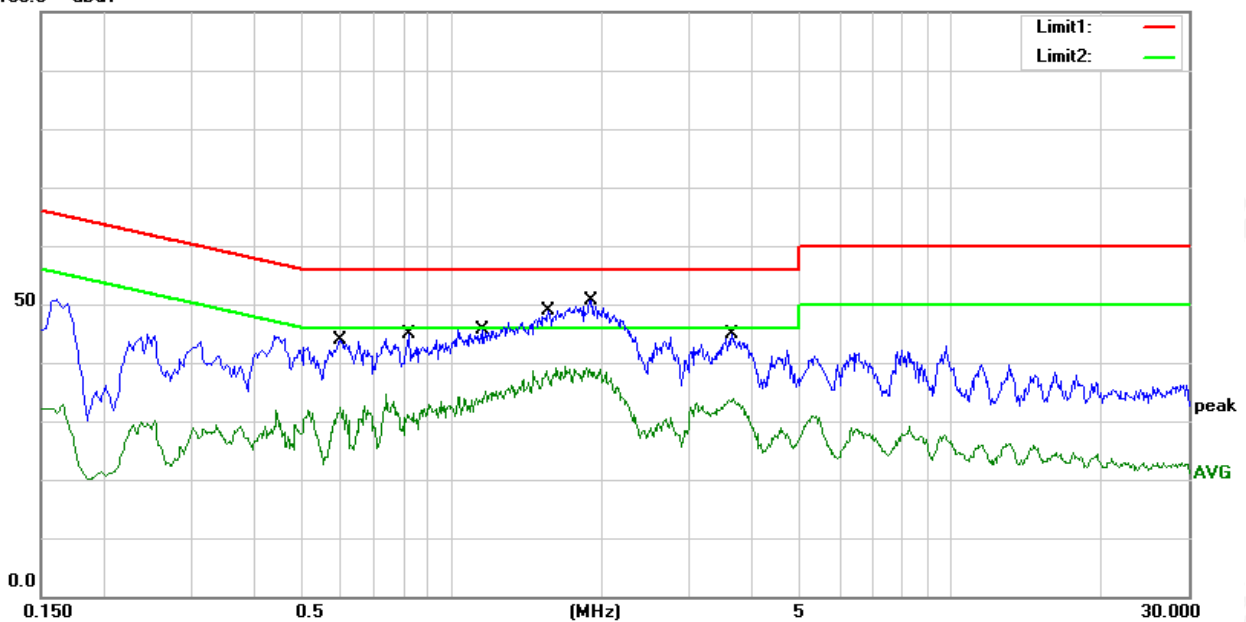


Temperature:	25.1℃	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode :	Mode 13		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3740	30.33	19.36	49.69	58.41	-8.72	QP
2	0.3740	15.53	19.36	34.89	48.41	-13.52	AVG
3	0.5260	28.47	19.35	47.82	56.00	-8.18	QP
4	0.5260	14.82	19.35	34.17	46.00	-11.83	AVG
5	0.6900	27.44	19.41	46.85	56.00	-9.15	QP
6	0.6900	14.41	19.41	33.82	46.00	-12.18	AVG
7	1.1300	28.23	19.39	47.62	56.00	-8.38	QP
8	1.1300	14.88	19.39	34.27	46.00	-11.73	AVG
9	1.7980	31.81	19.38	51.19	56.00	-4.81	QP
10	1.7980	16.42	19.38	35.80	46.00	-10.20	AVG
11	3.6940	27.55	19.46	47.01	56.00	-8.99	QP
12	3.6940	13.27	19.46	32.73	46.00	-13.27	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

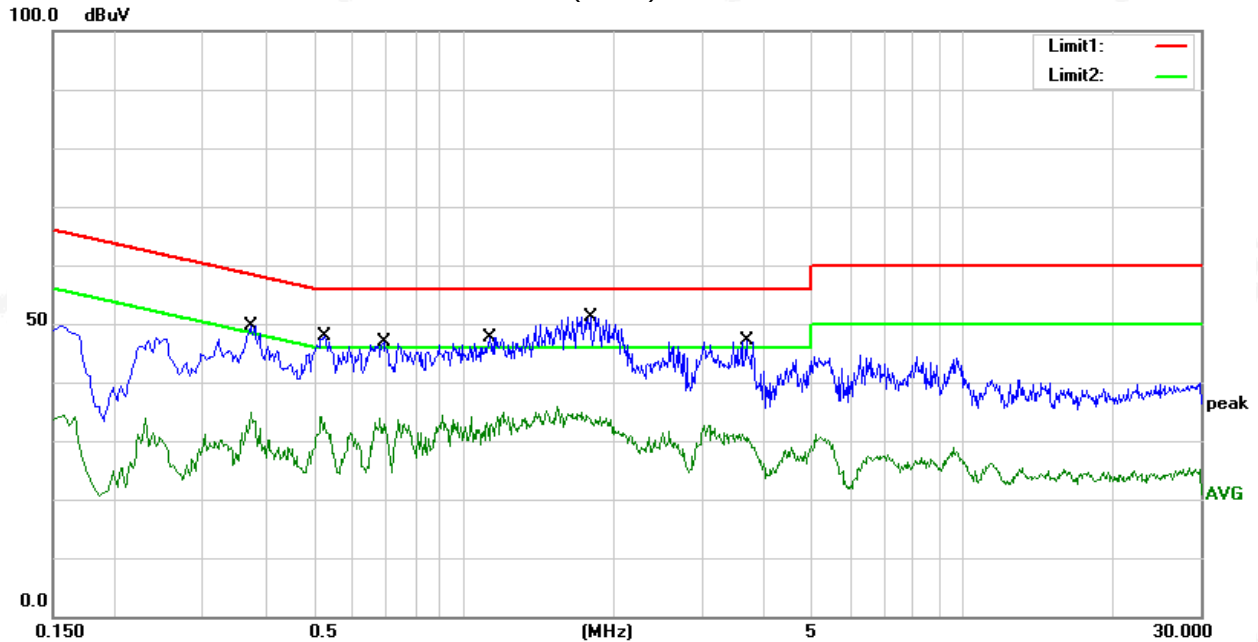

3.2 RADIATED EMISSION AND MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: dBuV/m(at 3M) = EIRP(dBm) + 95.2.

Peak Limit = -27dBm/MHz + 95.2 = 68.2 dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge



Spectrum Parameter	Setting
Detector	Peak/AV
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested with a band-stop filter and performed pretest to three orthogonal axis. The worst-case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

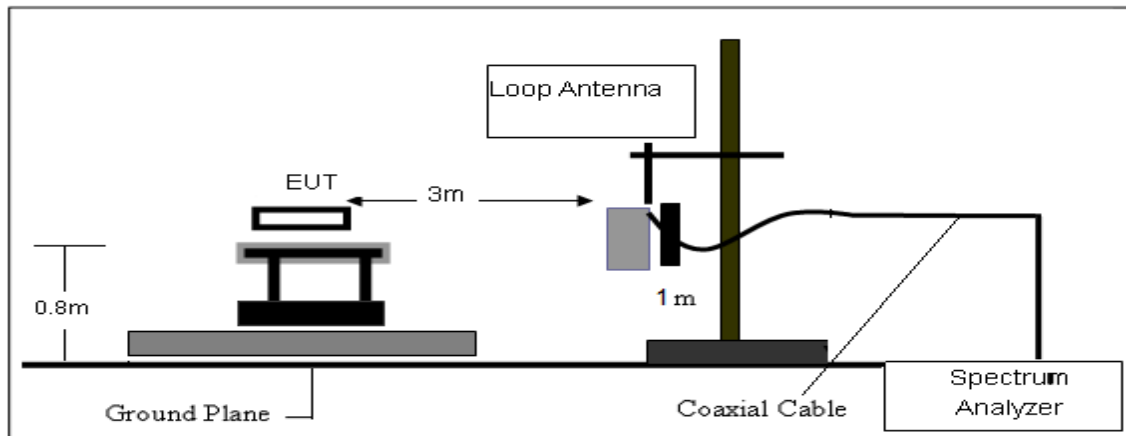

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

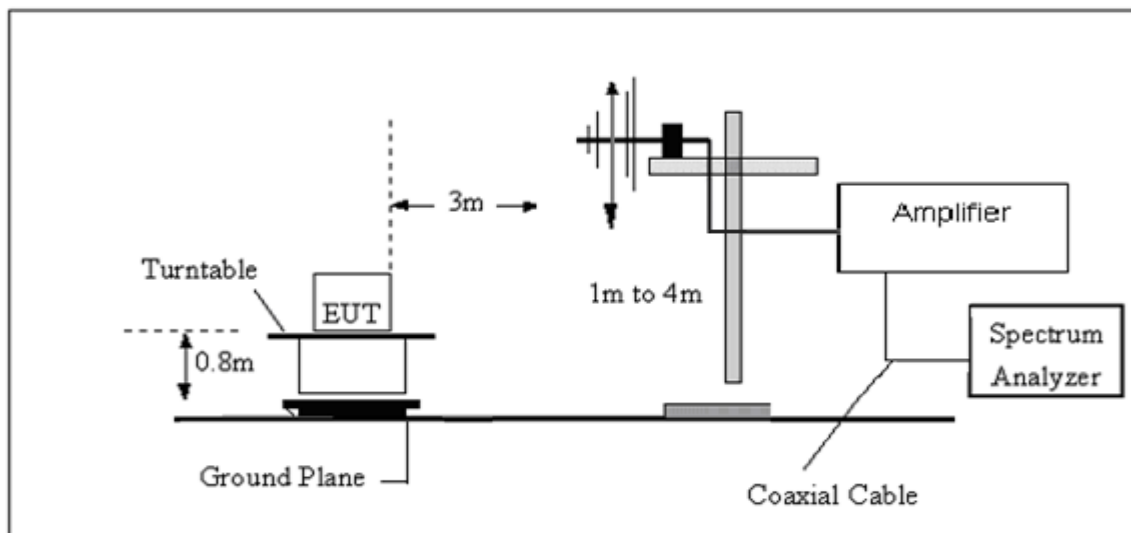

(C) Radiated Emission Test-Up Frequency Above 1GHz

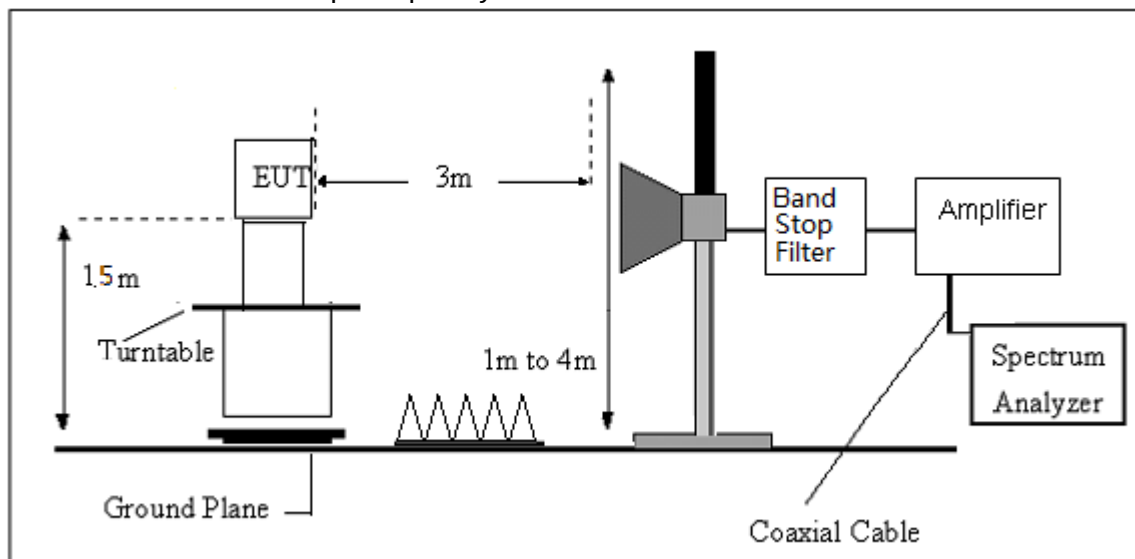

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$

3.2.7 TEST RESULTS (Between 9KHz – 30 MHz)

Temperature:	23.4 °C	Relative Humidity:	60%
Test Voltage:	DC 3.85V	Polarization :	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.8 TEST RESULTS (Between 30MHz – 1GHz)


U-NII-1

Temperature	23.4°C	Relative Humidity:	60%
Test Voltage	DC 3.85V	Polarization:	Horizontal
Test Mode	Mode 1~12(Mode 3 worst mode)-Low Channel		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.7455	28.00	-13.24	14.76	40.00	-25.24	peak
2	34.8500	28.23	-15.34	12.89	40.00	-27.11	peak
3	476.2000	29.36	-8.78	20.58	46.00	-25.42	peak
4	628.4900	29.51	-5.11	24.40	46.00	-21.60	peak
5	706.0900	38.49	-3.98	34.51	46.00	-11.49	peak
6	910.7600	37.02	-0.17	36.85	46.00	-9.15	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

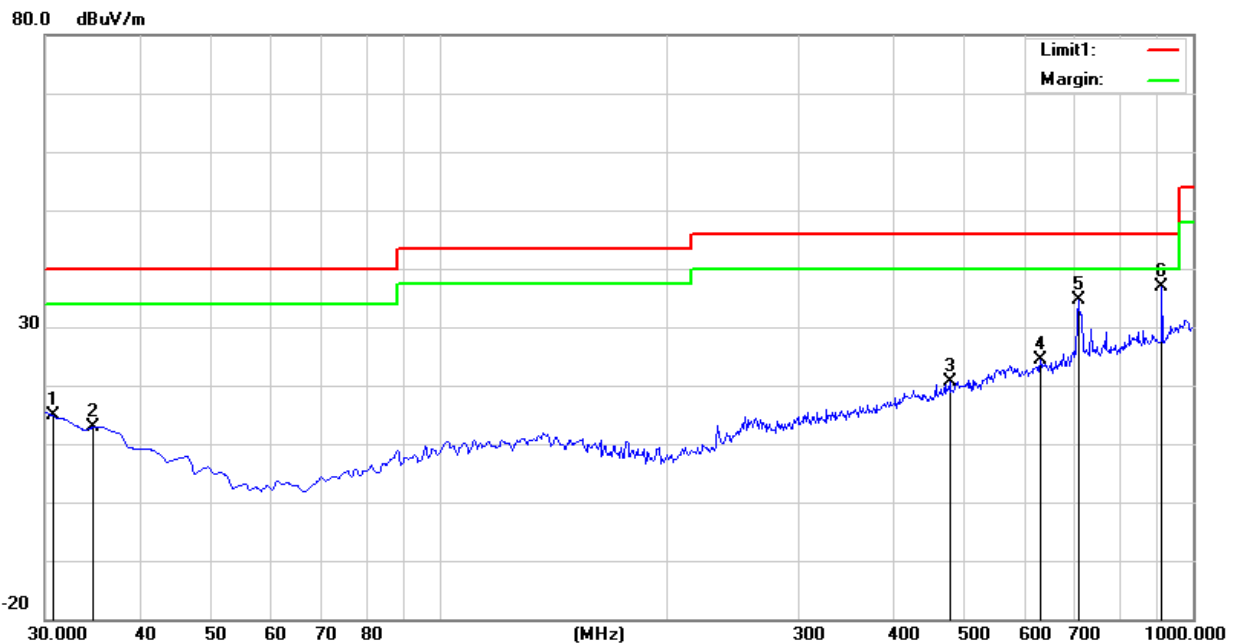


Temperature	23.4℃	Relative Humidity:	60%
Test Voltage	DC 3.85V	Polarization :	Vertical
Test Mode	Mode 1~12(Mode 3 worst mode) -Low Channel		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	28.79	-13.35	15.44	40.00	-24.56	peak
2	34.8823	28.65	-15.36	13.29	40.00	-26.71	peak
3	504.3300	29.14	-7.98	21.16	46.00	-24.84	peak
4	558.6500	29.03	-5.52	23.51	46.00	-22.49	peak
5	705.1200	45.24	-4.01	41.23	46.00	-4.77	peak
6	901.0600	36.22	-0.43	35.79	46.00	-10.21	peak

Remark:

1.Margin = Result (Result =Reading + Factor)-Limit

2.Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

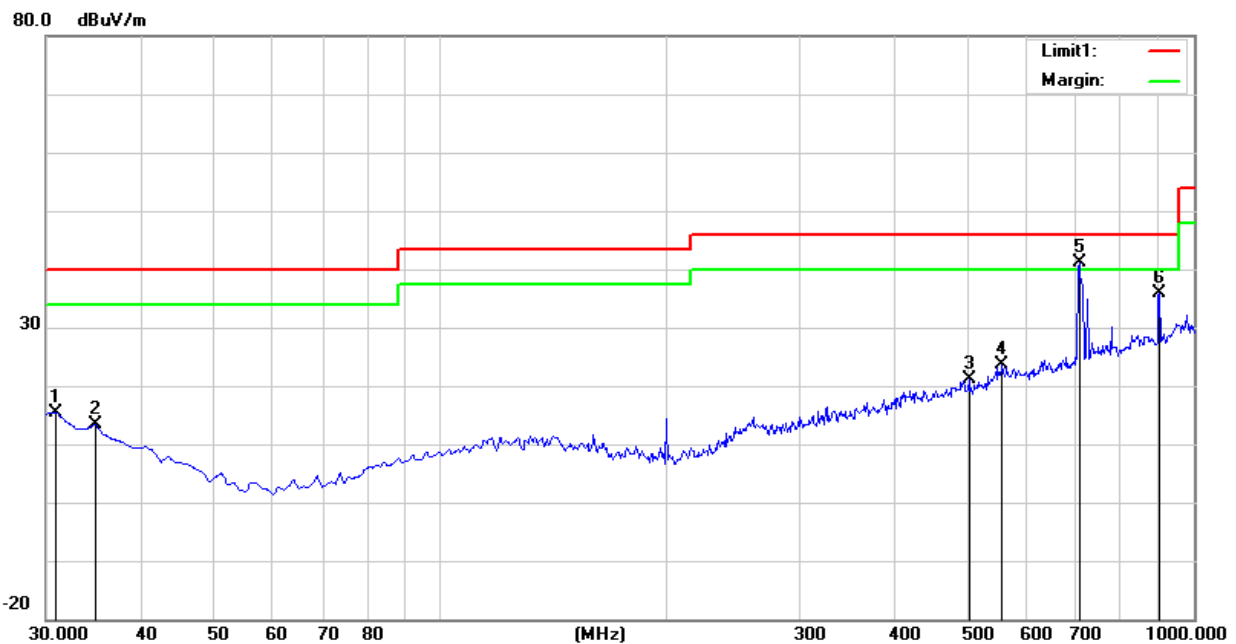

U-NII-3


Temperature	23.4℃	Relative Humidity:	60%
Test Voltage	DC 3.85V	Polarization:	Horizontal
Test Mode	Mode 1~12(Mode 5 worst mode) -Low Channel		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9546	28.40	-13.87	14.53	40.00	-25.47	peak
2	35.8200	28.80	-15.91	12.89	40.00	-27.11	peak
3	412.1800	28.96	-10.46	18.50	46.00	-27.50	peak
4	565.4400	28.62	-5.55	23.07	46.00	-22.93	peak
5	706.0900	37.89	-3.98	33.91	46.00	-12.09	peak
6	910.7600	35.48	-0.17	35.31	46.00	-10.69	peak

Remark:

1.Margin = Result (Result =Reading + Factor)–Limit

2.Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

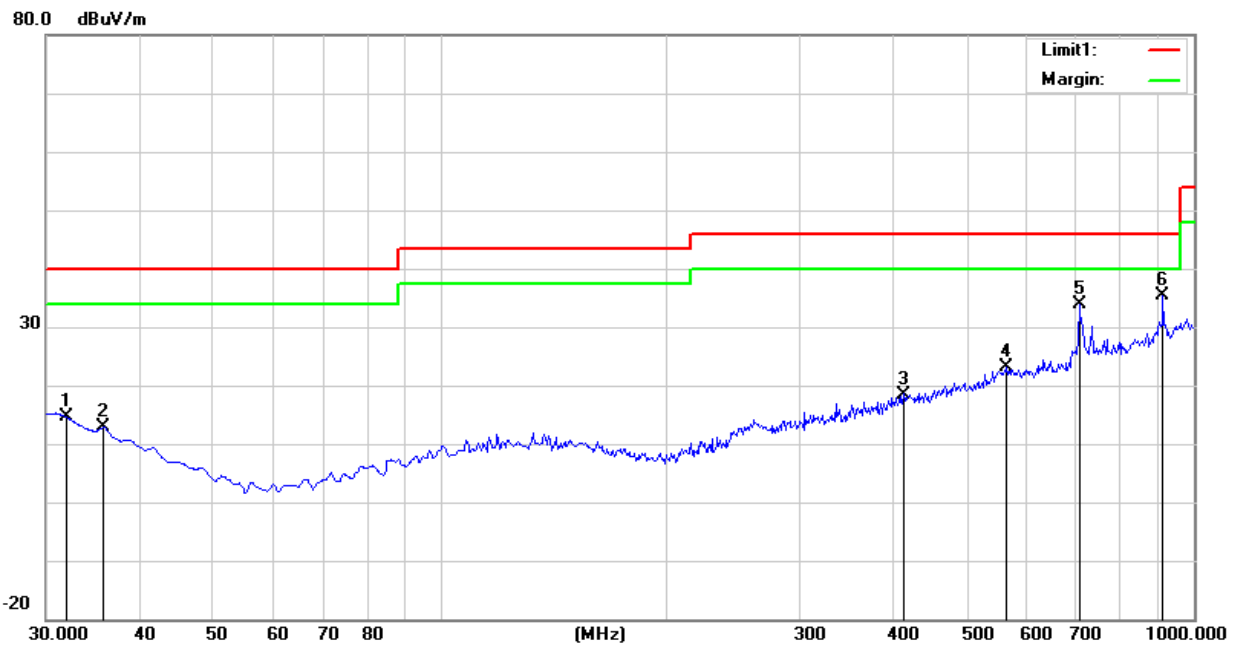


Temperature	23.4°C	Relative Humidity:	60%
Test Voltage	DC 3.85V	Polarization :	Vertical
Test Mode	Mode 1~12(Mode 5 worst mode) -Low Channel		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	28.24	-14.33	13.91	40.00	-26.09	peak
2	261.8300	29.31	-14.77	14.54	46.00	-31.46	peak
3	417.0300	30.12	-10.24	19.88	46.00	-26.12	peak
4	547.0100	29.97	-6.10	23.87	46.00	-22.13	peak
5	704.1500	44.92	-4.04	40.88	46.00	-5.12	peak
6	901.0600	31.95	-0.43	31.52	46.00	-14.48	peak

Remark:

1.Margin = Result (Result =Reading + Factor)-Limit


2.Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

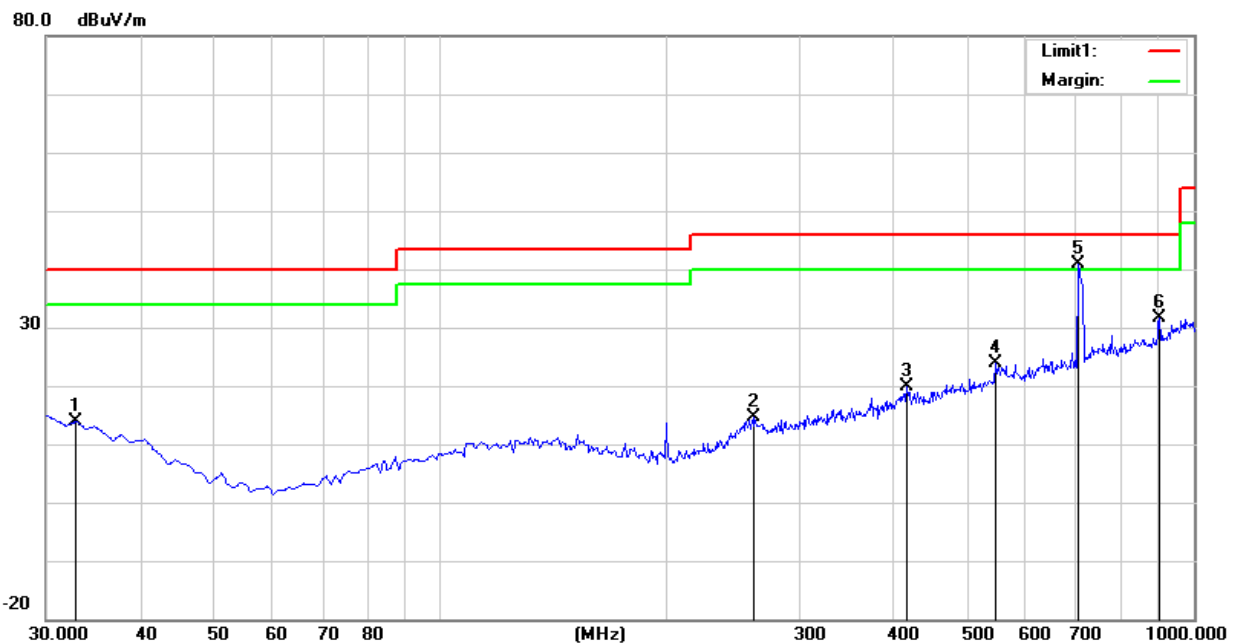

3.2.8 TEST RESULTS (Above 1000 MHz)


U-NII-1
Worst mode (802.11n20)
Low Channel
RSE-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

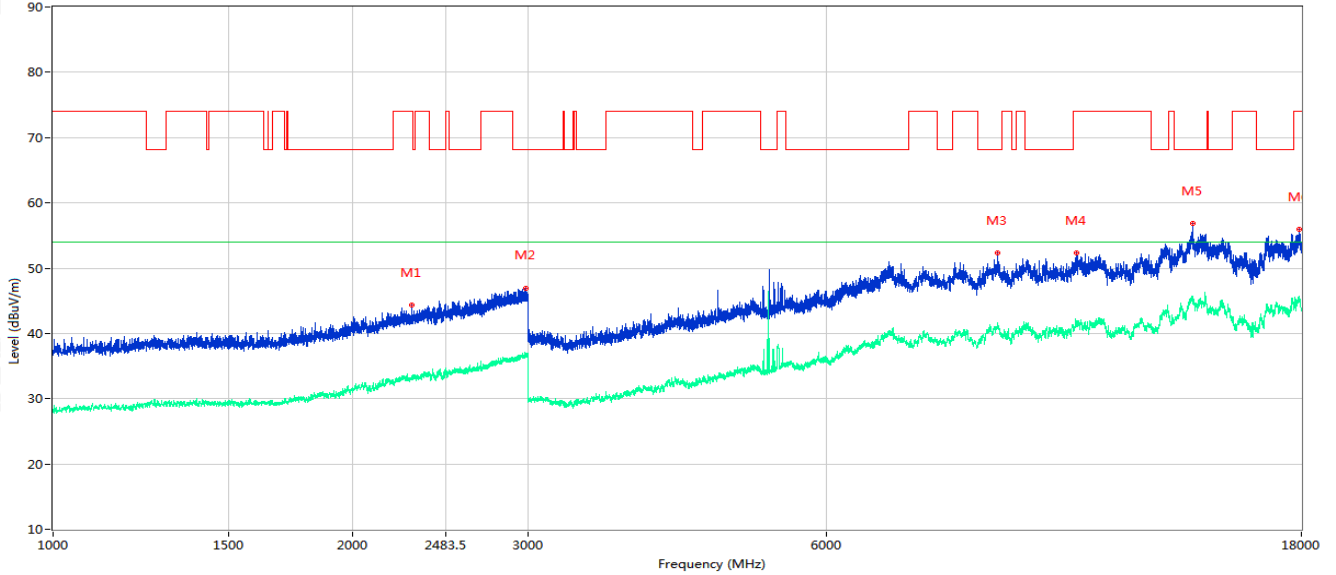

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2295.000	44.39	2.22	74.0	-29.61	Peak	268.90	Horizontal	Pass
1**	2295.000	33.39	2.22	54.0	-20.61	AV	268.90	Horizontal	Pass
2	2989.500	46.99	5.41	68.2	-21.21	Peak	256.30	Horizontal	Pass
2**	2989.500	36.66	5.41	54.0	-17.34	AV	256.30	Horizontal	Pass
3	8911.250	52.32	1.45	68.2	-15.88	Peak	77.70	Horizontal	Pass
3**	8911.250	41.31	1.45	54.0	-12.69	AV	77.70	Horizontal	Pass
4	10682.250	52.35	1.27	74.0	-21.65	Peak	0.00	Horizontal	Pass
4**	10682.250	41.79	1.27	54.0	-12.21	AV	0.00	Horizontal	Pass
5	13993.250	56.83	8.37	68.2	-11.37	Peak	23.40	Horizontal	Pass
5**	13993.250	45.19	8.37	54.0	-8.81	AV	23.40	Horizontal	Pass
6	17925.751	55.99	7.04	74.0	-18.01	Peak	183.20	Horizontal	Pass
6**	17925.751	44.84	7.04	54.0	-9.16	AV	183.20	Horizontal	Pass

RSE-18G-40G-H

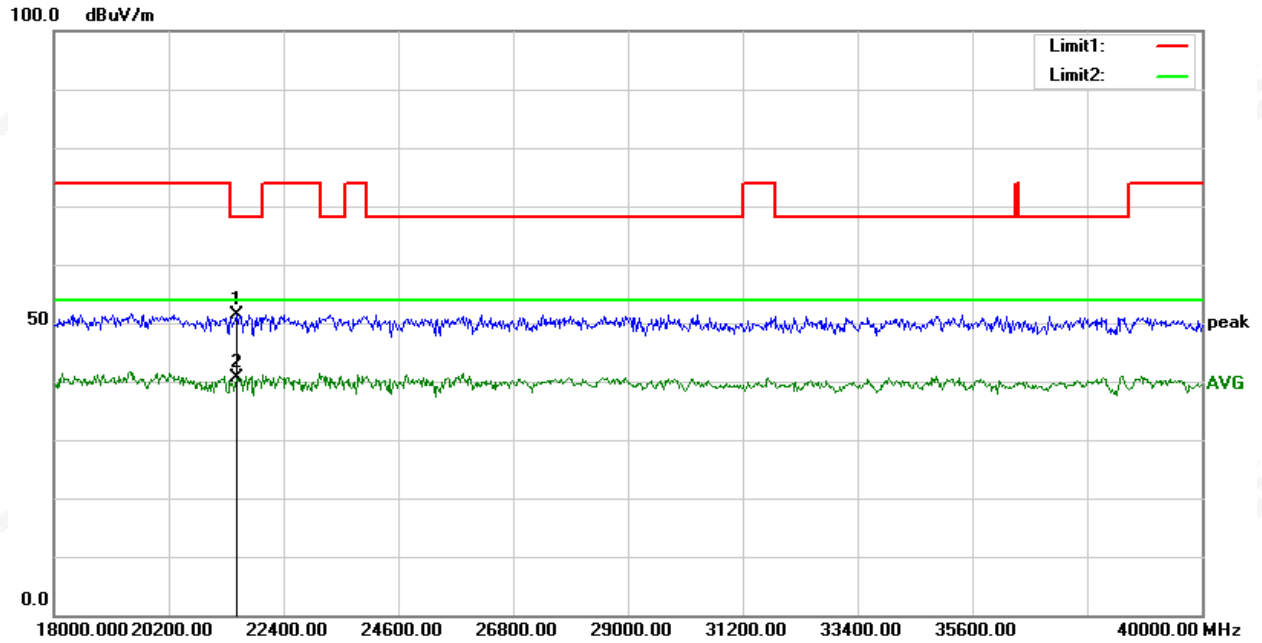


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	21498.000	48.55	2.94	51.49	68.20	-16.71	peak
2	21498.000	37.63	2.94	40.57	54.00	-13.43	AVG




RSE-1G-18G-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

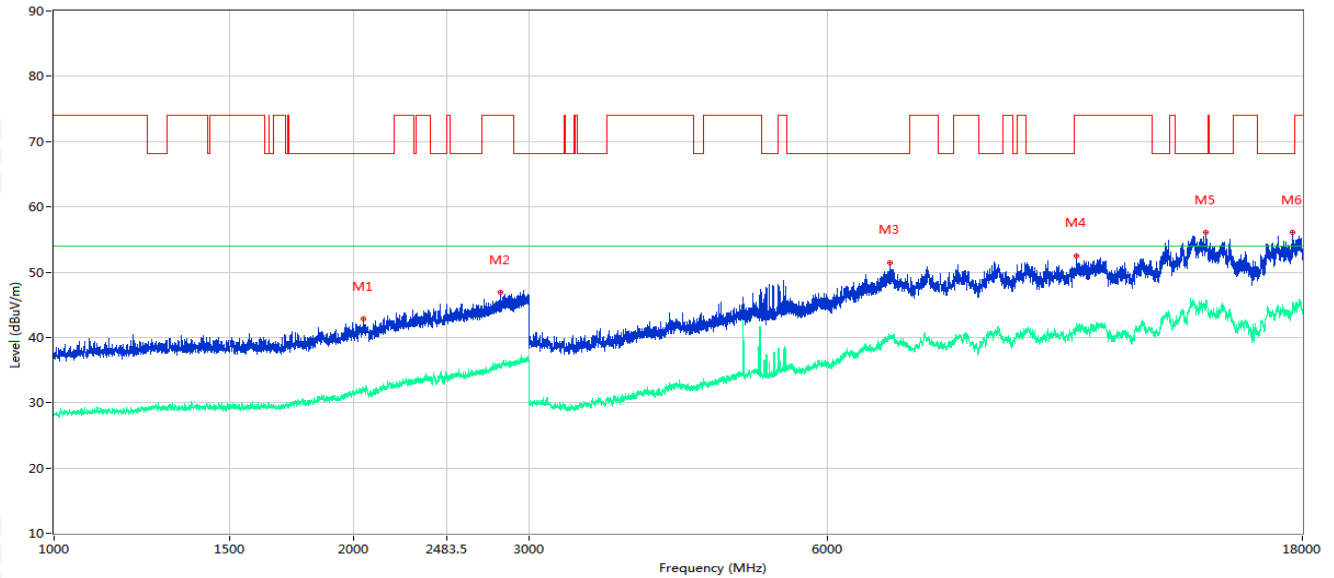

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2046.500	42.86	0.79	68.2	-25.34	Peak	1.10	Vertical	Pass
1**	2046.500	32.05	0.79	54.0	-21.95	AV	1.10	Vertical	Pass
2	2813.000	46.88	4.81	74.0	-27.12	Peak	13.90	Vertical	Pass
2**	2813.000	35.41	4.81	54.0	-18.59	AV	13.90	Vertical	Pass
3	6930.000	51.50	0.75	68.2	-16.70	Peak	124.80	Vertical	Pass
3**	6930.000	40.23	0.75	54.0	-13.77	AV	124.80	Vertical	Pass
4	10668.500	52.56	1.36	74.0	-21.44	Peak	140.10	Vertical	Pass
4**	10668.500	41.88	1.36	54.0	-12.12	AV	140.10	Vertical	Pass
5	14403.000	56.04	6.97	68.2	-12.16	Peak	82.10	Vertical	Pass
5**	14403.000	45.73	6.97	54.0	-8.27	AV	82.10	Vertical	Pass
6	17609.501	56.06	6.55	68.2	-12.14	Peak	359.60	Vertical	Pass
6**	17609.501	45.19	6.55	54.0	-8.81	AV	359.60	Vertical	Pass


RSE-18G-40G-V

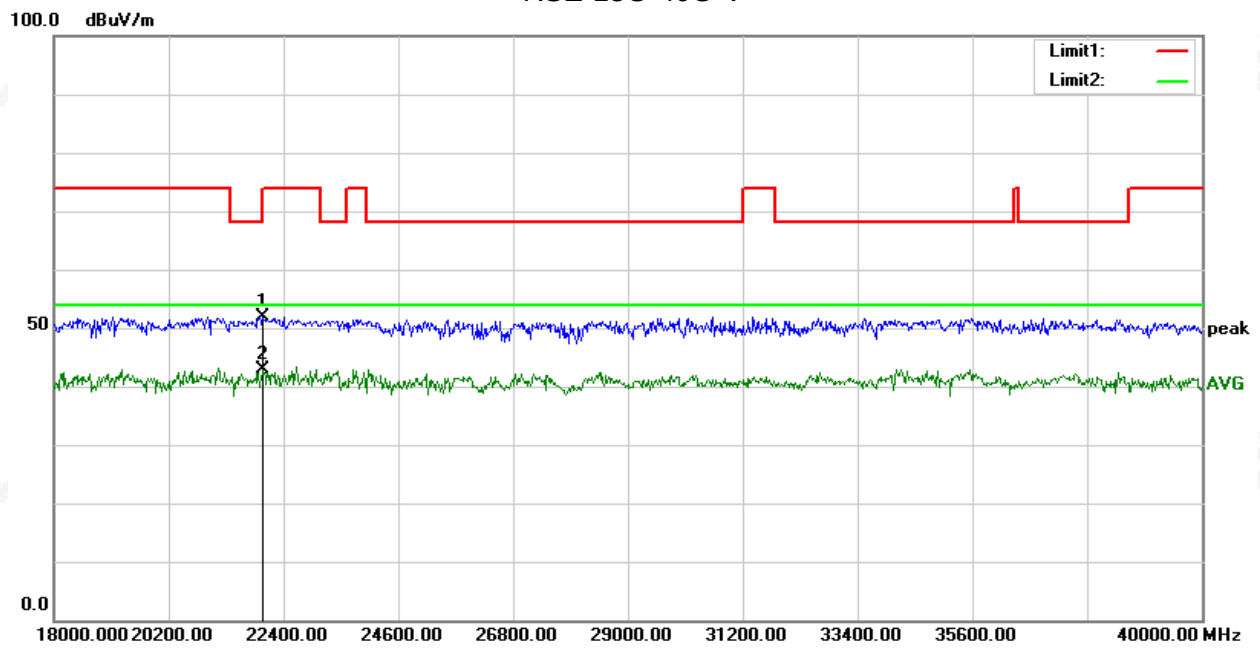

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	22004.000	48.58	3.41	51.99	68.20	-16.21	peak
2	22004.000	39.36	3.41	42.77	54.00	-11.23	AVG


Middle Channel
RSE-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

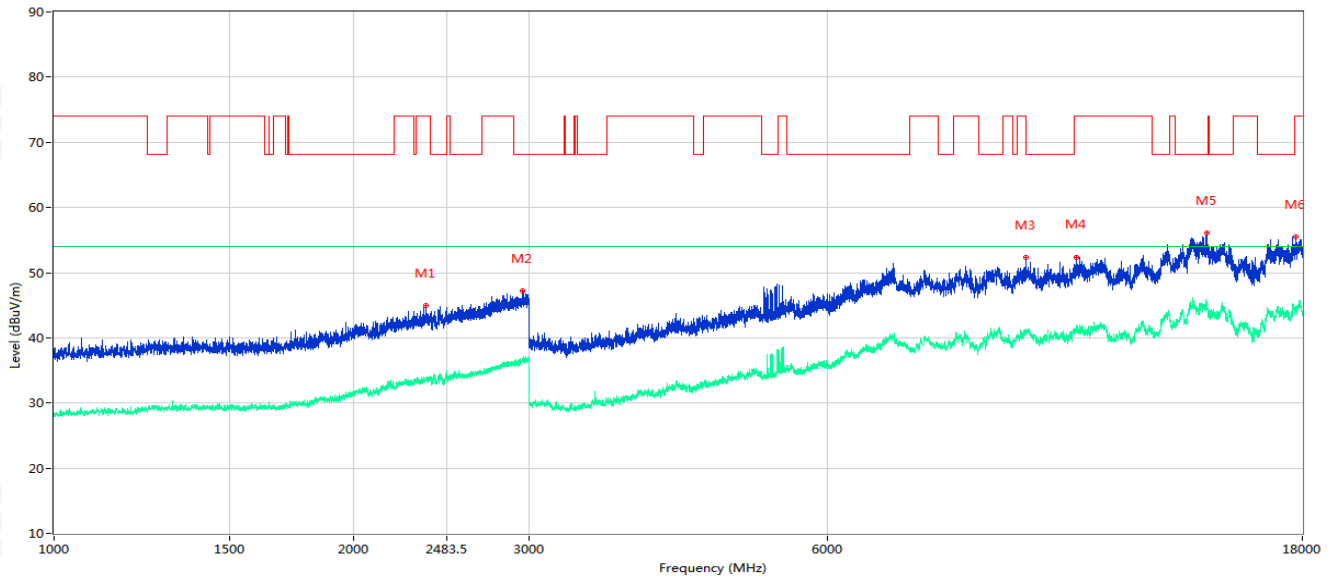

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2365.500	44.99	2.86	74.0	-29.01	Peak	174.70	Horizontal	Pass
1**	2365.500	33.57	2.86	54.0	-20.43	AV	174.70	Horizontal	Pass
2	2958.000	47.23	5.25	68.2	-20.97	Peak	257.00	Horizontal	Pass
2**	2958.000	36.63	5.25	54.0	-17.37	AV	257.00	Horizontal	Pass
3	9486.000	52.38	1.46	74.0	-21.62	Peak	9.50	Horizontal	Pass
3**	9486.000	40.94	1.46	54.0	-13.06	AV	9.50	Horizontal	Pass
4	10671.250	52.41	1.34	74.0	-21.59	Peak	28.50	Horizontal	Pass
4**	10671.250	41.87	1.34	54.0	-12.13	AV	28.50	Horizontal	Pass
5	14416.750	56.08	6.87	68.2	-12.12	Peak	315.30	Horizontal	Pass
5**	14416.750	45.52	6.87	54.0	-8.48	AV	315.30	Horizontal	Pass
6	17714.000	55.50	5.99	74.0	-18.50	Peak	156.50	Horizontal	Pass
6**	17714.000	44.39	5.99	54.0	-9.61	AV	156.50	Horizontal	Pass

RSE-18G-40G-H

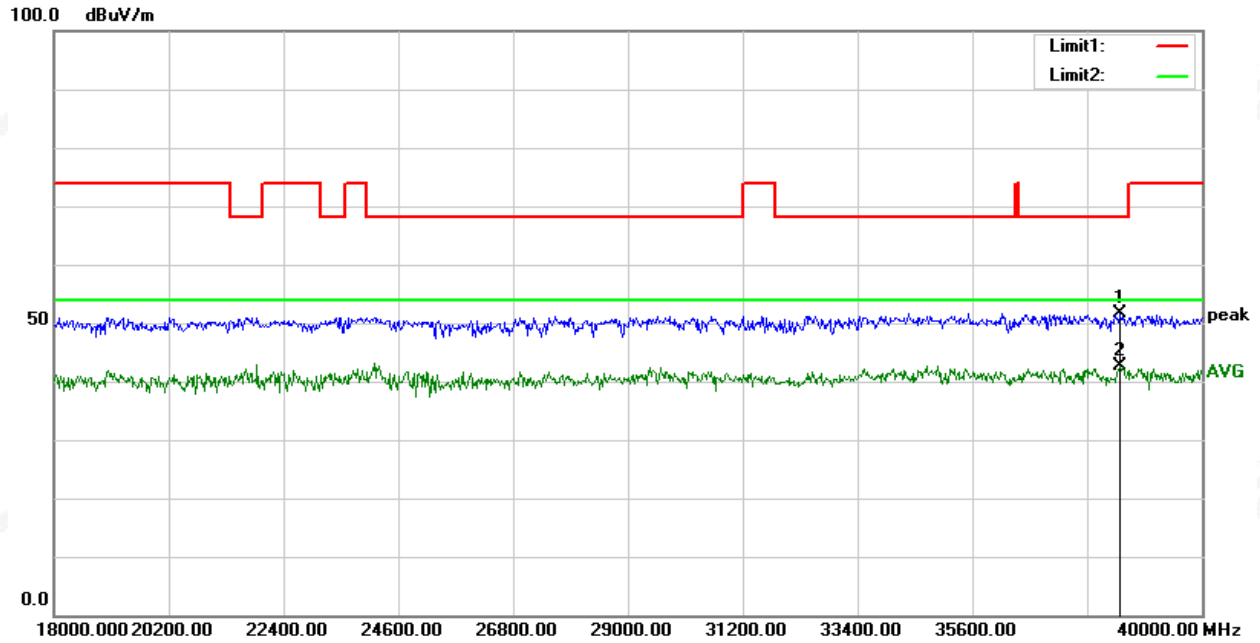


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	38438.000	45.16	6.38	51.54	68.20	-16.66	peak
2	38438.000	36.24	6.38	42.62	54.00	-11.38	AVG




RSE-1G-18G-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

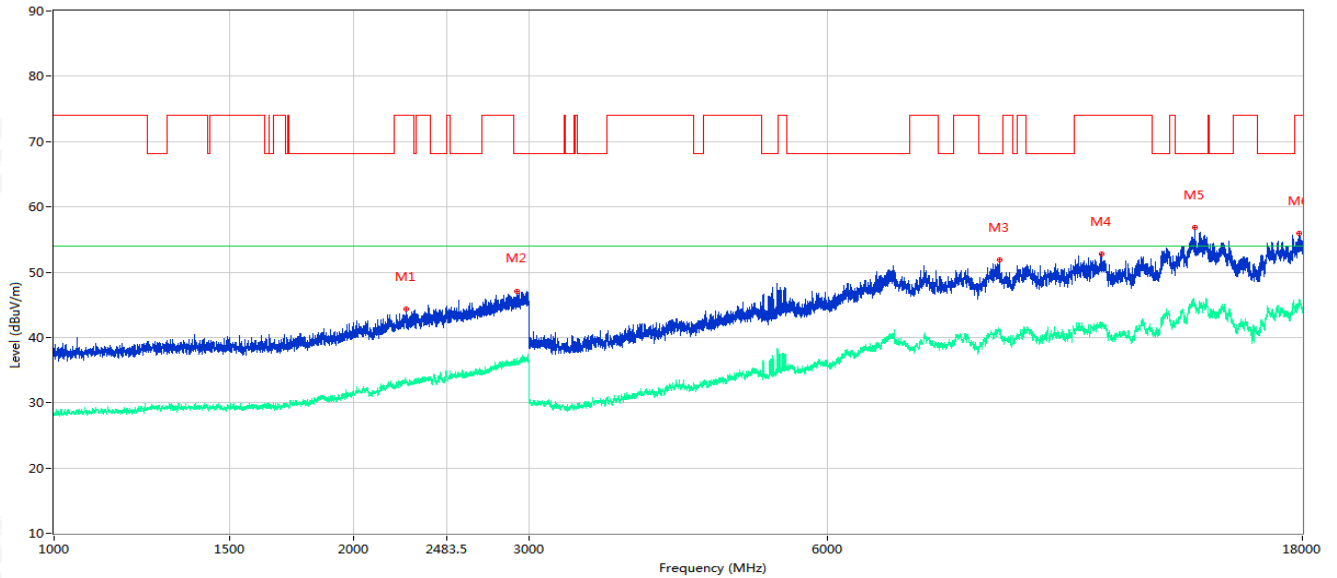

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2262.000	44.33	2.18	74.0	-29.67	Peak	351.70	Vertical	Pass
1**	2262.000	33.02	2.18	54.0	-20.98	AV	351.70	Vertical	Pass
2	2917.500	47.08	5.01	68.2	-21.12	Peak	281.80	Vertical	Pass
2**	2917.500	36.06	5.01	54.0	-17.94	AV	281.80	Vertical	Pass
3	8930.500	51.81	1.10	68.2	-16.39	Peak	206.90	Vertical	Pass
3**	8930.500	40.44	1.10	54.0	-13.56	AV	206.90	Vertical	Pass
4	11303.750	52.74	2.27	74.0	-21.26	Peak	326.30	Vertical	Pass
4**	11303.750	42.28	2.27	54.0	-11.72	AV	326.30	Vertical	Pass
5	14037.250	56.80	7.85	68.2	-11.40	Peak	15.50	Vertical	Pass
5**	14037.250	45.18	7.85	54.0	-8.82	AV	15.50	Vertical	Pass
6	17876.251	55.91	7.04	74.0	-18.09	Peak	3.80	Vertical	Pass
6**	17876.251	45.46	7.04	54.0	-8.54	AV	3.80	Vertical	Pass


RSE-18G-40G-V

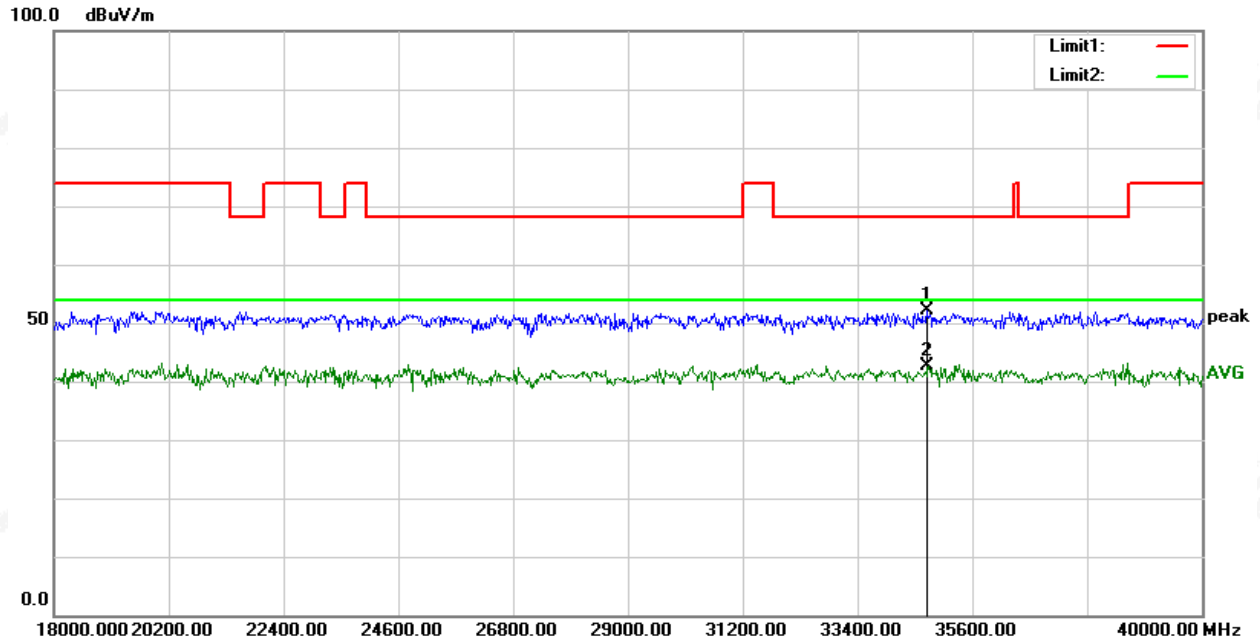

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	34720.000	42.57	9.62	52.19	68.20	-16.01	peak
2	34720.000	32.90	9.62	42.52	54.00	-11.48	AVG


High Channel
RSE-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

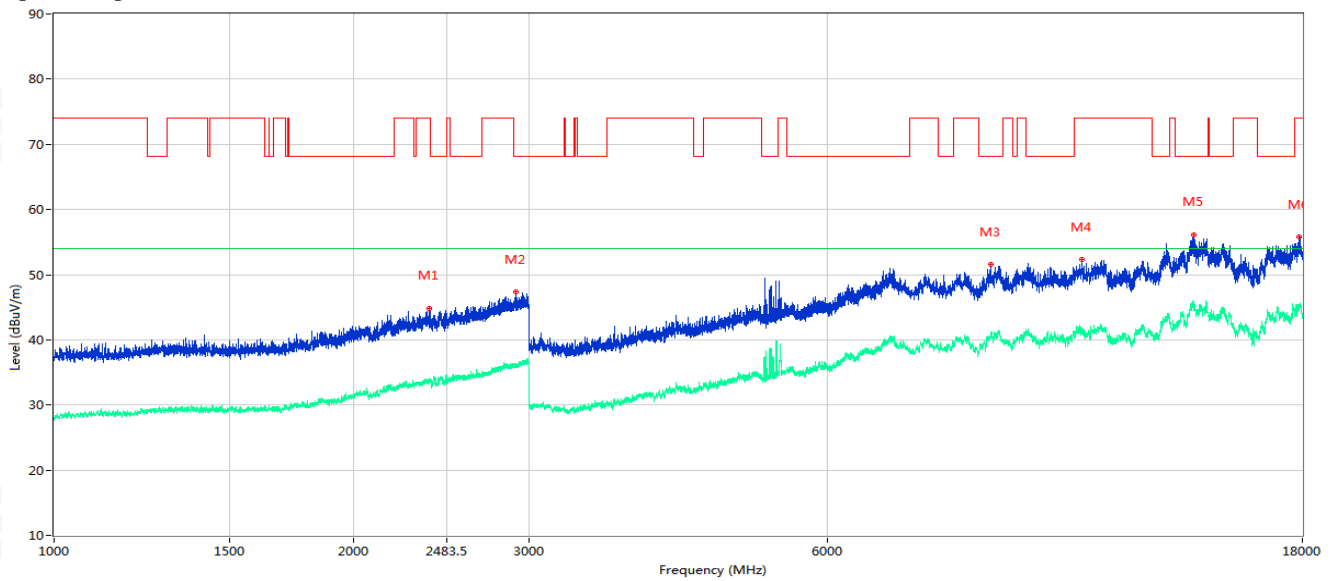

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2385.500	44.86	2.98	74.0	-29.14	Peak	253.90	Horizontal	Pass
1**	2385.500	33.77	2.98	54.0	-20.23	AV	253.90	Horizontal	Pass
2	2911.000	47.39	4.97	68.2	-20.81	Peak	12.30	Horizontal	Pass
2**	2911.000	35.96	4.97	54.0	-18.04	AV	12.30	Horizontal	Pass
3	8743.500	51.53	0.21	68.2	-16.67	Peak	252.70	Horizontal	Pass
3**	8743.500	40.59	0.21	54.0	-13.41	AV	252.70	Horizontal	Pass
4	10811.500	52.34	2.01	74.0	-21.66	Peak	304.70	Horizontal	Pass
4**	10811.500	41.15	2.01	54.0	-12.85	AV	304.70	Horizontal	Pass
5	13990.500	56.17	8.33	68.2	-12.03	Peak	211.00	Horizontal	Pass
5**	13990.500	45.38	8.33	54.0	-8.62	AV	211.00	Horizontal	Pass
6	17846.000	55.74	6.78	74.0	-18.26	Peak	2.70	Horizontal	Pass
6**	17846.000	44.72	6.78	54.0	-9.28	AV	2.70	Horizontal	Pass

RSE-18G-40G-H

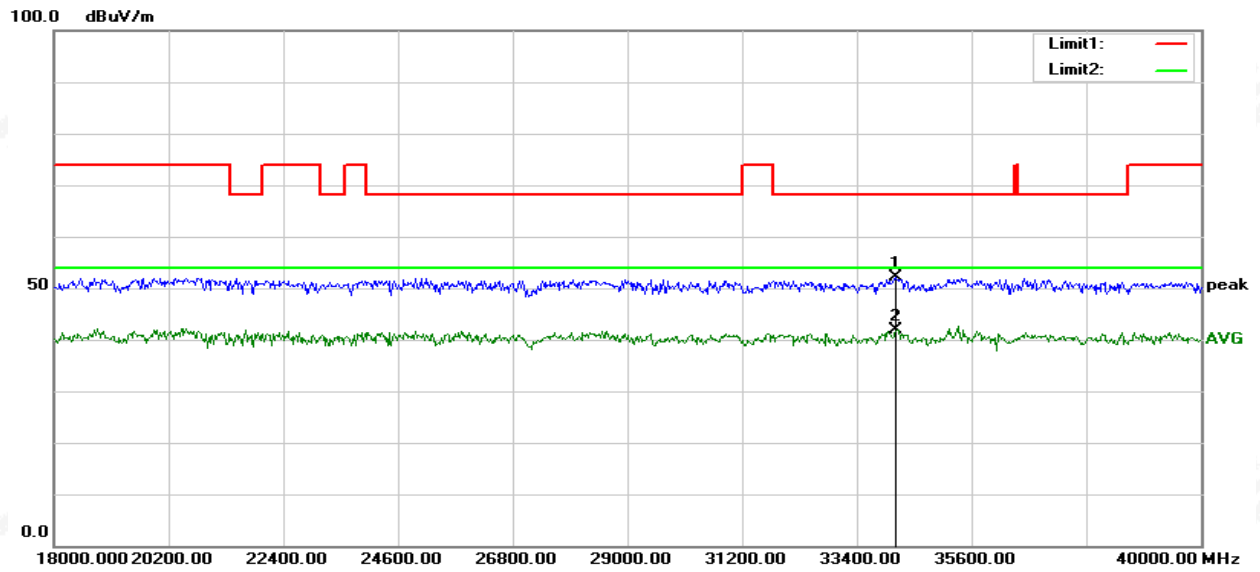


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	34148.000	42.65	9.44	52.09	68.20	-16.11	peak
2	34148.000	32.52	9.44	41.96	54.00	-12.04	AVG




RSE-1G-18G-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

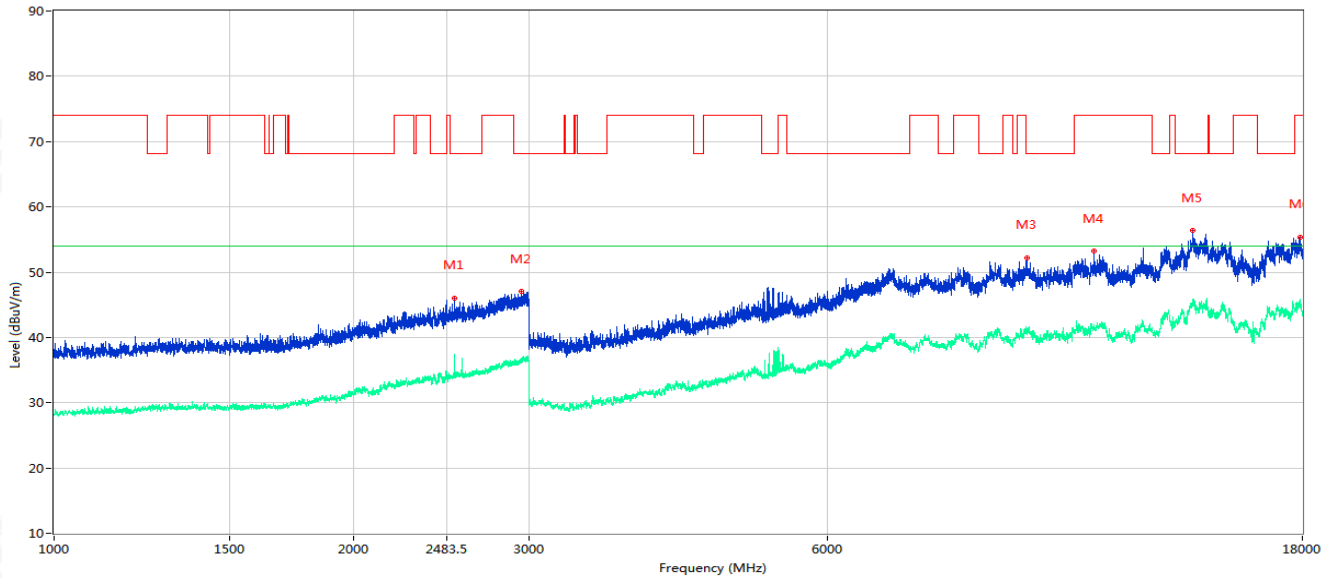

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2526.500	46.06	3.36	68.2	-22.14	Peak	295.20	Vertical	Pass
1**	2526.500	37.43	3.36	54.0	-16.57	AV	295.20	Vertical	Pass
2	2948.500	47.05	5.21	68.2	-21.15	Peak	124.10	Vertical	Pass
2**	2948.500	36.39	5.21	54.0	-17.61	AV	124.10	Vertical	Pass
3	9521.750	52.24	1.34	68.2	-15.96	Peak	170.30	Vertical	Pass
3**	9521.750	41.02	1.34	54.0	-12.98	AV	170.30	Vertical	Pass
4	11108.500	53.26	2.13	74.0	-20.74	Peak	176.60	Vertical	Pass
4**	11108.500	41.46	2.13	54.0	-12.54	AV	176.60	Vertical	Pass
5	13976.750	56.41	8.16	68.2	-11.79	Peak	79.50	Vertical	Pass
5**	13976.750	45.49	8.16	54.0	-8.51	AV	79.50	Vertical	Pass
6	17903.749	55.42	7.21	74.0	-18.58	Peak	178.80	Vertical	Pass
6**	17903.749	45.59	7.21	54.0	-8.41	AV	178.80	Vertical	Pass

RSE-18G-40G-V

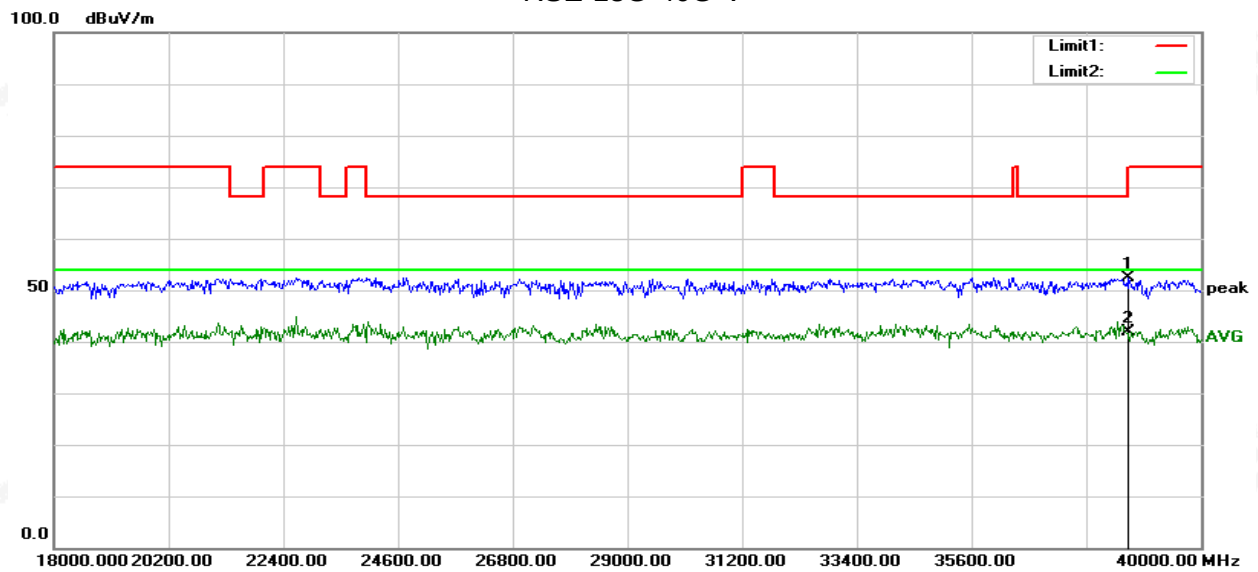


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38614.000	45.97	6.48	52.45	74.00	-21.55	peak
2	38614.000	35.43	6.48	41.91	54.00	-12.09	AVG

Note:

- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor.
- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
- 3) All modes have been measured, only worst mode was reported.


U-NII-3
Worst mode (802.11n20)
Low Channel
RSE-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

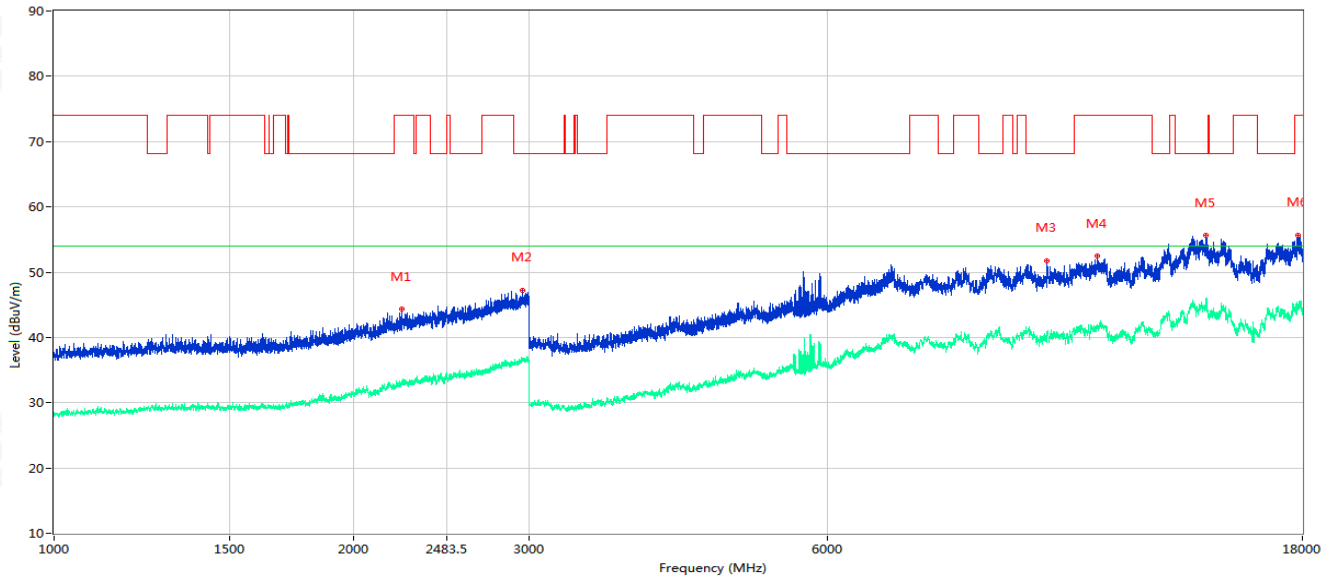

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2238.000	44.34	2.00	74.0	-29.66	Peak	359.60	Horizontal	Pass
1**	2238.000	32.95	2.00	54.0	-21.05	AV	359.60	Horizontal	Pass
2	2959.500	47.27	5.26	68.2	-20.93	Peak	360.00	Horizontal	Pass
2**	2959.500	36.44	5.26	54.0	-17.56	AV	360.00	Horizontal	Pass
3	9964.500	51.74	0.94	68.2	-16.46	Peak	316.80	Horizontal	Pass
3**	9964.500	40.42	0.94	54.0	-13.58	AV	316.80	Horizontal	Pass
4	11204.750	52.46	2.60	74.0	-21.54	Peak	253.50	Horizontal	Pass
4**	11204.750	41.78	2.60	54.0	-12.22	AV	253.50	Horizontal	Pass
5	14411.250	55.59	6.91	68.2	-12.61	Peak	225.30	Horizontal	Pass
5**	14411.250	45.29	6.91	54.0	-8.71	AV	225.30	Horizontal	Pass
6	17796.499	55.71	6.36	74.0	-18.29	Peak	225.30	Horizontal	Pass
6**	17796.499	44.78	6.36	54.0	-9.22	AV	225.30	Horizontal	Pass

RSE-18G-40G-H

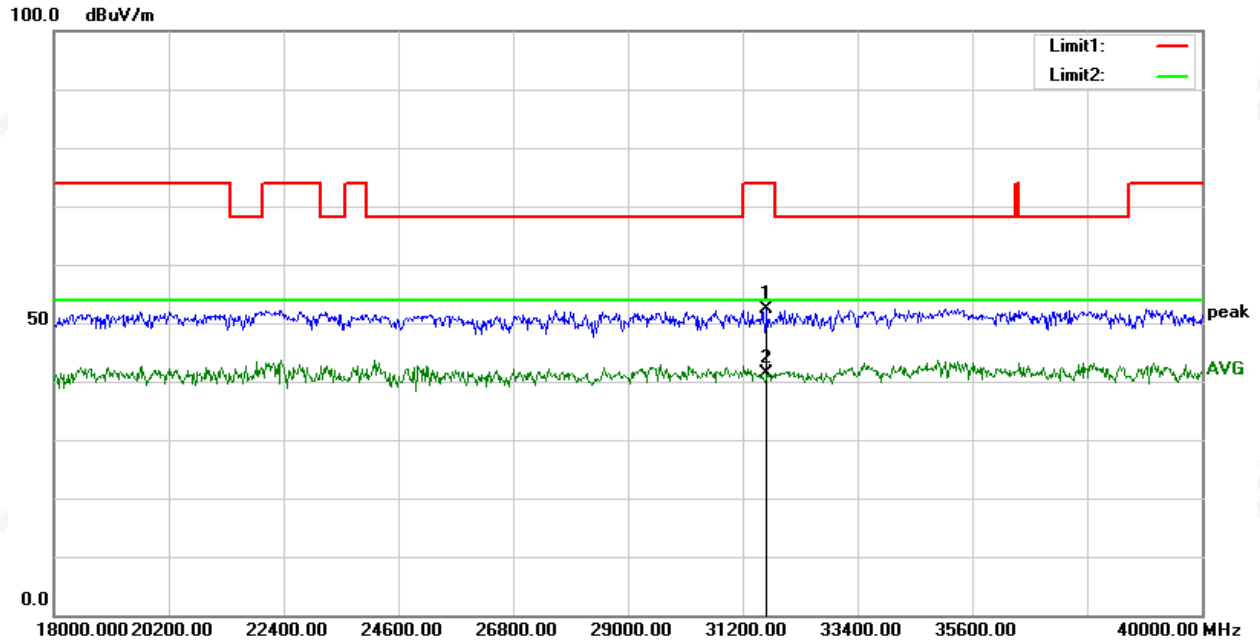


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	31662.000	43.26	9.20	52.46	74.00	-21.54	peak
2	31662.000	32.09	9.20	41.29	54.00	-12.71	AVG




RSE-1G-18G-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

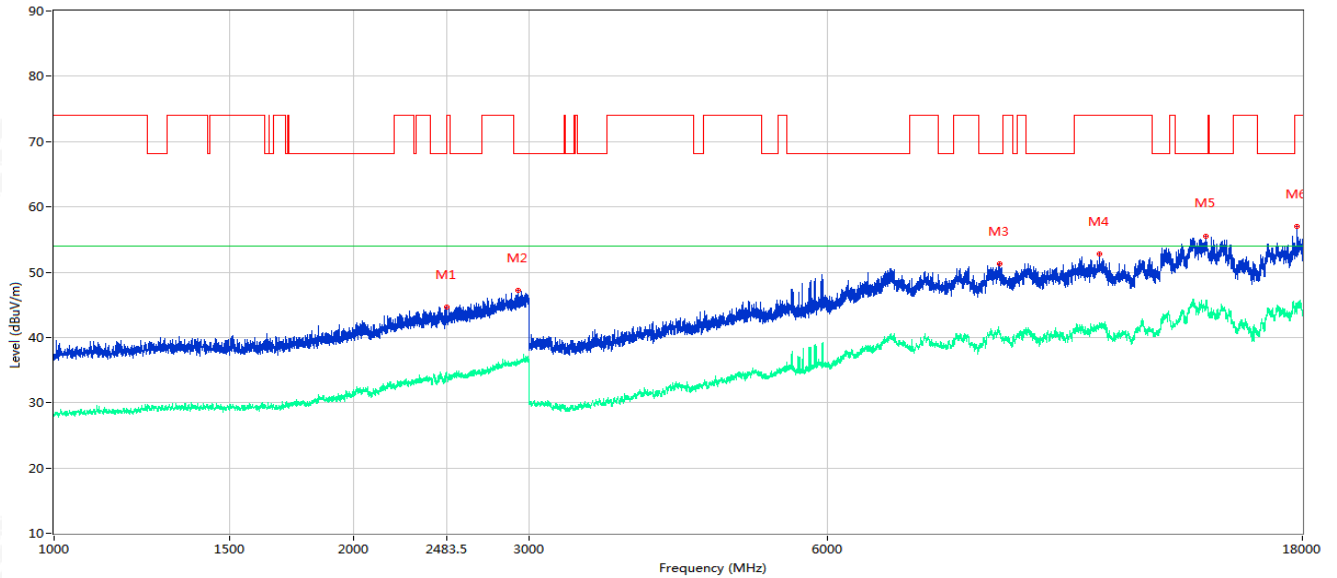

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2482.000	44.62	3.18	68.2	-23.58	Peak	4.80	Vertical	Pass
1**	2482.000	34.49	3.18	54.0	-19.51	AV	4.80	Vertical	Pass
2	2925.000	47.17	5.06	68.2	-21.03	Peak	1.70	Vertical	Pass
2**	2925.000	36.39	5.06	54.0	-17.61	AV	1.70	Vertical	Pass
3	8925.000	51.28	1.20	68.2	-16.92	Peak	353.50	Vertical	Pass
3**	8925.000	41.06	1.20	54.0	-12.94	AV	353.50	Vertical	Pass
4	11262.500	52.71	2.41	74.0	-21.29	Peak	350.30	Vertical	Pass
4**	11262.500	41.60	2.41	54.0	-12.40	AV	350.30	Vertical	Pass
5	14397.500	55.56	6.99	68.2	-12.64	Peak	293.40	Vertical	Pass
5**	14397.500	45.56	6.99	54.0	-8.44	AV	293.40	Vertical	Pass
6	17785.500	56.95	6.31	74.0	-17.05	Peak	54.30	Vertical	Pass
6**	17785.500	45.10	6.31	54.0	-8.90	AV	54.30	Vertical	Pass


RSE-18G-40G-V

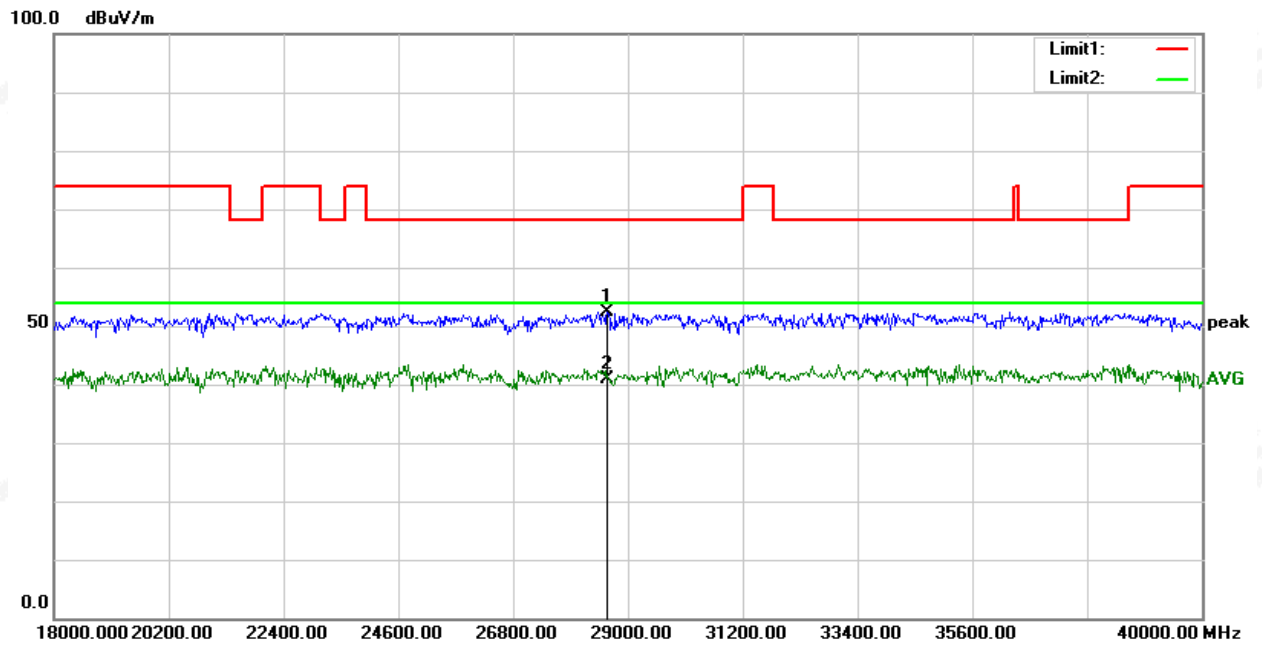

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	28604.000	43.93	8.35	52.28	68.20	-15.92	peak
2	28604.000	32.61	8.35	40.96	54.00	-13.04	AVG


Middle Channel
RSE-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

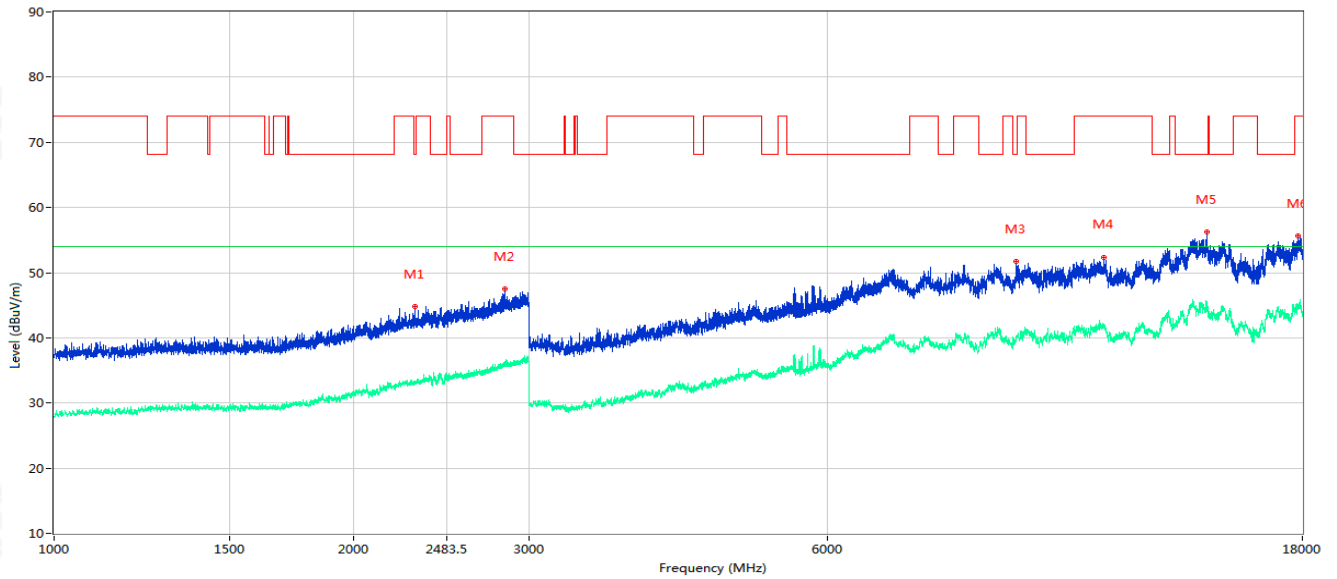

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2305.000	44.84	2.28	68.2	-23.36	Peak	22.60	Horizontal	Pass
1**	2305.000	33.19	2.28	54.0	-20.81	AV	22.60	Horizontal	Pass
2	2837.500	47.52	4.93	74.0	-26.48	Peak	275.10	Horizontal	Pass
2**	2837.500	36.16	4.93	54.0	-17.84	AV	275.10	Horizontal	Pass
3	9287.999	51.72	0.77	68.2	-16.48	Peak	116.20	Horizontal	Pass
3**	9287.999	40.12	0.77	54.0	-13.88	AV	116.20	Horizontal	Pass
4	11378.000	52.40	2.02	74.0	-21.60	Peak	27.30	Horizontal	Pass
4**	11378.000	42.16	2.02	54.0	-11.84	AV	27.30	Horizontal	Pass
5	14419.500	56.22	6.85	68.2	-11.98	Peak	353.10	Horizontal	Pass
5**	14419.500	45.62	6.85	54.0	-8.38	AV	353.10	Horizontal	Pass
6	17796.499	55.60	6.36	74.0	-18.40	Peak	0.40	Horizontal	Pass
6**	17796.499	44.70	6.36	54.0	-9.30	AV	0.40	Horizontal	Pass

RSE-18G-40G-H

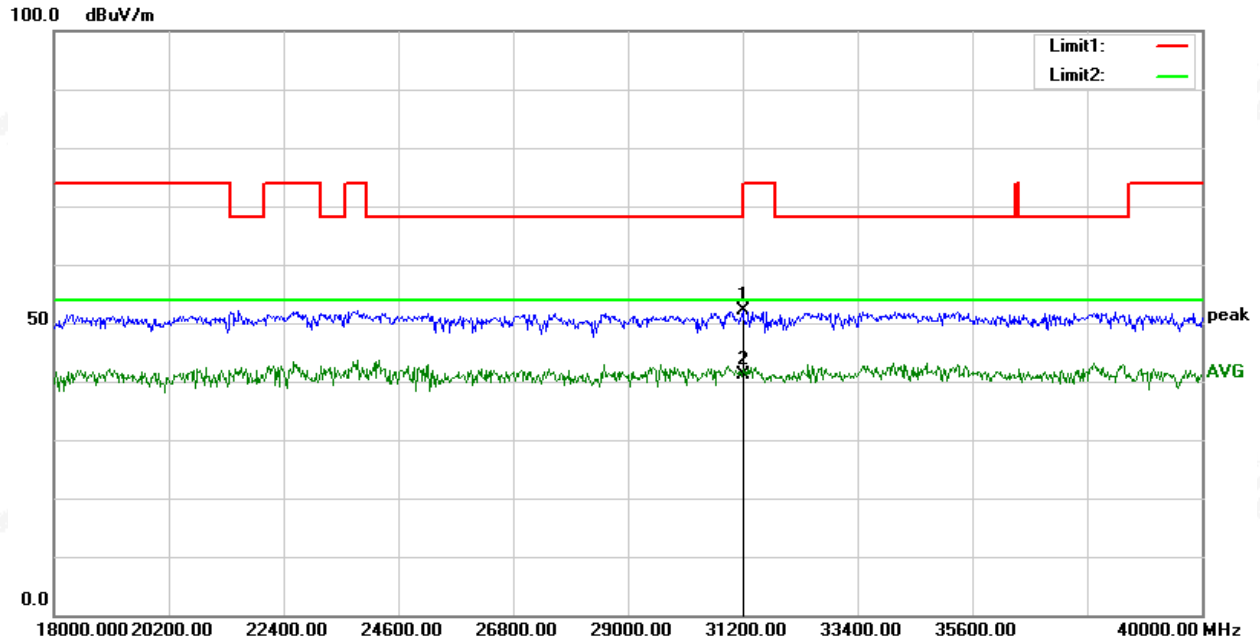


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	31200.000	43.15	9.05	52.20	68.20	-16.00	peak
2	31200.000	32.05	9.05	41.10	54.00	-12.90	AVG




RSE-1G-18G-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

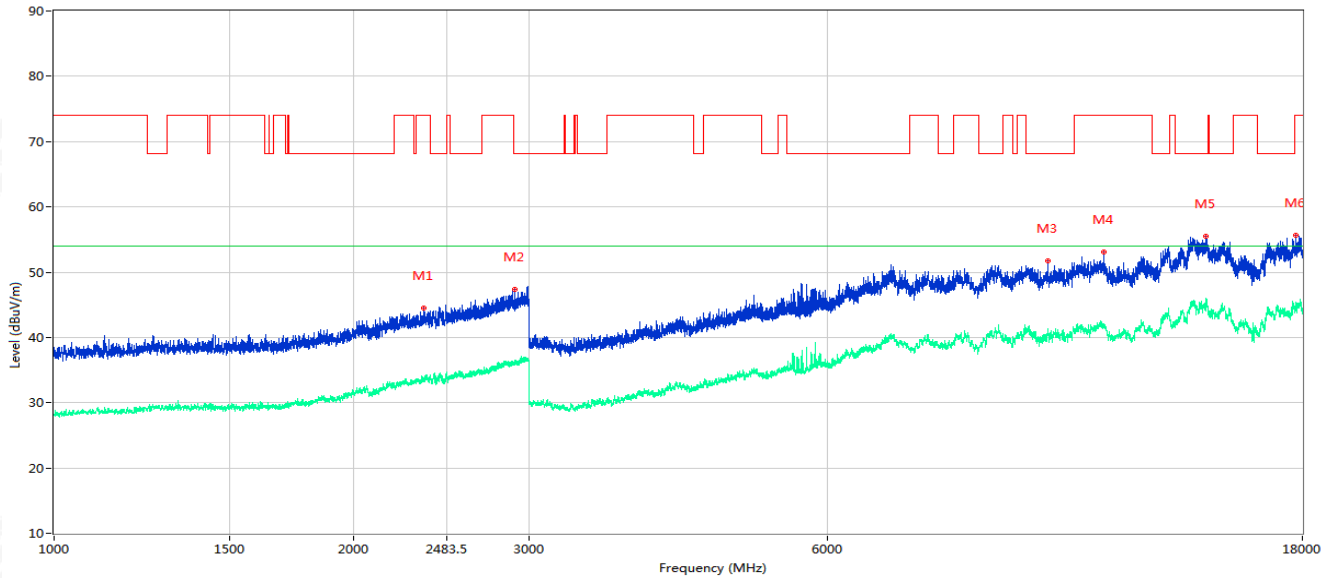

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2356.500	44.44	2.80	74.0	-29.56	Peak	166.50	Vertical	Pass
1**	2356.500	33.70	2.80	54.0	-20.30	AV	166.50	Vertical	Pass
2	2906.000	47.40	4.94	68.2	-20.80	Peak	246.90	Vertical	Pass
2**	2906.000	36.06	4.94	54.0	-17.94	AV	246.90	Vertical	Pass
3	9981.000	51.78	1.06	68.2	-16.42	Peak	319.40	Vertical	Pass
3**	9981.000	40.57	1.06	54.0	-13.43	AV	319.40	Vertical	Pass
4	11372.500	53.03	2.04	74.0	-20.97	Peak	118.90	Vertical	Pass
4**	11372.500	42.14	2.04	54.0	-11.86	AV	118.90	Vertical	Pass
5	14400.250	55.54	6.99	68.2	-12.66	Peak	124.80	Vertical	Pass
5**	14400.250	45.85	6.99	54.0	-8.15	AV	124.80	Vertical	Pass
6	17722.249	55.58	6.03	74.0	-18.42	Peak	155.00	Vertical	Pass
6**	17722.249	45.08	6.03	54.0	-8.92	AV	155.00	Vertical	Pass


RSE-18G-40G-V

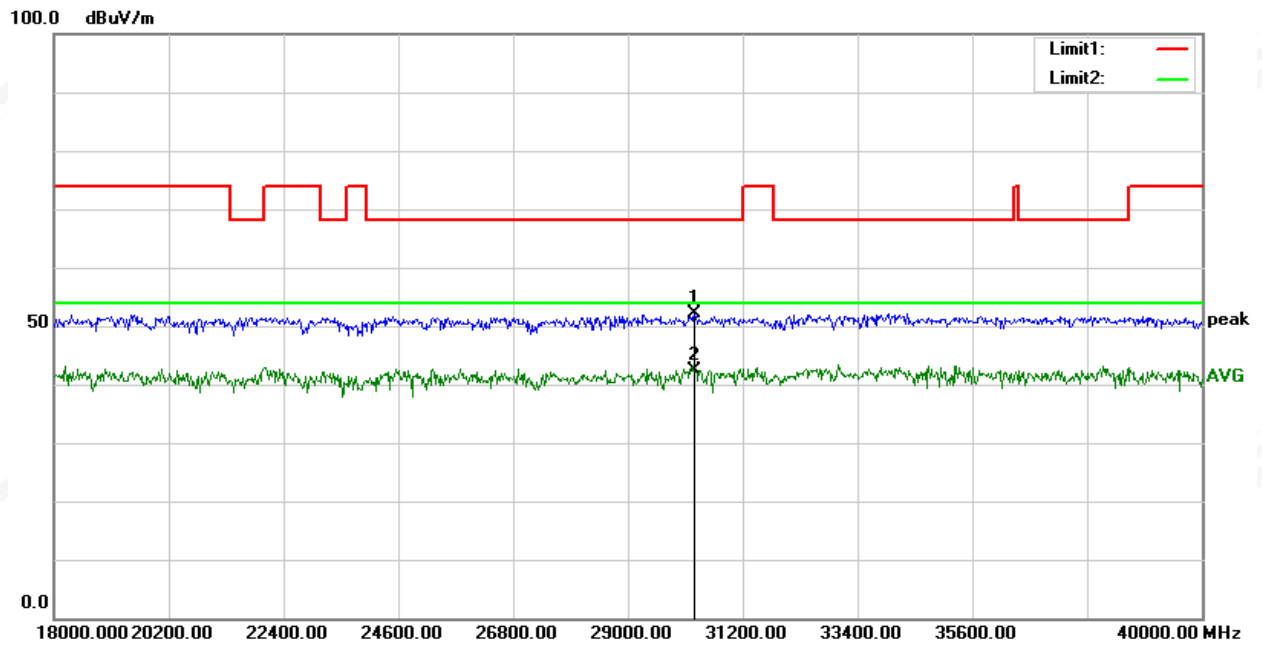

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	30276.000	43.23	8.96	52.19	68.20	-16.01	peak
2	30276.000	33.46	8.96	42.42	54.00	-11.58	AVG


High Channel RSE-1G-18G-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

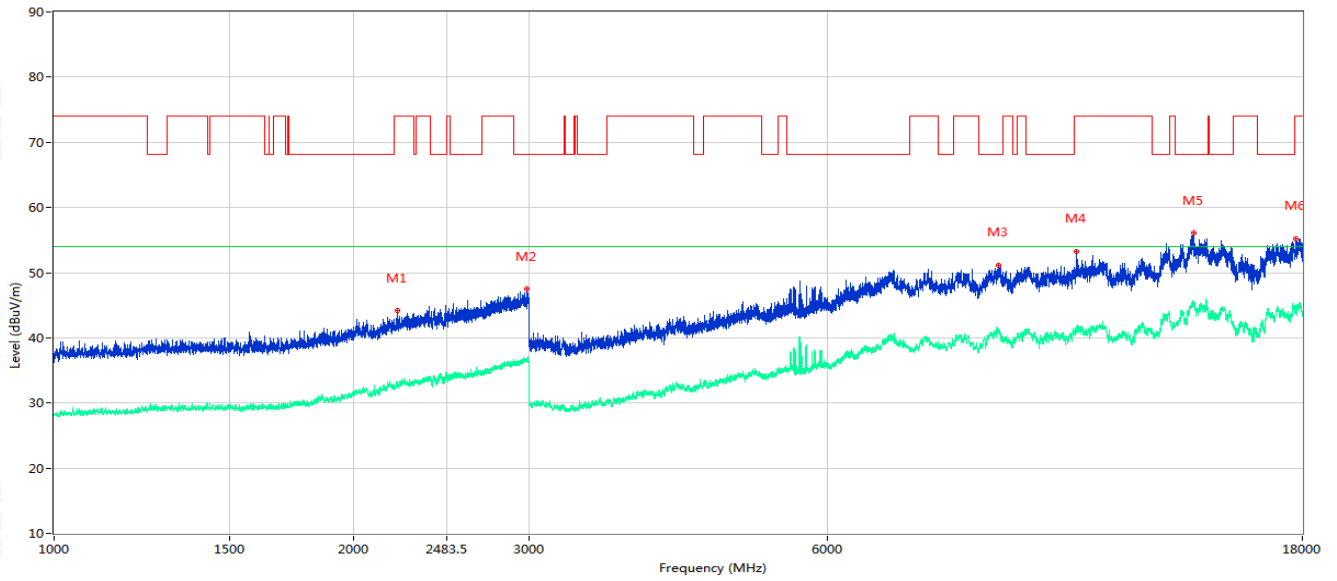

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2216.000	44.15	1.70	74.0	-29.85	Peak	39.70	Horizontal	Pass
1**	2216.000	32.53	1.70	54.0	-21.47	AV	39.70	Horizontal	Pass
2	2988.000	47.49	5.40	68.2	-20.71	Peak	236.50	Horizontal	Pass
2**	2988.000	36.59	5.40	54.0	-17.41	AV	236.50	Horizontal	Pass
3	8916.750	51.19	1.35	68.2	-17.01	Peak	108.50	Horizontal	Pass
3**	8916.750	41.33	1.35	54.0	-12.67	AV	108.50	Horizontal	Pass
4	10674.000	53.29	1.32	74.0	-20.71	Peak	175.10	Horizontal	Pass
4**	10674.000	41.42	1.32	54.0	-12.58	AV	175.10	Horizontal	Pass
5	13982.250	56.12	8.23	68.2	-12.08	Peak	97.70	Horizontal	Pass
5**	13982.250	45.61	8.23	54.0	-8.39	AV	97.70	Horizontal	Pass
6	17711.249	55.17	5.98	74.0	-18.83	Peak	71.60	Horizontal	Pass
6**	17711.249	44.26	5.98	54.0	-9.74	AV	71.60	Horizontal	Pass

RSE-18G-40G-H

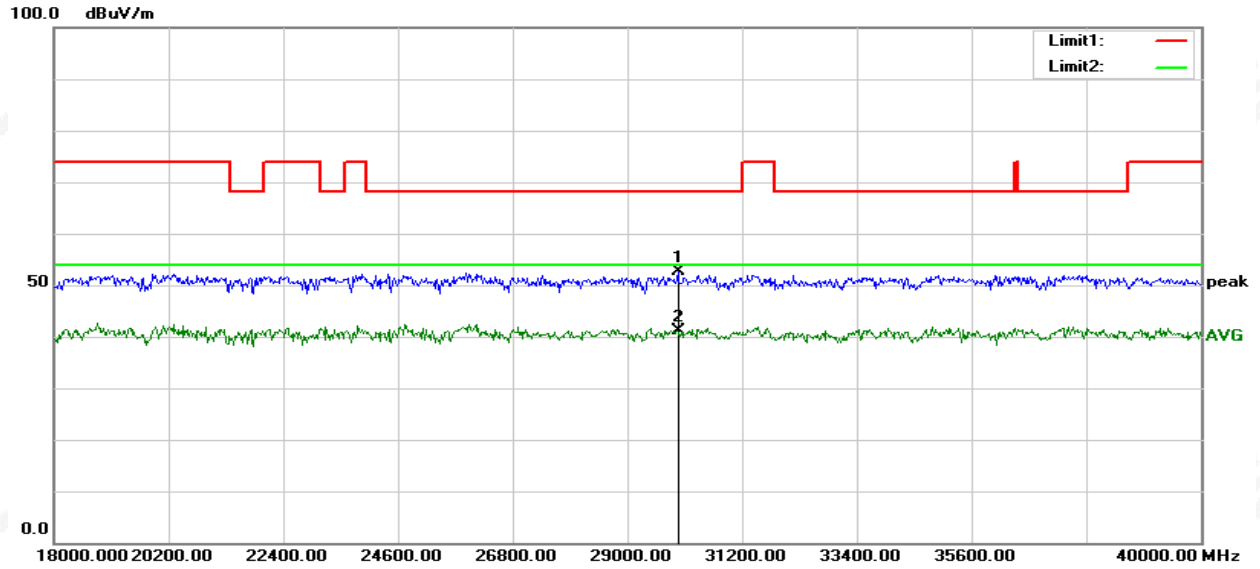


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	29968.000	43.56	9.05	52.61	68.20	-15.59	peak
2	29968.000	32.09	9.05	41.14	54.00	-12.86	AVG




RSE-1G-18G-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz - 5G

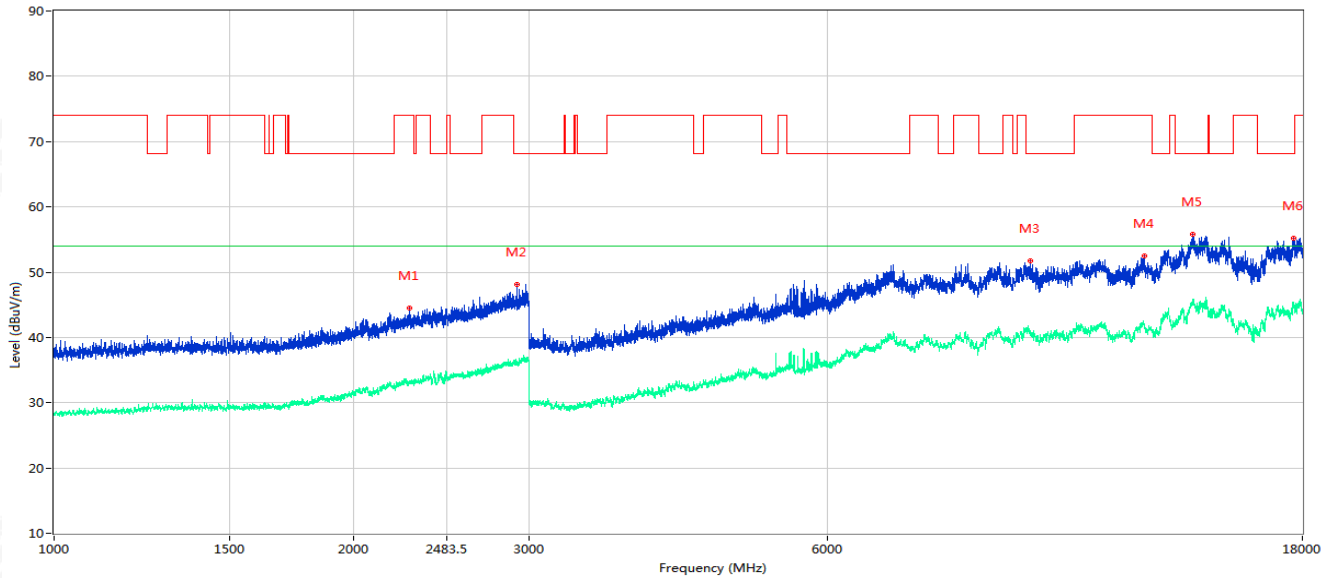

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1	2276.000	44.52	2.20	74.0	-29.48	Peak	322.40	Vertical	Pass
1**	2276.000	33.32	2.20	54.0	-20.68	AV	322.40	Vertical	Pass
2	2917.500	48.10	5.01	68.2	-20.10	Peak	71.40	Vertical	Pass
2**	2917.500	36.23	5.01	54.0	-17.77	AV	71.40	Vertical	Pass
3	9582.250	51.70	0.74	68.2	-16.50	Peak	341.00	Vertical	Pass
3**	9582.250	40.58	0.74	54.0	-13.42	AV	341.00	Vertical	Pass
4	12491.750	52.51	2.25	74.0	-21.49	Peak	95.00	Vertical	Pass
4**	12491.750	41.59	2.25	54.0	-12.41	AV	95.00	Vertical	Pass
5	13979.500	55.73	8.19	68.2	-12.47	Peak	0.00	Vertical	Pass
5**	13979.500	45.86	8.19	54.0	-8.14	AV	0.00	Vertical	Pass
6	17645.251	55.18	6.30	68.2	-13.02	Peak	355.80	Vertical	Pass
6**	17645.251	45.37	6.30	54.0	-8.63	AV	355.80	Vertical	Pass

RSE-18G-40G-V

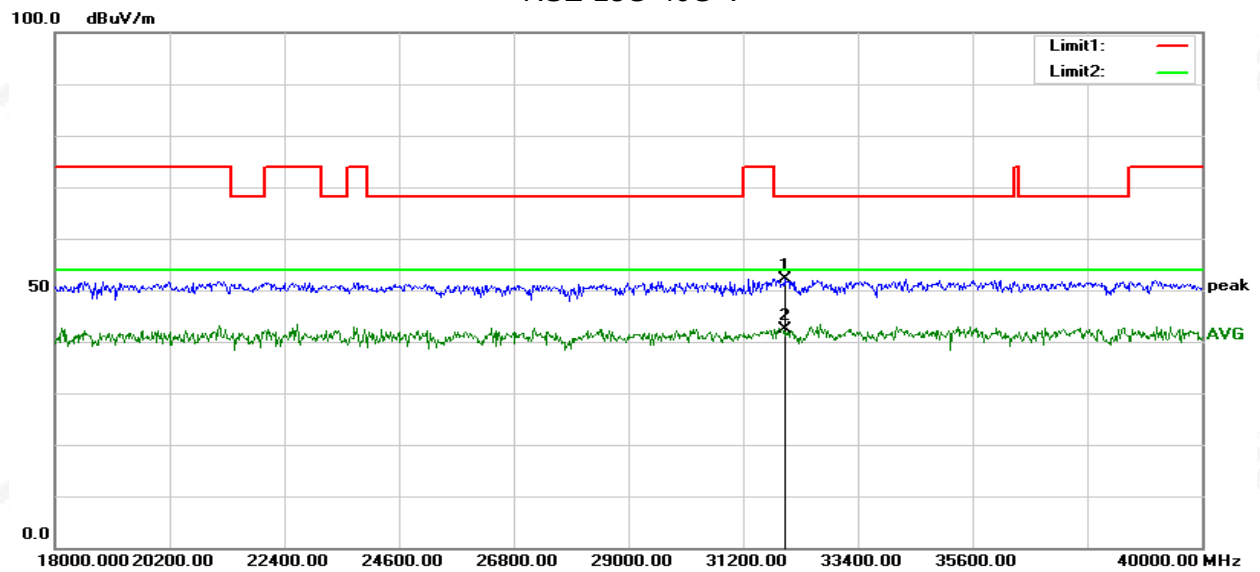

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31992.000	42.99	9.24	52.23	68.20	-15.97	peak
2	31992.000	33.04	9.24	42.28	54.00	-11.72	AVG


Note:

- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor.
- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
- 3) All modes have been measured, only worst mode was reported.

3.2.9 TEST RESULTS(Band edge Requirements)


U-NII-1 (5.150-5.2500) GHz

802.11n20-L-H

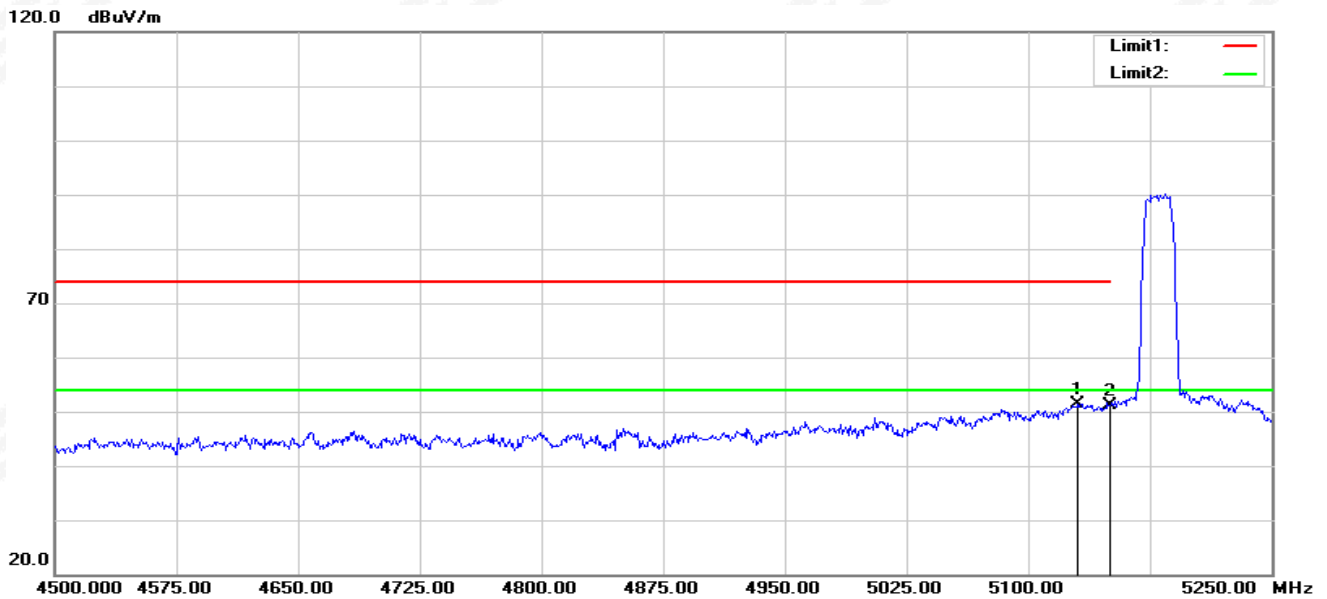


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5130.750	57.04	-5.74	51.30	54.00	-2.70	peak
2	5150.000	56.95	-5.73	51.22	54.00	-2.78	peak

802.11n20-L-V

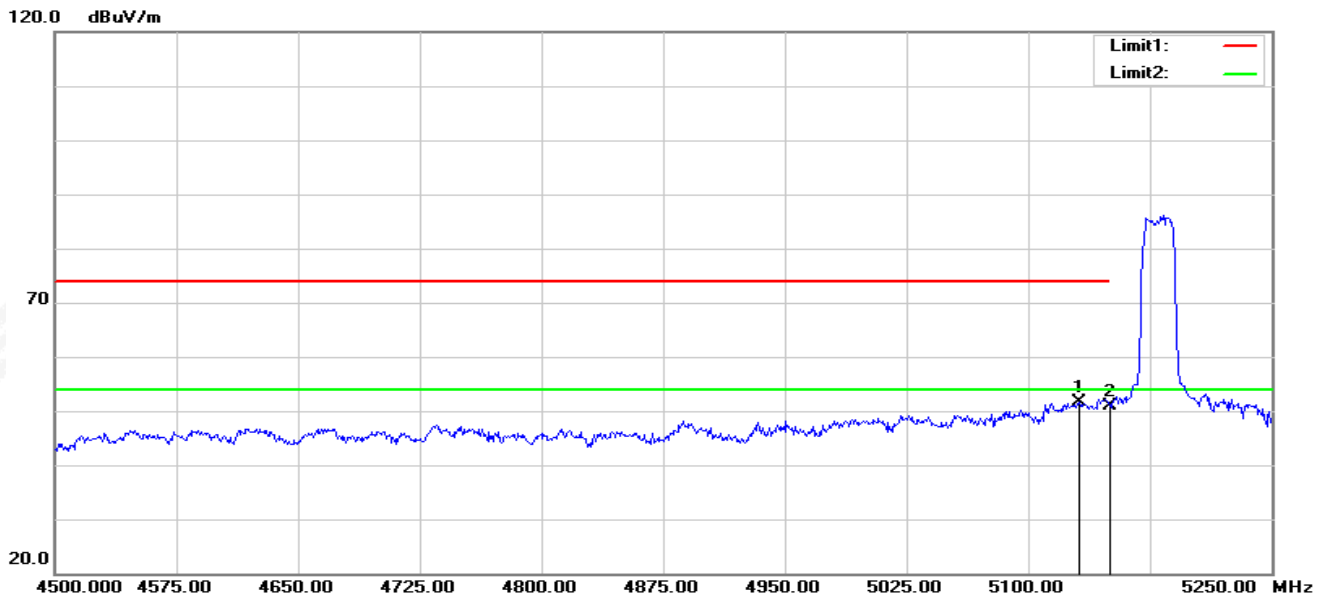


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5131.500	57.40	-5.73	51.67	54.00	-2.33	peak
2	5150.000	56.72	-5.73	50.99	54.00	-3.01	peak

802.11n20-H-H

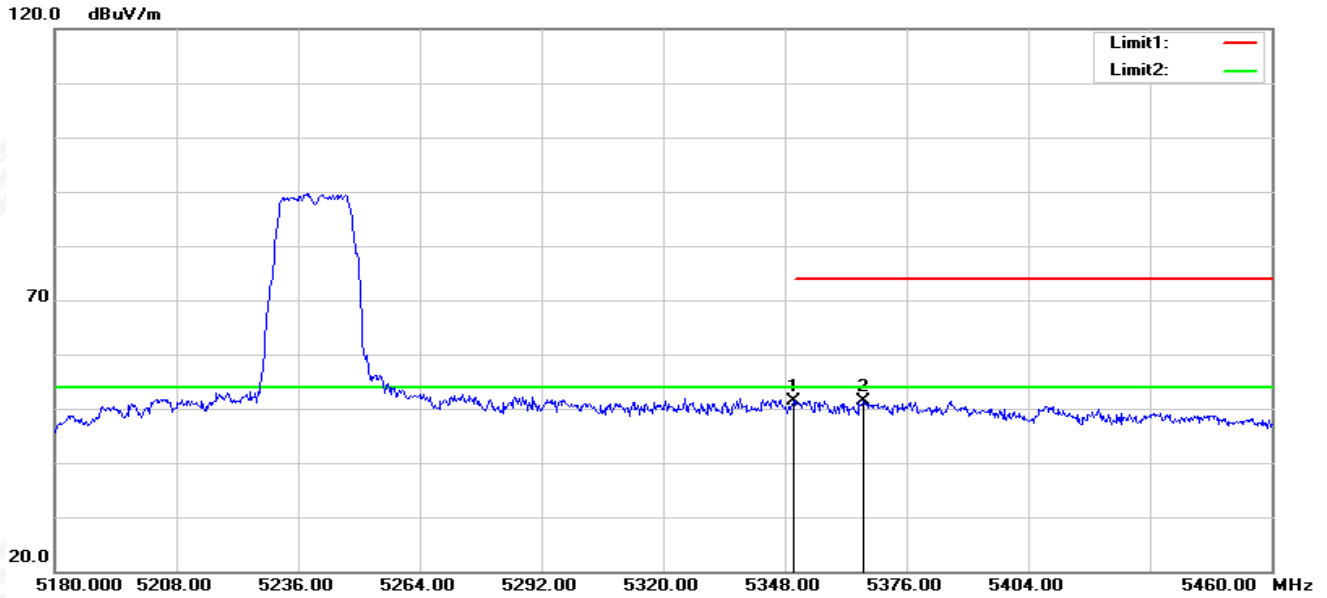


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	56.55	-5.23	51.32	54.00	-2.68	peak
2	5366.200	56.54	-5.24	51.30	54.00	-2.70	peak

802.11n20-H-V

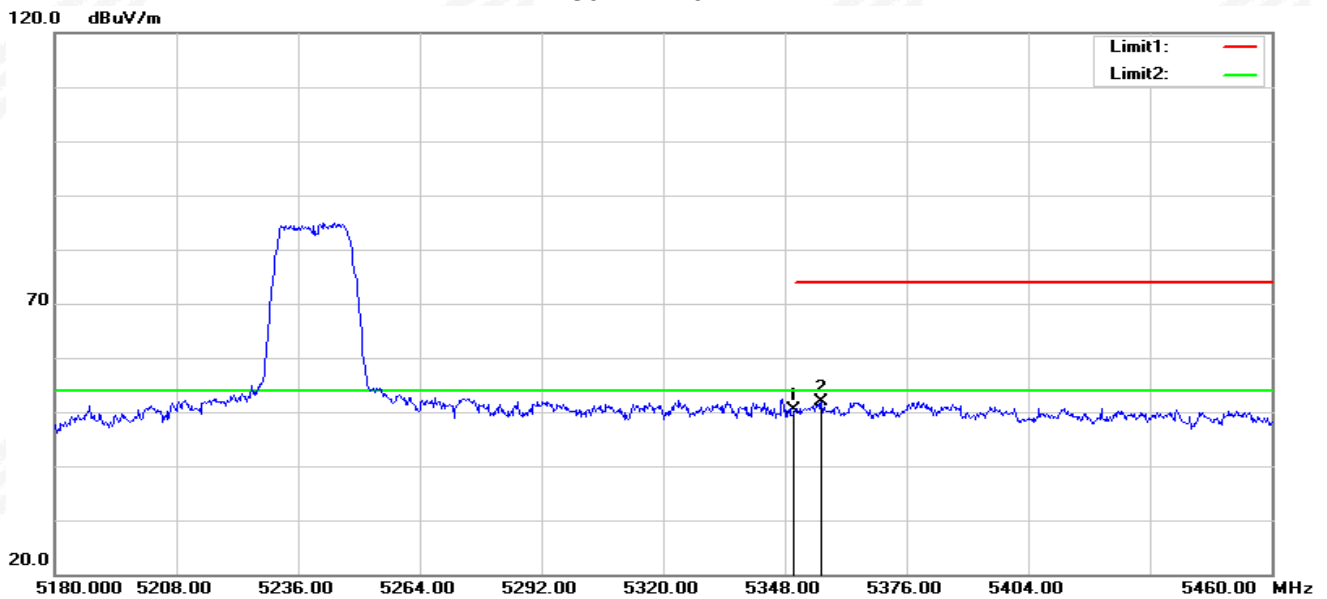


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	55.49	-5.23	50.26	54.00	-3.74	peak
2	5356.400	57.22	-5.23	51.99	54.00	-2.01	peak

802.11ac40-L-H

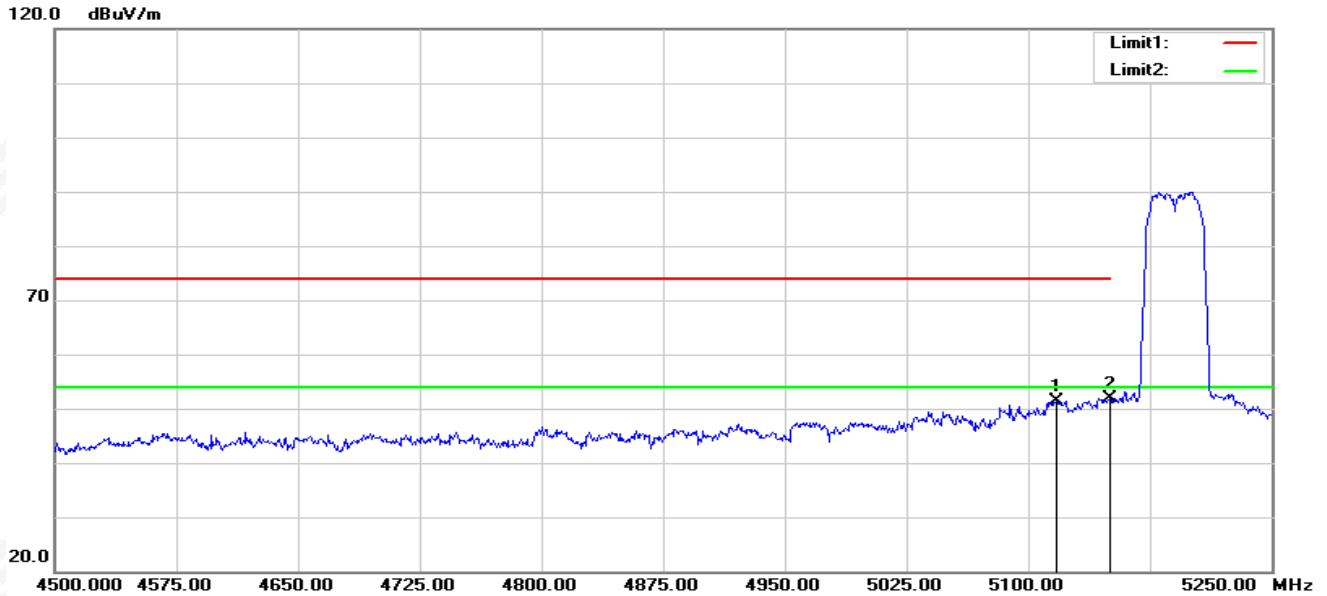


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5117.250	57.15	-5.74	51.41	54.00	-2.59	peak
2	5150.000	57.57	-5.73	51.84	54.00	-2.16	peak

802.11ac40-L-V

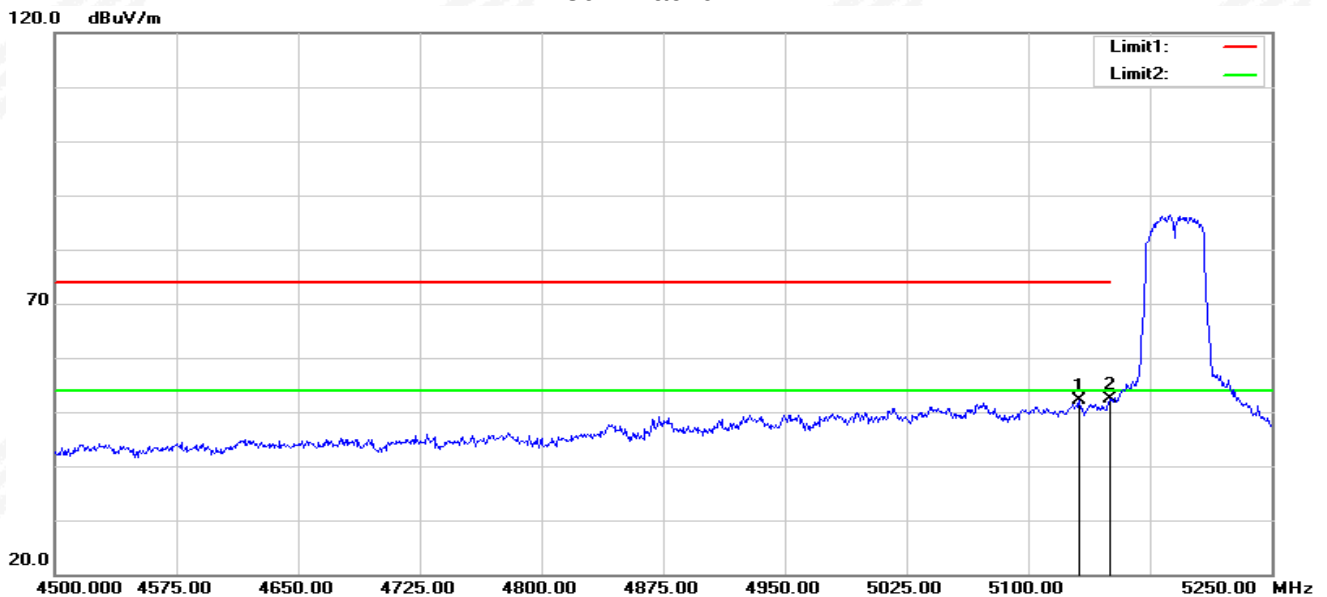


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5131.500	57.86	-5.73	52.13	54.00	-1.87	peak
2	5150.000	58.15	-5.73	52.42	54.00	-1.58	peak

802.11ac40-H-H

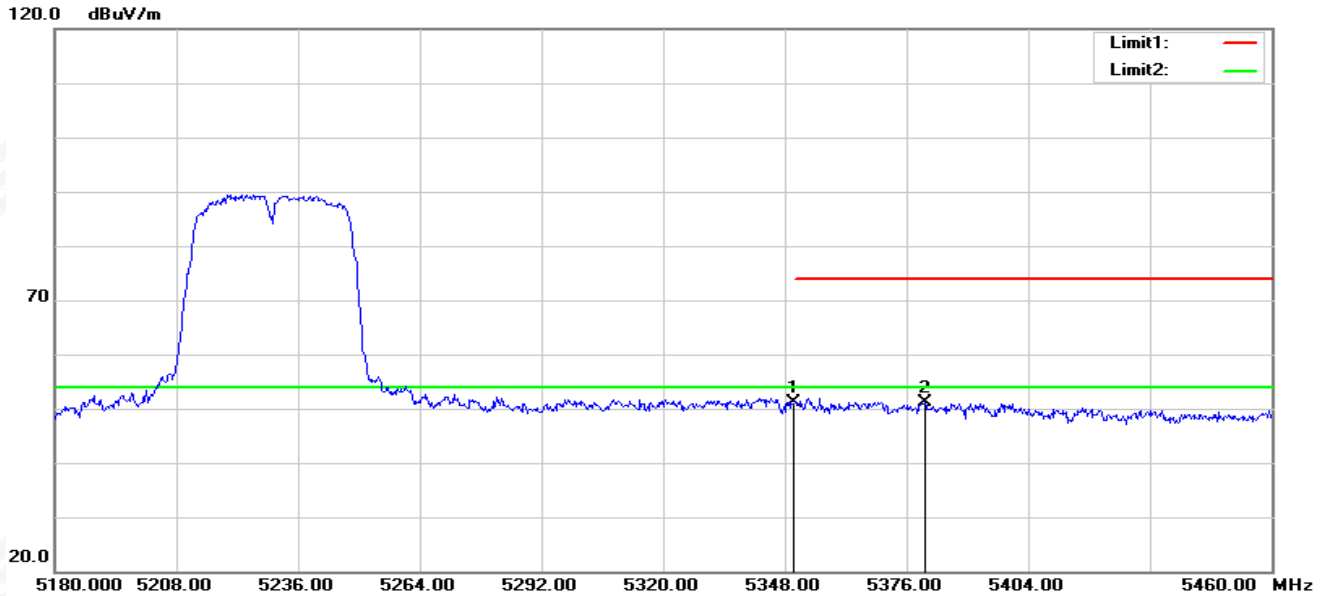


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	56.46	-5.23	51.23	54.00	-2.77	peak
2	5380.200	56.48	-5.25	51.23	54.00	-2.77	peak

802.11ac40-H-V

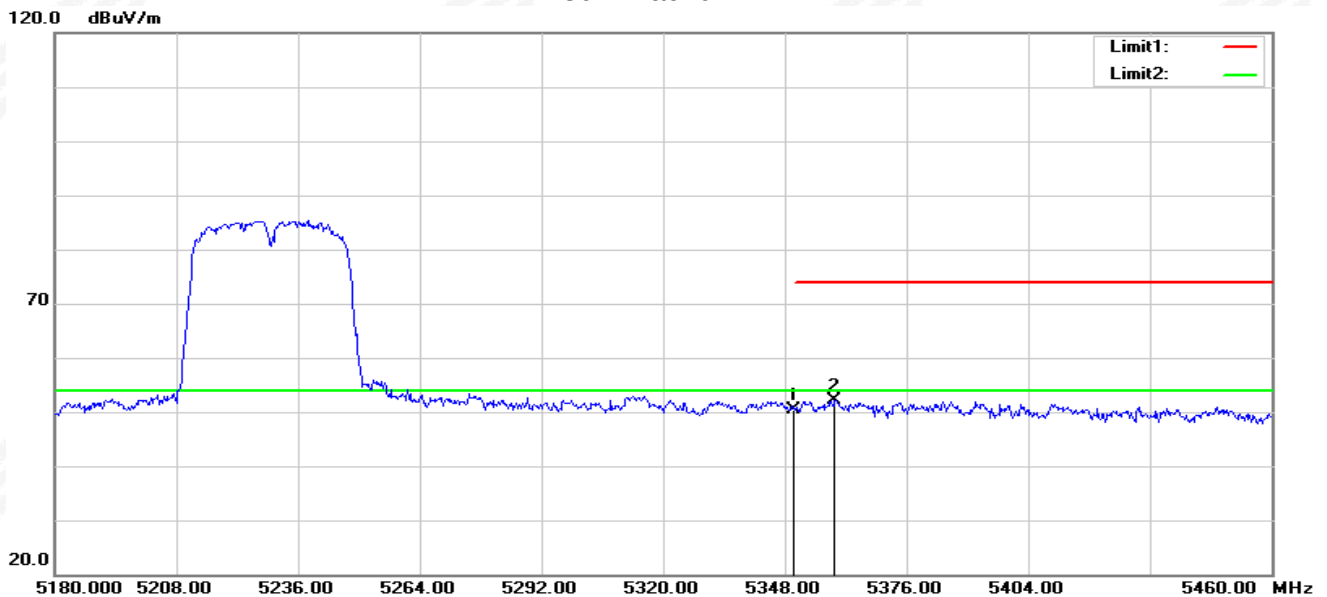


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	55.67	-5.23	50.44	54.00	-3.56	peak
2	5359.480	57.41	-5.23	52.18	54.00	-1.82	peak

802.11ac80-L-H

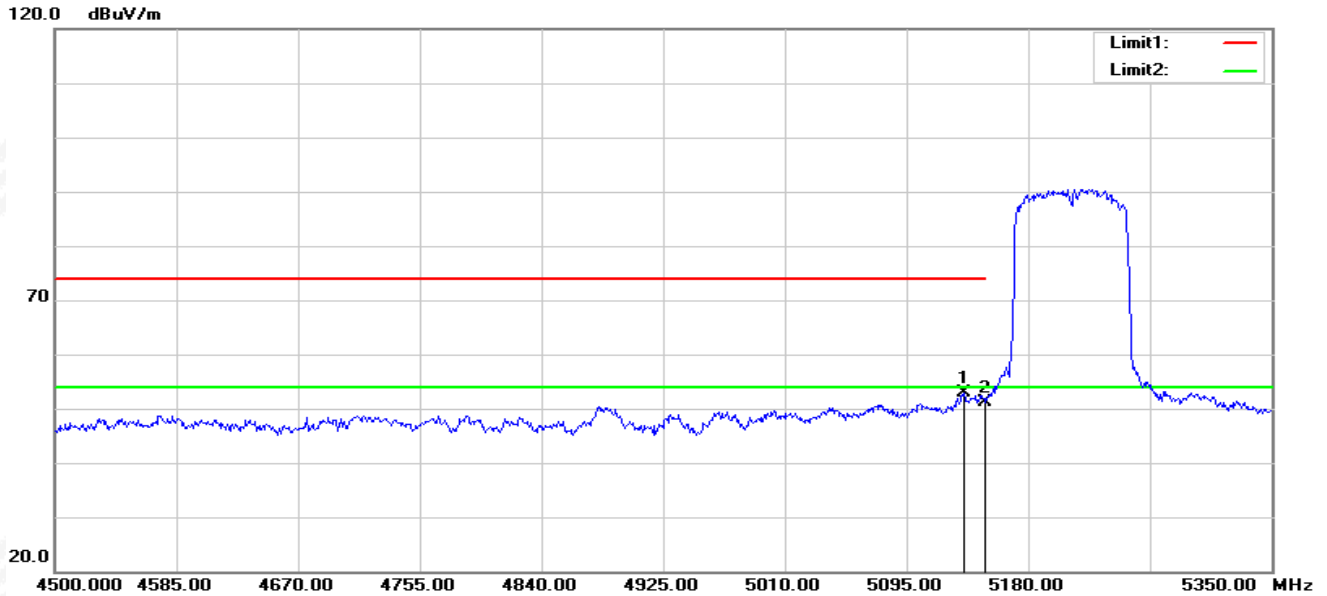


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5134.950	58.44	-5.67	52.77	54.00	-1.23	peak
2	5150.000	56.81	-5.77	51.04	54.00	-2.96	peak

802.11ac80-L-V

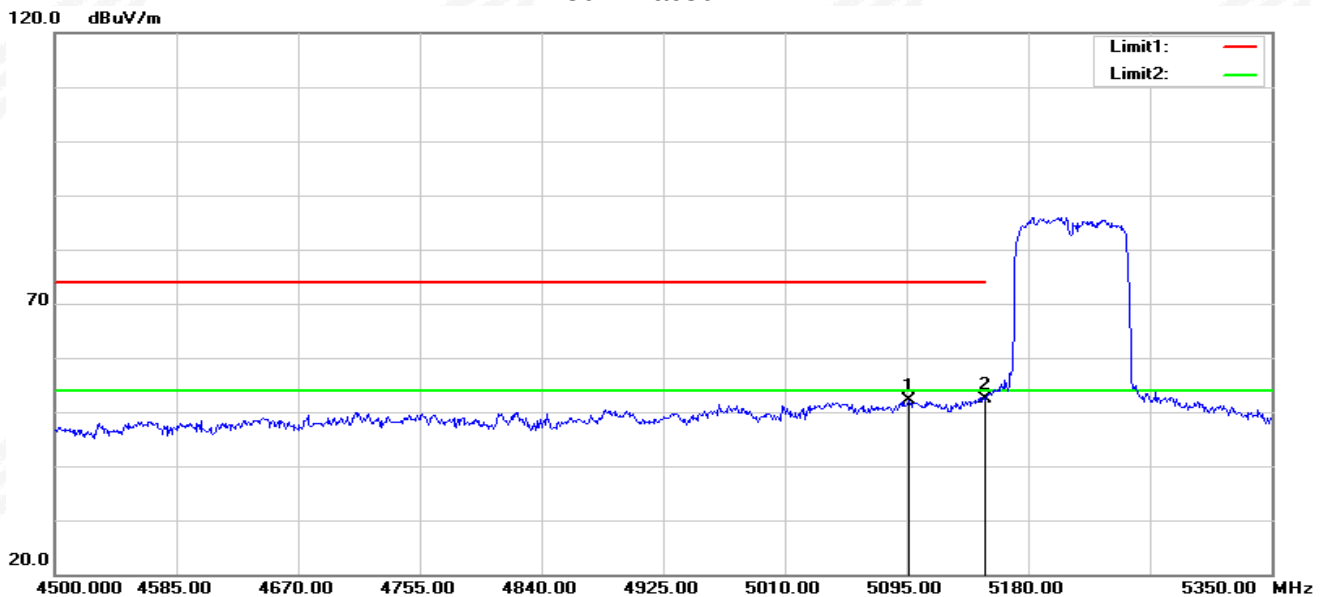


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5096.700	57.57	-5.46	52.11	54.00	-1.89	peak
2	5150.000	58.11	-5.77	52.34	54.00	-1.66	peak

802.11ac80-H-H

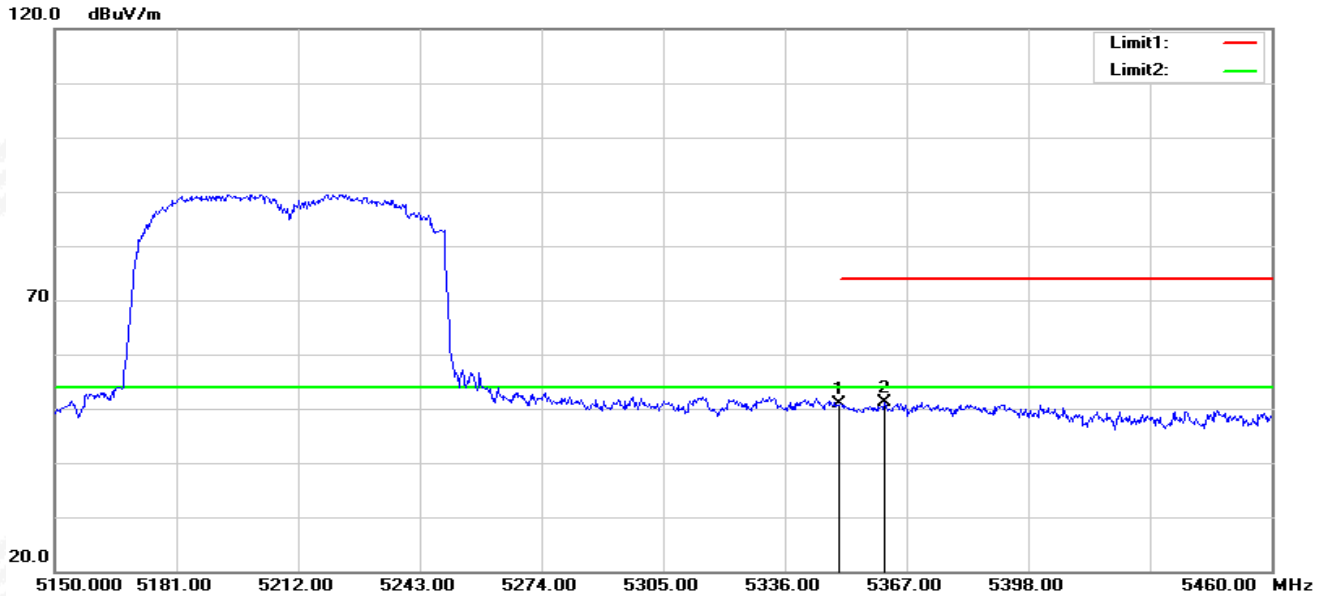

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	56.10	-5.33	50.77	54.00	-3.23	peak
2	5361.420	56.46	-5.27	51.19	54.00	-2.81	peak

802.11ac80-H-V

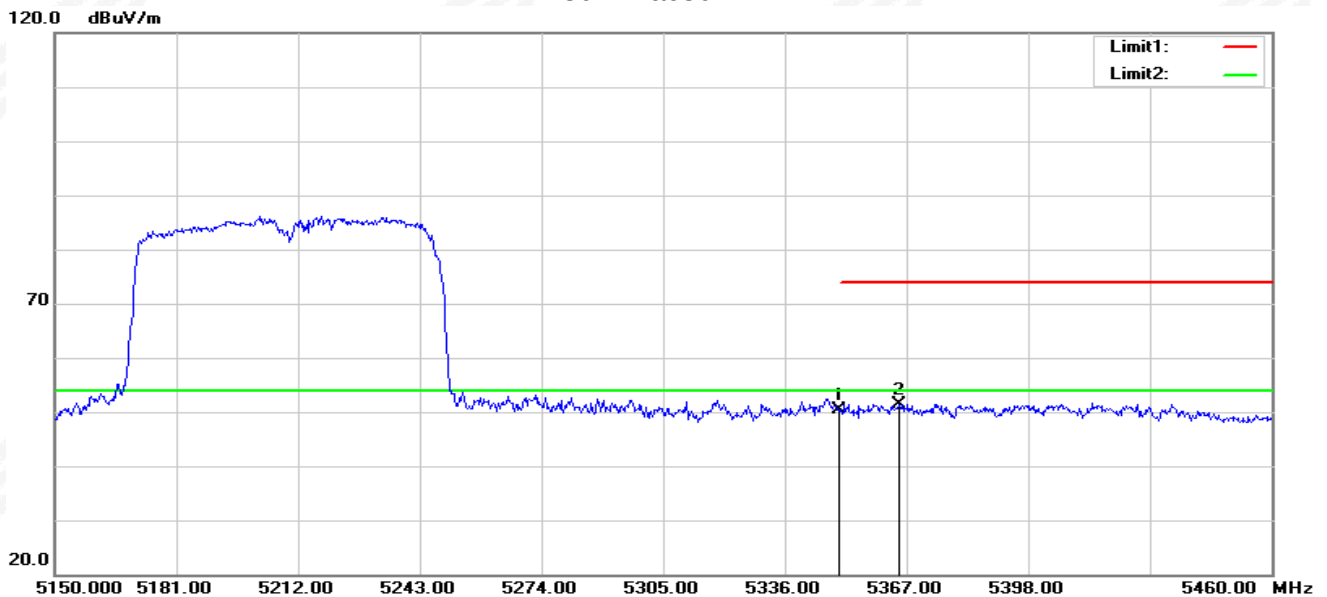


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	55.76	-5.33	50.43	54.00	-3.57	peak
2	5365.140	56.73	-5.26	51.47	54.00	-2.53	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. All modes have been measured, only worst mode was reported.


U-NII-3 (5.725-5.850) GHz

802.11n20-L-H

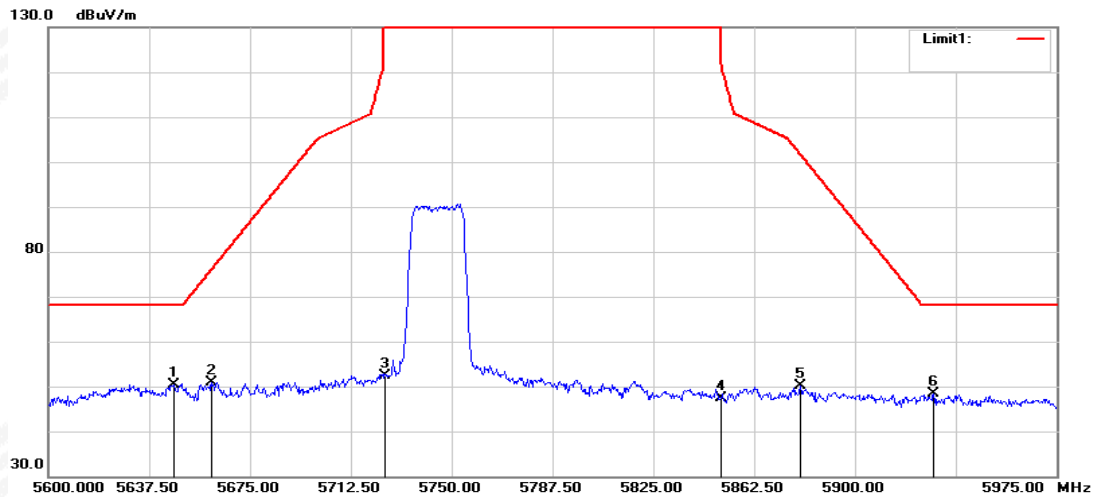


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.875	55.16	-4.69	50.47	68.20	-17.73	peak
2	5660.750	55.60	-4.67	50.93	76.16	-25.23	peak
3	5725.000	57.07	-4.57	52.50	122.20	-69.70	peak
4	5850.000	51.45	-4.10	47.35	122.20	-74.85	peak
5	5879.750	54.08	-3.97	50.11	101.69	-51.58	peak
6	5929.250	52.32	-3.93	48.39	68.20	-19.81	peak

802.11n20-L-V

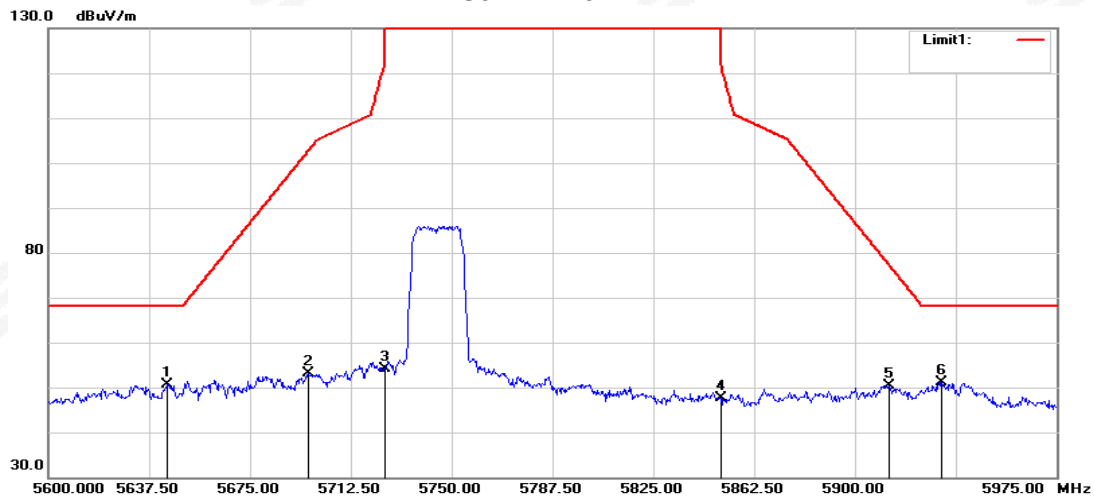


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.250	55.40	-4.68	50.72	68.20	-17.48	peak
2	5696.750	57.87	-4.67	53.20	102.80	-49.60	peak
3	5725.000	58.72	-4.57	54.15	122.20	-68.05	peak
4	5850.000	51.78	-4.10	47.68	122.20	-74.52	peak
5	5912.750	54.31	-3.90	50.41	77.27	-26.86	peak
6	5932.250	55.04	-3.94	51.10	68.20	-17.10	peak

802.11n20-H-H

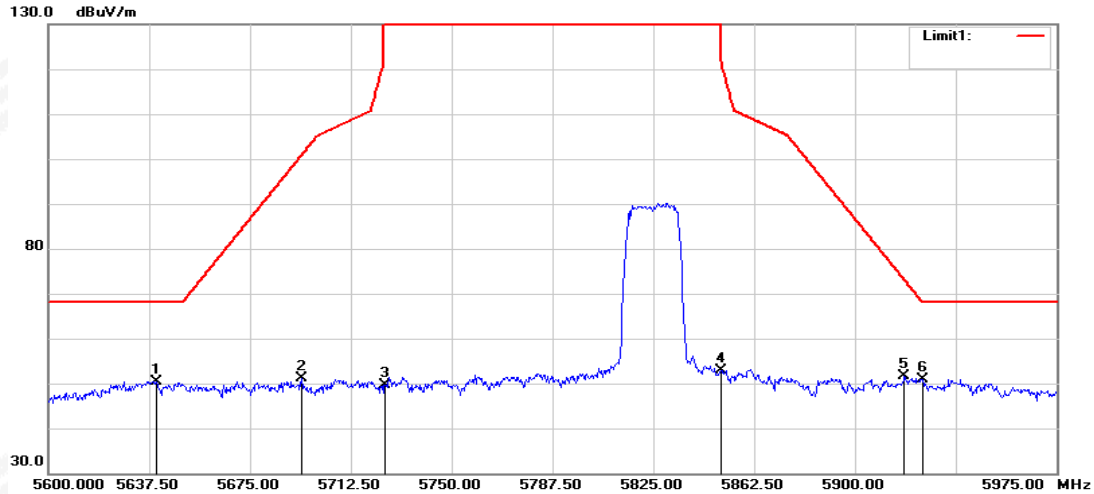


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.125	55.18	-4.69	50.49	68.20	-17.71	peak
2	5694.125	55.86	-4.66	51.20	100.85	-49.65	peak
3	5725.000	54.09	-4.57	49.52	122.20	-72.68	peak
4	5850.000	57.07	-4.10	52.97	122.20	-69.23	peak
5	5918.375	55.60	-3.91	51.69	73.10	-21.41	peak
6	5925.125	54.81	-3.92	50.89	68.20	-17.31	peak

802.11n20-H-V

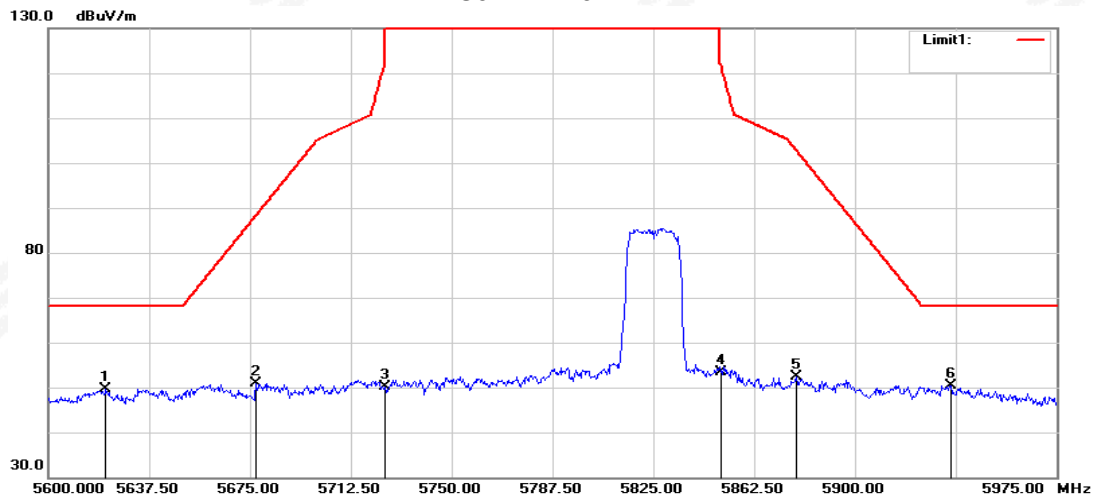


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5621.375	54.28	-4.70	49.58	68.20	-18.62	peak
2	5677.250	55.66	-4.67	50.99	88.37	-37.38	peak
3	5725.000	54.59	-4.57	50.02	122.20	-72.18	peak
4	5850.000	57.58	-4.10	53.48	122.20	-68.72	peak
5	5878.250	56.23	-3.97	52.26	102.80	-50.54	peak
6	5935.625	54.28	-3.94	50.34	68.20	-17.86	peak

802.11ac40-L-H

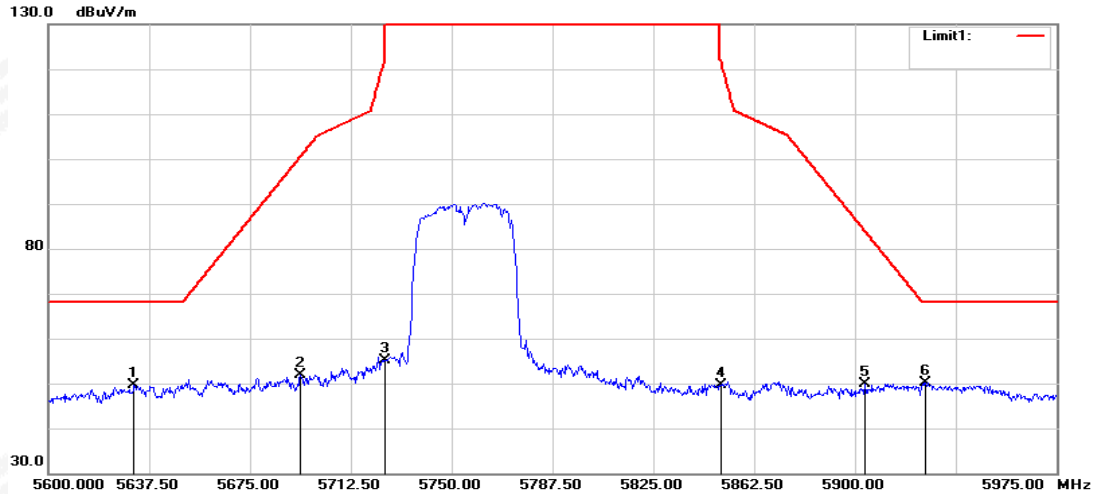


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5631.875	54.43	-4.69	49.74	68.20	-18.46	peak
2	5693.750	56.52	-4.66	51.86	100.58	-48.72	peak
3	5725.000	59.78	-4.57	55.21	122.20	-66.99	peak
4	5850.000	53.73	-4.10	49.63	122.20	-72.57	peak
5	5903.750	53.69	-3.88	49.81	83.92	-34.11	peak
6	5926.250	54.17	-3.93	50.24	68.20	-17.96	peak

802.11ac40-L-V

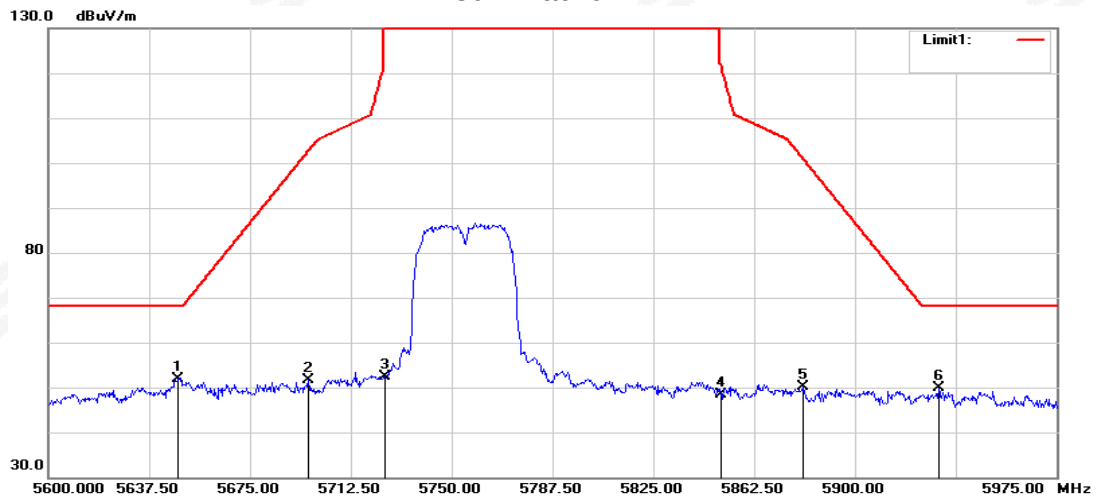


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5648.375	56.59	-4.68	51.91	68.20	-16.29	peak
2	5696.750	56.40	-4.67	51.73	102.80	-51.07	peak
3	5725.000	56.83	-4.57	52.26	122.20	-69.94	peak
4	5850.000	52.46	-4.10	48.36	122.20	-73.84	peak
5	5880.500	54.11	-3.96	50.15	101.13	-50.98	peak
6	5931.125	53.69	-3.93	49.76	68.20	-18.44	peak

802.11ac40-H-H

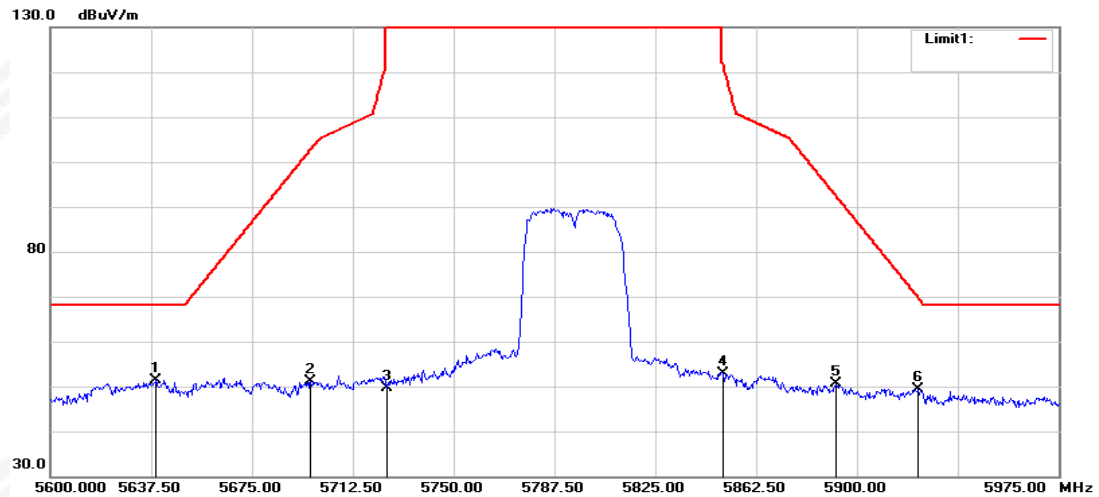


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5639.375	56.19	-4.69	51.50	68.20	-16.70	peak
2	5696.750	55.91	-4.67	51.24	102.80	-51.56	peak
3	5725.000	54.08	-4.57	49.51	122.20	-72.69	peak
4	5850.000	56.87	-4.10	52.77	122.20	-69.43	peak
5	5892.125	54.45	-3.91	50.54	92.53	-41.99	peak
6	5922.875	53.27	-3.92	49.35	69.77	-20.42	peak

802.11ac40-H-V

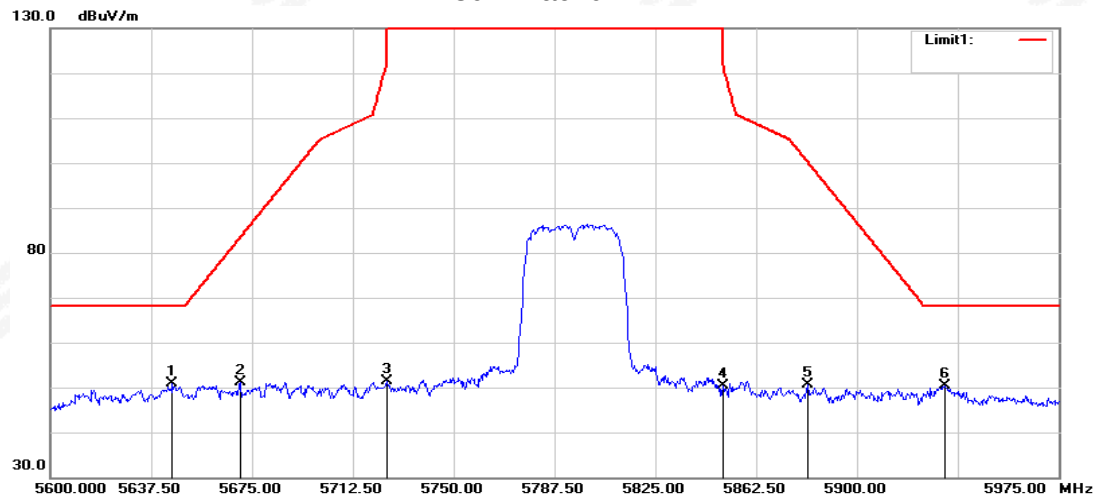


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.375	55.58	-4.68	50.90	68.20	-17.30	peak
2	5670.500	55.76	-4.67	51.09	83.37	-32.28	peak
3	5725.000	55.98	-4.57	51.41	122.20	-70.79	peak
4	5850.000	54.43	-4.10	50.33	122.20	-71.87	peak
5	5881.625	54.56	-3.96	50.60	100.30	-49.70	peak
6	5932.625	54.25	-3.94	50.31	68.20	-17.89	peak

802.11ac80-H

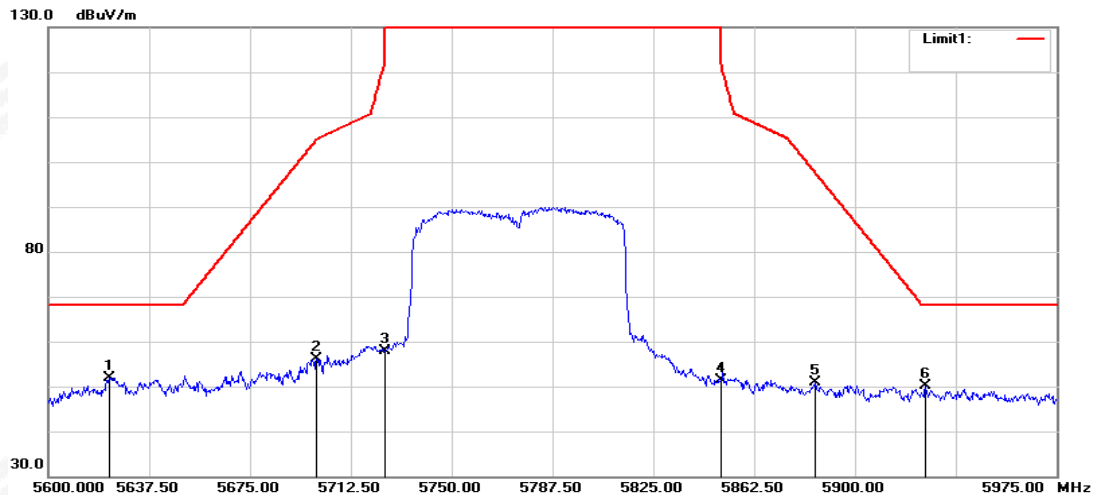

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5622.500	56.62	-4.69	51.93	68.20	-16.27	peak
2	5699.750	60.90	-4.66	56.24	105.02	-48.78	peak
3	5725.000	62.57	-4.57	58.00	122.20	-64.20	peak
4	5850.000	55.38	-4.10	51.28	122.20	-70.92	peak
5	5885.375	54.75	-3.94	50.81	97.52	-46.71	peak
6	5926.250	54.02	-3.93	50.09	68.20	-18.11	peak

802.11ac80-V

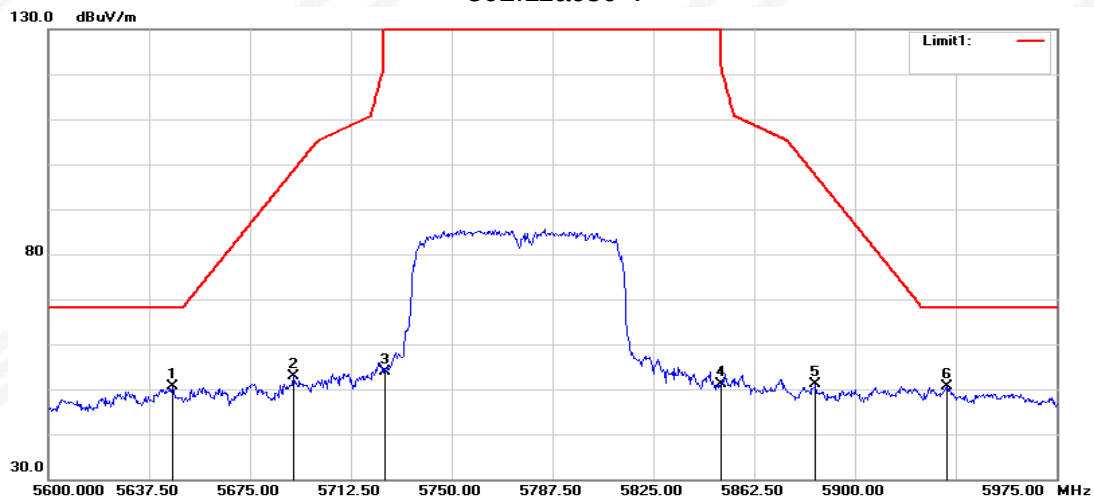

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.125	55.20	-4.69	50.51	68.20	-17.69	peak
2	5691.125	57.44	-4.66	52.78	98.63	-45.85	peak
3	5725.000	58.34	-4.57	53.77	122.20	-68.43	peak
4	5850.000	55.25	-4.10	51.15	122.20	-71.05	peak
5	5885.375	54.97	-3.94	51.03	97.52	-46.49	peak
6	5934.125	54.60	-3.94	50.66	68.20	-17.54	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. All modes have been measured, only worst mode was reported.

4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


4.2 TEST PROCEDURE

Please refer to ANSI C63.10-2020+Cor 1-2023 Section 12.6 Method SA-2.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

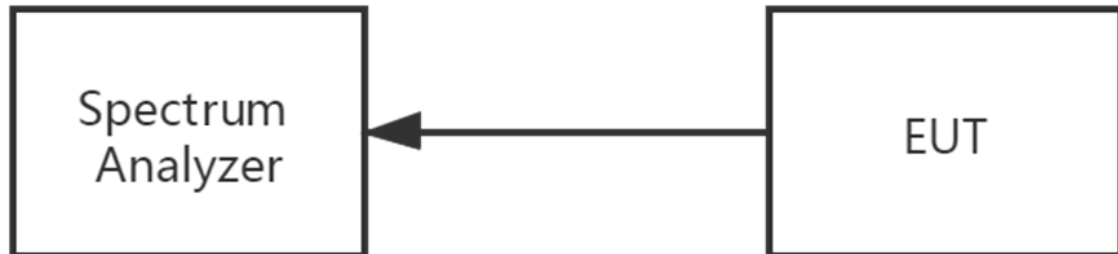

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Note: The test data please reference to attachment "STS2603308W10_Appendix 5G WIFI".

For U-NII 3:

1. Total PSD(dBm/500KHz) = Total PSD(dBm/510KHz) + RBW Factor
2. RBW Factor = $10 * \text{Log}(500/510)$

5. DUTY CYCLE

5.1 TEST STANDARD

Please refer to ANSI C63.10-2020+Cor 1-2023 Section 12.2


5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Zero
RB	set RBW to the largest available value
VB	$VBW \geq RBW$.
Detector	Peak
Trace	Clear Write
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Note: The test data please reference to attachment "STS2603308W10_Appendix 5G WIFI".

6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth

6.1.1 TEST PROCEDURE

1. The testing follows ANSI C63.10-2020+Cor 1-2023 Section 12.5.
2. Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Note: The test data please reference to attachment "STS2603308W10_Appendix 5G WIFI".

6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

6.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01. The following procedure shall be used for measuring (99 %) power bandwidth:
 1. Set center frequency to the nominal EUT channel center frequency.
 2. Set span = 1.5 times to 5.0 times the OBW.
 3. Set RBW = 1 % to 5 % of the OBW
 4. Set VBW $\geq 3 \cdot$ RBW
 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
 6. Use the 99 % power bandwidth function of the instrument (if available).
 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.2.2 DEVIATION FROM STANDARD

No deviation.

6.2.3 TEST SETUP



6.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2.5 TEST RESULTS

Note: The test data please reference to attachment “STS2603308W10_Appendix 5G WIFI”.

6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

6.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.2 DEVIATION FROM STANDARD

No deviation.

6.3.3 TEST SETUP



6.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.3.5 TEST RESULTS

Note: The test data please reference to attachment "STS2603308W10_Appendix 5G WIFI".

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Max Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5895	


7.2 TEST PROCEDURE

Please refer to ANSI C63.10-2020+Cor 1-2023 Section 12.4.2 Method SA-2

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Note: The test data please reference to attachment "STS2603308W10_Appendix 5G WIFI".

8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.

10. FREQUENCY STABILITY


10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

10.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

10.3 TEST STEUP

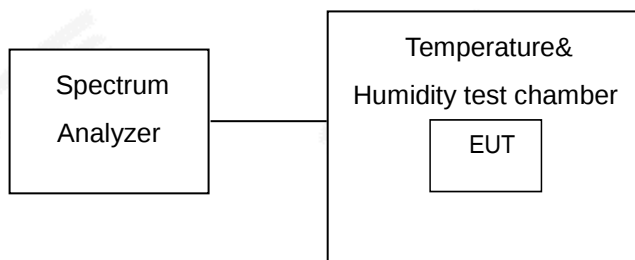



10.4 TEST RESULT

5.2GWiFi

Channel 40(5200MHz)

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
4.4275	5200.0033
3.85	5200.0029
3.2725	5200.0027
Max.Deviation(MHz)	0.0033
Max.Deviation(ppm)	0.63

Rated working voltage: DC 3.85V

Temperature vs. Frequency Stability

Temperature(°C)	Measurement Frequency(MHz)
-30	5200.0037
-20	5200.0037
-10	5200.0030
0	5200.0036
10	5200.0029
20	5200.0032
30	5200.0032
40	5200.0027
50	5200.0036
Max.Deviation(MHz)	0.0037
Max.Deviation(ppm)	0.71



5.8GWiFi
Channel 157(5785MHz)
Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
4.4275	5785.0035
3.85	5785.0034
3.2725	5785.0026
Max.Deviation(MHz)	0.0035
Max.Deviation(ppm)	0.61

Rated working voltage: DC 3.85V
Temperature vs. Frequency Stability

Temperature(°C)	Measurement Frequency(MHz)
-30	5785.0036
-20	5785.0035
-10	5785.0036
0	5785.0032
10	5785.0035
20	5785.0035
30	5785.0035
40	5785.0031
50	5785.0032
Max.Deviation(MHz)	0.0036
Max.Deviation(ppm)	0.62



APPENDIX - PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****