

承 认 书

客户名称： 深圳市佳宇创科技

客户料号： 25.25131-1

我司型号： YZ-G25-7.6UH-3200GS-8MM

送样日期： 2025 年 2 月 19 日

供应方： Jir uisi Technology Co., LTD

绘 制	审 核	批 准
王 莉 芝	邓 祥 桂	陆 如 圣

客户承认：

合 格	不 合 格	承 认
备 注		

客户名称	客户料号	我司型号	版 本	日 期
佳宇创	25.25131-1	YZ-G25-7.6UH-3200GS-8MM	A0	2025.2.19

Acknowledgement

Customer name: Shenzhen Jiayuchuang Technology

Customer item code: 25.25131-1

Our company model: YZ-G25-7.6UH-3200GS-8MM

Sample delivery date: February 19,2025

Supplier: Jiruisi Technology Co., LTD

Draw	Examine and verify	Ratify
Wang Li Zhi	Deng Xianggui	Lu Rui Sheng



The client acknowledges:

Qualified	Unqualified	Admit
Remarks		

Address : Building 1, Industrial Zone 4, RunTeng, 5 JinTai Road, LongTeng Community,
Shenzhen Bao'an District, Shaoyan Street

Customer Name	Customer item code	Our model	Edition	Date
Jia Yu Chuang	25.25131-1	YZ-G25-7.6UH-3200GS-8MM	A0	2025.2.19

一、平面结构图： 单位:MM

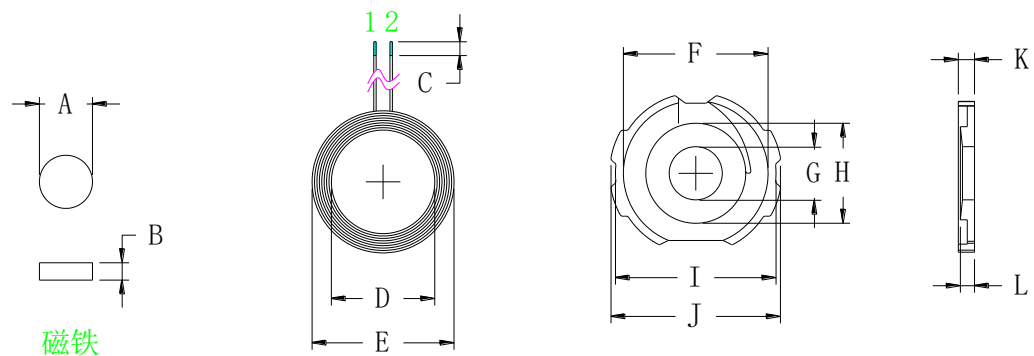

A	7.65 ± 0.1
B	2.0 ± 0.1
C	2.0 ± 1
D	15 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.1
H	14.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.2
K	2.6 ± 0.15
L	2.5 ± 0.15 中柱高度
M	8 ± 1

二、产品参数：



脚 位	线 径	圈 数	备 注
1 - 2	0.08*24P	13	热风绞合线

三、技术要求：

1. 固定好线头线尾，防止线松断线等现象
2. 按客户要求把过长的线头剪，镀上锡，镀锡深度统一为 2 ± 1 MM
3. 在磁片上点上适当的白胶，贴上线圈，过程中要保证产品表面干净整洁
4. 所用磁片为带圆孔， 无破损
- 5.附加工序（按客户要求）：于成品中间圆孔装上 7.65x2.0mm 磁铁并在成品

背后加贴 13*13mm 方形双面胶，后包装

1. Floor Plan: Unit: MM

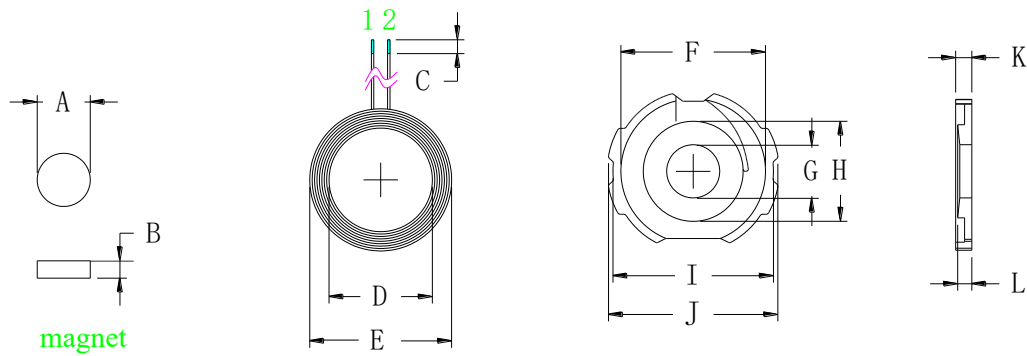

A	7.65 ± 0.1
B	2.0 ± 0.1
C	2.0 ± 1
D	15 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.1
H	14.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.2
K	2.6 ± 0.15
L	2.5 ± 0.15 median column height
M	8 ± 1

2. Product parameters:

Foot position	Line Diameter	Number of turns	Remarks
1 - 2	0.08*24P	13	Hot air braided wire

3. Technical requirements:

- Secure the ends of the wire to prevent it from loosening or breaking.
- Trim excess wire ends as per customer specifications, then tinplate them with a uniform depth of 2 ± 1 mm.
- Apply the appropriate white adhesive to the magnetic disc and attach the coil. Ensure the product surface is clean and tidy during the process.

4. The disc used is round and undamaged

- Additional processing (per customer request): Install 7.65x2.0mm magnets on the intermediate round hole of the finished product and apply 13*13mm double-sided tape on the back of the finished product for packaging.

四、电性参数：

1.电感值，Q 值：

$$\text{PIN 1} - \text{2} = 7.6\text{UH} \pm 0.3\text{UH}$$

$$\text{Q 值} \geq 25$$

以上电感与 Q 值以铨华 1062A 仪器， 以 100KHZ/1.0Vrms 为标准或等同仪器。

五、材料清单：

序号	名称	材质	供应商	备 注
1	热风绞合线	0.08X24P	维汉或等同	
2	磁 片	G25 硬基材	天通或等同	
3	锡	高温环保	千岛或等同	
4	白 胶	BY882	宝月或等同	
5	强 磁	7.65*2.0*3200GS	联胜或等同	附加工序,按客户要求
6	双 面 胶	513-13*13mm	鸿辉或 d	方形

4. Electrical parameters:

1. Inductance value, Q value:

$$\text{PIN 1} - 2 = 7.6\text{UH} \pm 0.3\text{UH}$$

$$\text{Q value} \geq 25$$

The inductance and Q value are measured using the Quan Hua 1062A instrument, with 100KHZ/1.0Vrms as the standard or equivalent.

V. Material List:

Order number	Name	Material quality	Supplier	Remarks
1	Hot air braided wire	0.08X24P	Vietnamese or equivalent	
2	Magnetic sheet	G25 Hard substrate	Tiantong or equivalent	
3	Tin	High temperature environmental protection	Ten Thousand Islands or equivalent	
4	Alban	BY882	Bao Yue or equivalent	
5	Strong Magnet	7.65*2.0*3200GS	Liansheng or equivalent	Add processing steps as required by the customer
6	Double faced adhesive tape	513-13*13mm	Honghui or D	Square