



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No. : CTL2510142091-WF03

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Tested by:
(position+printed name+signature)

Lydia Ou
(Test Engineer)

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)



Product Name : Smart Cat Nest

Model/Type reference : JMCH-004

List Model(s)..... : JMCH-001, JMCH-002, JMCH-003, JMCH-005, JMCH-006,
JMCH-007, JMCH-008, JMCH-009, HCCN-002, HCCN-004

Trade Mark..... : N/A

FCC ID..... : 2BSY5-JMCH

Applicant's name : Dongguan Gimi Electric Appliance Co., Ltd.

Address of applicant : No. 5, Lane 2, Jincheng Road, Golden Phoenix Industrial Zone,
Fenggang Town, Dongguan City, Guangdong Province, China

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : 47 CFR FCC Part 15 Subpart E 15.407

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of receipt of test item : Oct 31, 2025

Date of Test Date..... : Oct 31, 2025 - Nov 19, 2025

Date of Issue : Nov 19, 2025

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2510142091-WF03	Nov 19, 2025
		Date of issue

Equipment under Test : Smart Cat Nest

Sample No : CTL251014209005, CTL251014209001,
CTL251014209002, CTL251014209003

Model /Type : JMCH-004

Listed Models : JMCH-001, JMCH-002, JMCH-003, JMCH-005, JMCH-006,
JMCH-007, JMCH-008, JMCH-009, HCCN-002, HCCN-004

Applicant : **Dongguan Gimi Electric Appliance Co., Ltd.**

Address : No. 5, Lane 2, Jincheng Road, Golden Phoenix Industrial
Zone, Fenggang Town, Dongguan City, Guangdong
Province, China

Manufacturer : **Dongguan Gimi Electric Appliance Co., Ltd.**

Address : No. 5, Lane 2, Jincheng Road, Golden Phoenix Industrial
Zone, Fenggang Town, Dongguan City, Guangdong
Province, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

** Modified History **

[illegible]

Table of Contents

Page

1. SUMMARY	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.5. EUT CONFIGURATION	错误!未定义书签。
2. GENERAL INFORMATION	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	9
2.4. EQUIPMENTS USED DURING THE TEST	10
2.5. RELATED SUBMITTAL(S) / GRANT (S)	11
2.6. MODIFICATIONS	11
3. TEST CONDITIONS AND RESULTS	12
3.1. CONDUCTED EMISSIONS TEST	12
3.2. RADIATED EMISSIONS	21
3.3. MAXIMUM CONDUCTED AVERAGE OUTPUT POWER	72
3.4. POWER SPECTRAL DENSITY	73
3.5. EMISSION BANDWIDTH (26dBm BANDWIDTH)	75
3.6. MINIMUM EMISSION BANDWIDTH (6dBm BANDWIDTH)	76
3.7. FREQUENCY STABILITY	77
3.8. ANTENNA REQUIREMENT	78
4. TEST SETUP PHOTOS OF THE EUT	79
5. PHOTOS OF THE EUT	81

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10: 2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v02r01

1.2. Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS ^{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	PASS ^{Note3}
FCC Part 15.203	Antenna requirement	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: Test result refer to DFS report.

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 1.60 dB	(1)
Occupied Bandwidth	± 0.20 ppm	(1)
Radiated Emission 9KHz~30MHz	± 3.66 dB	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Smart Cat Nest		
Model/Type reference:	JMCH-004		
Power supply:	DC 9V from adapter		
Adapter information	Mode: HA036A-900300UH Input:100-240V~50/60Hz 1.0A MAX Output:9V---3.0A		
Test Voltage:	AC 110V/60Hz		
Wi-Fi 5GHz			
Supported type:	20MHz system	40MHz system	80MHz system
	802.11a 802.11n	802.11n	/
Operation frequency:	5180-5240MHz 5260-5320MHZ 5500-5700MHz 5745-5825MHz	5190-5230MHz 5270-5310MHZ 5510-5670MHz 5755-5795MHz	/
Modulation:	OFDM	OFDM	/
Channel number:	24	11	/
Channel separation:	20MHz	40MHz	/
MIMO:	Not Support		
DFS Operational mode:	Support		

Antenna type:	PCB Antenna
Antenna gain:	5180MHz-5240MHz: 1.97 dBi 5260MHz-5320MHz: 1.97dBi 5500MHz-5700MHz: 1.60dBi 5745MHz-5825MHz: -0.76 dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

Note3: This report is only for 5G Wi-Fi.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List Wi-Fi on 5G Band:

Operating band	20MHz		40MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190
	40	5200		
	44	5220	46	5230
	48	5240		
U-NII 2A (5120MHz-5350MHz)	52	5260	54	5270
	56	5280		
	60	5300	62	5310
	64	5320		
U-NII 2C (5470MHz-5725MHz)	100	5500	102	5510
	104	5520	110	5550
	108	5540		
	112	5560		
	116	5580	118	5590
	120	5600		
	124	5620		
	128	5640	126	5630
	132	5660	134	5670
	136	5680		
U-NII 3 (5725MHz-5850MHz)	140	5700	--	--
	149	5745	151	5755
	153	5765		
	157	5785	159	5795
	161	5805		
	165	5825	--	--

Note:

1. "--"Means no channel(s) available any more.
2. The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz) /11ac(20MHz) /OFDM	7.2 Mbps
	11n(40MHz) /11ac(40MHz) /OFDM	15.0Mbps

2.4. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2025/04/29	2026/04/28
	LISN	ROHDE & SCHWARZ	ESH2-Z5	860014/010	2025/04/29	2026/04/28
	Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2025/04/29	2026/04/28
Software:						
Name of Software:				Version:		
ES-K1				V1.71		

Radiated Emissions and Band Edge					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Ring antenna	BEIJING DA ZE TECHNOLOGY CO., LTD	ZN30900A	/	2024/04/30	2027/04/29
ULTRA-BROADBAND ANTENNA	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2024/11/25	2027/11/24
Horn Antenna	Ocean Microwave	OBH100400	26999002	2025/02/21	2028/02/20
Amplifier	/	XSD-LNA-1-18G-45A	/	2025/4/30	2026/4/29
Amplifier	Agilent	8449B	3008A02306	2025/05/01	2026/04/30
Amplifier	Brief&Smart	LNA-4018	2104197	2025/04/30	2026/04/29
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2025/04/29	2026/04/28
Spectrum Analyzer	RS	FSP	1164.4391.38	2025/04/29	2026/04/28
Test software					
Name of Software			Version		
EZ_EMG(Below 1GHz)			V1.1.4.2		
EZ_EMG(Above 1GHz)			V1.1.4.2		

Maximum Conducted Output Power & Power Spectral Density & 6dB Bandwidth & Out-of-band Emissions					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Spectrum Analyzer	Agilent	N9020A	MY53420874	2025/04/29	2026/04/28
Temperature/Humidity Meter	Ji Yu	MC501	/	2025/05/06	2026/05/05
Test Software					
Name of Software			Version		
TST-PASS			V2.0.1		

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST CONFIGURATION

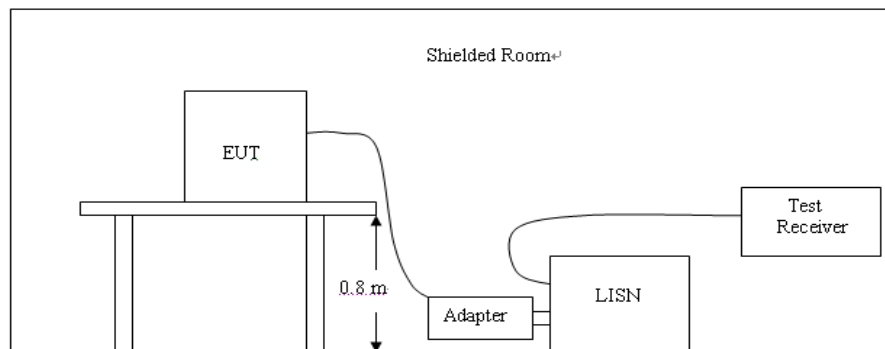


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Laser Projector op system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2020.
2. Support equipment, if needed, was placed as per ANSI C63.10:2020.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2020.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

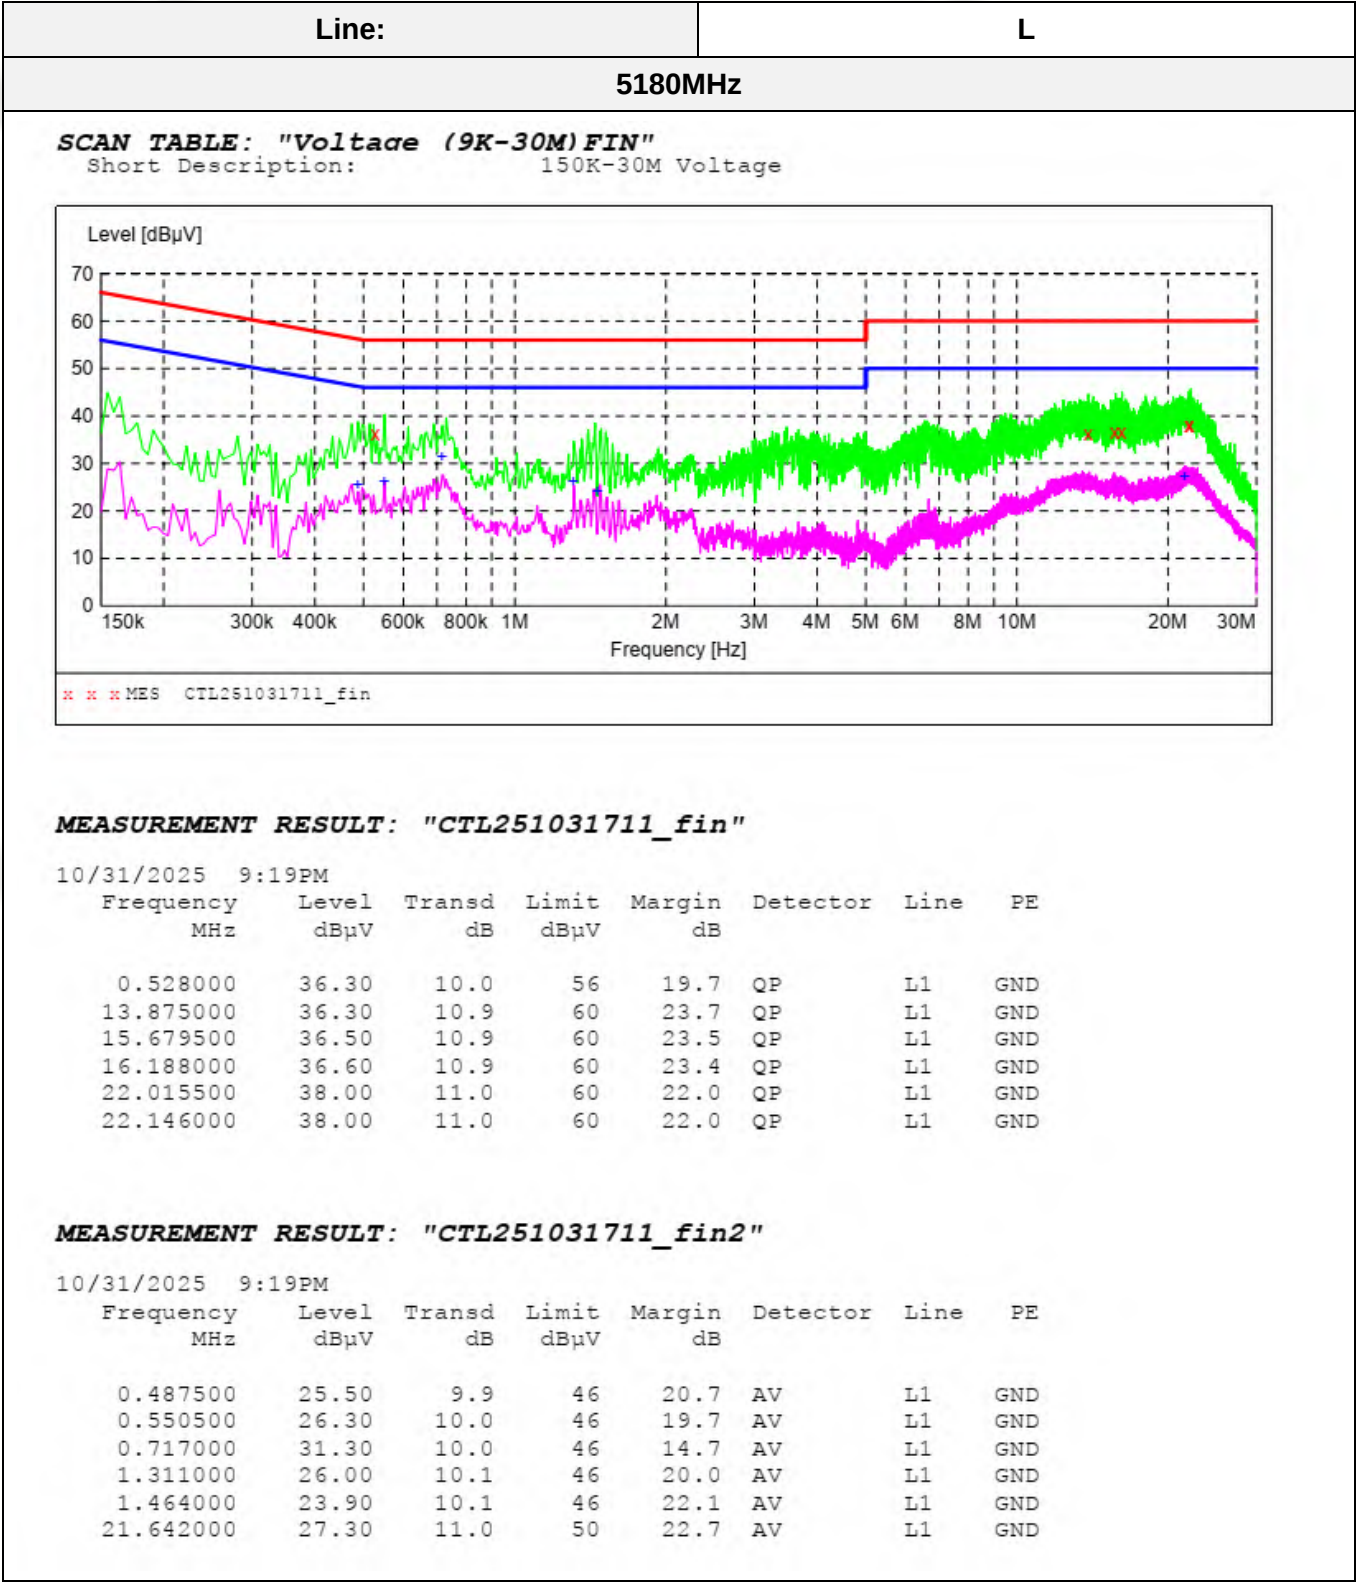

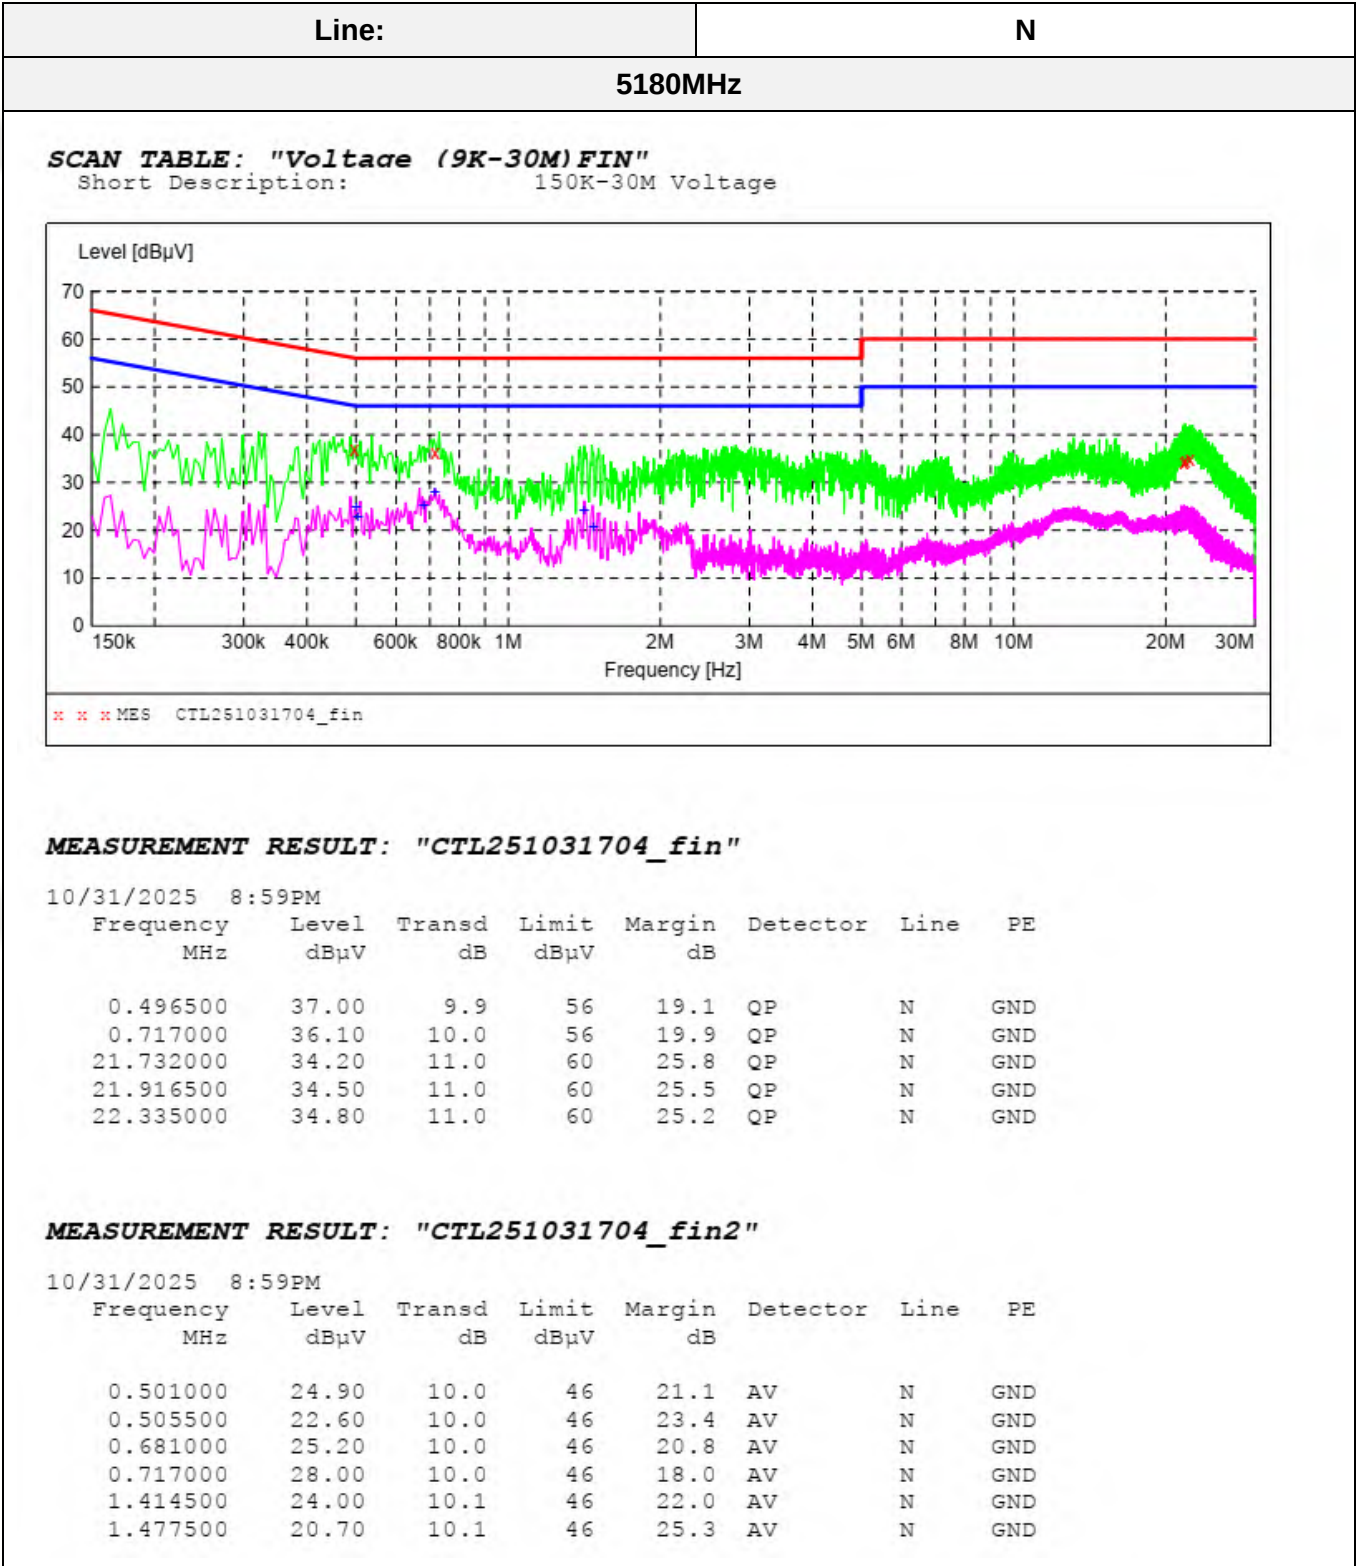


Line:

L

5260MHz

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

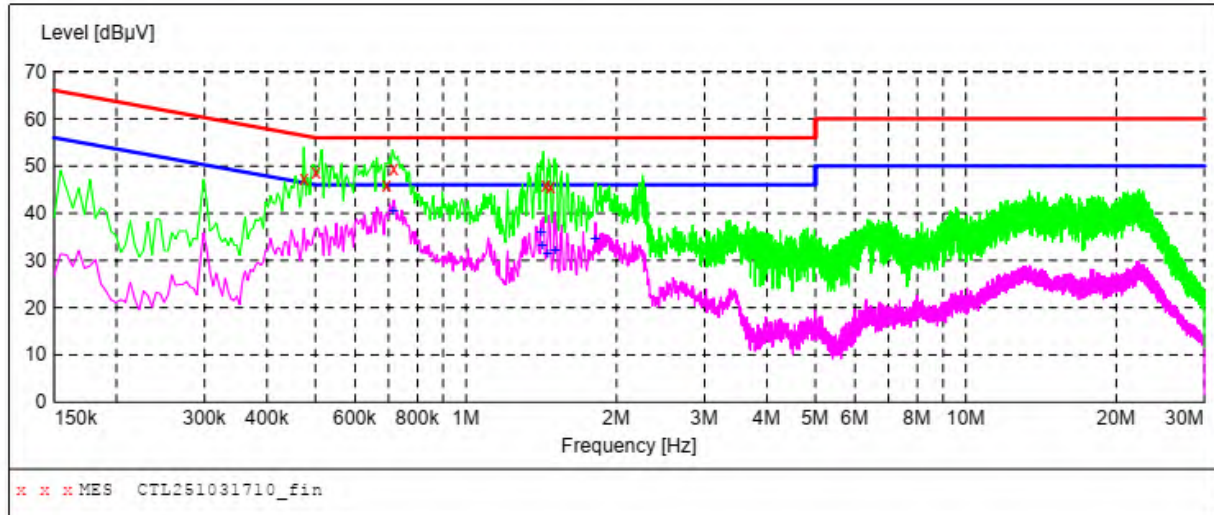**MEASUREMENT RESULT: "CTL251031710_fin"**


10/31/2025 9:16PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.474000	47.20	9.9	56	9.2	QP	L1	GND
0.501000	48.90	10.0	56	7.1	QP	L1	GND
0.694500	46.10	10.0	56	9.9	QP	L1	GND
0.717000	49.30	10.0	56	6.7	QP	L1	GND
1.446000	45.90	10.1	56	10.1	QP	L1	GND
1.477500	45.60	10.1	56	10.4	QP	L1	GND


MEASUREMENT RESULT: "CTL251031710_fin2"


10/31/2025 9:16PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.717000	40.50	10.0	46	5.5	AV	L1	GND
1.414500	35.70	10.1	46	10.3	AV	L1	GND
1.423500	33.10	10.1	46	12.9	AV	L1	GND
1.459500	31.50	10.1	46	14.5	AV	L1	GND
1.513500	32.10	10.1	46	13.9	AV	L1	GND
1.815000	34.40	10.1	46	11.6	AV	L1	GND

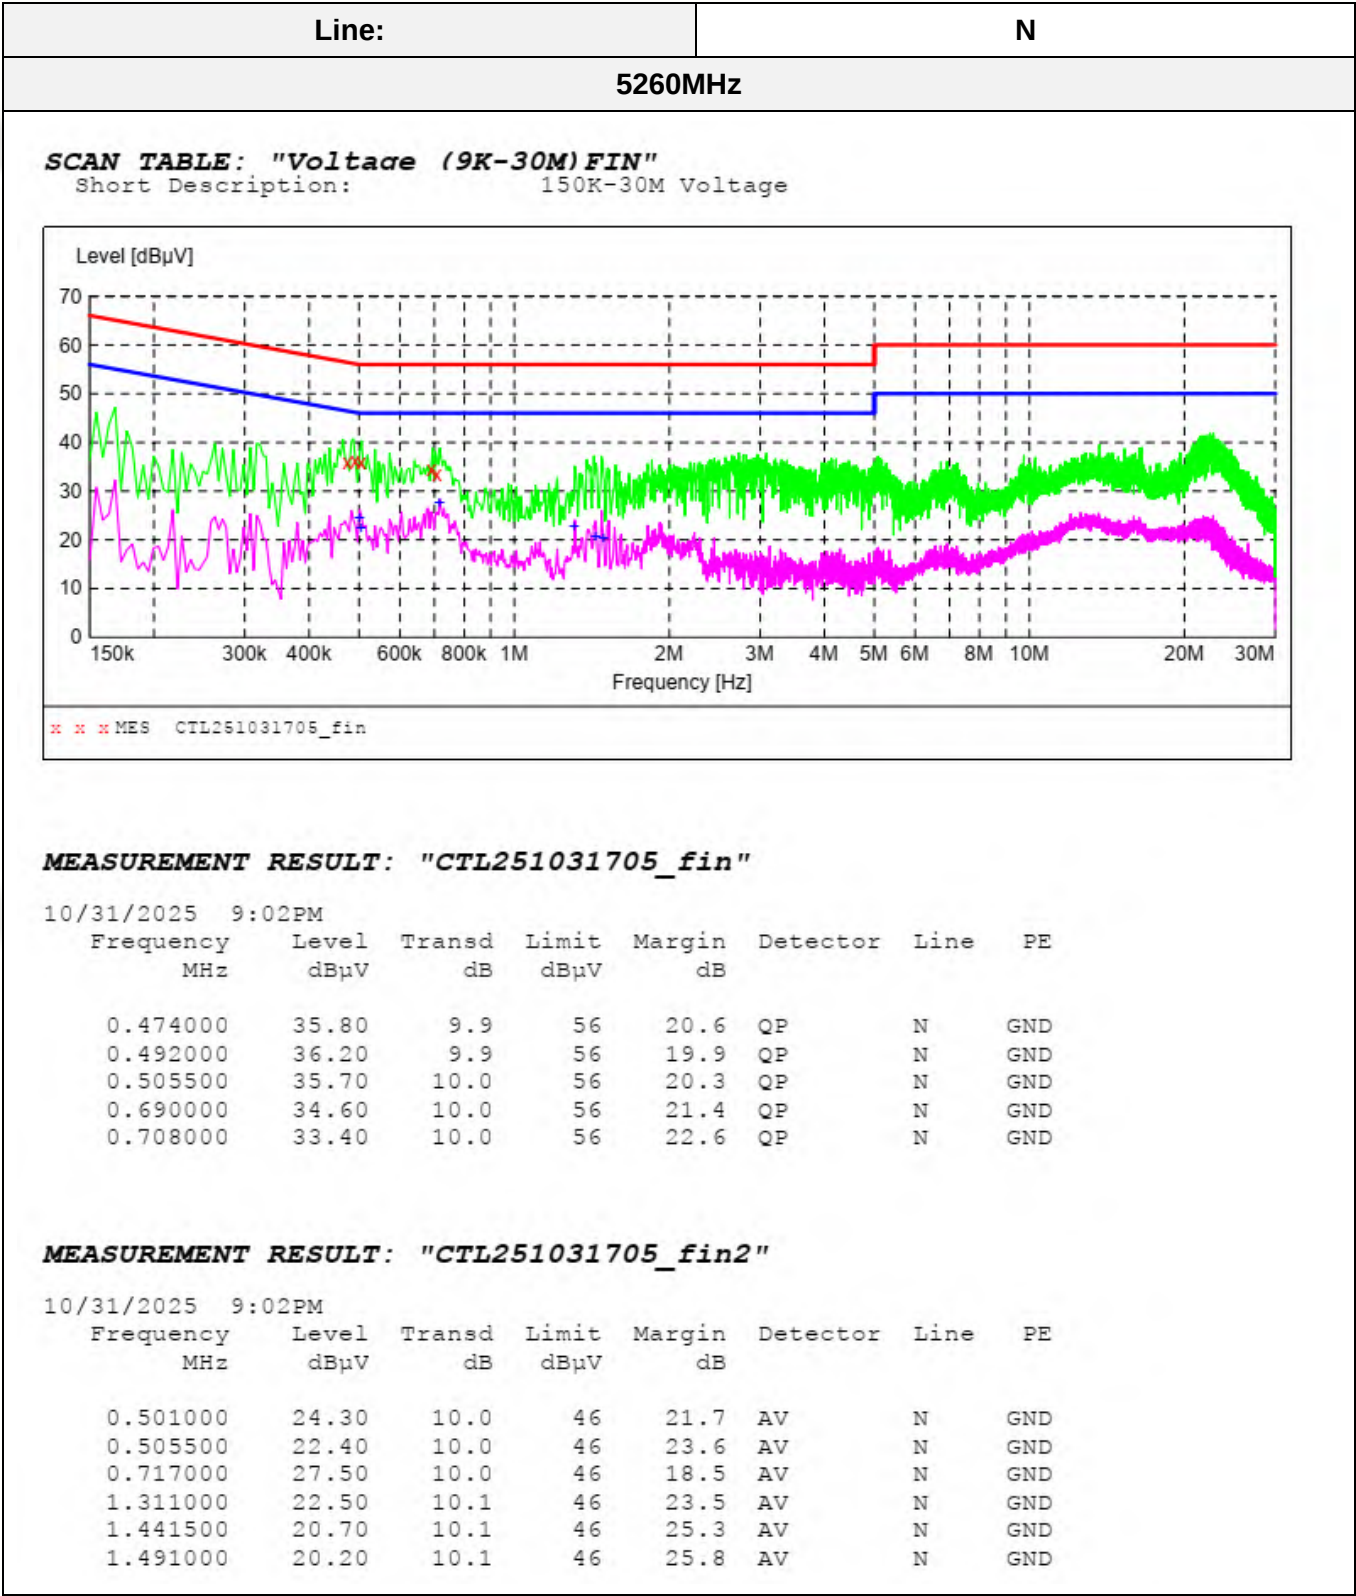

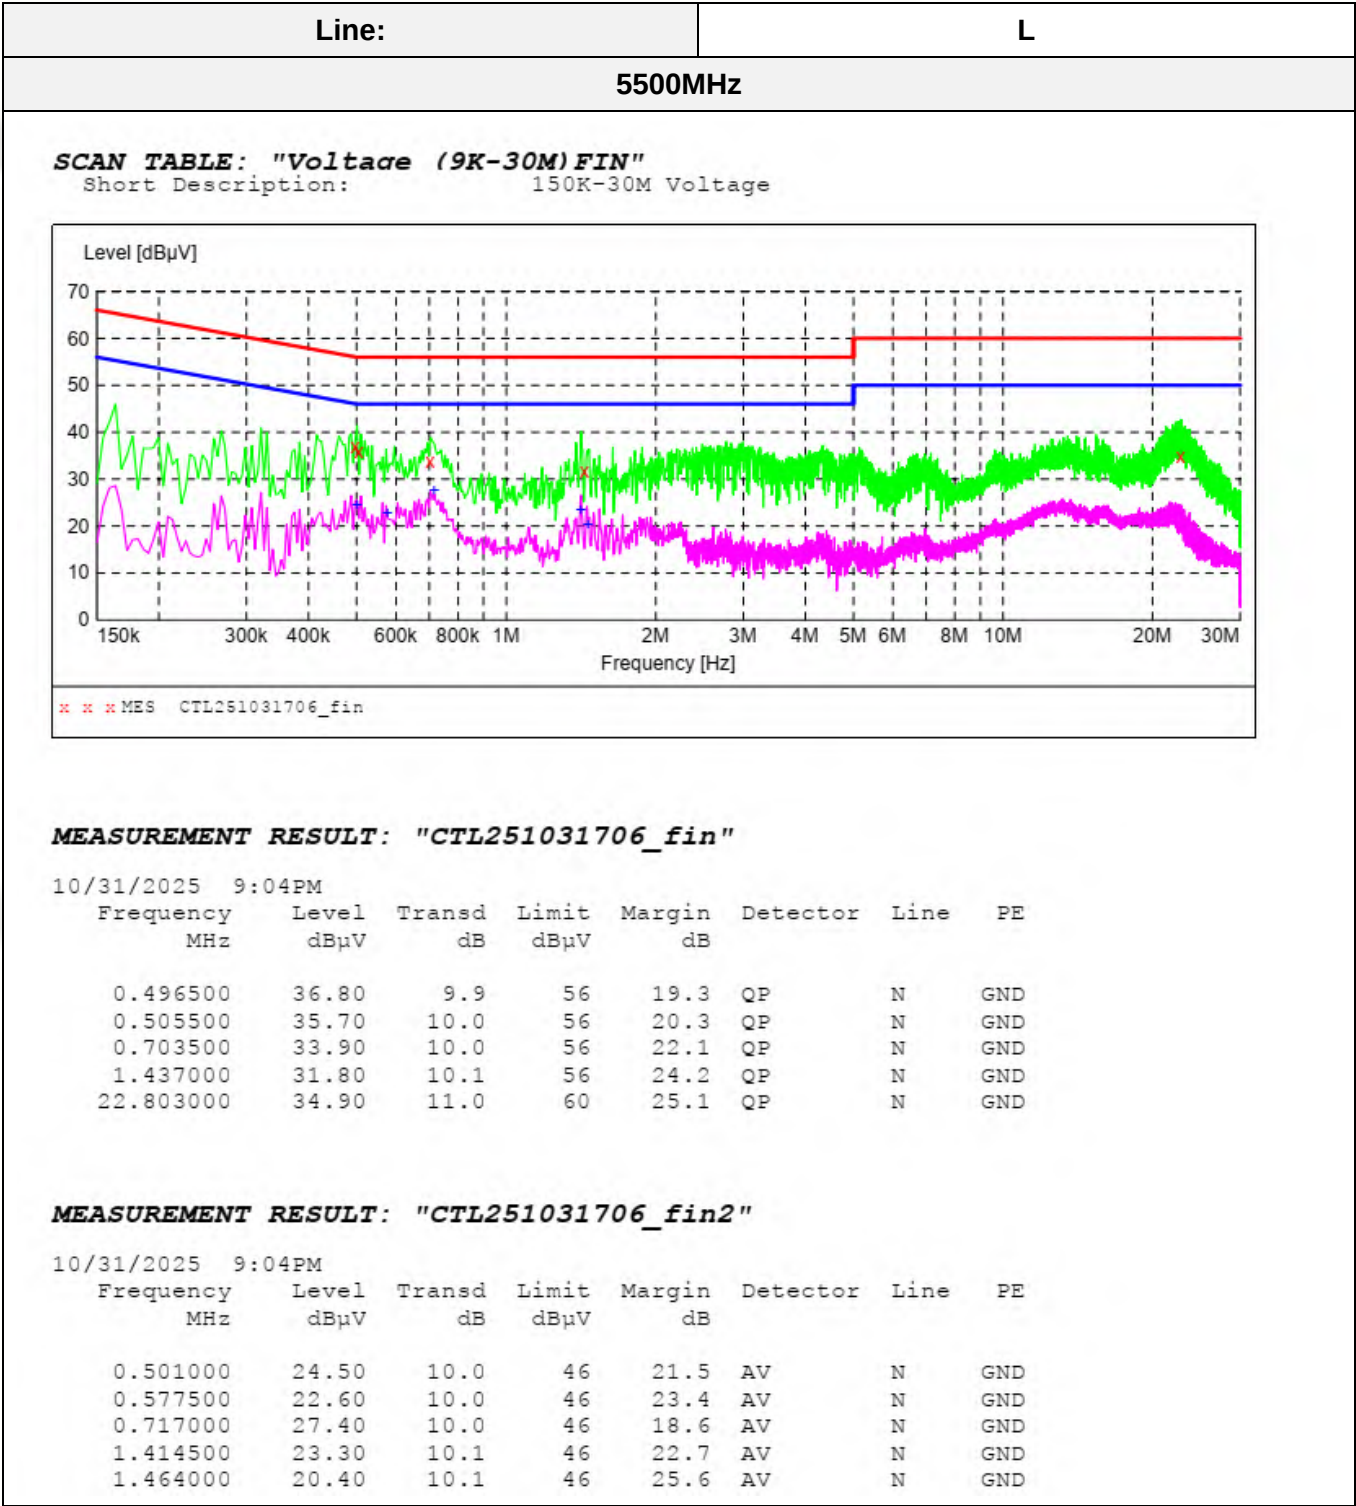

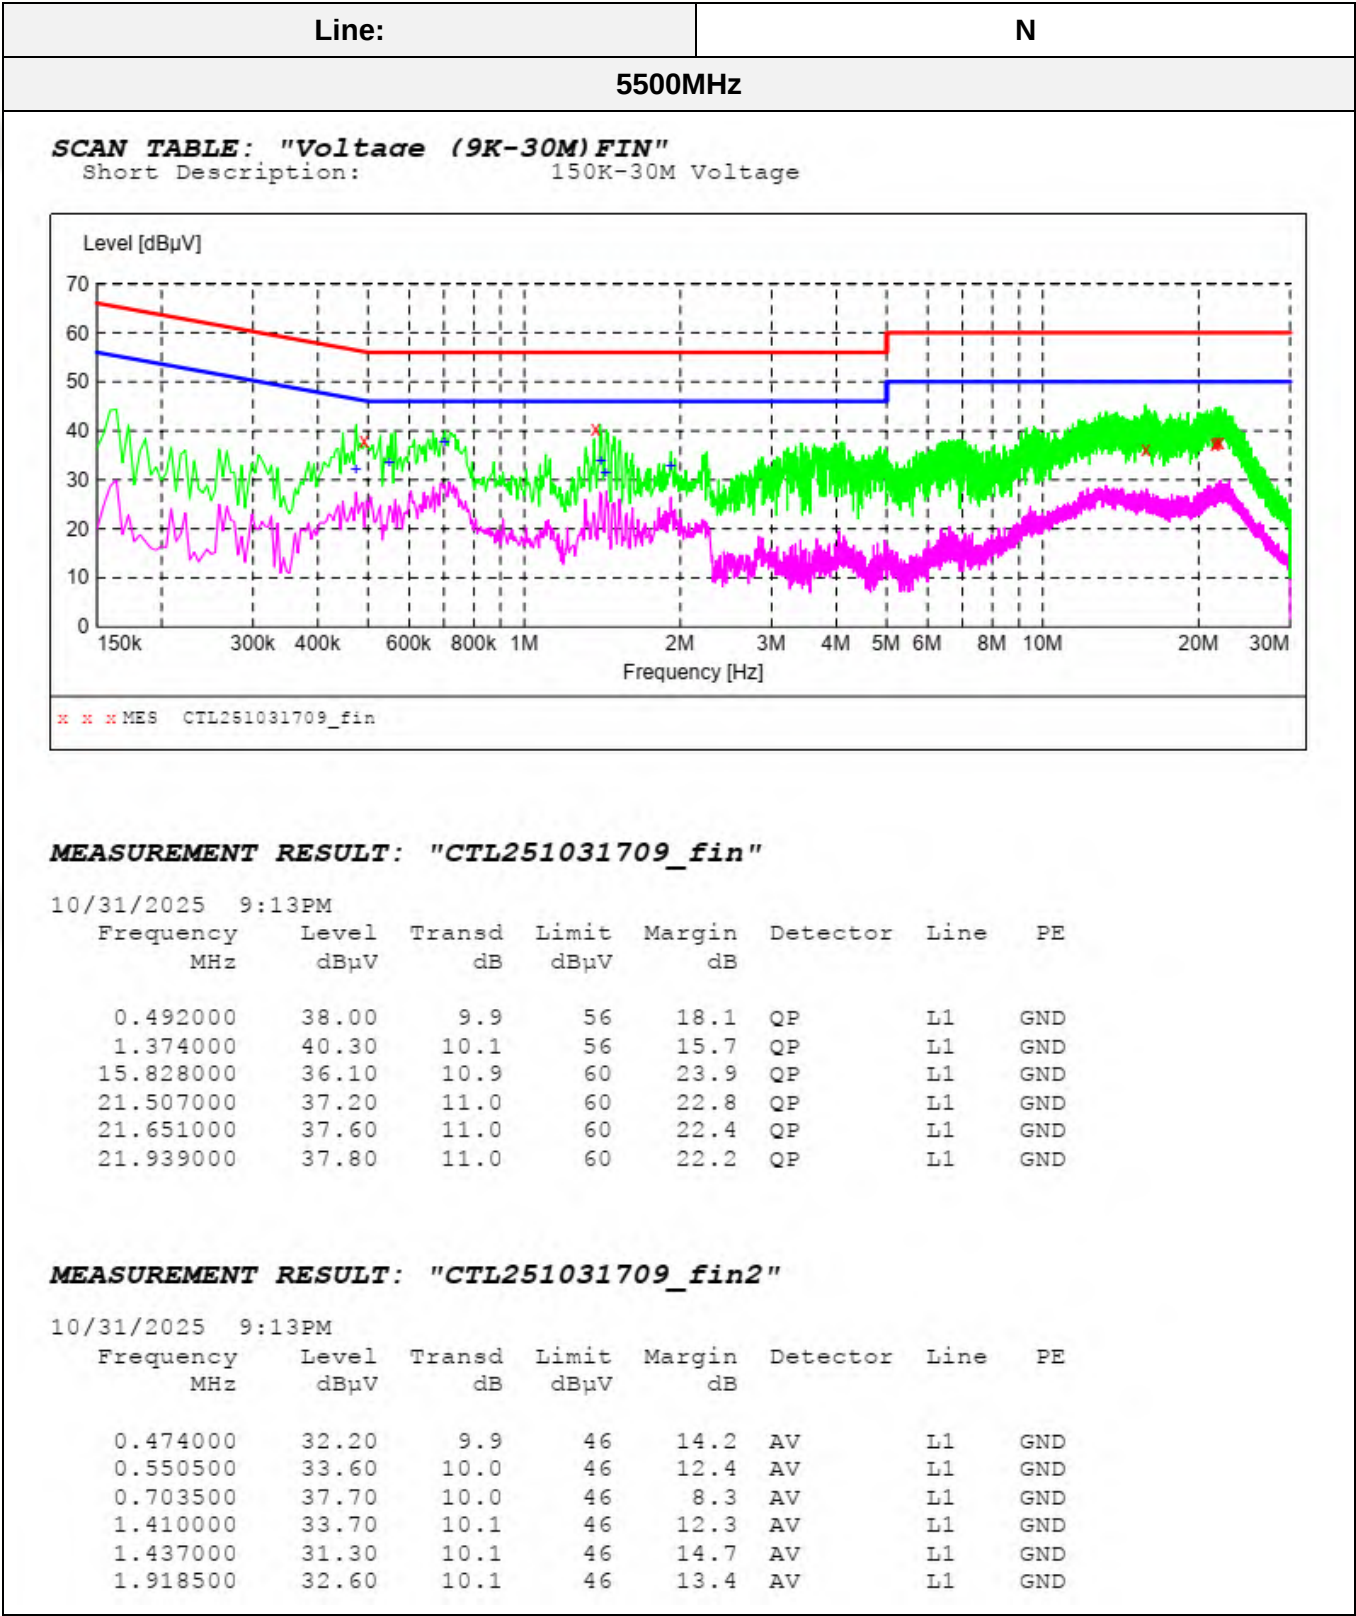

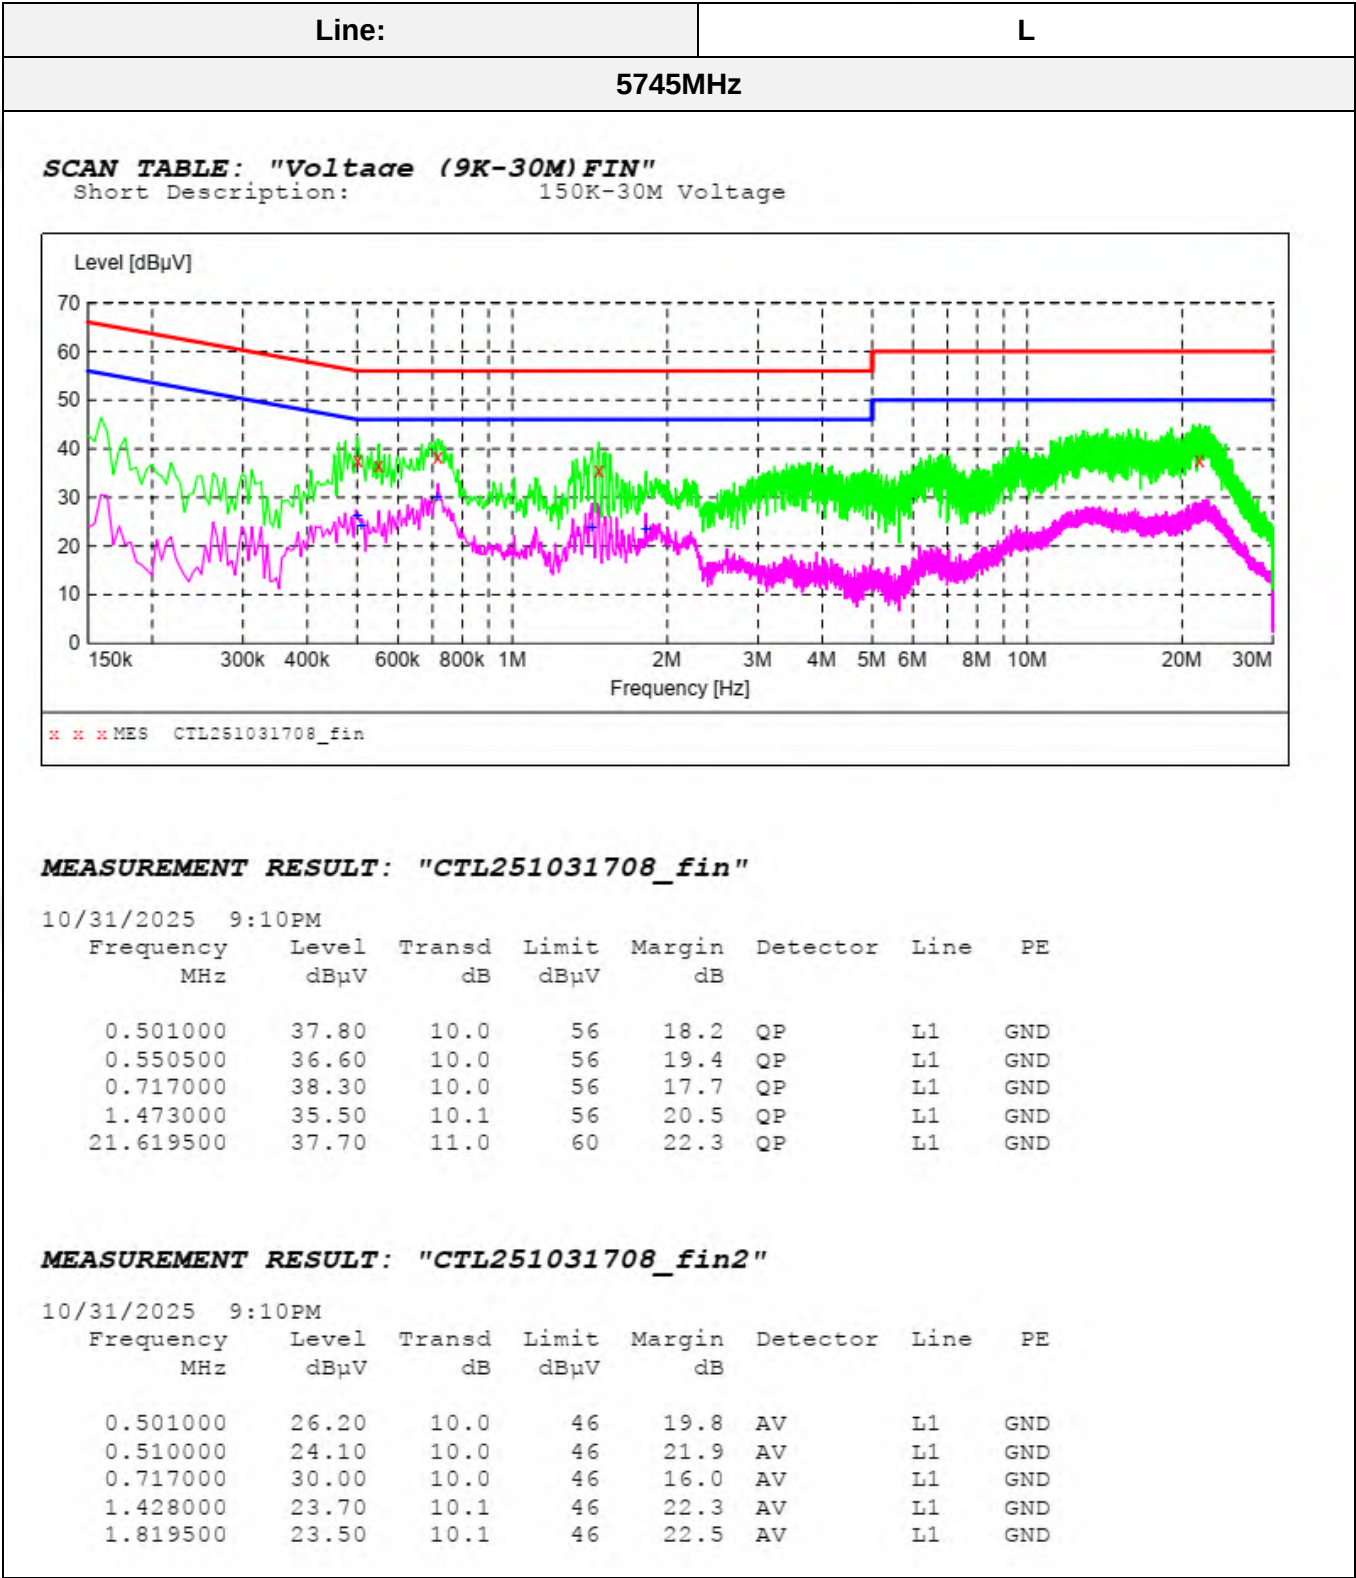

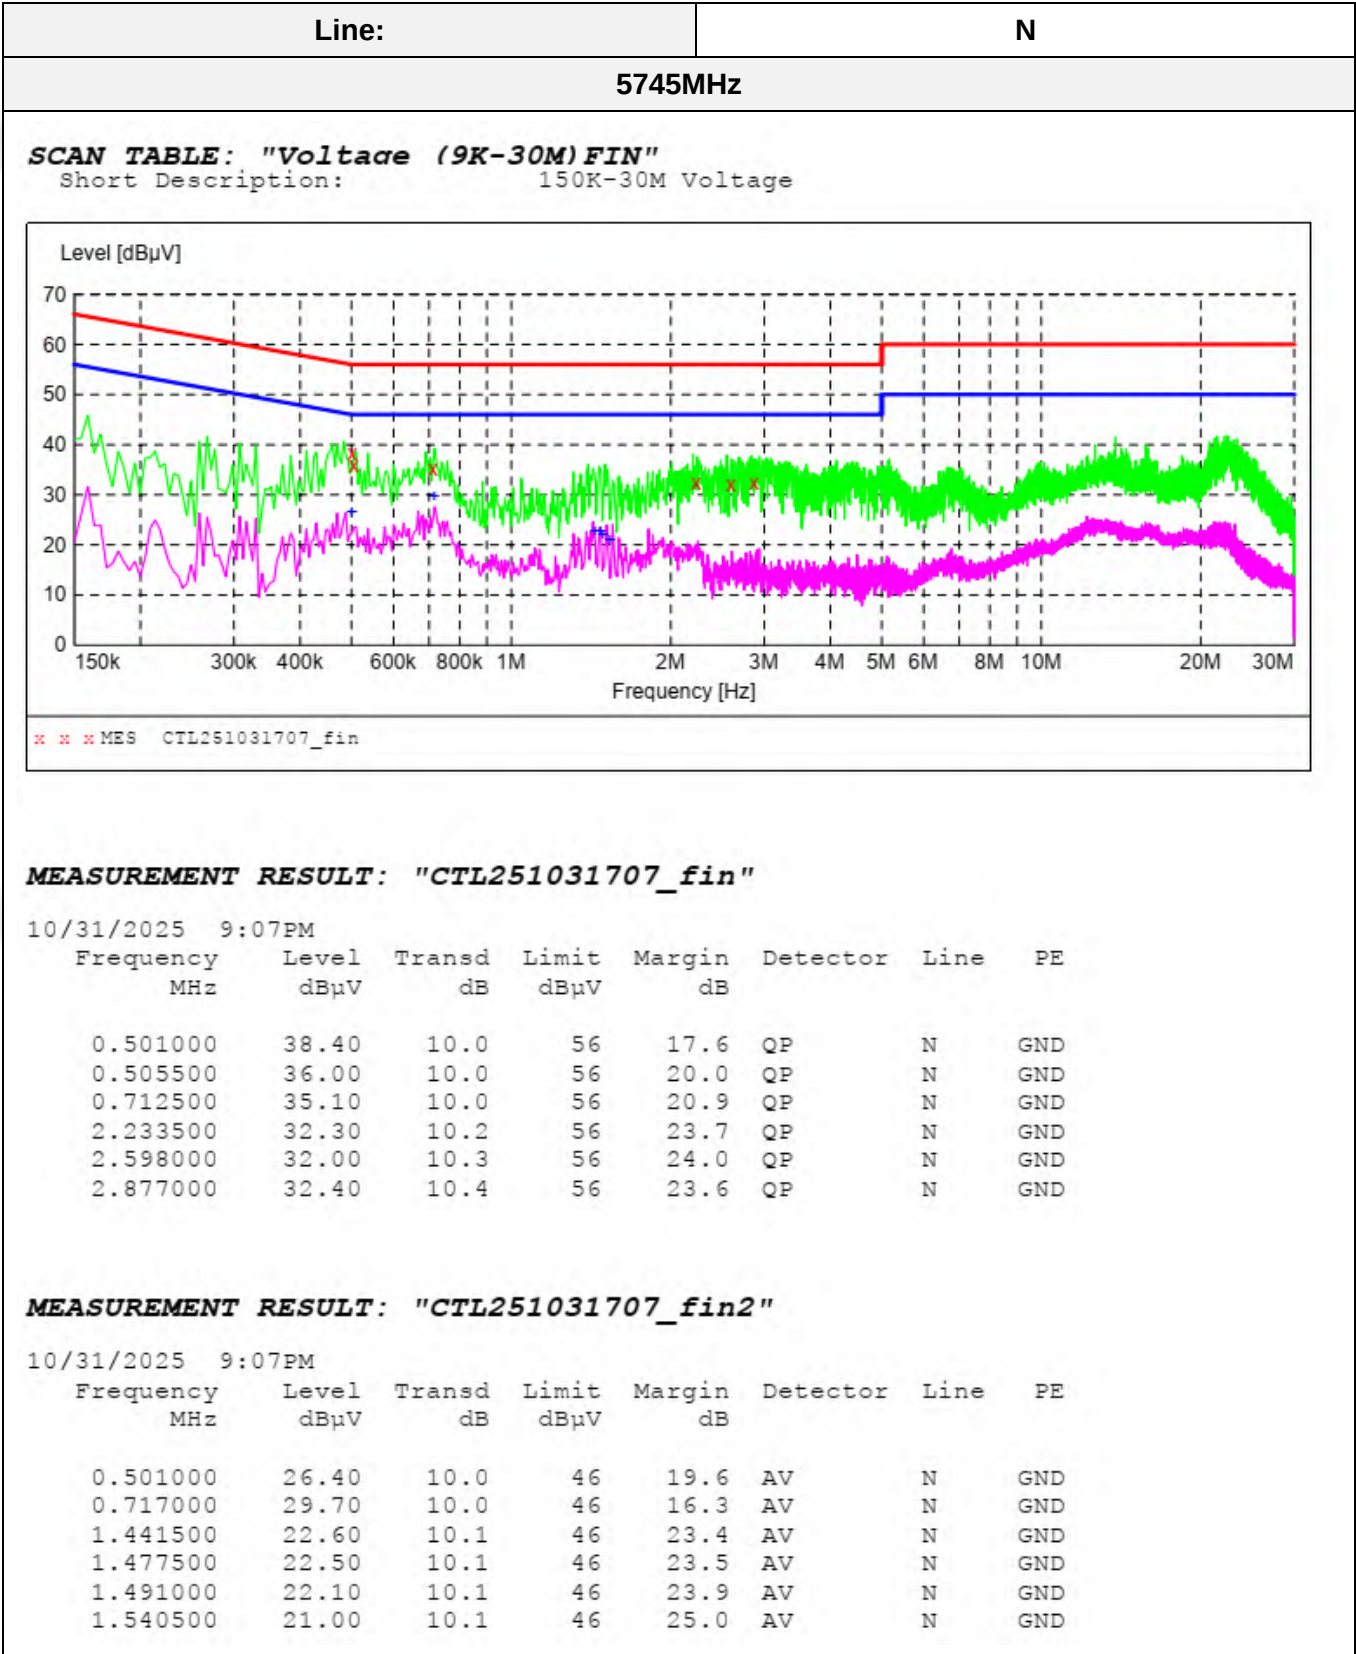

3.2. Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) Note1
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209


(6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

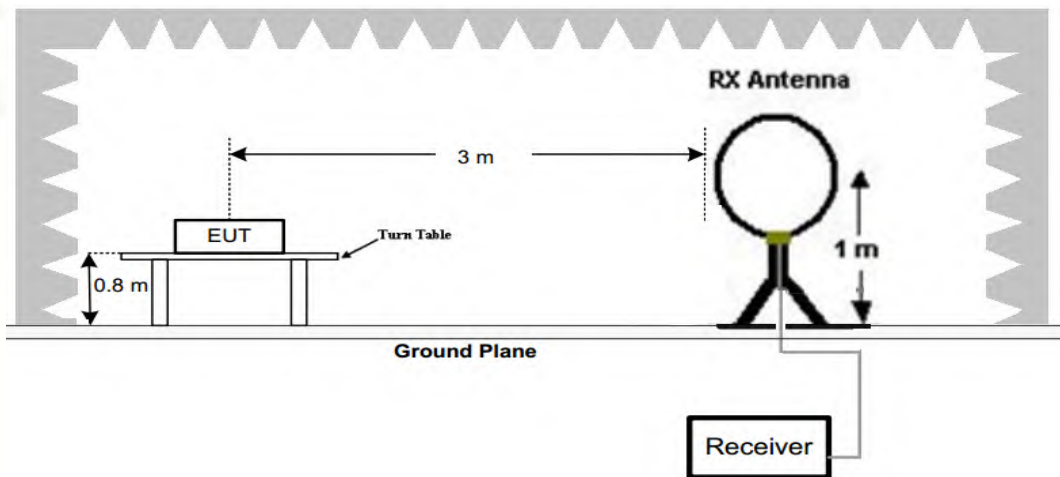

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

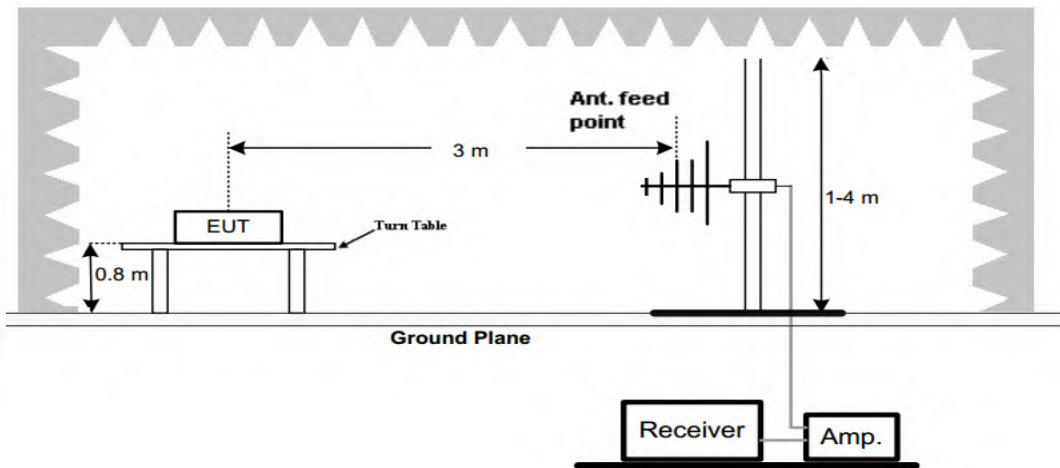

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

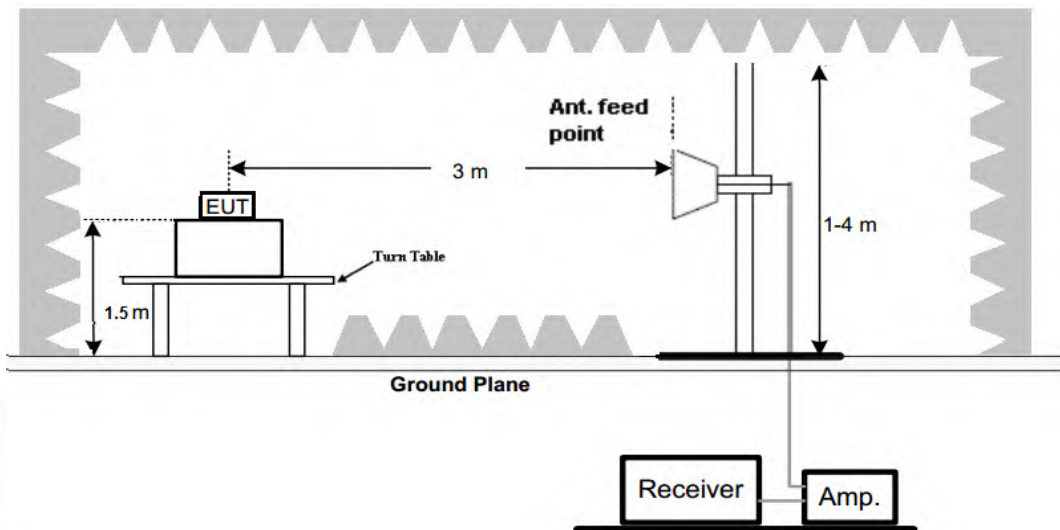

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-40GHz	Horn Antennna	1

- Setting test receiver/spectrum as following table states:


Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:

- All 802.11a / 802.11n (20MHz)/ 802.11n (40MHz) / 802.11ac (20MHz)/ 802.11ac (40MHz) / 802.11ac (80MHz)/ 802.11ax(20MHz)/ 802.11ax (40MHz)/ 802.11ax (80MHz) modes have been tested for below 1GHz test, only the worst case 802.11n (HT20) low channel of U-NII 1 band was recorded.
- All 802.11a / 802.11n (20MHz)/ 802.11n (40MHz) / 802.11ac (20MHz)/ 802.11ac (40MHz) / 802.11ac (80MHz)/ 802.11ax(20MHz)/ 802.11ax (40MHz)/ 802.11ax (80MHz) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.
- All Wi-Fi operation modes have been tested, only the worst case of 802.11n(HT20) mode was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

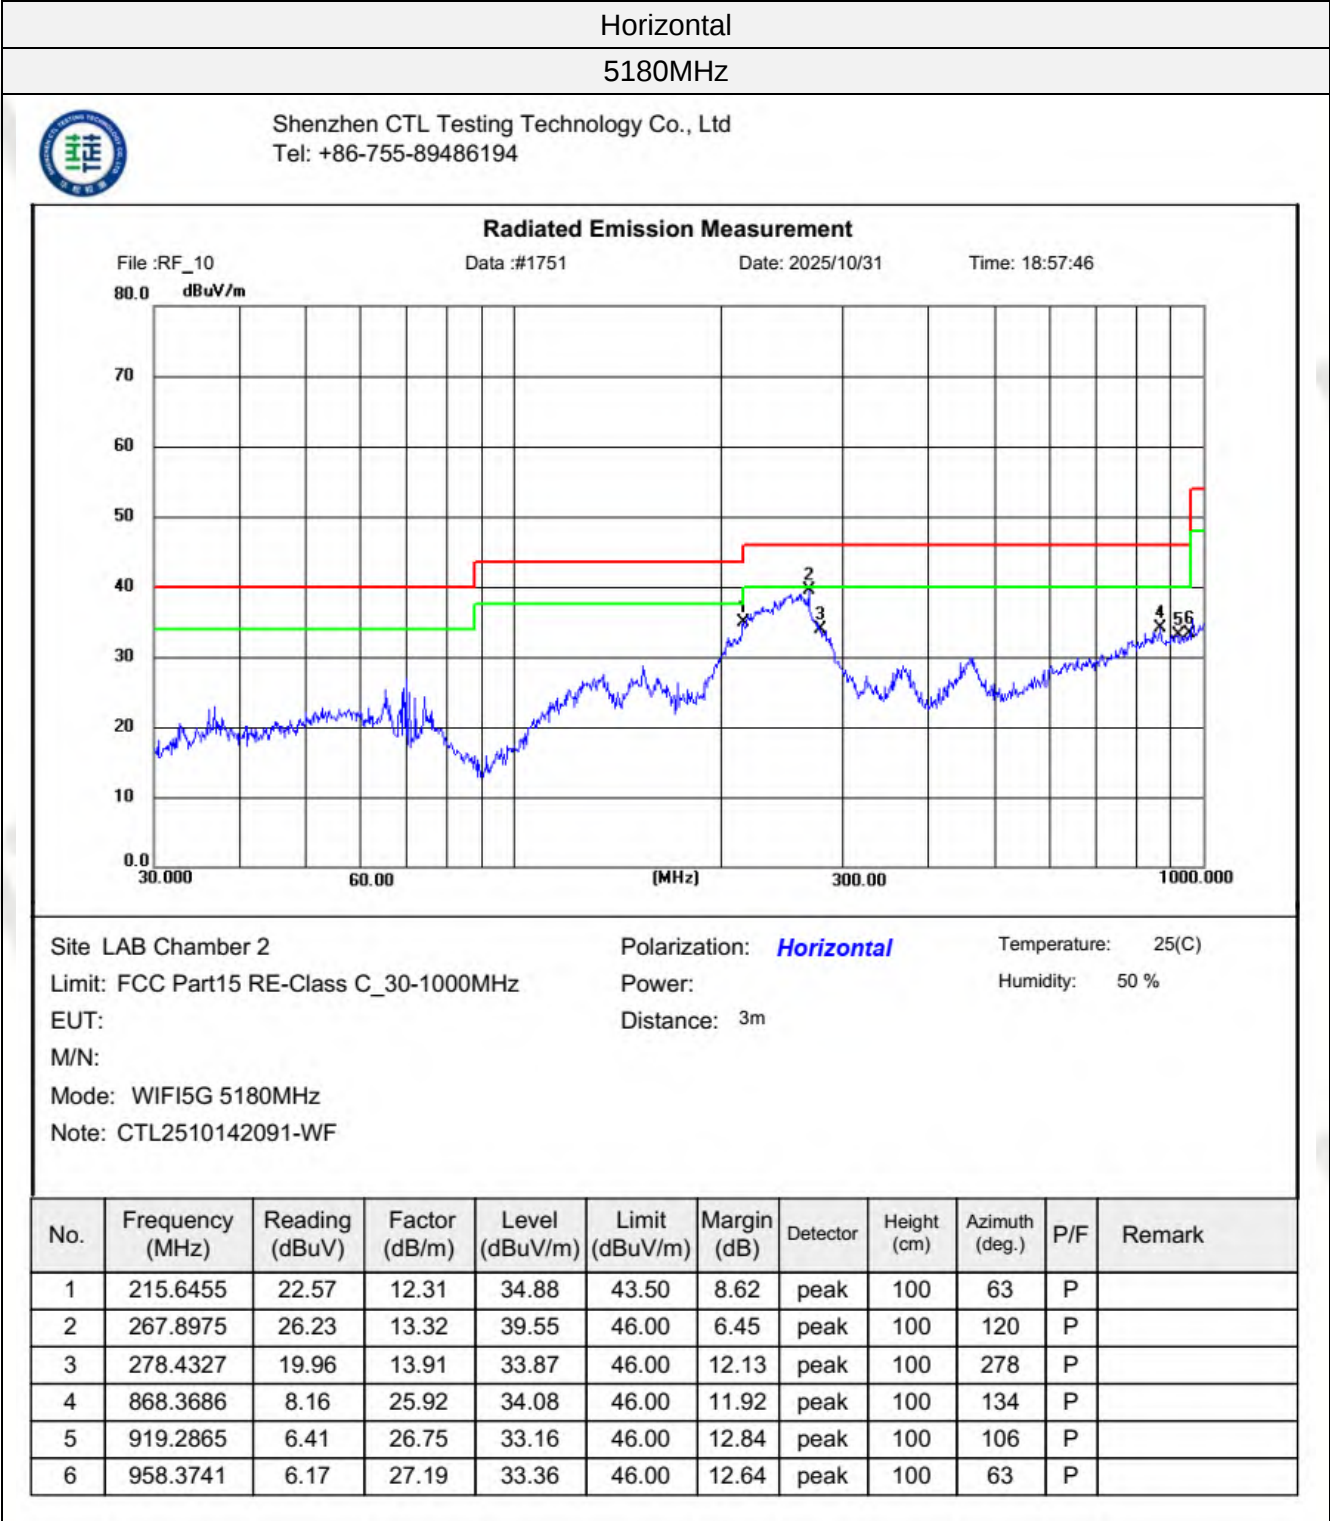

Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)
 Margin= Limit(dBuV/m)- Level(dBuV/m)

Vertical

5180MHz



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

File :RF_10

Data :#1752

Date: 2025/10/31

Time: 18:58:37

80.0 dBuV/m



Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_30-1000MHz

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:


Mode: WIFI5G 5180MHz

Note: CTL2510142091-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	51.6616	19.84	14.31	34.15	40.00	5.85	peak	100	168	P	
2	65.2859	18.47	12.99	31.46	40.00	8.54	peak	100	68	P	
3	69.4785	20.26	11.83	32.09	40.00	7.91	peak	100	10	P	
4	130.8943	26.33	13.56	39.89	43.50	3.61	peak	100	360	P	
5	141.5157	21.26	13.73	34.99	43.50	8.51	peak	100	10	P	
6	206.3976	22.77	11.53	34.30	43.50	9.20	peak	100	10	P	


Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)

Margin= Limit(dBuV/m)- Level(dBuV/m)

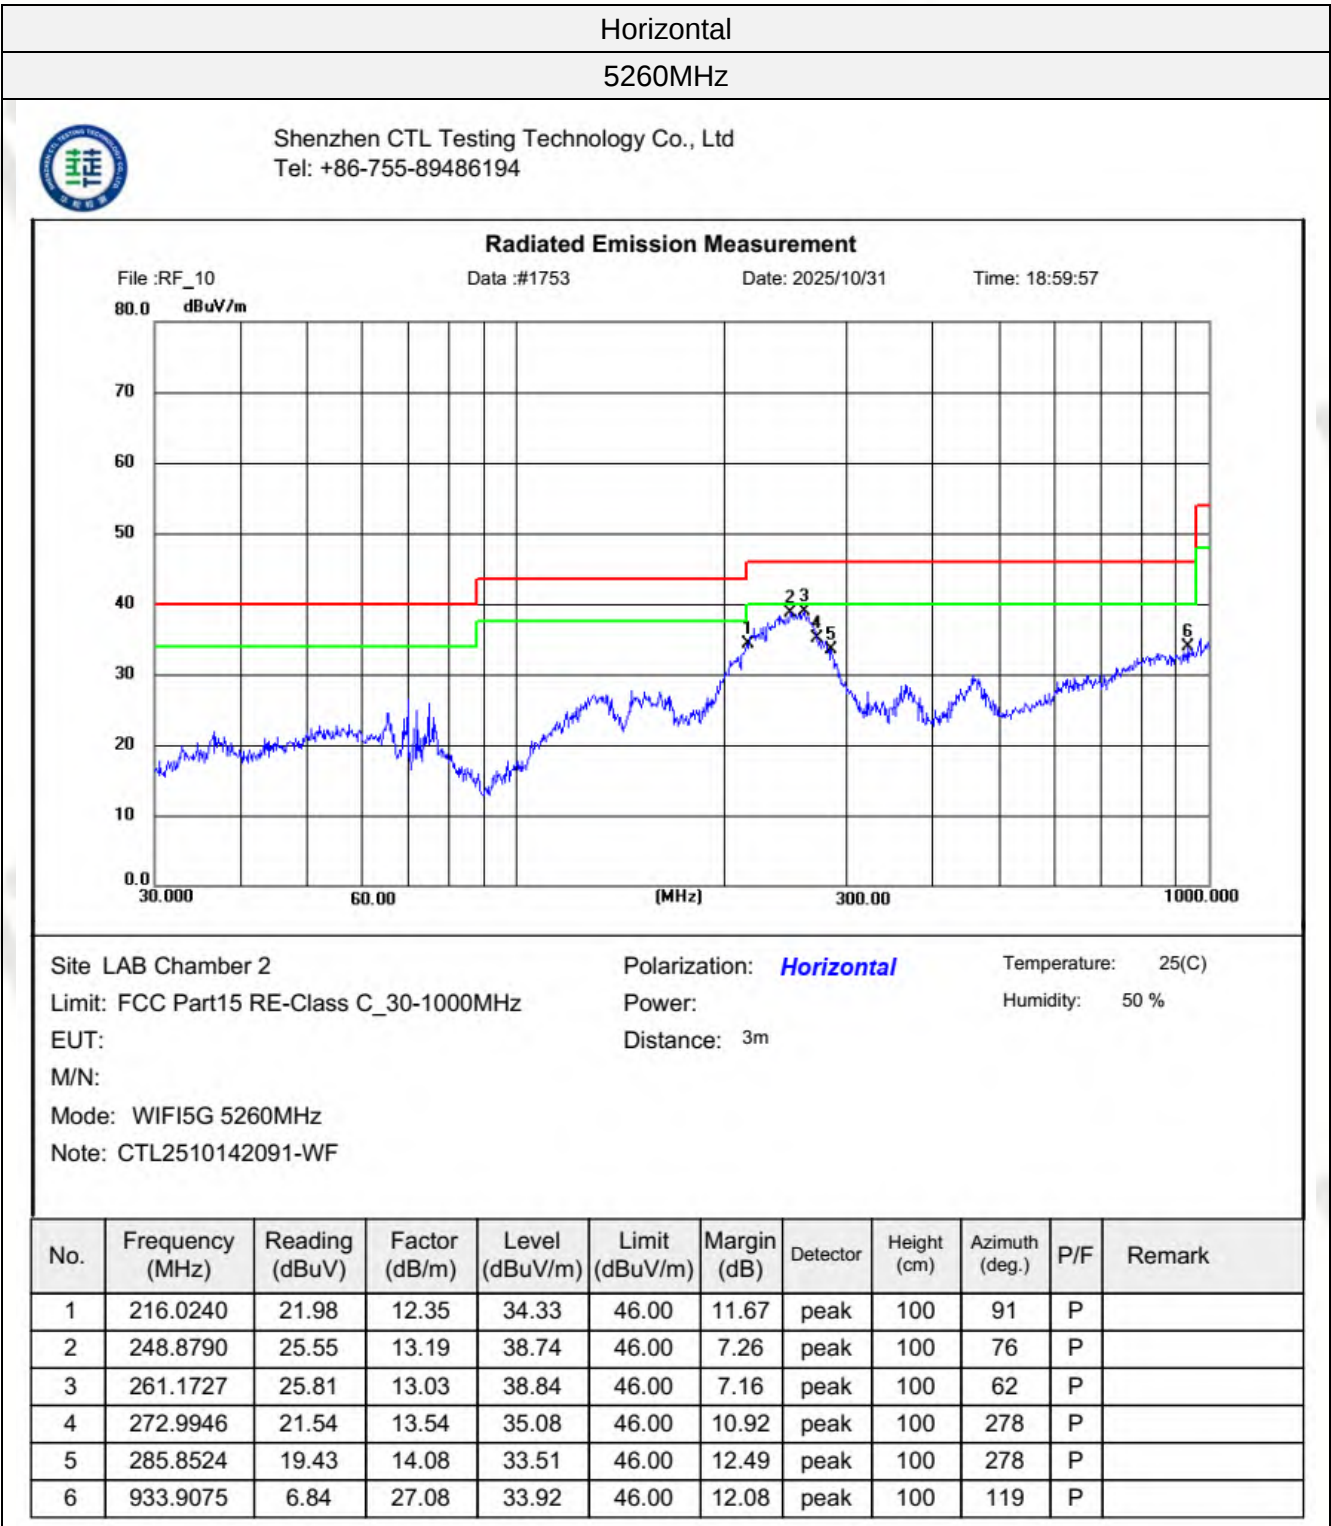


Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)

Margin= Limit(dBuV/m)- Level(dBuV/m)

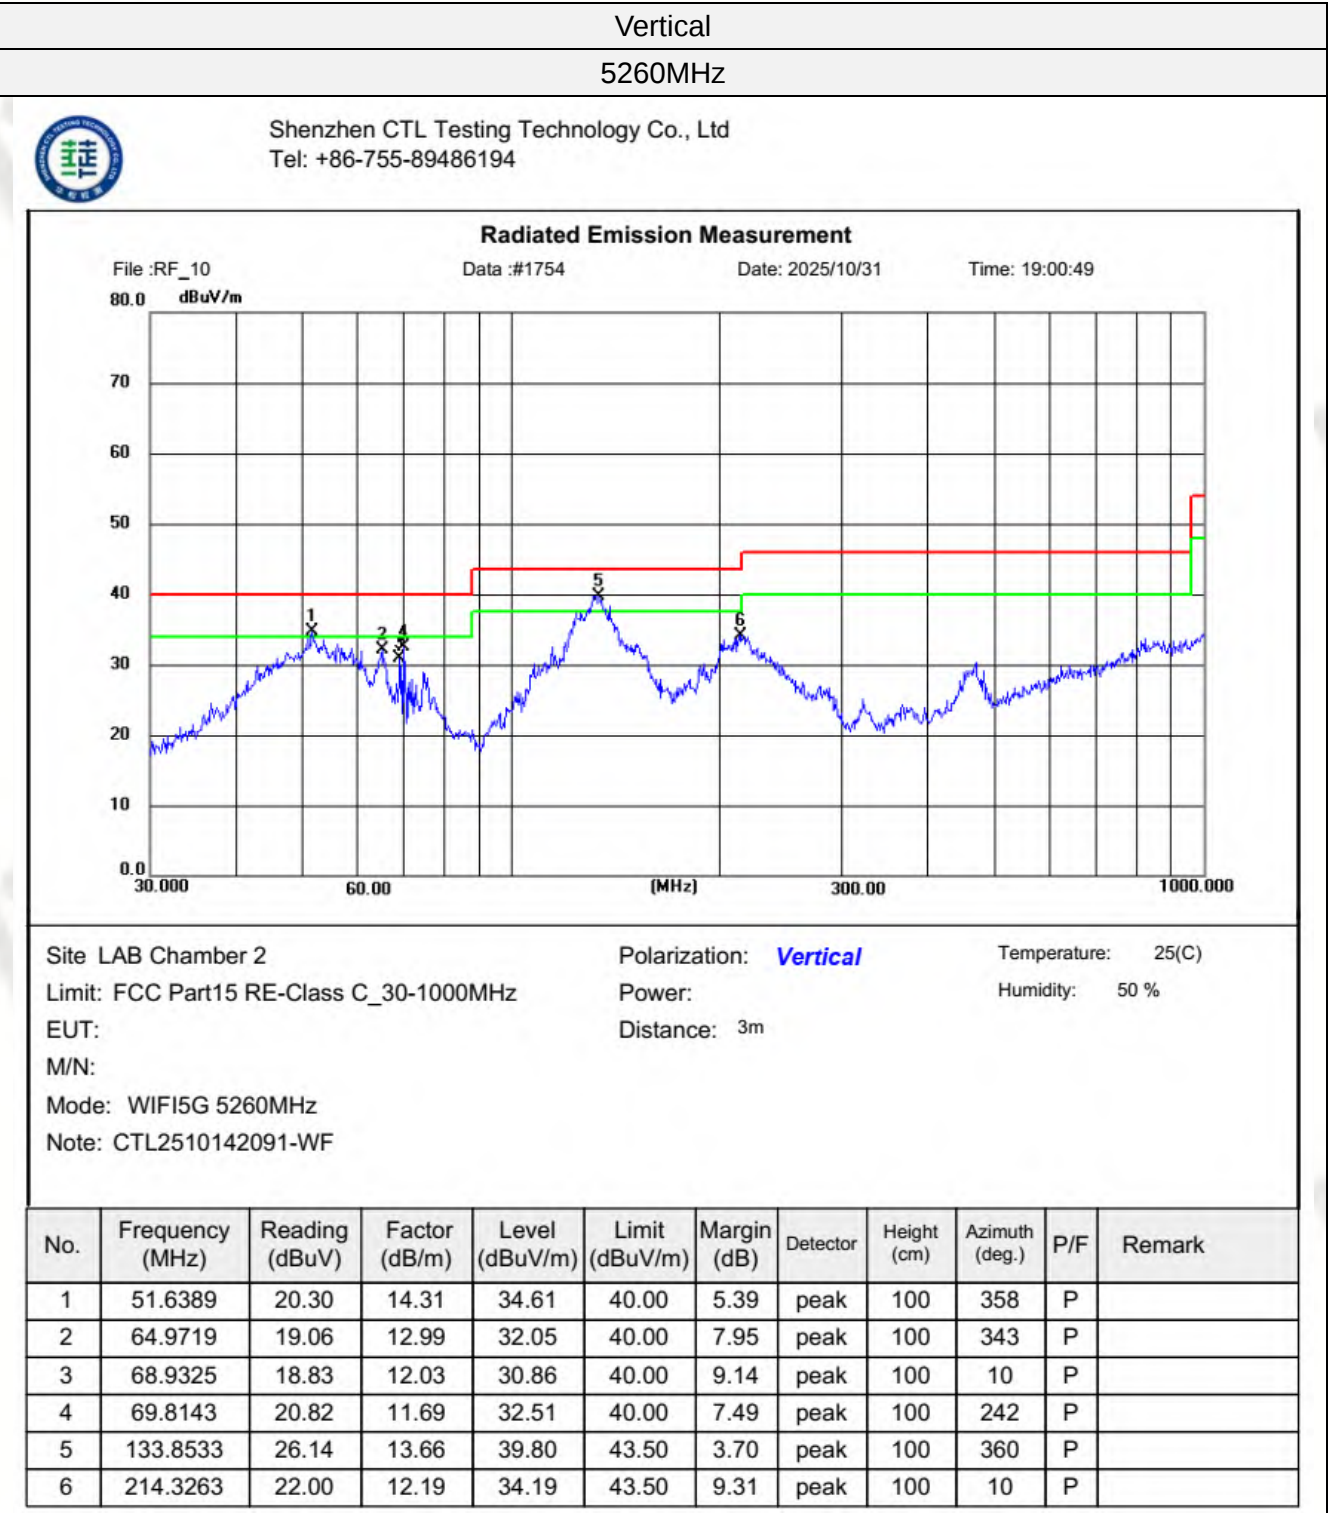


Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)
Margin= Limit(dBuV/m)- Level(dBuV/m)

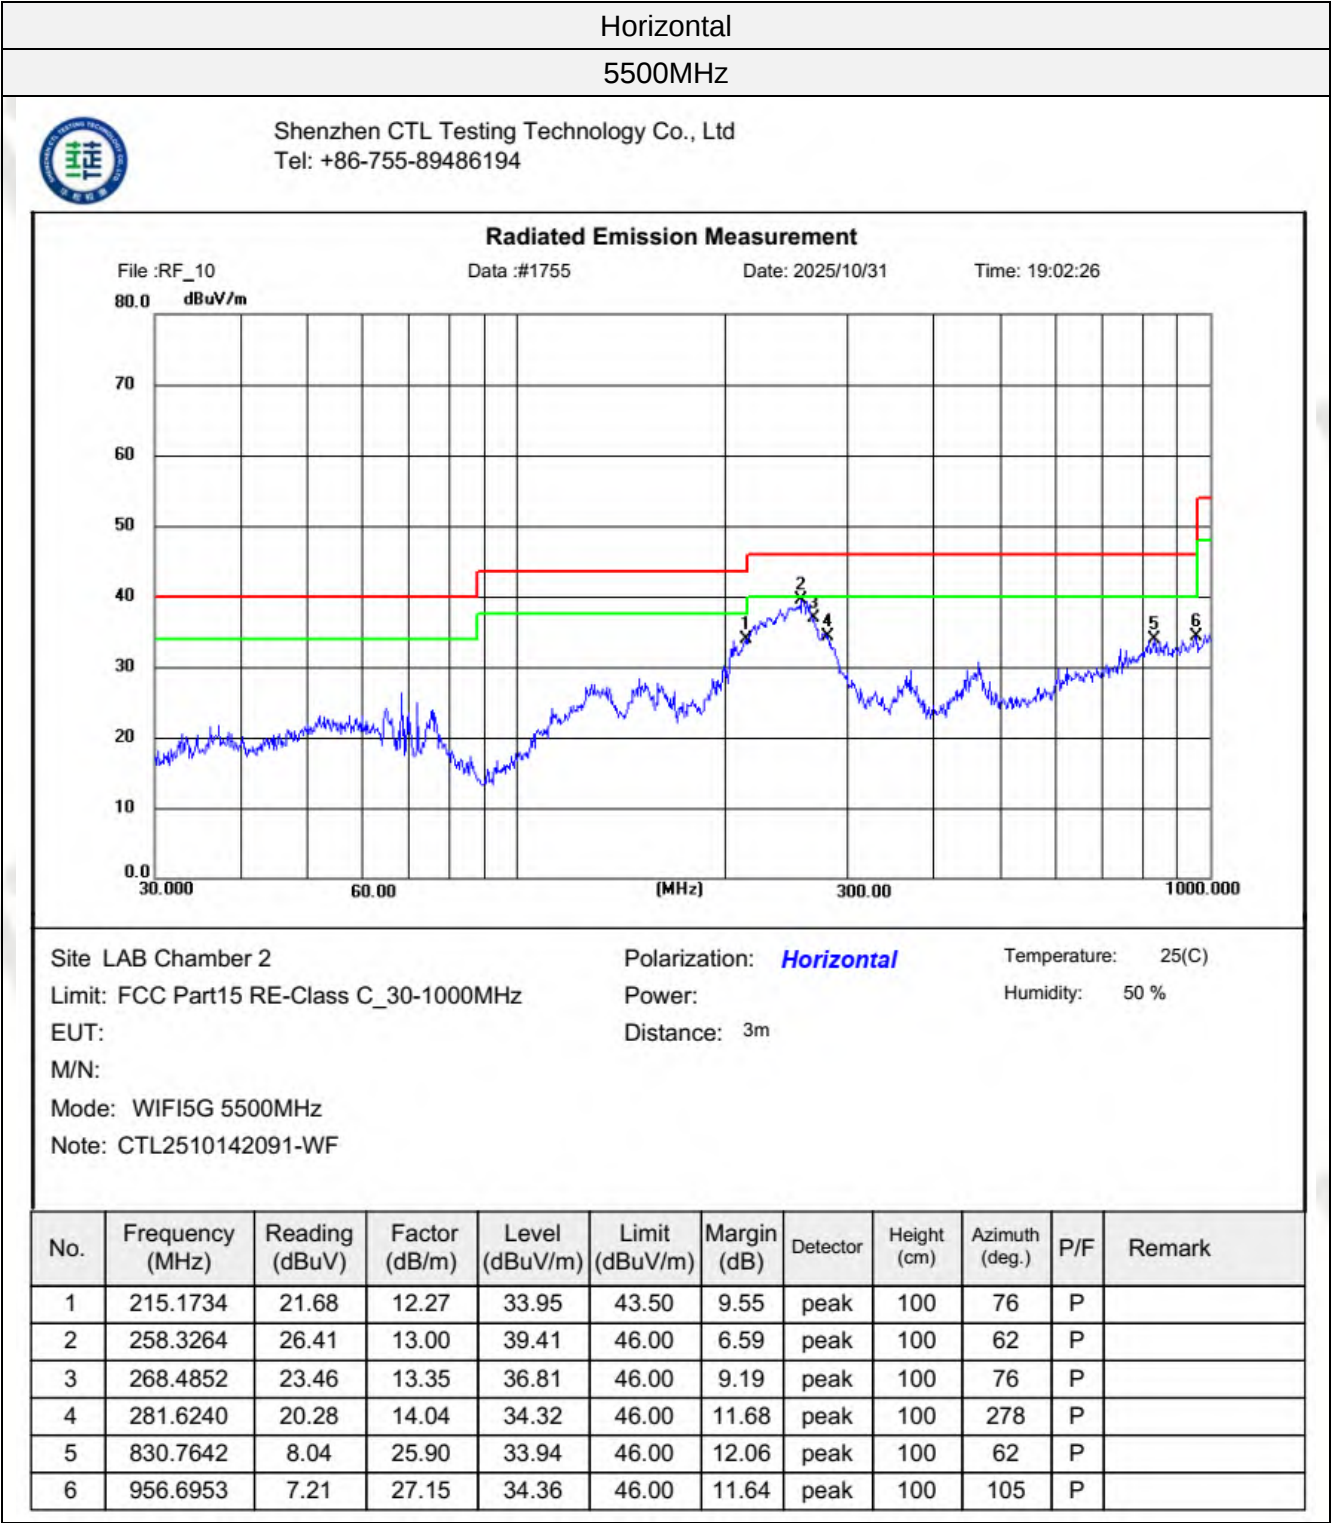


Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)

Margin= Limit(dBuV/m)- Level(dBuV/m)

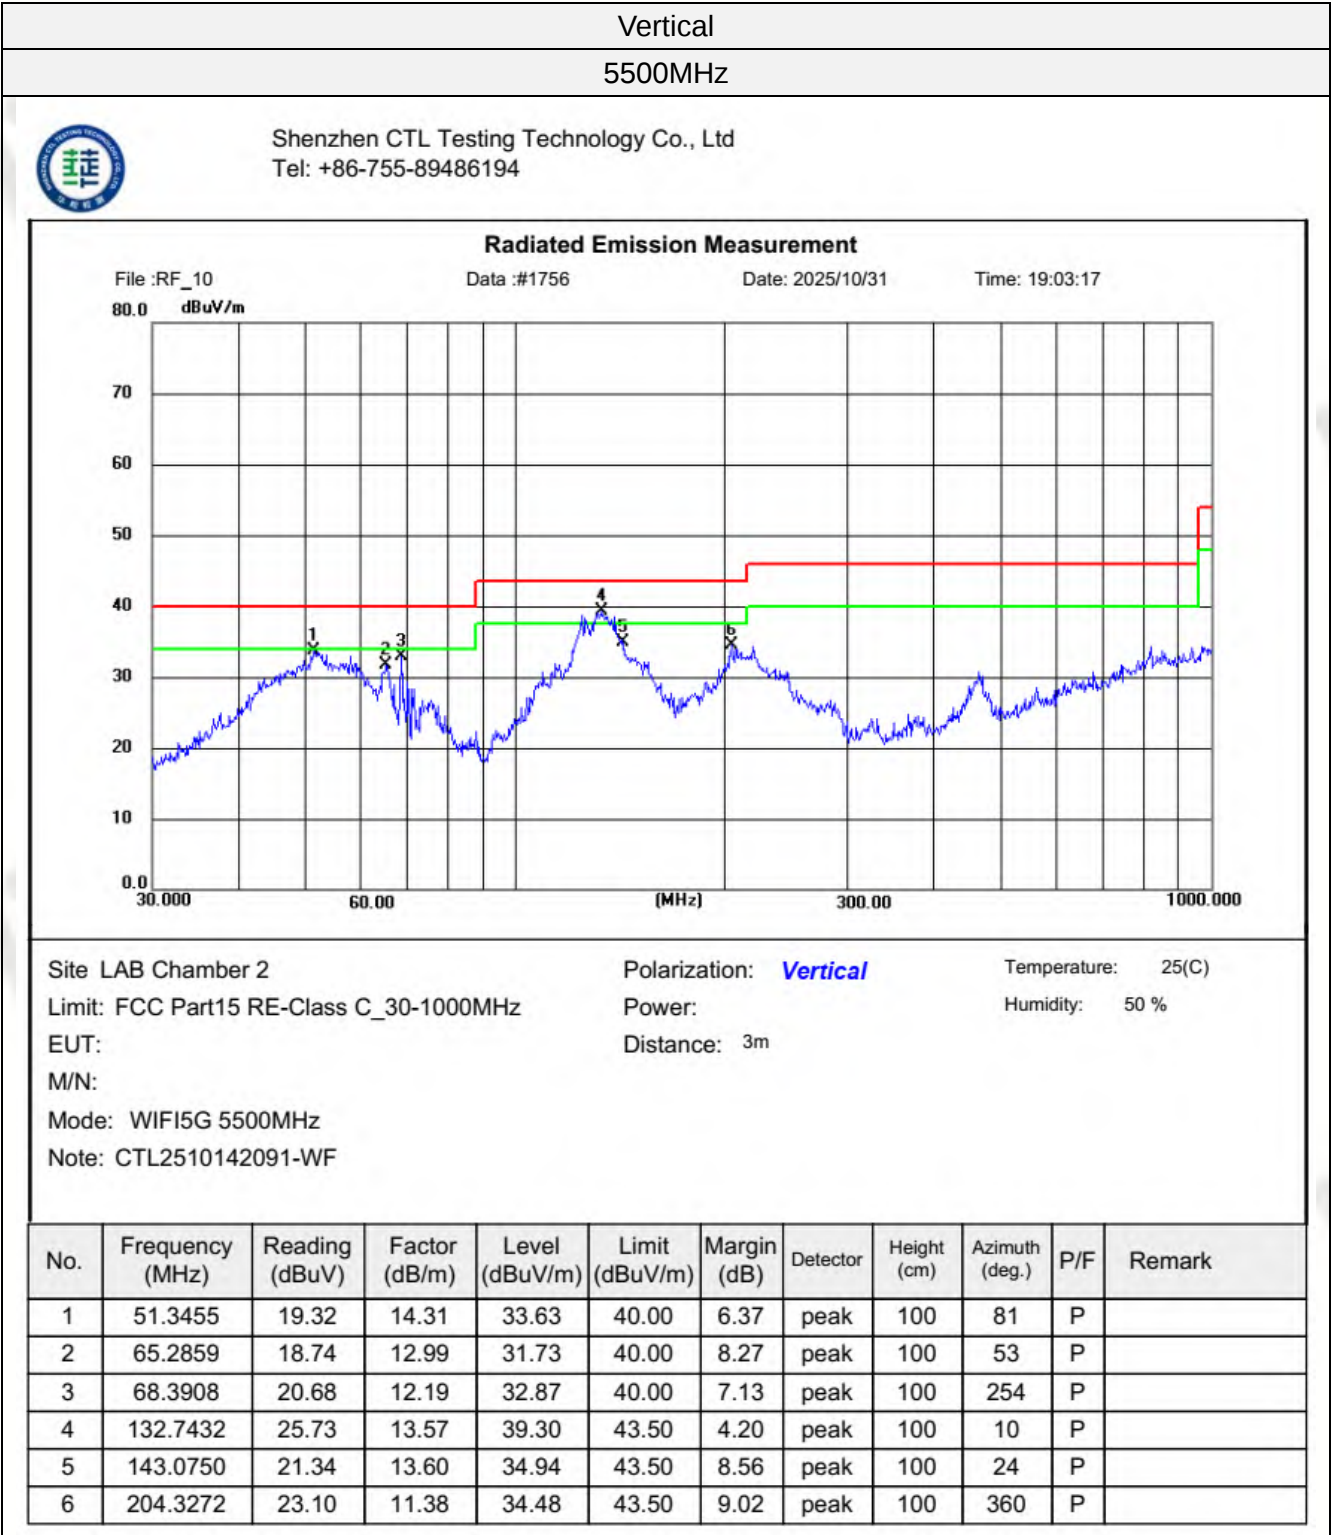


Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)
Margin= Limit(dBuV/m)- Level(dBuV/m)

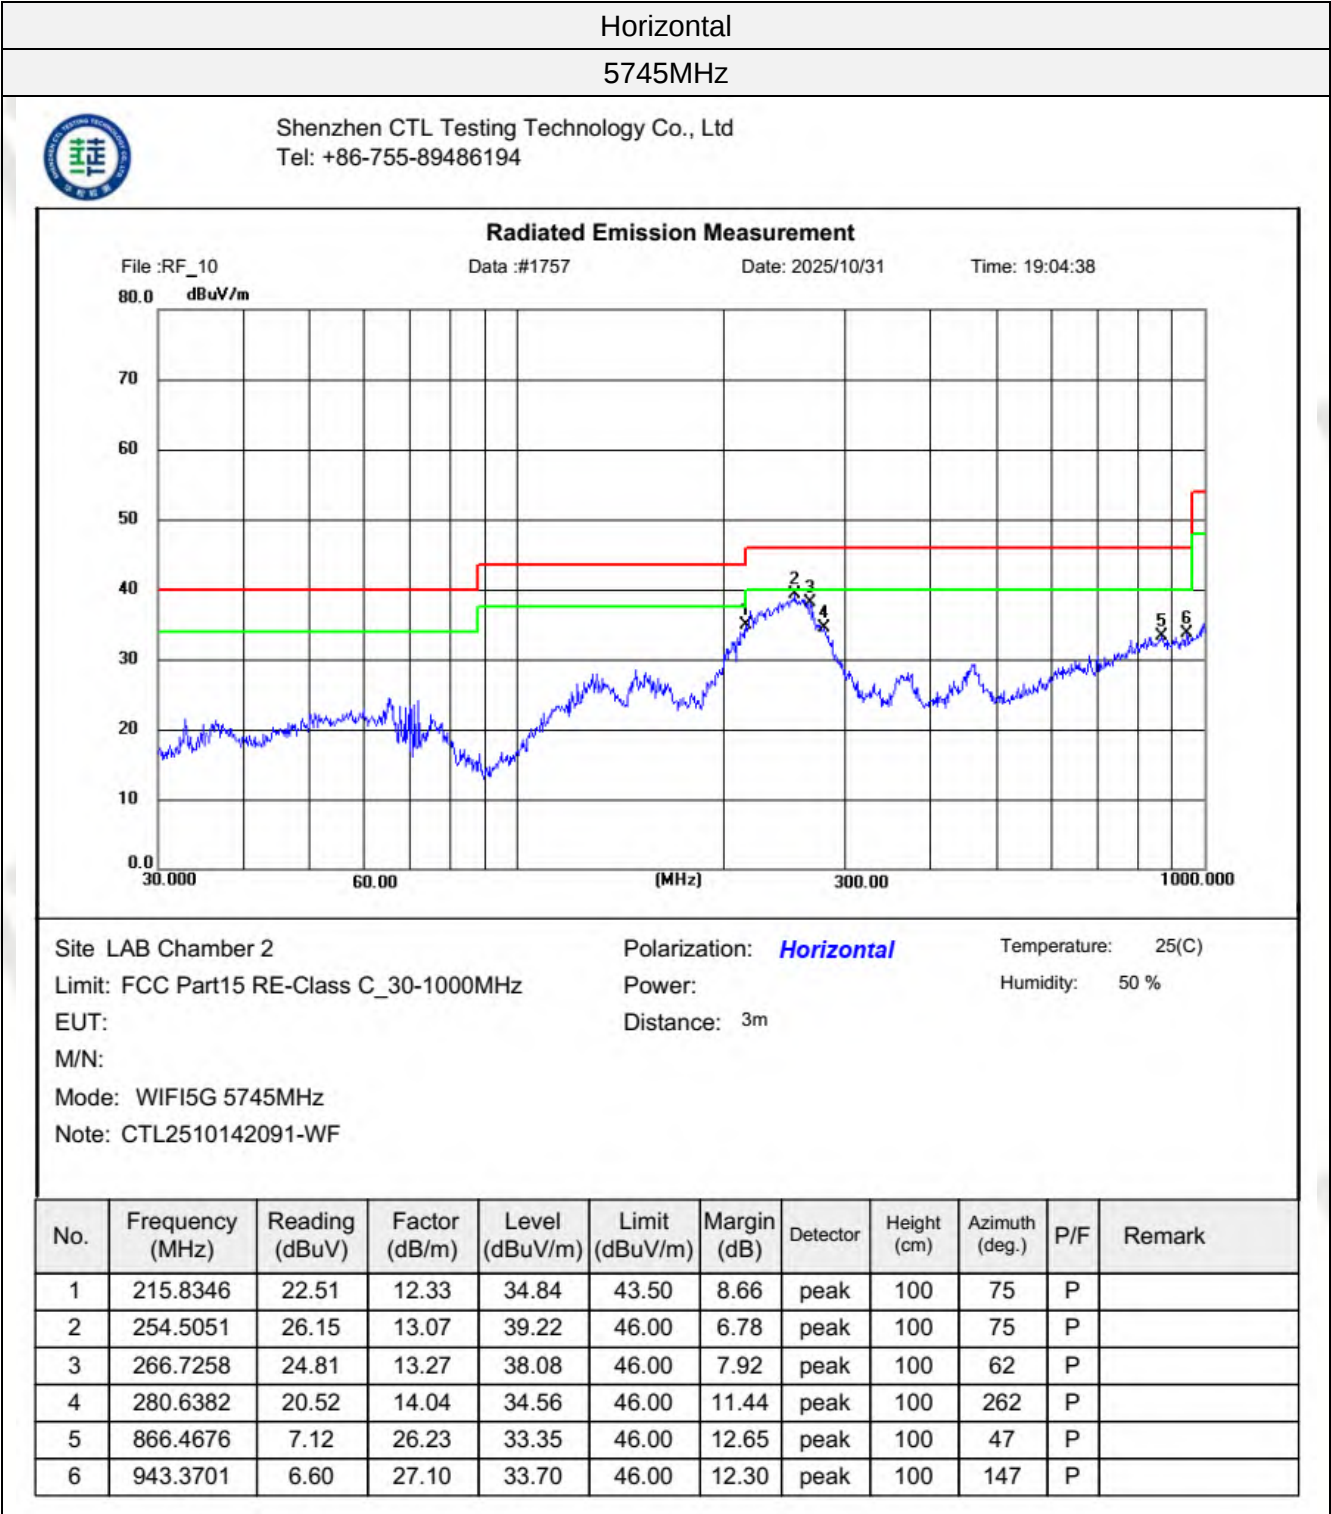

Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)


Margin= Limit(dBuV/m)- Level(dBuV/m)

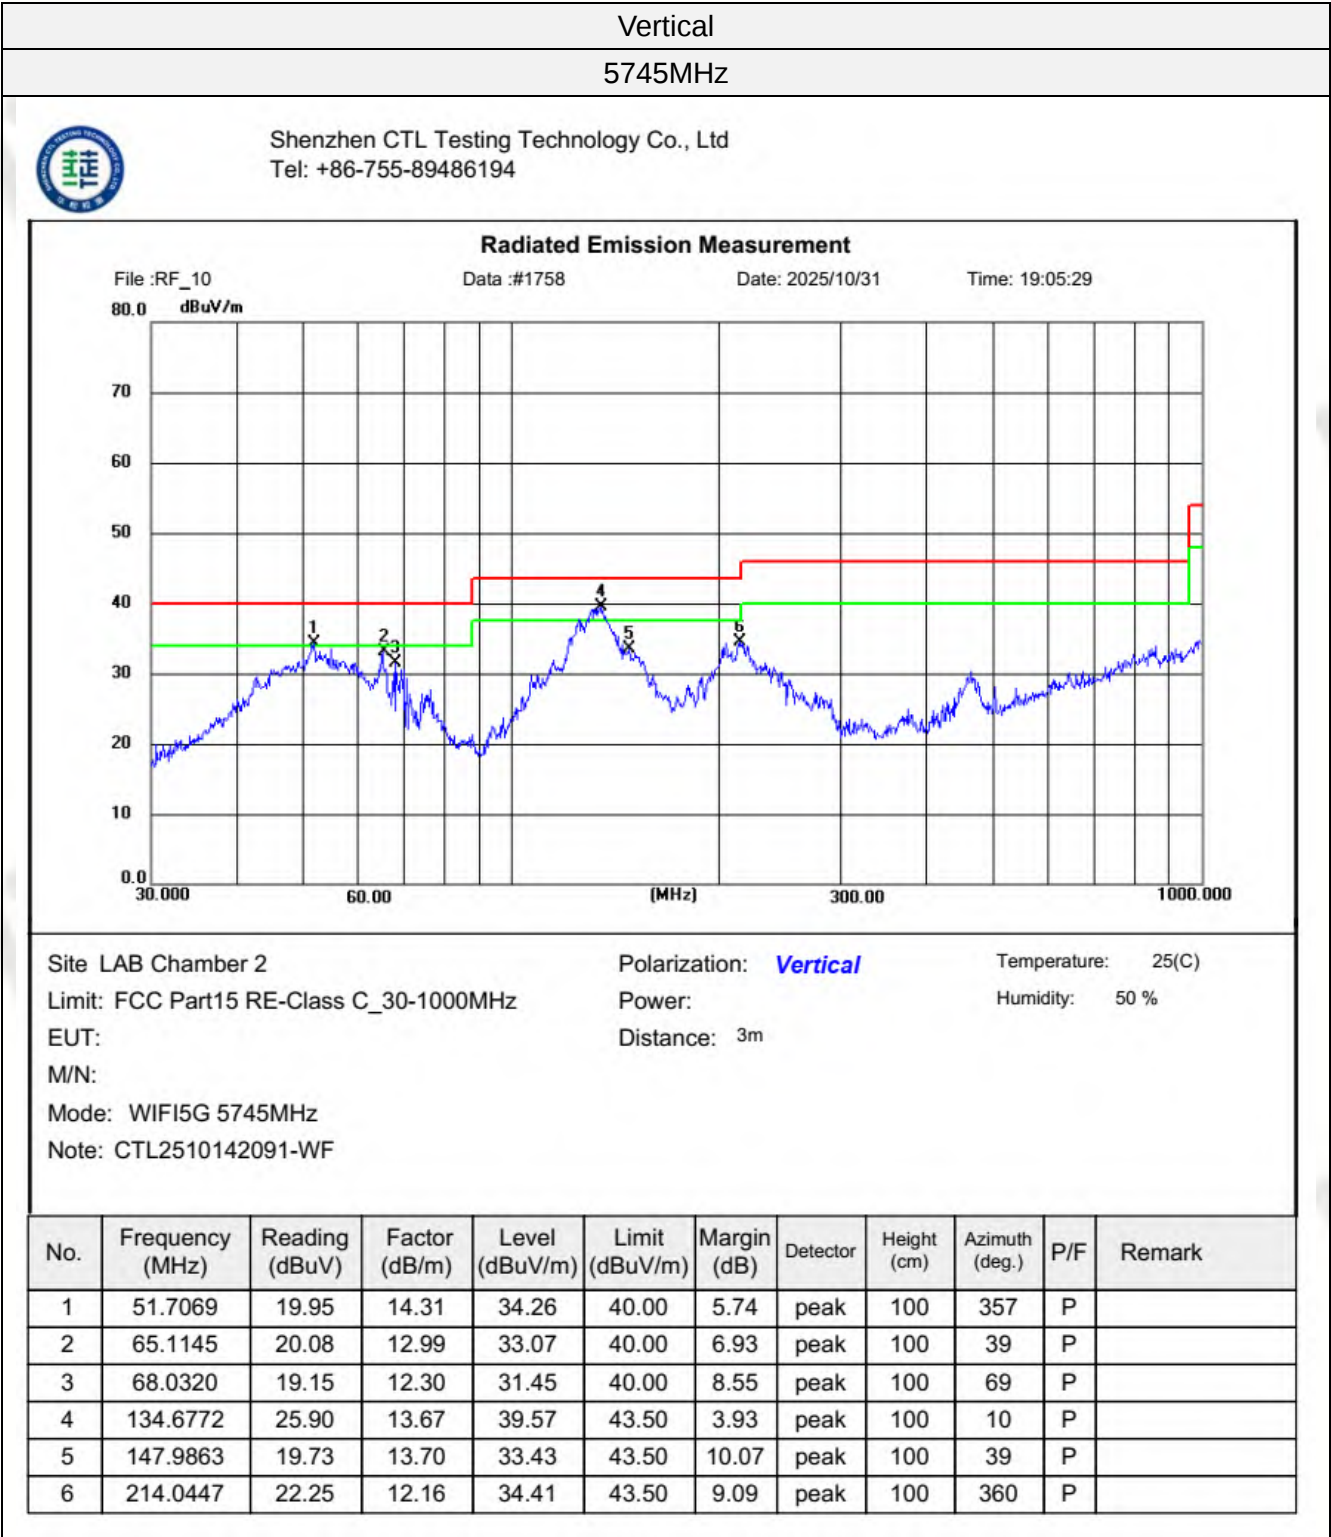



Remark: $\text{Level(dBuV/m)} = \text{Reading(dBuV)} + \text{Factor(dB/m)}$
 $\text{Margin} = \text{Limit(dBuV/m)} - \text{Level(dBuV/m)}$


For 1GHz to 40GHz


Note: 1. All 802.11a / 802.11n (20MHz)/ 802.11n (40MHz) / 802.11ac (20MHz)/ 802.11ac (40MHz) / 802.11ac (80MHz)/ 802.11ax(20MHz)/ 802.11ax (40MHz)/ 802.11ax (80MHz) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.

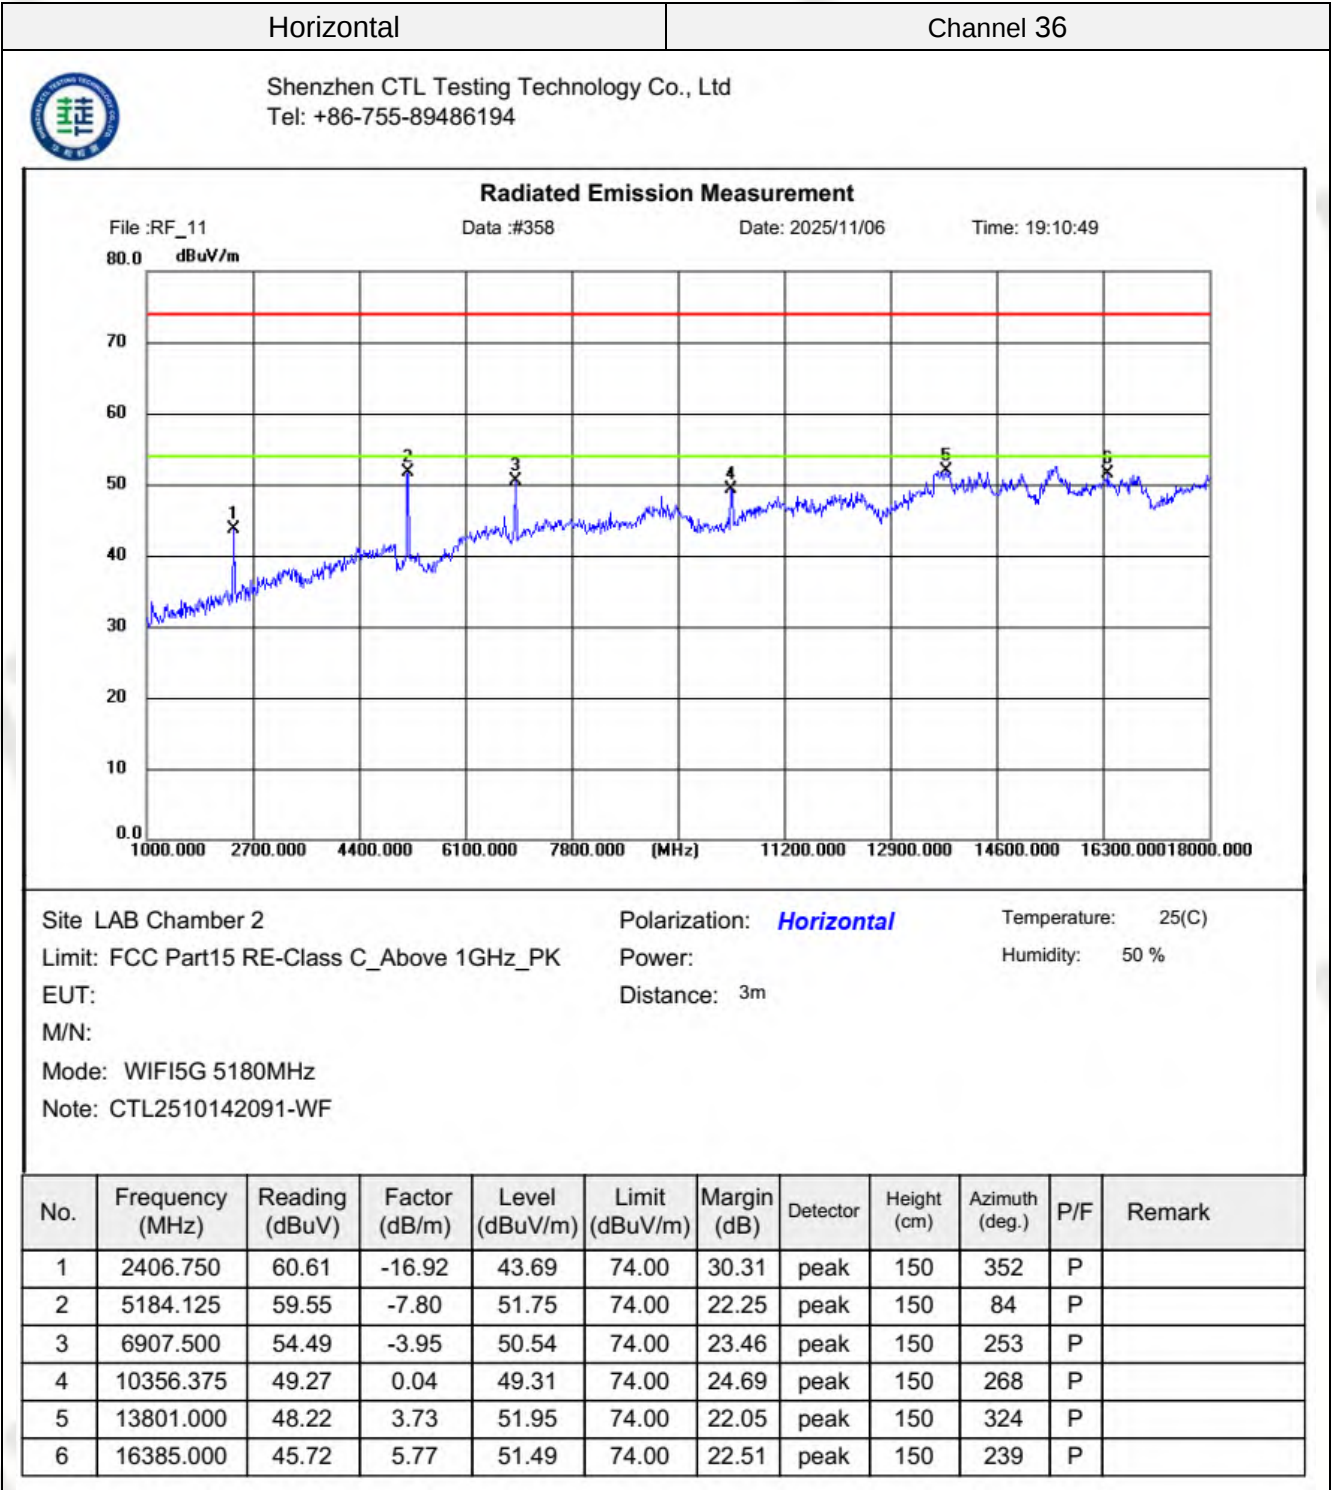

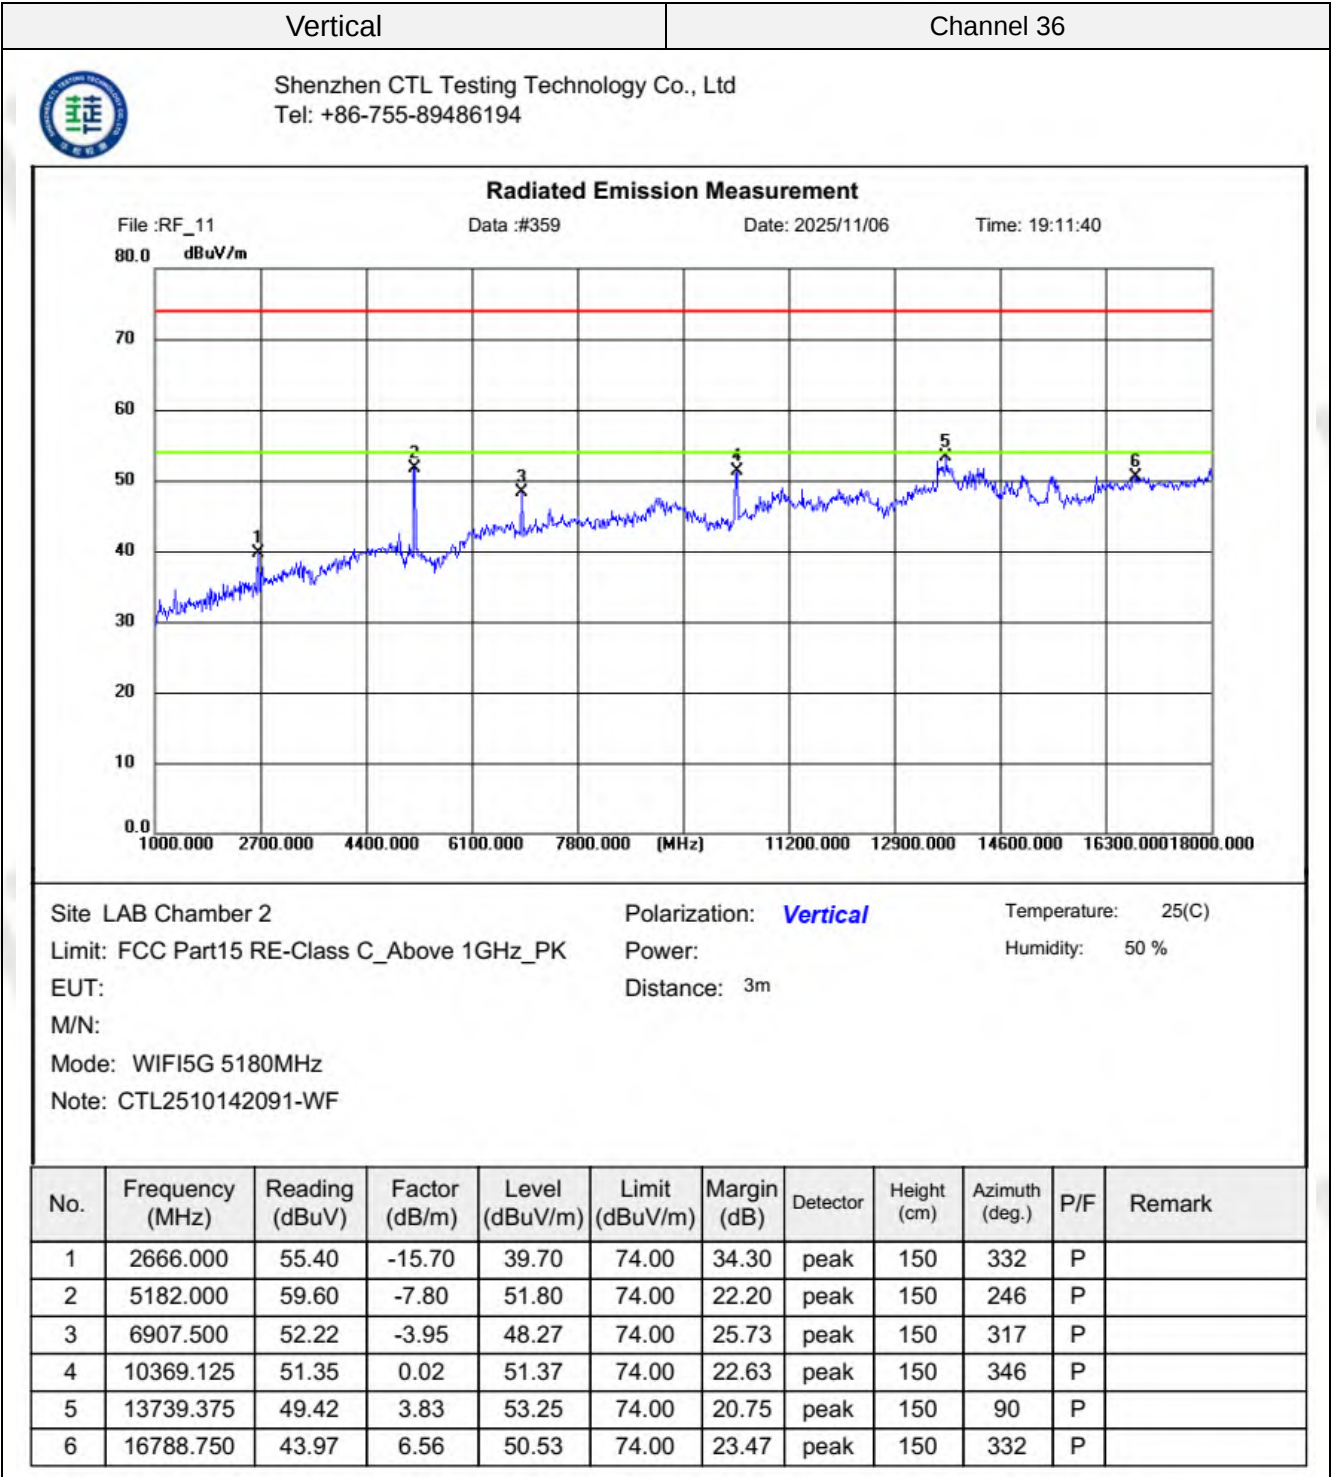

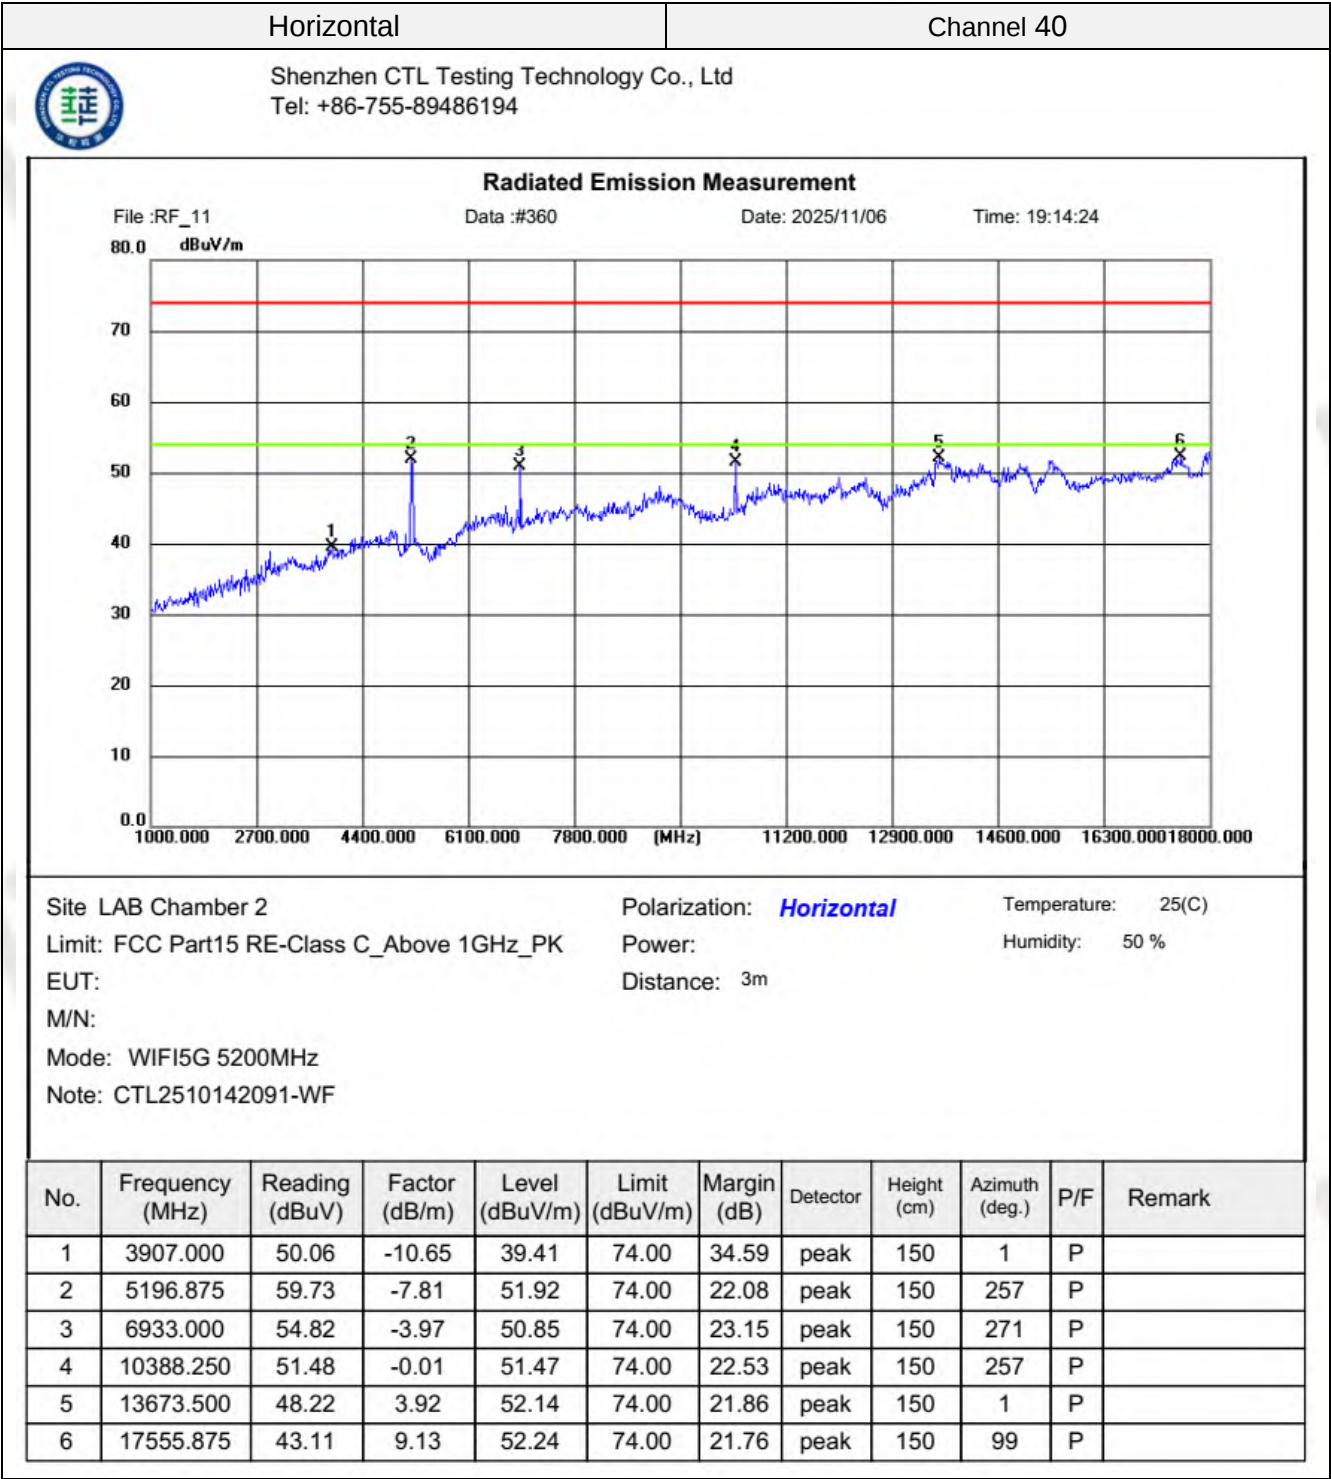

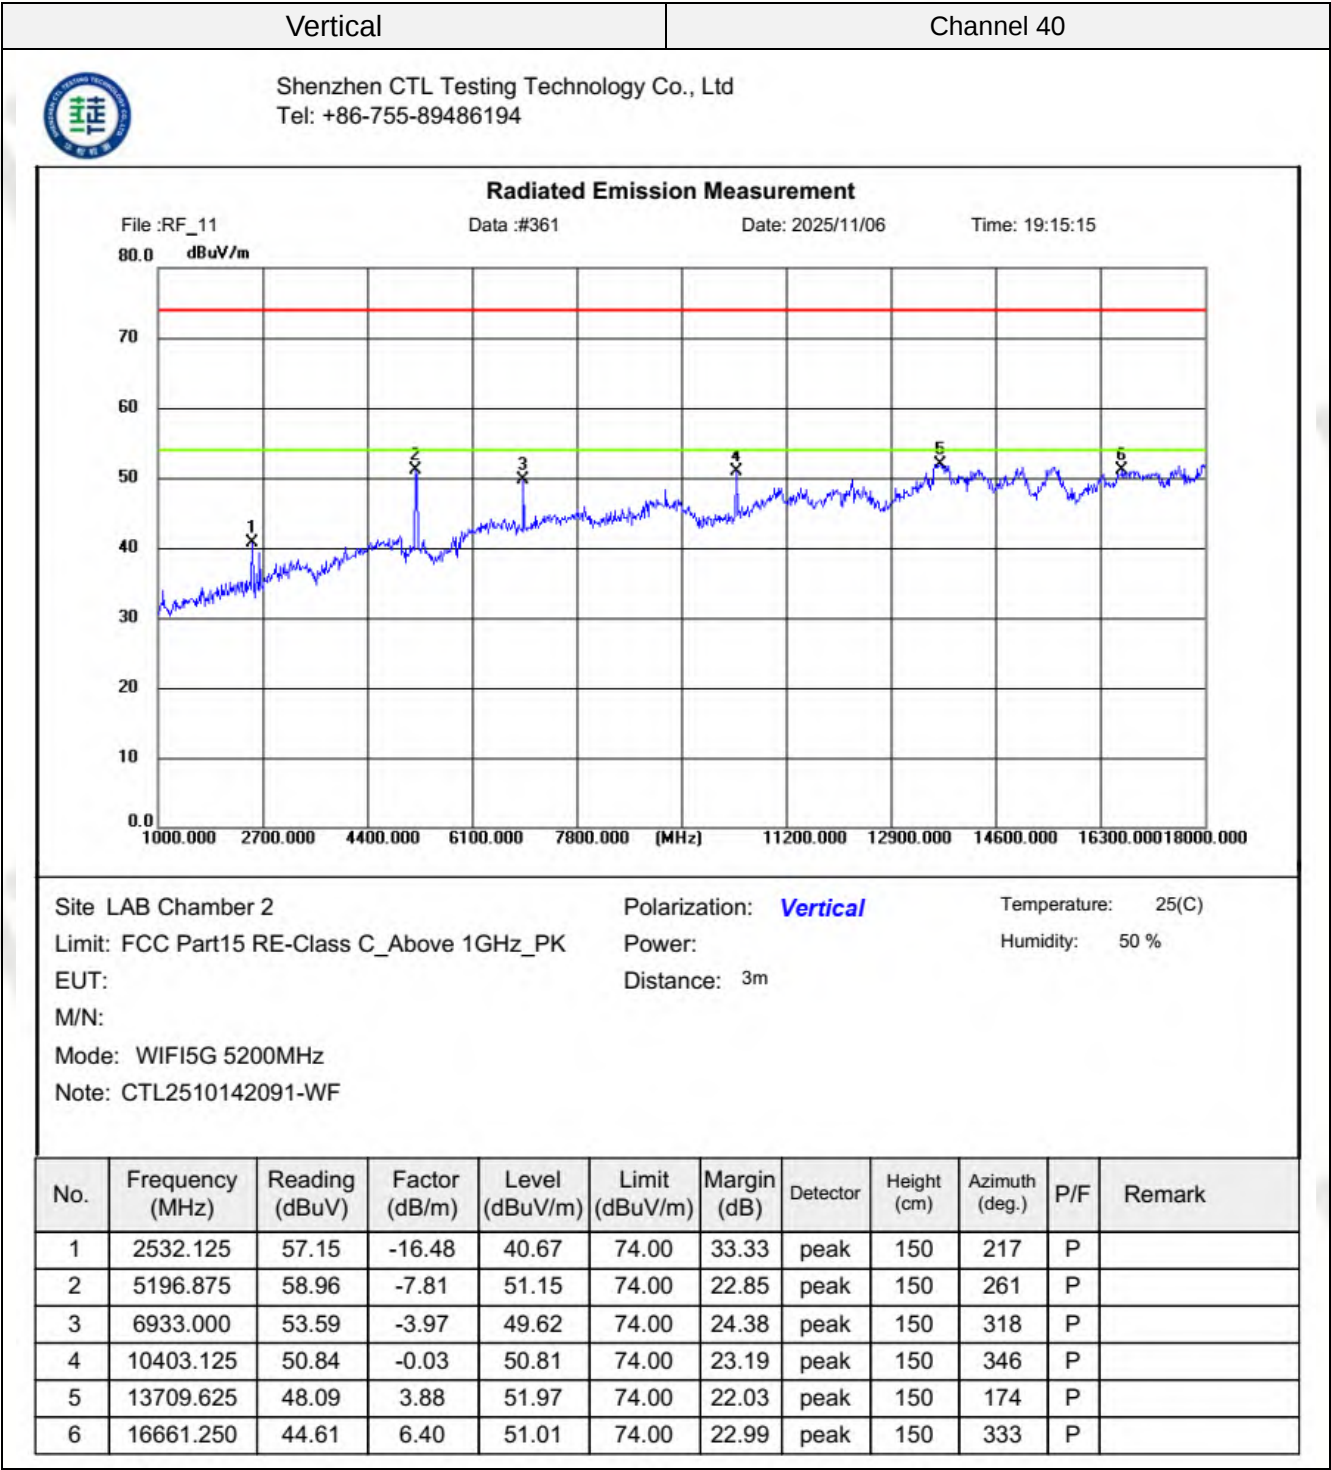

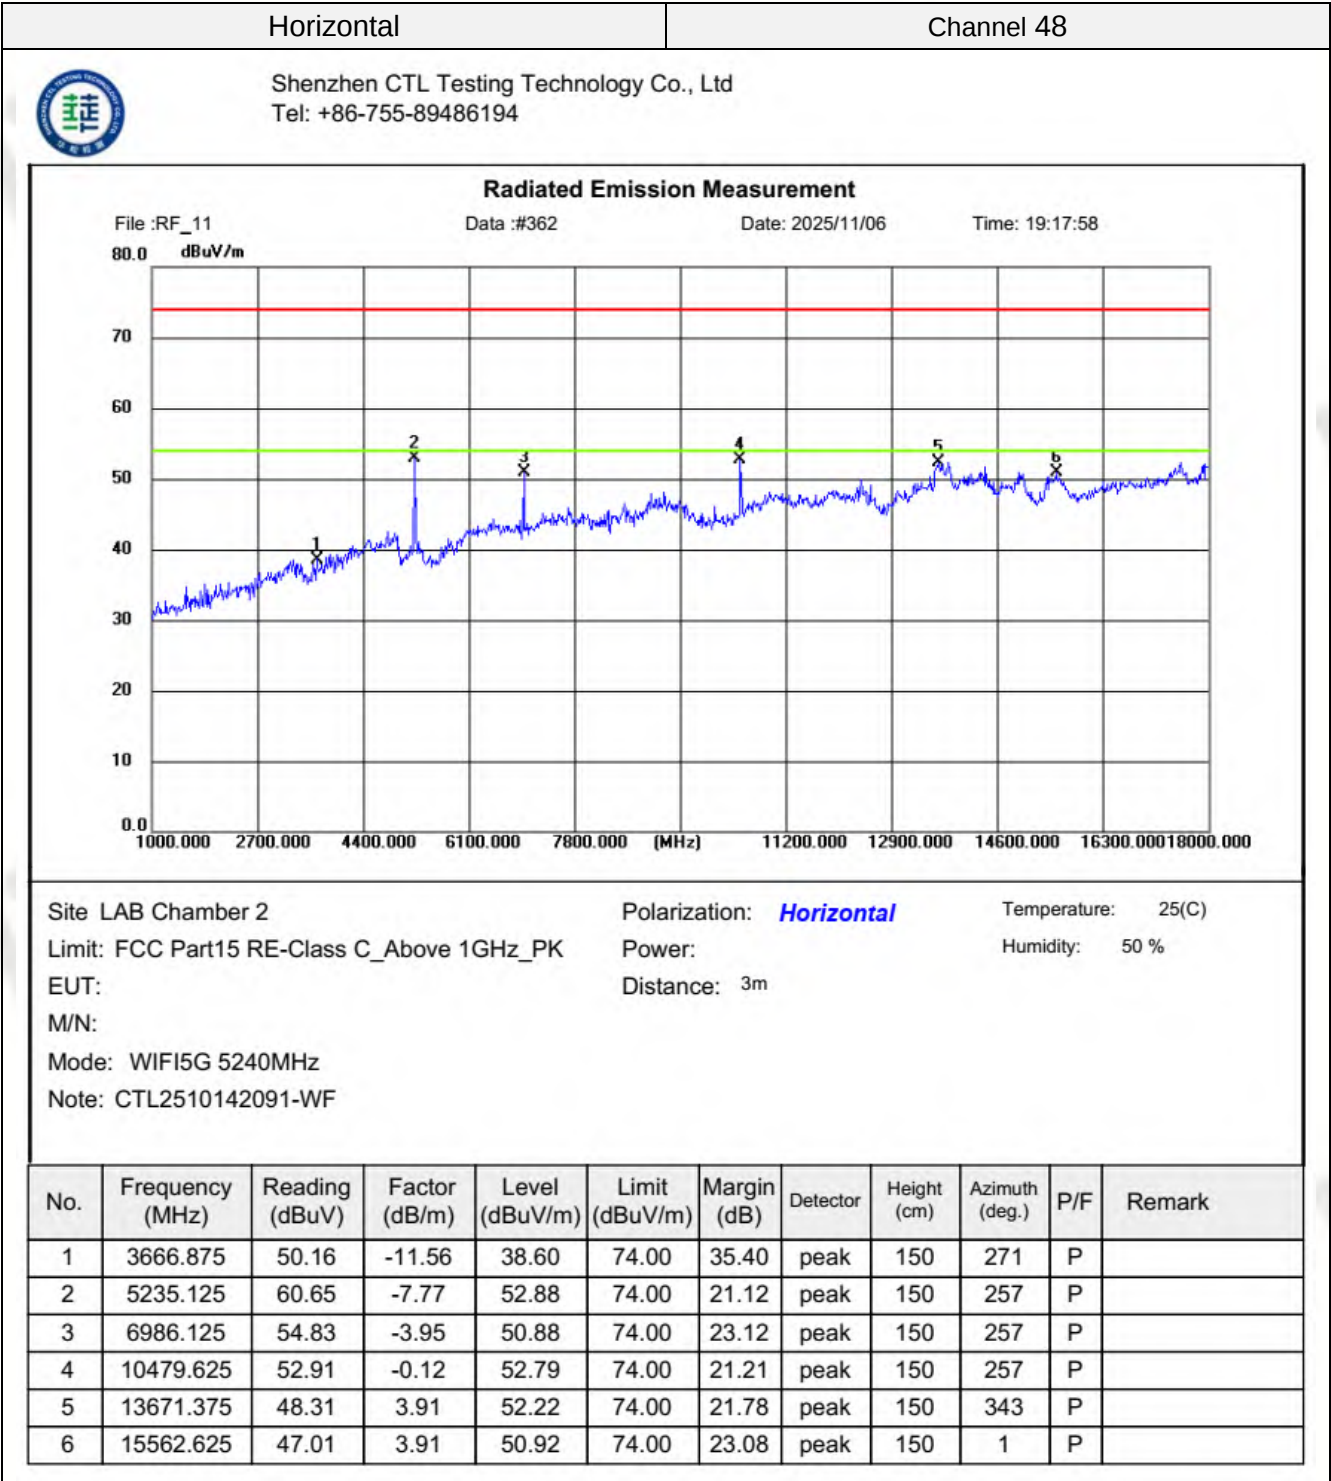

Vertical

Channel 48



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194


Radiated Emission Measurement

File :RF_11

Data :#363

Date: 2025/11/06

Time: 19:18:49

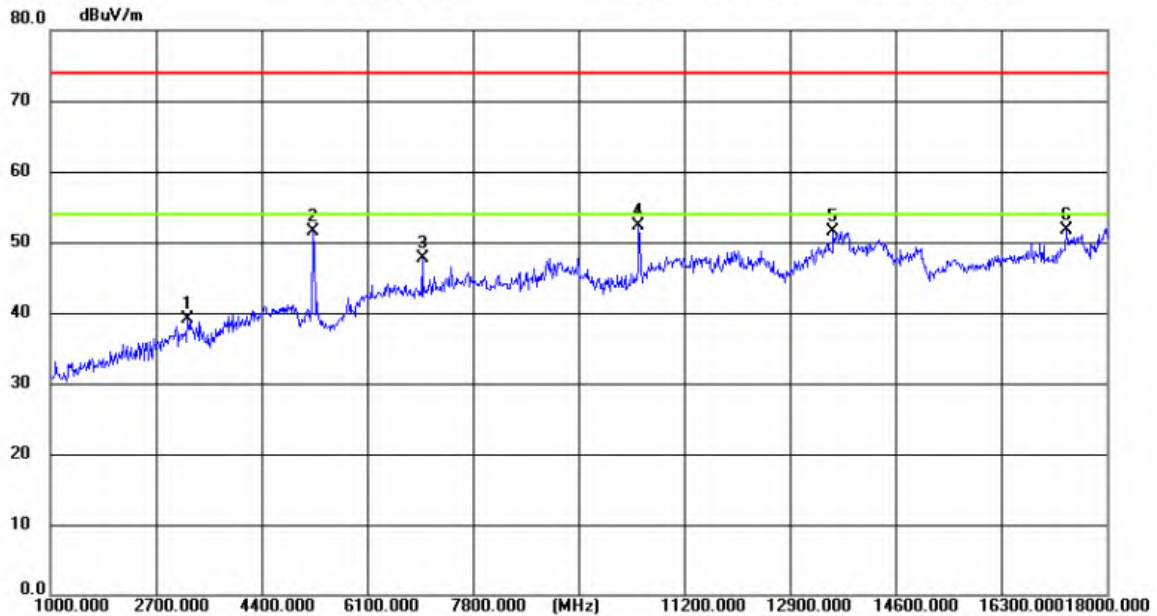

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:


Mode: WIFI5G 5240MHz

Note: CTL2510142091-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3224.875	52.10	-13.05	39.05	74.00	34.95	peak	150	204	P	
2	5243.625	59.23	-7.76	51.47	74.00	22.53	peak	150	260	P	
3	6986.125	51.65	-3.95	47.70	74.00	26.30	peak	150	332	P	
4	10481.750	52.44	-0.13	52.31	74.00	21.69	peak	150	346	P	
5	13603.375	47.60	3.96	51.56	74.00	22.44	peak	150	360	P	
6	17364.625	43.13	8.54	51.67	74.00	22.33	peak	150	275	P	

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.
7. 18GHz-40GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

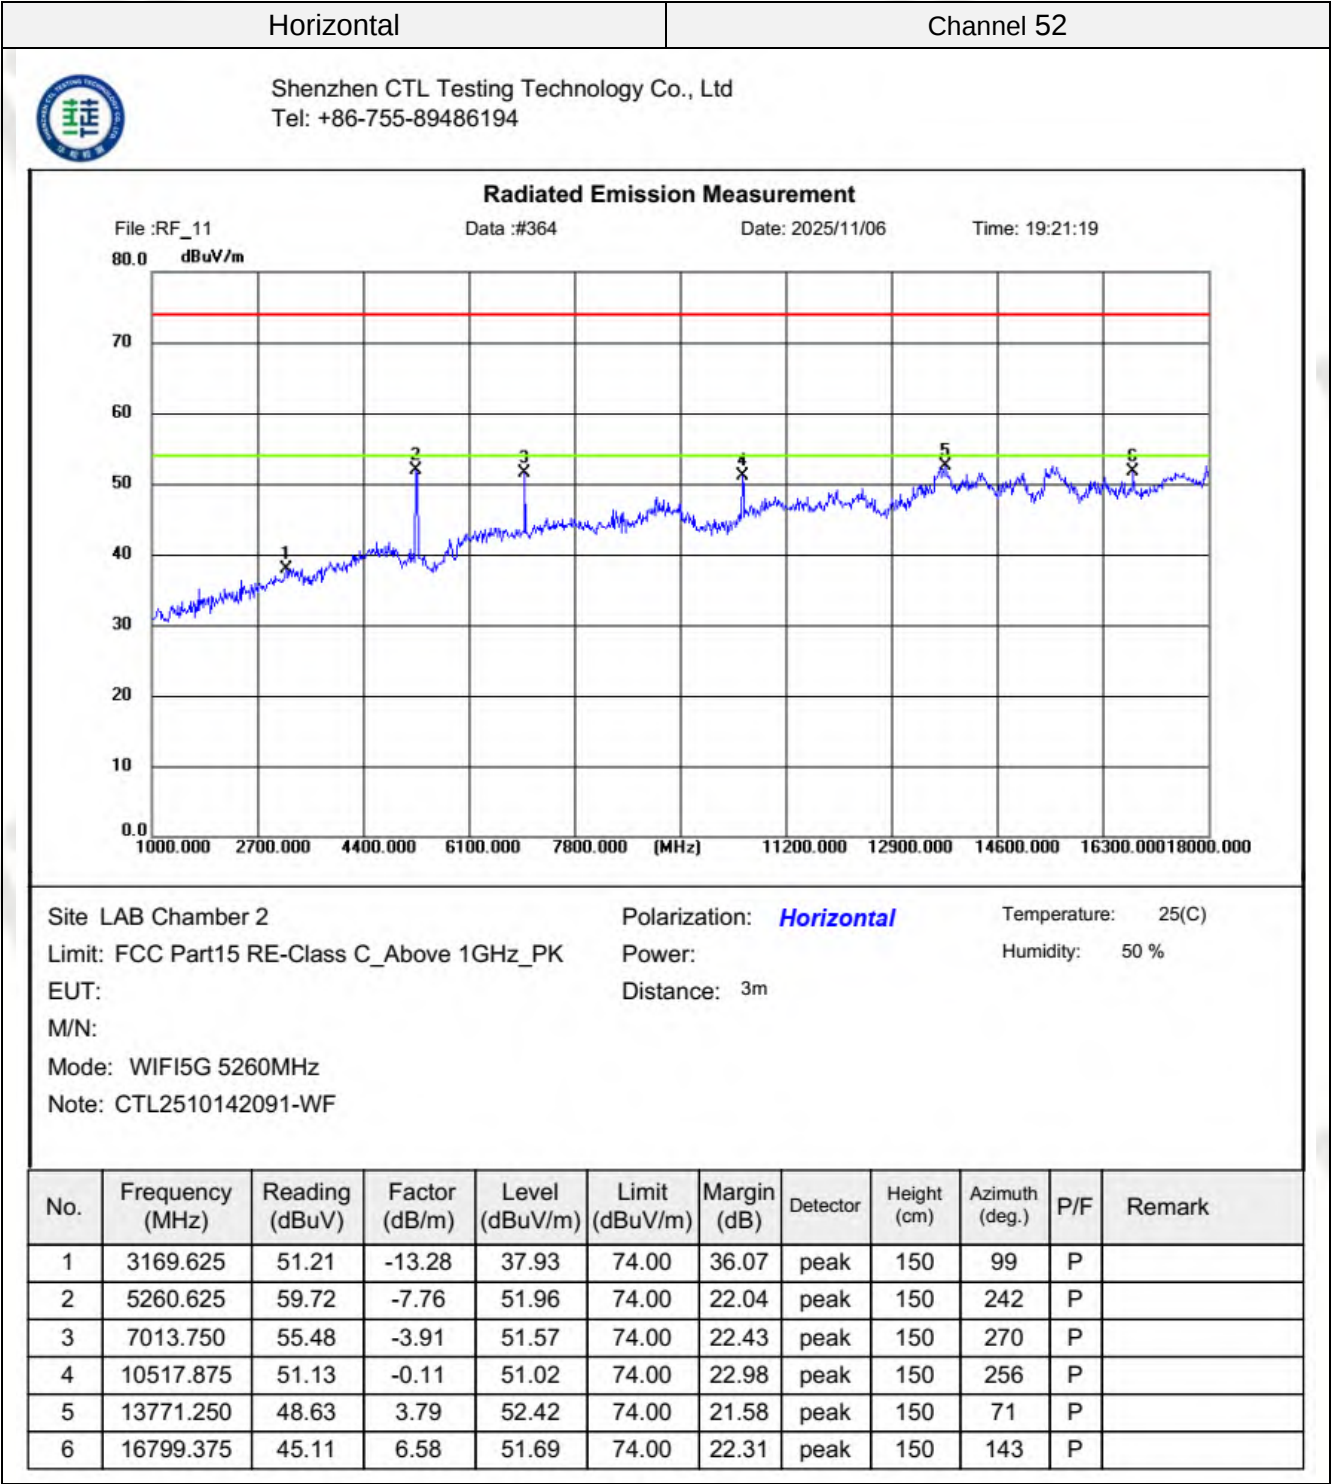

Vertical

Channel 52




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

File :RF_11 Data :#365 Date: 2025/11/06 Time: 19:22:09

80.0 dBuV/m

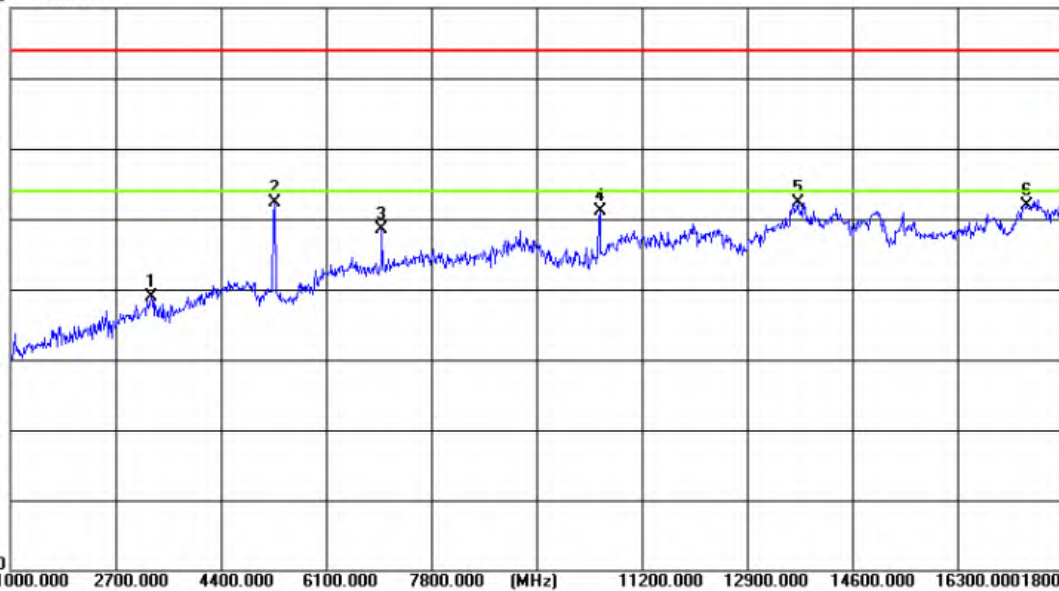

1000.000 2700.000 4400.000 6100.000 7800.000 9500.000 11200.000 12900.000 14600.000 16300.000 18000.000

(MHz)

Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK Power: Humidity: 50 %


EUT: Distance: 3m


M/N:


Mode: WIFI5G 5260MHz

Note: CTL2510142091-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3282.250	51.76	-12.81	38.95	74.00	35.05	peak	150	190	P	
2	5267.000	59.98	-7.77	52.21	74.00	21.79	peak	150	233	P	
3	7013.750	52.43	-3.91	48.52	74.00	25.48	peak	150	304	P	
4	10520.000	51.38	-0.31	51.07	74.00	22.93	peak	150	346	P	
5	13730.875	48.47	3.85	52.32	74.00	21.68	peak	150	162	P	
6	17424.125	43.03	8.85	51.88	74.00	22.12	peak	150	275	P	

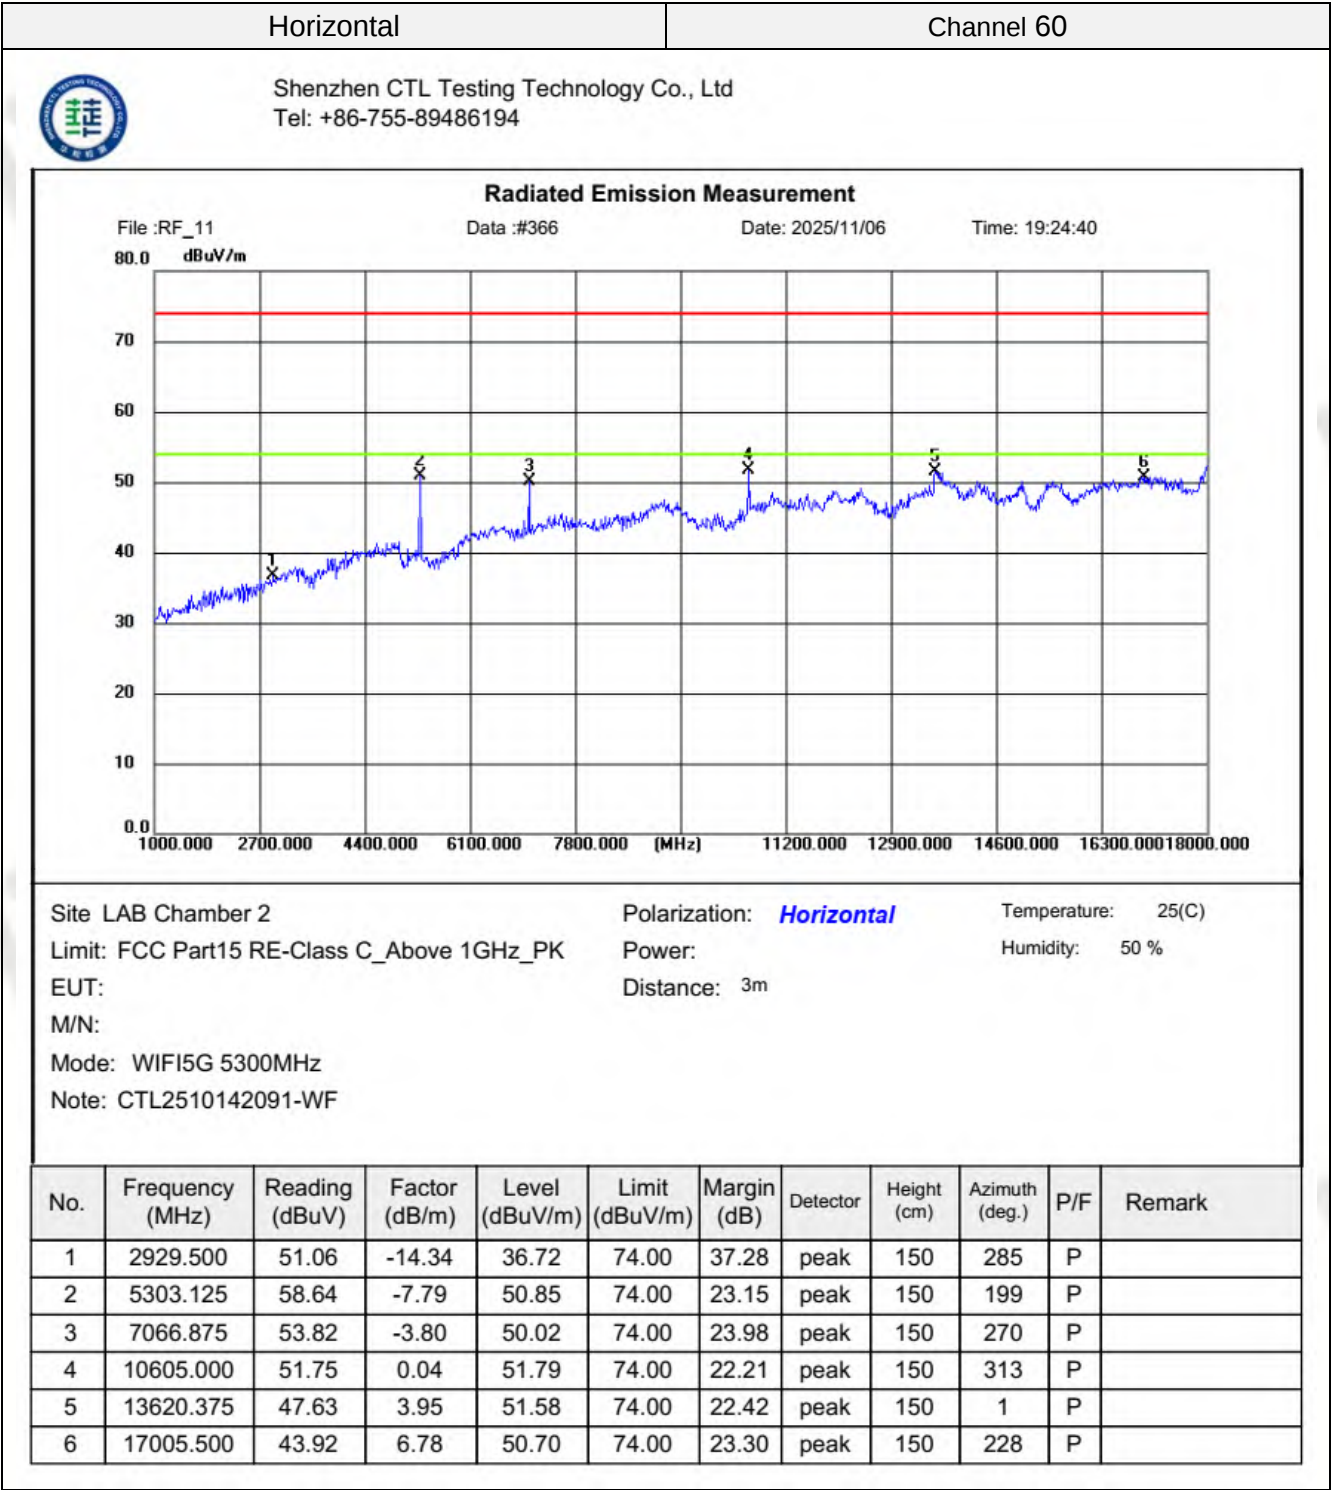

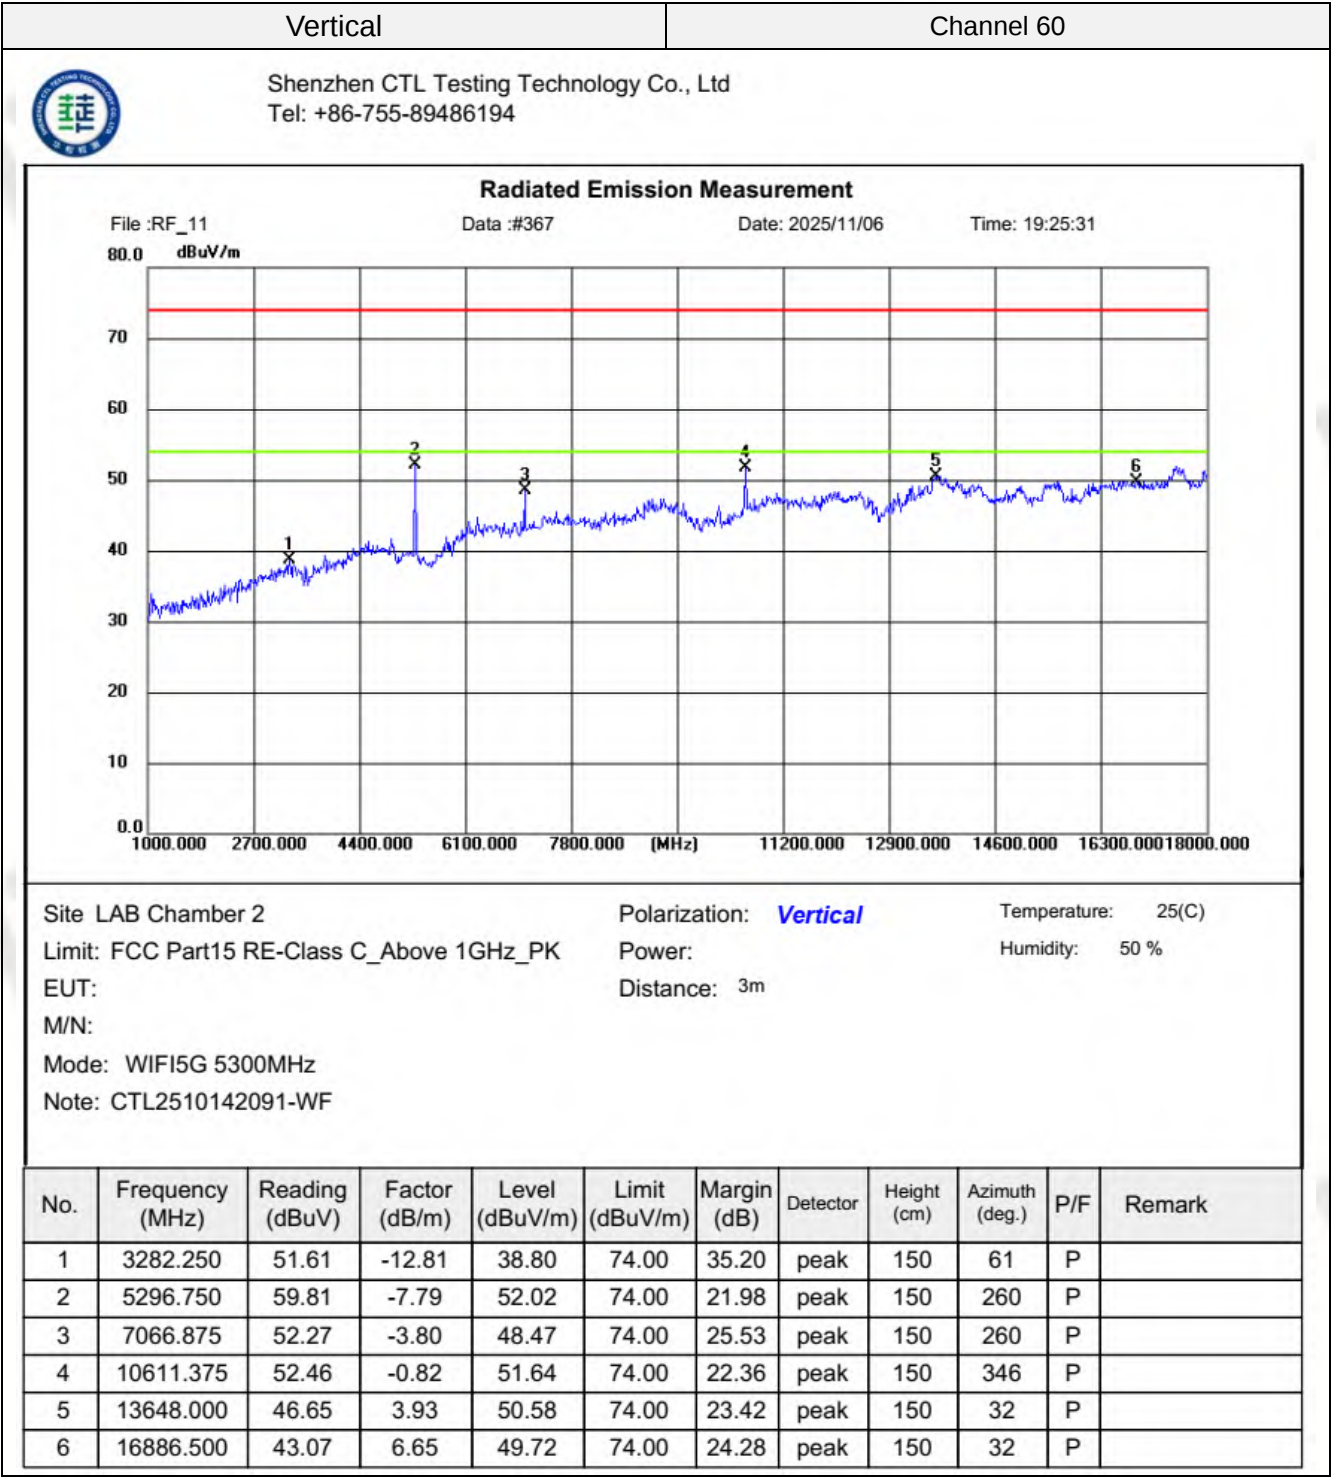

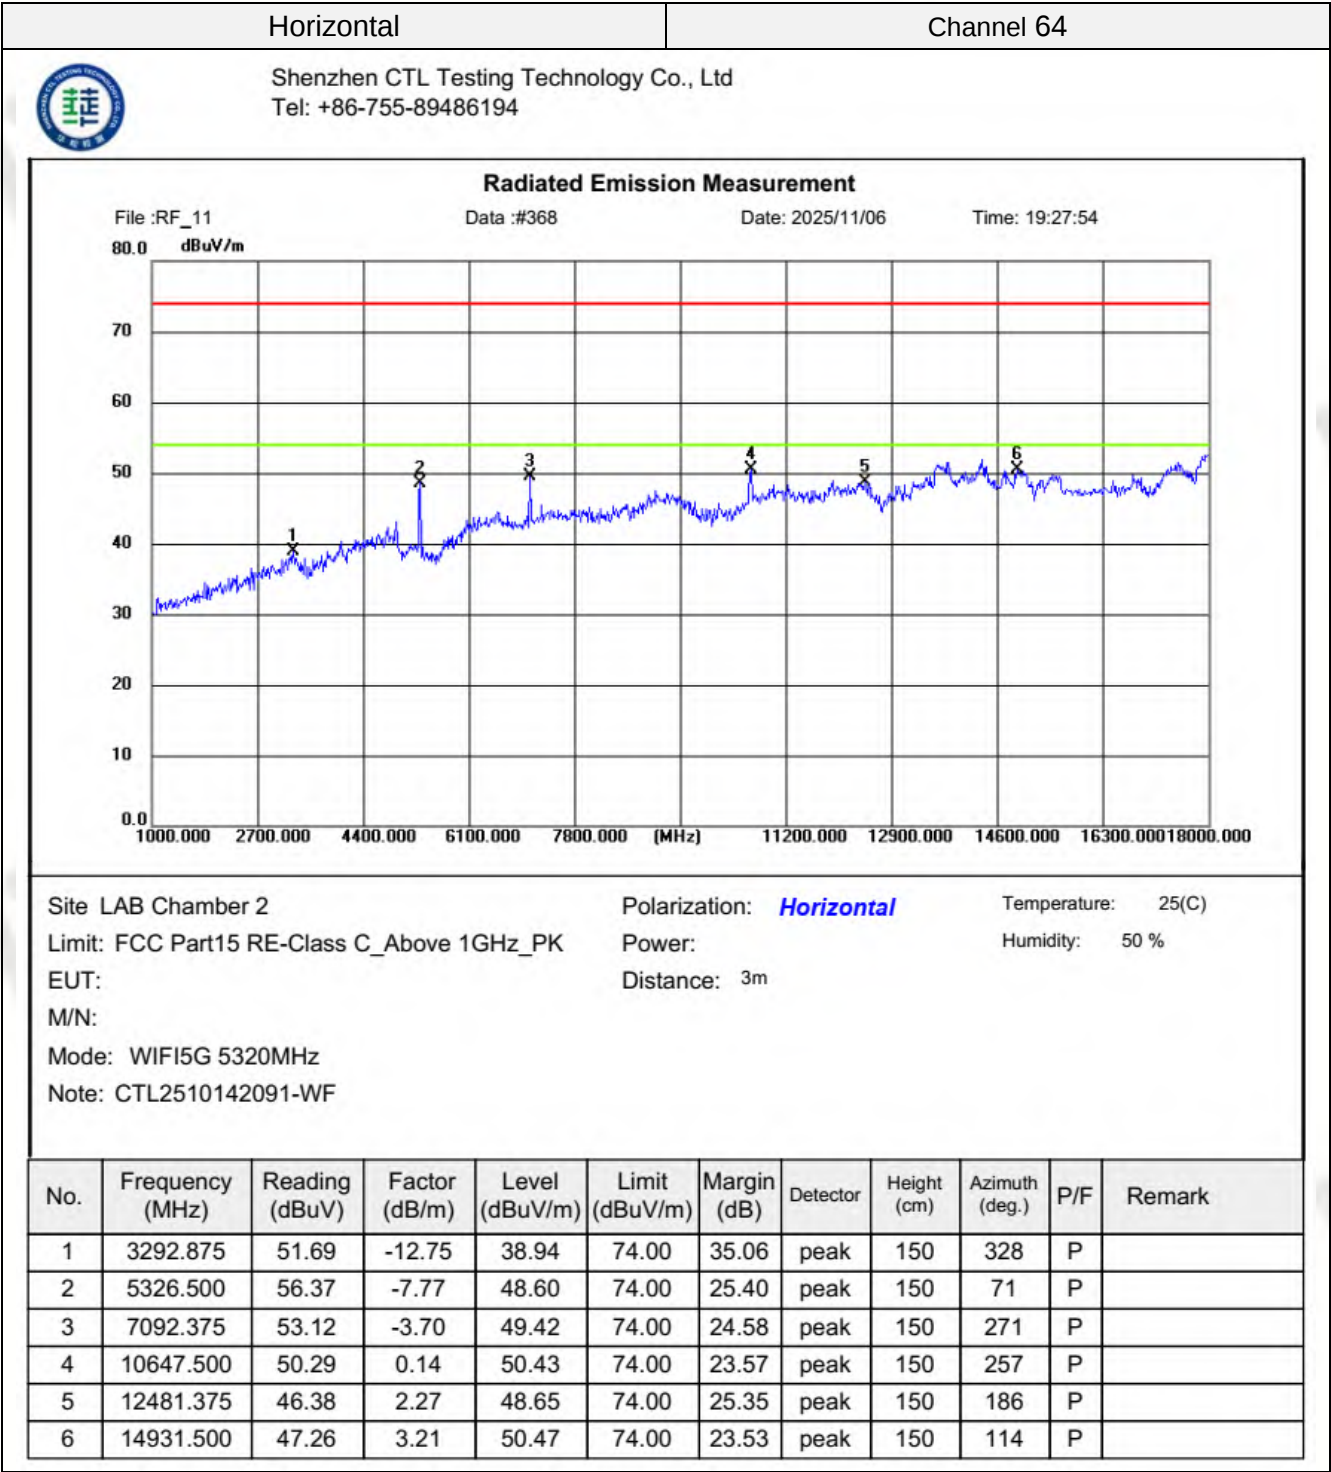

Vertical

Channel 64



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement


File :RF_11

Data :#369

Date: 2025/11/06

Time: 19:28:45

80.0 dBuV/m

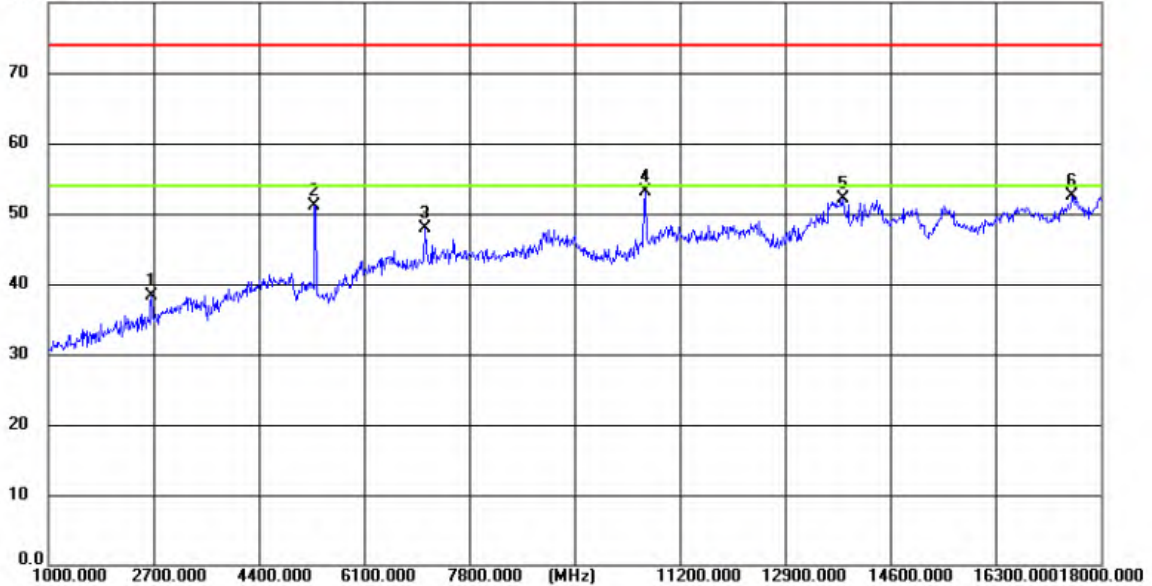

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:


Mode: WIFI5G 5320MHz


Note: CTL2510142091-WF


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2666.000	54.09	-15.70	38.39	74.00	35.61	peak	150	245	P	
2	5313.750	58.94	-7.78	51.16	74.00	22.84	peak	150	261	P	
3	7092.375	51.59	-3.70	47.89	74.00	26.11	peak	150	332	P	
4	10643.250	53.60	-0.43	53.17	74.00	20.83	peak	150	346	P	
5	13839.250	48.27	3.74	52.01	74.00	21.99	peak	150	317	P	
6	17553.750	43.37	9.12	52.49	74.00	21.51	peak	150	0	P	


REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.
7. 18GHz-40GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

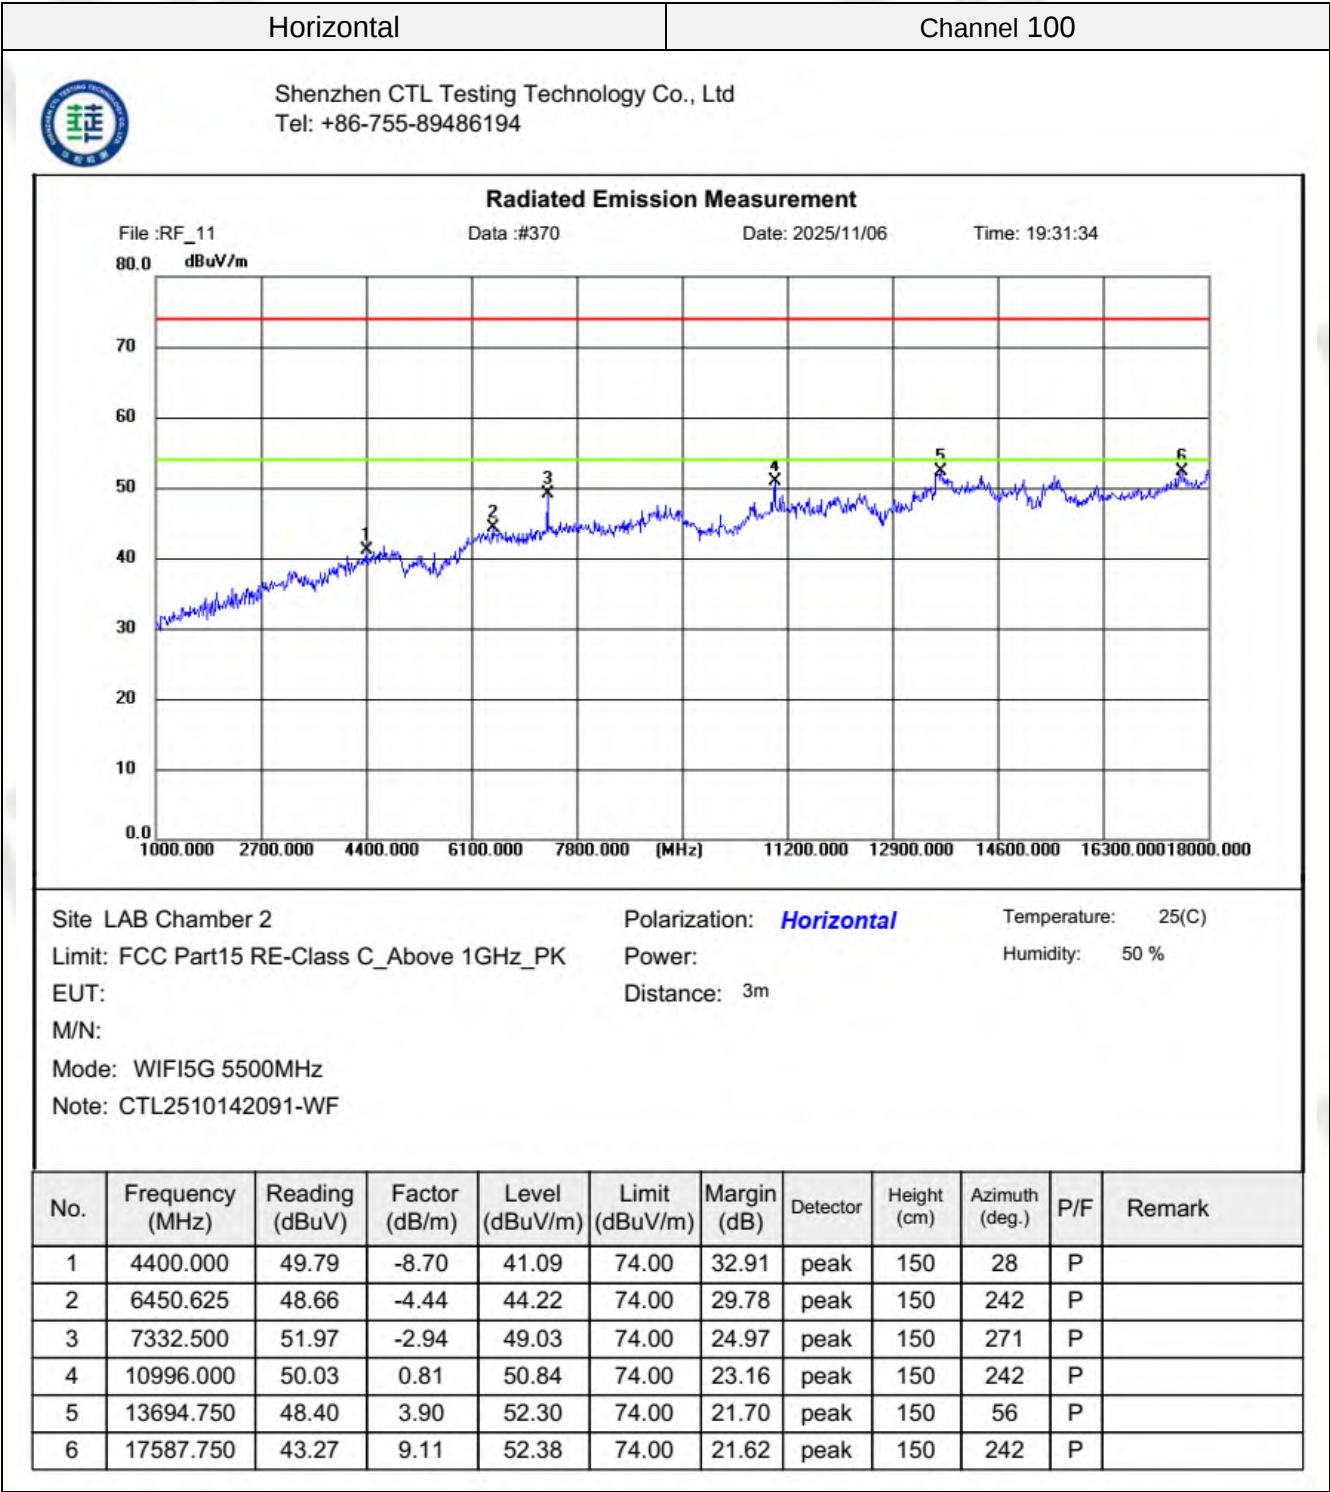

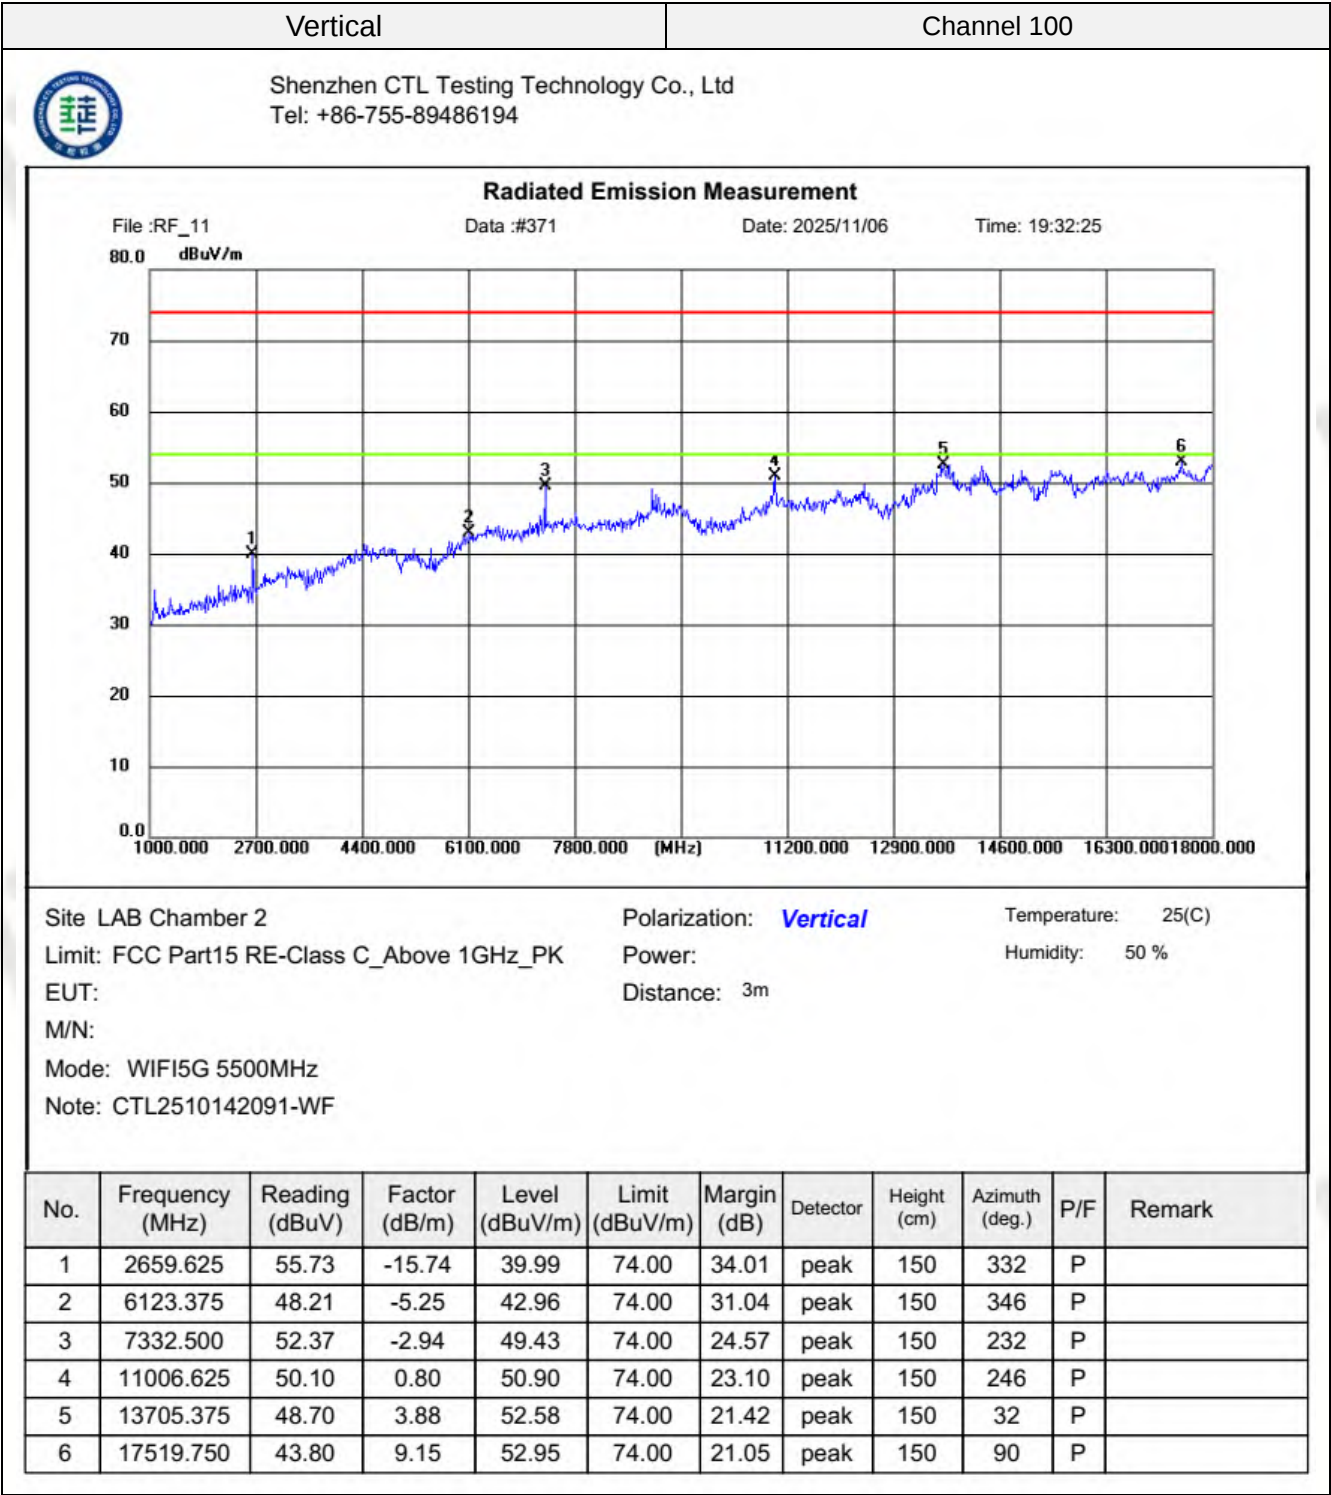

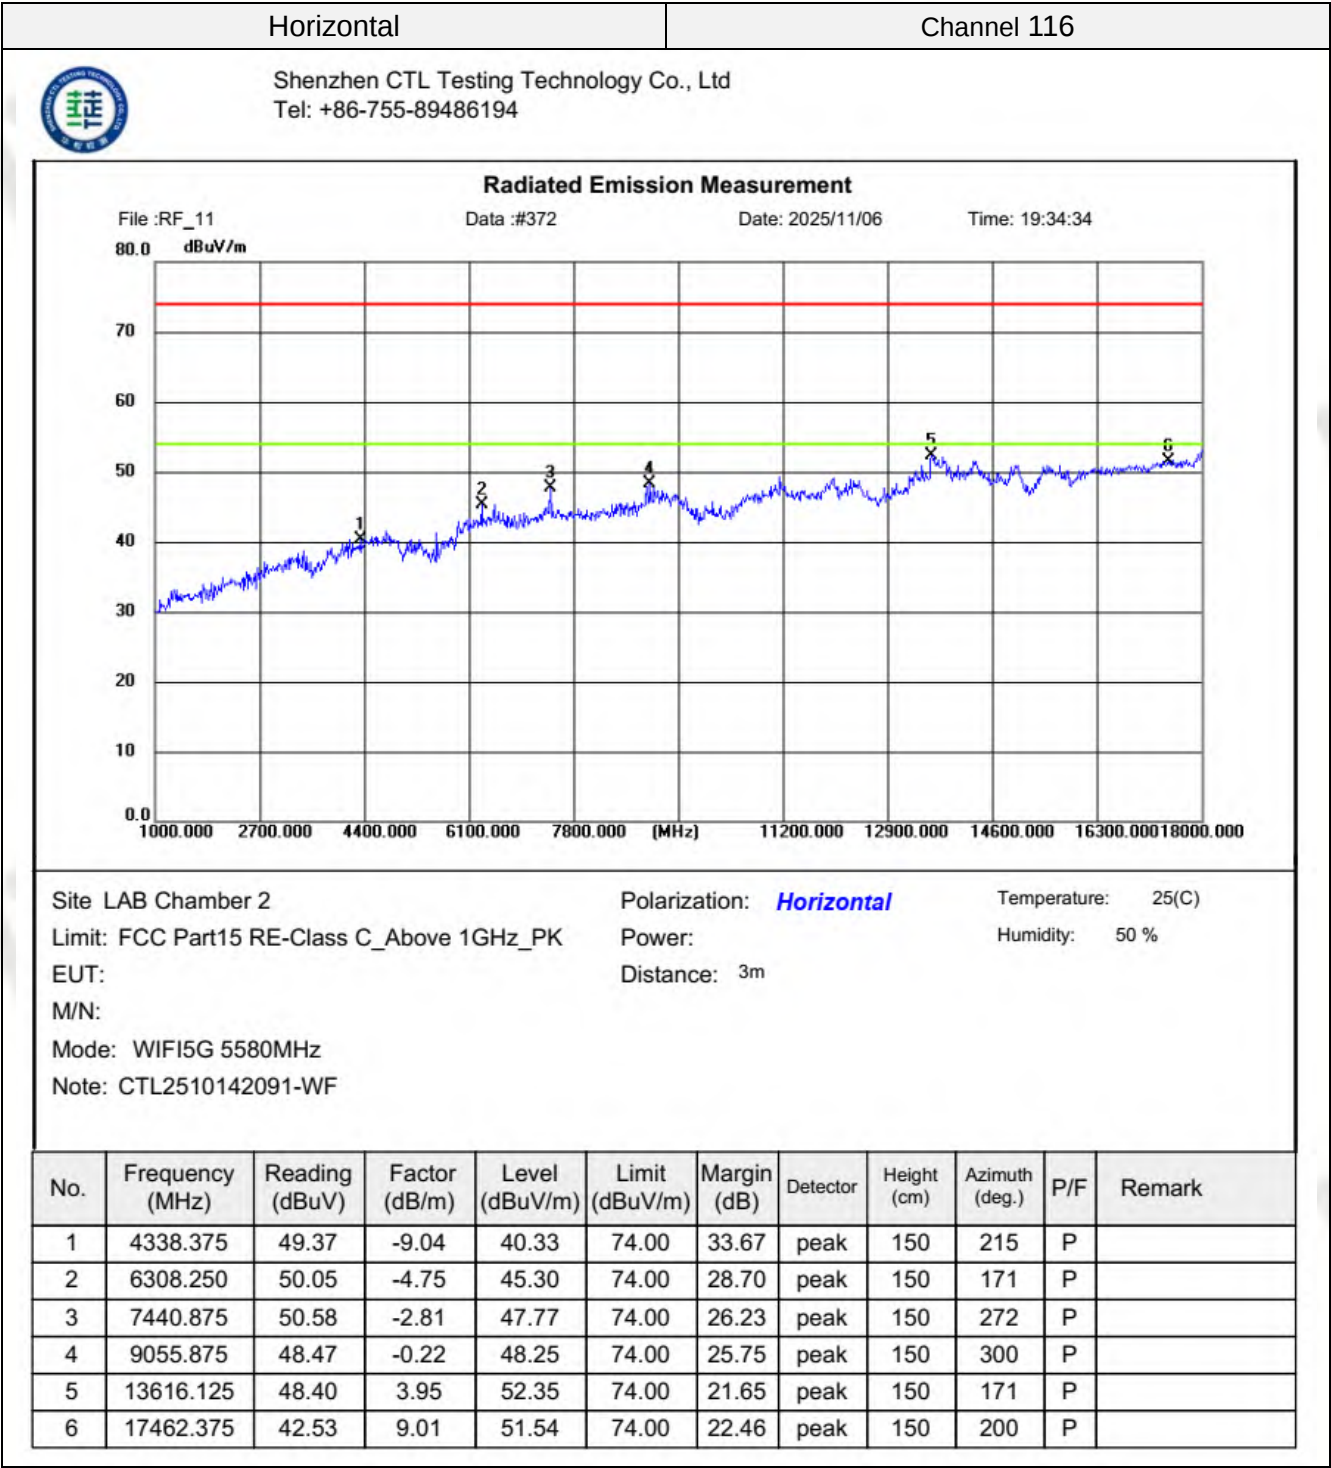


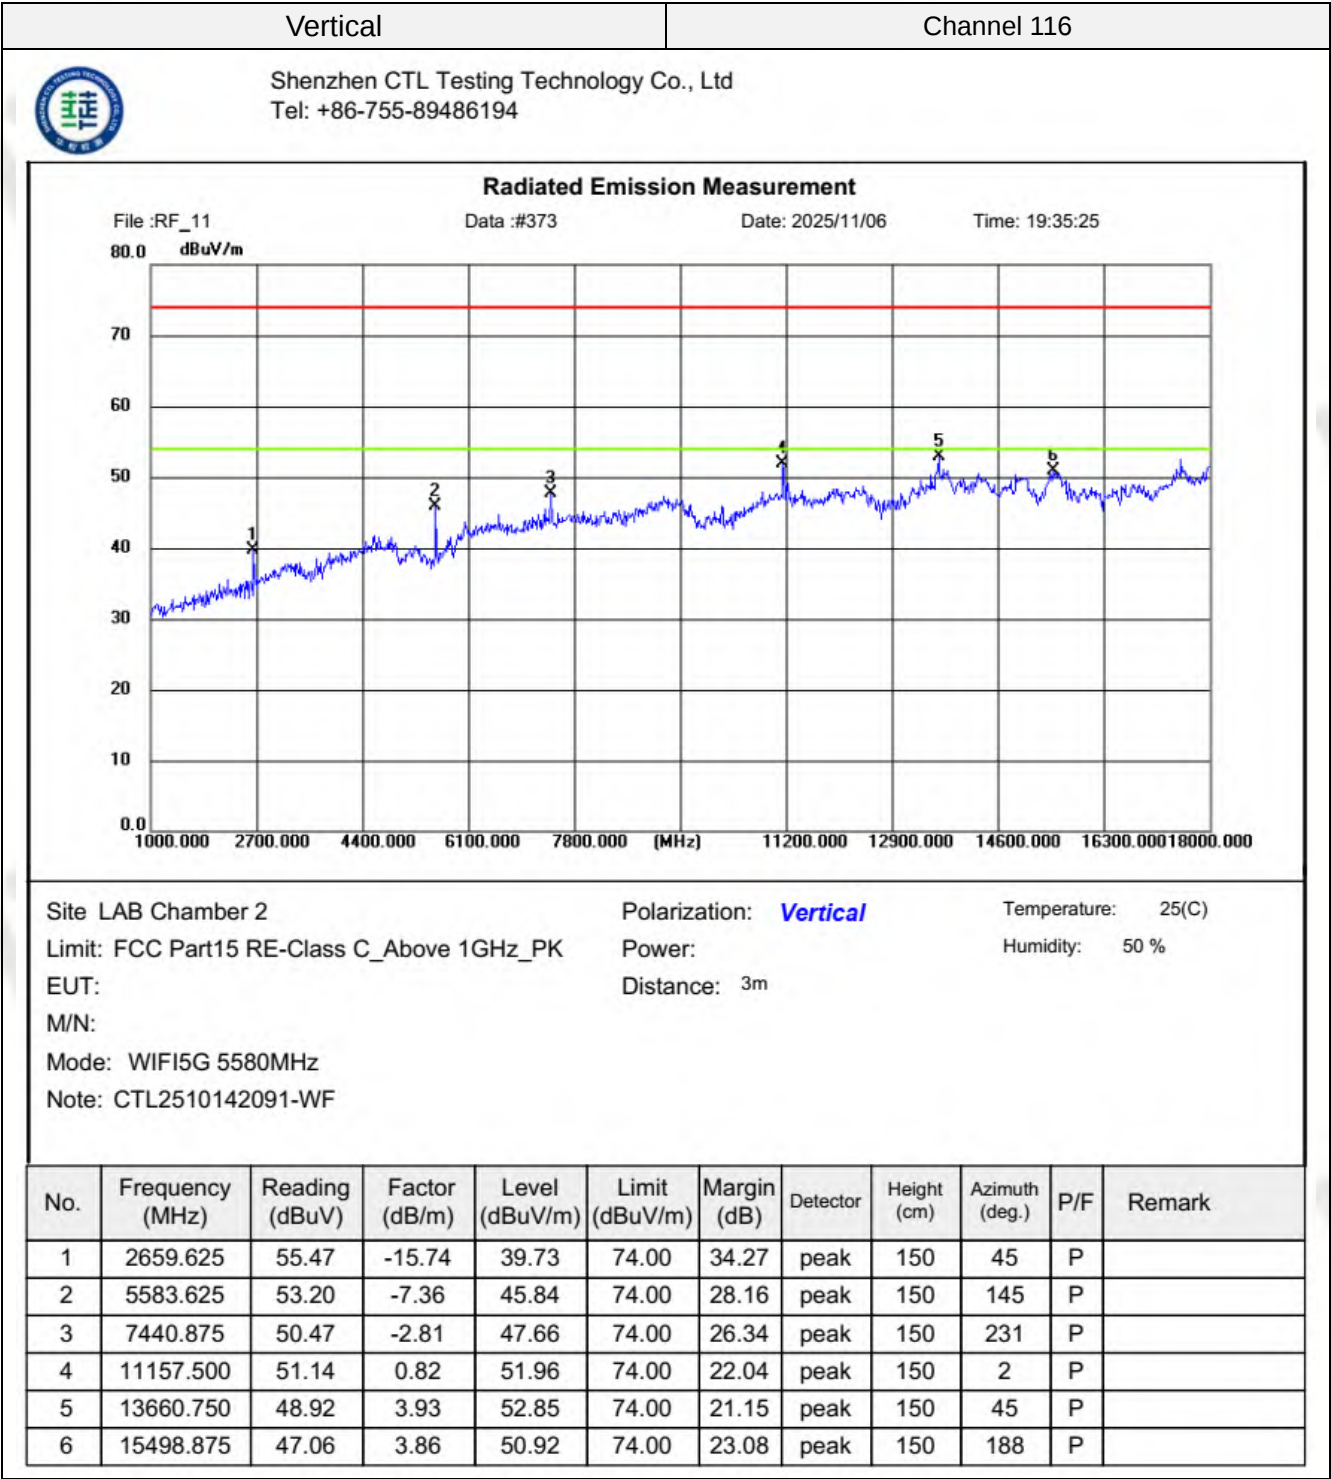


CTL

CTL


CTL

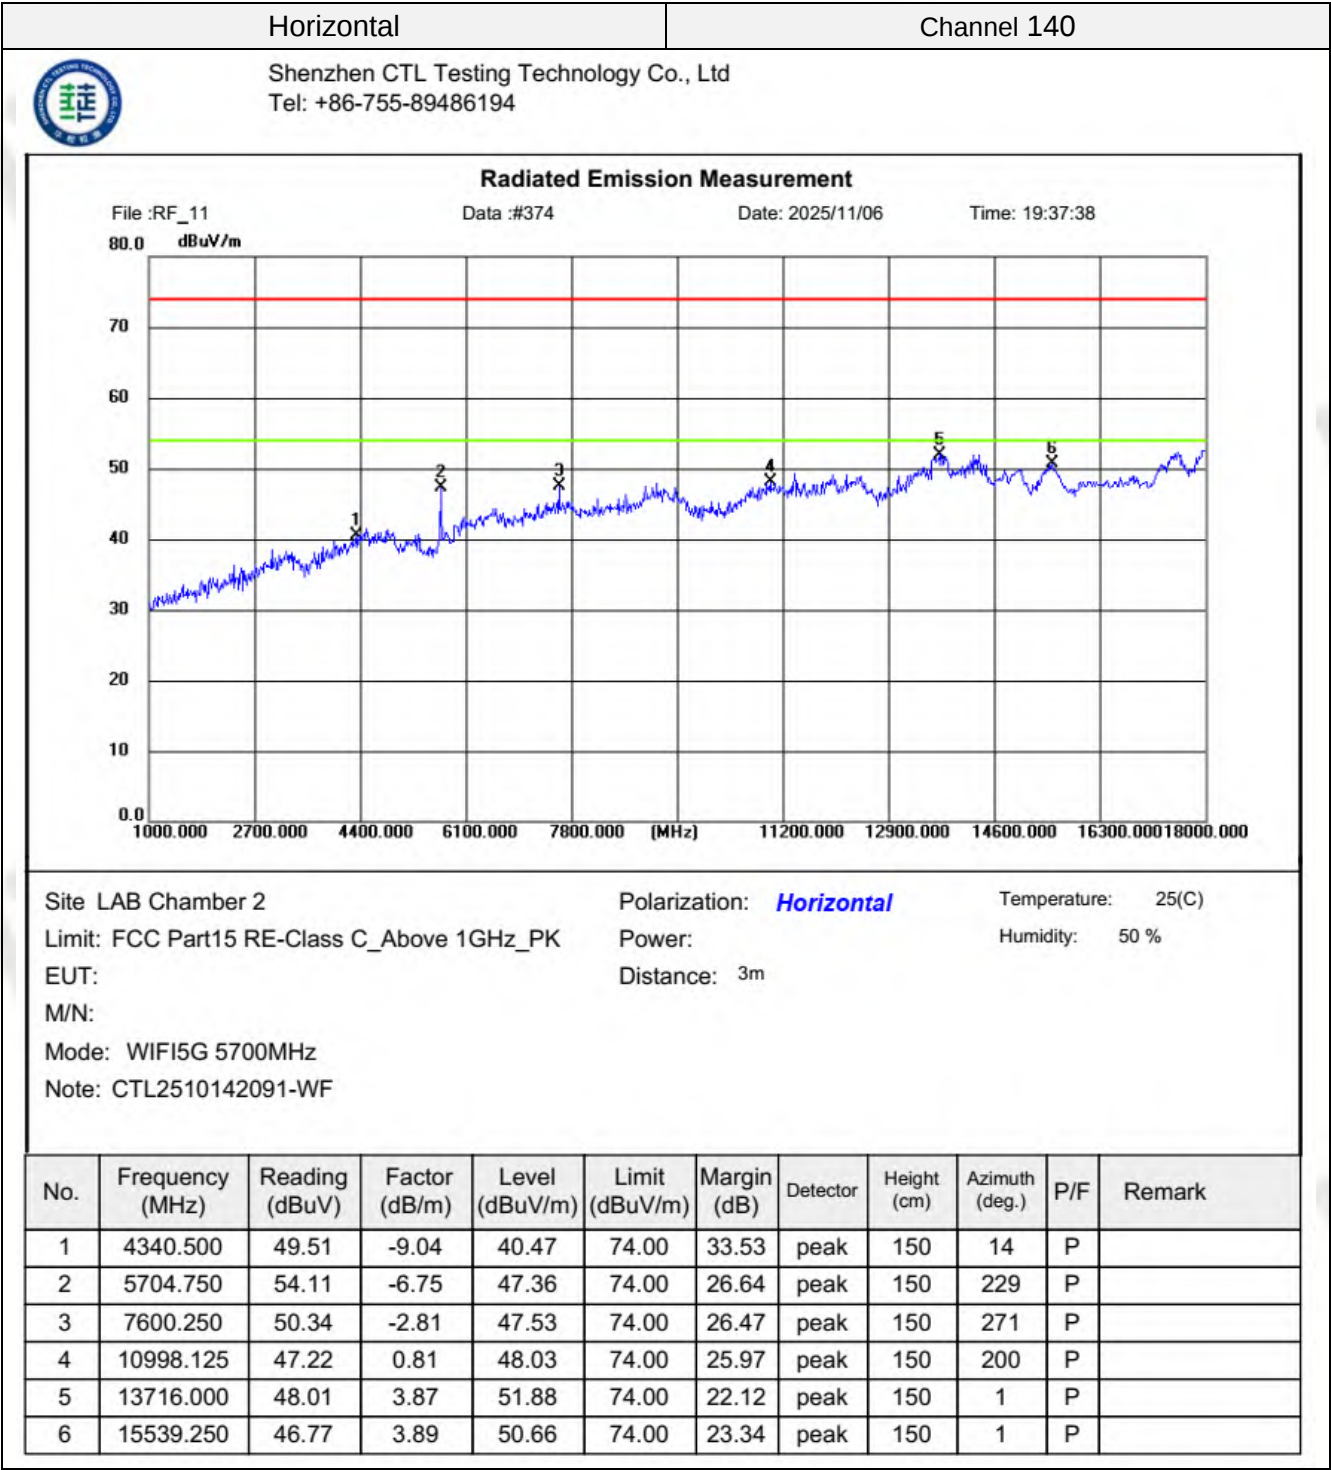


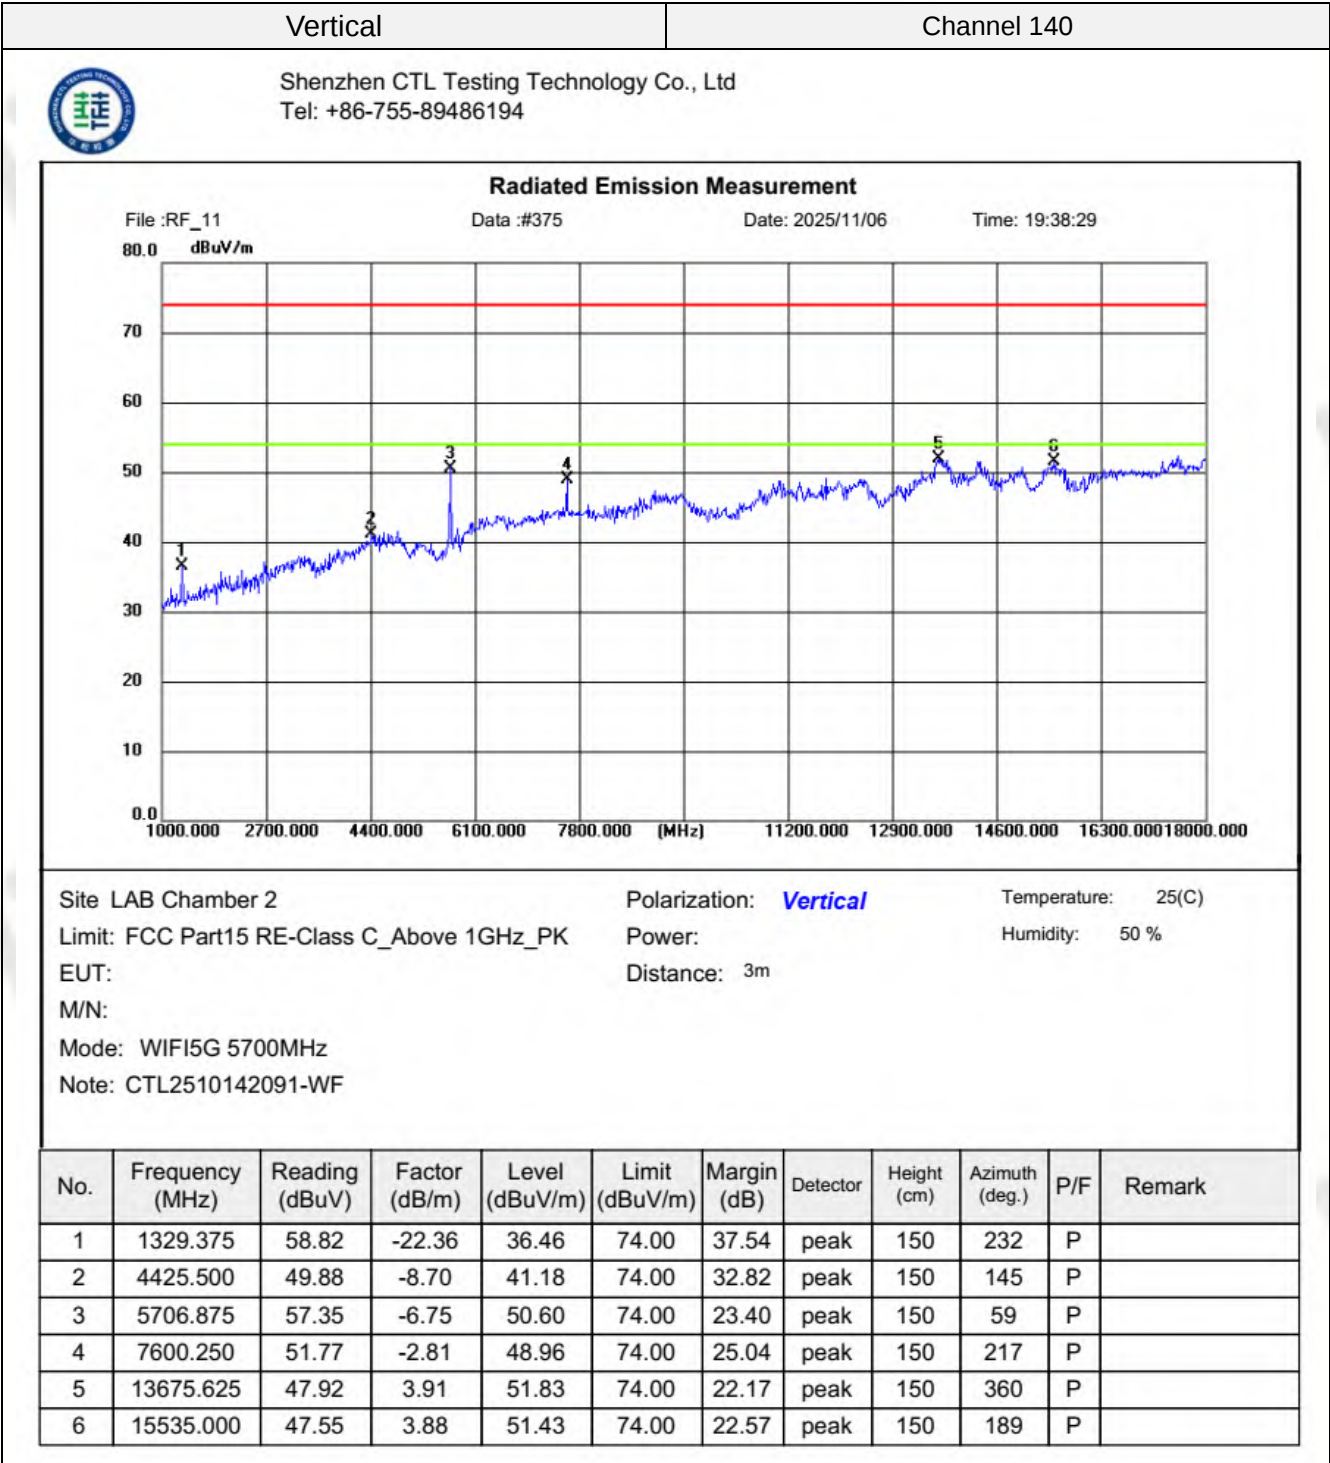



REMARKS:


- Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Limit value- Emission level.
- Mean the PK detector measured value is below average limit.
- RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
- Other emissions are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.
- 18GHz-40GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

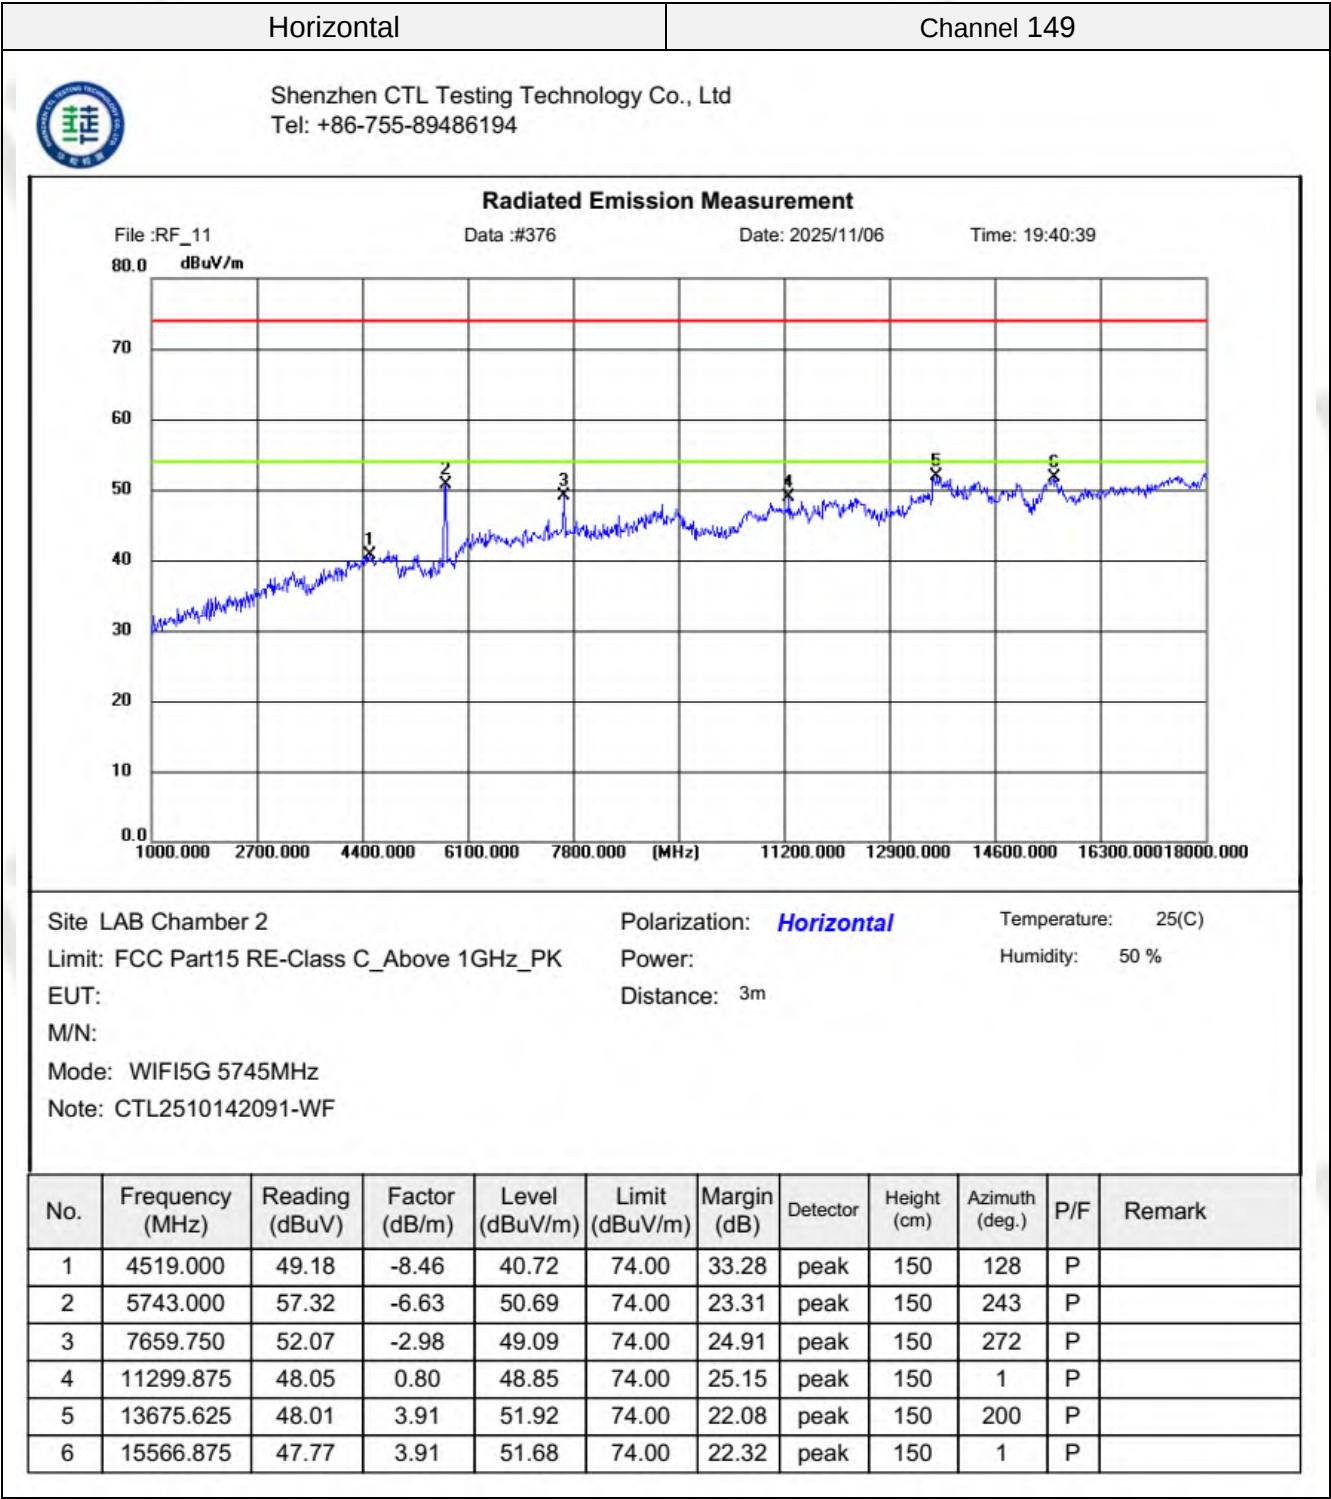


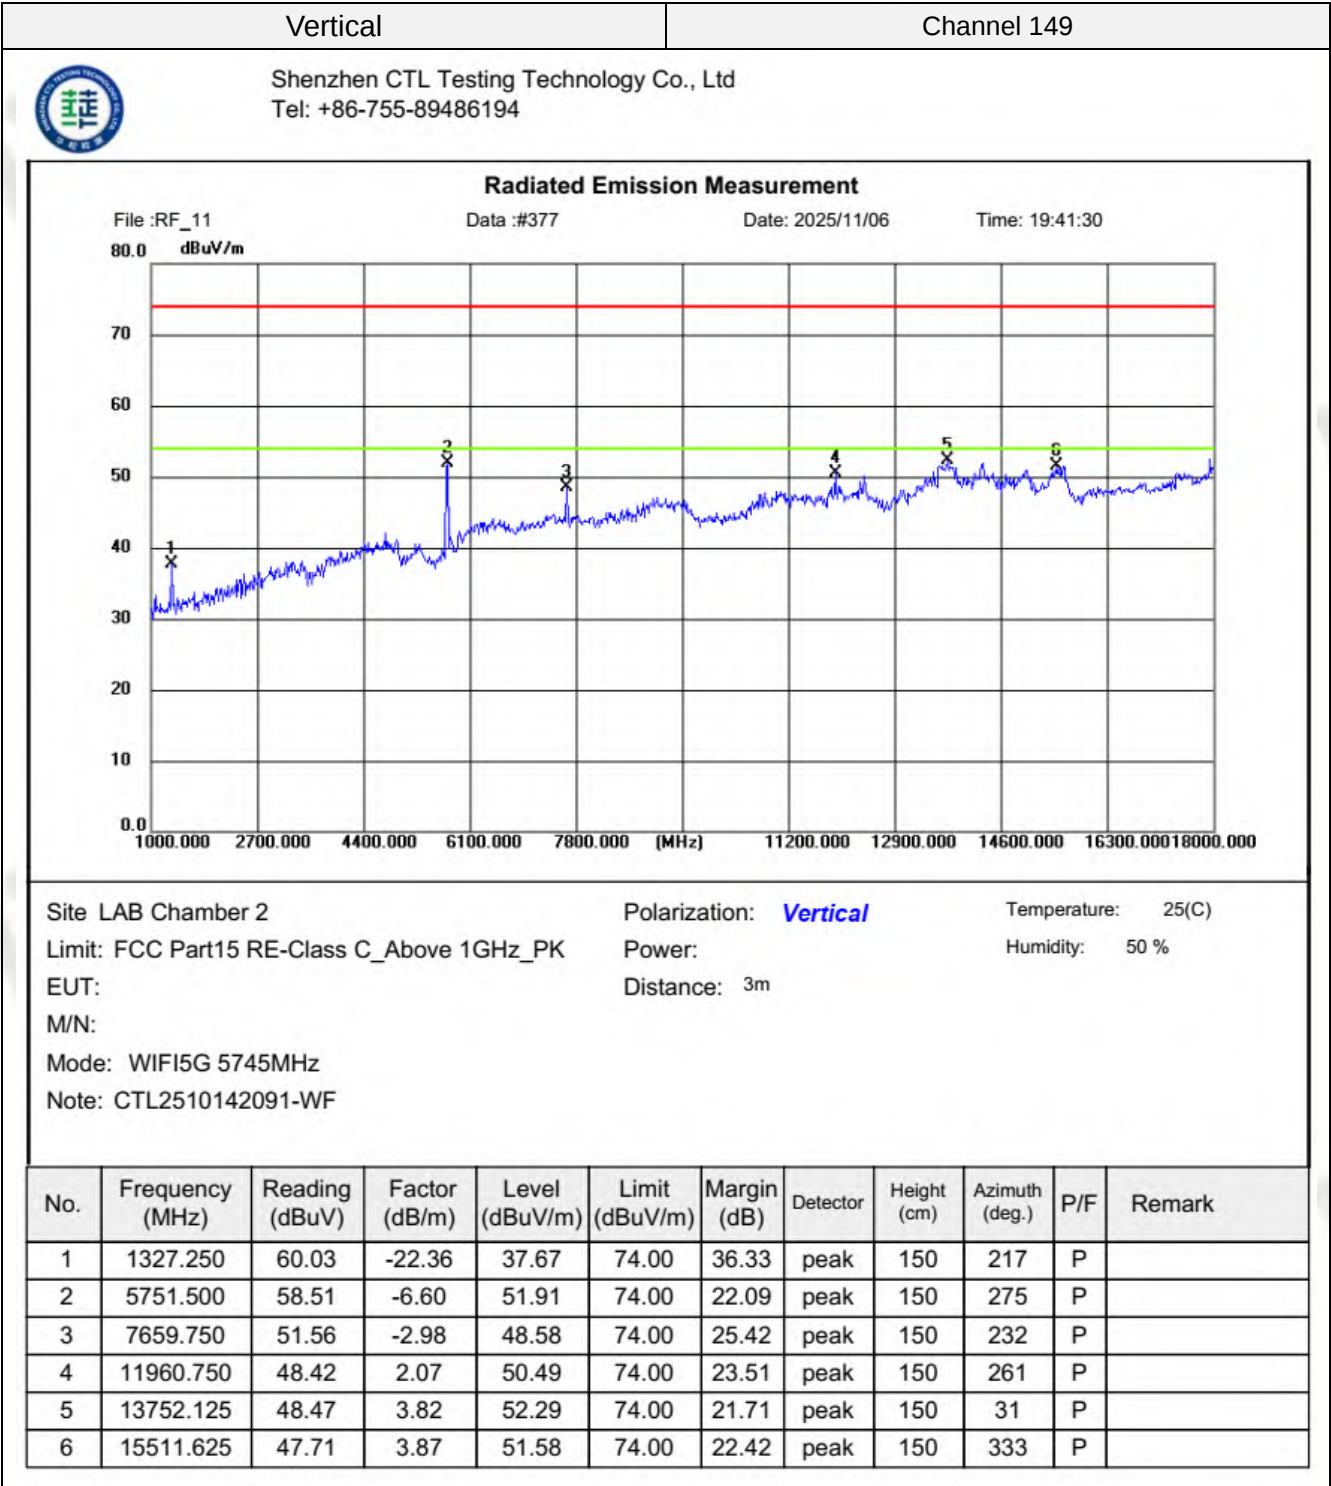

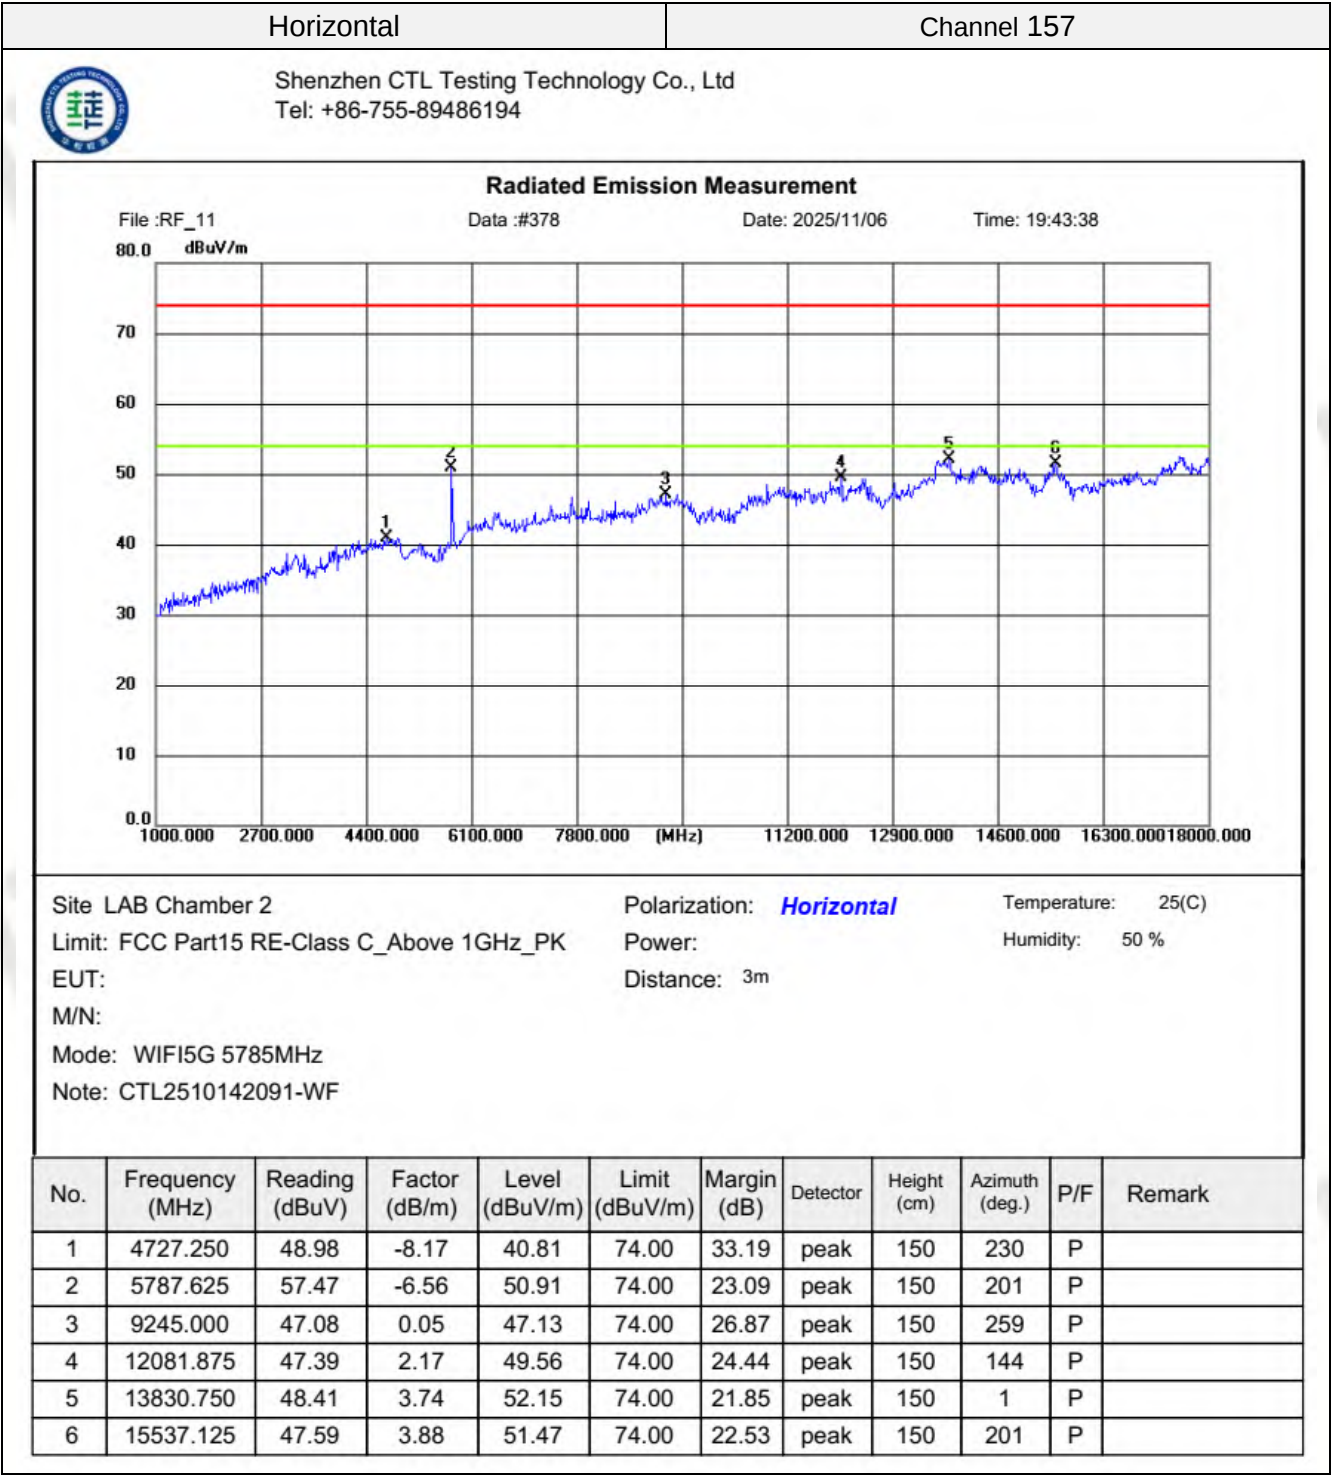

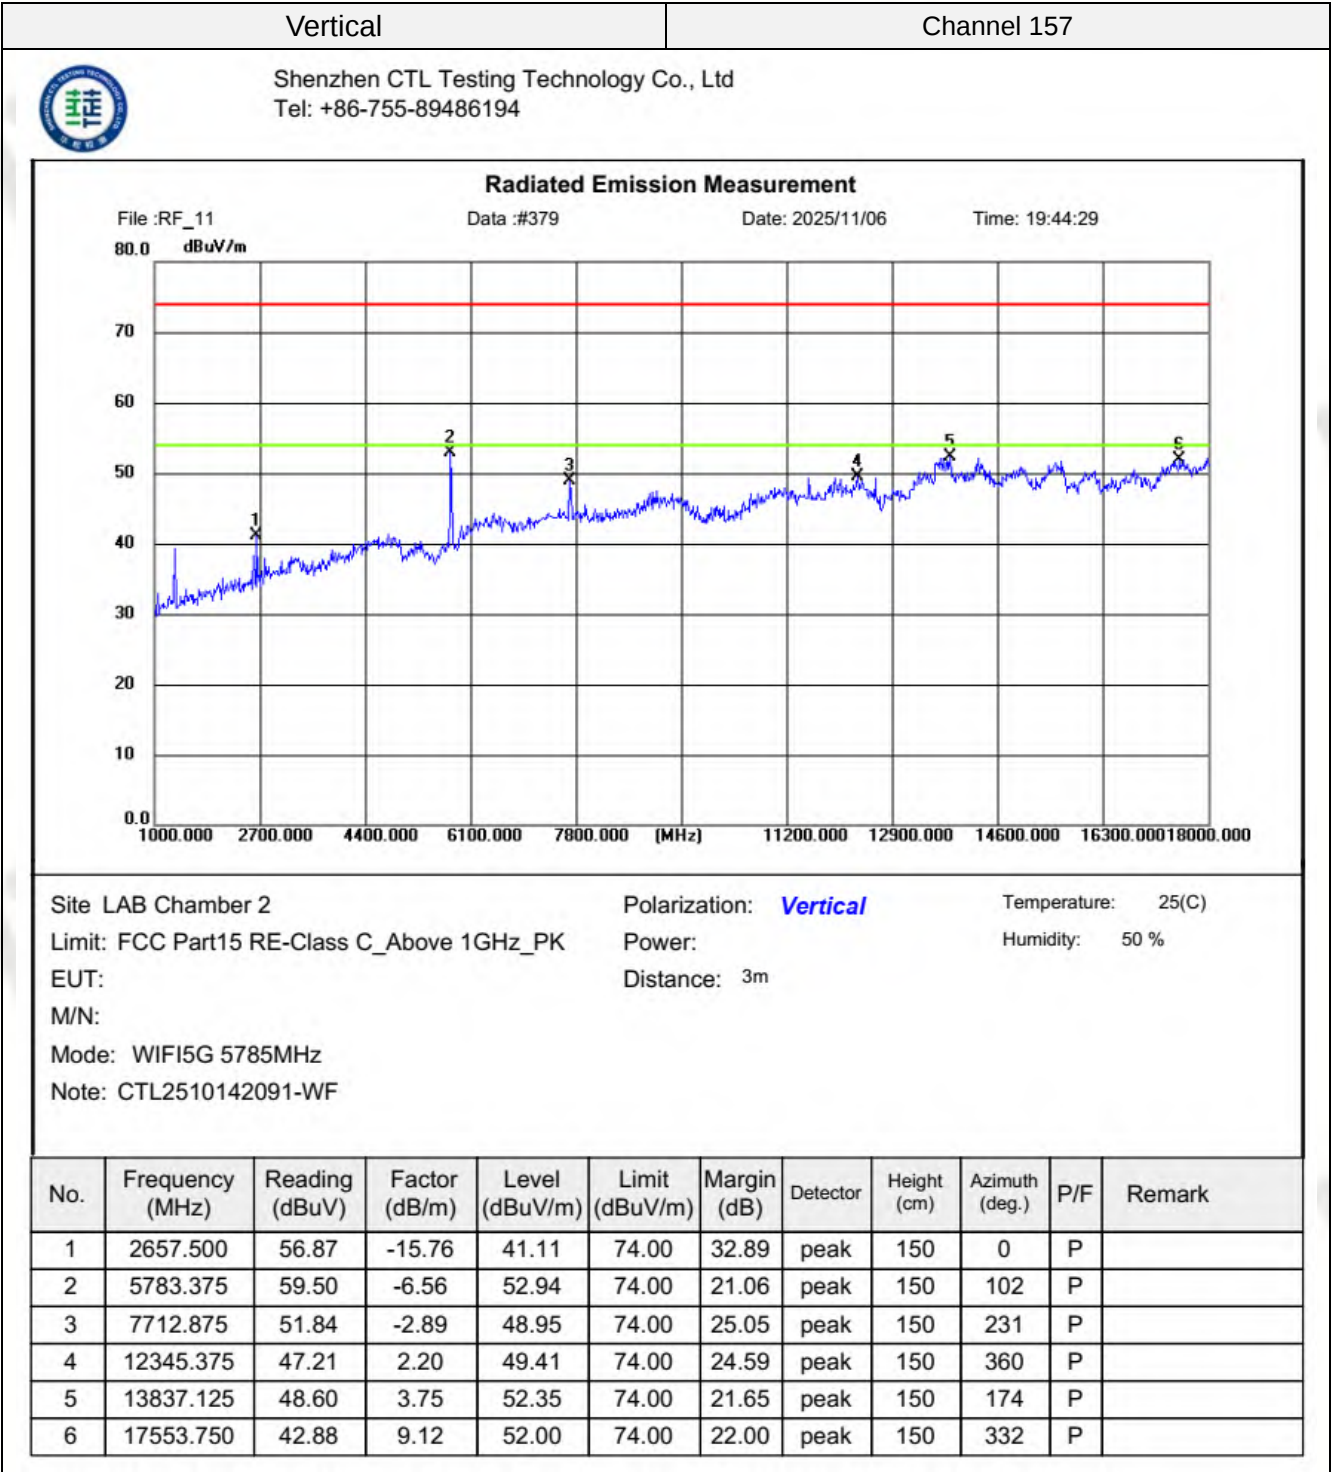

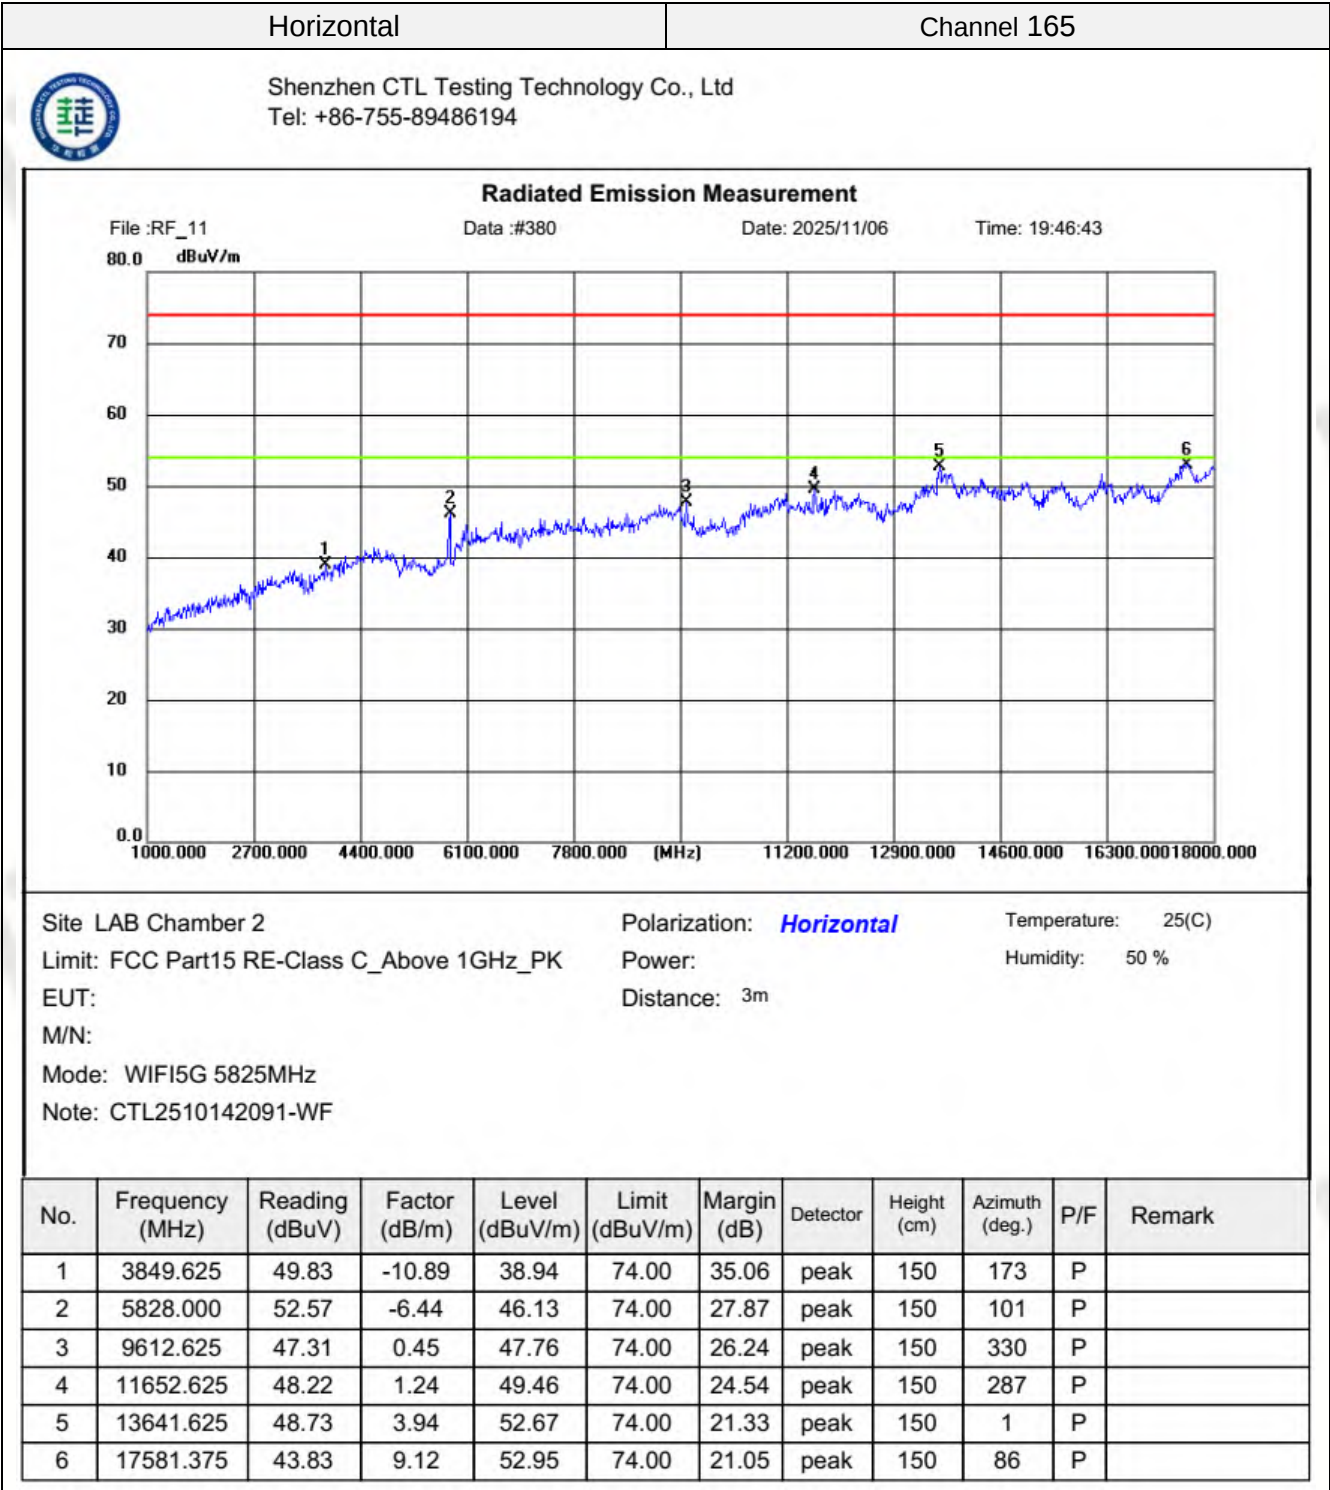

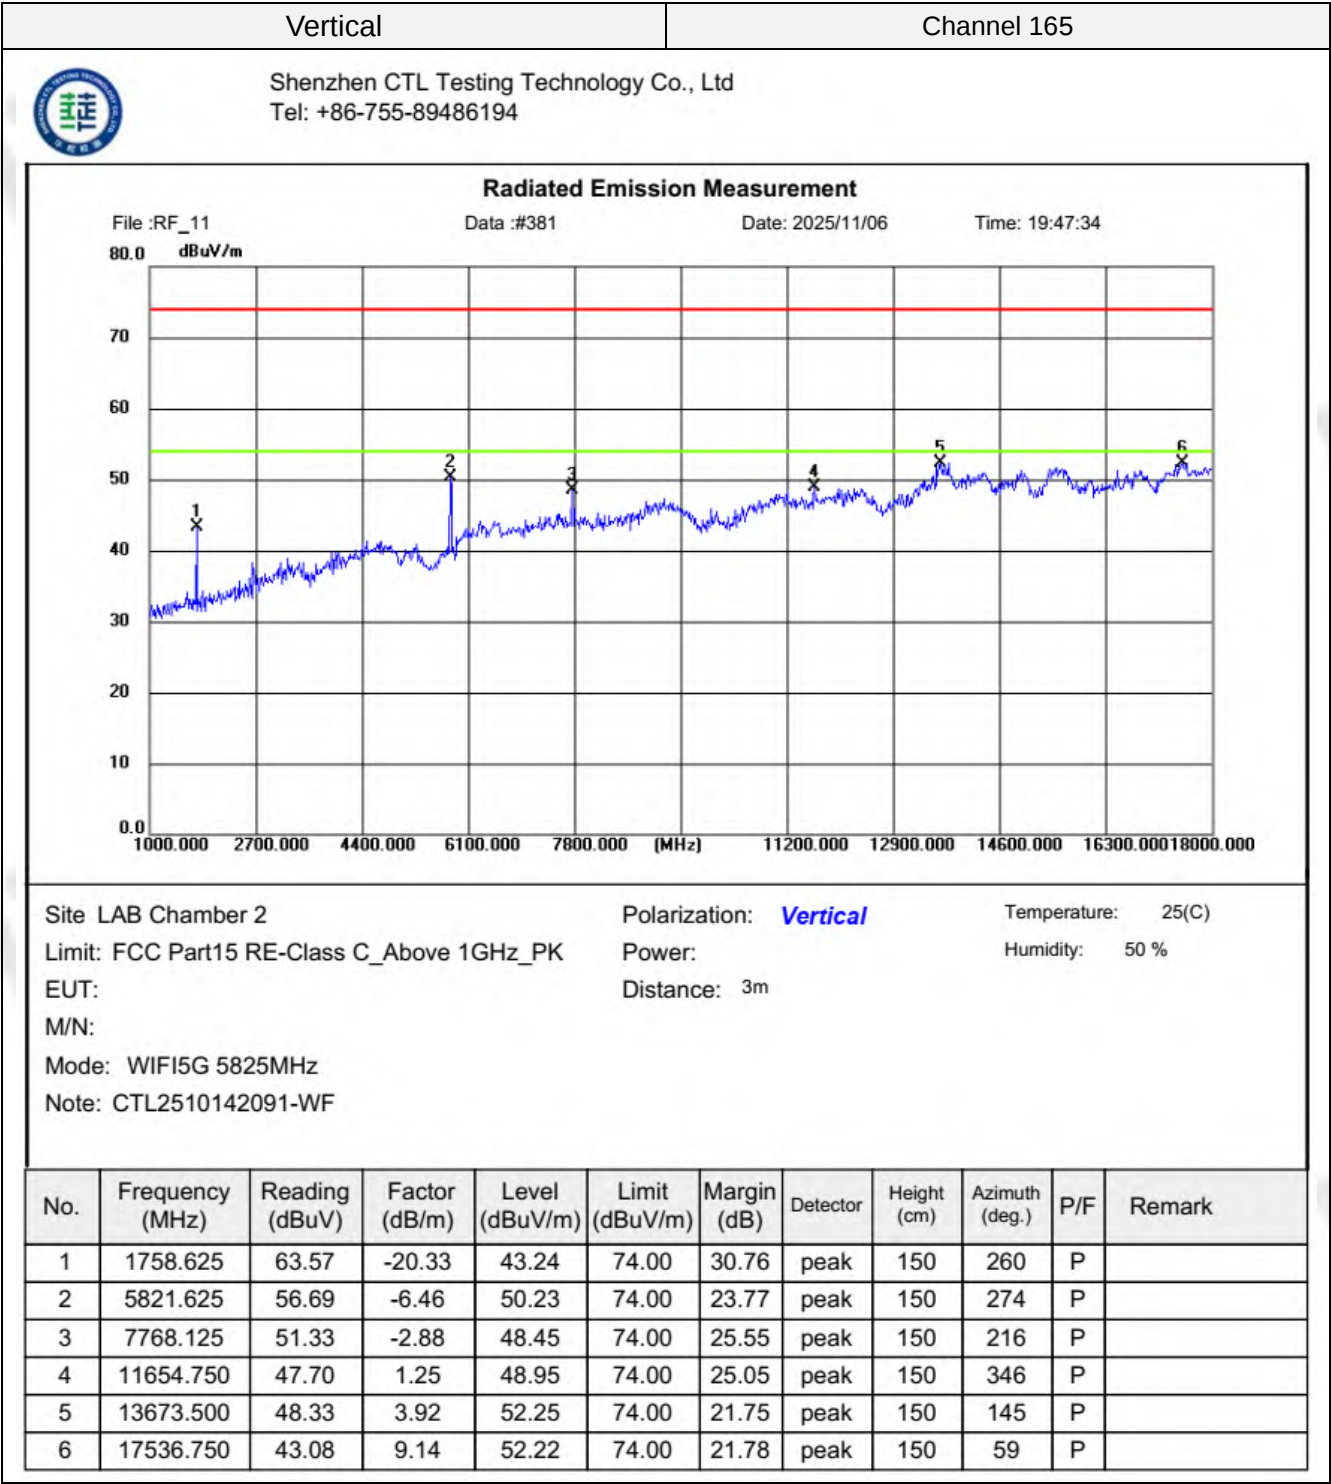


- REMARKS:
- Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
 - Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 - Margin value = Limit value- Emission level.
 - Mean the PK detector measured value is below average limit.
 - RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
 - Other emissions are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.
 - 18GHz-40GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

Band Edge Test Plots of U-NII 1

802.11n (HT20) mode@ Ch36_5180MHz




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

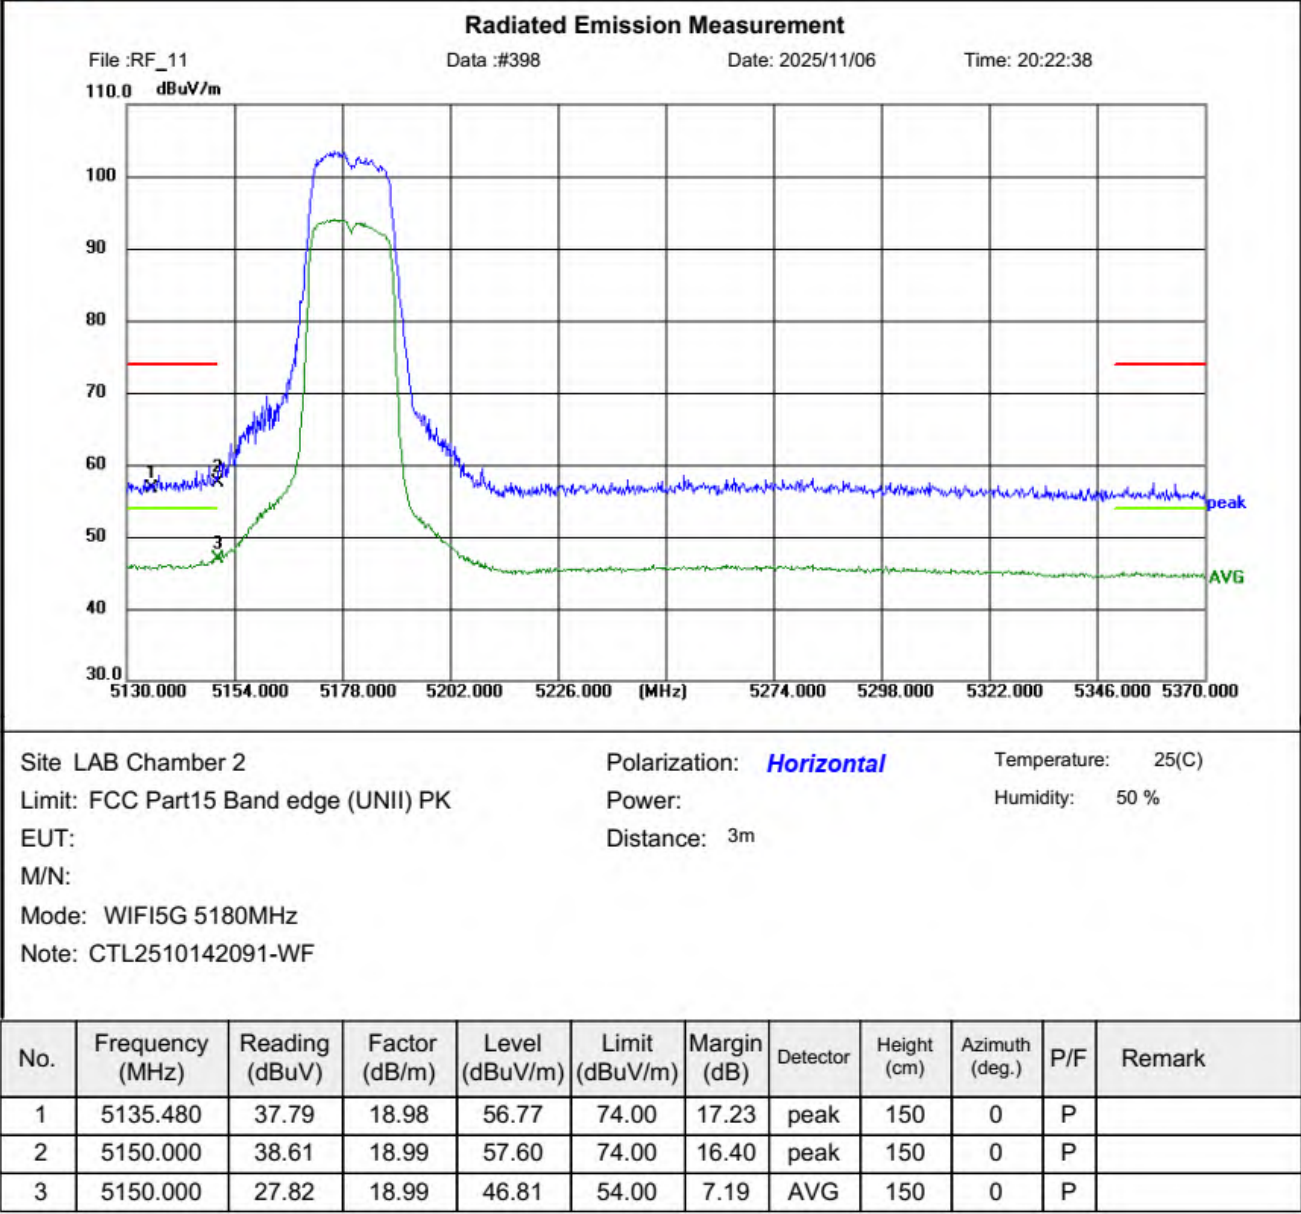



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

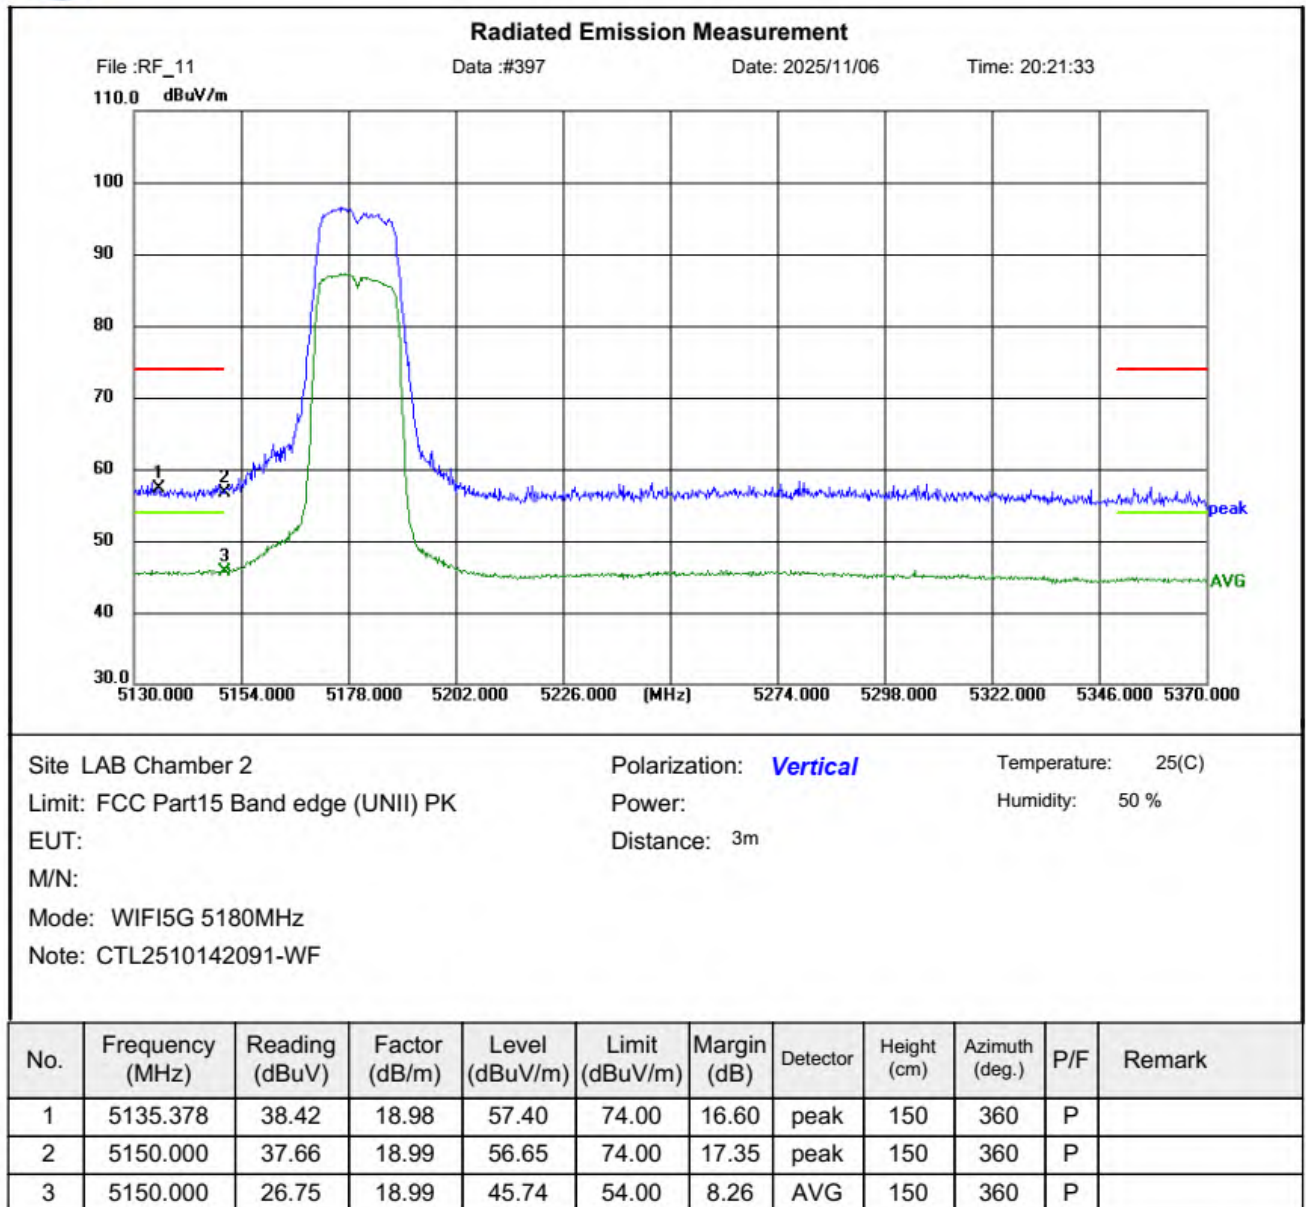


Band Edge Test Plots of U-NII 1

802.11n (HT20) mode@ Ch48_5240MHz



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

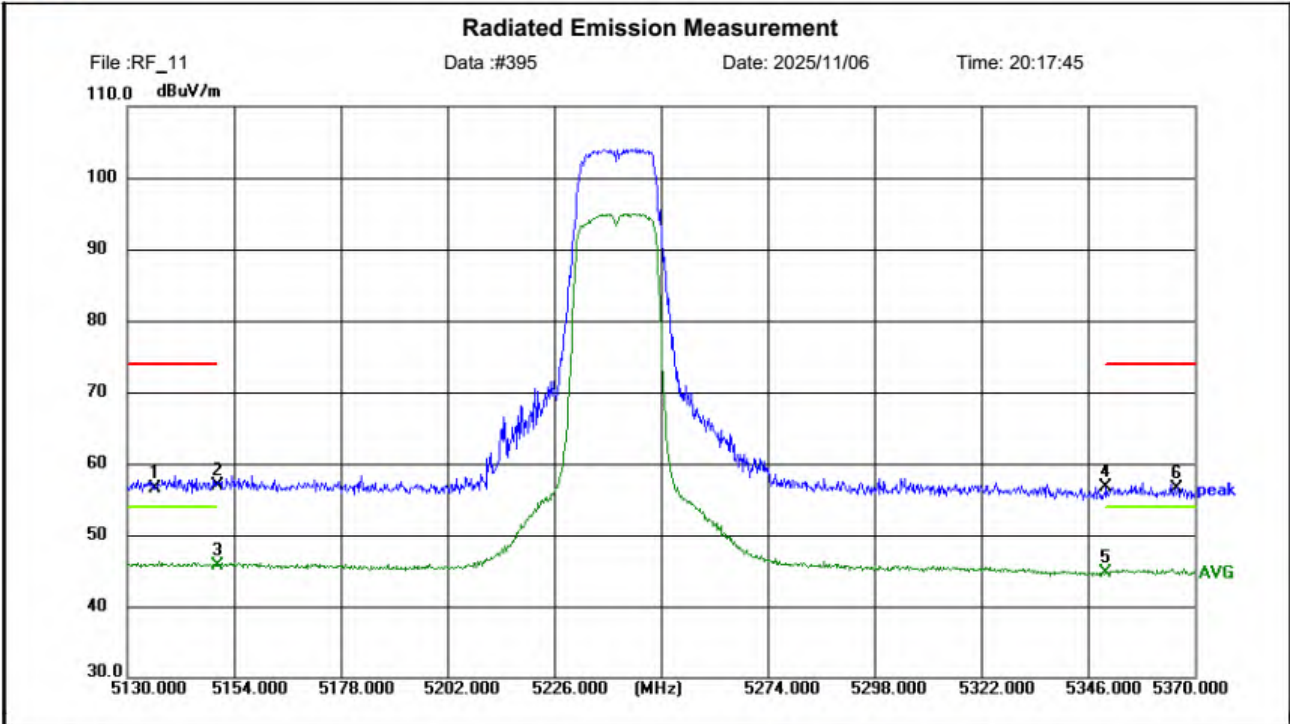


Site LAB Chamber 2
Limit: FCC Part15 Band edge (UNII) PK
EUT:
M/N:
Mode: WIFI5G 5240MHz
Note: CTL2510142091-WF

Polarization: **Horizontal** Temperature: 25(C)
Power: Humidity: 50 %
Distance: 3m

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5136.230	37.44	18.97	56.41	74.00	17.59	peak	150	360	P	
2	5150.000	37.83	18.99	56.82	74.00	17.18	peak	150	360	P	
3	5150.000	26.71	18.99	45.70	54.00	8.30	AVG	150	360	P	
4	5350.000	37.72	18.99	56.71	74.00	17.29	peak	150	360	P	
5	5350.000	25.70	18.99	44.69	54.00	9.31	AVG	150	360	P	
6	5365.745	37.46	18.97	56.43	74.00	17.57	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

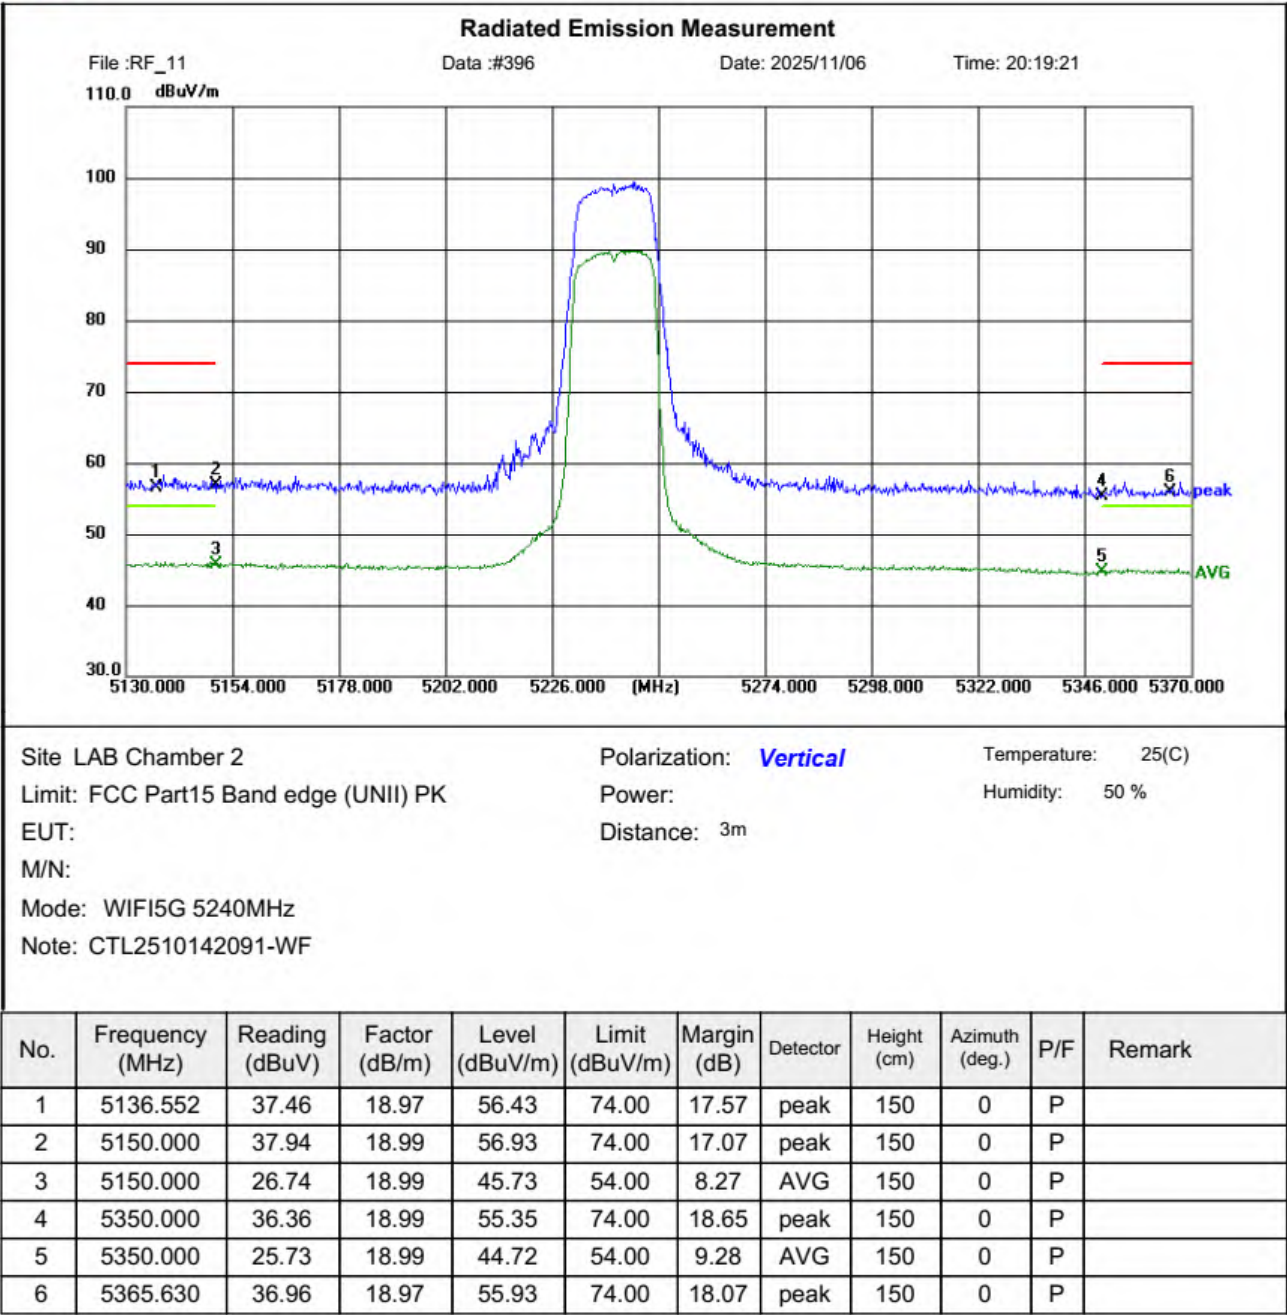


Band Edge Test Plots of U-NII 1

802.11n (HT40) mode@ Ch38_5190MHz




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

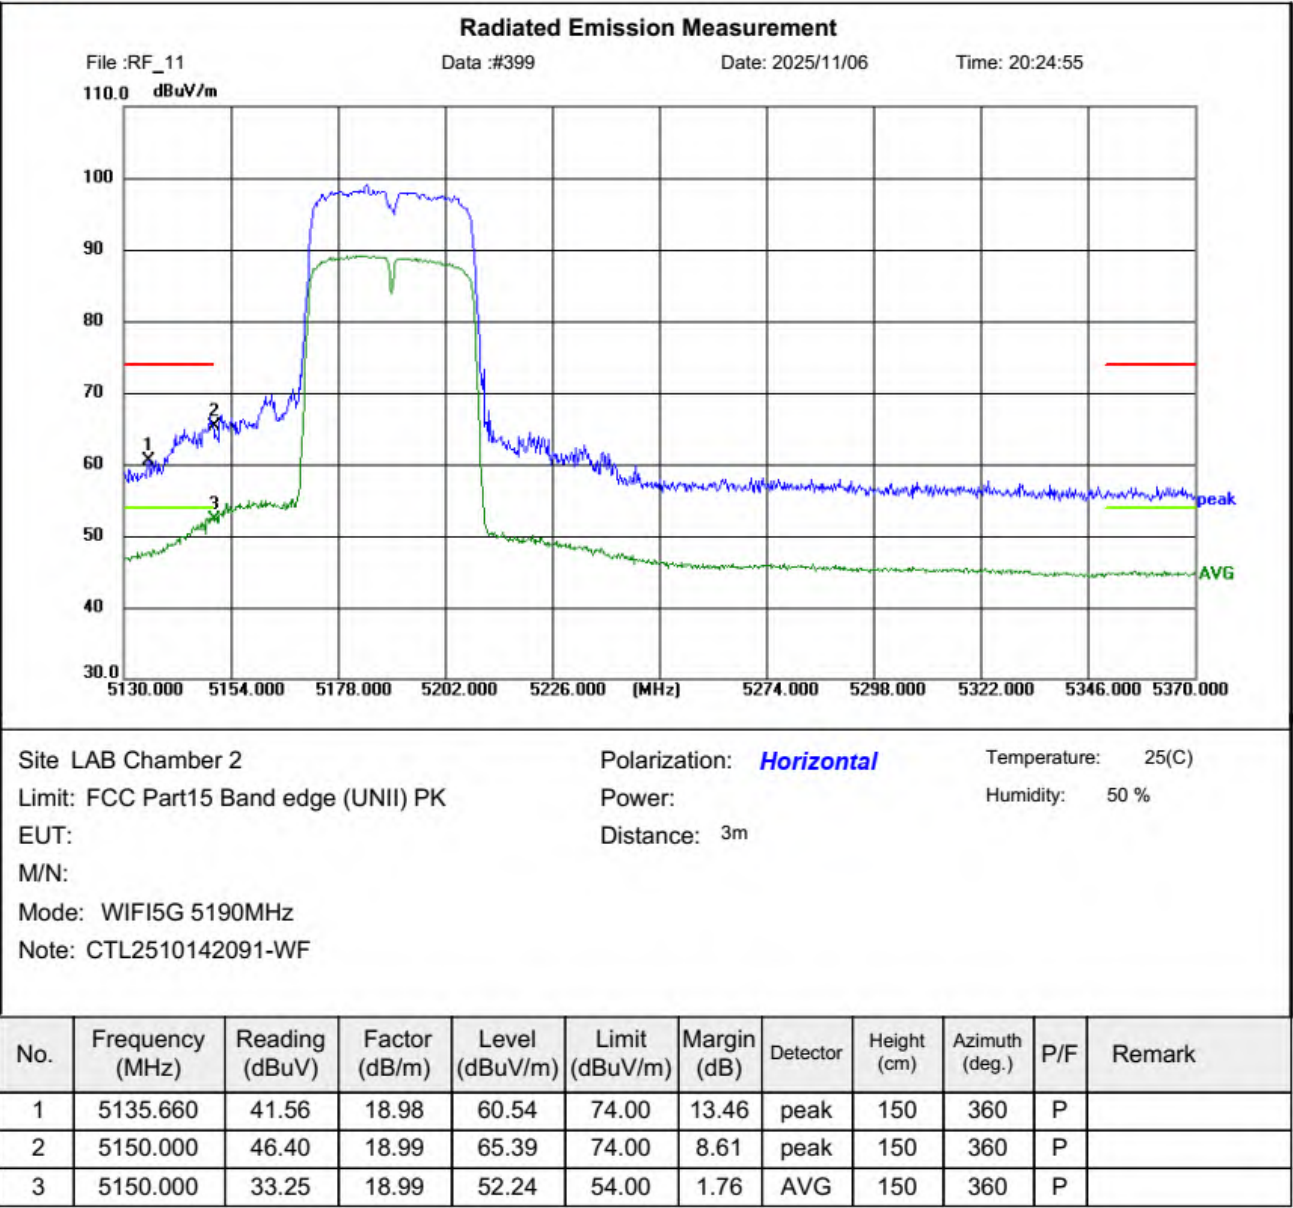



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

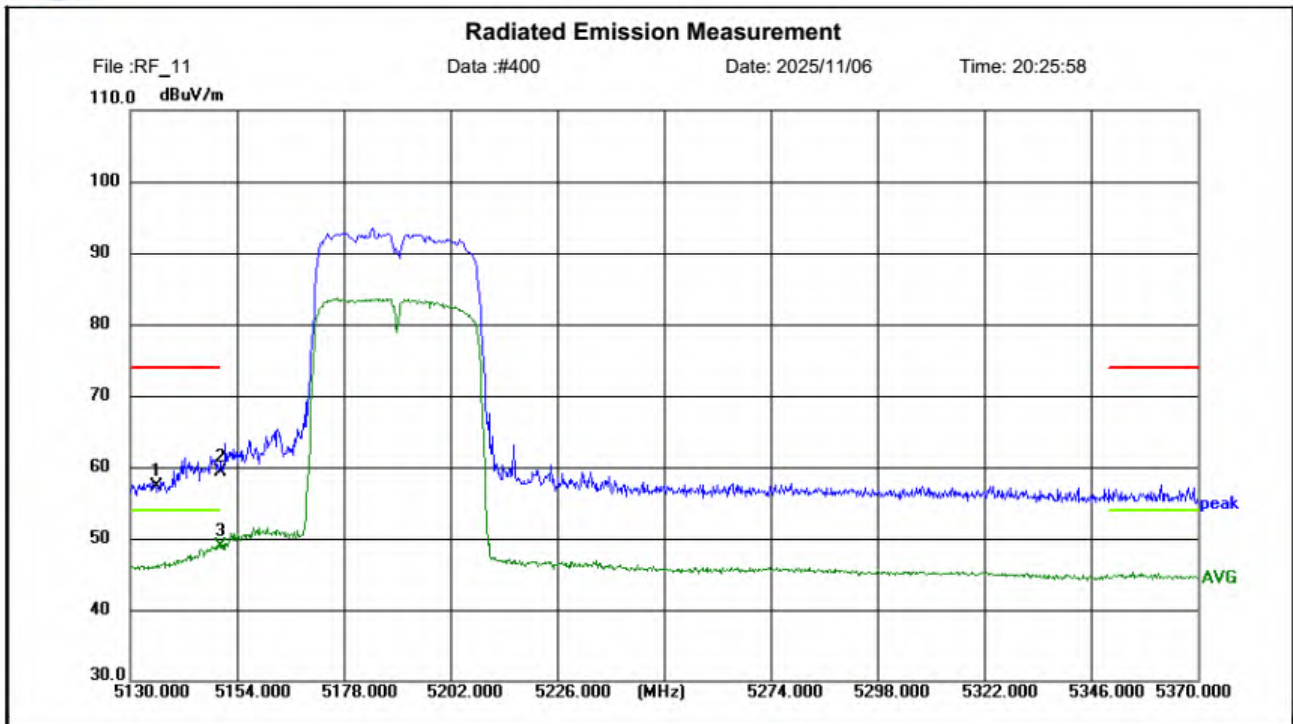

Site LAB Chamber 2
Limit: FCC Part15 Band edge (UNII) PK
EUT:
M/N:
Mode: WIFI5G 5190MHz
Note: CTL2510142091-WF

Polarization: **Vertical**

Temperature: 25(C)

Power:

Humidity: 50 %

Distance: 3m


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5135.660	38.31	18.98	57.29	74.00	16.71	peak	150	0	P	
2	5150.000	40.33	18.99	59.32	74.00	14.68	peak	150	0	P	
3	5150.000	29.97	18.99	48.96	54.00	5.04	AVG	150	0	P	

Band Edge Test Plots of U-NII 1

802.11n (HT40) mode@ Ch46_5230MHz




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

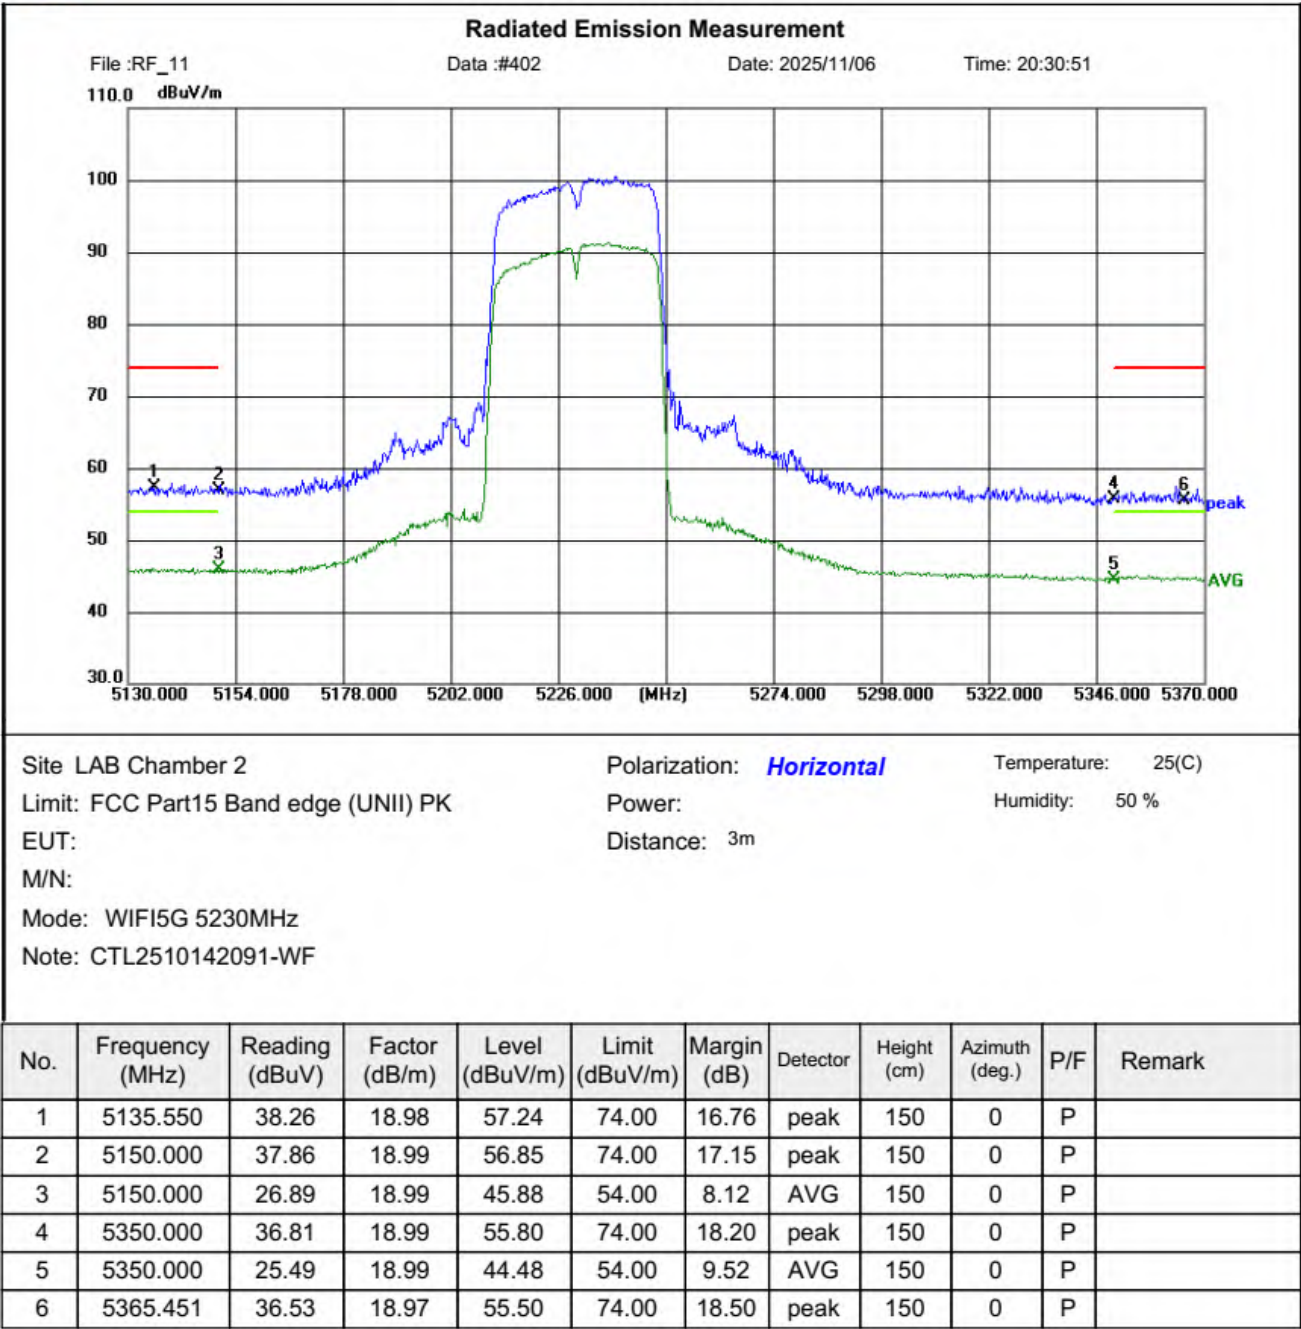



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

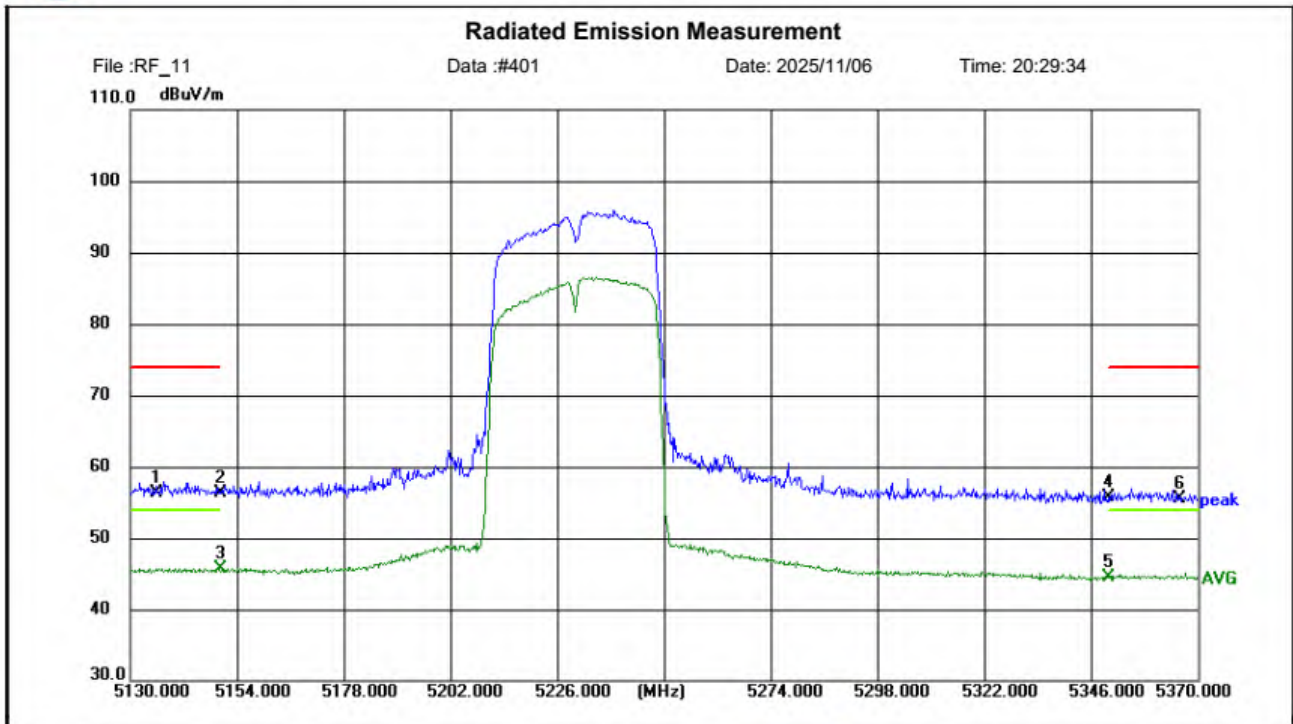

Site LAB Chamber 2
Limit: FCC Part15 Band edge (UNII) PK
EUT:
M/N:
Mode: WIFI5G 5230MHz
Note: CTL2510142091-WF

Polarization: **Vertical**
Power:
Distance: 3m

Temperature: 25(C)
Humidity: 50 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5136.190	37.29	18.97	56.26	74.00	17.74	peak	150	360	P	
2	5150.000	37.40	18.99	56.39	74.00	17.61	peak	150	360	P	
3	5150.000	26.65	18.99	45.64	54.00	8.36	AVG	150	360	P	
4	5350.000	36.76	18.99	55.75	74.00	18.25	peak	150	360	P	
5	5350.000	25.43	18.99	44.42	54.00	9.58	AVG	150	360	P	
6	5365.751	36.45	18.97	55.42	74.00	18.58	peak	150	360	P	

Band Edge Test Plots of U-NII 3

802.11n (HT20) mode@ Ch149_5745MHz




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

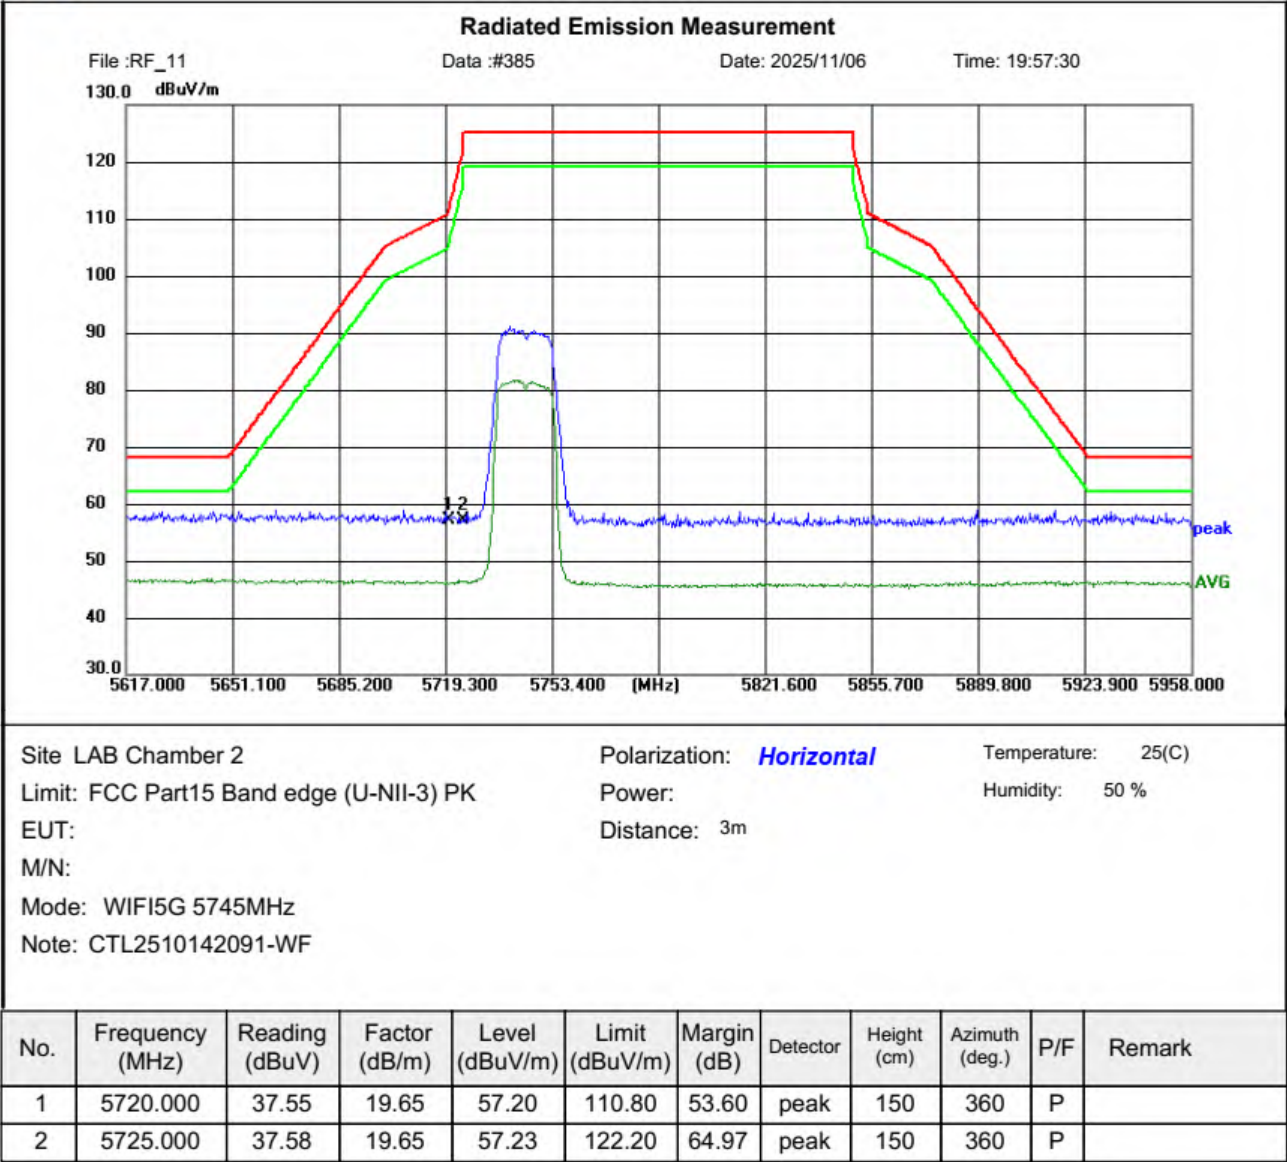



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

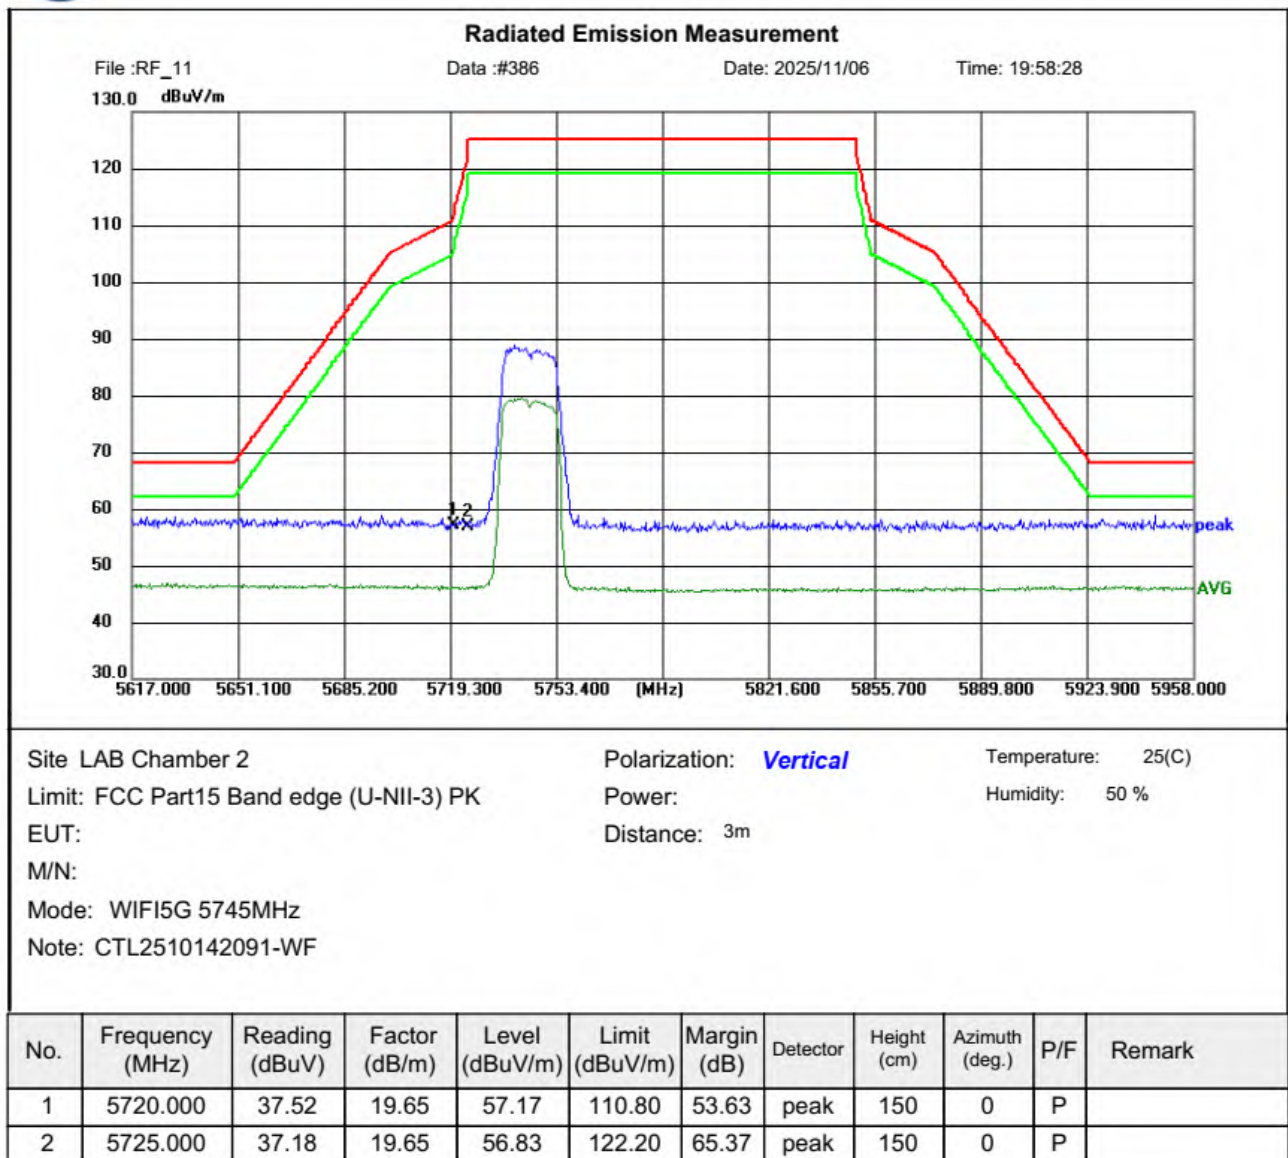


Band Edge Test Plots of U-NII 3

802.11n (HT20) mode@ Ch165_5825MHz



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

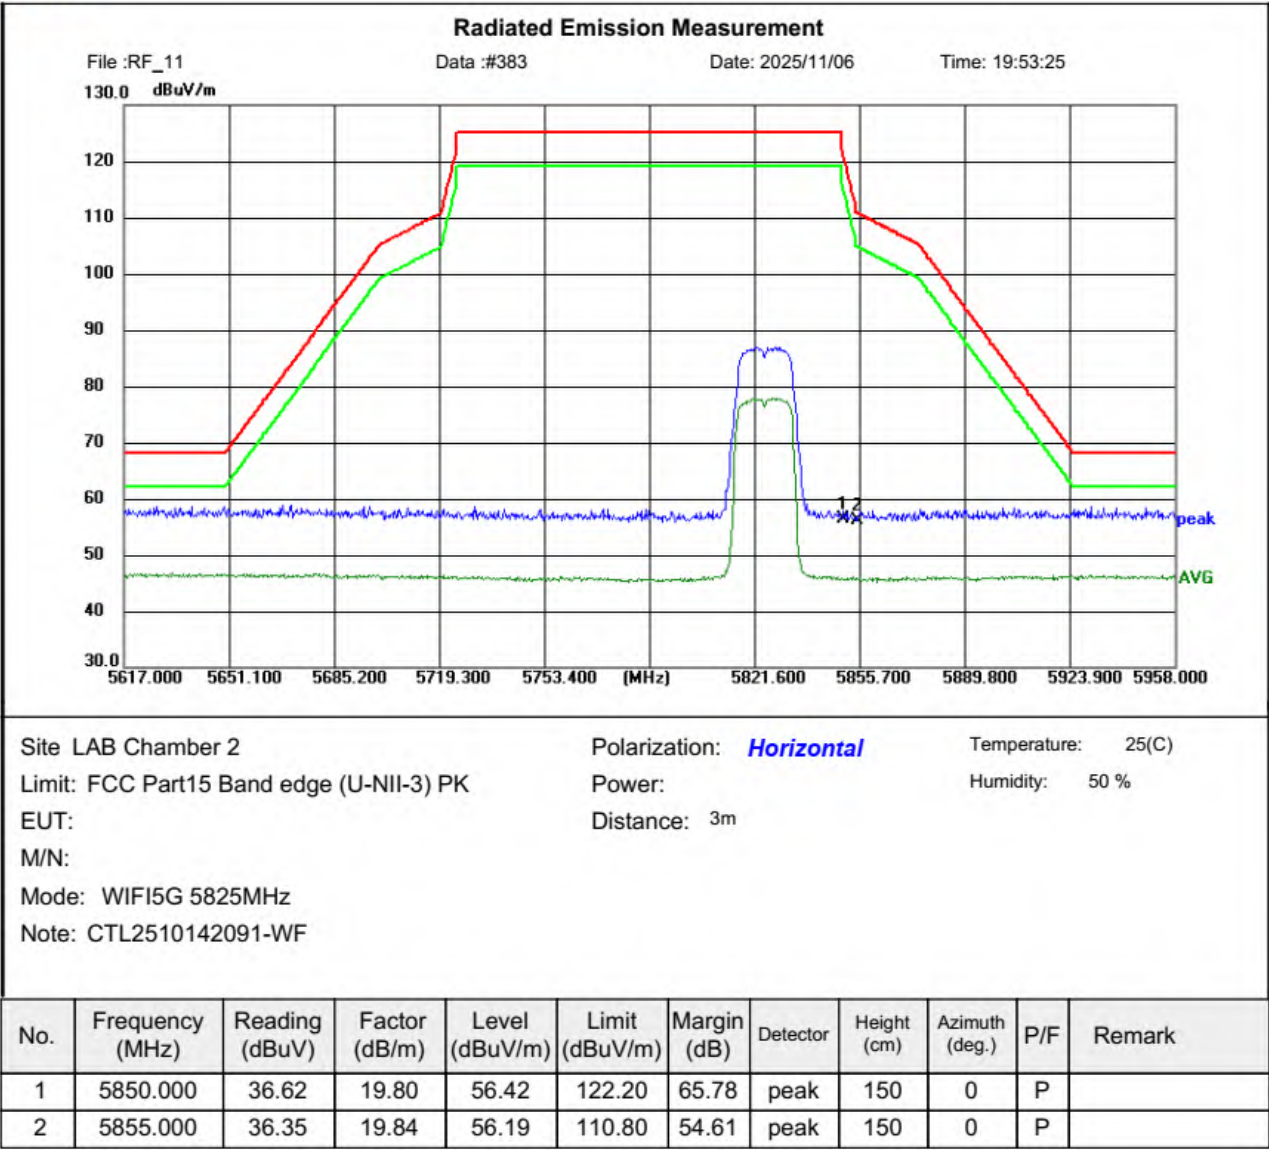


Band Edge Test Plots of U-NII 3

802.11n (HT40) mode@ Ch151_5755MHz



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

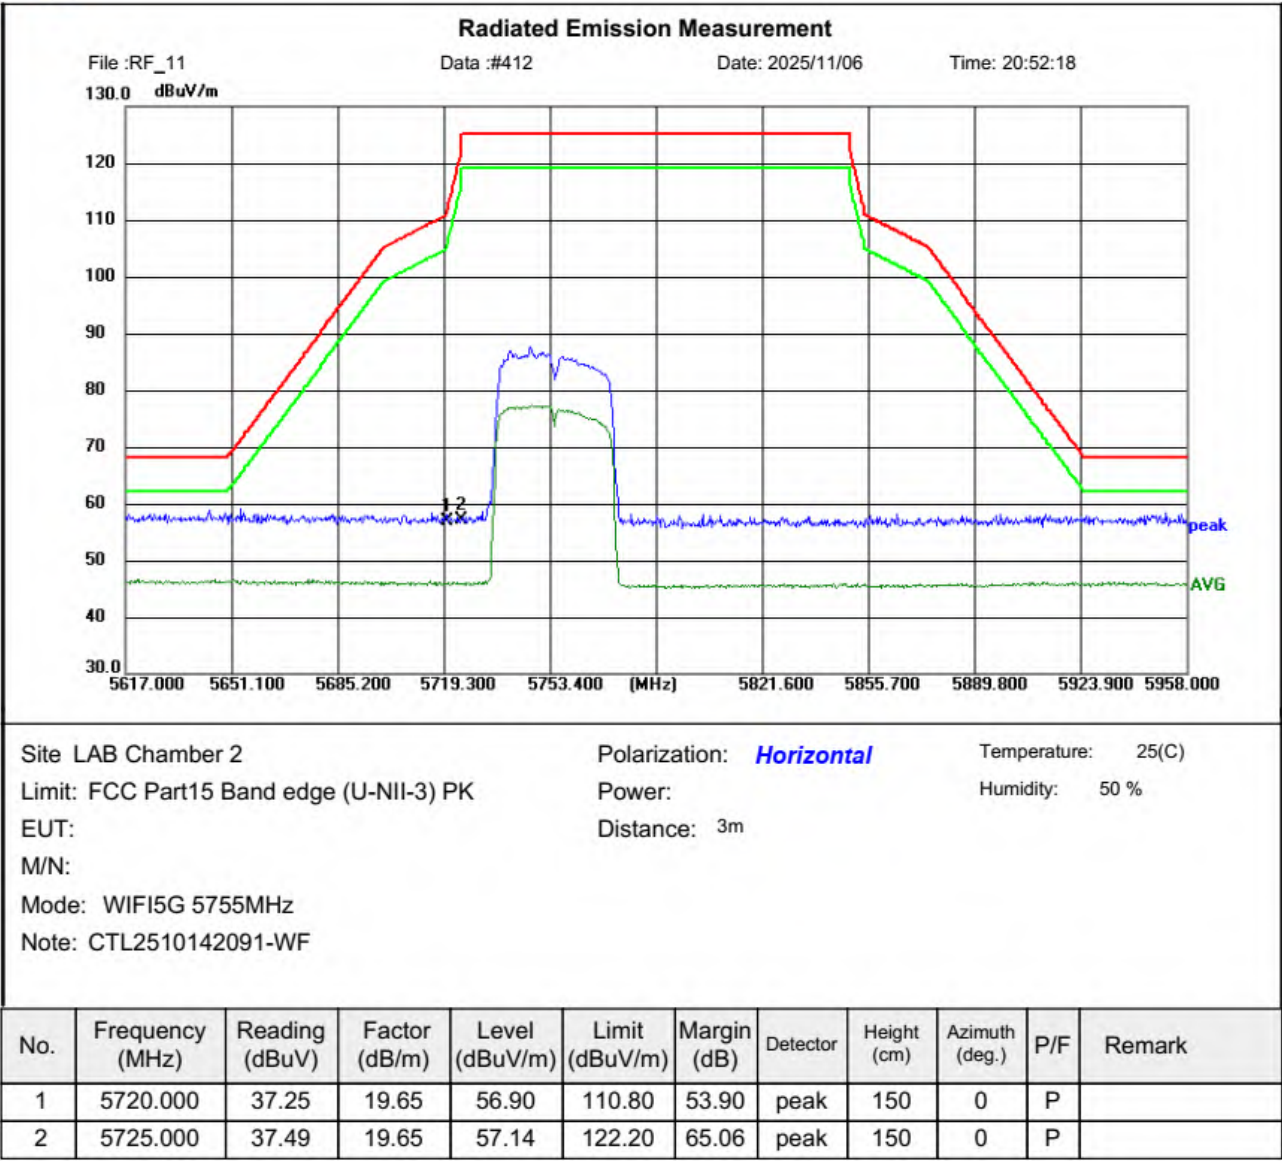


Band Edge Test Plots of U-NII 3

802.11n (HT40) mode@ Ch159_5795MHz




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

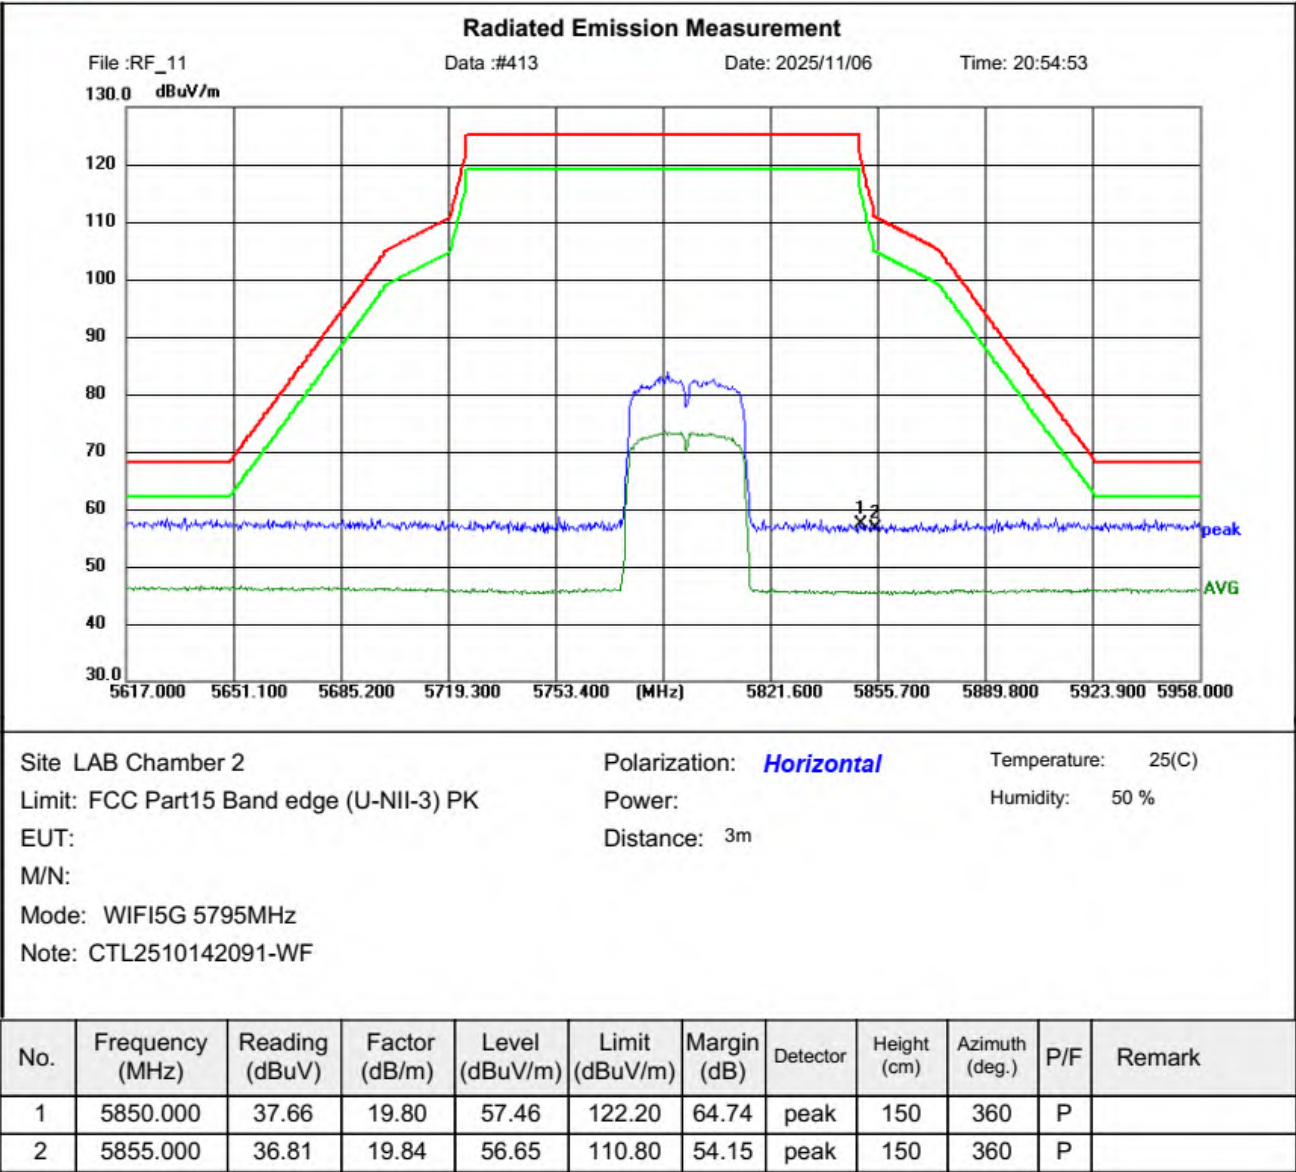



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

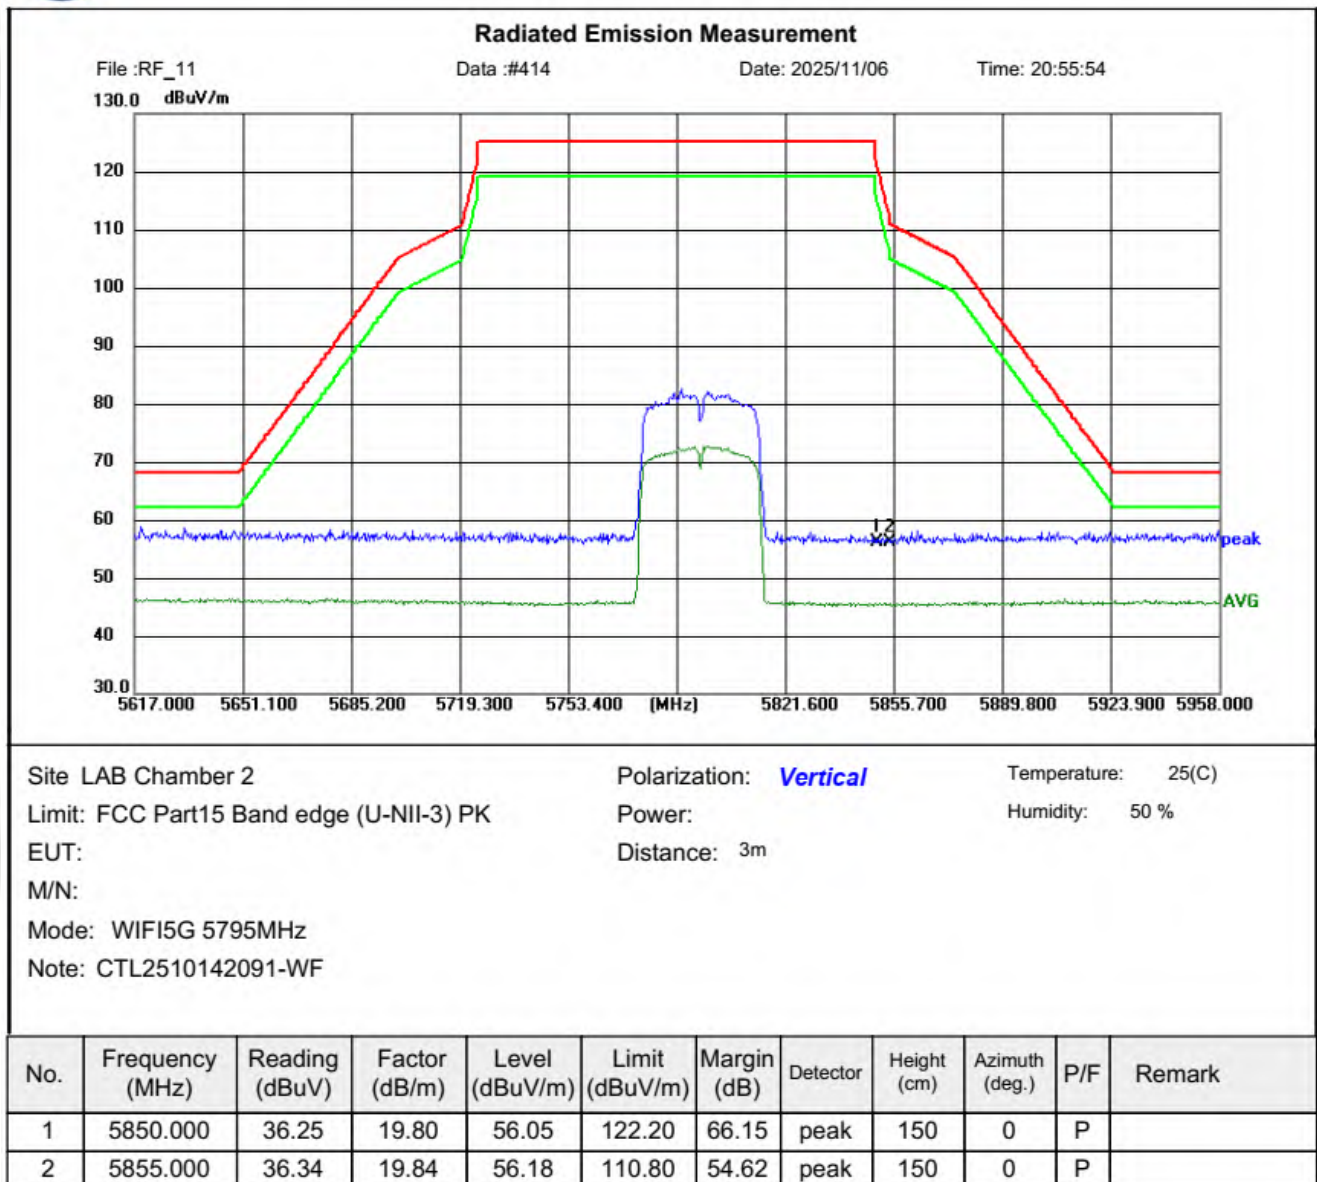

3.3. Maximum Conducted Average Output Power

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi.
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10\log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration



Test Results

Raw data reference to CTL2510142091-WF_5G_Band_1_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_2A_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_2C_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_3_UNII_Appendix.

3.4. Power Spectral Density

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17dBm in any 1 MHz band. ^{note1}
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17dBm in any 1 MHz band. ^{note1}
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 MHz band. ^{note1}

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

The maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

IC requirement:

For the band 5.15-5.25 GHz.

The e.i.r.p. spectral density shall not exceed 10dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

The power spectral density shall not exceed 11dBm in any 1.0 MHz band

Frequency bands 5470-5600 MHz and 5650-5725 MHz

The power spectral density shall not exceed 11dBm in any 1.0 MHz band.

For the band 5.725 - 5.85 GHz


The maximum power spectral density shall not exceed 30dBm in any 500 kHz band. ^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = Average.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration**Test Results**

Raw data reference to CTL2510142091-WF_5G_Band_1_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_2A_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_2C_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_3_UNII_Appendix.

3.5. Emission Bandwidth (26dBm Bandwidth)


Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

Raw data reference to CTL2510142091-WF_5G_Band_1_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_2A_UNII_Appendix.
Raw data reference to CTL2510142091-WF_5G_Band_2C_UNII_Appendix.

3.6. Minimum Emission Bandwidth (6dBm Bandwidth)


Limit

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725-5.85 GHz

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


Raw data reference to CTL2510142091-WF_5G_Band_3_UNII_Appendix.

3.7. Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

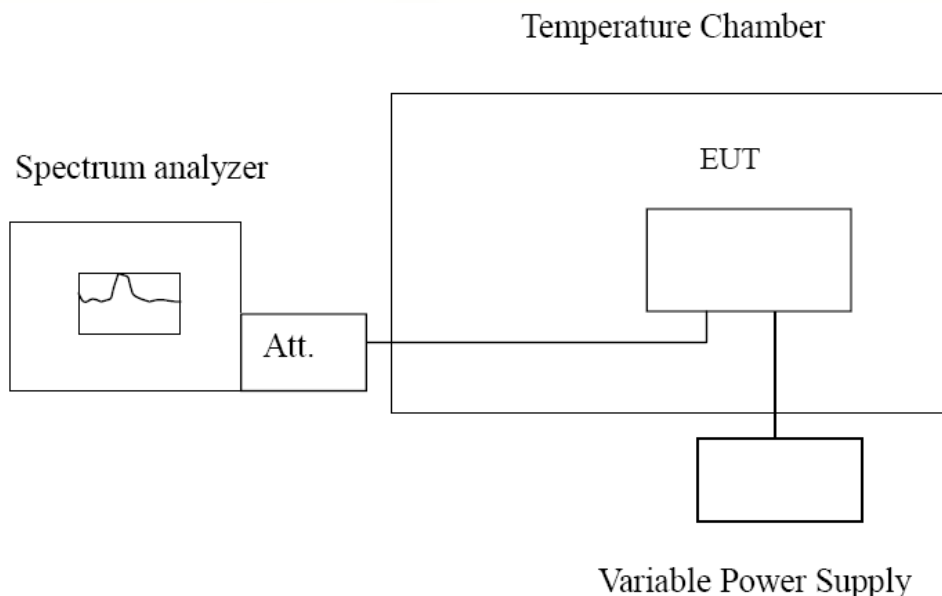

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +85°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Raw data reference to CTL2510142091-WF_5G_Band_1_UNII_Appendix.

Raw data reference to CTL2510142091-WF_5G_Band_2A_UNII_Appendix.

Raw data reference to CTL2510142091-WF_5G_Band_2C_UNII_Appendix.

Raw data reference to CTL2510142091-WF_5G_Band_3_UNII_Appendix.

3.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

Antenna: PCB Antenna

5180MHz-5240MHz:

Antenna: 1.97 dBi

5260MHz-5320MHz:


Antenna: 1.97dBi

5500MHz-5700MHz:


Antenna: 1.60dBi


5745MHz-5825MHz:

Antenna: -0.76 dBi

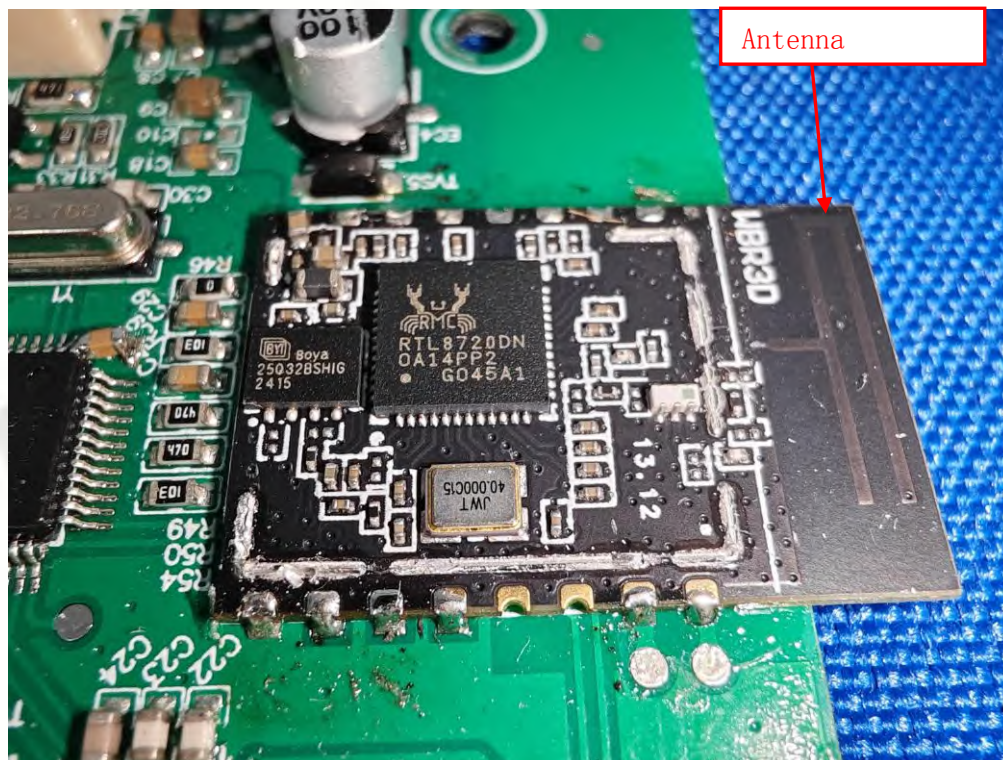

4. Test Setup Photos of the EUT

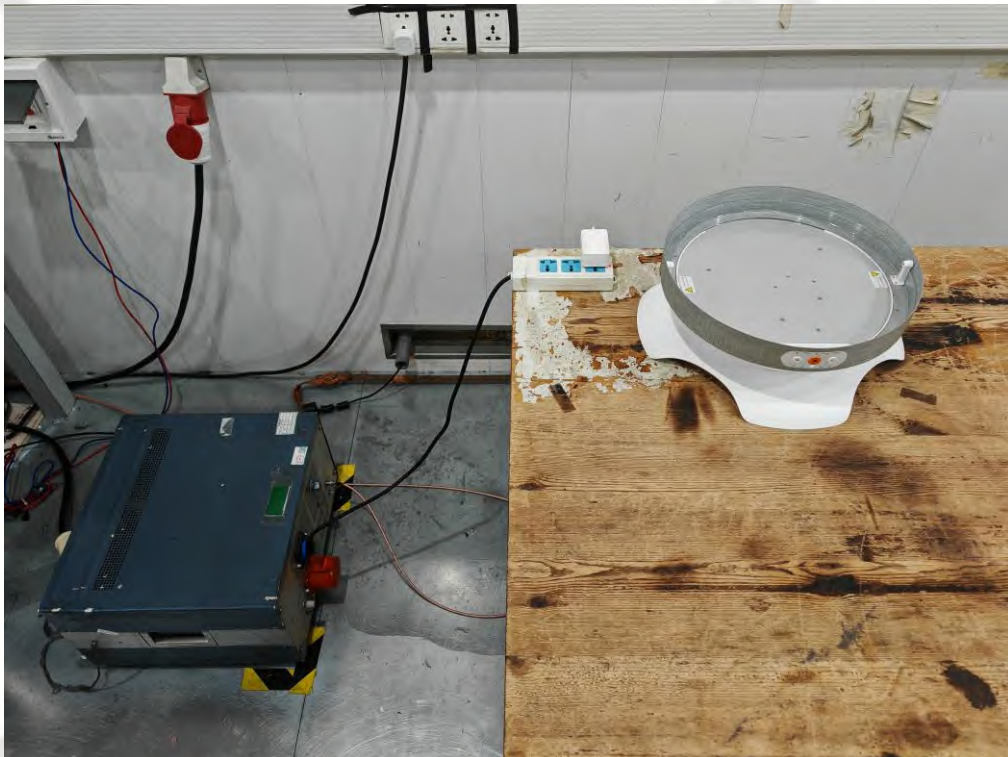

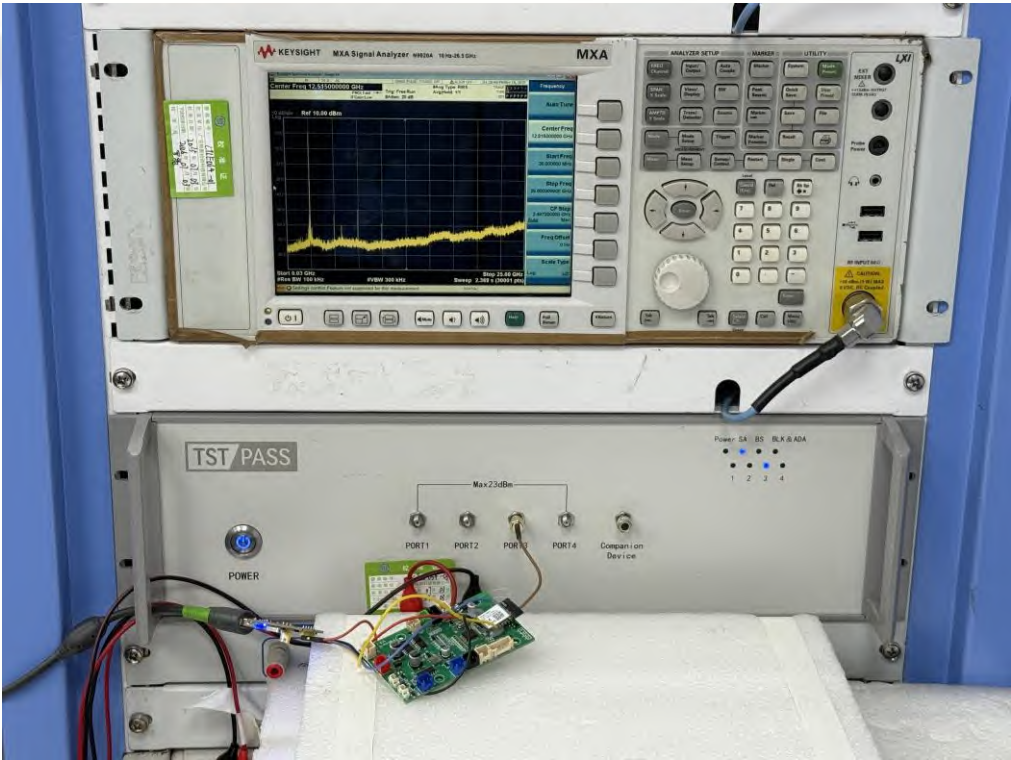

5. Photos of the EUT

Reference to the test report No.CTL2510142091-WF01.

***** End of Report *****